



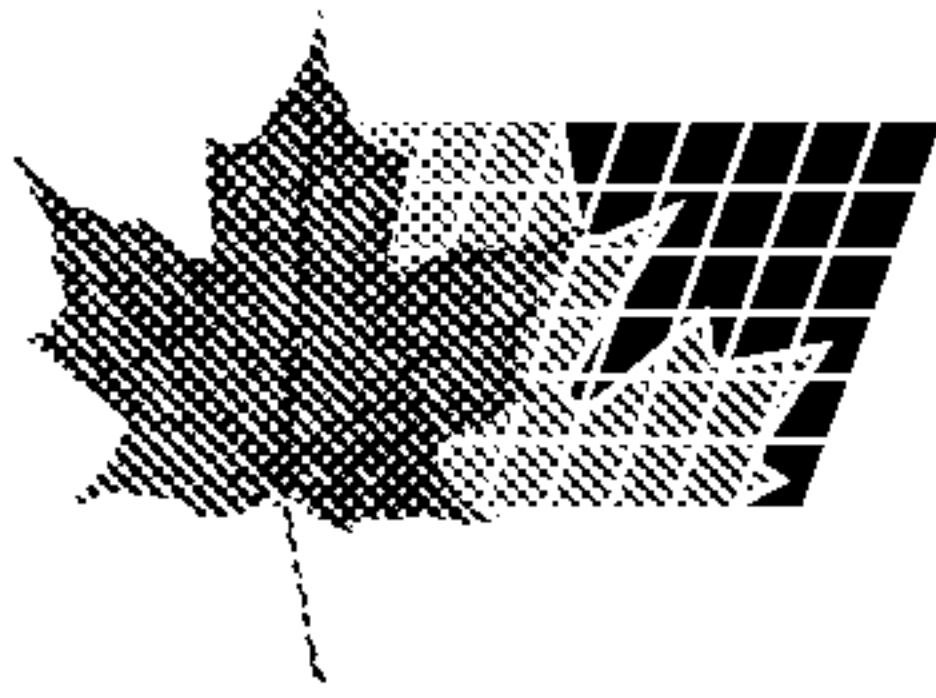

(11) (21) (C) **2,205,533**
(22) 1994/02/03
(43) 1994/10/24
(45) 2000/05/16
(62) 2,114,891
(22) 1994/02/03

(72) LUKIC, Goran, CH
(73) SCHNEIDER (EUROPE) GmbH, CH
(51) Int.Cl.⁶ A61F 2/04
(30) 1993/04/23 (93106646.8) EP
(54) **FABRICATION D'EXTENSEURS**
(54) **STENT FABRICATION**

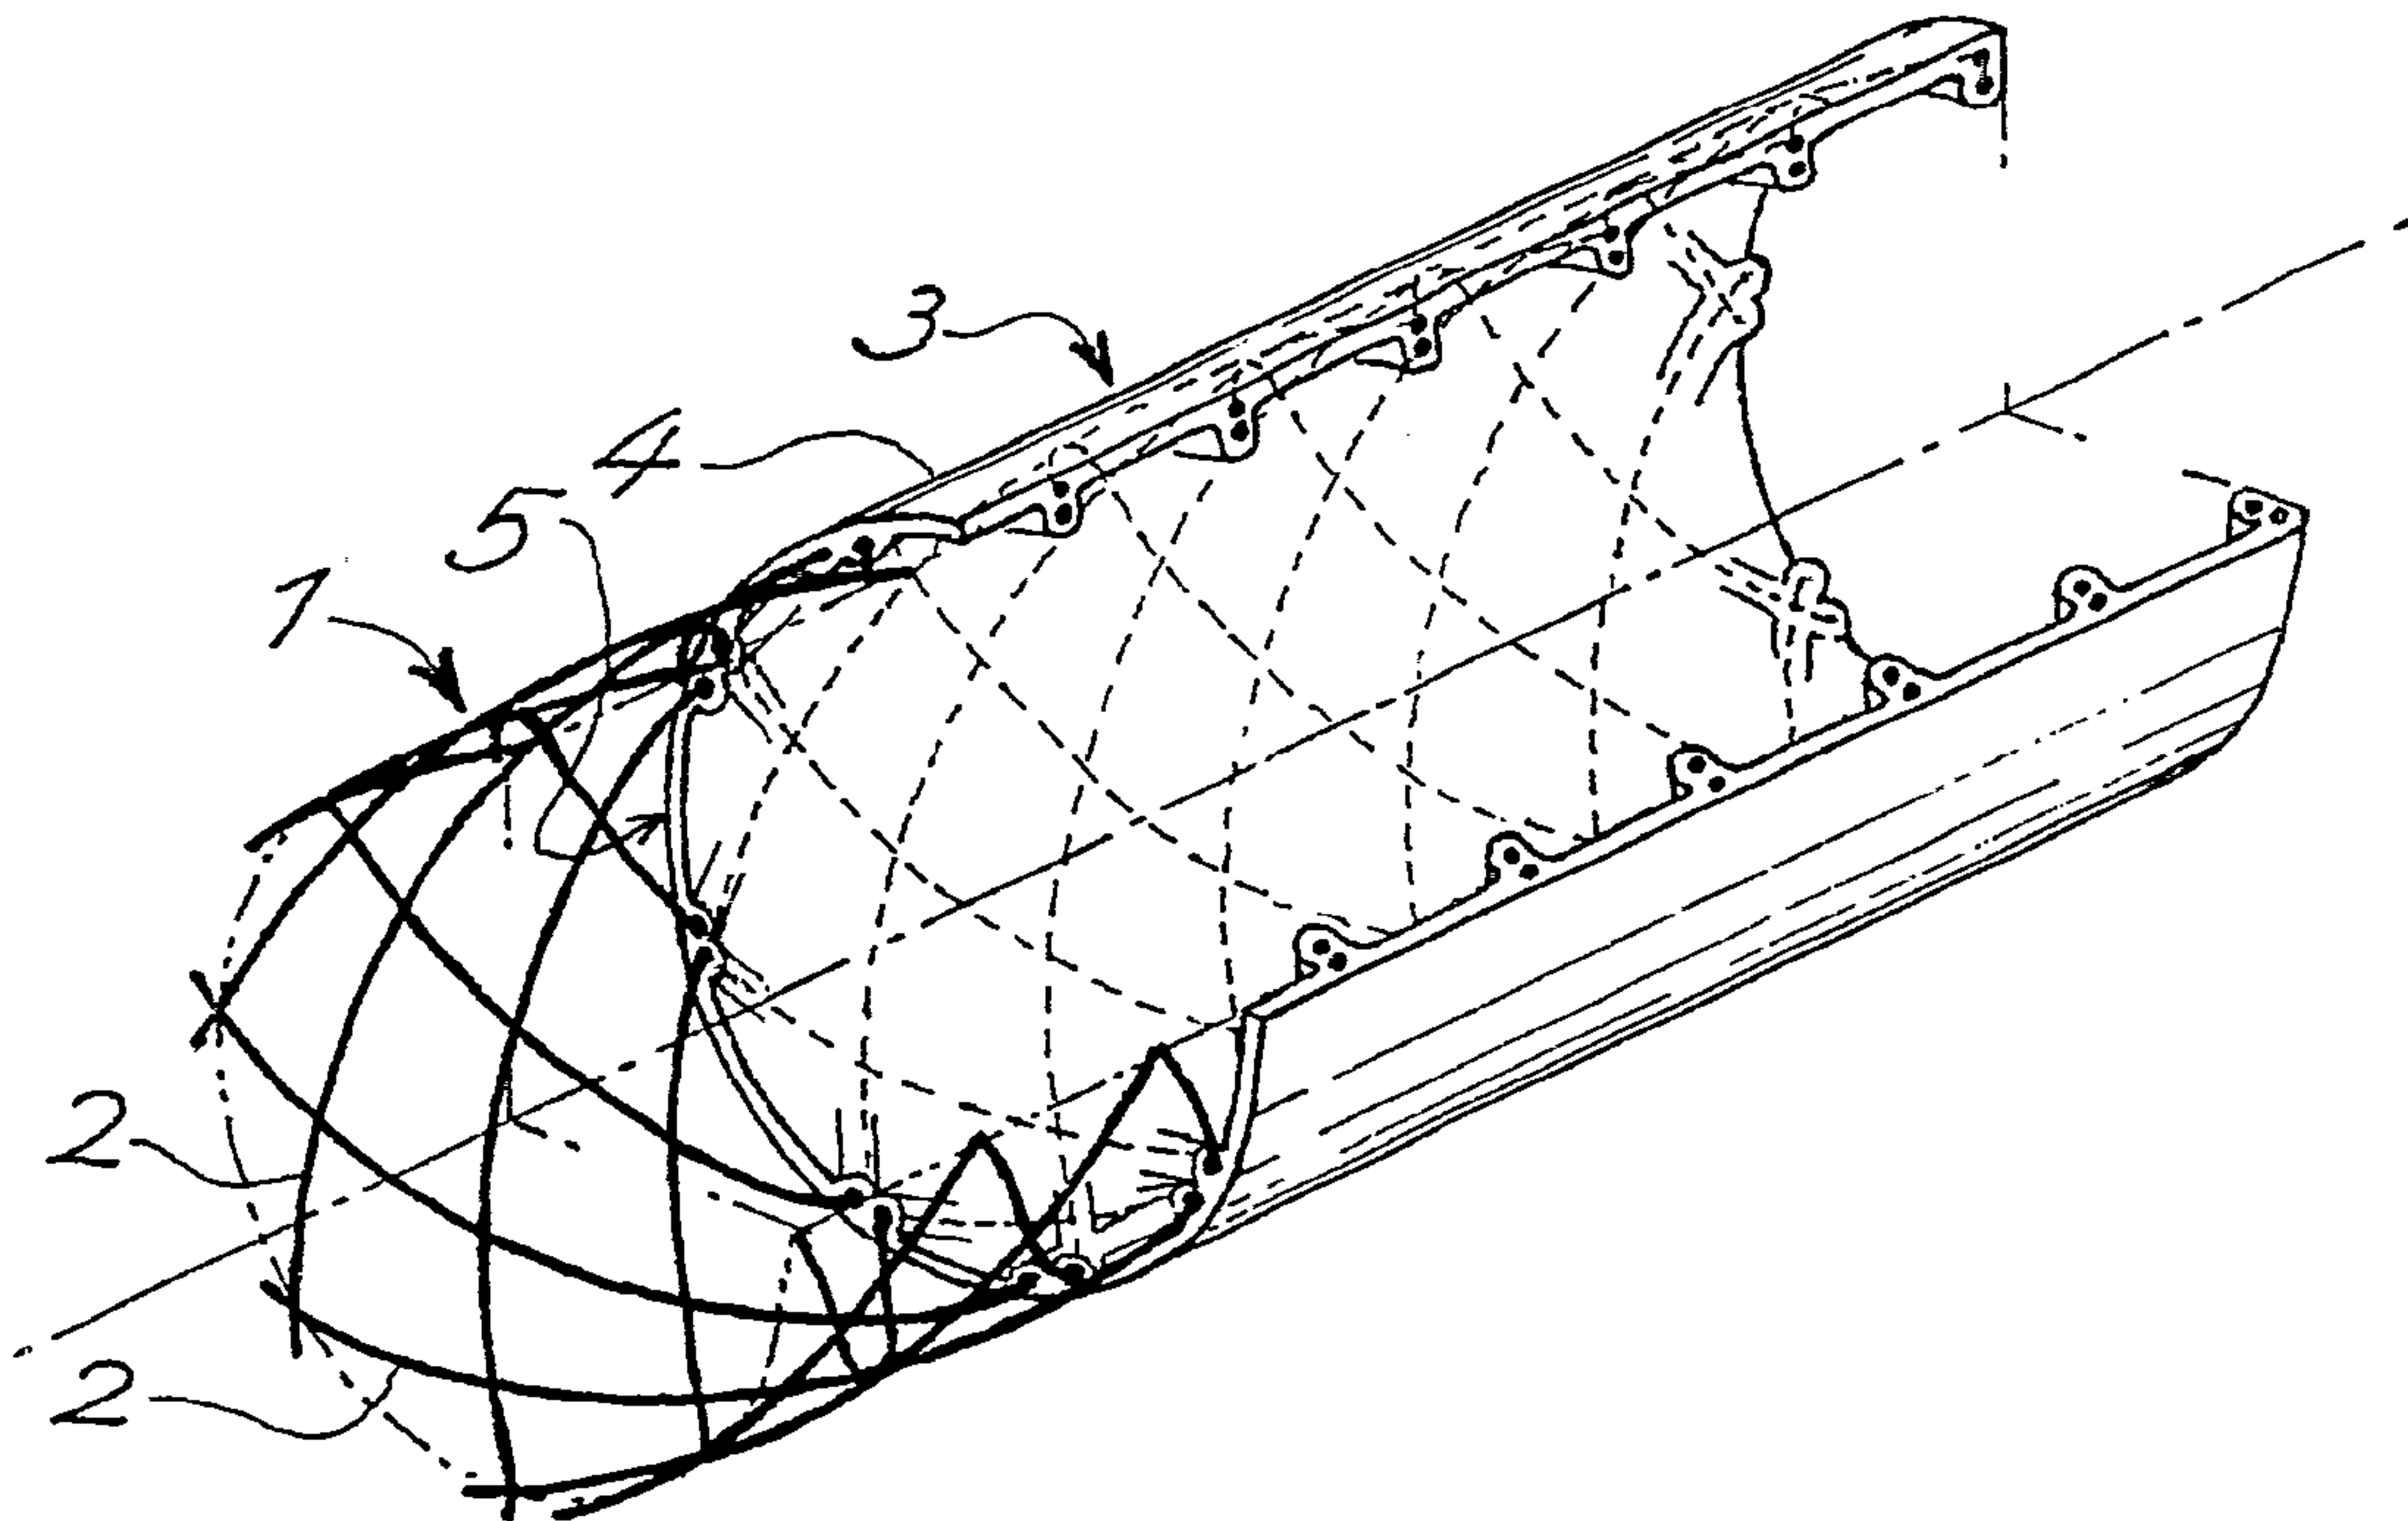

(57) On recouvre un extenseur en préparant un tube de longueur prédéterminée, constitué d'une composition élastomère polymérisable, l'intérieur du tube étant revêtu d'un milieu adhésif. L'extenseur est ensuite contracté radialement, inséré dans le tube, puis relâché radialement à l'intérieur de ce dernier. Enfin, on laisse durcir le milieu adhésif.

(57) Applying a covering layer to a stent is done by forming a tube of predetermined length with an elastomeric polymerisable composition, and coating the inside of the tube with an adhesive medium. The stent is then radially contracted, inserted into the tube, and allowed to radially expand in the tube. The adhesive medium is then allowed to cure.

ABSTRACT

Applying a covering layer to a stent is done by forming a tube of predetermined length with an elastomeric polymerisable composition, and coating the inside of the tube with an adhesive medium. The stent is then radially contracted, inserted into the tube, and allowed to radially expand in the tube. The adhesive medium is then allowed to cure.

This is a division of our co-pending Canadian Patent Application No. 2,114,891 filed February 3, 1994.

This invention relates to the making of a stent with a discontinuous expandable wall comprising on at least a portion of its length a continuous covering layer of elastic material with an outer surface surrounding the discontinuous wall.

10 The discontinuous walls of stents, such as for instance the macroporous walls formed by a deformable wire mesh allowing diametral retraction for introduction of the stent into air or food pipes and expansion therein for dilatation, or repair, or bridging of said pipes, have the disadvantage that they permit ingrowth of tumors and other rapid growth cells through the wire mesh or discontinuous wall, with the resulting risk of stent occlusion.

20 For preventing ingrowth of cells through the stent, the document DE-3918736-A1 describes an expandable metallic stent with an inner teflon tube affixed to the stent by suture or pressure, or an inner tube and an outer tube, both of teflon, connected pouch like to each other. At least in case of degradation of the inner tube, there will be a strong risk of having flaps from the inner tube occluding the vessel, or migration of the inner tube with respect to the stent and a further risk of occlusion of the vessel. Furthermore, the absence of resiliency of teflon does not allow constriction and expansion of the stent without additional place consuming measures such as zig-zag folds of the teflon tubes.

The document "Endoscopy 1992 : 416-420" also describes an expandable metallic stent for preventing ingrowth of malignant structures. This stent, formed by an expandable wire mesh, is covered by a silicone membrane or skirt which surrounds a portion of its length. This membrane or skirt is secured around the stent by suture of its ends to the wire mesh, and, in situ, the membrane is thus radially held in place between the stent wall and vessel wall. To have the membrane or skirt positioned between the stent wall and vessel wall is advantageous in case of degradation of the membrane. However, such a coverage of the stent is far from being effortless and mostly will have to be done by hand, which requires skill. In addition, it is limited to certain types of materials and may prove fragile, it being possible for the membrane or skirt to loosen from the wire mesh, which may allow relative movement between the membrane and the stent, with the resulting risk of occluding the vessel.

The invention provides a method for applying the covering layer of a stent with a discontinuous expandable wall comprising on at least a portion of its length a continuous covering layer of elastic material with an outer surface surrounding the discontinuous wall wherein the continuous covering layer of elastic material is adhered to the said portion of the discontinuous wall of the stent being thereby intimately united with said wall portion, comprising the steps of: forming a tube of predetermined length with an elastomeric polymerisable composition, coating the inside of the tube with

an adhesive medium, radially contracting the stent, inserting into the adhesive coated inside of the tube a portion of the stent corresponding to said predetermined length of the tube, allowing the stent to radially expand in the adhesive coated inside of the tube, and allowing the adhesive medium to cure.

The invention also provides a method for applying the covering layer of a stent with a discontinuous expandable wall comprising on at least a portion of its length a continuous covering layer of elastic material with an outer surface
10 surrounding the discontinuous wall wherein the continuous covering layer of elastic material is adhered to the said portion of the discontinuous wall of the stent being thereby intimately united with said wall portion, comprising the steps of:

forming a tube of predetermined length with an elastomeric polymerisable composition,

coating the inside of the tube with an elastomeric polymerisable composition dissolved in a sufficient amount of solvent to permit contact forming,

20 radially contracting the stent,

inserting into the tube a portion of the stent corresponding to said predetermined length of the tube,

allowing the stent to radially expand in the tube, evaporating the solvent, and

polymerizing the elastomeric composition adhered by contact to the tube and to the stent.

In that way, the continuous covering layer is closely bound to the discontinuous structure which it covers and there is definitely no risk of separation therebetween. And even in the case of a strong degradation of the covering layer in course of time, there cannot be any migration of the covering layer with respect to the discontinuous wall of the stent because of the aforesaid intimal interconnection. Furthermore, the liaison of the covering layer with the discontinuous wall of the stent
10 eliminates any need for delicate, time and skill consuming efforts and allows coating of any kind of discontinuous expandable stent wall.

The invention will now be described more particularly with reference to the accompanying drawings which

- 3 -

show, by way of example only, one embodiment of the invention.

In the drawings :

5

Figure 1 is a perspective view of a quarter cut along the longitudinal axis of the exemplified embodiment;

Figure 2 is an enlarged view of an axial cut of a
10 portion of its wall during a procedure for applying the covering layer.

The stent shown in Figure 1 is an expandable stent of which the wall (1), for instance cylindrical, is
15 formed by meshed wires (2) of stainless steel, plastics or hybrid materials such as plastics and carbon fiber.

The wall (1) comprises, on a portion of its length, a covering layer (3) made of an elastomeric biocompatible composition such as, for instance, the elastomeric
20 polymerisable composition described in US Patent N° 5,112,900. The outer face (4) of layer (3) forms a surrounding surface, and layer (3) extends around and inside the discontinuous structure of the stent
25 in order to totally embrace and intimately unite with any material part of the meshed wires (2) which constitute said discontinuous structure.

On Figure 1, the left front face (5) of the covering
30 layer (3) is shown in an area of wall (1) where the wires (2) do not cross each other; on the contrary, the quarter cut along the longitudinal axis is shown in an area where the wires (2) cross and overlap each other.

35

A portion of the stent wall (1) is shown on Figure 2 with its covering layer (3), the stent wall (1)

- 4 -

being shown in an area where its wires (2) overlap each other, and the stent being inserted in a tube (6) the inner surface of which is coated with a lifting medium (7) as described in detail hereafter in connection with a procedure for applying the covering layer to the stent.

In order to apply the covering layer (3) on the stent, the deformable wall (1) of the stent is radially contracted and the portion thereof which has to be coated is inserted into the tube (6) the inner surface of which has been previously done over with a lifting medium (7) such as for instance "teflon" in order to avoid adherence to the elastomeric composition forming the covering layer (3). The contracted stent is allowed to expand radially in the tube (6) and the assembly of the tube and stent is wetted with the elastomeric polymerisable composition dissolved in a sufficient amount of solvent to permit wet forming of a continuous covering layer around the totality of the discontinuous wall of the stent formed by the wire mesh inside the tube (6). The solvent is evaporated and the elastomeric composition is then polymerised in the tube and the layer covered stent portion is taken out of the tube.

In that way, the shaping and liaison of the covering layer with the discontinuous wall of the stent is obtained automatically by mass polymerisation of the elastomeric composition wholly surrounding the structure of such a wall inside the tube moulding its outer surface.

Of course, the discontinuous wall of the stent may also be covered with the continuous covering layer all over its length, in which case the stent will be fully inserted into the tube for the dip forming

- 5 -

process. In addition, the invention is not limited to the embodiment shown, being applicable to any kind of expandable stent having a discontinuous wall.

5 The thickness of the covering layer may be advantageously selected as a function of the quantity of solvent added to the elastomeric composition, before polymerisation and within the limits of a fluidity sufficient to allow wetting.

10

As a variant, it is also possible to obtain a greater thickness of the portions of the covering layer which are located at the outside of the discontinuous wall of the stent and between the mesh or elements thereof.

15 To this effect, the tube (6) done over with the lifting medium is first wetted alone with the elastomeric composition previously added with an appropriate amount of solvent. The solvent is evaporated and the stent is then radially contracted for insertion into the tube
20 and the procedure follows as outlined hereinbefore.

According to a variant, not shown, the covering layer of elastic material needs not to integrally embrace the discontinuous structure of the stent, being sufficient that only a part of the thickness of the structure
25 be covered by the elastic material, in case of the example shown in Figure 1, only a radial portion of the wires (2).

30 According to further variants, also not shown, the elastic covering may be achieved by surface adhesion forces or through use of a binder.

Accordingly, a variant method provides for doing over
35 a roll on surface with a lifting medium and coating said roll on surface with an elastomeric polymerisable composition dissolved in a sufficient amount of solvent

- 6 -

to permit contact forming, such an elastomeric composition being, for instance, the composition described in US Patent N° 5,112,900. An appropriate portion of the stent in expanded condition is then rolled
5 on said coated roll on surface; the stent is then withdrawn from the roll on surface, the solvent is allowed to evaporate, and the elastomeric composition adhered to the stent is polymerised.

10 A further variant method provides for using a covering layer formed of a tube made of an elastomeric polymerisable composition, inserting the contracted stent into the tube, allowing the contracted stent to expand in the tube and vulcanising or similarly welding the
15 surface of contact between the stent and the tube.

Still a further variant method also provides for using a covering layer formed of a tube made of an elastomeric polymerisable composition, coating the inside of the
20 tube with an adhesive medium, inserting the contracted stent into the tube, and allowing the stent to expand radially in the so coated tube and the adhesive medium to cure, to thereby achieve adhesion of the assembly of stent and tube.

25 As a variant of this method, the inside of the tube may be coated with an elastomeric polymerisable composition dissolved in an amount of solvent permitting contact forming, whereby after expansion of the stent,
30 the solvent is allowed to evaporate and the elastomeric coating adhered by contact to the tube and to the stent is polymerised.

In a further variant the covering layer of elastic
35 material may be adhered to the stent by radial pressure of the stent against the covering layer. In that case, the covering layer may be, for instance, formed of

- 7 -

a tube made of an elastomeric composition stretched over the stent in order to allow contraction and expansion thereof. Adhesion of the covering layer to the stent will be achieved by surface adhesion forces
5 with additionnal interpenetration between the covering layer and the stent.

In another variant, also not shown, the covering layer may have a structured surface towards the wall of
10 the stent, whereby adhesion of the covering layer to the stent will be achieved by some engagement of said structured surface into the discontinuous structure of the stent.

15 Of course, in all these variants, the discontinuous wall of the stent may be covered with the continuous covering layer all over its length or only over a portion thereof.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method for applying the covering layer of a stent with a discontinuous expandable wall comprising on at least a portion of its length a continuous covering layer of elastic material with an outer surface surrounding the discontinuous wall wherein the continuous covering layer of elastic material is adhered to the said portion of the discontinuous wall of the stent being thereby intimately united with said wall portion, comprising the steps of:

forming a tube of predetermined length with an elastomeric polymerisable composition,

coating the inside of the tube with an adhesive medium,

radially contracting the stent,

inserting into the adhesive coated inside of the tube a portion of the stent corresponding to said predetermined length of the tube,

allowing the stent to radially expand in the adhesive coated inside of the tube, and

allowing the adhesive medium to cure.

2. A method for applying the covering layer of a stent with a discontinuous expandable wall comprising on at least a portion of its length a continuous covering layer of elastic

material with an outer surface surrounding the discontinuous wall wherein the continuous covering layer of elastic material is adhered to the said portion of the discontinuous wall of the stent being thereby intimately united with said wall portion, comprising the steps of:

forming a tube of predetermined length with an elastomeric polymerisable composition,

coating the inside of the tube with an elastomeric polymerisable composition dissolved in a sufficient amount of solvent to permit contact forming,

radially contracting the stent,

inserting into the tube a portion of the stent corresponding to said predetermined length of the tube,

allowing the stent to radially expand in the tube,

evaporating the solvent, and

polymerizing the elastomeric composition adhered by contact to the tube and to the stent.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

FIG.-1-

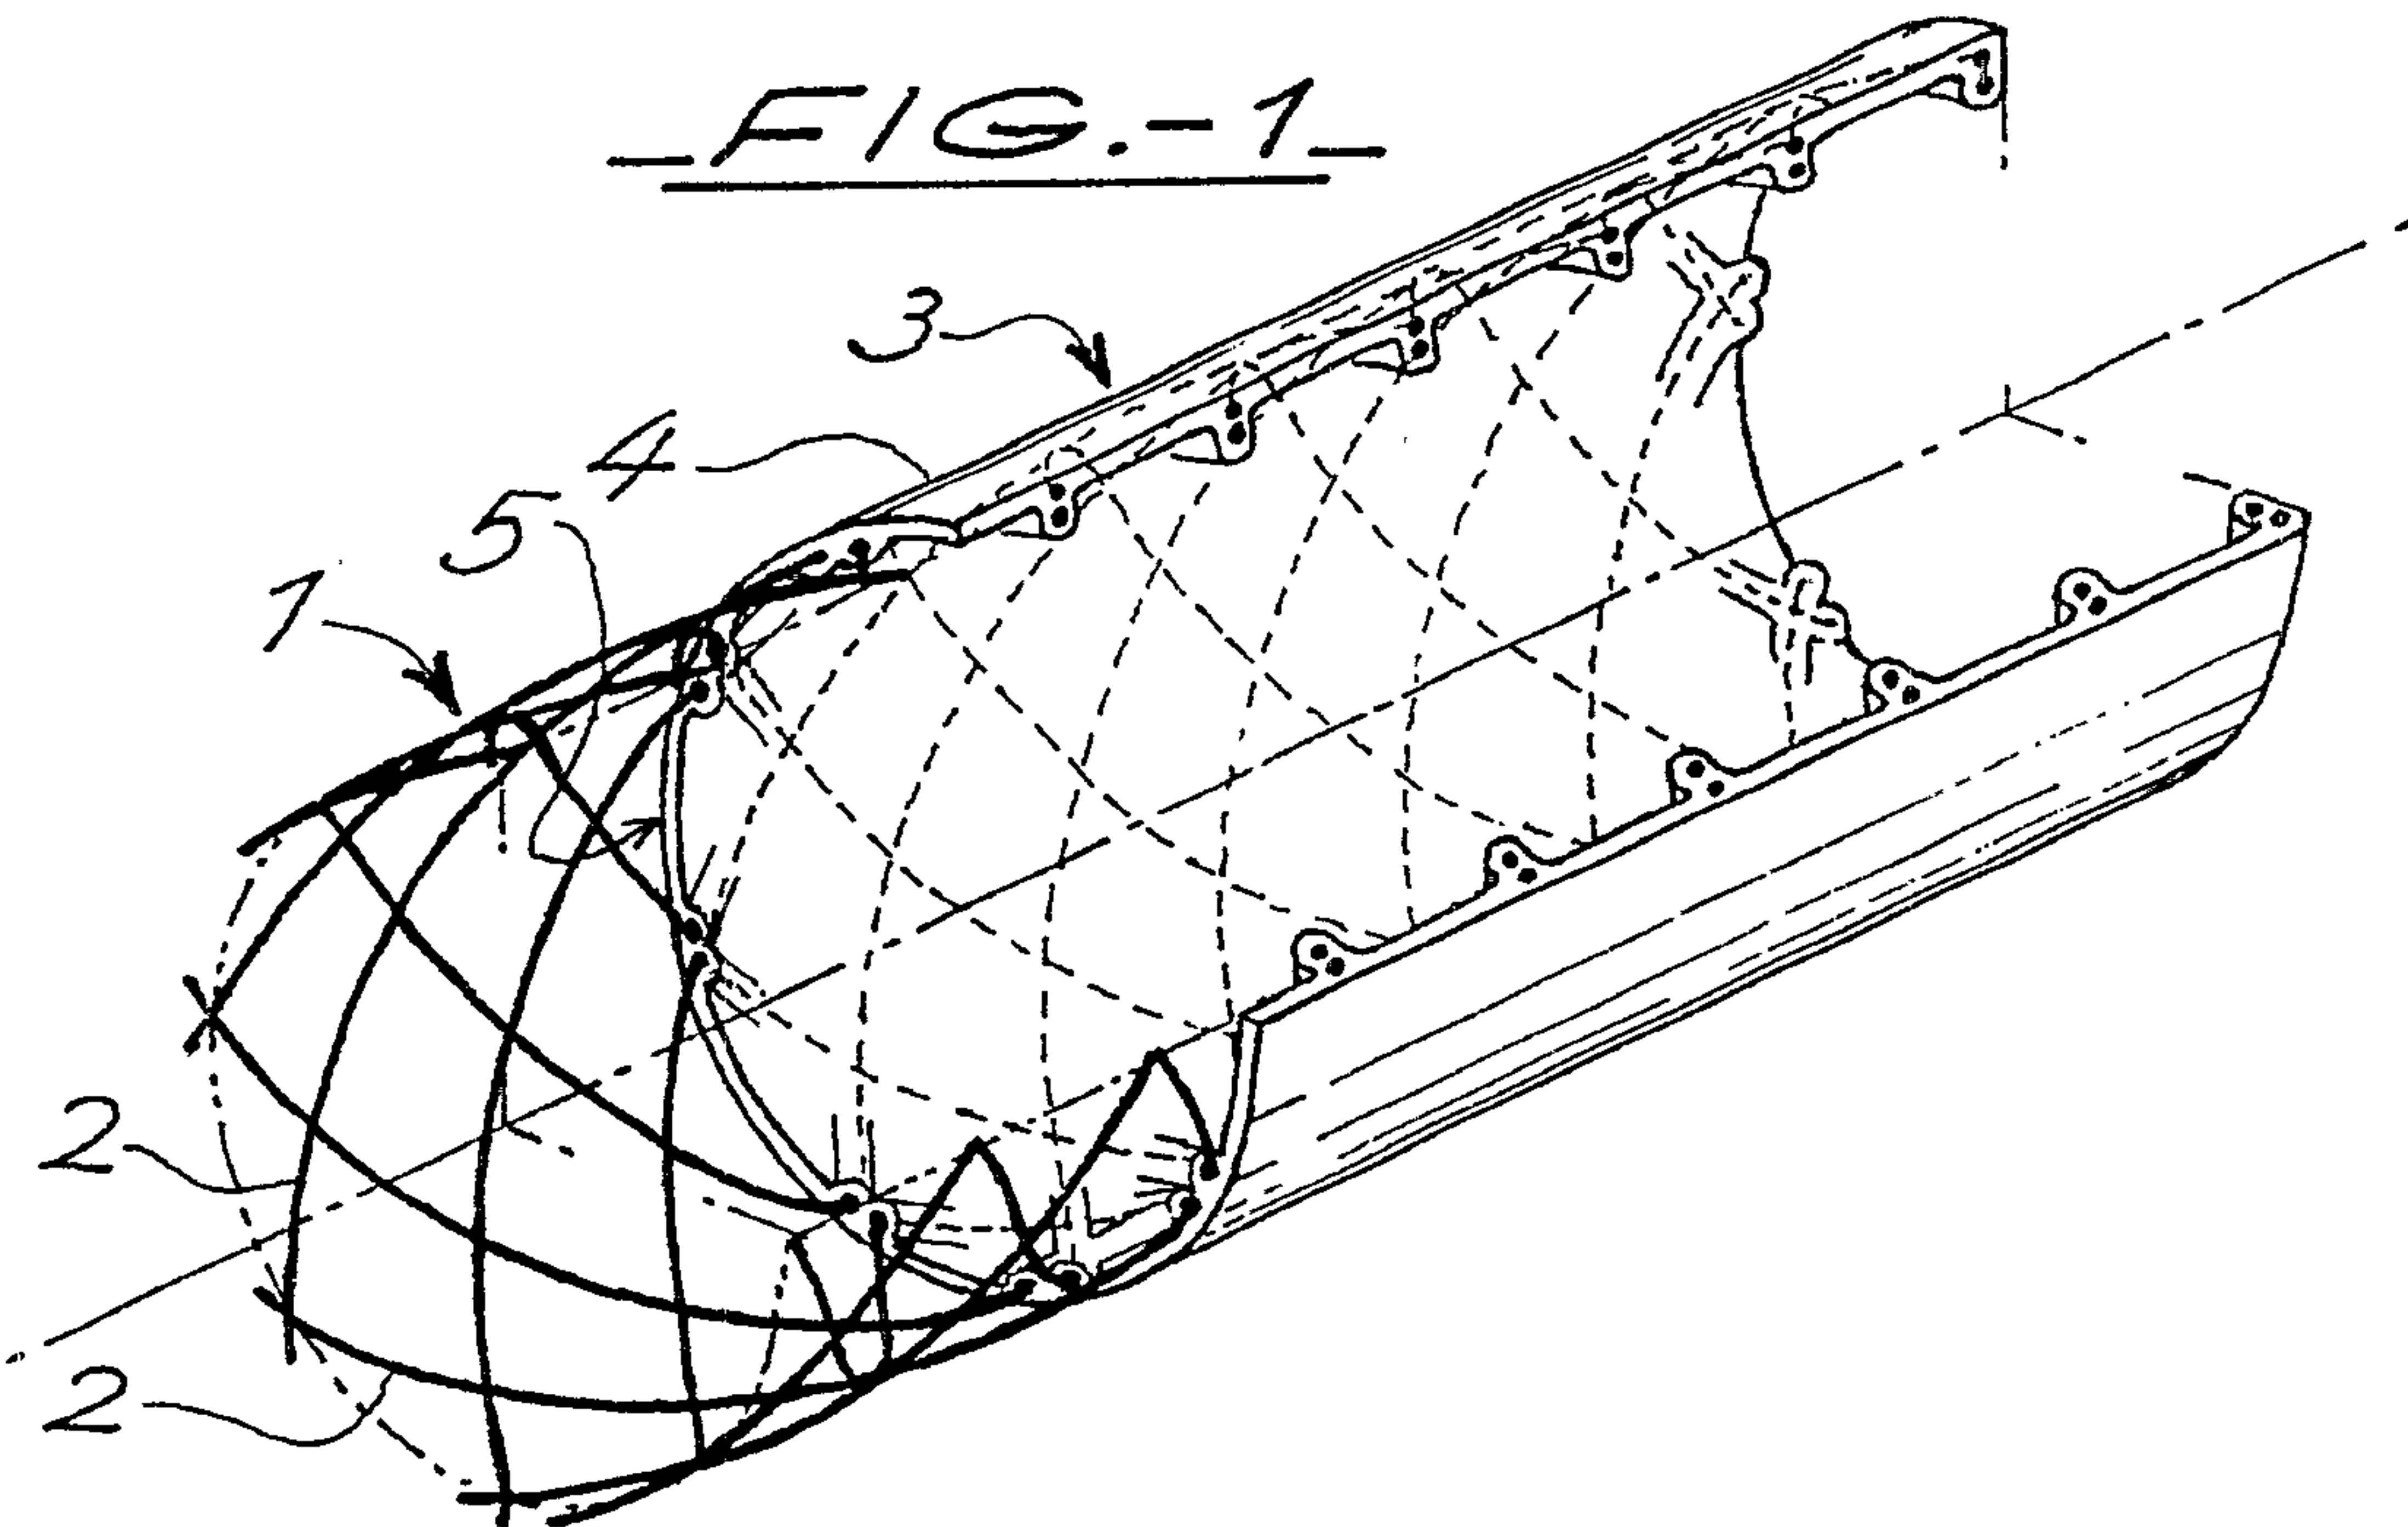


FIG.-2-

