



(43) International Publication Date
2 April 2015 (02.04.2015)

(10) International Publication Number
WO 2015/044944 A2

(51) International Patent Classification:
G01J 3/50 (2006.01)

Smilanski Street, 46361 Herzliya (IL). **SHAHAR, Lior**; 15
Bialik Street, 5520315 Kiryat-Ono (IL).

(21) International Application Number:
PCT/IL2014/050850

(74) Agent: **VAN DYKE, Marc**; 4th Dimension IP 7 Oppen-
heimer St., 76701 Rehovot (IL).

(22) International Filing Date:
28 September 2014 (28.09.2014)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,828,363 26 September 2013 (26.09.2013) CA
61/883,263 27 September 2013 (27.09.2013) US
61/926,909 13 January 2014 (13.01.2014) US
61/984,798 27 April 2014 (27.04.2014) US
61/984,861 27 April 2014 (27.04.2014) US
61/985,331 28 April 2014 (28.04.2014) US
PCT/IB2014/064809
24 September 2014 (24.09.2014) IB

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

(71) Applicant: **COLORIGHT LTD.** [IL/IL]; P.O. Box 740,
7610602 Rehovot (IL).

(72) Inventors: **MIKLATZKY, Efraim**; 17 HaPerah Begani
Street, 9085000 Neve Ilan (IL). **MANDELIK, Daniel**; 26
Tarshish Street, 7666566 Rehovot (IL). **DAVARA, Gilad**;
1/1 Carmel Street, 7630501 Rehovot (IL). **BENNY,**
Eliyahu; 4 Yitzhak Sade Street, 7523691 Rishon-LeZion
(IL). **LIVNEH, Oded**; 46/2 Mifrats Shlomo Street,
5849946 Holon (IL). **ISHKOV, Elena**; 42B HaHistadrut
Street, 5352607 Givataim (IL). **ZADOK, Uri**; 3 Moshe

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: HAIR READER, DISPENSER DEVICE AND RELATED SYSTEMS AND METHODS

(57) Abstract: The present disclosure relates to hair readers, dispenser devices, and related systems and methods.



WO 2015/044944 A2

HAIR READER, DISPENSER DEVICE AND RELATED SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATIONS

5 The present application claims priority to CA 2,828,363 filed September 26, 2013, US 61883263 filed September 27, 2014; US 61926909 filed January 13, 2014 and US 61984798 filed April 27, 2014, and PCT/IB2014/064809 filed September 24, 2014, all of which are incorporated by reference in their entirety.

10 BACKGROUND AND RELATED ART

 The following issued patents and patent publications provide potentially relevant background material, and are all incorporated by reference in their entirety: US 4643313, US 5205837, US 5660342, US 5754283, US 5851181, US 5990058, US 6096359, US 15 6170980, US 6248749, US 6362885, US 6529446, US 6547833, US 6613311, US 6707929, US 6764523, US 6790240, US 6818022, US 6984377, US 7110117, US 7204856, US 7304739, US 7458992, US 7463356, US 7508508, US 7523018, US 7708021, US 20010002025, US 20020010556, US 20020157191, US 20020194684, US 20030028978, US 20040000015, US 20040013616, US 20050015895, US 20050019398, 20 US 20050039271, US 20050165705, US 20050177032, US 20050244343, US 20060149151, US 20060195300, US 20070159290, US 20070265867, US 20080013077, US 20080068604, US 20080256724, US 20090119852, US 20110038818, DE 10260880, DE 2006008149, DE 3609962, DE 4205112, EP 0590538, EP 1817976, EP 2081668, EP 2193781, FR 2402446, FR 2532174, FR 2901131, JP 2000116622, JP 25 2004198398, JP 2004212088, JP 2007212140, JP 2008285429, KR100802645, KR20040076861, WO 0145647, WO 02083282, WO 03012728, WO 03074015, WO 04101689, WO 11003554, WO 2004058202, WO 2004082650, WO 2004101689, WO 2008046518, WO 2009121643, WO 2009152033, WO 2010004565, WO 2010060601, WO 2010100231, WO 2012032671,

SUMMARY

Some embodiments of the present invention relate to hair-reader devices for
5 optically acquiring data from human hair or from other keratinous fibers. In some
embodiments, one or more physical and/or chemical properties of the hair are computed
from the optically-acquired data. In some embodiments, a customized hair-coloring
coloring composition is prepared according to optically-detected property(ies) of the hair.

Some embodiments of the present invention relate to dispenser systems for
10 oxidative hair-coloring. A plurality of containers are engaged to a dispenser such that
some of the containers contain dye precursor and are substantially free of coupler while
other containers contain coupler and are substantially free of dye precursor. The
dispenser is configured to dispense contents of the containers to provide multi-container
combinations. The dispenser system may be used with any presently-disclosed hair-
15 reader device, or with any other hair-reader device, or in any other context.

Some embodiments of the present invention relate to dispensing of cosmetic
agents (e.g. for hair-coloring or for any other cosmetic application) where for each
container, data describing physical and/or chemical property(ies) of the cosmetic material
therein is encoded on the container. This data is read by a code-reader operatively linked
20 to a dispensing device which dispenses the cosmetic material from the containers
according to the data reader from the containers.

A method related to the aforementioned hair-reader device is now disclosed. This
method comprises illuminating keratinous fiber(s) and acquiring a plurality of spectra
(e.g. reflection spectra) of the keratinous fiber(s) such that each spectrum of the plurality
25 respectively corresponds to a different respective portion of the keratinous fibers.

This method may be implemented using first and second optical systems together
with a two-dimensional array of photodetectors where each row of photodetectors detects
a different respective spectrum (e.g. reflection spectrum).

In some embodiments, the method is useful for classifying hair. A hair-coloring
30 composition or treatment may be computed in accordance with the reflection spectra.
Hair-coloring agents (e.g. dye(s) and/or oxidizing agents and/or alkalizing agents(s)) for

the preparation of the coloring composition may be dispensed in accordance with the reflection spectra.. A hair-coloring system implementing such method is also disclosed.

A method of optically acquiring data from keratinous fiber(s) comprises: a. illuminating the keratinous fiber(s) such that light reflected and/or deflected and/or
5 transmitted by the fiber(s) is incident upon a detector and converted into electrical signal(s) by the detector; and b. computing, from electrical signal(s), a plurality of spectra of the keratinous fiber(s) such that each spectrum of the plurality of spectra respectively corresponds to (i) a different respective portion of the keratinous fiber(s) and/or (ii) material within a different sub-region of space within which at least a portion of the
10 keratinous fiber(s) are disposed.

In some embodiments, the method is performed so that i. the illuminated fiber(s) are in a first object plane; ii. a first image is formed at an intermediate location along an optical path between the fiber(s) and the detector(s), the intermediate location being configured both as a first image plane and a second object plane. the first image being an
15 at least 1D-focused image of the fiber(s); and iii. a second image is formed at the detector, the second image being an image of the first image.

In some embodiments the method is performed so that due to a presence of at least one imaging system(s): i. the illuminated fiber(s) are in a first object plane; ii. a first image is formed at an intermediate location along an optical path between the fiber(s) and
20 the detector(s), the intermediate location being configured both as a first image plane and a second object plane. the first image being an at least 1D-focused image of the fiber(s); and iii. a second image is formed at the detector, the second image being an image of the first image.

In some embodiments, the image system(s) are disposed along the optical path.

25 In some embodiments, a slit or aperture is disposed along the optical path between the keratinous fiber(s) and the detector(s) and the intermediate location substantially corresponds to the slit or aperture.

In some embodiments, the detector comprises a plurality of constitutive photo-detectors arranged in a two-dimensional planar array, a plane of which corresponds to an
30 image plane of the second image.

In some embodiments, first and second sub-sets (e.g. disjoint sub-sets) of the constitutive photodetectors respectively generate first reflection and second spectra that respectively correspond (i) to first and second portions of the keratinous fibers and/or (ii) material within a first and second sub-region of space within which at least a portion of the keratinous fiber(s) are disposed.

In some embodiments, in one direction the sub-sets of photodetectors are parallel to each other.

In some embodiments, the illuminated fibers are aligned with one another along an alignment axis and the first and second portions of the fibers corresponding to the first and second spectra are aligned with each other along the alignment axis.

In some embodiments, a first direction of the array of photodetectors corresponds to varying wavelength and a second direction perpendicular to the first direction corresponds to different portions of the keratinous fibers.

In some embodiments, each reflection spectrum of the plurality of spectra respectively corresponds to a different respective disjoint portion of the keratinous fibers.

In some embodiments, the method further comprises: c. electronically comparing a spectrum specific to a first of the portions of the keratinous fiber(s) with a spectrum specific to the second of the portions of the keratinous fiber(s); and d. in accordance with the results of the comparison, classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color.

In some embodiments, the method further comprises: c. electronically comparing a reflection spectrum specific to a first of the portions of the keratinous fiber(s) with a reflection spectrum specific to the second of the portions of the keratinous fiber(s); and d. in accordance with the results of the comparison, classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color.

In some embodiments, the method further comprises: c. electronically comparing a spectrum specific to a first of the portions of the keratinous fiber(s) with a spectrum specific to the second of the portions of the keratinous fiber(s); and d. dispensing a combination of hair-coloring agents according to the results of the comparing.

In some embodiments, the method further comprises: c. electronically comparing a reflection spectrum specific to a first of the portions of the keratinous fiber(s) with a

reflection spectrum specific to the second of the portions of the keratinous fiber(s); and d. dispensing a combination of hair-coloring agents according to the results of the comparing.

5 A fiber-coloring-related method comprises: a. disposing keratinous fibers of a subject so that a different portion of the fiber(s) is respectively located in a different slice of a region of space divided into a plurality of slices; b. for each slice of the plurality, respectively acquiring spectral data specific to the respective portion of the keratinous fibers disposed within the slice; and c. electronically comparing spectral data specific to a first of the portions of the keratinous fiber(s) with spectral data specific to the second of
10 the portions of the keratinous fiber(s).

A fiber-coloring-related method comprises: a. disposing keratinous fibers of a subject so that a different portion of the fiber(s) is respectively located in a different slice of a region of space divided into a plurality of slices; b. for each slice of the plurality, measuring a respective spectrum specific to the respective portion of the keratinous fibers
15 disposed within the slice; and c. electronically comparing a first of the spectra descriptive of a first portion of the fiber(s) with a second of the spectra of descriptive of a second portion of the fiber(s).

In some embodiments, one or both of the first and second spectra are reflection spectra.

20 In some embodiments, the method is performed to compute a uniformity and/or homogeneity parameter.

In some embodiments, the uniformity and/or homogeneity parameter is a hair-strand uniformity and/or homogeneity parameter.

In some embodiments, the uniformity and/or homogeneity parameter is a color-
25 space parameter.

In some embodiments, the color-space parameter is a LAB color-space value.

In some embodiments, the method further comprises in accordance with the results of the comparing, dispensing a combination of hair-coloring agents.

In some embodiments, the method further comprises: classifying the keratinous
30 fiber(s) as homogeneous or heterogeneous with respect to color and/or color-space value, wherein the dispensing is performed in accordance with the results of the classifying.

In some embodiments, the method further comprises: classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color and/or color-space value.

A method of coloring keratinous fibers comprises: a. disposing keratinous fibers of a subject so that a different fiber(s) sub-population is respectively located in each slice
5 of a region of space divided into a plurality of slices; b. for each of the slices, respectively acquiring spectral data specific to the respective sub-population of the keratinous fibers disposed within the slice; c. electronically comparing spectral data specific to a first of the sub-populations with spectral data specific to the second of the sub-populations; and d. computing a parameter related to hair homogeneity in
10 accordance with the results of the electronic comparing.

In some embodiments, (i) the method further comprises: e. in accordance with the comparing of the spectral data, electronically classifying the keratinous fibers as natural-grey hair or as artificially colored grey hair; and the dispensing is performed in accordance with the results of the classifying.

15 In some embodiments, the image is anisotropically magnified at different magnification values in orthogonal axes in the image plane - i.e. a first magnification value which may be equal to one or to any other value; i.e. a second magnification value which is different from the first t magnification value in the second axis.

In some embodiments, the method is performed so that the image plane that is co-
20 planar with the slit or aperture is an image plane containing a only-1D-focused-image that is focused in a first axis within the image plane and blurred in a second axis that is orthogonal to the first axis.

A system for acquiring spectral data from keratinous fiber(s) comprises: a. a device housing defining a fiber(s)-placement location; b. a source light configured to
25 illuminate keratinous fiber(s) when situated at the fiber-placement location so that at least a portion of the fiber(s) is situated within a region of space; c. apparatus configured for each of the slices, to respectively acquire spectral data specific to the material disposed within each slice.

A system for acquiring spectral data from keratinous fiber(s) comprises: a. a
30 device housing defining a fiber(s)-placement location; b. a source light configured to illuminate keratinous fiber(s) when situated at the fiber-placement location so that at least

a portion of the fiber(s) is situated within a region of space; c. apparatus configured for each of the slices, to respectively acquire spectral data specific to a different portion of the keratinous fiber(s).

In some embodiments, the apparatus comprises a monochromator or spectral analyzer.

In some embodiments, the monochromator or spectral analyzer comprises at least one of a grating and a prism.

In some embodiments, a slit or aperture is disposed upon an optical path between the fiber(s) and a light detector.

A system for acquiring spectral data from keratinous fiber(s) comprises: a. a device housing defining a fiber(s)-placement location; b. a source of light configured to illuminate keratinous fibers when situated at the fiber-placement location; c. a slit or aperture or collimating lens; d. a grating and/or prism and/or other color-dispersion optics; e. a detector for detecting light; and f. first and second optical systems configured to focus light reflected and/or deflected and/or transmitted by the illuminated keratinous fibers so that: i. light reflected and/or deflected and/or transmitted by the keratinous fiber(s) is focused by the first imaging system to form an at least 1D-focused image of the keratinous fiber(s) at an intermediate location along an optical path between the fiber(s) and the detector; and ii. the grating and/or prism and/or other color-dispersion optics and the second optical system are situated on an optical path between the slit or aperture or collimating lens and the detector such that the light reflected from and/or deflected by and/or transmitted by the keratinous fibers reaches the detector via the grating and/or prism and/or other color-dispersion optics and the second optical system, wherein: A. a presence of the grating and/or prism and/or other color-dispersion optics causes the detector to detect spectral data of the keratinous fiber(s); and B. a presence of the second imaging system focuses keratinous-fiber(s)-reflected and/or deflected and/or transmitted light on the detector (e.g. on a planar array thereof) to form, on the detector, an image of the keratinous fiber(s) at the intermediate location(s). This image may be

In some embodiments, the intermediate location(s) may correspond to a location of the slit (or other aperture) or to a location of the grating and/or prism and/or other color-dispersion optics.

A system for acquiring spectral data from keratinous fiber(s) comprises: a. a device housing defining a fiber(s)-placement location; b. a light source configured to illuminate keratinous fibers when situated at the fiber-placement location; c. a 2D planar array of photodetectors; and d. optical components configured to form, from light
5 reflected and/or deflected and/or transmitted by the fiber(s): i. spectral data in a first dimension of the 2D planar array of photodetectors; and ii. an at least 1D-focused image of the keratinous fibers in a second direction of the 2D planar array of photodetectors, the second direction being perpendicular to the first direction.

In some embodiments, the slit defines an elongate axis and the keratinous
10 fibers(s) are substantially aligned in a direction that is perpendicular to the elongate axis of the slit.

A method of optically acquiring data from keratinous fiber(s) comprises: a. illuminating the fiber(s) by light such that light reflected by the fiber(s) subsequently passes through a slit or aperture; and b. analyzing the output of photodetector(s) to (i)
15 determine spectral data of the illuminated fiber(s) and/or (ii) calculate a hair treatment from the analyzed output, wherein the illuminated fiber(s) are in an object plane and a presence of one or more optical components on an optical path between the fiber(s) and the slit or aperture cause the formation of an image plane so that the slit or aperture is located within the image plane.

In some embodiments, the image is anisotropically magnified at different
20 magnification values in orthogonal axes in the image plane - i.e. a first magnification value which may be equal to one or to any other value; i.e. a second magnification value which is different from the first magnification value in the second axis.

In some embodiments, the image plane that is co-planar with the slit or aperture is
25 an image plane containing a only-1D-focused-image that is focused in a first axis within the image plane and blurred in a second axis that is within the image plane and is orthogonal to the first axis.

A method of optically acquiring data from keratinous fiber(s) comprises: a. illuminating the fiber(s) by light such that light reflected by the fiber(s) subsequently
30 passes through a slit or aperture; and b. analyzing the output of photodetector(s) to (i) determine spectral data of the illuminated fiber(s) and/or (ii) calculate a hair treatment

from the analyzed output, wherein the illuminated fiber(s) are in an object plane and a presence of one or more optical components on an optical path between the fiber(s) and the slit or aperture cause the formation first and second only-1D-focused-images on opposite sides of the slit or aperture and wherein light from both the first and second
5 only-1D-focused-images is incident upon and detected by the photodetector(s) (e.g. to re-combine the only-1D-focused-image.

In some embodiments, the first only-1D-focused-image is focused in a first direction and blurred in a second direction orthogonal to the first direction, and the second only-1D-focused-image is focused in the second direction and blurred in the first
10 direction.

In some embodiments, the illuminated fibers are aligned with each other.

In some embodiments, at least one of the spectrum(s), or at least a plurality of spectrum(a) are reflection spectrum(a) or absorption spectrum(a) or transmission spectrum(a).

15 In some embodiments, the keratinous fiber(s) are illuminated by incoherent light.

A method of optically acquiring data from keratinous fiber(s) comprises: a. illuminating the keratinous fiber(s); b. from light reflected and/or deflected and/or transmitted by the fiber(s), respectively forming first and second only-1D-focused images of the fiber(s) at first and second intermediate locations; c. passing from light of the first
20 and second only-1D-focused images through color-dispersion optics; and d. receiving, by a light detector, light from the first and second only-1D-focused images after this light has passed through the color-dispersion optics so as to detect spectrum(a) of the keratinous fiber(s).

In some embodiments, the first and second only-1D-focused images are formed
25 are formed by optical components comprising a toric lens.

A system for optically acquiring data from keratinous fiber(s), the system comprising: a. a source of light configured to illuminate the keratinous fiber(s); b. an imaging system configured to respectively form, from light reflected and/or deflected and/or transmitted by the fiber(s), first and second only-1D-focused images of the fiber(s)
30 at first and second intermediate locations; c. color-dispersion optics configured to receive light of the first and second only-1D-focused images; and d. by a light detector

configured to receive light from the first and second only-1D-focused images after this light has passed through the color-dispersion optics so as to detect spectrum(a) of the keratinous fiber(s).

5 In some embodiments, the first only-1D-image is focused in a first image-plane direction and blurred in a second image-plane direction orthogonal to the first image-plane direction and the second only-1D-image is focused in the second image-plane direction and blurred in the first image-plane direction.

In some embodiments, the keratinous fiber(s) are aligned along an alignment axis.

10 In some embodiments, i. the keratinous fiber(s) are aligned along an alignment axis; ii. the first only-1D-image is focused in a first image-plane direction along the alignment axis and blurred in a second image-plane direction orthogonal to the first image-plane direction; and iii. the second only-1D-image is focused in the second image-plane direction and blurred in the first image-plane direction.

15 In some embodiments, the first and second only-1D-focused images are recombined at the light detector.

In some embodiments, the first and second only-1D-focused images are recombined into a 2D-focused-image at the light detector.

In some embodiments, the reflected and/or deflected and/or transmitted by the fiber(s) passes through an aperture or a slit *en route* to the color-dispersion optics.

20 In some embodiments, an image plane location of the first or second only-1D-focused image corresponds to a plane of slit or the aperture.

In some embodiments, further comprising according to the detected spectrum(a), calculating a hair-treatment recipe and/or dispensing a combination of hair-coloring agents.

25 A system for preparing a hair-coloring composition comprises: a. a plurality of containers, each container holding a different permanent hair-coloring agent therein, a first of the plurality of containers containing dye precursor and being substantially free of coupler, a second of the plurality of containers containing coupler and being substantially free of dye precursor; and b. a dispenser configured to dispense contents of the containers

30

to provide multi-container combinations comprising material from the first and second containers.

A system for preparing a hair-coloring composition comprising: a. a plurality of containers including first and second containers; b. a plurality of tablets disposed within
 5 each of the containers including each tablet comprising at least one of (i) permanent hair-coloring dye precursor and (ii) permanent hair-coloring dye coupler such that in first of the containers, the plurality of tablets including tablets of first and second types such that (A) tablets of the first type comprise permanent hair-coloring dye precursor and are substantially free of permanent hair-coloring dye coupler, and (B) tablets of the second
 10 type comprise permanent hair-coloring dye coupler and are substantially free of permanent hair-coloring dye precursor, a majority of tablets in the first container being of the first type, a majority of tablets in the second container being of the second type, c. a dispenser configured to dispense the tablets so as to provide multi-container tablet combinations comprising tablets of the first and second types from the first and second
 15 containers.

In some embodiments, at least a majority of tablets in the first container are of the first type, of substantially the same dye coupler and have substantially the same size.

In some embodiments, the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of
 20 *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3* ; (v) an average load (by weight) of tablets of *TABLET_SET1* is LW_1 ; (v) an average load (by
 25 weight) of tablets of *TABLET_SET3* is LW_3 ; (vi) and a ratio between LW_1 and LW_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

In some embodiments, the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of
 30 *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise

the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3* ; (v) an average load (by mole) of tablets of *TABLET_SET1* is LM_1 ; (v) an average load (by weight) of tablets of *TABLET_SET3* is LM_3 ; (vi) and a ratio between LM_1 and LM_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

In some embodiments, the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3* ; (v) an average volume of tablets of *TABLET_SET1* is VOL_1 ; (v) an average volume of tablets of *TABLET_SET3* is VOL_3 ; (vi) and a ratio between VOL_1 and VOL_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

In some embodiments, all tablets of *TABLET_SET1* have substantially the same volume and/or substantially the same load (by weight) of precursor *PREC_1* and/or substantially the same load (by mole) of precursor *PREC_1*.

In some embodiments, all tablets of *TABLET_SET3* have substantially the same volume and/or substantially the same load (by weight) of precursor *PREC_1* and/or substantially the same load (by mole) of precursor *PREC_1*.

A system for preparing a hair-coloring composition comprising: a. a plurality of containers including first and second containers; b. a plurality of tablets disposed within each of the containers, each tablet comprising at least one of (i) permanent hair-coloring dye precursor and (ii) permanent hair-coloring dye coupler such that, a majority (e.g. at least a substantial majority) of the tablets in the first container comprise permanent hair-coloring dye precursor and are substantially free of permanent hair-coloring dye coupler, a majority of the tablets in the second container comprise permanent hair-coloring dye coupler and are substantially free of permanent hair-coloring dye precursor; c. a dispenser

configured to dispense the tablets so as to provide multi-container tablet combinations comprising tablets from the first and second containers.

In some embodiments, dispenser is configured to dispense the multi-container combinations in accordance with at least one of (i) a hair coloring target and/or (ii) hair spectroscopy data.

A system for dispensing cosmetic ingredients comprises: a. a dispensing device; b. a plurality of containers, each containing a different respective cosmetic agent stored therein having different respective cosmetic properties, each container encoded with respective data describing both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material; and c. a code-reader included in or operatively linked to the dispensing device, the code-reader being configured to read the respective encoded reference physical- chemical property(ies) and ageing metrics from each of the containers, wherein: i. the dispensing device is configured, when the containers are engaged thereto, to dispense cosmetic agents from the containers in relative quantities determined in accordance with estimations of current physical-chemical property(ies) of the cosmetic agents stored within the containers; and ii. the estimations of current physical-chemical properties of each cosmetic agent are computed in accordance with both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material

In some embodiments, further comprising a first fluid-reservoir comprising an aqueous fluid (e.g. liquid) at a pH of at most 4 and a liquid or fluid dispenser configured to dispense a quantity of liquid or fluid from the first liquid reservoir in accordance with at least one of (i) the hair coloring target and (ii) the hair spectroscopy data.

In some embodiments, further comprising a first liquid-reservoir comprising an aqueous liquid or fluid comprising H₂O₂ and/or another oxidizing agent and a liquid (or fluid) dispenser configured to dispense a quantity of liquid from the first liquid reservoir in accordance with at least one of (i) the hair coloring target and (ii) the hair spectroscopy data.

In some embodiments, pH of the liquid (or fluid) of the first reservoir is at most 4.

In some embodiments, further comprising a second liquid reservoir comprising an aqueous liquid at a pH of at most 4 and having a different oxidizing power than the liquid of the first liquid reservoir, the liquid dispenser being configured to dispense relative quantities of liquids from the first and second reservoirs in accordance with at least one of (i) the hair coloring target and (ii) the hair spectroscopy data.

In some embodiments, further comprising d. first and second reservoirs respectively containing first and second aqueous solutions, each aqueous solution comprising a pH regulating agent configured to maintain a pH in a range between 1 and 4 (e.g. between 1.5 and 4 or between 2 and 4 or between 2.5 and 4 or between 3 and 4), each aqueous solution having a 25 degrees C viscosity of at most 150 cP (e.g. at most 150 cP or at most 125 cP or at most 100 cP or at most 75 cP), the first aqueous solution containing an oxidizer and having an oxidizing strength equivalent to an aqueous solution of at least X wt.% hydrogen peroxide, and the second aqueous solution having an oxidizing strength equivalent to an aqueous solution of at most 0.1 X wt.% hydrogen peroxide, the value of X being at least 1; and e. a liquid dispenser configured to respectively dispense first and second quantities of the first and second aqueous solutions from the first and second reservoirs in accordance with at least one of (i) the hair coloring target and (ii) the hair spectroscopy data.

In some embodiments, further comprising: d. first and second reservoirs respectively containing first and second aqueous solutions, each aqueous solution comprising a pH regulating agent configured to maintain a pH in a range between 1 and 4 (e.g. between 1.5 and 4 or between 2 and 4 or between 2.5 and 4 or between 3 and 4), each aqueous solution having a 20 degrees C viscosity of at most 150 cP (e.g. at most 150 cP or at most 125 cP or at most 100 cP or at most 75 cP), the first aqueous solution containing an oxidizer and comprising at least X wt.% hydrogen peroxide, and the second aqueous solution being free of hydrogen peroxide or comprising at most 0.1 X wt.% hydrogen peroxide, the value of X being at least 1; and e. a liquid dispenser configured to respectively dispense first and second quantities of the first and second aqueous solutions

from the first and second reservoirs in accordance with at least one of (i) the hair coloring target and (ii) the hair spectroscopy data.

In some embodiments, a value of X is at least 1.5 or at least 2 or at least 2.5 or at least 3 or at least 4 or at least 5.

5 In some embodiments, the aqueous solution of the first reservoir has an oxidizing strength equivalent to an aqueous solution of at most 24 wt.%, at most 20 wt.%, at most 16 wt.%, at most 12% wt., at most 8 wt.%, at most 7 wt.%, at most 6 wt.%, at most 5 wt.%, at most 4 wt.%, at most 3 wt.%, at most 2 wt.% or at most 1 wt.% hydrogen peroxide.

10 In some embodiments, the first aqueous solution comprises at most 24% wt. hydrogen peroxide.

15 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a system for preparing a customized hair-coloring composition in accordance with measured optical properties of the user's hair.

FIGS. 2 and 3 respectively illustrate example dispenser and hair-reader devices.

20 FIG. 4 is a flow-chart of a routine for preparing a hair-coloring composition.

FIGS. 5-13 relate to methods and apparatus for optically acquiring data (e.g. spectral data) from keratinous fiber(s).

FIGS. 14-15 relate to a dispenser system for preparing compositions for oxidative hair-coloring.

25 FIGS. 16-19 relate to dispensing of cosmetic agents according to data read from a container in which the cosmetics agents are stored.

DETAILED DESCRIPTION OF EMBODIMENTS

30 The claims below will be better understood by referring to the present detailed description of example embodiments with reference to the figures. The description, embodiments and figures are not to be taken as limiting the scope of the claims. It should

be understood that not every feature of the presently disclosed methods and apparatuses is necessary in every implementation. It should also be understood that throughout this disclosure, where a process or method is shown or described, the steps of the method may be performed in any order or simultaneously, unless it is clear from the context that one
5 step depends on another being performed first. As used throughout this application, the word “may” is used in a permissive sense (i.e., meaning “having the potential to”), rather than the mandatory sense (i.e. meaning “must”).

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination
10 in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable sub-combination.

Definitions

15 For convenience, in the context of the description herein, various terms are presented here. To the extent that definitions are provided, explicitly or implicitly, here or elsewhere in this application, such definitions are understood to be consistent with the usage of the defined terms by those of skill in the pertinent art(s). Furthermore, such definitions are to be construed in the broadest possible sense consistent with such usage.

20 For the present disclosure, an "image" refers to one or more of (i) an image that is focused in both dimensions of an image plane (hereinafter a '2D-focused image') and (ii) an 'only-1D-focused-image' that is focused in only a first dimension of the image plane and blurred in the second dimension of the image plane that is orthogonal to the first dimension. In the context of images, 1D refers to a single dimension (one-dimension)
25 within the image plane and 2D refers to two dimensions within the image plane. The only-1D-focused-image image may be generated using any optics known in the art including but not limited to a toric lens - the skilled artisan will appreciate that other lenses or other optical components other than lenses (e.g. mirrors) may be used. The terms 'partial image' and a 'only-1D-focused-image' are used interchangeably.

30 An 'at least 1D-focused image' refers to either an 'only-1D-focused-image' or to a '2D-focused image.' Thus any reference to 'an at least 1D-focused image' means that (i)

in some embodiments, the image may be an "only-1D-focused-image" and (ii) in other embodiments, the image may be a '2D-focused image.'

Any reference to an 'image' without specifying the number of dimensions in which the image is focused may relate either to an 'only-1D-focused-image' (in some
5 embodiments) or to a '2D-focused image' (in other embodiments).

When an image is formed at an 'intermediate location' this means that either (i) a 2D-focused image is formed at the intermediate location (e.g. at a single intermediate location); (ii) only one only-1D-focused-image is formed at a single intermediate location or (iii) first and second only-1D-focused-images (i.e. respectively focused in first and
10 second directions (for example, the first and second directions are orthogonal to each other) and respectively blurred in orthogonals to the first and second directions) are formed in first and second intermediate locations. Thus, an 'intermediate location' refers to one or more intermediate locations.

For the present disclosure, 'color-dispersion optics' refers to optical components
15 which breaks light into spectral components. Examples of color-dispersion optics include but are not limited to a prism and a grating.

A "light detector" or a "detector" refers to one or more photodetectors - e.g. configured as an image sensor and/or in a 1D or 2D array of photodetectors. In another example, a scanning detector apparatus equivalent to a 1D or 2D 'starting' array of
20 photodetectors is used. When light is focused in an image plane at the light detector, the photodetector of the light detector is within the image plane.

A 'slit' is a particular type of aperture having a relatively high aspect ration - i.e. a length significantly exceeds a width thereof. For the present disclosure, for any embodiment requiring or reciting a 'slit,' an aperture may be substituted.

25 The term "color-imparting agent" refers to a hair-coloring agent (e.g. for example, for permanent hair-coloring) or to an ingredient thereof.

Unless otherwise specified, the term "coupler" refers to "dye coupler" and the term "precursor" refers to "dye precursor." The term "hair color-imparting agent" or simply "color-imparting agent" refers to a hair-coloring agent (e.g. for example, for permanent
30 hair-coloring) or an ingredient thereof. "Hair color-imparting agent" and "color-imparting agent" are used interchangeably. A "Permanent hair color-imparting agent"

refers to one of (i) 'color-imparting agent' for permanent hair-coloring or (ii) an ingredient thereof.

Dye precursors are generally aromatic diamines, diaminophenols, and/or aminophenols with an amine or hydroxy group *ortho* or *para* to an amine group.
5 Pyrimidine and pyrazole derivatives (e.g., substituted pyrimidine, substituted pyrazole), used to develop shades with red highlights, are also generally considered to be dye precursors.

Dye couplers are oxidation dye intermediates which, on their own, yield only feeble coloring through oxidation, but can be combined with dye precursors to produce stronger
10 shades. The amine and/or hydroxy groups substituting dye couplers are frequently in *meta* position to each other. Dye couplers include *m*-phenylene-diamines, *m*-aminophenols, naphthols, resorcinols, polyphenols, pyrazolones and their derivatives.

A "substantial majority" means at least 75%. In some embodiments, a 'substantial majority' is at least 90% or at least 95% or at least 99%. Unless specified otherwise, a
15 'majority' means 'at least a majority.' Unless specified otherwise, 'at least a majority' means that, in some embodiments, the 'majority' is at least a substantial majority - i.e. at least 75% or at least 90% or at least 95% or at least 99%.

The terms "color imparting agents", "color imparting compounds", "color imparting ingredients" and "coloring agents" are interchangeably used herein, and encompass any
20 compound used to impart a color by introducing a colored substance (e.g., dye, pigment), including, but not limited to, oxidation dye precursors, oxidation dye couplers, direct dyes, and any combination thereof.

In this specification, by "pH adjusting agent" is meant a compound or salt that is added to a solution to lower or raise the pH of the solution. It will be appreciated that in
25 some instances, the pH adjusting agent may function as a buffer; in such instances, the pH adjusting agent may also be referred to as a pH regulating agent. A "dry" tablet will be understood as being a tablet containing not more than 10 wt.%, not more than 9 wt.%, not more than 8 wt.%, not more than 7 wt.%, not more than 6 wt.%, not more than 5 wt.%, not more than 4 wt.%, not more than 3 wt.%, not more than 2 wt.%, or not more
30 than 1 wt.% water.

The term 'load of a tablet' comprising color-imparting agent relates to the weight or moles of the active hair-coloring ingredient.

Unless otherwise specified, a "viscosity" of a substance is as measured at a shear rate of 10 s^{-1} and at a temperature of $25 \text{ }^{\circ}\text{C}$. Unless otherwise specified a "25 $^{\circ}\text{C}$ viscosity" is measured at a shear rate of 10 s^{-1} .

The "abbreviation" cP refers to centipoise (cP). Unless otherwise specified, 'viscosity' refers to the 'dynamic viscosity.'

The term 'fluid' refers to a liquid or cream -- at any viscosity e.g. of at most 150 cP or at most 125 cP or at most 100 cP or at most 75 cP

10 The term "liquid dispenser" is used broadly to relate to a dispenser of any flowable medium including but not limited to liquids or an emulsion or an gel or a cream. In the present disclosure 'electronic circuitry' is intended broadly to describe any combination of hardware, software and/or firmware.

Electronic circuitry may include may include any executable code module (i.e. 15 stored on a computer-readable medium) and/or firmware and/or hardware element(s) including but not limited to field programmable logic array (FPLA) element(s), hard-wired logic element(s), field programmable gate array (FPGA) element(s), and application-specific integrated circuit (ASIC) element(s). Any instruction set architecture may be used including but not limited to reduced instruction set computer (RISC) 20 architecture and/or complex instruction set computer (CISC) architecture. Electronic circuitry may be located in a single location or distributed among a plurality of locations where various circuitry elements may be in wired or wireless electronic communication with each other.

Embodiments of the invention relate to the dispensing of a "multi-container tablet 25 combination" from a plurality of tablets. This means that for a plurality of N containers $Container_1 \dots Container_N$ (where N is a positive integer equal to at least 2), for two positive integers i and j ($i \neq j$, both i and j are equal to at least 1 and at most N), at least one tablet (in some embodiments, a plurality of tablets) is dispensed from $Container_i$ and at least one tablet (in some embodiments, a plurality of tablets) is dispensed from 30 $Container_j$.

In some embodiments, when a tablet dispenser dispenses tablets a tablet "in accordance with one or more properties" (e.g. a hair coloring target and/or hair spectroscopy data), the quantity of tablets (i.e. number and/or volume and/or weight - for example, relative quantities of tablets from multiple containers where different types of tablets are stored in each container) is determined according to the properties - for example, by electronic circuitry - for example, according to some algorithm predicting an outcome of a hair coloring.

In some embodiments, a liquid dispenser may dispense a flowable medium (e.g. a liquid or cream or gel or emulsion) "in accordance with one or more properties" (e.g. a hair coloring target and/or hair spectroscopy data) - this may refer to the quantity of flowable medium - for example, absolute quantities or relative quantities of flowable medium relative to tablets or relative quantities of one flowable medium (i.e. in a first reservoir) relative to another flowable medium (i.e. in a second reservoir). This may, for example, be carried out to dilute a flowable medium of one of the reservoirs with that or another reservoir. The determining may be carried out for example, by electronic circuitry - for example, according to some algorithm predicting an outcome of a hair coloring.

Solid formulations, suitable for use in the treatment of keratinous fibers are disclosed herein. According to some embodiments of the present invention, the solid formulations have a form of tablets comprising a superdisintegrating agent, which imparts advantageous features to the tablet. The solid formulations disclosed herein may further comprise color imparting agents (such as dye precursors, dye couplers and direct dyes), and can be used in combination with, or can further comprise, other agents for treating keratinous fibers, such as alkalizing agents and oxidizing agents.

FIG. 1 is a block diagram of a system for preparing a customized hair-coloring composition in accordance with measured optical properties of the user's hair. FIGS. 2 and 3 respectively illustrate example dispenser and hair-reader devices - e.g. useful in the system of FIG. 1. FIG. 4 is a flow-chart of a routine for preparing a hair-coloring composition - for example, using the system of FIG. 1.

FIGS. 5-13 relate to methods and apparatus for optically acquiring data (e.g. spectral data) from keratinous fiber(s). For example, a plurality of spectra of the

keratinous fiber(s) may be detected such that each spectrum corresponds to (i) a different respective portion of the keratinous fiber(s) and/or (ii) material within a different sub-region of space within which at least a portion of the keratinous fiber(s) are disposed.

FIGS. 14-15 relate to a dispenser system for preparing compositions for oxidative hair-coloring. In particular, it is possible to segregate dye precursor from couple such that some of the containers of the dispenser system contain dye precursor and are substantially free of coupler while other containers contain coupler and are substantially free of dye precursor. A dispenser device is configured to dispense contents of the containers to provide multi-container combinations comprising material from the first and second containers.

FIGS. 16-19 relate to dispensing of cosmetic agents (e.g. for hair-coloring or for any other cosmetic application) where for each container, data describing physical and/or chemical properties of the cosmetic material therein is encoded on the container. This data is read by a code-reader operatively linked to a dispensing device which dispenses the cosmetic material from the containers according to the data reader from the containers.

A Discussion of FIGS. 1-4

FIG. 1 is a block diagram of a system for (i) measuring optical properties of hair and, (ii) in accordance with the measured optical properties, dispensing material from containers to provide a customized hair-coloring composition. For example, a user desires to color his/her hair to a target shade. An optical measurement of the user's "initial hair" is performed, and a hair-coloring composition, customized according to the initial state of the user's hair as well as the hair-coloring target is prepared.

Illustrated in FIG. 1 are hair reader **3110**, system controller **3120**, and dispenser device **3130**. In the non-limiting example of FIG. 1, system controller **3120** includes dispensing decision engine **3140** which includes recipe-search engine **3150**, prediction engine **3160** and recipe-scoring engine **3170**.

Hair reader **3110** acquires optical data from hair - for example by illuminating the hair and detecting light reflected by and/or transmitted by and/or deflected by the hair. System controller **3120** (e.g. comprising a digital computer) receives both the optical data and hair target data (e.g. describing a target shade desired the user). In accordance with

the received data, the system controller **3120** computes (e.g. dispensing decision engine **3140**) using a customized recipe for the hair-coloring composition - e.g. including respective quantities of a plurality of different materials stored in dispenser **3110**.

5 The dispenser proceeds to dispense the materials (e.g. into a mixing vessel -- NOT SHOWN in FIG. 1) for the hair-coloring composition. These materials may be automatically or manually mixed to form a customized hair-coloring composition, which is applied to the user's hair.

10 One non-limiting example of a dispenser **3130** of hair-coloring agents is illustrated in FIG. 2. In this non-limiting example, a plurality of containers **180A-180Q** are engaged to dispenser **3130**, such that each container contains therein different respective material related to hair-coloring. Dispenser **3130** dispenses a combination of these material into a mixing vessel (NOT SHOWN) - e.g. located in port **182**.

15 In the example of FIG. 1, system controller **3120** includes dispensing decision engine **3140** which computes (a) preferred recipe(s) for dispensing material for the hair-coloring composition. Towards this end, a number of candidate recipes may be considered, selected from a relatively 'large' number of possibilities by receipt-search engine **3150** (For each candidate recipe, the predicted outcome of treating the user's hair according to the candidate recipe may be computed by prediction engine **3160** and scored by scoring engine **3170**. For example, scoring engine **3170** may compare the predicted
20 outcome with the hair-target data describing the shade desired by the user.

In one example, one or more of **3140**, **3150**, **3160**, and/or **3170** is implemented as software stored in volatile or non-volatile memory).

25 FIGS. 3A-3B illustrate a non-limiting example of a hair-reader **3110** in accordance with some embodiments. Hair-reader **3110** includes a housing **804** (e.g. opaque) and a window **808**. In FIG. 3B, a plurality of keratinous fibers **812** are substantially aligned along an alignment axis which corresponds to the 'y' axis.

FIG. 4 is a flow-chart of a non-limiting example of a technique for hair-coloring for example, using the system of FIG. 1. . In step **S101**, user-target data is received and stored (e.g. in volatile and/or non-volatile computer-readable storage). Typically, the
30 user-target data relates to a selected shade or color - e.g. a user desires to color his/her hair to the selected shade or color. In step **S105**, characteristic of a user's hair are

measured - e.g. using at least a hair-reader device (e.g. for measuring at least one hair-reflection value or for measuring a hair-reflection-spectrum(a)) such as that illustrated in FIGS. 2 or 4 or that disclosed in PCT/IB2012/051351 or any related hair-reader device, as discussed below. These characteristics may be electronically analyzed in step **S109**.

5 According to the technique of FIG. 4, it is possible to compute a 'customized' hair-treatment that is specific to (i) an initial pre-treatment state of the user's hair (e.g. as measured in step **S105** and analyzed in step **S109**) and (ii) the user-target data.

The term 'user-target' typically includes to a target color shade - e.g. expressible as a value in color-space such as Hunter *Lab* color space or any other color space. In addition to a target color shade, user-target data may also include some other desired characteristic of any proposed hair-treatment - e.g. a treatment of 'roots-only' as opposed to 'entire-hair-shaft,' a maximum treatment time, etc.

A plurality of hypothetical or 'candidate' hair-treatment protocols may be analyzed and considered. A 'hair-treatment' may refer to any one of: (A) content of a hair-coloring composition (or more than one hair-coloring composition which may be applied sequentially or simultaneously - for example, a dye-containing composition and a bleaching composition) to be applied to the hair and/or (B) other treatment parameters - e.g. treatment durations, treatment temperature. Computing or specifying a 'hair-treatment' may include specifying at least absolute or relative quantities or 'loads' (i.e. expressed in molar terms, or as weights, or as volumes, or in any other manner known in the art) of one or more hair-coloring agents of a hair-coloring composition (e.g. a 'multi-agent' composition). The term 'hair-coloring agent' may include an artificial colorant/dye, an oxidizer, an alkalizer or an other substance used in the art for temporary, semi-permanent, demi-permanent or permanent hair-coloring. A hair-coloring agent may be in any phase or form, including but not limited to liquid, gel, mouse, cream, solid, powder, tablet, or any other form known in the art. Optionally, a 'hair-treatment' also includes data relating to treatment time, treatment temperature, multi-stage treatments or any other parameter of treatment. For example, a hair-treatment may entail production of multiple distinct combinations of hair-coloring agents - e.g. a coloring mixture and a bleaching mixture which are applied in different stages.

For the present disclosure, the term 'hypothetical' and 'candidate' are used interchangeably and refer to possible treatments that may or may not be actualized.

Typically, the specific characteristics of each user's hair is quite individual (e.g. based upon his/her genotype, age, environmental effects etc.) and the number of potential target shades or colors may also be relatively large. Because of the myriad possible combinations of initial and target hair characteristics, the number of possible candidate/hypothetical hair-treatment protocols may be extremely large, and it is not always known *a priori* which hair-treatment protocols are predicted to be effective (or most effective) to transform hair from its initial state to a state matching the target data received in step **S101**.

As such, it may be necessary to electronically analyze multiple hypothetical hair treatments to identify a treatment (or set of more than one hypothetical hair-treatments) which successfully transforms the initial hair to a target color.

. This is done in steps **S113** and **S117**. Thus, in step **S113**, a post-protocol state for the hair is predicted for the hair-characteristics measured in step **S105** and a specific candidate hair-treatment. In step **S117**, it is electronically determined if this post-protocol state matches the specifications of the user target-data.

The term 'hair-color treatment' is not restricted to introducing colorants (e.g. artificial colorants) into the hair (i.e. 'coloring') but may also include hair-bleaching.

In one non-limiting example, (i) in step **S105** one or more initial reflection spectrum(a) are measured, (ii) in step **S113** a hypothetical post-treatment reflection spectrum is computed from the initial reflection spectrum and specifics of a candidate hair-treatment protocol, and a color value (e.g. an LAB value) is computed from the hypothetical post-treatment reflection spectrum; and (iii) in step **S117** this initial-hair-specific and candidate-protocol-specific LAB value is compared to an LAB value associated with the user-target data received in step **S101**.

In different embodiments, it is possible to measure a reflection spectrum, a transmission spectrum, a spectrum of deflected light, and an absorption spectrum.

In step **S121**, a protocol that matches the user target-data is selected. Optionally, for example, if more than one candidate protocol matches the user target-data, these

candidate protocols may be analyzed and/or scored, and a more preferred matching hair-coloring protocol may be selected accordingly.

In step **S125**, according to the selected hair-coloring protocol, respective quantities of hair-coloring agent, for a plurality of hair-coloring agents, are each
5 dispensed according to a specifics of the hair-coloring protocol selected in step **S121**.

One non-limiting example of a dispenser of hair-coloring agents is illustrated in FIG. 2. In this non-limiting example, different respective hair-coloring agents are disposed in each container of a plurality of containers **180A-180Q**. In response to the results of step **S121**, for at least 2 or at least 3 or at least 4 or at least 5 or at least any
10 number of hair-coloring agents, respective quantities of each hair-coloring agent are dispensed into a vessel (not shown) located in port **192**.

In some embodiments, the dispenser is automatic and includes electronic circuitry for regulating quantities of hair-coloring agents that are dispensed.

15 For the present disclosure, a dispensing a plurality of hair-coloring agents according to the results of some sort of computational and/or electronic operation(s) (e.g. a predicting of a post-hypothetical-hypothetical-hair-treatment spectrum (e.g. reflection spectrum) or a color value derived therefrom) refers to one or more of two situations: (i) a situation whereby electronic circuitry automatically controls a dispensing device (the
20 skilled-artisan is directed to PCT/IB2012/051351 incorporated herein by reference) and/or (ii) a situation whereby hair-coloring instructions computed from an electronic predicting is communicated to a human user (e.g. visually via a computer screen or in any other manner). The hair-coloring instructions may relate to relative quantities of hair-coloring agents and the human user follows the instruction to, for example, dispense hair-
25 coloring agent(s) according to the quantities specified by the computer-provided instructions. The container for a chemical agent may have any form factor (e.g. rigid container, tube, etc) and may either may mounted to a dispenser device as illustrated in FIG. 2 or may be a 'free' or unmounted container.

Once these agents are dispensed into the vessel, one or more steps may,
30 optionally, be performed to transform the contents of the vessel (not shown) into a hair-coloring mixture, which may then be applied to the user's hair to color the hair.

For the present disclosures, the terms 'input keratinous fiber(s)' and 'initial hair' are used interchangeably -- both refers to keratinous fibers(s) (e.g. hair) which is subjected to one or measurements (e.g. optical measurements and/or reflection measurements - for example, to measure a hair-reflection spectrum(a)) for the purpose of predicting a final state of one or more hypothetical hair-treatments.

The skilled artisan will appreciate that not every step of FIG. 4 is required in every embodiment, the order of steps of FIG. 4 is not limiting -- the steps may be performed a different order, additional steps may be performed, and one or more steps may be modified.

A Discussion of FIGS. 5-13

Embodiments of the invention relate to an apparatus and method for acquiring spectral data of a group of keratinous-fibers - e.g. human hair - for example (but not limited to) in the context of steps **S105** and **S109**. One application of the currently-disclosed system and method relates to hair-coloring -- for example, computing or selecting a hypothetical hair treatment. In this example, a preferred hair treatment (e.g. computed in steps **S113-S121**) may depend on both (i) an initial state of the hair; and (ii) a user-specified target - e.g. a desired shade or color for the hair.

Towards this end, when characterizing the initial state of the hair (e.g. in step **S109**), it may be desirable to spectrally and/or automatically to distinguish between two types of hair which, to the layman and/or 'casual naked eye viewer' both share a similar 'grey hair' appearance.

The first hair-type may be what is termed as 'natural grey' -- a mixture of natural-hair-pigment-containing hair shafts (e.g. melanin-containing hair shafts such as black shafts or red shafts or blond shafts or brown shafts or other naturally-colored shafts) and natural-white hair shaft (e.g. due to age, albinism, or any other reason which may naturally render hair white) . The combination of the different types of hair-shaft may appear simply as 'grey' to the casual naked-eye viewer.

The second hair-type may be what is termed 'artificial grey' - hair-shafts that have been colored by artificial colorant. Typically, for the second hair-type, the hair-shafts tend to be more similar to each other with respect to color than the first hair-type. Thus, when considering, as a whole, a group of keratinous fibers (e.g. hair-shafts), it may be

said that those of the second type are more homogenous with respect to color than those of the first group.

The term 'hair-type' refers to a characteristic of a multiple hair-shafts - e.g. of a 'mixture' of hair on the user's head.

5 Although a trained professional may be able to distinguish between the first and second hair-type, in many situations no such professional is available and/or this approach is not practical. In one non-limiting example, spectral data of the hair is acquired for the purpose of computing a predicted post-treatment hair-spectrum and an LAB value therefrom), and it may be useful to also employ spectral data to distinguish
10 between first and second types of hair.

In different examples, various types of hair are schematically illustrated in the figures. As illustrated in FIG. 5, (i) a top or side-view of a generic hair shaft is illustrated as a 'dot-dash' pattern; (ii) a cross-section view of a generic stand is illustrated by a 'brick' pattern. FIG. 5 also relates to (i) a white-hair shaft (e.g. natural-white - e.g. substantially
15 melanin-lacking); (ii) a black-hair shaft (e.g. natural black hair - e.g. color due to a presence of melanin); (iii) a grey hair shaft (e.g. the color is due to artificial colorants).

FIG. 6 is a close-up of substantially-aligned hair shafts on window **808** of hair-reading device -- window **808** includes a transparent surface **820** (e.g. of glass or plastic) and a support frame **816** for supporting transparent surface **820** on housing **804**.

20 FIG. 7A-7B illustrate a plurality of keratinous fibers on a window of a spectral hair-reader **3110**. FIG. 7A is a cross-section view while FIG. 7B is a side view. An illumination source **118** illustrates keratinous fibers, and light (e.g. primarily light of diffusive reflections) therefrom passes through slit or aperture **120**. Additional components of the system of FIG. 7A are illustrated in FIGS. 11A-11B, discussed below.

25 In non-limiting embodiments, the fiber(s) may illuminated by white-light, multi-color light, broadband light, and/or incoherent light.

FIG. 8 is a close-up of cross-sectional view of hair shafts **812**. Because the hair-shafts are aligned along alignment axis "y", the hair-shafts define two 'lateral axes' perpendicular to alignment axis y -- the x axis and the z axis, both of which are illustrated
30 in FIG. 8.

FIG. 9 is a close-up of the top view of hair-shafts of FIG. 6. As shown in FIG. 9, a region in which the hair-shafts are disposed may be divided into 3 portions or slices: (i) slice **840A** in which shafts **812A**, **812B** are disposed; (ii) slice **840B** in which shafts **812C**, **812D** are disposed; and (iii) slice **840C** in which shafts **812E**, **812F** are disposed.

5 The non-limiting example of FIG. 9 shows a relatively 'simple' case where each slice includes the same number of hair shafts, and every hair-shaft is contained within a single respective slice (i.e. there are no hair-shafts that are partly disposed in multiple slices). The skilled artisan will appreciate that this is not a limitation.

10 Embodiments of the invention relate to an apparatus whereby instead of measuring a single spectrum (e.g. reflection and/or absorption and/or transmission spectrum) for all hair-shafts, it is possible to measure a different respective spectrum for each slice or sub-region - e.g. a first spectrum for hair shaft(s) disposed within slice **840A**, a second spectrum for hair shaft(s) disposed within slice **840B**, and a third spectrum for hair shaft(s) disposed within slice **840C**.

15 FIG. 10 illustrates one application of this presently disclosed hair-spectrum-related technique. Case 1 relates to a first hair-type -- what may be termed as 'natural grey.' According to Case 1, (i) the following hair-shafts are white-shafts **812A**, **812C**, and **812D**; and (ii) the following hair-shafts are black-shafts **812B**, **812E**, and **812F**. Case 2 relates to a second hair-type -- what may be termed 'artificial grey' - where all hair-shafts
20 have been colored by artificial colorant. Clearly, in Case 2 the hair-shaft color has a greater degree of homogeneity than in Case 1.

Embodiment of the present invention relate to a situation where instead of measuring a single hair-spectrum descriptive of some sort of average of all illuminated hair-shafts, it is possible to determine, for each slice selected from a plurality of slices, a
25 respective hair-spectrum. In Case 1 of FIG. 10, it may be possible to observe significant differences between the respective hair-spectrum for each slice -- the spectrum corresponding to slice **840C** may be a 'dark-hair' spectrum, the spectrum corresponding to slice **840B** may be a 'white-hair' spectrum, and the spectrum corresponding to slice **840A** may be a 'grey-hair' spectrum. In contrast, in Case 2 of FIG. 10, all three spectra may be
30 quite similar.

In some embodiments, it is thus possible to (i) compare multiple spectra with each other, each spectrum corresponding to a different respective slice **840**, and to compute a degree of similarity therebetween and (ii) in accordance with the measured degree of similarity (or difference), distinguish between 'Case 1' and 'Case 2' -- in Case 2, a greater
5 degree of similarity between slice-specific hair-spectra may be observed.

FIG. 11A is a non-limiting example of an apparatus for measuring a plurality of spectra of hair-shafts, each spectrum corresponding to a different respective slice in which a different respective set of hair-shafts (or portions thereof) are disposed. One salient feature of FIG. 11A is the presence of two imaging system **1080** and **1070**, each of
10 which comprises a different respective set of optical component(s).

In one non-limiting example, illustrated in FIG. 12, detector **180** comprises an array (e.g. two-dimensional - for example, planar array) of photodetector -- in the example of FIG. 12, this is an 8X3 array, though any other section of dimensions (e.g. comprising at least 2 rows and at least 2 columns) may be used. For example, a CCD or
15 CMOS array may be employed.

In some embodiments, imaging system **1080** is operative to focus light reflected and/or deflected and/or transmitted from hair-shafts **812** before this reflected and/or deflected and/or transmitted light passes through slit or aperture **120** so that (i) the hair-shafts **812** are located in an object-plane and (ii) slit or aperture **120** is located in an
20 image plane. In this non-limiting embodiment, the image located at 'image' plane is an 'intermediate image.' The 'intermediate image' (e.g. at slit or aperture **120**) may be an only-1D-focused-image -- for example, a focused in a dimension perpendicular to hair-alignment axis **812** -- for example, along the x-axis (see **992** of FIG. 6).

In some embodiments, imaging system **1070** is operative to focus light reflected
25 and/or deflected and/or transmitted from the hair-shafts after passing through slit **120** so that the hair slit **120** (or another 'intermediate' location where the intermediate image) is in an object plane and photodetectors **180** (e.g. a planar two-dimensional array thereof -- e.g. a CCD or CMOS array) are in an image plane **180** -- thus, photodetectors **180** receive an image of slit **120** on which an image of hair-shafts **812** is present -- an 'image of an
30 'image.'

Alternatively, instead of a two-dimensional array of photodetectors (i.e. a 'starting' system), a scanning system may be employed - e.g. to achieve the effect of detecting a two-dimensional image at a focal plane of imaging system **1070**.

The image is not required to be located exactly on slit or aperture **120**. In and may
5 be located on any location another intermediate location along the optical path between

Also illustrated in FIG. 11 is grating **150**. Alternatively, a prism may be used.

In another example, it is possible to detect reflection spectrum(a) and/or
absorption spectrum(a) and/or transmission spectrum(a) using photodetector that have
wavelength and/or 'color' (i.e. in the visible range or any other spectrum) sensitivity.

10 Similarly, there is no requirement of a slit or elongated aperture -- other optical
component(s) (e.g. lens(es)) may be configured to provide this functionality.

Thus, some embodiments relate to any device (e.g. monochromator device)
configured to measure spectral data (e.g. a reflection, absorption or transmission
spectrum) of the keratinous fiber(s).

15 As illustrated in the non-limiting example of FIG. 12, (i) Row A of the 2D-array
of photodetectors **180** is used to detect spectral data of keratinous fiber(s) within slice
840A; (ii) Row B of the 2D-array of photodetectors **180** is used to detect spectral data of
keratinous fiber(s) within slice **840B**; (iii) Row C of the 2D-array of photodetectors **180**
is used to detect spectral data of keratinous fiber(s) within slice **840C**. Examples of such
20 spectrum are illustrated in the right-hand column of FIG. 12.

FIG. 13 is a flow chart of a technique for computing a hair-coloring recipe and/or
for dispensing hair-coloring agents (e.g. from the dispenser of FIG. 3). In step **S301**, a
plurality of reflection spectra are measured, each spectrum corresponding to a different
respective slice - e.g. a first spectrum that is specific to hair shaft(s) within slice **840A**, a
25 second spectrum that is specific to hair shaft(s) within slice **840B**, and a third spectrum
that is specific to hair shaft(s) within slice **840C**.

In step **S309**, the slice-specific spectra are compared with each other, and a
parameter descriptive of similarity of multiple spectra may be computed. For example, if
the spectra are relatively similar to each other, a recipe **S313** may be provided for
30 'homogenous grey' (see Case 2 of FIG. 10). Alternatively, if the spectra are less similar
to each other, a recipe specific to a heterogeneous mixture of hair (see Case 1 of FIG. 10)

may be provided. Hair-coloring agents may be dispensed according to the computed hair-coloring recipes.

A Discussion of FIGS. 14-15

Embodiments of the present disclosure relate to apparatus and methods for
5 dispensing "dye couplers" and "dye precursors." In some embodiments and with
reference to FIGS. 14A, a system **270** for preparing a hair-coloring composition thereof
comprises: a. a plurality of containers **280**, each container **280** holding therein a different
permanent hair color-imparting agent therein and b. a dispenser configured to dispense
the contents of the containers thereof to provide multi-container combinations of hair-
10 coloring agents or ingredients.

In some embodiments, the contents of a first of the plurality of containers (e.g.
container **280A**) comprise dye precursor and is substantially free of dye coupler. When a
contents of a container "comprise dye precursors" and are "substantially free" of dye-
coupler, this means that either (i) the contents comprise only dye precursor and are free
15 of dye-coupler or that (ii) a dye precursor : dye coupler weight ratio of the contents of
the containers is at least 1.5:1 or at least 2:1 or at least 3:1 or at least 5:1, , at least 10:1, at
least 50:1, at least 100:1, at least 500:1, at least 1000:1, at least 5000:1, or at least
10,000:1.

As noted above, in some embodiments, in some embodiments, the contents of a
20 first of the plurality of containers (e.g. container **280A**) comprise dye precursor and is
substantially free of dye coupler. Alternatively or additionally, contents of a second of
the containers (e.g. container **280B**) comprise dye coupler and is substantially free of dye
precursor. When a contents of a container "comprise dye precursor coupler" and are
"substantially free" of dye-precursor, this means that either (i) the contents comprise only
25 dye coupler and are free of dye-precursor or that (ii) a dye coupler: dye precursor weight
ratio of the contents of the containers is at least 1.5:1 or at least 2:1 or at least 3:1 or at
least 5:1, , at least 10:1, at least 50:1, at least 100:1, at least 500:1, at least 1000:1, at least
5000:1, or at least 10,000:1.

As discussed below, in some embodiments, the dispenser is automatic and may
30 automatically dispense contents of the containers **280** to provide the multi-container
combination - for example, in accordance with at least one of (i) a hair coloring target

and/or (ii) hair spectroscopy data. Alternatively, the dispenser may be a manually operated.

Not wishing to be bound by theory, the present inventors have found that for multi-container devices that dispense color-imparting agents, that there may be more than
5 'path' or method for achieving a certain target hair-color composition. For example, to achieve a hair-coloring composition *HCC* with specific properties, it may be possible to either (i) dispose a quantity *QAI* of color-imparting agent *CIA_A* from Container A **280A**, a quantity *QCI* of color-imparting agent *CIA_C* from Container C **280C** and a quantity *QGI* of color-imparting agent *CIA_G* from Container G **280G** and to mix these
10 color imparting agents together OR (ii) dispose a quantity *QDI* of color-imparting agent *CIA_D* from Container D **280D**, and a quantity *QEI* of color-imparting agent *CIA_E* from Container E **280E**. The present inventors have found, however, that by segregating dye precursors from dye couplers, it is possible to increase the number of 'paths' or coloring-agent compositions available to achieve (i.e. by mixing) the provision of certain
15 hair-colors.

During use of dispenser **270**, the hair-coloring agents in the different containers may be used up and require replacement at different times - e.g. not all containers exhaust their supply of hair-coloring agent simultaneously. If, however, it is possible to achieve various color combinations without require on a presence of color-imparting agent within
20 a 'particular container,' the user can continue using the dispenser even when the containers of the 'particular container' are exhausted, as long as alternative combinations of 'paths' of achieving the various color combinations are available only using the contents of the other containers (i.e. other than the 'particular container').

By implementing a system which, in general, increases the number of available
25 'paths' or 'mixing combinations' (i.e. by means of segregation of precursor and coupler), it is possible for a user of dispenser **270** to operate the dispenser with less of a need to immediately refill containers whose contents have been exhausted.

For cases where the dispenser **270** is automatic, dispenser **270** may include any combination of mechanical and/or electric components needed to dispense hair color-
30 imparting agents.

FIG. 14A is a schematic diagram of a system **270** for dispensing agents related to permanent hair-coloring into target vessel **290**. The agents are stored in containers **280** - in the non-limiting example of FIG. 1A, the system includes 7 container **280A-280G**. Within each container is stored respective hair-coloring agent, for example, related to permanent hair-coloring.

Operation of lever **284** dispenses material from the containers into a target vessel **292** located within port **288**. The material may be dispensed sequentially or simultaneously. In FIG. 14B, material from container C **280C** is dispensed into vessel **292**. In FIG. 14C, material from container E **280E** is dispensed into vessel **292**.

Dispensing system is thus configured to dispense color-imparting agents from a any subset of the plurality of containers to provide any multi-container combination.

The quantities of color-imparting agent disposed from each container **280** may be determined manually or automatically. In one embodiment, the quantities are computed in accordance with at least one of (i) a hair coloring target and/or (ii) hair spectroscopy data.

Within the containers, the coloring agents may be provided as solid material (e.g. for example, as tablets or as particulate matter such as powders), as a liquid, cream, gel, emulsion, or in any other phase or combination thereof. The coloring agents in each container does not need to be in the same phase. This applies to any container including but not limited to (i) the container comprising dye precursor and substantially free of dye-coupler and/or (ii) the container comprising - i.e. the contents of any such container may be solid material (e.g. for example, as tablets or as particulate matter such as powders), as a liquid, cream, gel, emulsion, or in any other phase or combination thereof.

In a first non-limiting example, (i) the coloring agent within first container **280A** comprise dye precursors and is substantially free of dye-coupler, (ii) the coloring agent within second container **280B** comprise dye coupler and is substantially free of dye-precursor, (iii) the respective coloring agent within each of the first **280A** and second **280B** containers is provided as a solid material - for example, in tablet form.

In a second non-limiting example, (i) the coloring agent within first container **280A** comprise dye precursors and is substantially free of dye-coupler, (ii) the coloring agent within second container **280B** comprise dye coupler and is substantially free of

dye-precursor, (iii) the respective coloring agent within each of the first **280A** and second **280B** containers is provided as liquid or gel or mousse.

In a third non-limiting example, (i) the coloring agent within first container **280A** comprise dye precursors and is substantially free of dye-coupler, (ii) the coloring agent
5 within second container **280B** comprise dye coupler and is substantially free of dye-precursor, (iii) the coloring agent within the first **280A** container is provided as a solid material (e.g. in tablet format) and the coloring agent within the first **280A** container is provided as a liquid.

Embodiments where one or more of the containers contains one or more tablets
10 including a hair color-imparting agent are now discussed.

In some of the embodiments related to tablets, one or more (e.g. at least 1, at least 2, at least 5, or least 10, or at least 25, or at least 50, or at least 100) tablets are disposed in the first container **280A** are such that for each tablet, the ratio by weight of dye precursor to coupler is at least 1.5:1 or at least 2:1 or at least 3: 1 or at least 5:1, , at least
15 10:1, at least 50:1, at least 100:1, at least 500:1, at least 1000:1, at least 5000:1, or at least 10,000:1 or infinity (e.g. denominator has a value of zero so ratio is undefined or approaches or is infinity).

In some embodiments, (i) in a first **280A** of the containers, a majority or a substantial majority of all tablets disposed therein are such that a ratio by weight of
20 coupler to dye precursor in the container is at least 1.5:1 or at least 2:1 or at least 3: 1 or at least 5:1, , at least 10:1, at least 50:1, at least 100:1, at least 500:1, at least 1000:1, at least 5000:1, or at least 10,000:1 or infinity (e.g. denominator has a value of zero so ratio is undefined or approaches or is infinity); and (ii) in a second **280B** of the containers, a majority or a substantial majority of all tablets disposed therein are such a ratio by weight
25 of dye precursor to coupler in the container is at least 1.5:1 or at least 2:1 or at least 3: 1 or at least 5:1, , at least 10:1, at least 50:1, at least 100:1, at least 500:1, at least 1000:1, at least 5000:1, or at least 10,000:1 or infinity (e.g. denominator has a value of zero so ratio is undefined or approaches or is infinity).

In any container there may any number of tablets - for example, at least 1, at least
30 2, at least 5, or least 10, or at least 25, or at least 50, or at least 100.

Embodiments related to different 'loads' are now discussed. Tablets of the 'first type' comprise dye precursor and are substantially free of dye coupler, that tablets of the 'second type' comprise dye coupler and are substantially free of dye precursor.

The term 'load of a tablet' comprising color-imparting agent relates to the weight or moles of the active hair-coloring ingredient.

For a tablet of the 'first type,' a 'load by weight' is the weight (e.g. in grams) of dye precursor within the tablet. For a tablet of the 'second type,' a 'load by weight' is the weight (e.g. in grams) of dye coupler within the tablet. For a tablet of the 'second type,' a 'load by moles' is the number of moles of dye precursor within the tablet. For a tablet of the 'second type,' a 'load by moles' is the number of moles of dye coupler within the tablet.

In some embodiments, (i) each of at least majority of (or each of at least a substantial majority of or all) tablets in the first container **280A** are of a first type and/or (ii) each of at least majority of (or each of at least a substantial majority of or all) of tablets in the second container **280B** are of a second type and/or (iii) each of at least majority of (or each of at least a substantial majority of or) tablets in the third container **280C** are of the first type; and/or (iv) each of at least majority of (or each of at least a substantial majority of or) tablets in the fourth container **280D** are of the second type.

According to a first example, the same dye precursor is stored in the first **280A** and third container **280C**, however, at different loads. Thus, in the first example, it is possible to compare loads or volumes between (i) a set *TABLET_SET1* of tablets within the first container **280A** and (ii) a set *TABLET_SET3* of tablets within the third container **280C** where all tablets of *TABLET_SET1* and all tablets of *TABLET_SET3* are of the 'first type' and comprise the same dye precursor and are all substantially free of dye coupler. In this first example, at least a majority or at least a substantial majority or all tablets stored within the first **280A** container are members of set *TABLET_SET1*; , at least a majority or at least a substantial majority or all tablets stored within the third **280C** container are members of set *TABLET_SET3*. In this first example, an average volume of tablets of set *TABLET_SET1* is VOL_1 and an average load (by mole) of tablets of set *TABLET_SET1* is LM_1 and average load (by weight) of tablets of set *TABLET_SET1* is LW_1 . For example, all tablets of *TABLET_SET1* may have the same volume or load by

weight or load by mole. In this first example, an average volume of tablets of set *TABLET_SET3* is VOL_3 and an average load (by mole) of tablets of set *TABLET_SET3* is LM_3 and average load (by weight) of tablets of set *TABLET_SET3* is LW_3 . For example, all tablets of *TABLET_SET1* may have the same volume or the same load (by weight) or the same load (by mole). Alternatively or additionally, all tablets of *TABLET_SET3* may have the same volume or the same load (by weight) or the same load (by mole).

According to this first example, at least one or at least two or at least three of the following is true: (i) load-weight ratio LW_1 / LW_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10] and/or (ii) load-molar ratio LM_1 / LM_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10] and/or a (ii) volume ratio VOL_1 / VOL_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

Alternatively or additionally, according to a second example, the same dye coupler is stored in the second **280B** and fourth container **280D**, however, at different loads. Thus, in the second example, it is possible to compare loads or volumes between (i) a set *TABLET_SET2* of tablets within the second container **280B** and (ii) a set *TABLET_SET4* of tablets within the fourth container **280D** where all tablets of *TABLET_SET2* and all tablets of *TABLET_SET4* are of the 'second type' and comprise the same dye coupler and are all substantially free of dye precursor. In this second example, at least a majority or at least a substantial majority or all tablets stored within the second **280B** container are members of set *TABLET_SET12*, at least a majority or at least a substantial majority or all tablets stored within the fourth **280D** container are members of set *TABLET_SET4*. In this second example, an average volume of tablets of set *TABLET_SET2* is VOL_2 and an average load (by mole) of tablets of set *TABLET_SET2* is LM_2 and average load (by weight) of tablets of set *TABLET_SET2* is LW_2 . For example, all tablets of *TABLET_SET2* may have the same volume or load by weight or load by mole. In this second example, an average volume of tablets of set *TABLET_SET4* is VOL_4 and an average load (by mole) of tablets of set *TABLET_SET4* is

LM_4 and average load (by weight) of tablets of set *TABLET_SET4* is LW_4 . For example, all tablets of *TABLET_SET2* may have the same volume or the same load (by weight) or the same load (by mole). Alternatively or additionally, all tablets of *TABLET_SET4* may have the same volume or the same load (by weight) or the same load (by mole).

- 5 According to this first example, at least one or at least two or at least three of the following is true: (i) load-weight ratio LW_2 / LW_4 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10] and/or (ii) load-molar ratio LM_2 / LM_4 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10] and/or a (ii) volume ratio VOL_2 / VOL_4 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

- Embodiments of the invention relate to the dispensing of a "multi-container tablet combination" from a plurality of tablets. This means that for a plurality of N containers $Container_1 \dots Container_N$ (where N is a positive integer equal to at least 2), for two positive integers i and j ($i \neq j$, both i and j are equal to at least 1 and at most N), at least one tablet (in some embodiments, a plurality of tablets) is dispensed from $Container_i$ and at least one tablet (in some embodiments, a plurality of tablets) is dispensed from $Container_j$.

- In some embodiments, when a tablet dispenser dispenses tablets a tablet "in accordance with one or more properties" (e.g. a hair coloring target and/or hair spectroscopy data), the quantity of tablets (i.e. number and/or volume and/or weight - for example, relative quantities of tablets from multiple containers where different types of tablets are stored in each container) is determined according to the properties - for example, by electronic circuitry - for example, according to some algorithm predicting an outcome of a hair coloring.

- In some embodiments, a liquid dispenser may dispense a flowable medium (e.g. a liquid or cream or gel or emulsion) "in accordance with one or more properties" (e.g. a hair coloring target and/or hair spectroscopy data) - this may refer to the quantity of flowable medium - for example, absolute quantities or relative quantities of flowable

medium relative to tablets or relative quantities of one flowable medium (i.e. in a first reservoir) relative to another flowable medium (i.e. in a second reservoir). This may, for example, be carried out to dilute a flowable medium of one of the reservoirs with that or another reservoir. The determining may be carried out for example, by electronic
5 circuitry - for example, according to some algorithm predicting an outcome of a hair coloring.

An example of a 'reservoir' is illustrated in FIG. 15.

A Discussion of FIGS. 16-19

FIGS. 16-19 relate to dispensing of cosmetic agents (e.g. for hair-coloring or for
10 any other cosmetic application) where for each container, data describing physical and/or chemical property(ies) of the cosmetic material therein is encoded on the container.

Within each container is stored a cosmetic agent - for example, a hair-coloring agent or any other cosmetic agent known (e.g. for applications other than hair-coloring) in the art.

15 On each container **180A-180P** (e.g. mounted thereon or therein, embedded in the container) is a different respective data-storage element **190A-190B** for storing information about the contents of each container. Examples of data-storage elements include but are not limited to hologram elements, barcodes, QR codes, I2C EEPROM, magnetic coding elements, mechanical coding elements and RFID elements.

20 This data-storage element may be read by a code-reader **188** - e.g. operatively linked to the dispenser and/or to an electronic controller thereof.

In different embodiments, one or more the following data-items about the contents of the containers may be encoded: batch number, material type in the container, quantity data (e.g. the initial quantity or current quantity within the container), material
25 version, dyes content (e.g. for the colorants), production date, levels of ammonia, peroxide, MEA, viscosity (e.g. for the creams), and expiration date.

In yet another example, use-history and/or storage-history data related to the container or contents thereof may be stored. In one example, it may be possible to store a time or date when the container is installed onto the dispenser. Alternatively or
30 additionally, it may be possible to store a temperature and/or humidity history of the ambient environment in which the container is situated - e.g. to compute the effect of

'aging' upon the material within the containers. In some embodiments, code-reader **188** may be operative to write (or otherwise update) data to data-storage element **190**.

Not every cosmetic agent may age in the same manner -- thus, it is possible that a first cosmetic agent loses its potency at a faster rate than a second agent. In this situation, the algorithm for computing the relative quantities of cosmetic agent required for a cosmetic objective (e.g. hair-coloring) may be influenced by the age (i.e. chronological age or another method of aging of the material - e.g. material stored in a high humidity environment may age differently than material stored in a low material environment). This is discussed below with reference to FIG.19.

Reference is made to FIG. 17A. In step **S701**, the code is read by code-reader **188** from data-storage element **190**. In step **S705**, the contents are dispensed according to the results of code-reading.

One application is to make sure that only safe and cosmetically-acceptable material is dispensed from the containers. Thus, in step **S711** of FIG. 17B, a container is only 'eligible' (step **S715**) or dispensing if the material meets this standard. Otherwise (step **S719**) the dispenser may refuse to dispense material containing unacceptable material.

In some embodiments, the results of the code-reading (step **S701** by code-reader **188**) may influence the behavior of dispensing decision engine **3140** - e.g. by influence predicting and/or scoring of a candidate recipe. In one example, different batches may have slightly different but not identical physical and/or chemical property(ies). In another example, as material ages its physical and/or chemical property(ies) change. Thus, a recipe using the recently-manufactured material may have a different effect on a user's hair than the same recipe using the same material after aging.

FIG. 18 relates to the situation where the results of the code reading influence the behavior of dispensing decision engine **3140**. In step **S721**, the predictions of the influence of recipes upon a user's hair and/or the scoring of a particular recipe may be performed according to the results of the code-reading, and the materials are dispensed from the containers (in step **S739**) according to the influenced scoring/predicting.

FIG. 19 is a method for dispensing material from containers according to a material-aging property computed from data read from data-storage element **190**.

It is possible to store in data-storage element both (i) reference or baseline physical and/or chemical property(ies) of the cosmetic agent (e.g. their properties upon manufacture or upon opening of the container or upon engaging the container to the dispenser) and (ii) a material aging-metric - the amount of time since the baseline properties prevailed, or other history data related to aging - e.g. humidity or temperature over time.

When there is a need to dispense different relative quantities of material from the dispensers, it is possible to compute from the base-line properties and from the aging metric an estimate of current physical and/or chemical property(ies) of material within the container (step **S731** of FIG. 19). From this estimate, it is possible to dispense the appropriate quantity. For example, this estimate may be used (i.e. in steps **S735-S739** of FIG. 19) to use as input to any algorithm for dispensing material described herein.

Thus, some embodiments relate to a system for dispensing cosmetic ingredients comprising: a. a dispensing device; b. a plurality of containers, each containing a different respective cosmetic agent stored therein having different respective cosmetic properties, each container encoded with respective data describing both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material; and c. a code-reader included in or operatively linked to the dispensing device, the code-reader being configured to read the respective encoded reference physical-chemical property(ies) and ageing metrics from each of the containers, wherein: i. the dispensing device is configured, when the containers are engaged thereto, to dispense cosmetic agents from the containers in relative quantities determined in accordance with estimations of current physical-chemical property(ies) of the cosmetic agents stored within the containers; and ii. the estimations of current physical-chemical properties of each cosmetic agent are computed in accordance with both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material

Examples of ageing metrics include (i) an amount of elapsed time since manufacture or opening the container or engagement of the container to the dispenser; and (ii) historical temperature or humidity.

Having thus described the foregoing exemplary embodiments it will be apparent to those skilled in the art that various equivalents, alterations, modifications, and improvements thereof are possible without departing from the scope and spirit of the claims as hereafter recited. In particular, different embodiments may include
5 combinations of features other than those described herein. Accordingly, the claims are not limited to the foregoing discussion.

WHAT IS CLAIMED IS:

1. A method of optically acquiring data from keratinous fiber(s), the method comprising:
 - a. illuminating the keratinous fiber(s) such that light reflected and/or deflected and/or transmitted by the fiber(s) is incident upon a detector and converted into electrical signal(s) by the detector; and
 - b. computing, from electrical signal(s), a plurality of spectra of the keratinous fiber(s) such that each spectrum of the plurality of spectra respectively corresponds to (i) a different respective portion of the keratinous fiber(s) and/or (ii) material within a different sub-region of space within which at least a portion of the keratinous fiber(s) are disposed.
2. The method of any preceding claim, performed so that:
 - i. the illuminated fiber(s) are in a first object plane;
 - ii. a first image is formed at an intermediate location along an optical path between the fiber(s) and the detector(s), the intermediate location being configured both as a first image plane and a second object plane, the first image being an at least 1D-focused image of the fiber(s); and
 - iii. a second image is formed at the detector, the second image being an image of the first image.
3. The method of any preceding claim, performed so that due to a presence of at least one imaging system(s):
 - i. the illuminated fiber(s) are in a first object plane;
 - ii. a first image is formed at an intermediate location along an optical path between the fiber(s) and the detector(s), the intermediate location being configured both as a first image plane and a second object plane. the first image being an at least 1D-focused image of the fiber(s); and
 - iii. a second image is formed at the detector, the second image being an image of the first image.
4. The method of claim 3 wherein the image system(s) are disposed along the optical path.

5. The method of any preceding claim wherein a slit or aperture is disposed along the optical path between the keratinous fiber(s) and the detector(s) and the intermediate location substantially corresponds to a location of the slit or aperture.
6. The method of any preceding claim, wherein the at least 1D-focused image of the keratinous fiber(s) is a 2D-focused image of the keratinous fiber(s).
7. The method of any preceding claim wherein the detector comprises a plurality of constitutive photo-detectors arranged in a two-dimensional planar array, a plane of which corresponds to an image plane of the second image.
8. The method of any preceding claim, wherein a first and second sub-sets of the constitutive photodetectors respectively generate first reflection and second spectra that respectively correspond (i) to first and second portions of the keratinous fibers and/or (ii) material within a first and second sub-region of space within which at least a portion of the keratinous fiber(s) are disposed.
9. The method of claim 8, wherein the sub-sets of photodetectors are disjoint.
10. The method of any of claims 8-9, wherein in one direction the sub-sets of photodetectors are parallel to each other.
11. The method of any preceding claim, wherein the illuminated fibers are aligned with one another along an alignment axis and the first and second portions of the fibers corresponding to the first and second spectra are aligned with each other along the alignment axis.
12. The method of any preceding claim, wherein a first direction of the array of photodetectors corresponds to varying wavelength and a second direction perpendicular to the first direction corresponds to different portions of the keratinous fibers.
13. The method of any preceding claim, wherein each reflection spectrum of the plurality of spectra respectively corresponds to a different respective disjoint portion of the keratinous fibers.
14. The method of any preceding claim further comprising:

- c. electronically comparing a spectrum specific to a first of the portions of the keratinous fiber(s) with a spectrum specific to the second of the portions of the keratinous fiber(s); and
 - d. in accordance with the results of the comparison, classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color.
- 15. The method of any preceding claim further comprising:
 - c. electronically comparing a reflection spectrum specific to a first of the portions of the keratinous fiber(s) with a reflection spectrum specific to the second of the portions of the keratinous fiber(s); and
 - d. in accordance with the results of the comparison, classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color.
- 16. The method of any preceding claim further comprising:
 - c. electronically comparing a spectrum specific to a first of the portions of the keratinous fiber(s) with a spectrum specific to the second of the portions of the keratinous fiber(s); and
 - d. dispensing a combination of hair-coloring agents according to the results of the comparing.
- 17. The method of any previous further comprising:
 - c. electronically comparing a reflection spectrum specific to a first of the portions of the keratinous fiber(s) with a reflection spectrum specific to the second of the portions of the keratinous fiber(s); and
 - d. dispensing a combination of hair-coloring agents according to the results of the comparing.
- 18. A fiber-coloring-related method comprising:
 - a. disposing keratinous fibers of a subject so that a different portion of the fiber(s) is respectively located in a different slice of a region of space divided into a plurality of slices;
 - b. for each slice of the plurality, respectively acquiring spectral data specific to the respective portion of the keratinous fibers disposed within the slice; and

- c. electronically comparing spectral data specific to a first of the portions of the keratinous fiber(s) with spectral data specific to the second of the portions of the keratinous fiber(s).
19. A fiber-coloring-related method comprising:
- a. disposing keratinous fibers of a subject so that a different portion of the fiber(s) is respectively located in a different slice of a region of space divided into a plurality of slices;
 - b. for each slice of the plurality, measuring a respective spectrum specific to the respective portion of the keratinous fibers disposed within the slice; and
 - c. electronically comparing a first of the spectra descriptive of a first portion of the fiber(s) with a second of the spectra of descriptive of a second portion of the fiber(s).
20. The method of claim 19 wherein one or both of the first and second spectra are reflection spectra.
21. The method of any of claims 19-20 performed to compute a uniformity and/or homogeneity parameter.
22. The method of claim 21 wherein the uniformity and/or homogeneity parameter is a hair-strand uniformity and/or homogeneity parameter.
23. The method of any of claims 21-22 wherein the uniformity and/or homogeneity parameter is a color-space parameter.
24. The method of claim 23 wherein the color-space parameter is a LAB color-space value.
25. The method of any preceding claim further comprising
- in accordance with the results of the comparing, dispensing a combination of hair-coloring agents.
26. The method of any preceding claim further comprising:
- classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color and/or color-space value, wherein the dispensing is performed in accordance with the results of the classifying.
27. The method of any preceding claim further comprising:

- classifying the keratinous fiber(s) as homogeneous or heterogeneous with respect to color and/or color-space value.
28. A method of coloring keratinous fibers, the method comprising:
- a. disposing keratinous fibers of a subject so that a different fiber(s) sub-population is respectively located in each slice of a region of space divided into a plurality of slices;
 - b. for each of the slices, respectively acquiring spectral data specific to the respective sub-population of the keratinous fibers disposed within the slice;
 - c. electronically comparing spectral data specific to a first of the sub-populations with spectral data specific to the second of the sub-populations;
 - d. computing a parameter related to hair homogeneity in accordance with the results of the electronic comparing.
29. The method of claim 28, wherein:
- i. the method further comprises: e. in accordance with the comparing of the spectral data, electronically classifying the keratinous fibers as natural-grey hair or as artificially colored grey hair; and
 - ii. the dispensing is performed in accordance with the results of the classifying.
30. The method of any preceding claim, wherein the image is anisotropically magnified at different magnification values in orthogonal axes in the image plane - i.e. a first magnification value which may be equal to one or to any other value; i.e. a second magnification value which is different from the first magnification value in the second axis.
31. The method of any preceding claim performed so that the image plane that is coplanar with the slit or aperture is an image plane containing an only-1D-focused-images image that is focused in a first axis within the image plane and blurred in a second axis that is orthogonal to the first axis.
32. A method of optically acquiring data from keratinous fiber(s), the method comprising:
- a. illuminating the keratinous fiber(s) such that light reflected and/or deflected and/or transmitted by the fiber(s) forms first and second only-1D-focused-images

- respectively in first and second planes is incident upon a detector and converted into electrical signal(s) by the detector; and
- b. computing, from electrical signal(s), a plurality of spectra of the keratinous fiber(s) such that each spectrum of the plurality of spectra respectively corresponds to (i) a different respective portion of the keratinous fiber(s) and/or (ii) material within a different sub-region of space within which at least a portion of the keratinous fiber(s) are disposed.
33. A system configured to perform the method of any preceding claim.
34. A system for acquiring spectral data from keratinous fiber(s), the system comprising:
- a. a device housing defining a fiber(s)-placement location;
 - b. a source light configured to illuminate keratinous fiber(s) when situated at the fiber-placement location so that at least a portion of the fiber(s) is situated within a region of space divided into a plurality of slices;
 - c. apparatus configured for each of the slices, to respectively acquire spectral data specific to the material disposed within each slice.
35. A system for acquiring spectral data from keratinous fiber(s), the system comprising:
- a. a device housing defining a fiber(s)-placement location;
 - b. a source light configured to illuminate keratinous fiber(s) when situated at the fiber-placement location so that at least a portion of the fiber(s) is situated within a region of space divided into a plurality of slices;
 - c. apparatus configured for each of the slices, to respectively acquire spectral data specific to a different portion of the keratinous fiber(s).
36. The system of claim 35 wherein the apparatus comprises a monochromator or spectral analyzer.
37. The system of claim 35 wherein the monochromator or spectral analyzer comprises at least one of a grating and a prism.
38. The system of any of claims 32-37 wherein a slit or aperture is disposed upon an optical path between the fiber(s) and a light detector.
39. A system for acquiring spectral data from keratinous fiber(s), the system comprising:
- a. a device housing defining a fiber(s)-placement location;

- b. a source of light configured to illuminate keratinous fibers when situated at the fiber-placement location;
 - c. a slit or aperture or collimating lens;
 - d. a grating and/or prism and/or other color-dispersion optics;
 - e. a detector for detecting light;
- and
- f. first and second optical systems configured to focus light reflected and/or deflected and/or transmitted by the illuminated keratinous fibers so that:
 - i. light reflected and/or deflected and/or transmitted by the keratinous fiber(s) is focused by the first imaging system to form an at least 1D-focused image of the keratinous fiber(s) at an intermediate location along an optical path between the fiber(s) and the detector; and
 - ii. the grating and/or prism and/or other color-dispersion optics and the second optical system are situated on an optical path between the slit or aperture or collimating lens and the detector such that the light reflected from and/or deflected by and/or transmitted by the keratinous fibers reaches the detector via the grating and/or prism and/or other color-dispersion optics and the second optical system, wherein:
 - A. a presence of the grating and/or prism and/or other color-dispersion optics causes the detector to detect spectral data of the keratinous fiber(s); and
 - B. a presence of the second imaging system focuses keratinous-fiber(s)-reflected and/or deflected and/or transmitted light on the detector to form, on the detector, an image of the at least 1D-focused image of the keratinous fiber(s) at the intermediate location.
40. The apparatus of claim 39 wherein the intermediate location corresponds to a location of the grating and/or prism and/or other color-dispersion optics.
41. A system for acquiring spectral data from keratinous fiber(s), the system comprising:
- a. a device housing defining a fiber(s)-placement location;

- b. a light source configured to illuminate keratinous fibers when situated at the fiber-placement location;
 - c. a light detector; and
 - d. optical components configured to form, from light reflected and/or deflected and/or transmitted by the fiber(s):
 - i. spectral data in a first dimension of an image plane at the light detector; and
 - ii. at least 1D-focused image of the keratinous fibers in a second direction of the image plane of the light detector, the second direction being perpendicular to the first direction.
42. The system of claim 41 wherein the light detector comprises a 2D planar array of photodetectors, and the optical components form, from light reflected and/or deflected and/or transmitted by the fiber(s), i. spectral data in a first dimension of the 2D planar array of photodetectors; and ii. at least 1D-focused image of the keratinous fibers in a second direction of the 2D planar array of photodetectors, the second direction being perpendicular to the first direction.
43. The system of any of claims 41-42 wherein the at least 1D-focused image of the keratinous fiber(s) is a 2D-focused image of the keratinous fiber(s).
44. The system of any of claims 32-43, wherein the slit defines an elongate axis and the keratinous fibers(s) are substantially aligned in a direction that is perpendicular to the elongate axis of the slit.
45. A method of optically acquiring data from keratinous fiber(s), the method comprising:
- a. illuminating the fiber(s) by light such that light reflected by the fiber(s) subsequently passes through a slit or aperture; and
 - b. analyzing the output of photodetector(s) to (i) determine spectral data of the illuminated fiber(s) and/or (ii) calculate a hair treatment from the analyzed output, wherein the illuminated fiber(s) are in an object plane and a presence of one or more optical components on an optical path between the fiber(s) and the slit or aperture cause the formation of an image plane so that the slit or aperture is located within the image plane.

46. The method of any preceding claim wherein the image is anisotropically magnified at different magnification values in orthogonal axes in the image plane.

47. The method of any preceding claim performed so that the image plane that is coplanar with the slit or aperture is an image plane containing a partial image that is focused in a first axis within the image plane and blurred in a second axis that is orthogonal to the first axis.

48. A method of optically acquiring data from keratinous fiber(s), the method comprising:

- a. illuminating the fiber(s) by light such that light reflected by the fiber(s) subsequently passes through a slit or aperture; and
- b. analyzing the output of photodetector(s) to (i) determine spectral data of the illuminated fiber(s) and/or (ii) calculate a hair treatment from the analyzed output, wherein the illuminated fiber(s) are in an object plane and a presence of one or more optical components on an optical path between the fiber(s) and the slit or aperture cause the formation first and second partial images wherein light from both the first and second partial images is incident upon and detected the photodetector(s).

49. The method of claim 49 wherein the first and second partial images are formed on opposite sides of the slit or aperture.

50. The method of claim 49 wherein an image plane of the first and/or second partial corresponds to a plane of the slit or aperture.

51. The method of any of claims 48-50 wherein the first partial image being focused in a first direction and blurred in a second direction orthogonal to the first direction, and the second image is focused in the second direction and blurred in the first direction.

52. The method or system of any preceding claim, wherein the illuminated fibers are aligned with each other.

53. The method or system of any preceding claim wherein at least one of the spectrum(s), or at least a plurality of spectrum(a) are reflection spectrum(a) or absorption spectrum(a) or transmission spectrum(a).

54. The method or system of any preceding claim wherein the keratinous fiber(s) are illuminated by incoherent light.

55. The method or system of any preceding claim wherein the keratinous fiber(s) are human hair.

56. A method of optically acquiring data from keratinous fiber(s), the method comprising:

- a. illuminating the keratinous fiber(s);
- b. from light reflected and/or deflected and/or transmitted by the fiber(s), respectively forming first and second only-1D-focused images of the fiber(s) at first and second intermediate locations;
- c. passing from light of the first and second only-1D-focused images through color-dispersion optics; and
- d. receiving, by a light detector, light from the first and second only-1D-focused images after this light has passed through the color-dispersion optics so as to detect spectrum(a) of the keratinous fiber(s).

57. The method of claim 56 wherein the first and second only-1D-focused images are formed by optical components comprising a toric lens.

58. A system for optically acquiring data from keratinous fiber(s), the system comprising:

- a. a source of light configured to illuminate the keratinous fiber(s);
- b. an imaging system configured to respectively form, from light reflected and/or deflected and/or transmitted by the fiber(s), first and second only-1D-focused images of the fiber(s) at first and second intermediate locations;
- c. color-dispersion optics configured to receive light of the first and second only-1D-focused images; and
- d. by a light detector configured to receive light from the first and second only-1D-focused images after this light has passed through the color-dispersion optics so as to detect spectrum(a) of the keratinous fiber(s).

59. The method or system of any previous claim wherein the first only-1D-image is focused in a first image-plane direction and blurred in a second image-plane direction orthogonal to the first image-plane direction and the second only-1D-image is focused in the second image-plane direction and blurred in the first image-plane direction.

60. The method or system of any previous claim wherein the keratinous fiber(s) are aligned along an alignment axis.

61. The method or system of any previous claim wherein:
- i. the keratinous fiber(s) are aligned along an alignment axis;
 - ii. the first only-1D-image is focused in a first image-plane direction along the alignment axis and blurred in a second image-plane direction orthogonal to the first image-plane direction; and
 - iii. the second only-1D-image is focused in the second image-plane direction and blurred in the first image-plane direction.
62. The method or system of any previous claim wherein the first and second only-1D-focused images are recombined at the light detector.
63. The method or system of any previous claim wherein the first and second only-1D-focused images are recombined into a 2D-focused-image at the light detector.
64. The method or system of any previous claim wherein the reflected and/or deflected and/or transmitted by the fiber(s) passes through an aperture or a slit *en route* to the color-dispersion optics.
65. The method or system of claim 64 wherein an image plane location of the first or second only-1D-focused image corresponds to a plane of slit or the aperture.
66. The method or system of any previous claim further comprising according to the detected spectrum(a), calculating a hair-treatment recipe and/or dispensing a combination of hair-coloring agents.
67. A system for preparing a hair-coloring composition, the system comprising:
- a. a plurality of containers, each container holding a different permanent hair-coloring agent therein, a first of the plurality of containers containing dye precursor and being substantially free of coupler, a second of the plurality of containers containing coupler and being substantially free of dye precursor; and
 - b. a dispenser configured to dispense contents of the containers to provide multi-container combinations comprising material from the first and second containers.
68. A system for preparing a hair-coloring composition, the system comprising:
- a. a plurality of containers including first and second containers;
 - b. a plurality of tablets disposed within each of the containers including each tablet comprising at least one of (i) permanent hair-coloring dye precursor and (ii) permanent hair-coloring dye coupler such that in first of the containers, the plurality

of tablets including tablets of first and second types such that (A) tablets of the first type comprise permanent hair-coloring dye precursor and are substantially free of permanent hair-coloring dye coupler, and (B) tablets of the second type comprise permanent hair-coloring dye coupler and are substantially free of permanent hair-coloring dye precursor, a majority of tablets in the first container being of the first type, a majority of tablets in the second container being of the second type,

c. a dispenser configured to dispense the tablets so as to provide multi-container tablet combinations comprising tablets of the first and second types from the first and second containers.

69. The system of claim 68 wherein at least a majority of tablets in the first container are of the first type, of substantially the same dye coupler and have substantially the same size.

70. The system of claim 69 wherein the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3*; ; (v) an average load (by weight) of tablets of *TABLET_SET1* is LW_1 ; (v) an average load (by weight) of tablets of *TABLET_SET3* is LW_3 ; (vi) and a ratio between LW_1 and LW_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

71. The system of any preceding claim wherein the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3*; ; (v) an average load (by mole) of tablets of *TABLET_SET1* is LM_1 ; (v) an average load (by weight) of tablets of *TABLET_SET3* is LM_3 ; (vi) and a ratio between LM_1 and LM_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least

1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

72. The system of any preceding claim wherein the plurality of containers comprises a third container, such that (i) at least a majority of tablets within the first container are members of *TABLET_SET1* (ii) at least a majority of tablets within the third container are members of *TABLET_SET3*; (iii) all tablets of *TABLET_SET1* are of the first type and comprise the same precursor *PREC_1*; ; (iv) all tablets of *TABLET_SET3* are of the first type and comprise the same precursor *PREC_1* that is the same as that of *TABLET_SET3* ; (v) an average volume of tablets of *TABLET_SET1* is VOL_1 ; (v) an average volume of tablets of *TABLET_SET3* is VOL_3 ; (vi) and a ratio between VOL_1 and VOL_3 is at least 1.1 or at least 1.2 or at least 1.25 or at least 1.3 or at least 1.4 or at least 1.5 or at least 1.75 or at least 2 or at least 3 or at least 5 or at least 7.5 or at least 10.

73. The system of any preceding claim wherein all tablets of *TABLET_SET1* have substantially the same volume and/or substantially the same load (by weight) of precursor *PREC_1* and/or substantially the same load (by mole) of precursor *PREC_1*.

74. The system of any preceding claim wherein all tablets of *TABLET_SET3* have substantially the same volume and/or substantially the same load (by weight) of precursor *PREC_1* and/or substantially the same load (by mole) of precursor *PREC_1*

75. A system for preparing a hair-coloring composition comprising:

- a. a plurality of containers including first and second containers;
- b. a plurality of tablets disposed within each of the containers, each tablet comprising at least one of (i) permanent hair-coloring dye precursor and (ii) permanent hair-coloring dye coupler such that, a majority of the tablets in the first container comprise permanent hair-coloring dye precursor and are substantially free of permanent hair-coloring dye coupler, a majority of the tablets in the second container comprise permanent hair-coloring dye coupler and are substantially free of permanent hair-coloring dye precursor;
- c. a dispenser configured to dispense the tablets so as to provide multi-container tablet combinations comprising tablets from the first and second containers.

76. The system of any preceding claim wherein the dispenser is configured to dispense the multi-container combinations in accordance with at least one of (i) a hair coloring target and/or (ii) hair spectroscopy data.

77. A system for dispensing cosmetic ingredients, the system comprising:

- a. a dispensing device;
- b. a plurality of containers, each containing a different respective cosmetic agent stored therein having different respective cosmetic properties, each container encoded with respective data describing both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material; and
- c. a code-reader included in or operatively linked to the dispensing device, the code-reader being configured to read the respective encoded reference physical-chemical property(ies) and ageing metrics from each of the containers, wherein:

- i. the dispensing device is configured, when the containers are engaged thereto, to dispense cosmetic agents from the containers in relative quantities determined in accordance with estimations of current physical-chemical property(ies) of the cosmetic agents stored within the containers; and
- ii. the estimations of current physical-chemical properties of each cosmetic agent are computed in accordance with both (i) reference physical-chemical property(ies) of the cosmetic agent stored therein and (ii) an ageing metric describing an extent of aging of the cosmetic material

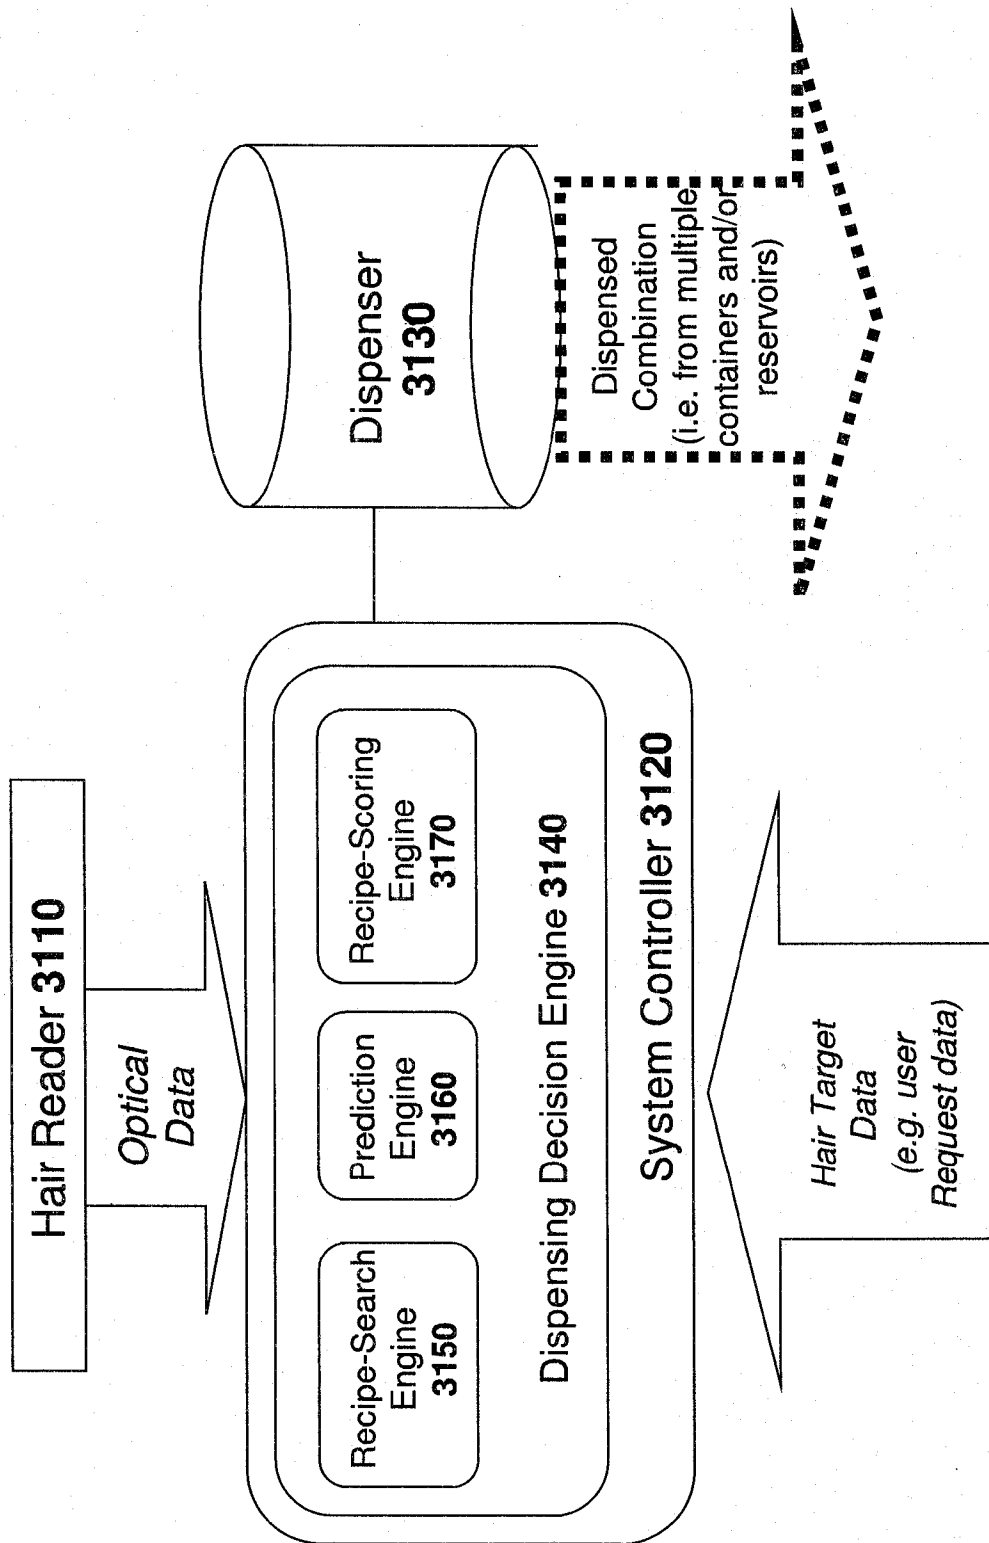


FIG. 1

2/24

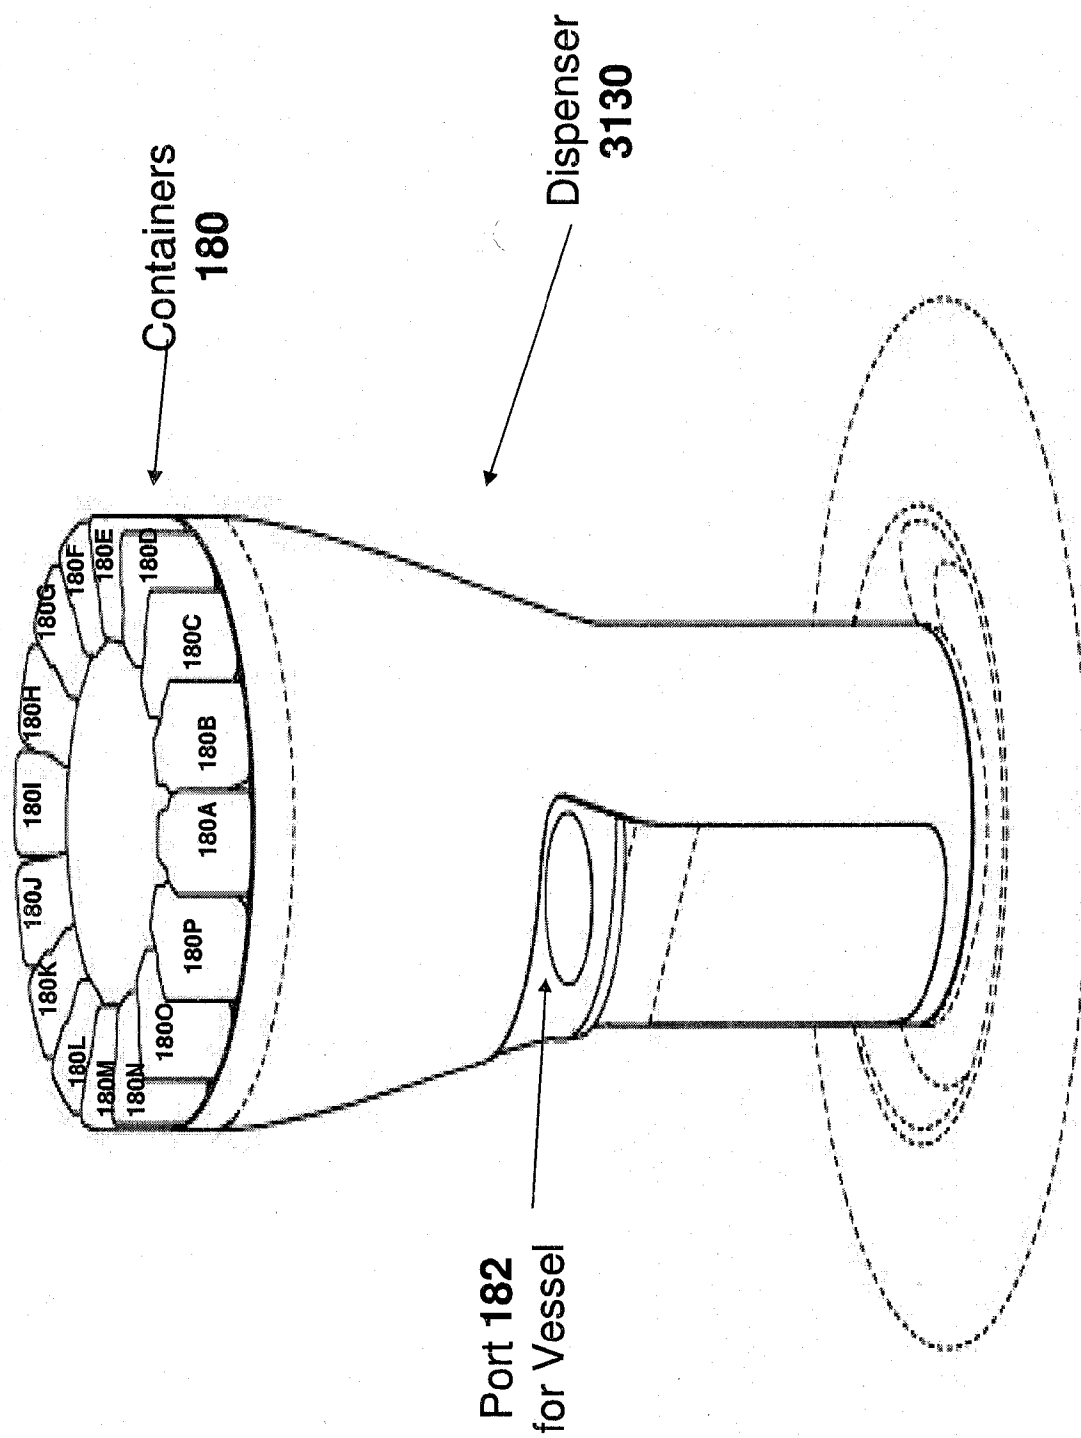


FIG. 2

3/24

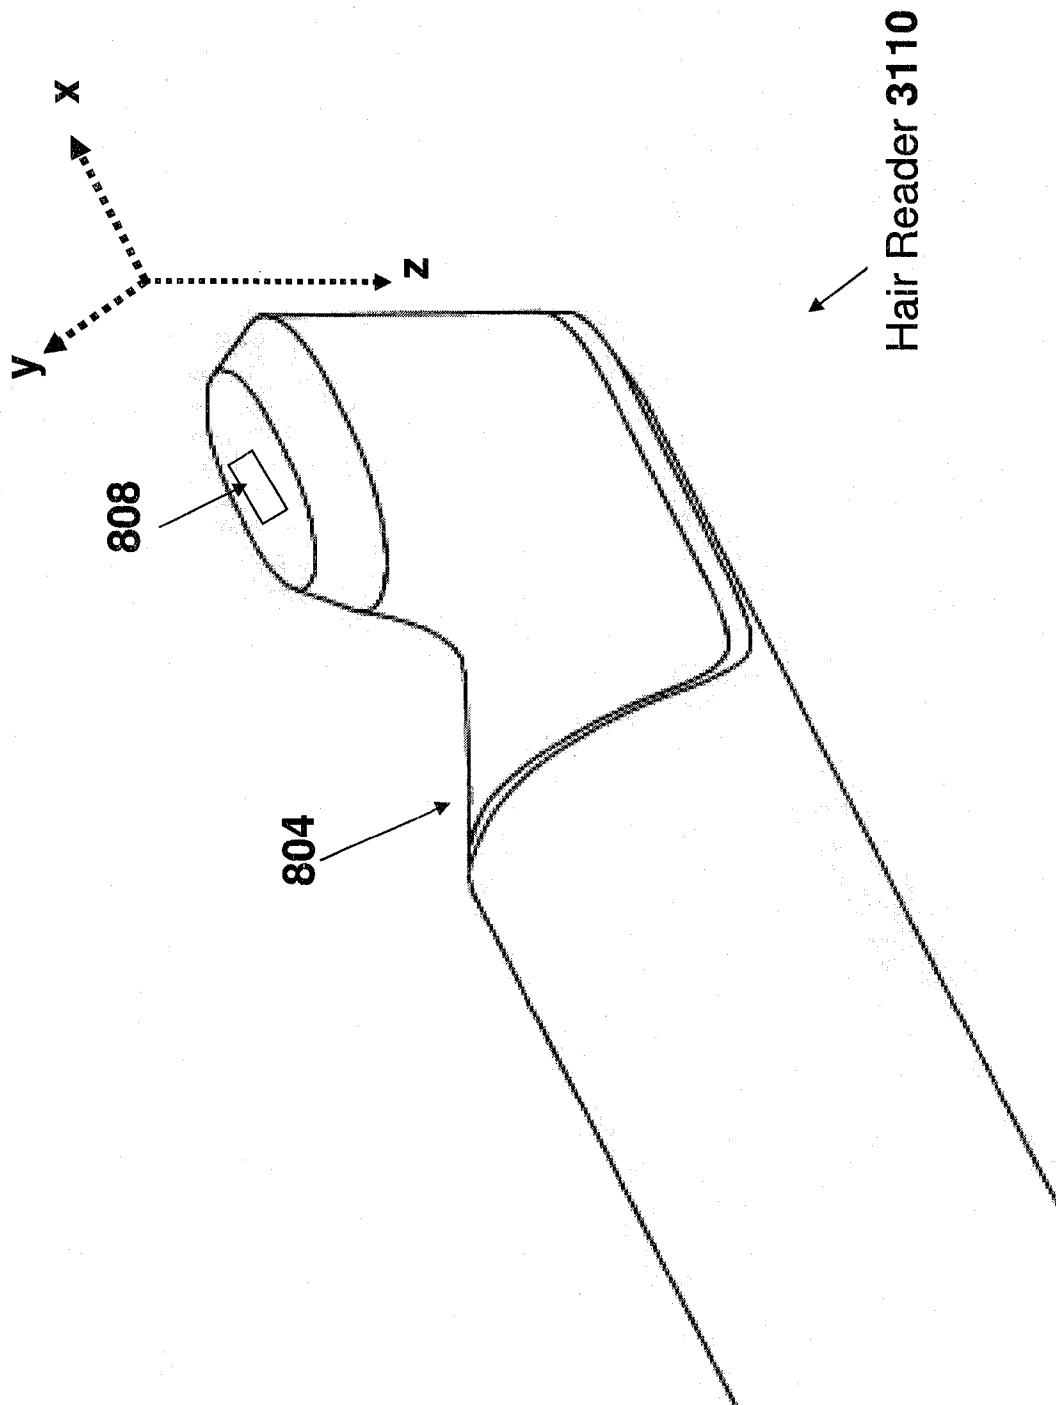


FIG. 3A

4/24

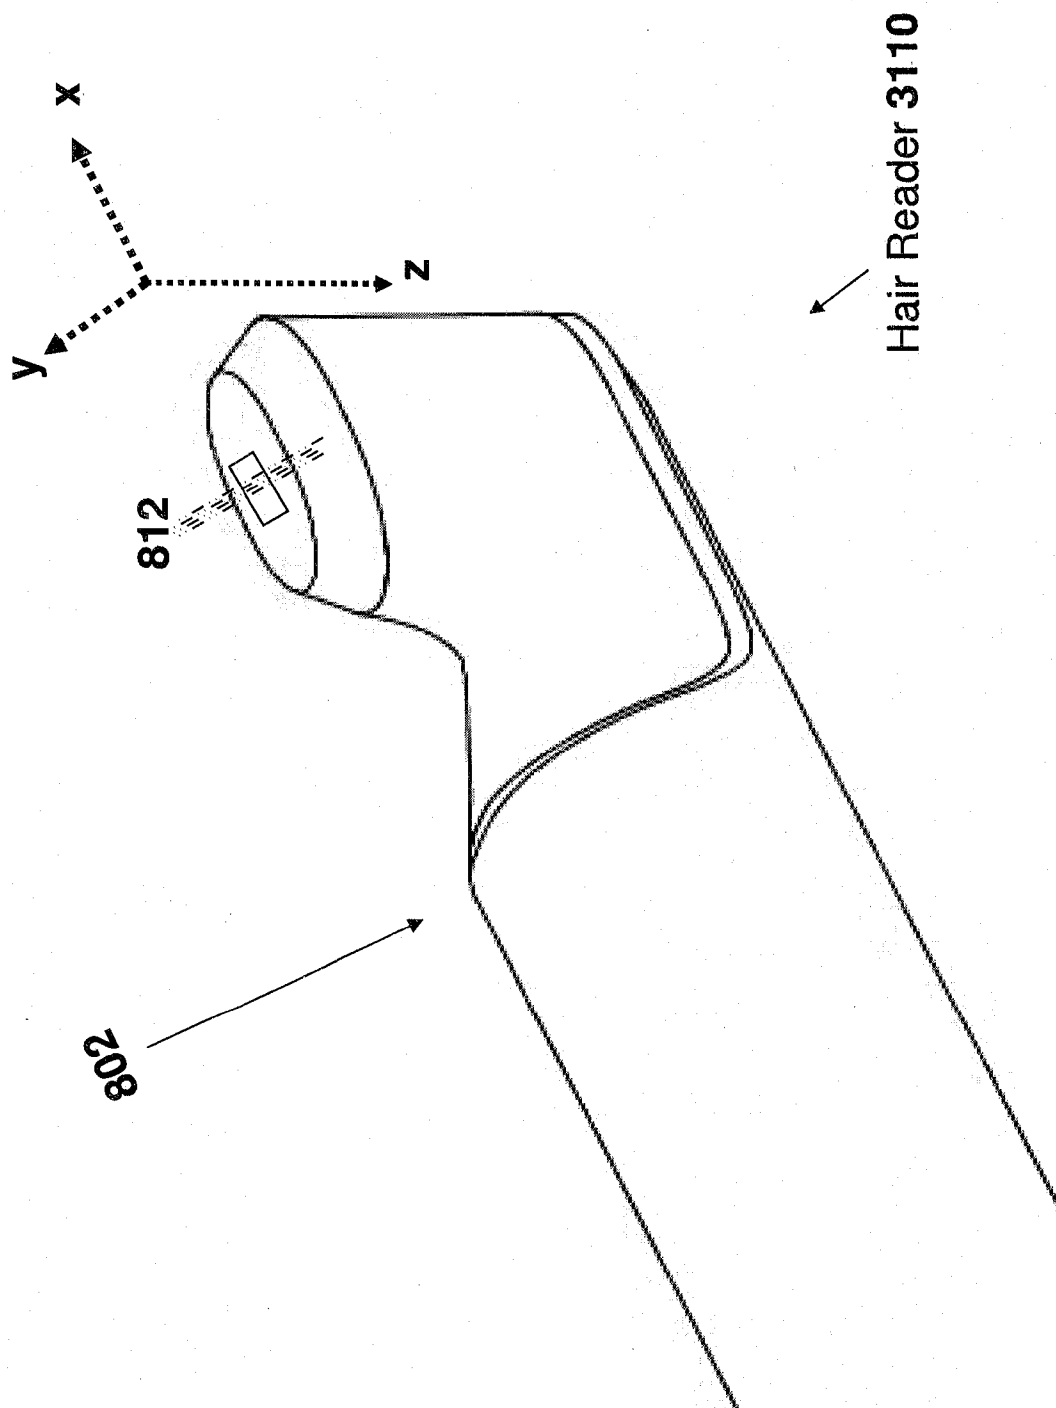
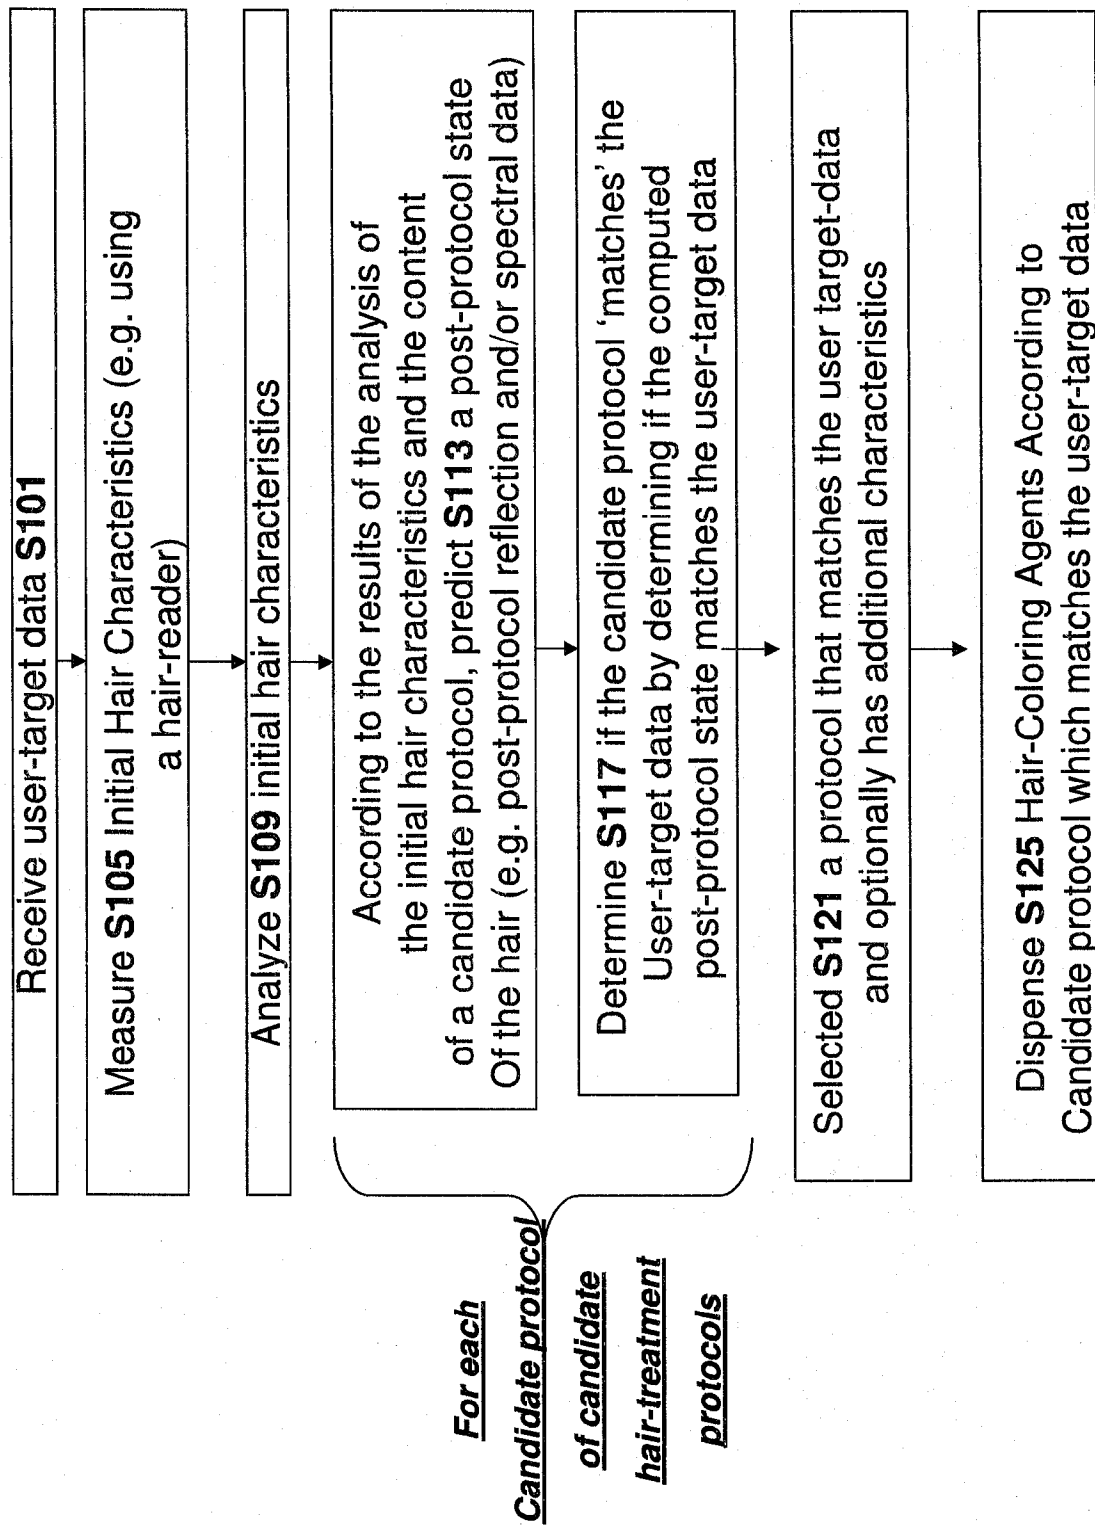


FIG. 3B

5/24

**FIG. 4**

6/24

Legend

----- Generic Hair strand (no color information) -- top view

White hair strand -- top view

Black hair strand -- top view

Grey hair strand -- top view

Generic Hair strand (no color information) -- cross-section view

White hair strand -- cross section view

Black hair strand -- cross section view

Grey hair strand -- cross section view

FIG. 5

7/24

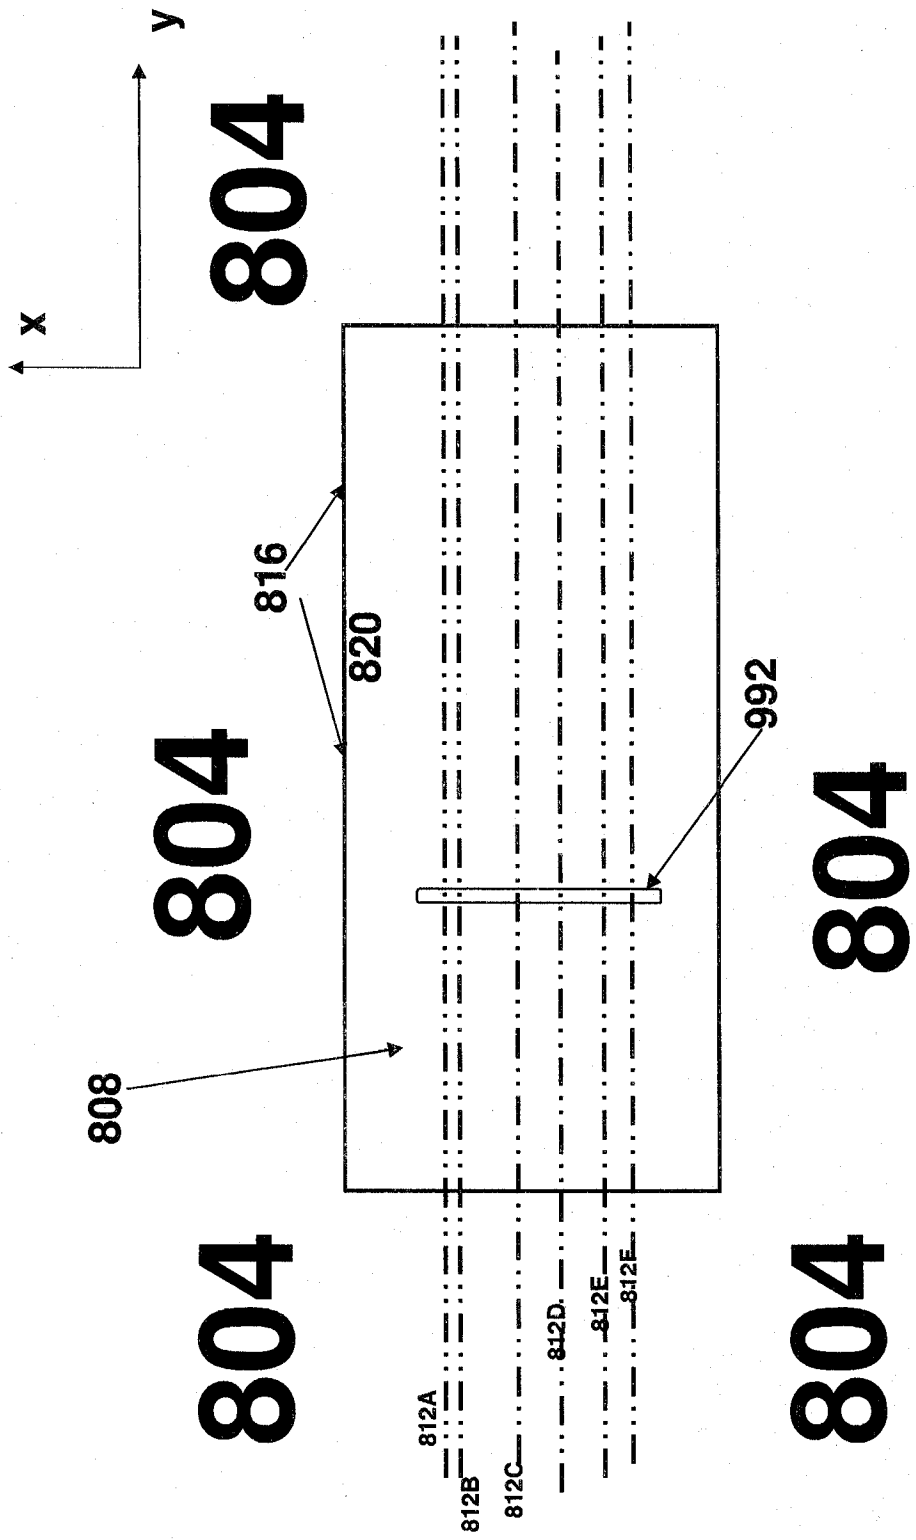


FIG. 6

8/24

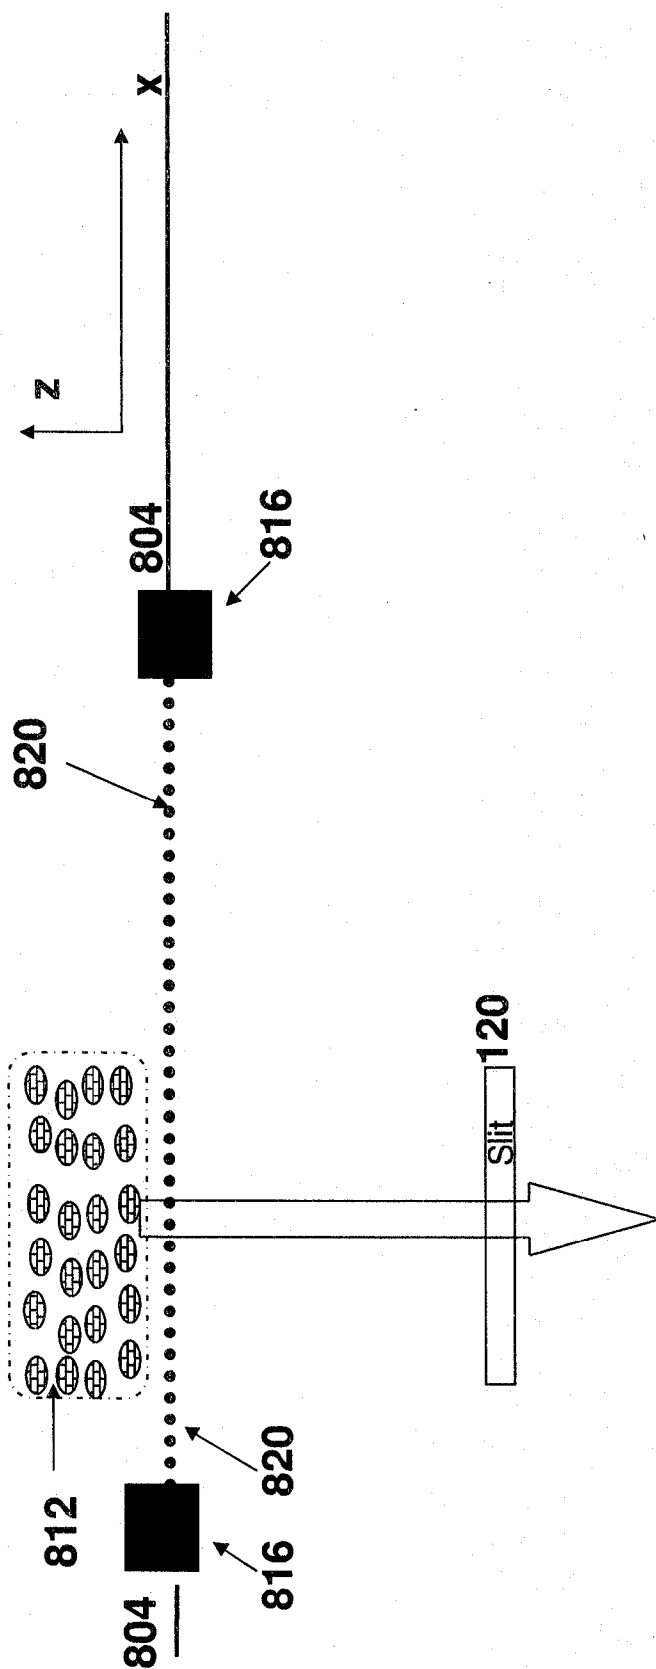


FIG. 7A

9/24

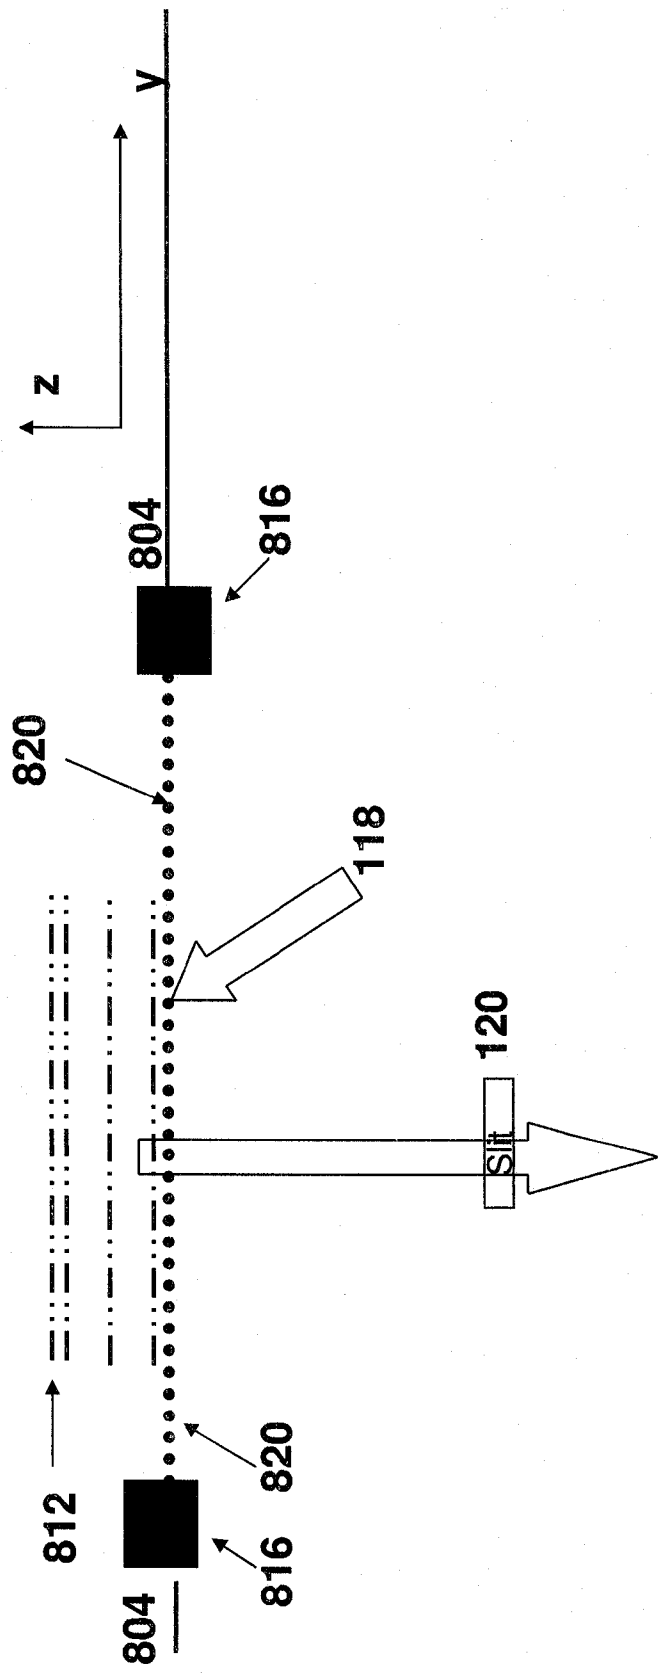


FIG. 7B

10/24

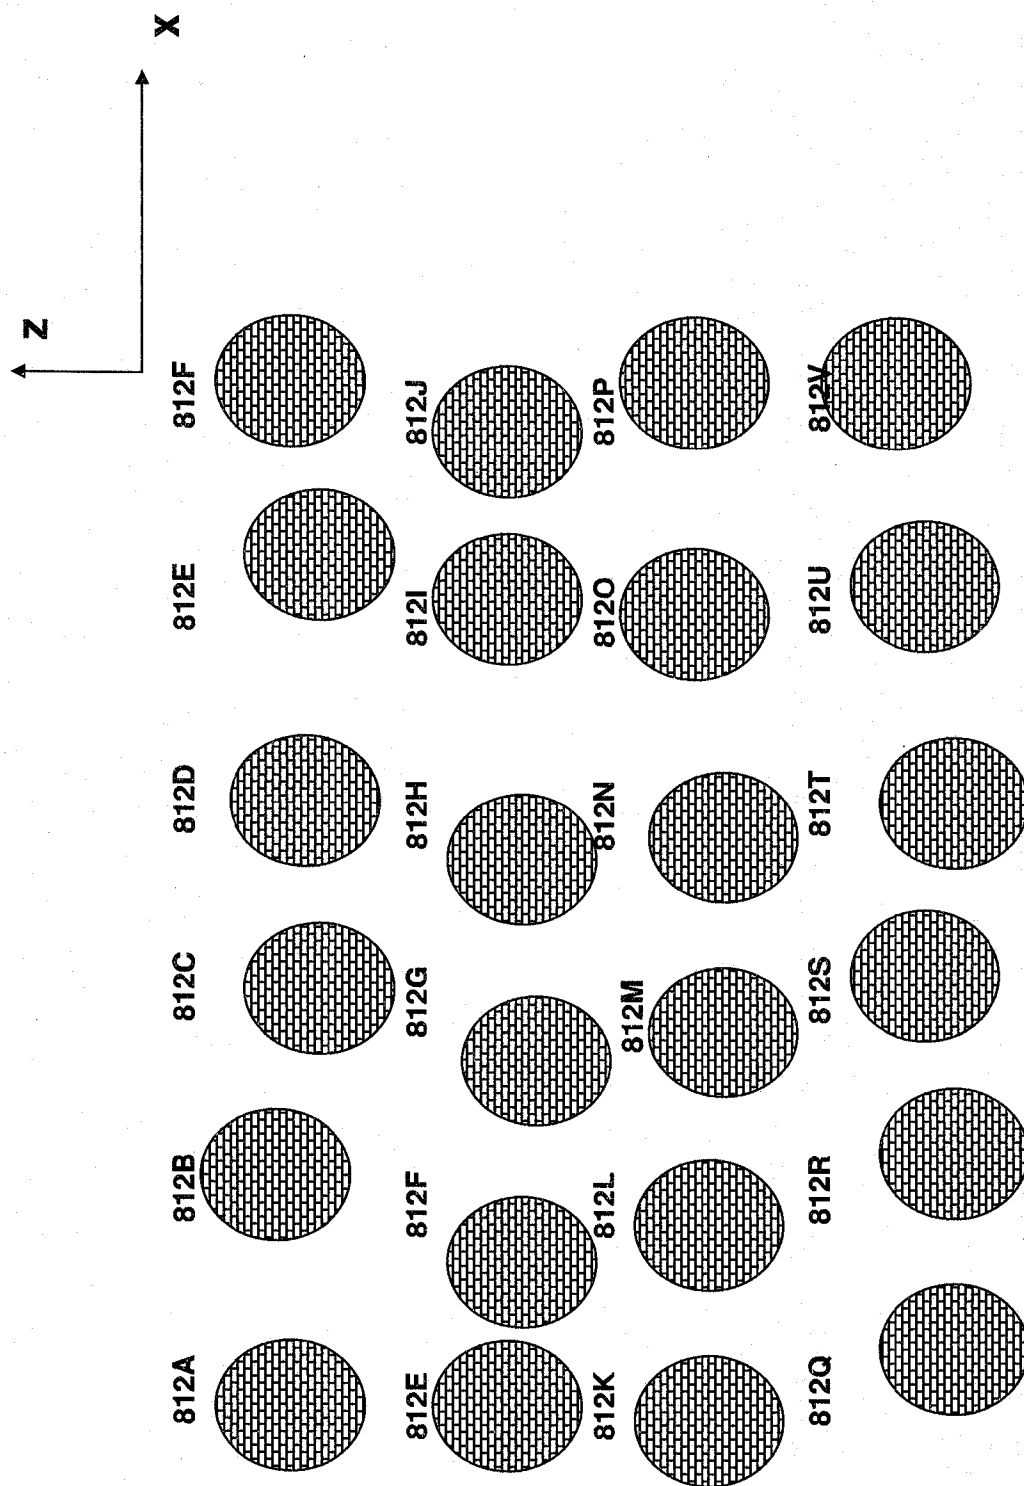


FIG. 8

11/24



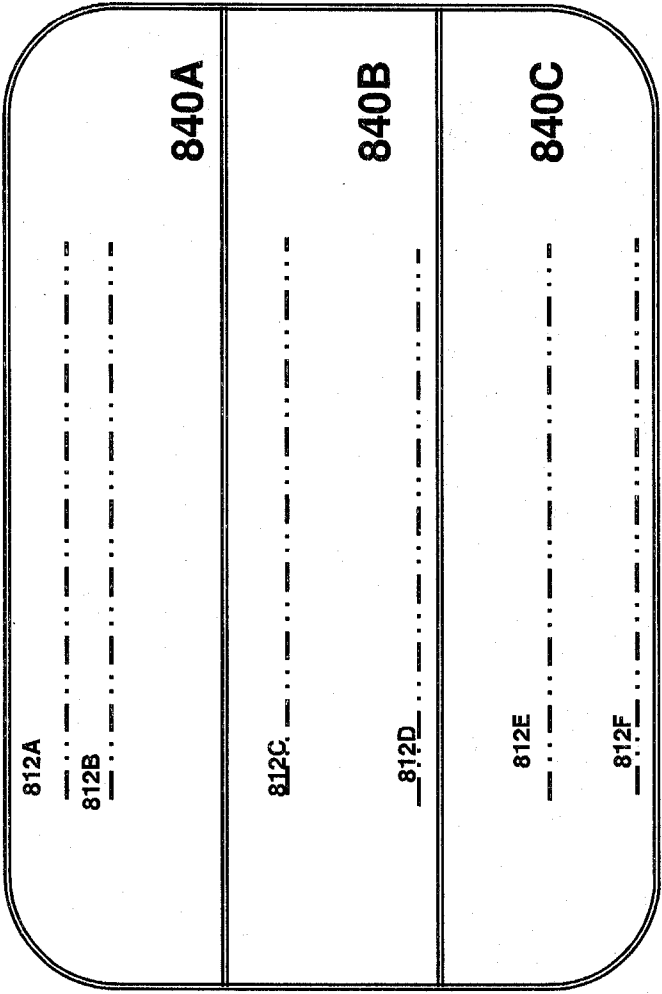


FIG. 9

12/24

Case 1

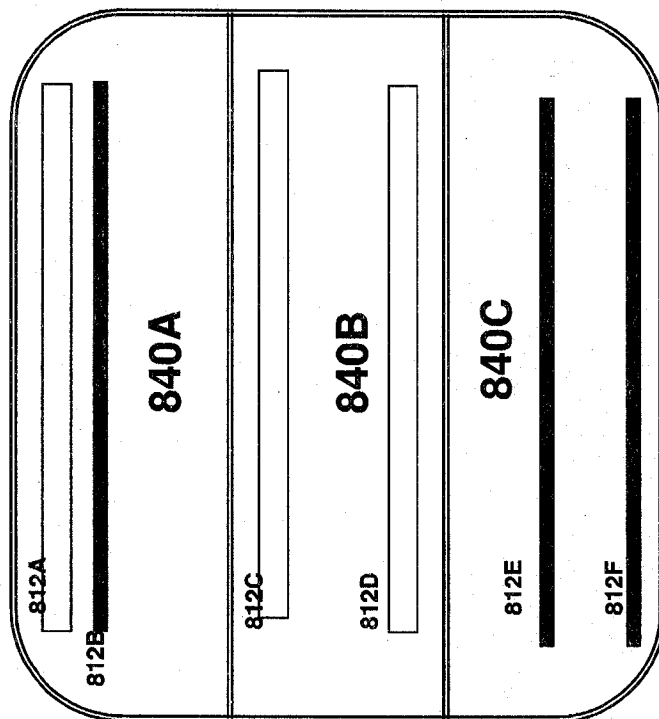

Case 2

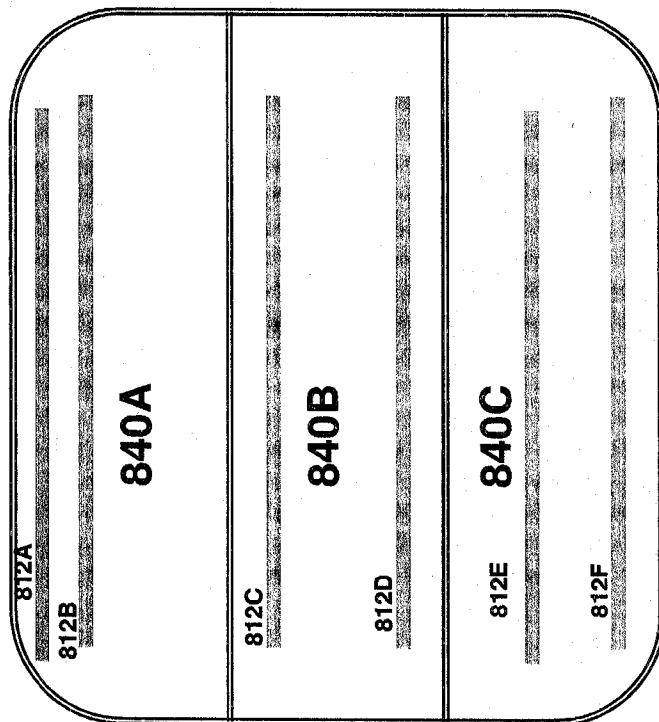


FIG. 10

13/24

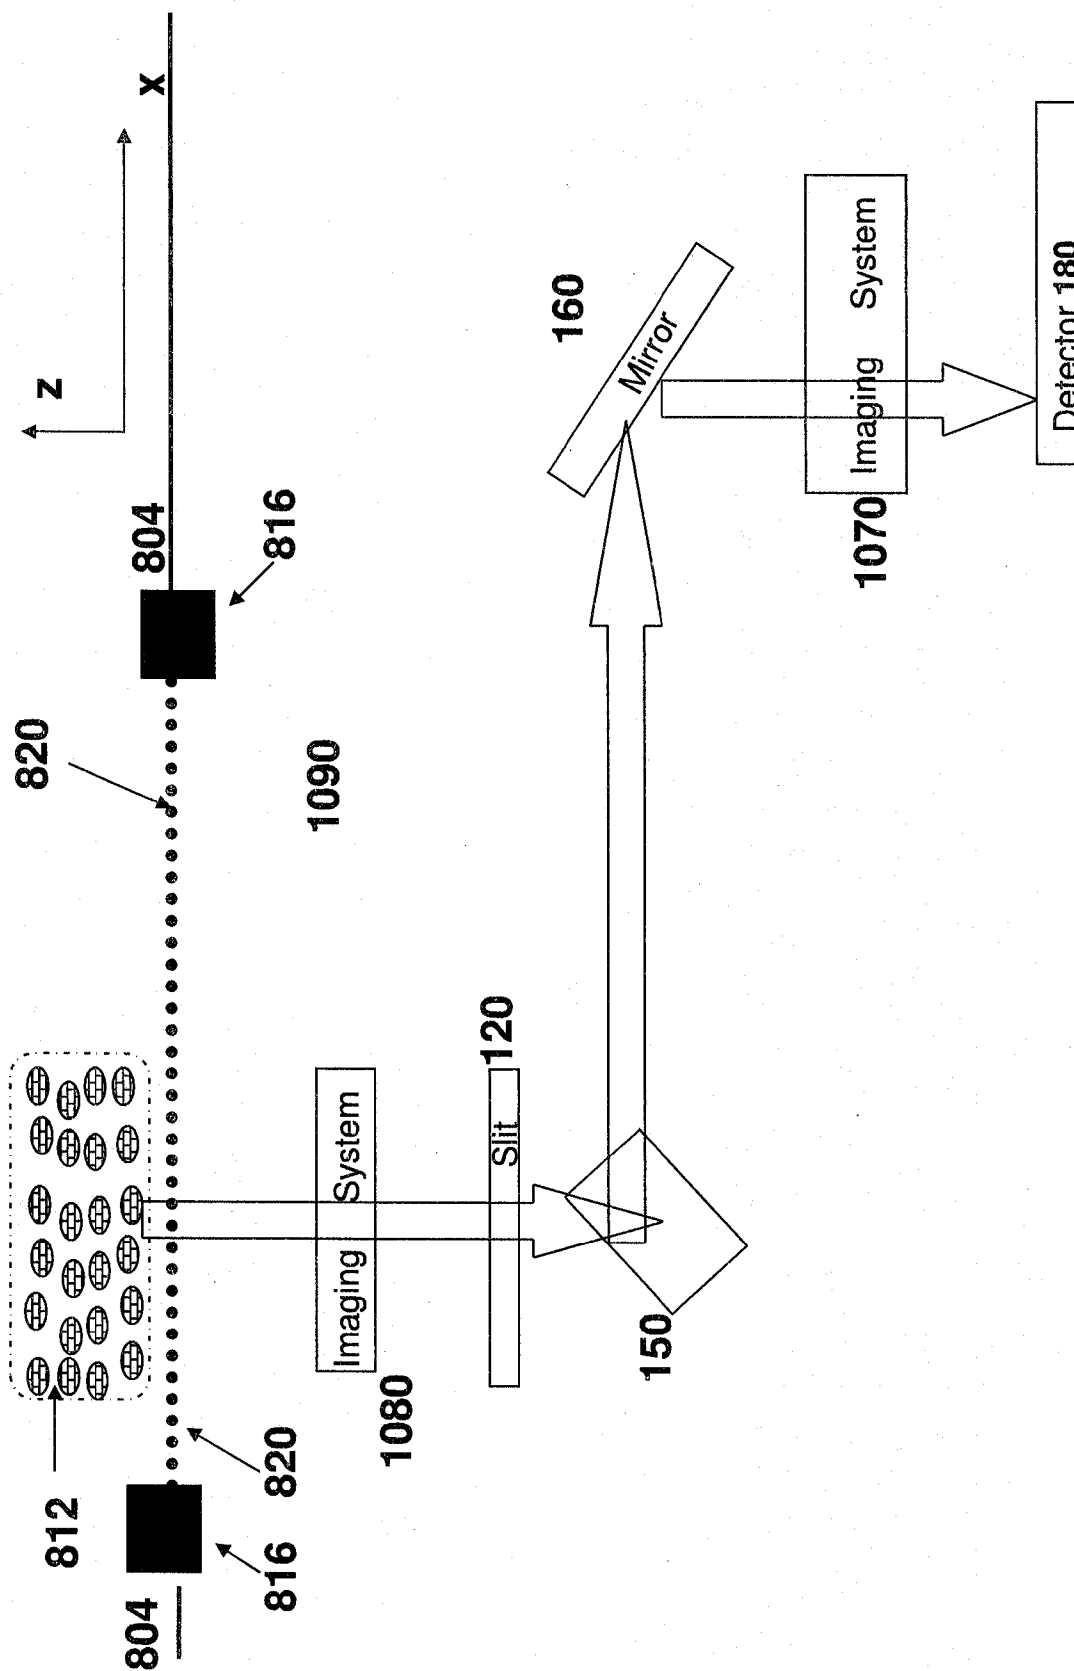


FIG. 11A

14/24



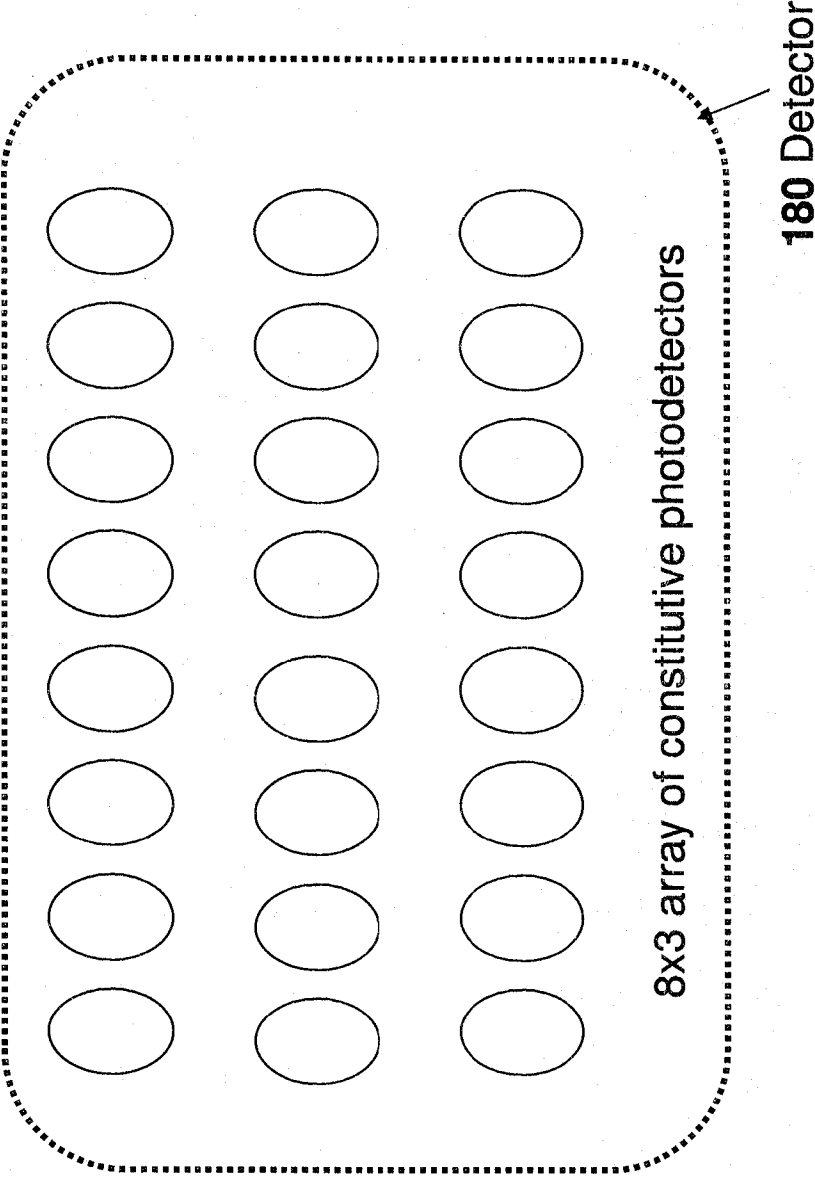


FIG. 11B


Hair-Reader Window

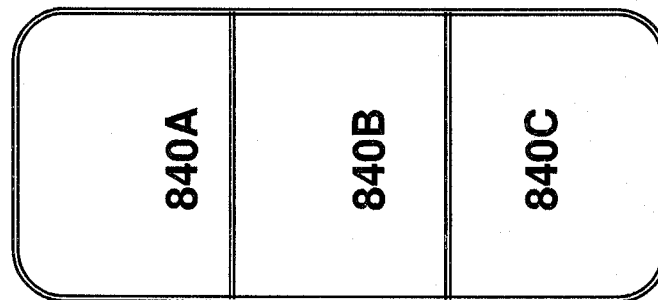

2-D Array Photodetectors

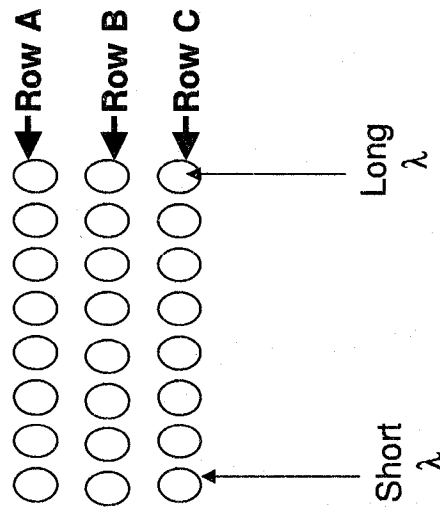

Measured Spectra

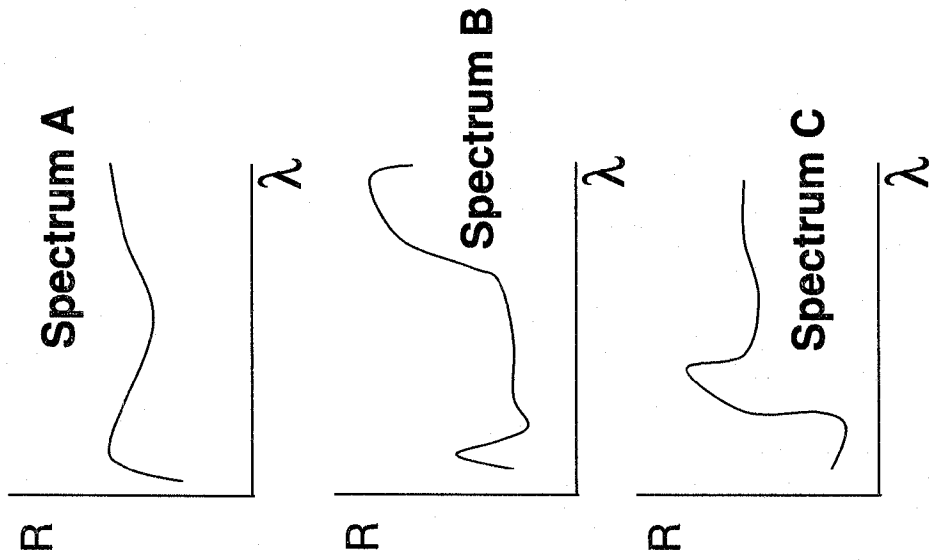

15/24

FIG. 12

16/24

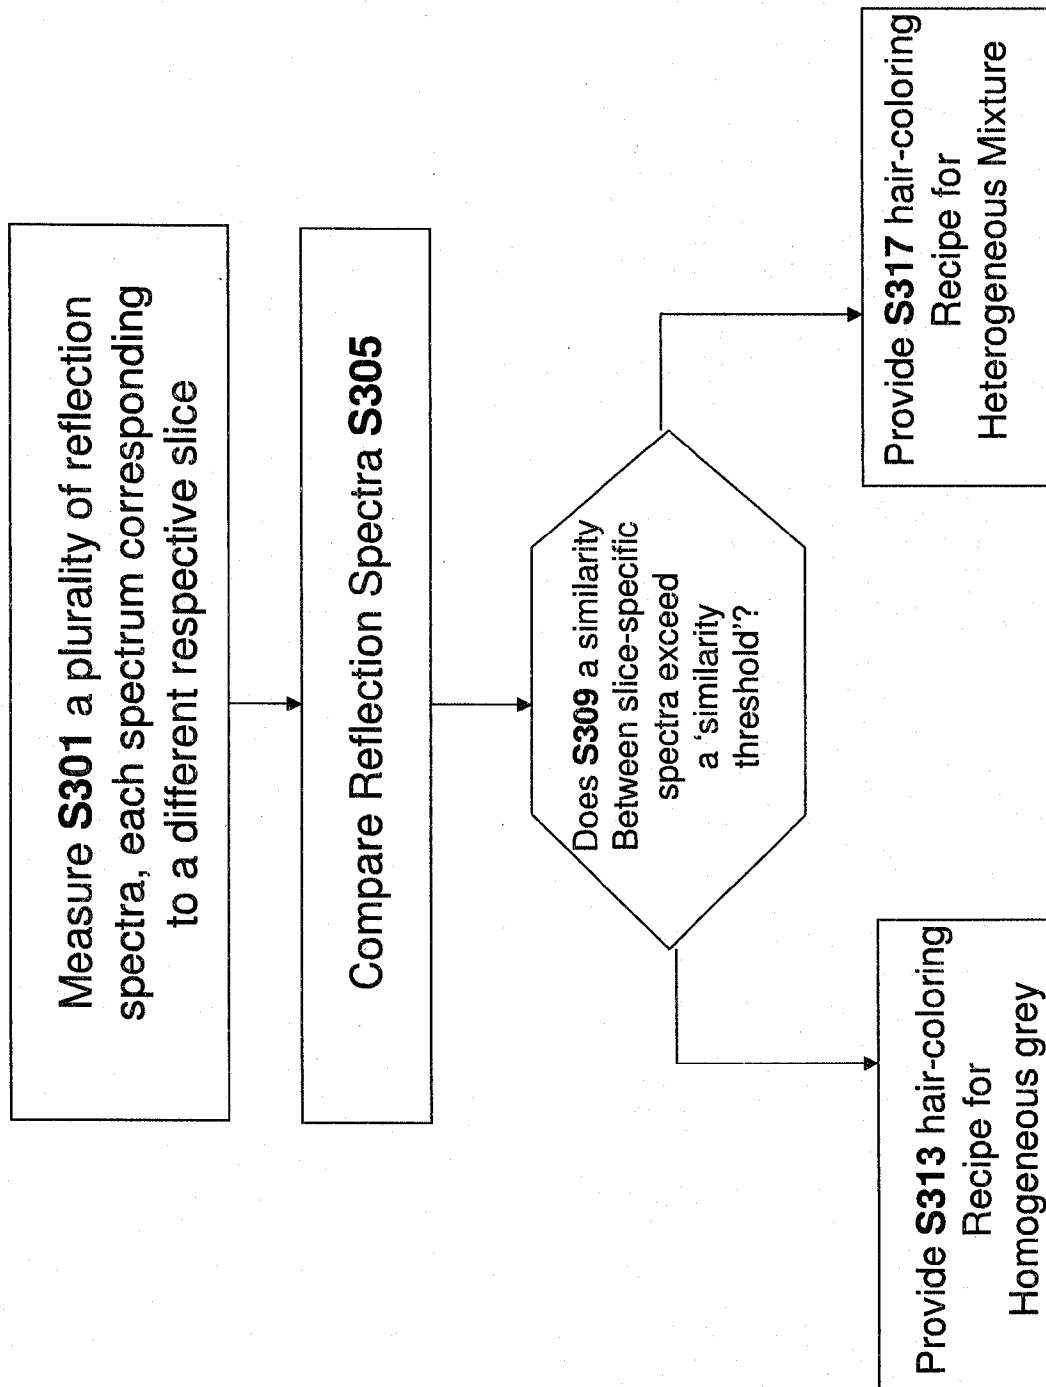


FIG. 13

17/24

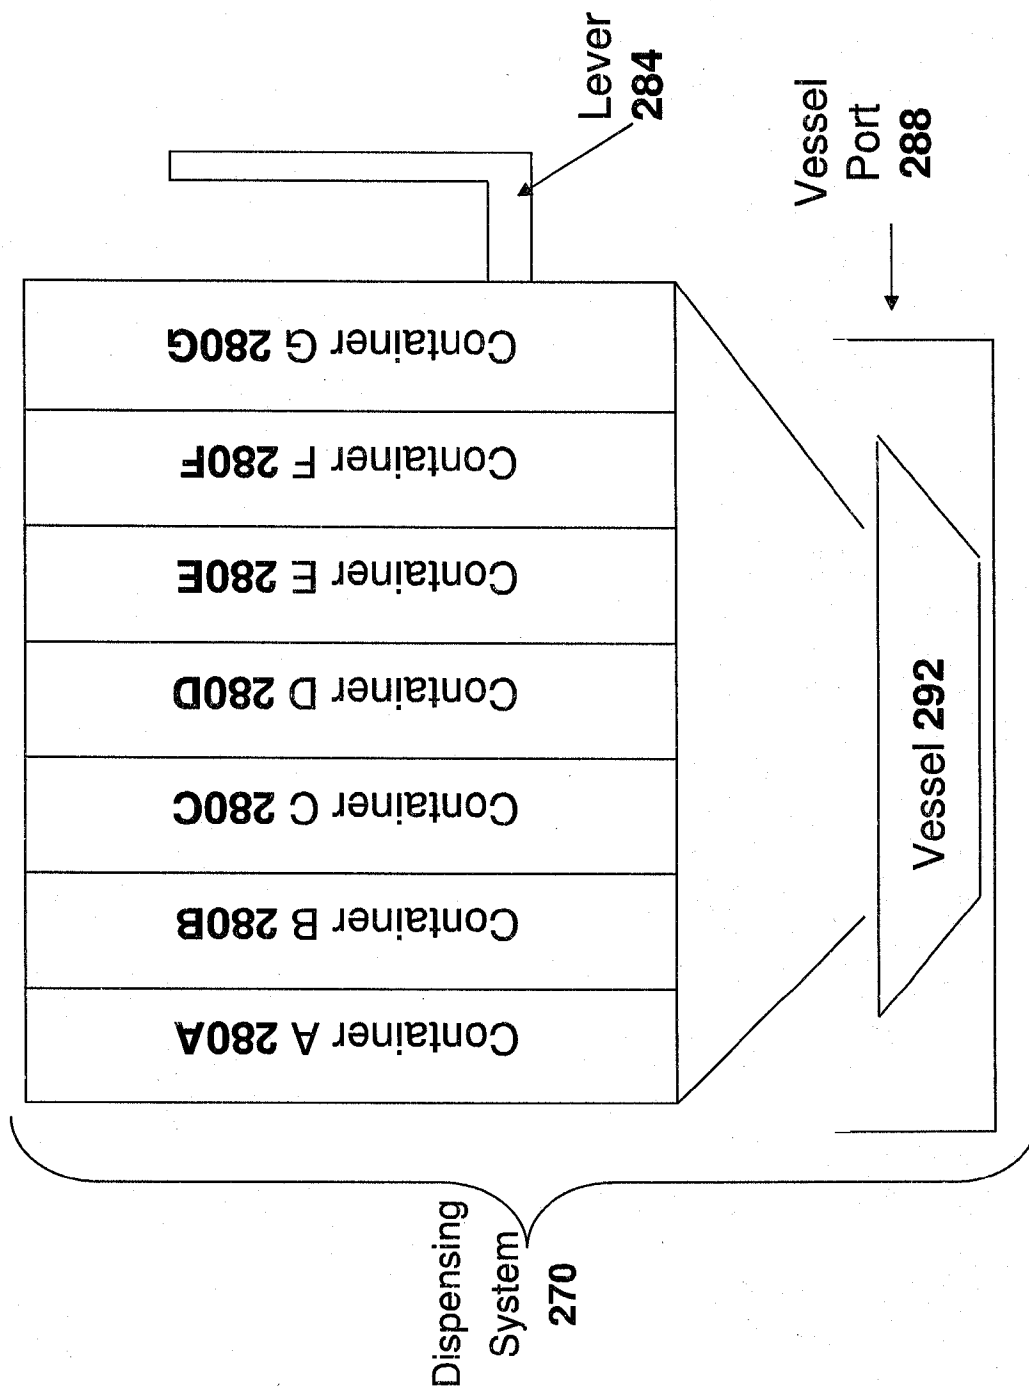


FIG. 14A

18/24

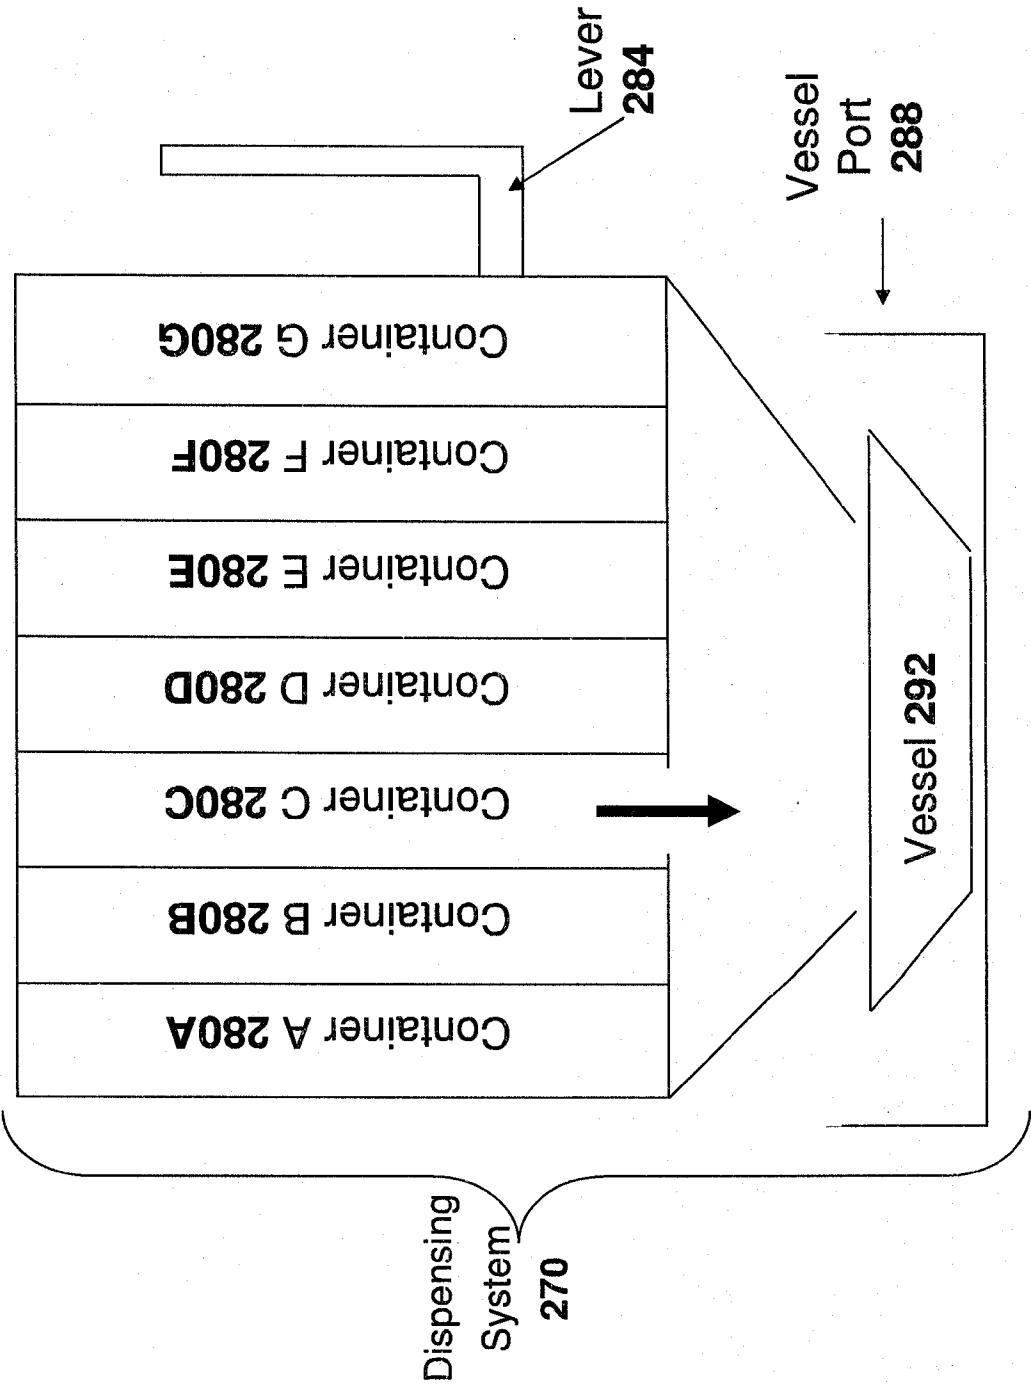


FIG. 14B

19/24

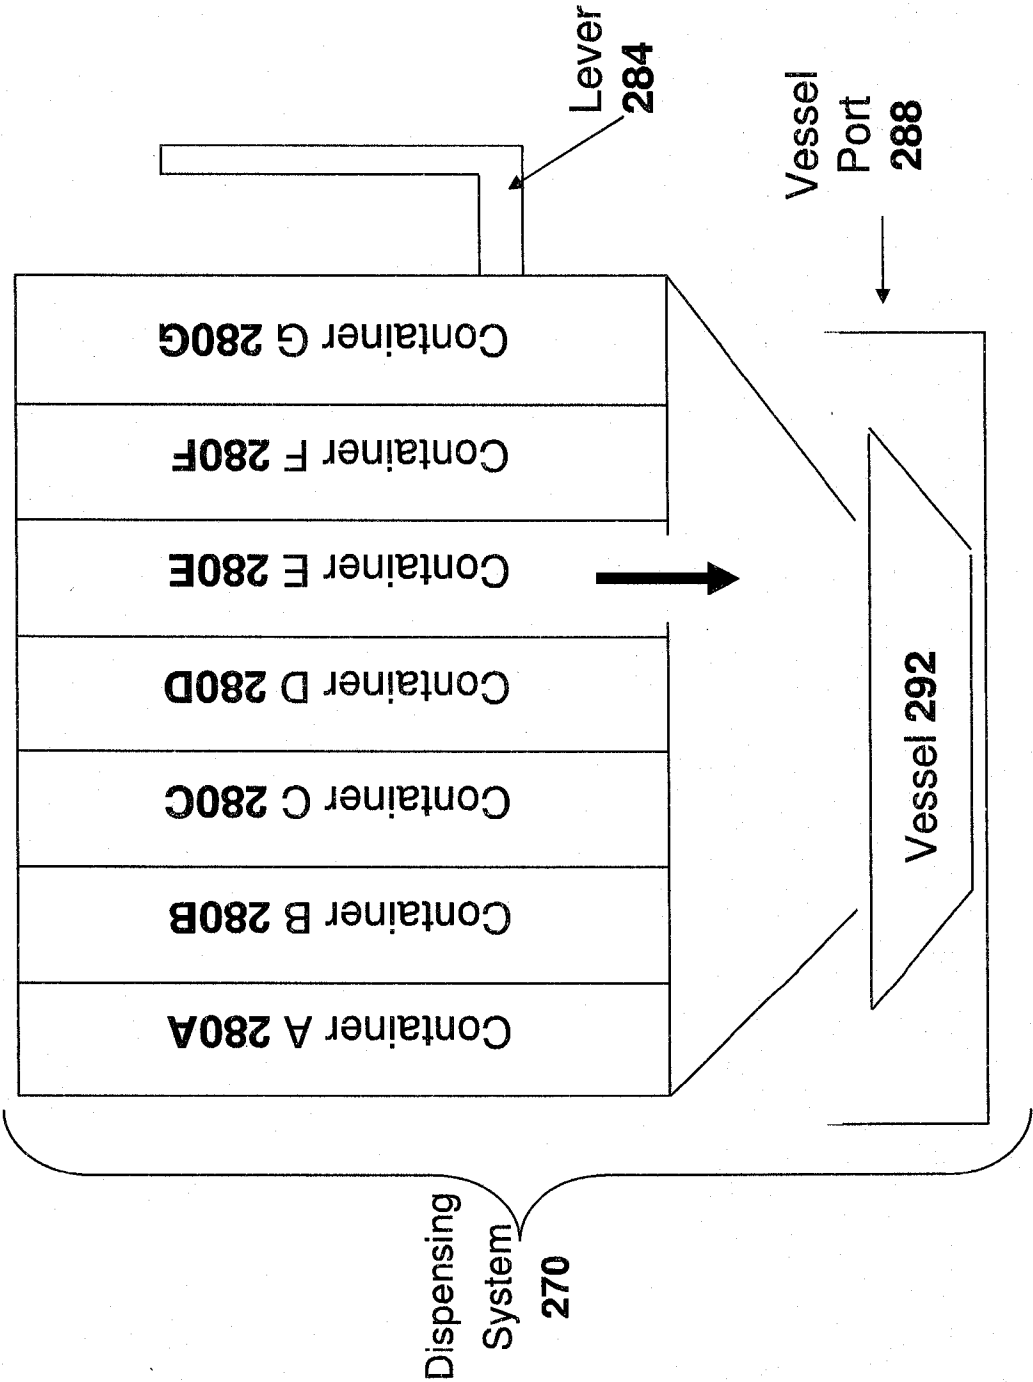


FIG. 14C

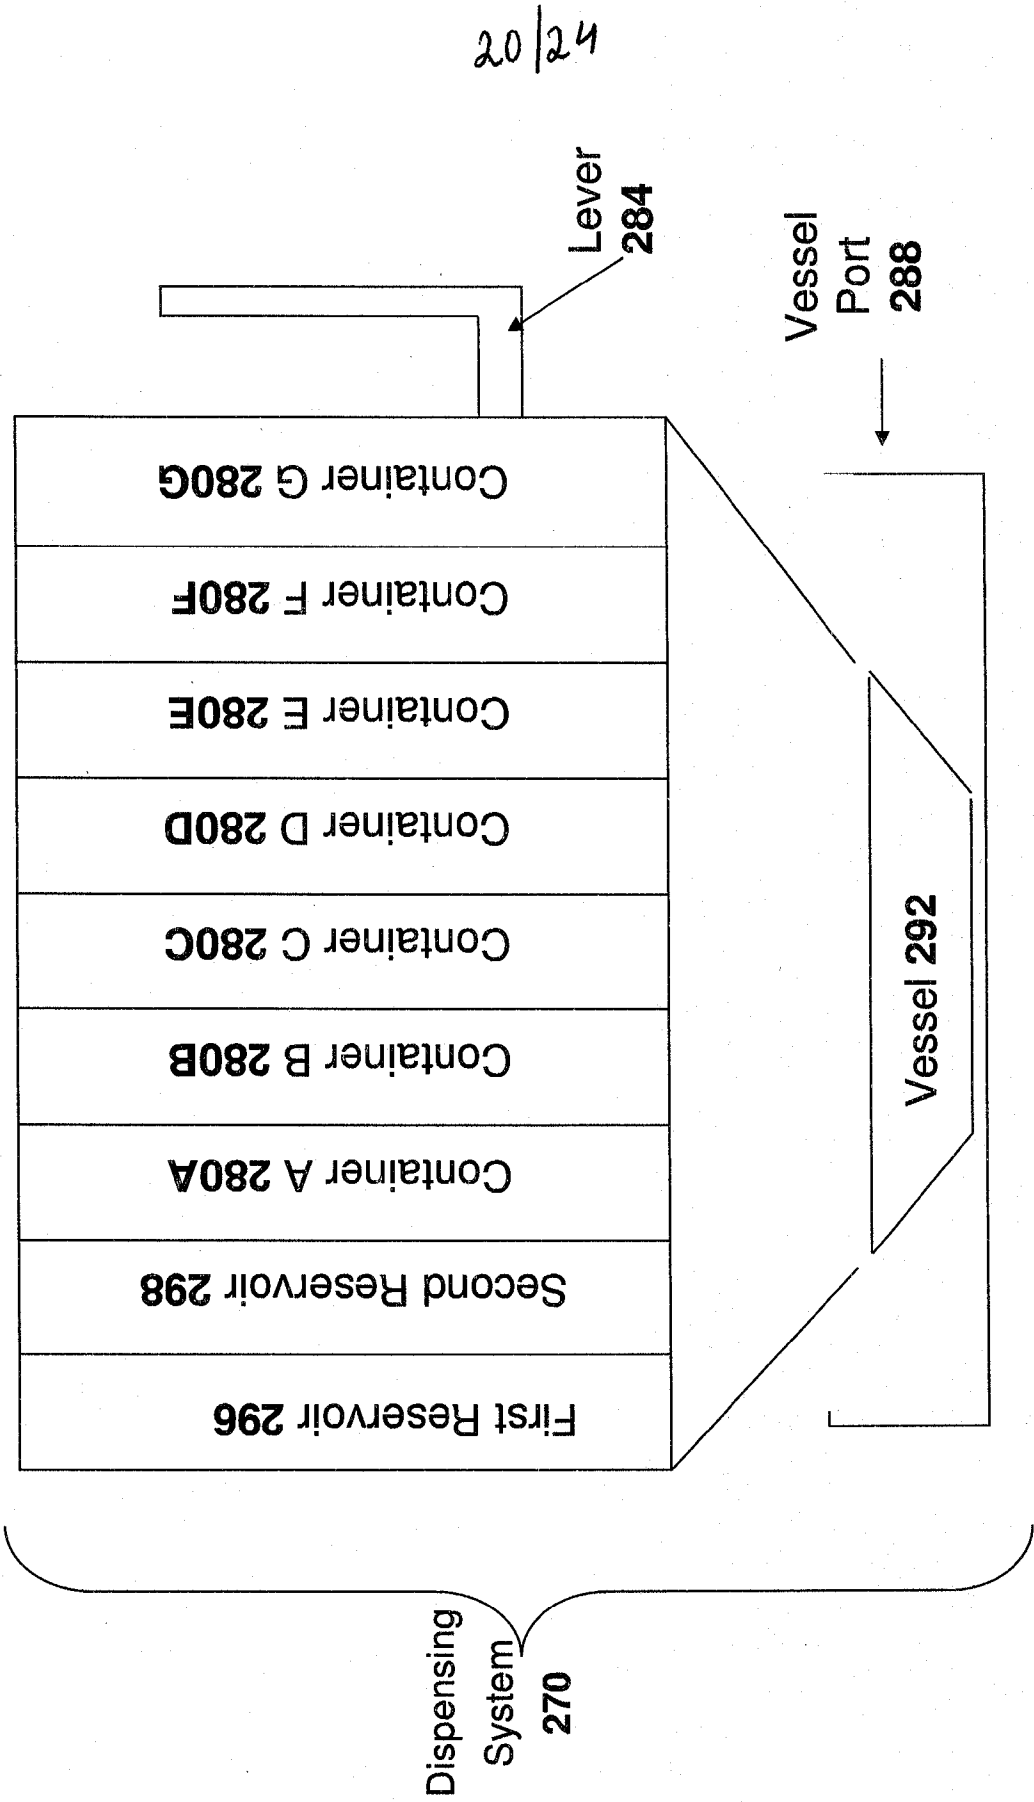


FIG. 15

21/24

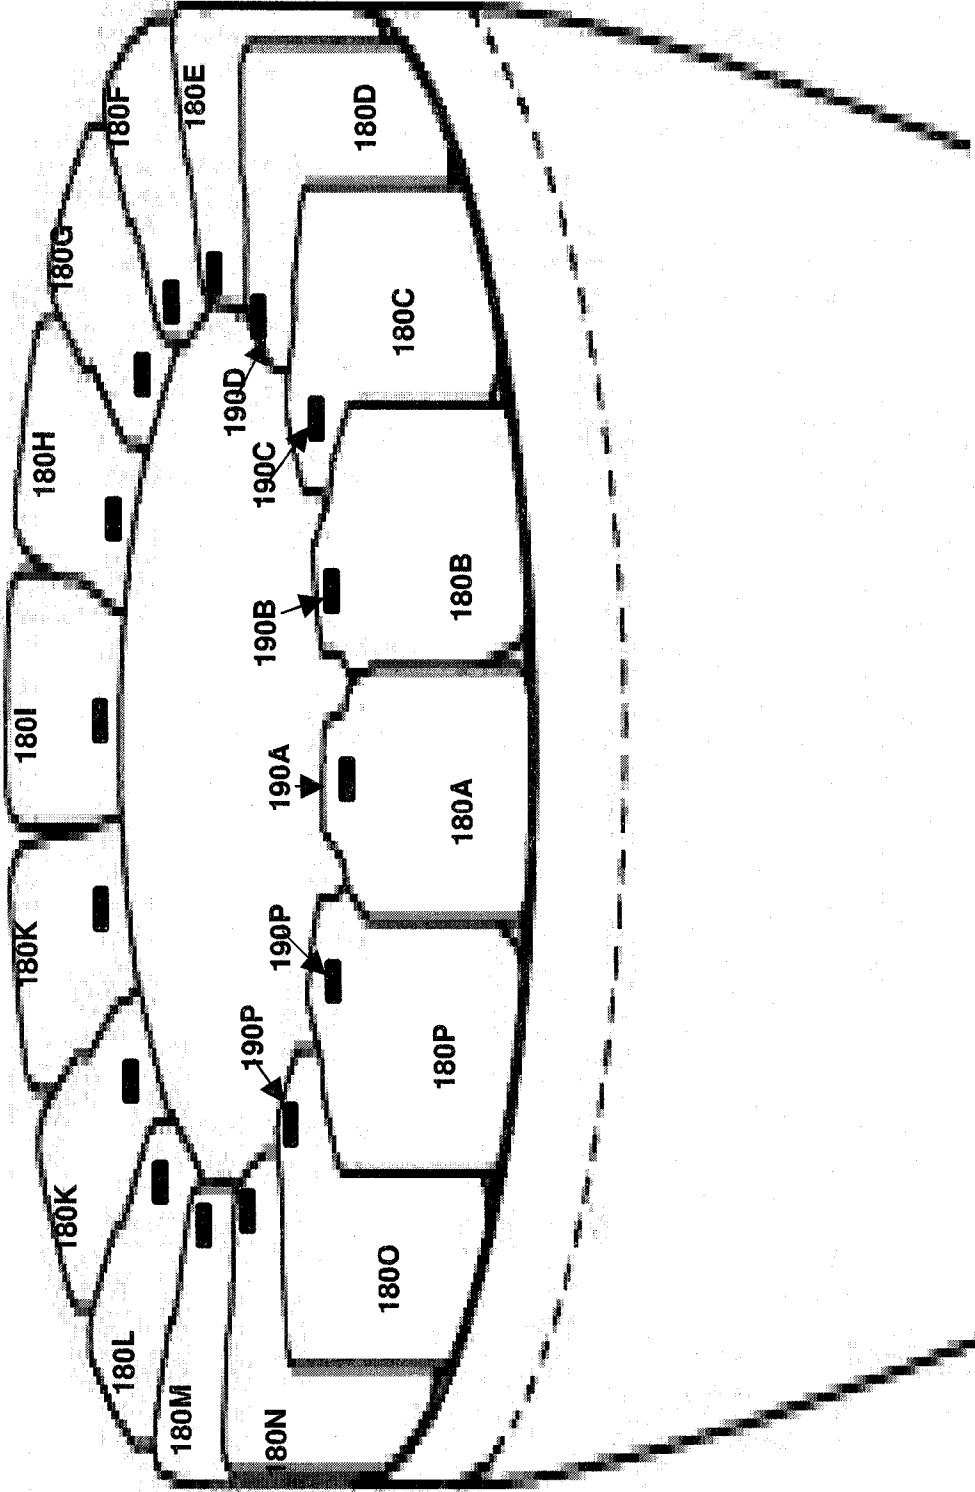


FIG. 16

22/24

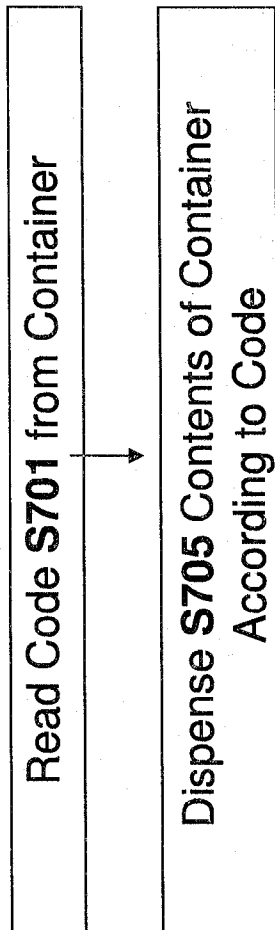


FIG. 17A

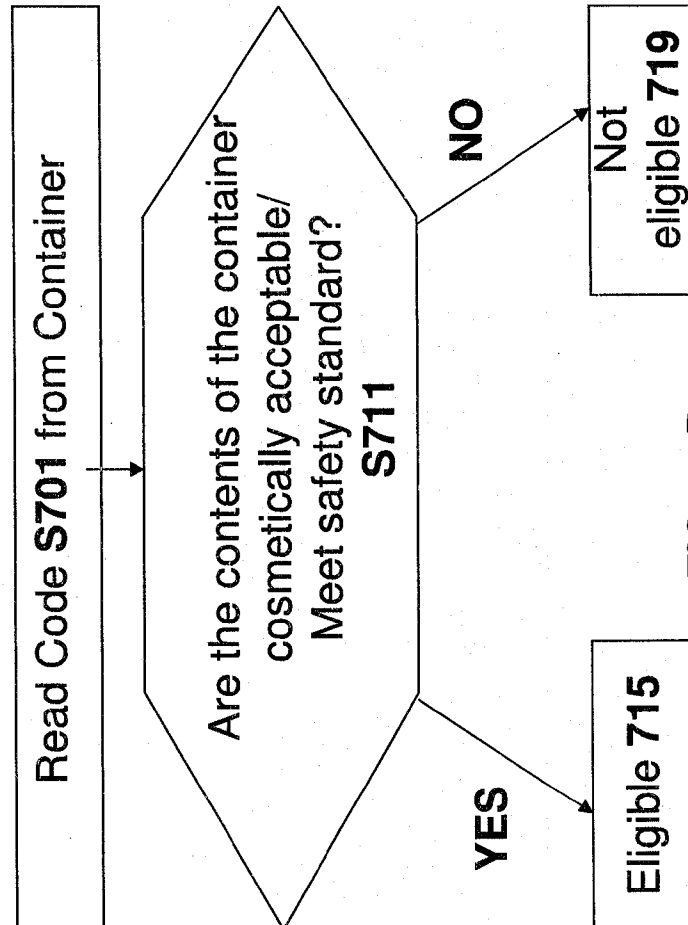


FIG. 17B

23/24

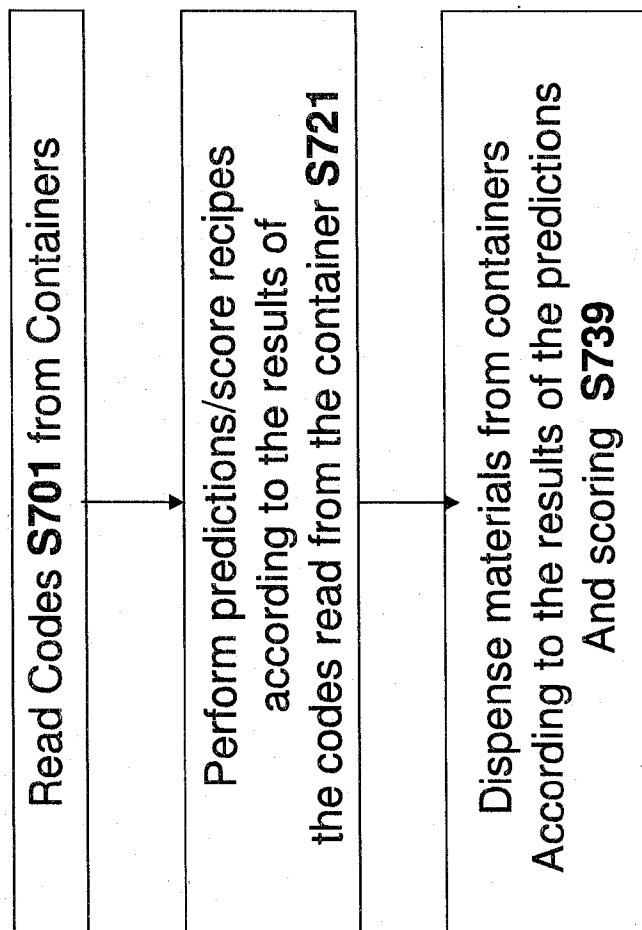


FIG. 18

24/24

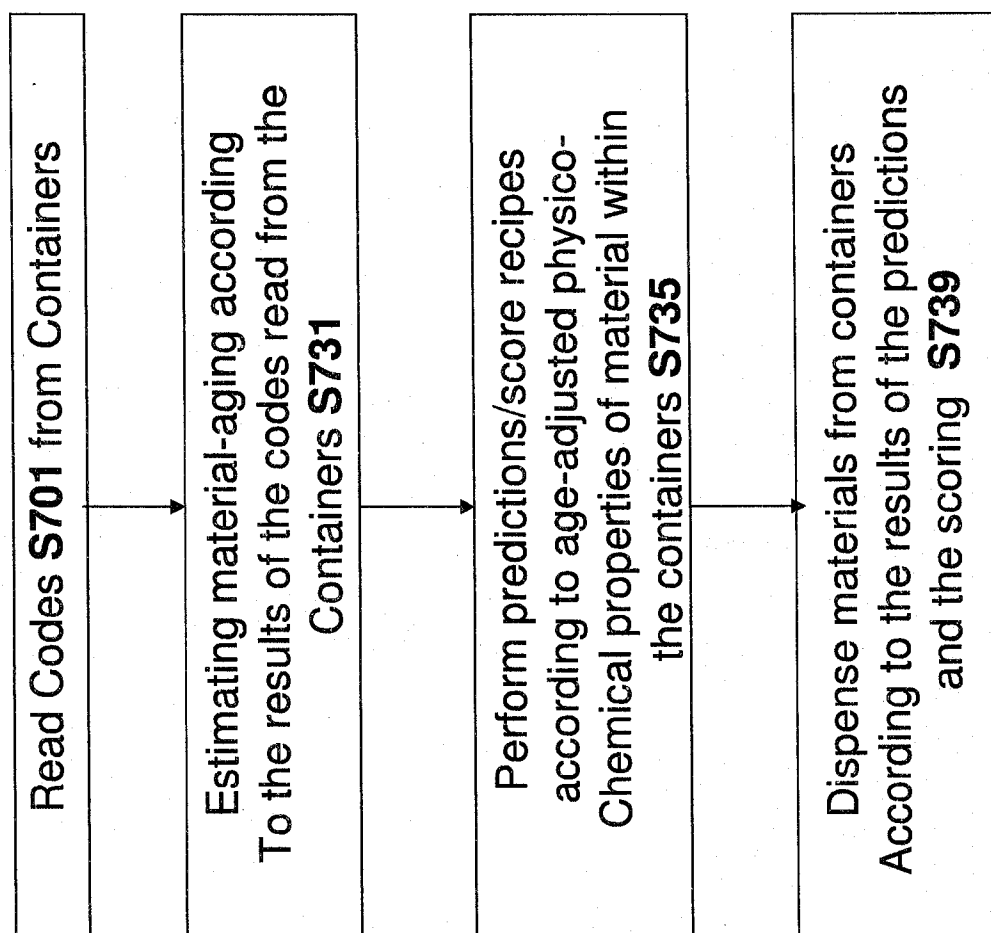


FIG. 19