




(22) **Date de dépôt/Filing Date:** 2008/09/04
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2009/08/27
 (45) **Date de délivrance/Issue Date:** 2023/03/07
 (62) **Demande originale/Original Application:** 2 914 887
 (30) **Priorités/Priorities:** 2008/02/19 (US61/029,576);
 2008/03/17 (US61/037,000);
 2008/07/15 (KR10-2008-0068633)

(51) **Cl.Int./Int.Cl. H04W 72/232** (2023.01)
 (72) **Inventeurs/Inventors:**
 KIM, KI JUN, KR;
 LEE, DAE WON, KR;
 ROH, DONG WOOK, KR;
 ANH, JOON KUI, KR;
 NOH, YU JIN, KR;
 LEE, JUNG HOON, KR
 (73) **Propriétaire/Owner:**
 OPTIS CELLULAR TECHNOLOGY, LLC, US
 (74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : PROCÉDE D'EMISSION ET DE RECEPTION D'INFORMATIONS DE COMMANDE PAR L'INTERMEDIAIRE D'UN CANAL PDCCH**
 (54) **Title: METHOD FOR TRANSMITTING AND RECEIVING CONTROL INFORMATION THROUGH PDCCH**

Generator initialization input number (sequence) : x

$$x = \{ \hat{x}_{N-1}, \hat{x}_{N-2}, \hat{x}_{N-3}, \dots, \hat{x}_0 \} \text{ or } x = \sum_{i=0}^{N-1} 2^i \cdot \hat{x}_i$$

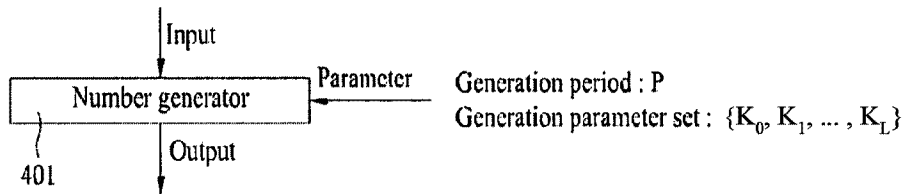

Sequence of output numbers $\bar{Z} = \{Z_0, Z_1, \dots, Z_{P-1}\}$

(57) **Abrégé/Abstract:**

A method for efficiently transmitting and receiving control information through a Physical Downlink Control Channel (PDCCH) is provided. When a User Equipment (UE) receives control information through a PDCCH, the received control information is set to be decoded in units of search spaces, each having a specific start position in the specific subframe. Here, a modulo operation according to a predetermined first constant value (D) is performed on an input value to calculate a first result value, and a modulo operation according to a predetermined first variable value (C) corresponding to the number of candidate start positions that can be used as the specific start position. is performed on the calculated first result value to calculate a second result value and an index position corresponding to the second result value is used as the specific start position. Transmitting control information in this manner enables a plurality of UEs to efficiently receive PDCCHs without collisions.

Abstract

A method for efficiently transmitting and receiving control information through a Physical Downlink Control Channel (PDCCH) is provided. When a User Equipment (UE) receives control information through a PDCCH, the received control information is set to be decoded in units of search spaces, each having a specific start position in the specific subframe. Here, a modulo operation according to a predetermined first constant value (D) is performed on an input value to calculate a first result value, and a modulo operation according to a predetermined first variable value (C) corresponding to the number of candidate start positions that can be used as the specific start position is performed on the calculated first result value to calculate a second result value and an index position corresponding to the second result value is used as the specific start position. Transmitting control information in this manner enables a plurality of UEs to efficiently receive PDCCHs without collisions.

[DESCRIPTION]**[Invention Title]**

METHOD FOR TRANSMITTING AND RECEIVING CONTROL
INFORMATION THROUGH PDCCH

5 **[Technical Field]**

The present invention relates to mobile communication technologies, and more particularly, to a method for efficiently transmitting and receiving control information through a Physical Downlink Control Channel (PDCCH).

10 **[Background Art]**

The following description can be applied to various mobile communication methods. However, a description will be given, particularly with reference to Third Generation Partnership Project Long Term Evolution (3GPP LTE) technologies.

3GPP LTE is a project for improving the UMTS mobile station standard to cope with future technology development in the Third Generation Partnership Project (3GPP). 3GPP LTE has evolved to Release 8 which is an improved version
20 of the 3GPP standard.

In the 3GPP LTE communication system, various

channels are defined for uplink and downlink in the physical layer used in actual signal transmission. For example, a Physical Uplink Shared Channel (PUSCH), a Physical Uplink Control Channel (PUCCH), and a Physical
5 Random Access Channel (PRACH) are defined as uplink physical channels, and a Physical Downlink Shared Channel (PDSCH), a Physical Multicast Channel (PMCH), a Physical Broadcast Channel (PBCH), a Physical Control Format Indicator Channel (PCFICH), a Physical Downlink Control
10 Channel (PDCCH), and a Physical Hybrid ARQ (HARQ) Indicator Channel (PHICH) are defined as downlink physical channels. In the following description, the word "physical" will be omitted for ease of explanation unless the omission causes confusing.

15 Among the various channels, the PDCCH serves to transmit scheduling allocation control information and other control information. In a cellular communication system in which one base station (or Node-B) controls a plurality of User Equipments (UEs) or (mobile stations),
20 multiple UEs can receive control information through a PDCCH transmitted from the base station. Here, since there is a limit to the number of PDCCHs that the base station can transmit at once, the base station does not previously allocate different PDCCHs to each UE but transmits control

information through an arbitrary PDCCH to an arbitrary UE at each time. Thus, the UE determines whether or not control information received through the PDCCH belongs to the UE based on a UE identifier included in the PDCCH. At 5 each time, the UE performs decoding on each of a plurality of PDCCHs (for a plurality of possible PDCCH formats) and receives, when it is determined that the PDCCH corresponds to the UE, control information included in the PDCCH and operates according to the control information.

10 However, the number of combinations of PDCCH regions for transmission of control information may be great. Excessive UE processing performance may be required for the UE to decode all PDCCH regions. Accordingly, there is a need to limit PDCCH regions to be decoded by each UE to 15 reduce the number of times the UE performs decoding and thus to reduce power consumption of the UE.

[Disclosure]

[Technical Problem]

An object of the present invention devised to solve 20 the problem lies in providing a technology for efficiently transmitting and receiving control information through a Physical Downlink Control Channel (PDCCH).

Another object of the present invention devised to

solve the problem lies in providing a technology for efficiently setting a different start position of a search space for each UE in order to transmit and receive control information to and from each UE through a different search
 5 space.

[Technical Solution]

The object of the present invention can be achieved by providing a method for a User Equipment (UE) to receive control information through a Physical Downlink Control
 10 Channel (PDCCH), the method including receiving control information from a base station through a PDCCH in units of Control Channel Element (CCE) aggregations, each including at least one CCE in a control region of a specific subframe; and decoding the received control information in
 15 units of search space in the specific subframe, wherein a modulo operation according to a predetermined first constant value (D) is performed on an input value to calculate a first result value, and a modulo operation according to a predetermined first variable value (C)
 20 defined by the equation of

$$C = \text{floor}(N_{CCE} / L_{CCE})$$

is performed on a value corresponds to the calculated first

result value to calculate a second result value and the search space starts with an index position corresponding to the second result value (where N_{CCS} represents the total number of CCEs in the specific subframe, and L_{CCS} is the number of CCEs included in the CCE aggregation, and floor(x) is a largest integer that is equal to or less than x).

In another aspect of the present invention, provided herein is a method for a base station to transmit control information through a Physical Downlink Control Channel (PDCCH), the method including transmitting control information for a specific User Equipment (UE) through a PDCCH in units of Control Channel Element (CCE) aggregations, each including at least one CCE in a control region of a specific subframe, wherein the control information for the specific UE is transmitted in units of search space in the specific subframe, and wherein a modulo operation according to a predetermined first constant value (D) is performed on an input value to calculate a first result value, and a modulo operation according to a predetermined first variable value (C) defined by the equation of

$$C = \text{floor}(N_{CCE} / L_{CCE})$$

is performed on a value corresponds to the calculated first result value to calculate a second result value and the search space starts with an index position corresponding to the second result value.

5 In the above methods, preferably, the first constant value (D) is predetermined to be higher than the first variable value (C).

 In addition, it may be advantageous that the input value for a "k+1"th subframe is set to correspond to the
10 first result value for a "k"th subframe, where "k" is a non-negative integer.

 On the other hand, in the above methods, an identification information value of the UE may be used for the input value for a 1st subframe.

15 In addition, the first result value may be calculated by multiplying the input value by a predetermined second constant value (A), adding a predetermined third constant value (B), which result in a intermediate value, and performing the modulo operation
20 according to the first constant value (D) on the intermediate value.

 In this case, preferably, the first constant value (D), the second constant value (A), and the third constant value (B) are 65537, 39827, and 0, respectively.

In an embodiment of the present invention, when the specific subframe is the "k"th subframe, the first constant value is "D", and the first constant value is "C", the search space starts with a specific start position Z_k in the "k"th subframe, the specific start position Z_k in the "k"th subframe is set as an index position corresponding to a value determined by $Z_k = [(A \cdot y_k + B) \bmod D] \bmod C$ and $y_k = (A \cdot y_{k-1} + B) \bmod D$, where A and B denote predetermined constant values and "k" denotes a subframe index.

In this case, the first constant value "D" may be 65537, and the predetermined constant values "A" and "B" may be 39827 and 0, respectively.

Here, the index position corresponding to the determined value may correspond to a start position of a CCF aggregation corresponding to the determined value under the assumption that indices are assigned on a CCE aggregation basis.

[Advantageous Effects]

According to the embodiments of the present invention described above, it is possible to efficiently transmit and receive control information through a Physical Downlink Control Channel (PDCCH).

Specifically, a different start position of a search space can be set for each UE so that control information can be transmitted and received to and from each UE through a different search space.

5 [Description of Drawings]

The accompanying drawings, which are included to provide a further understanding of the invention, illustrate embodiments of the invention and together with the description serve to explain the principle of the
10 invention.

In the drawings:

FIG. 1 illustrates an example of a CCE aggregation through which one PDCCH can be transmitted.

FIG. 2 illustrates all possible decoding regions that
15 the UE needs to attempt to decode taking into consideration the CCE aggregation level.

FIG. 3 illustrates an example wherein two different UEs have different decoding regions under a specific CCE aggregation level condition.

20 FIG. 4 illustrates the principle of a generator that generates identification dependent randomization numbers according to an embodiment of the present invention.

FIGS. 5 and 6 illustrate an example wherein a part of

a binary sequence generated by the generator is selected as an initial value according to an embodiment of the present invention.

FIG. 7 illustrates a frame structure in the 3GPP LTE system for explaining an example in which a communication system operates at regular intervals

FIGS. 8 and 9 illustrate a method for creating an initial value used to generate a start position of a PDCCH search space using a UE ID and a subframe number according to an embodiment of the present invention.

FIG. 10 illustrates an example wherein one of two UEs having different CCE aggregation levels fails to receive a PDCCH destined for the UE due to a PDCCH destined for the other UE.

FIGS. 11 and 12 illustrate examples where a UE ID, a subframe number, and a CCE aggregation level are used to create an initial value according to an embodiment of the present invention.

FIGS. 13 and 14 illustrate examples where an initial value used to calculate a start position of a PDCCH search space is created using a UE ID and a CCE aggregation level according to an embodiment of the present invention.

FIG. 15 illustrates the concept of the number of hits used for determining performance when parameter values are

calculated according to an embodiment of the present invention.

[Best Mode]

Reference will now be made in detail to the preferred
5 embodiments of the present invention with reference to the
accompanying drawings. The detailed description, which
will be given below with reference to the accompanying
drawings, is intended to explain exemplary embodiments of
the present invention, rather than to show the only
10 embodiments that can be implemented according to the
invention. The following detailed description includes
specific details in order to provide a thorough
understanding of the present invention. However, it will
be apparent to those skilled in the art that the present
15 invention may be practiced without such specific details.

In some instances, known structures and devices are
omitted or are shown in block diagram form, focusing on
important features of the structures and devices, so as not
to obscure the concept of the present invention. The same
20 reference numbers will be used throughout this
specification to refer to the same or like parts.

When a UE decodes all PDCCH regions, the complexity
of the UE and battery consumption are increased. Therefore,

it is necessary to specify a PDCCH decoding region for each UE. To accomplish this, there is a need to study in more detail a resource space through which the PDCCH is transmitted.

5 A PDCCH can be transmitted through a CCE aggregation including one or more Control Channel Elements (CCEs). In addition, a plurality of PDCCHs can be transmitted in one subframe. Here, the term "CCE" refers to a resource unit for transmission of control information, which is a unit
10 corresponding to a specific number of resource elements in the resource space. A detailed description of the concept of the CCE is omitted herein since it is apparent to those skilled in the art.

PDCCH formats can be classified as follows according
15 to the size of a CCE aggregation used for PDCCH transmission as described above.

TABLE 1

PDCCH format	Number of CCEs
0	1
1	2
2	4
3	8

FIG. 1 illustrates an example of a CCE aggregation
20 through which one PDCCH can be transmitted.

The term "Total Number of CCEs" in FIG. 1 refers to the number of CCEs included in one subframe. However, the

number of CCEs included in one subframe may vary according to system requirements. In FIG. 1, a reference numeral "100" denotes a format (PDCCH format 1 in Table 1) in which one PDCCH is transmitted through one CCE, a reference numeral "200" denotes a format (PDCCH format 2 in Table 1) in which one PDCCH is transmitted through 2 CCEs, a reference numeral "300" denotes a format (PDCCH format 3 in Table 1) in which one PDCCH is transmitted through 4 CCEs, and a reference numeral "400" denotes a format (PDCCH format 4 in Table 1) in which one PDCCH is transmitted through 8 CCEs.

That is, as shown in FIG. 1, the size of a CCE aggregation used to transmit one PDCCH may vary depending on channel environments of each UE as shown in FIG. 1. In the following description, the number of CCEs used to transmit one PDCCH will be referred to as a "CCE aggregation level". Thus, when each UE decodes a PDCCH, the UE must determine the size of a decoding region for each CCE aggregation level.

FIG. 2 illustrates all possible decoding regions that the UE needs to attempt to decode taking into consideration the CCE aggregation level.

The number of all possible decoding regions that a UE needs to attempt to decode according to a CCE aggregation

level set in the system may be too great as can be seen from FIG. 2. Therefore, it is preferable that a region (a combination of CCE aggregations through which the base station may have transmitted a PDCCH to the UE) that the UE
5 needs to attempt to decode be preset for each UE to limit the number of times the UE has to decode in order to receive a PDCCH.

However, the following must be considered when the PDCCH decoding region is limited. If all different UEs
10 decode the same limited PDCCH decoding region, the base station must transmit PDCCHs to all UEs only through the limited region. Thus, the number of UEs that are simultaneously controllable is restricted since the base station transmits PDCCHs only through the limited region
15 instead of using all available CCEs.

This restriction can be removed if different PDCCH decoding regions (or spaces) are allocated to different UEs. That is, the base station can more efficiently transmit PDCCHs to a number of UEs as the number of UEs which do not
20 have an overlapping PDCCH decoding region increases.

FIG. 3 illustrates an example wherein two different UEs have different decoding regions under a specific CCE aggregation level condition.

In the following description, a region that each UE

needs to attempt to decode to receive a PDCCH is referred to as a "search space". In the example of FIG. 3, both a UE 1 and a UE 2 have a CCE aggregation level 1 but have different decoding search spaces. That is, the base station can simultaneously transmit a PDCCH to the UE1 and the UE2 since the decoding search spaces do not overlap as shown in FIG. 3.

The following methods can be employed to set a different search space to each UE.

10 In the first method, a search space having a different start point (or start position) and a predetermined number of CCEs arranged starting from the start point is allocated to each UE so that each UE has a different search space.

15 In the second method, a search space having a different start point and a predetermined number of CCEs arranged at regular intervals starting from the start point is allocated to each UE so that each UE has a different search space.

20 These two methods are similar in that the overlapping PDCCH decoding region can be reduced if the search space of each UE has a different start position. Accordingly, an embodiment of the present invention suggests that different UE search spaces be set to have different start positions

as described above to minimize overlapping of search spaces that UEs need to attempt to decode in order to receive a PDCCH. Reducing overlapping of PDCCH decoding regions in this manner increases the number of UEs to which the base station can simultaneously transmit control information through scheduling.

An embodiment of the present invention suggests that a UE identification number that enables identification of each UE from each other be used to generate a different start position value for each UE as described above. It is preferable that as many different values (or numbers) as possible be generated for UEs. Thus, each generated value will be referred to as an "identification dependent randomization number".

FIG. 4 illustrates the principle of a generator that generates identification dependent randomization numbers according to an embodiment of the present invention.

Specifically, a generator 401 receives an input value x and generates an output value Z_j or an output sequence \bar{Z} according to a generation parameter set $\{K_0, K_1, \dots, K_L\}$ of the generator 401. Although the number of parameters used in the generator is $L+1$ in the example of FIG. 4, the number and type of the used parameters may vary and will be described in more detail in each embodiment of the present

invention described below.

The value generated by the generator 401 may be a binary sequence or may be an integer value into which all or part of the binary sequence is converted.

5 FIGs. 5 and 6 illustrate an example wherein a part of a binary sequence generated by the generator is selected as an initial value according to an embodiment of the present invention.

That is, as shown in FIG. 5, an M-length binary value
10 for use as an identification dependent randomization number can be selected from a P-length binary sequence generated by the generator 401 described above with reference to FIG.

4. According to this embodiment, a number of identification dependent randomization numbers can be
15 generated after a binary sequence is generated from a specific initial value. That is, as shown in FIG. 6, partial binary sequences that do not overlap can be selected from the binary sequence generated by the generator 401 and a number of identification dependent
20 randomization numbers can then be generated from the selected binary sequences. Although X identification dependent randomization numbers are generated in the example of FIG. 6, the present invention is not necessarily limited to this example.

When the M-length binary sequence selected for calculating an identification dependent randomization number is represented by $\{\hat{y}_0, \hat{y}_1, \hat{y}_2, \dots, \hat{y}_{M-1}\}$, this can be used to convert the identification dependent randomization number
 5 (i.e., the start position information) into an integer value Z_k .

MATHEMATICAL EXPRESSION 1

$$Z_k = \left(\sum_{i=0}^{M-1} 2^i \cdot \hat{y}_i \right) \text{mod } C \quad \text{OR} \quad Z_k = \left(\sum_{i=0}^{M-1} 2^{M-1-i} \cdot \hat{y}_i \right) \text{mod } C$$

$$y_k = \sum_{i=0}^{M-1} 2^i \cdot \hat{y}_i \quad y_k = \sum_{i=0}^{M-1} 2^{M-1-i} \cdot \hat{y}_i$$

Here, it is assumed that a subscript "k" represents a
 10 subframe index and "C" is defined as the number of candidate positions that can be used as start positions. That is, Mathematical Expression 1 represents that a specific-length binary sequence selected from a binary sequence generated by the generator is converted into an
 15 integer value and the integer value is modded with the number of all possible initial positions "C" to generate a start position value.

Specifically, in an embodiment of the present invention, the value "C" for a PDCCH to be currently
 20 received can be set to be equal to a value obtained by dividing the total number of physical CCEs by a CCE aggregation level (for example, 1, 2, 4, or 8) which is the

number of CCE aggregations that can be used to transmit one PDCCH. If the total number of physical CCEs that can be used for PDCCH transmission is indivisible by the number of CCEs belonging to one PDCCH, the value "C" can be quantized
5 to the number of possible candidate positions based on the above principle. Specifically, this embodiment suggests that the value "C" be obtained using the following equation.

MATHEMATICAL EXPRESSION 2

$$C = \text{floor}(N_{\text{CCE}} / L_{\text{CCE}}),$$

10 where "floor(x)" represents a function to quantize "x" to a largest integer that is equal to or less than "x", N_{CCE} represents the total number of CCEs in a specific subframe, and L_{CCE} is the number of CCEs that are used to transmit one PDCCH.

15 On the other hand, the generator 401 illustrated in FIG. 4 generates values having a period P. Accordingly, in an embodiment of the present invention, it is taken into consideration that P identification dependent randomization numbers are generated through a value generated through one
20 initial input value. That is, identification dependent randomization numbers may be generated by performing the binary sequence selection and integer conversion described above on a binary sequence generated through one initialization. Alternatively, a total of P identification

dependent randomization numbers such as $\{Z_0, Z_1, Z_2, \dots, Z_{p-1}\}$ may be generated directly from an input initial value.

Communication systems generally operate at preset timings and at intervals of a preset period.

5 FIG. 7 illustrates a frame structure in the 3GPP LTE system for explaining an example in which a communication system operates at regular intervals.

Specifically, as shown in FIG. 7, the communication system operates at intervals of a period of "10ms". Here,
10 the period "10ms" can be referred to as a radio frame. In this system, one radio frame includes 10 subframes, each having a length of "1ms". Each subframe may have a structure including 0.5ms slots.

In the example shown in FIG. 7, when randomization
15 effects are achieved using identification dependent randomization numbers, the generated values may also be handled at intervals of 10ms since the system illustrated in FIG. 7 operates at intervals of 10ms. That is, a system in which an identification dependent randomization number
20 is required for each subframe may be set to generate a sequence including 10 numbers so that the same sequence is used every period of 10ms. Alternatively, the system may operate such that a value is generated 10 times every subframe in a radio frame and values are generated in the

same manner in a next radio frame so that the same identification dependent randomization number is actually generated at intervals of 10ms.

Reference will now be made to a method in which a
5 start position for use in PDCCH search is generated directly from an initial input value based on an identification number. In the following, a first embodiment is described as a preferred embodiment of the present invention and second to fourth embodiments are
10 described as other embodiments that can be implemented according to a similar principle.

FIRST EMBODIMENT

This embodiment suggests that a value obtained by performing a first modulo operation of an input value of
15 "x" with a predetermined constant value of "D" and then performing a second modulo operation of the resulting value with a variable value of "C" corresponding to the number of candidate start positions that can be used as start positions is used as a search space start position for
20 control information search.

Specifically, this embodiment suggests that a start position be determined in the following manner.

MATHEMATICAL EXPRESSION 3

$$Z_i = [(A \cdot y_i + B) \bmod D] \bmod C$$

$$y_0 = x, y_k = (A \cdot y_{k-1} + B) \bmod D$$

$$k = 0, 1, \dots, P-1$$

More specifically, this embodiment suggests that an initial value "x" be input and then be multiplied by "A" and the sum of the initial value "x" multiplied by "A" and a constant "D" be modded with a variable "C" to generate a final integer as a start position value of a search space. The finally generated value Z_k in Mathematical Expression 3 indicates a start position of a PDCCH search space in a subframe corresponding to an index "k".

The following two methods can be used to calculate a search space start position of a different subframe from the subframe corresponding to the index "k".

In the first method, for each subframe, a different initial value is input to generate a start position value. That is, a different value such as $x_0, x_1, \dots, x_k, \dots$ is sequentially input as an initial value for each subframe having an index of k to calculate a start position Z_k of a search space of the subframe. In the second method, an intermediate value generated by inputting an initial value is used as an initial value for the next subframe to generate a start position value. That is, a value of y_{k-1} for a subframe having an index of k-1 is used as an input value for a subframe having an index of k.

The above Mathematical Expression 3 according to this embodiment uses the second method. Specifically, as shown in Mathematical Expression 3, a value obtained by multiplying an intermediate value y_{k-1} by a predetermined constant "A", adding the intermediate value y_{k-1} multiplied by "A" to a constant "B", and then modding the resulting value with a constant "D" is used as an initial value y_k .

The value corresponding to the number of candidate start positions "C" as defined in the above Mathematical Expression 2 can also be used in this embodiment.

In this embodiment, the purpose of performing a modulo operation with the value "C" defined as in Mathematical Expression 2 is to obtain an output value that is one of the candidate start positions. The following is the reason for performing another modulo operation with "D" before the modulo operation with "C" to obtain a value within a desired range.

Even when values of "Ax+B" are different in Mathematical Expression 3, there is high possibility that corresponding final values obtained by performing a modulo operation of the values "Ax+B" with "C" are likely to be equal if the value "C" is small. The possibility that different values of "Ax+B" cause collision such that they produce the same final value through the modulo operation

with the small value "C" can be reduced by performing another modulo operation with the predetermined constant "D". Here, it is preferable that the predetermined constant "D" be set to be higher than the value "C" to
5 reduce the possibility that different values of "Ax+B" cause collision as described above.

In this embodiment, it is assumed that the finally obtained search space start position Z_k in the subframe corresponding to the index "k" indicates a corresponding
10 one of the indices assigned to CCE aggregations corresponding to the CCE aggregation level. That is, when the CCE aggregation level is "2", indices for CCE aggregations are assigned on a 2-CCE basis. Accordingly, the value Z_k obtained according to this embodiment
15 indicates a corresponding one of the CCE aggregation indices assigned as described above.

SECOND EMBODIMENT

Unlike the first embodiment, the finally obtained search space start position Z_k in the subframe
20 corresponding to the index "k" may indicate a corresponding CCE position based on an index assigned to each CCE rather than an index assigned to each CCE aggregation. That is, when the CCE aggregation level is "2", a CCE aggregation index may be assigned on a CCE basis rather than on a 2-CCE

basis. Accordingly, this embodiment suggests that a value calculated through the following equation be used as a start position of a PDCCH search space under the same condition as in the first embodiment.

5 MATHEMATICAL EXPRESSION 4

$$Z_k = L_{\text{CCE}} \cdot [(A \cdot y_k + B) \bmod D] \bmod C$$

$$y_0 = x, y_k = (A \cdot y_{k-1} + B) \bmod D$$

$$k = 0, 1, \dots, P-1$$

When Mathematical Expression 4 is compared with
 10 Mathematical Expression 3 according to the first embodiment, it can be seen that a final value Z_k according to Mathematical Expression 4 is obtained by multiplying the final value Z_k generated according to Mathematical Expression 3 by L_{CCE} . That is, the value calculated
 15 according to Mathematical Expression 3 is multiplied by the number of CCEs L_{CCE} included in one CCE aggregation according to the CCE aggregation level to generate a value that can be used as a start position of a search space that is also appropriate for a system in which indices are
 20 assigned on a CCE basis.

THIRD EMBODIMENT

In the above Mathematical Expressions 3 and 4, it is assumed that k starts from "0". However, the index " k " may also be defined to start from "-1". In this case,

Mathematical Expressions 3 and 4 can be expressed as follows.

MATHEMATICAL EXPRESSION 5

$$Z_k = (Y_k \bmod \lfloor N_{\text{CCF}_k} / L \rfloor)$$

5 $Y_k = (A \cdot Y_{k-1}) \bmod D$

MATHEMATICAL EXPRESSION 6

$$Z_k = L \cdot (Y_k \bmod \lfloor N_{\text{CCF}_k} / L \rfloor)$$

$$Y_k = (A \cdot Y_{k-1}) \bmod D$$

In Mathematical Expressions 5 and 6, it is assumed
 10 that $Y_{-1} = n_{\text{RNTI}} \neq 0$ and n_{RNTI} corresponds to a UE ID.

Specifically, Mathematical Expression 5 is equivalent to Mathematical Expression 3 with k starting from -1 and Mathematical Expression 6 is equivalent to Mathematical Expression 4 with k starting from -1.

15 **FOURTH EMBODIMENT**

This embodiment suggests a second method for calculating a start position of a PDCCH search space in which the following equation is used unlike those used in the first to third embodiments.

20 **MATHEMATICAL EXPRESSION 7**

$$Z_k = ((A \cdot x_k + B \cdot x_k^2) \bmod D) \bmod C$$

That is, this embodiment suggests that a start position value be generated using a quadratic generation

equation as shown in Mathematical Expression 7 as an input value. Here, the input value may be used in both the method in which a new value is input for each generation of a subframe value and the method in which a value generated in a kth generation is used as an input value for a k+1th generation.

On the other hand, a preferred embodiment of the present invention suggests that a number, which is 1 greater than the largest number that the initial value may have, (i.e., a value indicating the range of numbers that the initial value may have) be used as the value "D" in Mathematical Expression 7.

In the above embodiments, it is assumed that UE identification information is used as the initial input value. However, another aspect of the present invention suggests that the initial input value be used in various forms to enable efficient PDCCH transmission and detection.

The basic purpose of each embodiment of the present invention is to generate a different value for any specific identification number, which will also be referred to as an "ID" for short, and thus it is preferable to select an initial value which maximizes randomization effects according to the ID.

Since the purpose of each embodiment of the present

invention is to impart randomization effects of PDCCH decoding regions between UEs and a base station and it is not necessary to take into consideration randomization effects between base stations, ID values for identifying UEs such as UE identification numbers (for example, a C-RNTI or a temporary-RNTI) can be selected as initial values. Specifically, all of the following information items or combinations thereof can be used to create initial values.

1. UE ID
- 10 2. CCE aggregation Level (L_{cce})
3. Subframe Number (or Slot Number)

According to the present invention, when a sequence is generated as an ID dependent random number synchronously with the timings of radio frames, both the method in which a start position value is generated using a different initial value every subframe, and the method in which a start position value is generated synchronously with the timings of radio frames and a new ID dependent random number is then generated using the generated start position value or the intermediate value, may be employed as described above.

In the method in which an initial value is input every subframe to generate an ID dependent random number every subframe, the initial value must be changed every

subframe and a different value must be generated for each UE and therefore an initial value may be created using a UE ID and a subframe number (or a corresponding slot number). It is preferable that the initial value be created such
 5 that a number indicating the UE ID and a number indicating the subframe not overlap when the initial value is expressed in binary form.

FIGs. 8 and 9 illustrate a method for creating an initial value used to generate a start position of a PDCCH search space using a UE ID and a subframe number according
 10 to an embodiment of the present invention.

Specifically, as shown in FIG. 8, when the initial value is expressed in binary form, the initial value can be created such that a 16-bit UE ID is placed at less
 15 significant bit positions including a Least Significant Bit (LSB) position of the binary value and a 4-bit subframe number is placed at more significant bit positions including a Most Significant Bit (MSB) position. The initial value created in this manner can be expressed as
 20 follows.

MATHEMATICAL EXPRESSION 8

$$\{UE-ID\} \times 2^0 + \{subframe\# \} \times 2^{16}$$

In addition, as shown in FIG. 9, when the initial value is expressed in binary form, the initial value can be

created such that a UE ID is placed at more significant bit positions including a Most Significant Bit (MSB) position of the binary value and a subframe number is placed at less significant bit positions including a Least Significant Bit (LSB) position. In this case, the initial value can be expressed as follows.

MATHEMATICAL EXPRESSION 9

$$\{UE - ID\} \times 2^4 + \{subframe\# \} \times 2^0$$

It is preferable that, when a PDCCH decoding region is randomized, randomization effects of each CCE aggregation level be different since the same physical CCE may be used even when different CCE aggregation levels are employed.

FIG. 10 illustrates an example wherein one of two UEs having different CCE aggregation levels fails to receive a PDCCH destined for the UE due to a PDCCH destined for the other UE.

A problem may occur if the CCE region for PDCCH decoding is the same for all UEs even though their CCE aggregation levels are different. For example, if a PDCCH decoding region corresponding to 8 aggregated CCEs for transmitting a PDCCH to a UE1 must also be used for a UE 2 when the PDCCH is transmitted to the UE 1 using the CCE aggregation of 8 CCEs, a PDCCH may not be able to be

transmitted to the UE 2 since a PDCCH decoding region for transmission to the UE2 is entirely covered by the PDCCH that uses the 8 aggregated CCEs.

To overcome this problem, an embodiment of the present invention suggests that a different identification dependent randomization number be generated for each CCE aggregation level. Specifically, the embodiment of the present invention suggests that information of each CCE aggregation level be incorporated into an initial value used to calculate a start position of a PDCCH search space. That is, a UE ID, a subframe number, and a CCE aggregation level may be used to create the initial value.

FIGs. 11 and 12 illustrate examples where a UE ID, a subframe number, and a CCE aggregation level are used to create an initial value according to an embodiment of the present invention.

Specifically, FIG. 11 illustrates an example wherein the initial value includes a subframe number, a CCE aggregation level, and a UE ID at bit positions sequentially from the MSB to the LSB positions and FIG. 12 illustrates an example wherein the initial value includes a UE ID, a CCE aggregation level, and a subframe number at bit positions sequentially from the MSB to the LSB positions. These information items may be arranged in any

other order, provided that the initial value includes all the information items.

Alternatively, when the initial value generation methods of the first to fifth embodiments described above
5 are used, an initial value including no subframe number may be input to generate sequences synchronously with the timings of radio frames and sequence values generated in each subframe may then be used one by one. In this case, the initial value can be created using a combination of the
10 UE ID and the CCE aggregation level information since there is no need to incorporate the subframe information into the initial value.

FIGs. 13 and 14 illustrate examples where an initial value used to calculate a start position of a PDCCH search
15 space is created using a UE ID and a CCE aggregation level according to an embodiment of the present invention.

Although the initial value includes a CCE aggregation level and a UE ID at bit positions sequentially from the MSB to the LSB in the example of FIG. 13 and the initial
20 value includes a CCE aggregation level and a UE ID at bit positions in the reverse order in the example of FIG. 14, the CCE aggregation level and the UE ID may be arranged in any order.

On the other hand, another embodiment of the present

invention suggests that each of the constant values A, B, and D used in the first to fifth embodiments vary depending on the CCE aggregation level. Although the value C is represented by a function of the CCE aggregation level and thus varies according to circumstances, the values A, B, and D are constants preset at transmitting and receiving sides. However, in order to generate a different identification dependent randomization number pattern for each CCE aggregation level, the values A, B, and D may each be set to be different for each CCE aggregation level.

In a special embodiment, constant values, which are fixed regardless of the CCE aggregation level, may be used as the values A and D used in the first to fourth embodiments while only the value B is defined to be different for each CCE aggregation level. This allows a finally obtained sequence to be different for each CCE aggregation level without significantly changing the characteristics of the generated sequence.

Another possible method is to use only the UE ID as an initial value while especially using fixed, constant values as the values A, B, and D in the first to fifth embodiments since the value C inherently varies according to the CCE aggregation level. It is not necessary to define values A, B, and D that vary according to the CCE

aggregation level in the above embodiments since a value randomized to some extent is generated through a modulo operation with the value D and the finally obtained identification dependent random number may vary through the
5 modulo operation with the value C that varies according to the CCE aggregation level.

Reference will now be made in detail to parameter values of the generation equations for obtaining a start position of a PDCCH search space according to the first to
10 fifth embodiments described above.

Using a computer, the present inventor found some values of the parameters A, B, and D of the generator which are good for each method. The good values are defined as follows and the present invention suggests best parameter
15 values for each search criterion described below.

A start position of a PDCCH decoding region for decoding for each CCE aggregation level is obtained based on an identification dependent randomization number. The PDCCH decoding region should be synchronized between the
20 base station and UEs and the period and timing of generation of an identification dependent randomization number should also be synchronized between all UEs that communicate with the base station. Thus, overlapping of PDCCH decoding regions can be minimized if identification

dependent randomization numbers that UEs having different UE IDs use every subframe are different. This indicates that, even though some identification dependent randomization numbers are equal among identification dependent randomization numbers generated with different UE IDs, randomization effects can be achieved if the identification dependent randomization numbers are different only in a subframe in which a specific value is used.

10 In an embodiment of the present invention, a concept of the "number of hits" is defined as a criterion for determining performance according to each parameter value. Each of the UEs having different UE IDs generates identification dependent randomization numbers
15 synchronously with radio frames and compares identification dependent randomization numbers used in subframes to determine the number of subframes which has used the same value and records the determined number of subframes as the "number of hits". Therefore, a distribution of the numbers
20 of hits with all other possible UE IDs is measured for every UE ID that can be allocated and the distribution of the numbers of hits probabilistically determined when a specific generation method is used is set as one criterion for determining performance.

FIG. 15 illustrates the concept of the number of hits used for determining performance when parameter values are calculated according to an embodiment of the present invention.

5 That is, the embodiment of the present invention suggests that, since 10 subframes are included in a radio frame in the 3GPP LTE as shown in FIG. 15, the number of possible hits be determined for subframe indices of 0, 1, ..., 10 and the determined number of hits be used as a
10 probability that UEs having two different UE IDs use the same PDCCH decoding region (i.e., as a criterion for determining performance).

 On the other hand, an embodiment of the present invention suggests that a distribution map of an
15 identification dependent randomization number(s) that can be generated from all input initial values that can be generated according to the generation method with specific parameters A, B, and D be taken into consideration as a second criterion for determining performance.
20 Identification dependent randomization numbers generated using all generation methods suggested in the present invention are between 0 to C-1. Therefore, the embodiment of the present invention suggests that a distribution of integer values between 0 to C-1 generated for all initial

values that can be input be measured and whether or not all generated values are as uniform as possible then be determined and the uniformity of the generated values then be used as a criterion for determining performance.

5 In this embodiment, the following performance indicators are selected from performance results. When specific parameters are used in each generation method, the following indicators are calculated and compared. Here, the average of values measured when the value C varies in a
10 range from 96 to 3 is determined for each of the indicators.

1. Maximum number of hits

2. Average number of hits

3. Whether or not ID dependent randomization numbers have been generated uniformly in a range of 0 to C-1

15 4. Variance of probabilities that values between 0 to C-1 will be generated for determining whether or not ID dependent randomization numbers have been generated uniformly in a range of 0 to C-1

20 First, parameter values used in the method for generating a start position of a PDCCH search space according to the first embodiment are described below with reference to the above description.

Various values can be used as constant values A, B, and D that are predetermined and used at the transmitting

and receiving sides in the generation method according to the first embodiment. Thus, it is difficult to measure performance of all possible values of A, B, and D using a computer. Therefore, values of A, B, and D that generally exhibited high performance were first confirmed using a computer and respective performance of specific combinations of A, B, and D was compared based on the confirmed values.

First, results of performance measurement using a computer showed that the value D exhibited highest performance when similar to the maximum value that can be expressed by the initial value x with A and B fixed to specific values. Results shown in Table 2 are part of performance measurement results indicating the probability that sequences generated for different UE IDs using an initial value created using only the UE IDs according to the first embodiment become equal in each subframe. The UE ID consists of 16 bits that correspond to 65536 ($=2^{16}$) values.

TABLE 2

Parameters				Probability per Number of Hits										
A	B	C	D	0	1	2	3	4	5	6	7	8	9	10
409	7	9	65536	96.9	0.27	0.51	0.81	0.7	0.43	8.18	0.0	0.00	0.0	0.
3		6		31%	0%	3%	1%	05%	1%	3%	48%	7%	00%	0%
409	7	8	65536	89.5	8.40	0.92	0.08	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		60%	4%	6%	8%	21%	2%	0%	00%	0%	00%	0%
409	7	7	65536	89.5	8.16	1.87	0.29	0.0	0.01	0.00	0.0	0.00	0.0	0.

3		6		85%	2%	6%	7%	62%	7%	1%	00%	0%	00%	00%
409	7	6	65536	86.7	11.6	1.46	0.14	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		17%	44%	4%	2%	29%	5%	0%	00%	0%	00%	00%
409	7	5	65536	90.2	4.43	3.37	1.43	0.4	0.11	0.03	0.0	0.00	0.0	0.
3		6		13%	9%	6%	2%	04%	0%	1%	05%	0%	00%	00%
409	7	4	65536	81.9	14.8	2.82	0.33	0.0	0.01	0.00	0.0	0.00	0.0	0.
3		6		70%	10%	2%	3%	53%	2%	0%	00%	0%	00%	00%
409	7	3	65536	82.6	9.78	5.40	1.69	0.3	0.08	0.01	0.0	0.00	0.0	0.
3		6		24%	7%	2%	9%	84%	6%	8%	01%	0%	00%	00%
409	7	2	65536	72.3	18.8	7.04	1.46	0.2	0.03	0.00	0.0	0.00	0.0	0.
3		6		97%	21%	5%	0%	34%	9%	4%	00%	0%	00%	00%
409	7	1	65536	93.7	0.00	0.00	0.00	0.0	0.00	0.00	0.0	0.00	0.0	5.
3		6		51%	0%	0%	0%	00%	0%	0%	00%	0%	00%	24
409	7	6	65536	50.8	4.33	9.75	13.0	11.	6.83	2.84	0.8	0.15	0.0	0.
3		6		67%	7%	3%	06%	379	3%	4%	12%	2%	15%	00
409	7	9	65537	90.0	9.45	0.44	0.01	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		78%	9%	4%	8%	00%	0%	0%	00%	0%	00%	00%
409	7	8	65537	88.9	10.4	0.54	0.02	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		77%	57%	2%	4%	00%	0%	0%	00%	0%	00%	00%
409	7	7	65537	87.6	11.6	0.68	0.03	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		01%	86%	1%	1%	00%	0%	0%	00%	0%	00%	00%
409	7	6	65537	85.8	13.2	0.87	0.04	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		30%	48%	9%	3%	00%	0%	0%	00%	0%	00%	00%
409	7	5	65537	83.4	16.2	1.18	0.06	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		71%	81%	2%	5%	01%	0%	0%	00%	0%	00%	00%
409	7	4	65537	80.2	17.9	1.70	0.11	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		16%	64%	5%	2%	04%	0%	0%	00%	0%	00%	00%
409	7	3	65537	75.4	21.6	2.68	0.22	0.0	0.00	0.00	0.0	0.00	0.0	0.
2		6		10%	68%	4%	5%	13%	0%	0%	00%	0%	00%	00%
409	7	2	65537	67.4	27.2	4.70	0.53	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6		71%	39%	9%	6%	45%	0%	0%	00%	0%	00%	00%
409	7	1	65537	52.3	35.1	10.3	1.84	0.2	0.01	0.00	0.0	0.00	0.0	0.
3		6		55%	82%	60%	6%	41%	6%	1%	00%	0%	00%	00%
409	7	6	65537	16.1	32.3	29.0	15.5	5.4	1.30	0.21	0.0	0.00	0.0	0.
3		6		52%	05%	49%	30%	21%	3%	6%	22%	1%	00%	00%
409	7	9	13107	90.0	9.50	0.44	0.00	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6	1	52%	0%	3%	5%	00%	0%	0%	00%	0%	00%	00%
409	7	8	13107	88.9	10.4	0.55	0.00	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6	1	56%	84%	2%	8%	00%	0%	0%	00%	0%	00%	00%
409	7	7	13107	87.6	11.6	0.71	0.01	0.0	0.00	0.00	0.0	0.00	0.0	0.
3		6	1	03%	67%	4%	5%	01%	0%	0%	00%	0%	00%	00%

409 3	7	6 6	13107 1	85.8 69%	13.1 90%	0.95 9%	0.02 2%	0.0 01%	0.00 0%	0.00 0%	0.0 00%	0.00 0%	0.0 00%	0.0 00%
409 3	7	5 6	13107 1	83.5 66%	15.1 86%	1.26 8%	0.03 9%	0.0 01%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	4 6	13107 1	80.2 72%	17.8 20%	1.82 2%	0.08 2%	0.0 03%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	3 6	13107 1	75.4 48%	21.5 32%	2.83 9%	0.17 3%	0.0 08%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	2 6	13107 1	67.5 63%	26.9 83%	4.93 8%	0.47 8%	0.0 35%	0.00 2%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	1 6	13107 1	52.4 21%	34.9 96%	10.5 18%	1.82 6%	0.2 18%	0.02 0%	0.00 1%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	6	13107 1	16.1 52%	32.3 03%	29.0 64%	15.5 05%	5.4 36%	1.30 5%	0.21 2%	0.0 22%	0.0 1%	0.0 00%	0.0 00%
409 3	7	9 6	10485 76	96.9 33%	0.27 3%	0.60 8%	0.81 0%	0.7 05%	0.42 3%	0.18 1%	0.0 56%	0.01 1%	0.0 01%	0.0 00%
409 3	7	8 6	10485 76	89.5 26%	9.41 5%	0.98 0%	0.07 5%	0.0 04%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	7 6	10485 76	89.5 39%	8.15 8%	1.96 3%	0.30 5%	0.0 32%	0.00 3%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	6 6	10485 76	86.7 11%	11.6 03%	1.53 8%	0.13 5%	0.0 11%	0.00 1%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	5 6	10485 76	90.2 26%	4.40 7%	3.33 1%	1.48 5%	0.4 48%	0.08 8%	0.01 3%	0.0 01%	0.0 00%	0.0 00%	0.0 00%
409 3	7	4 6	10485 76	81.9 91%	14.7 39%	2.86 8%	0.36 3%	0.0 37%	0.00 2%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	3 6	10485 76	82.8 19%	9.54 3%	5.29 9%	1.83 1%	0.4 20%	0.07 6%	0.01 1%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	2 6	10485 76	72.4 50%	18.7 20%	7.03 1%	1.56 2%	0.2 26%	0.02 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	1 6	10485 76	93.7 51%	0.00 0%	0.00 0%	0.00 0%	0.0 00%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 24 9%
409 3	7	6 6	10485 76	50.8 73%	4.33 9%	9.75 8%	12.9 95%	11. 371 %	6.82 8%	2.85 2%	0.8 15%	0.15 2%	0.0 16%	0.0 1%
409 3	7	9 6	10485 93	90.9 46%	7.61 1%	1.14 5%	0.08 9%	0.0 07%	0.00 1%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	8 6	10485 93	89.0 08%	10.3 92%	0.58 0%	0.02 0%	0.0 00%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	7 6	10485 93	87.5 81%	11.7 11%	0.69 0%	0.01 7%	0.0 00%	0.00 0%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%
409 3	7	6 6	10485 93	87.5 95%	9.98 0%	2.14 1%	0.26 5%	0.0 18%	0.00 1%	0.00 0%	0.0 00%	0.0 00%	0.0 00%	0.0 00%

409	7	5	10485	89.4	5.44	3.40	1.31	0.3	0.05	0.00	0.0	0.00	0.0	0.0	0%
3		6	93	44%	5%	1%	5%	33%	5%	6%	01%	0%	00%	00%	0%
409	7	4	10485	95.6	0.04	0.19	0.50	0.8	1.07	0.89	0.5	0.19	0.0	0.0	0.
3		6	93	58%	3%	1%	9%	91%	0%	2%	10%	0%	41%	00	4%
409	7	3	10485	80.6	12.7	5.20	1.24	0.1	0.02	0.00	0.0	0.00	0.0	0.0	0.
3		6	93	12%	24%	2%	0%	98%	1%	2%	01%	0%	00%	00%	0%
409	7	2	10485	92.3	0.07	0.33	0.90	1.5	1.89	1.57	0.9	0.33	0.0	0.0	0.
3		6	93	17%	4%	7%	3%	78%	2%	8%	02%	8%	75%	00	7%
409	7	1	10485	52.3	35.0	10.4	1.82	0.2	0.02	0.00	0.0	0.00	0.0	0.0	0.
3		6	93	56%	73%	56%	6%	25%	2%	2%	00%	0%	00%	00	0%
409	7	6	10485	66.7	0.32	1.46	3.90	6.8	8.20	6.83	3.9	1.46	0.3	0.0	0.
3		6	93	00%	5%	5%	5%	36%	6%	6%	04%	5%	25%	03	2%
409	7	9	20971	90.0	9.51	0.42	0.01	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	48%	4%	5%	2%	00%	0%	0%	00%	0%	00%	00	0%
409	7	8	20971	88.9	10.4	0.57	0.01	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	97%	12%	2%	9%	00%	0%	0%	00%	0%	00%	00	0%
409	7	7	20971	87.6	11.6	0.70	0.02	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	14%	55%	4%	7%	00%	0%	0%	00%	0%	00%	00	0%
409	7	6	20971	85.8	13.2	0.91	0.03	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	45%	10%	1%	4%	01%	0%	0%	00%	0%	00%	00	0%
409	7	5	20971	83.4	15.2	1.20	0.06	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	87%	50%	0%	3%	01%	0%	0%	00%	0%	00%	00	0%
409	7	4	20971	80.2	17.8	1.76	0.12	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	94%	16%	5%	0%	05%	0%	0%	00%	0%	00%	00	0%
409	7	3	20971	75.4	21.6	2.72	0.21	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	34%	12%	4%	7%	13%	0%	0%	00%	0%	00%	00	0%
409	7	2	20971	67.5	26.9	4.89	0.51	0.0	0.00	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	73%	86%	7%	2%	31%	1%	0%	00%	0%	00%	00	0%
409	7	1	20971	52.4	34.9	10.5	1.85	0.2	0.01	0.00	0.0	0.00	0.0	0.0	0.
3		6	43	62%	07%	52%	9%	06%	4%	0%	00%	0%	00%	00	0%
409	7	6	20971	16.1	32.2	29.0	15.5	5.4	1.28	0.21	0.0	0.00	0.0	0.0	0.
3		6	43	76%	40%	86%	53%	20%	0%	6%	27%	2%	00%	00	0%

As shown in Table 2, the probability that collision occurs (i.e., UE IDs become equal) in all of the 10 subframes is 6.429% when the value D is equal to an initial value of 2^{15} and the value C is 16. However, this phenomenon disappears when the value D is greater than 2^{16} .

It can be seen from Table 2 that the phenomenon disappears when the value D is 65537 or 131071 which are greater than 2^{16} . However, such poor performance results occur when a value much greater than 2^{16} is selected as the value D.

5 That is, such results occur when the value D is 1048576 or 1048593. Although performance is increased when the value D is 2097143, the performance is, on average, lower than that when a value which is close to 2^{16} and greater than 2^{16} is used as the value D.

10 Based on these facts, an embodiment of the present invention suggests that a prime number greater than 2^N and less than 2^{N+1} be used as the parameter value D when the initial value is expressed by N bits. Preferably, the smallest prime number greater than 2^N is used as the
15 parameter value D. Specifically, an embodiment suggests that a value of $2^{16}+1$ be used as the value D when $N = 16$, a value of $2^{18}+3$ be used as the value D when $N = 18$, and a value of $2^{22}+15$ be used as the value D when $N = 22$. The reason why this embodiment suggests that the smallest prime
20 number that satisfies performance requirements be used as the value D is that the simplicity of phenomenon increases, approaching that of normal phenomena, as the value D decreases.

Consequently, an embodiment of the present invention

suggests that a value of 65537 be used as the parameter D of the start position generation equation according to the first embodiment of the present invention when it is assumed that the initial value for the generation equation is generated based on a 16-bit UE ID.

On the other hand, to select a parameter value of B, performance was measured using various values of A and various values of B with the value D being fixed to a specific value. Such measurement results showed that the parameter B has no significant influence on the variance of the probabilistic distribution of generation of each value of between 0 and C-1, the average number of collisions, and the maximum number of collisions when the parameters D and A are prime. The following Table 3 shows part of the various performance measurement results.

TABLE 3

A	B	D	Variance of probability of generation for each number between 0 and C-1	Average number of Hits	Maximum Number of Hits
32789	0	1048567	8.29439756700E-04	1.31635865660E+00	6
32789	7	1048567	8.29439750350E-04	1.31635868060E+00	6
32789	3821	1048567	8.29439765480E-04	1.31635878580E+00	6
33037	0	1048567	8.29439348280E-04	1.31635500230E+00	7
33037	7	1048567	8.29439329360E-04	1.31635487980E+00	7
33037	3821	1048567	8.29439315490E-04	1.31635479360E+00	7

34421	0	1048567	8.29439612880E-04	00	1.31635698230E+00	10
34421	7	1048567	8.29439589840E-04	00	1.31635668660E+00	10
34421	3821	1048567	8.29439602550E-04	00	1.31635693940E+00	10
36061	0	1048567	8.29439625390E-04	00	1.31635759420E+00	8
36061	7	1048567	8.29439596140E-04	00	1.31635773990E+00	8
36061	3821	1048567	8.29439654740E-04	00	1.3163577670E+00	8
41189	0	1048567	8.29441337570E-04	00	1.31637294490E+00	6
41189	7	1048567	8.29441321130E-04	00	1.31637275310E+00	6
41189	3821	1048567	8.29441026210E-04	00	1.31637274940E+00	6
43789	0	1048567	8.29675510000E-04	00	1.31860997820E+00	7
43789	7	1048567	8.29674822710E-04	00	1.31859473170E+00	7
43789	3821	1048567	8.29673565670E-04	00	1.31860202780E+00	7
47653	0	1048567	8.29440200970E-04	00	1.31636344580E+00	8
47653	7	1048567	8.29440320540E-04	00	1.31636344670E+00	8
47653	3821	1048567	8.29440282120E-04	00	1.31636322130E+00	8

Therefore, an embodiment of the present invention suggests that the parameter values D and A be set to be prime and the parameter value B be set to a very small integer or 0. The complexity of calculation can be reduced

5 when the value B is 0 or approaches 0.

Consequently, a preferred embodiment of the present invention suggests that the parameter value B be set to "0" in the generation equation of the first embodiment.

On the other hand, to select a parameter value A,

10 performance was measured using an available prime number less than the value D while fixing the value B, which is

determined to have no significant influence on performance, to a specific value and fixing the value D to a value that exhibited high performance according to the initial value. The following Table 4 shows part of such performance measurement results.

TABLE 4

A	B	D	Variance of probability of generation for each number between 0 and C-1	Average number of Hits	Maximum Number of Hits
3982 7	7	6553 7	8.29439188640E-04	1.31635211090E+ 00	6
3423 1	7	6553 7	8.29439188930E-04	1.31635211140E+ 00	6
4688 9	7	6553 7	8.29439189470E-04	1.31635211190E+ 00	6
5228 9	7	6553 7	8.29439190000E-04	1.31635211190E+ 00	6
5571 7	7	6553 7	8.29439189710E-04	1.31635211190E+ 00	6
5383 1	7	6553 7	8.29439189320E-04	1.31635211190E+ 00	6
3299 3	7	6553 7	8.29439189850E-04	1.31635211230E+ 00	6
5092 3	7	6553 7	8.29439190530E-04	1.31635211280E+ 00	6
5613 1	7	6553 7	8.29439190290E-04	1.31635211280E+ 00	6
6088 9	7	6553 7	8.29439190510E-04	1.31635211280E+ 00	6
6360 1	7	6553 7	8.29439190390E-04	1.31635211280E+ 00	6
5343 7	7	6553 7	8.29439190780E-04	1.31635211280E+ 00	6
4015 1	7	6553 7	8.29439190530E-04	1.31635211280E+ 00	6
4683 1	7	6553 7	8.29439190190E-04	1.31635211280E+ 00	6
3601 1	7	6553 7	8.29439190820E-04	1.31635211330E+ 00	6
6474 7	7	6553 7	8.29439190630E-04	1.31635211330E+ 00	6
3904 1	7	65537	8.29439190680E-04	1.31635211330E+ 00	6
4760 9	7	65537	8.29439190820E-04	1.31635211330E+ 00	6

3450 1	7	65537	8.29439191160E-04	1.31635211330E+ 00	6
3682 1	7	65537	8.29439190820E-04	1.31635211330E+ 00	6
4206 1	7	65537	8.29439191210E-04	1.31635211330E+ 00	6
3470 3	7	65537	8.29439190820E-04	1.31635211330E+ 00	6
3586 3	7	65537	8.29439190730E-04	1.31635211330E+ 00	6
4763 9	7	65537	8.29439190870E-04	1.31635211330E+ 00	6
5176 7	7	65537	8.29439190820E-04	1.31635211330E+ 00	6
4062 7	7	65537	8.29439191450E-04	1.31635211370E+ 00	6
4088 3	7	65537	8.29439191450E-04	1.31635211370E+ 00	6
4101 1	7	65537	8.29439191160E-04	1.31635211370E+ 00	6
4448 3	7	65537	8.29439191310E-04	1.31635211370E+ 00	6
4517 9	7	65537	8.29439191120E-04	1.31635211370E+ 00	6
4552 3	7	65537	8.29439191210E-04	1.31635211370E+ 00	6
5904 3	7	65537	8.29439191160E-04	1.31635211370E+ 00	6
5908 3	7	65537	8.29439191450E-04	1.31635211370E+ 00	6
6449 9	7	65537	8.29439191410E-04	1.31635211370E+ 00	6
4152 1	7	65537	8.29439191210E-04	1.31635211370E+ 00	6
4228 1	7	65537	8.29439191310E-04	1.31635211370E+ 00	6
4357 7	7	65537	8.29439191210E-04	1.31635211370E+ 00	6
4573 7	7	65537	8.29439191450E-04	1.31635211370E+ 00	6
4948 1	7	65537	8.29439191500E-04	1.31635211370E+ 00	6
5704 1	7	65537	8.29439191450E-04	1.31635211370E+ 00	6
3487 7	7	65537	8.29439191410E-04	1.31635211370E+ 00	6
4195 7	7	65537	8.29439191210E-04	1.31635211370E+ 00	6
4538 9	7	65537	8.29439191410E-04	1.31635211370E+ 00	6
6186 1	7	65537	8.29439191500E-04	1.31635211370E+ 00	6
-- 7	--	--	--	--	--
5197 7	7	65537	8.29439195530E-04	1.31635211740E+ 00	9

6144 1	7	65537	8.29439193350E-04	1.31635211510E+ 00	9
6451 3	7	65537	8.29439196010E-04	1.31635211790E+ 00	9
6552 1	7	65537	8.29439192330E-04	1.31635211370E+ 00	9
3460 7	7	65537	8.29439192670E-04	1.31635211510E+ 00	9
5323 9	7	65537	8.29439196260E-04	1.31635211840E+ 00	9
6386 3	7	65537	8.29439194270E-04	1.31635211650E+ 00	9

In Table 4, values of "A" exhibiting the smallest numbers of collisions are first arranged and remaining values are arranged in decreasing order of the average number of collisions. That is, the value of A located at an upper portion of Table 4 exhibits high performance in terms of performance indicators. Thus, an embodiment of the present invention suggests that one of the values written above symbols "..." in Table 4 be used as the value A. Particularly, a preferred embodiment of the present invention suggests that a value of 39827 written at the top of Table 4 be used as the value A.

Consequently, a preferred embodiment of the present invention suggests that values of 39827, 0, and 65537 be used respectively as the parameter values A, B, and D of the generation equation according to the first embodiment of the present invention. However, when it is necessary to use other parameter values according to system requirements, values selected from those written in the following table can be used as the parameter values A, B, and D.

TABLE 5

A	B	D
39827, 34231, 46889, 52289	0, 1, 3, 5, 7	$2^{16}+1, 2^{18}+3, 2^{20}+7, 2^{22}+15$

The equations for calculating a start position of a PDCCH search space according to the second to fourth embodiments are substantially identical to that of the first embodiment in terms of their meanings. Accordingly, the present invention suggests that values of 39827, 0, and 65537 also be used respectively as the parameter values A, B, and D in the second to fourth embodiments. In this case, values written in Table 5 can be used as the parameter values A, B, and D when it is necessary to use parameter values other than 39827, 0, and 65537 according to system requirements.

The parameters of the generation equation used in the fifth embodiment of the present invention can also be determined in a manner similar to the method described above. The present inventor also measured various performance criteria for the parameters of the generation equation of the fifth embodiment and suggests that the following combinations of parameters be used.

20 TABLE 6

A	B	D
7	16	2^{20}
15	32	2^{20}
31	64	2^{20}

The detailed description of the preferred embodiments of the present invention has been given to enable those skilled in the art to implement and practice the invention. Although the invention has been described with reference to
5 the preferred embodiments, those skilled in the art will appreciate that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention described in the appended claims.

10 Accordingly, the invention should not be limited to the specific embodiments described herein, but should be accorded the broadest scope consistent with the principles and novel features disclosed herein.

15 [Industrial Applicability]

The above embodiments can be applied not only to the 3GPP LTE system but also to various other systems that need to transmit a downlink control channel to each UE.

What is claimed is:

1. A user equipment (UE) for decoding control information, the UE comprising:
 - a receiver configured to receive control information through a Physical Downlink Control Channel (PDCCH) at a subframe k ;
 - a decoder configured to monitor a set of PDCCH candidates for the received control information, the set of PDCCH candidates being defined in terms of search spaces, wherein:
 - the decoder is configured to monitor a UE-specific search space of the PDCCH, among the search spaces, at multiple levels of control channel elements (CCEs),
 - the CCE is a resource unit including a number of resource elements for transmission of the control information,
 - the UE-specific search space is given based on a variable of Y_k for the subframe k defined by:

$$Y_k = (A * Y_{k-1}) \bmod D,$$
 where A and D are predetermined values, and Y_k in the subframe k is based on an UE identifier.
2. The UE in claim 1, wherein the multiple aggregation levels include aggregation levels of 1, 2, 4, and 8 control channel elements (CCEs).
3. The UE in claim 1, wherein the value of A is 39827 and the value of D is 65537.
4. The UE in claim 1, wherein the UE-specific search space of the PDCCH includes L CCEs are located from a position given by: $L * \{(Y_k) \bmod (\text{floor}(N/L))\} + i$, where N represents a total number of CCEs in the subframe k and $i=0, \dots, L-1$.
5. The UE in claim 1, wherein a location of the UE-specific search space of the PDCCH is based on a UE identifier of the UE.

6. The UE in claim 5, wherein the UE identifier is associated with a Radio Network Temporary Identifier (RNTI) of the UE.
7. The UE in claim 6, wherein the RNTI of the UE is either a Cell-RNTI or a Temporary Cell-RNTI.
8. A method implemented in a user equipment (UE) for decoding control information, the method comprising:

receiving, from a base station, subframes with control regions including a Physical Downlink Control Channel (PDCCH), and

decoding a set of PDCCH candidates within a UE-specific search space of the PDCCH during a subframe k at multiple aggregation levels of control channel elements (CCEs), each CCE being a resource unit including a number of resource elements for transmission of the control information,

wherein the UE-specific search space is given based on a variable of Y_k for the subframe k defined by: $Y_k = (A * Y_{k-1}) \bmod D$, where A and D are predetermined values, and Y_k in the subframe k is based on a UE identifier.
9. The method in claim 8, wherein the multiple aggregation levels include aggregation levels of 1, 2, 4, and 8 control channel elements (CCEs).
10. The method in claim 8, wherein the value of A is 39827 and the value of D is 65537.
11. The method in claim 8, wherein the UE-specific search space of the PDCCH includes L CCEs are located from a position given by: $L * \{(Y_k) \bmod (\text{floor}(N/L))\} + i$, where N represents a total number of CCEs in the subframe k and $i=0, \dots, L-1$.
12. The method in claim 8, wherein a location of the UE-specific search space of the PDCCH is based on a UE identifier of the UE.

13. The method in claim 12, wherein the UE identifier is associated with a Radio Network Temporary Identifier (RNTI) of the UE.
14. The method in claim 13, wherein the RNTI of the UE is either a Cell-RNTI or a Temporary Cell-RNTI.
15. A method for decoding control information by a User Equipment (UE), the method comprising:
 receiving a Physical Downlink Control Channel (PDCCH) at subframe k ; and
 decoding at the subframe k a set of PDCCH candidates including L control channel elements (CCEs),
 wherein:
 the L CCEs are contiguously located from a position given by using a variable of Y_k and a modulo (N/L) operation,
 N represents a total number of CCEs in the subframe k ,
 Y_k is defined by $Y_k = (A * Y_{k-1}) \bmod D$,
 A and D are predetermined constant values, and
 when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits.
16. The method of claim 15, wherein A and D are 39827 and 65537, respectively.
17. The method of claim 15, wherein L is one of 1, 2, 4, and 8.
18. The method of claim 15, wherein the L CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at the subframe k are contiguously located from a position given by: $L * \{(Y_k) \bmod (\text{floor}(N/L))\}$.
19. The method of claim 15, wherein the L CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at the subframe k are located at positions given by: $L * \{(Y_k) \bmod (\text{floor}(N/L))\} + i$, where N represents a total number of

CCEs in the subframe k , $\text{floor}(N/L)$ represents a function to quantize N/L to a largest integer that is equal to or less than N/L , and $i=0, \dots, L-1$.

20. The method of claim 15, wherein the UE identifier is associated with a Radio Network Temporary Identifier (RNTI) of the UE.

21. The UE in claim 20, wherein the RNTI of the UE is either a Cell-RNTI or a Temporary Cell-RNTI.

22. A User Equipment (UE) for decoding control information, comprising:
a receiver configured to receive a Physical Downlink Control Channel (PDCCH) at subframe k ;

and

a decoder configured to decode at the subframe k a set of PDCCH candidates including L control channel elements (CCEs),

wherein:

the L CCEs are contiguously located from a position given by using a variable of Y_k and a modulo (N/L) operation,

N represents a total number of CCEs in the subframe k ,

Y_k is defined by $Y_k = (A * Y_{k-1}) \text{ mod } D$,

A and D are predetermined constant values, and

when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits.

23. The UE in claim 22, wherein A and D are 39827 and 65537, respectively.

24. The UE in claim 22, wherein L is one of 1, 2, 4, and 8.

25. The UE in claim 22, wherein the L CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at the subframe k are contiguously located from a position given by: $L * \{(Y_k) \text{ mod } (\text{floor}(N/L))\}$.

26. The UE in claim 22, wherein the L CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at the subframe k are located at positions given by: $L * \{(Y_k) \bmod (\text{floor}(N/L))\} + i$, where N represents a total number of CCEs in the subframe k, $\text{floor}(N/L)$ represents a function to quantize N/L to a largest integer that is equal to or less than N/L, and $i=0, \dots, L-1$.

27. The UE in claim 22, wherein the UE identifier is associated with a Radio Network Temporary Identifier (RNTI) of the UE.

28. The UE in claim 27, wherein the RNTI of the UE is either a Cell-RNTI or a Temporary Cell-RNTI.

29. A method for decoding control information by a User Equipment (UE), the method comprising:

monitoring a set of Physical Downlink Control Channel (PDCCH) candidates for control information received from a base station at subframe k, wherein the set of PDCCH candidates to monitor are defined in terms of search spaces, wherein the UE monitors a UE-specific search space, among the search spaces, at each of aggregation levels (L) of 1, 2, 4 and 8 control channel elements (CCEs), wherein the CCE is a resource unit comprising a specific number of resource elements and used for transmission of the control information, wherein the UE-specific search space is given based on a modulus operation using a variable of Y_k for the subframe k and a variable C for the subframe k, wherein Y_k is defined by:

$$Y_k = (A * Y_{k-1} + B) \bmod D,$$

wherein the variable C is determined based on the number of CCEs (N_{CCE}) divided by the aggregation level (L), wherein A, B, and D are predetermined constant values predetermined regardless of the aggregation levels (L), and wherein, when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits; and decoding the control information of the PDCCH.

30. The method of claim 29, wherein the UE identifier comprises a Radio Network Temporary Identifier (RNTI) of the UE.

31. The method of claim 29, wherein A, B, and D are predetermined as 39827, 0, and 65537, respectively.

32. A user equipment (UE) for decoding control information, the UE comprising:
 a receiver configured to receive control information through a Physical Downlink Control Channel (PDCCH) from a base station at subframe k;
 a decoder configured to monitor a set of PDCCH candidates for the control information received from the base station, wherein the set of PDCCH candidates to monitor are defined in terms of search spaces, wherein the decoder monitors a UE-specific search space, among the search spaces, at each of aggregation levels (L) of 1, 2, 4 and 8 control channel elements (CCEs), wherein the CCE is a resource unit comprising a specific number of resource elements and used for transmission of the control information, wherein the UE-specific search space is given based on a modulus operation using a variable of Y_k for the subframe k and a variable C for the subframe k, wherein Y_k is defined by:

$$Y_k = (A * Y_{k-1} + B) \text{ mod } D,$$

wherein the variable C is determined based on the number of CCEs (N_{CCE}) divided by the aggregation level (L), wherein A, B, and D are predetermined constant values predetermined regardless of the aggregation levels (L), and wherein, when k=0, Y_{-1} is determined based on a UE identifier having 16-bits.

33. The UE of claim 32, wherein the UE identifier comprises a Radio Network Temporary Identifier (RNTI) of the UE.

34. The UE of claim 32, wherein A, B, and D are predetermined as 39827, 0, and 65537, respectively.

35. A method for decoding control information by a User Equipment (UE), the method comprising:

monitoring a set of Physical Downlink Control Channel (PDCCH) candidates for control information received from a base station at subframe k ,

wherein the set of PDCCH candidates to monitor are defined in terms of search spaces,

wherein the UE monitors a UE-specific search space, among the search spaces, at each of aggregation levels (L) of 1, 2, 4 and 8 control channel elements (CCEs),

wherein the CCE is a resource unit comprising a specific number of resource elements and used for transmission of the control information,

wherein the ' L ' CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at a subframe k are located at positions given by:

$$L * \{(Y_k) \bmod (\text{floor}(C))\} + i, \text{ wherein } i=0, \dots, L-1,$$

wherein Y_k is defined by:

$$Y_k = (A * Y_{k-1} + B) \bmod D,$$

wherein the variable C is determined based on the number of CCEs (NCCE) divided by the aggregation level (L),

wherein A , B , and D are predetermined constant values predetermined regardless of the aggregation levels (L); and

decoding the control information of the PDCCH.

36. The method of claim 35, wherein, when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits.

37. The method of claim 35, wherein the UE identifier comprises a Radio Network Temporary Identifier (RNTI) of the UE.

38. The method of claim 35, wherein A , B , and D are predetermined as 39827, 0, and 65537, respectively.

39. A user equipment (UE) for decoding control information, the UE comprising:

a receiver configured to receive control information through a Physical Downlink Control Channel (PDCCH) from a base station at subframe k ;

a decoder configured to monitor a set of PDCCH candidates for the control information received from the base station,

wherein the set of PDCCH candidates to monitor are defined in terms of search spaces,

wherein the decoder monitors a UE-specific search space, among the search spaces, at each of aggregation levels (L) of 1, 2, 4 and 8 control channel elements (CCEs),

wherein the CCE is a resource unit comprising a specific number of resource elements and used for transmission of the control information,

wherein the ' L ' CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at a subframe k are located at positions given by:

$$L * \{(Y_k) \bmod (\text{floor}(C))\} + i, \text{ wherein } i=0, \dots, L-1,$$

wherein Y_k is defined by:

$$Y_k = (A * Y_{k-1} + B) \bmod D,$$

wherein the variable C is determined based on the number of CCEs (NCCE) divided by the aggregation level (L),

wherein A , B , and D are predetermined constant values predetermined regardless of the aggregation levels (L).

40. The UE of claim 39, wherein, when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits.

41. The UE of claim 39, wherein the UE identifier comprises a Radio Network Temporary Identifier (RNTI) of the UE.

42. The UE of claim 39, wherein A , B , and D are predetermined as 39827, 0, and 65537, respectively.

43. A non-transitory, computer-readable medium storing instructions which, when executed by one or more processors, cause performance of operations for decoding control information by a User Equipment (UE), the operations comprising:

monitoring a set of Physical Downlink Control Channel (PDCCH) candidates for control information received from a base station at subframe k ,

wherein the set of PDCCH candidates to monitor are defined in terms of search spaces, wherein the UE monitors a UE-specific search space, among the search spaces, at each of aggregation levels (L) of 1, 2, 4 and 8 control channel elements (CCEs),

wherein the CCE is a resource unit comprising a specific number of resource elements and used for transmission of the control information,

wherein the ' L ' CCEs corresponding to a first PDCCH candidate among the set of PDCCH candidates of the search space at a subframe k are located at positions given by:

$$L * \{(Y_k) \bmod (\text{floor}(C))\} + i, \text{ wherein } i=0, \dots, L-1,$$

wherein Y_k is defined by:

$$Y_k = (A * Y_{k-1} + B) \bmod D,$$

wherein the variable C is determined based on the number of CCEs (NCCE) divided by the aggregation level (L),

wherein A , B , and D are predetermined constant values predetermined regardless of the aggregation levels (L); and

decoding the control information of the PDCCH.

44. The computer-readable medium of claim 43, wherein, when $k=0$, Y_{-1} is determined based on a UE identifier having 16-bits.

45. The computer-readable medium of claim 43, wherein the UE identifier comprises a Radio Network Temporary Identifier (RNTI) of the UE.

46. The computer-readable medium of claim 43, wherein A , B , and D are predetermined as 39827, 0, and 65537, respectively.

FIG. 1

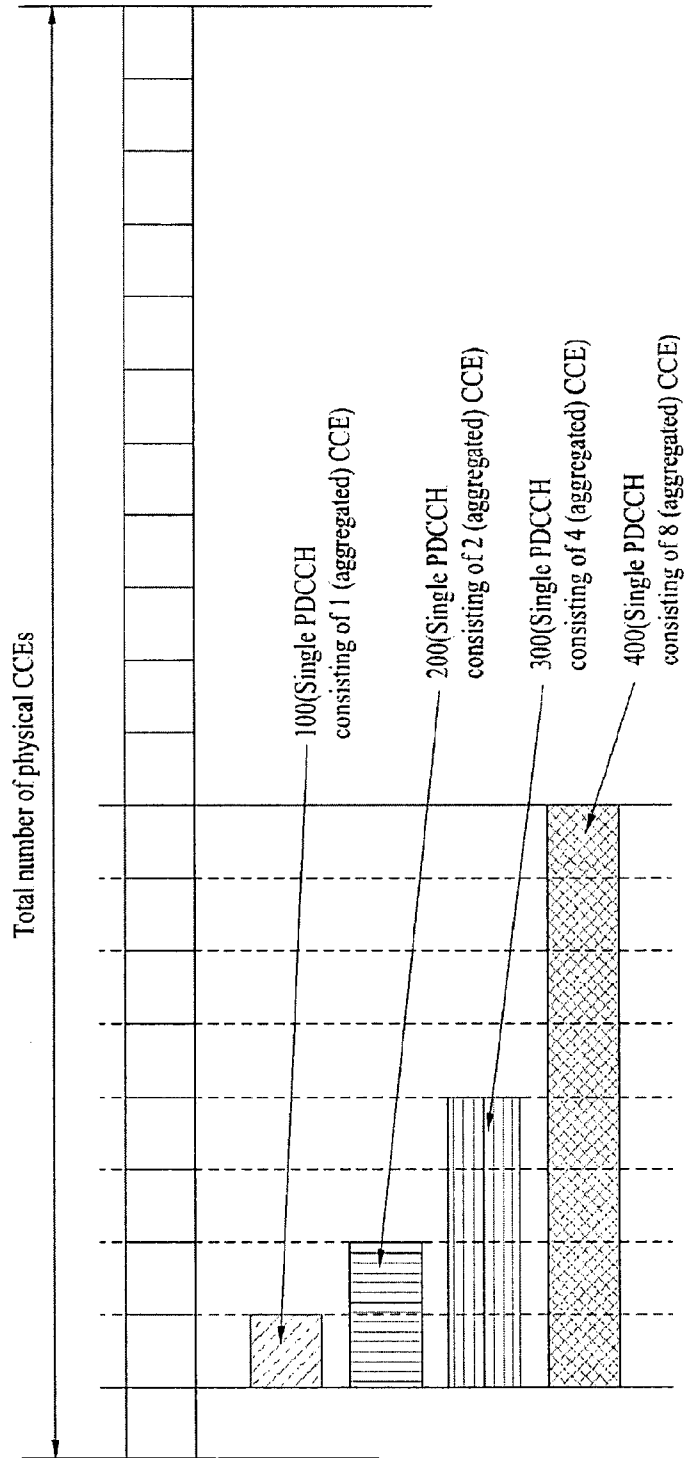


FIG. 2

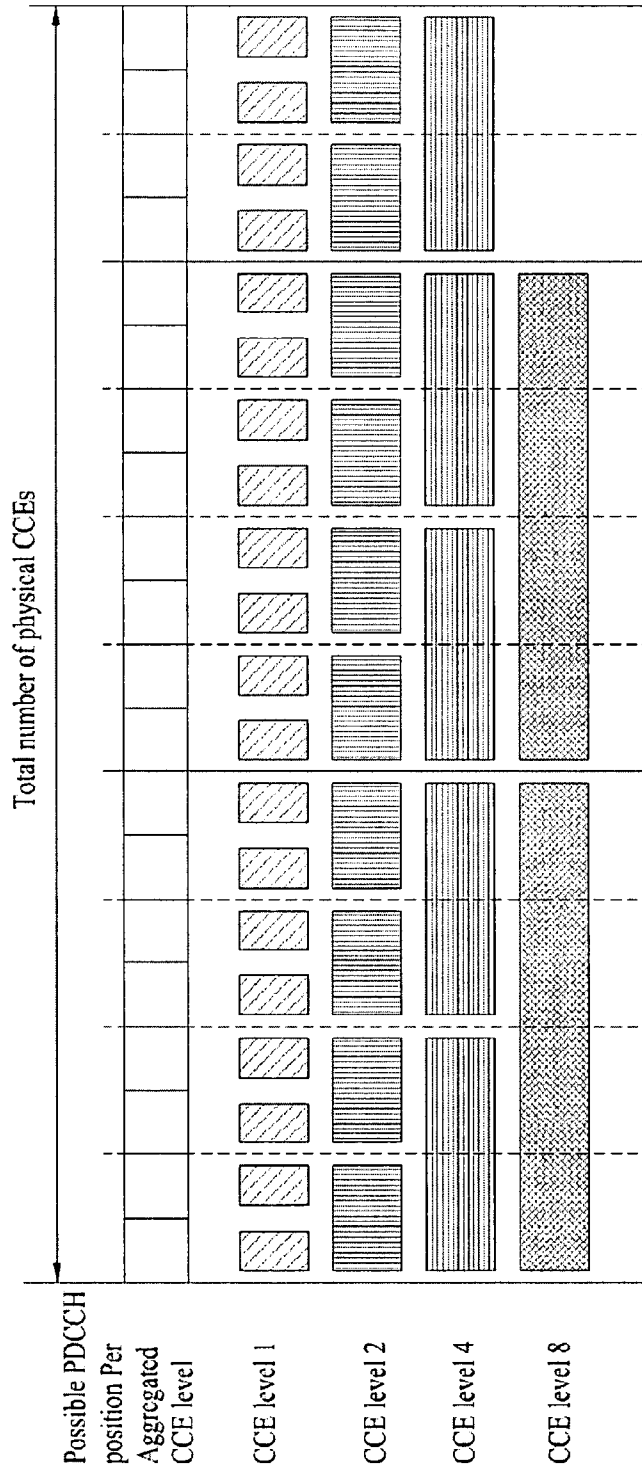


FIG. 3

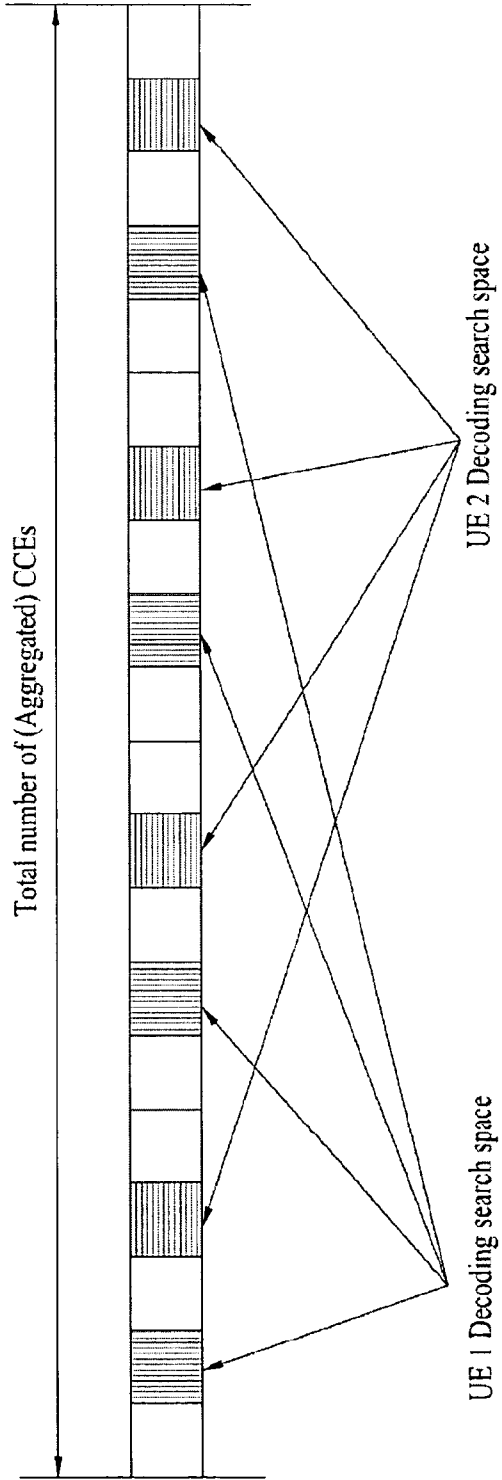


FIG. 4

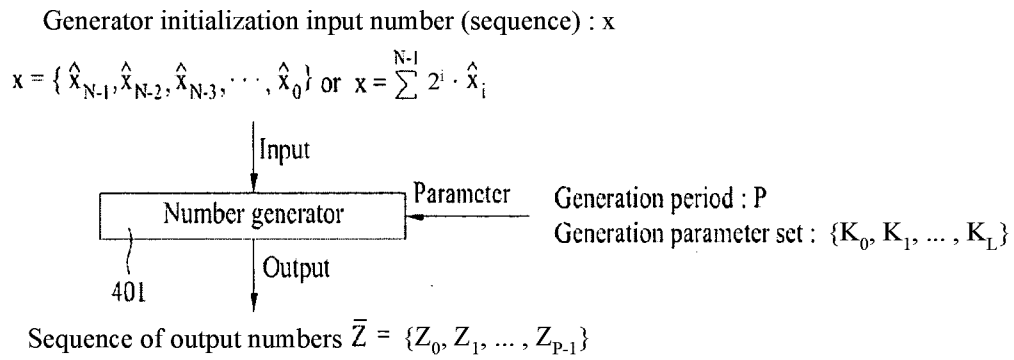


FIG. 5

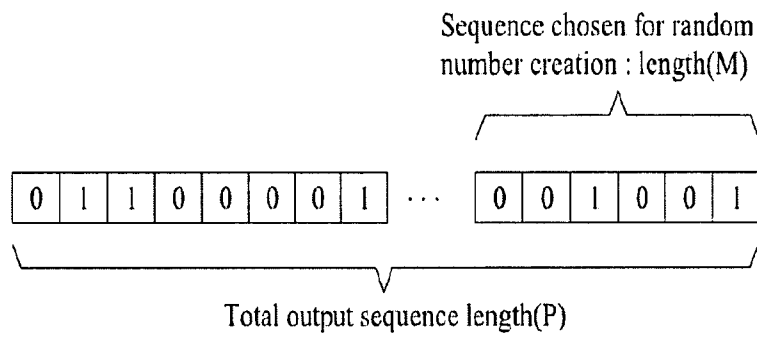


FIG. 6

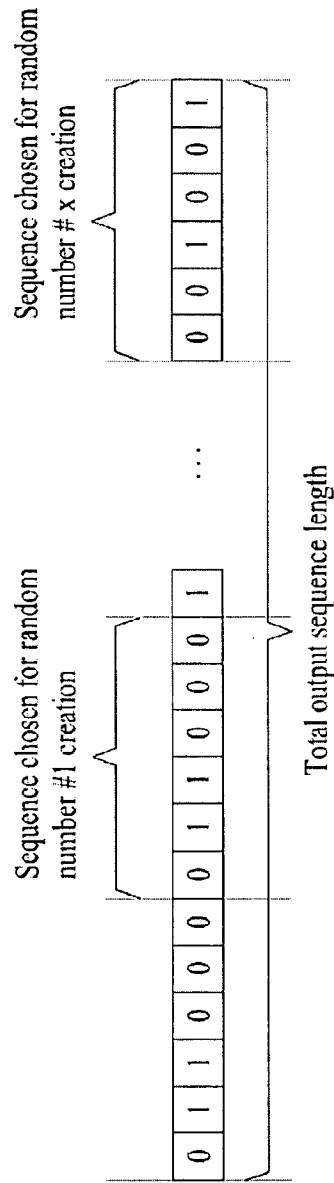


FIG. 7

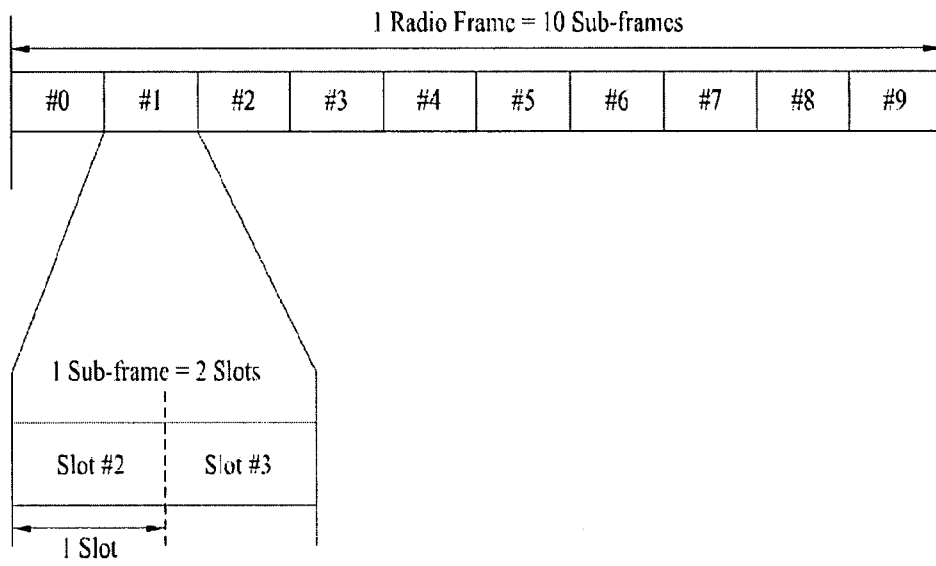


FIG. 8

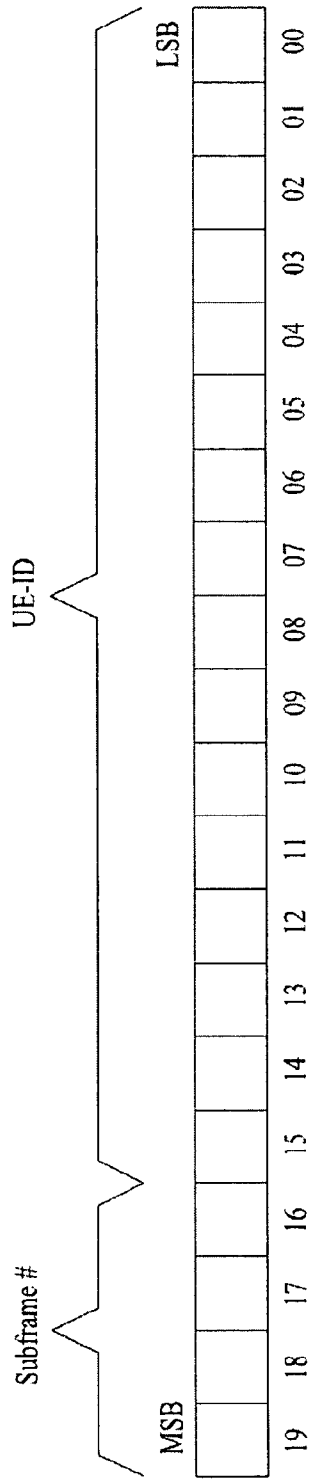


FIG. 9

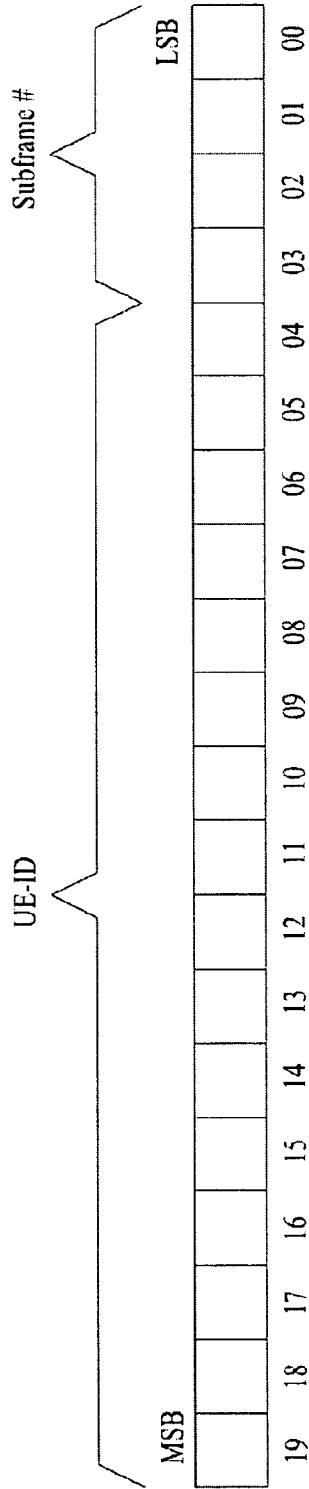


FIG. 10

Possible PDCCH transmission CCEs for UE #2
BUT blocked by PDCCH for UE #1

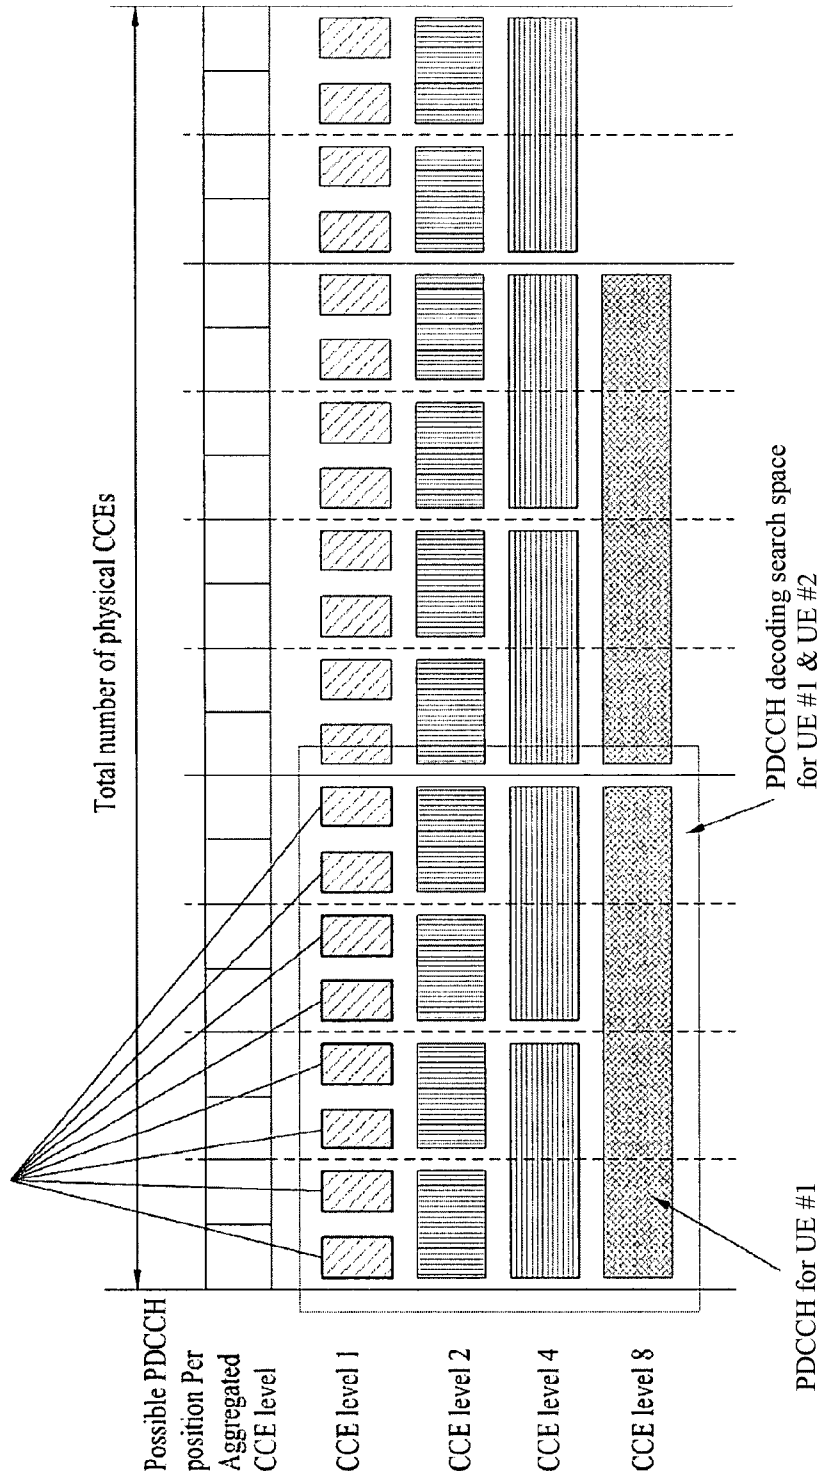


FIG. 11

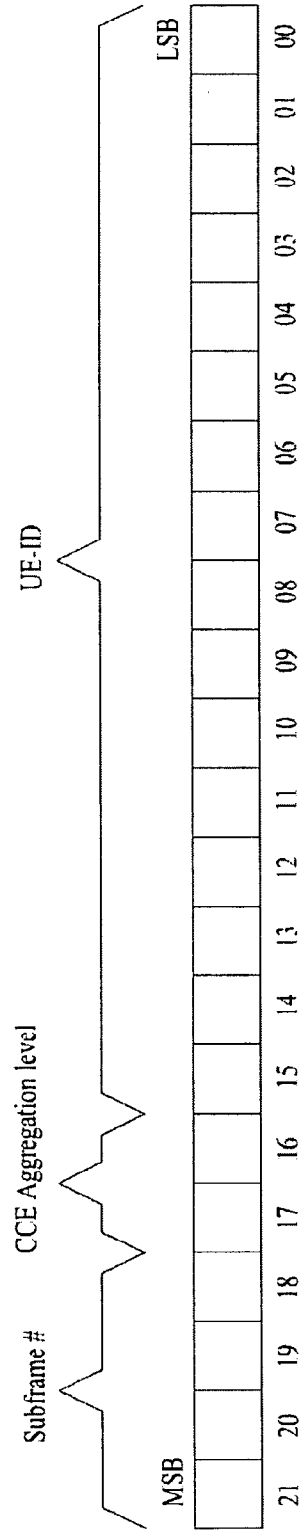


FIG. 12

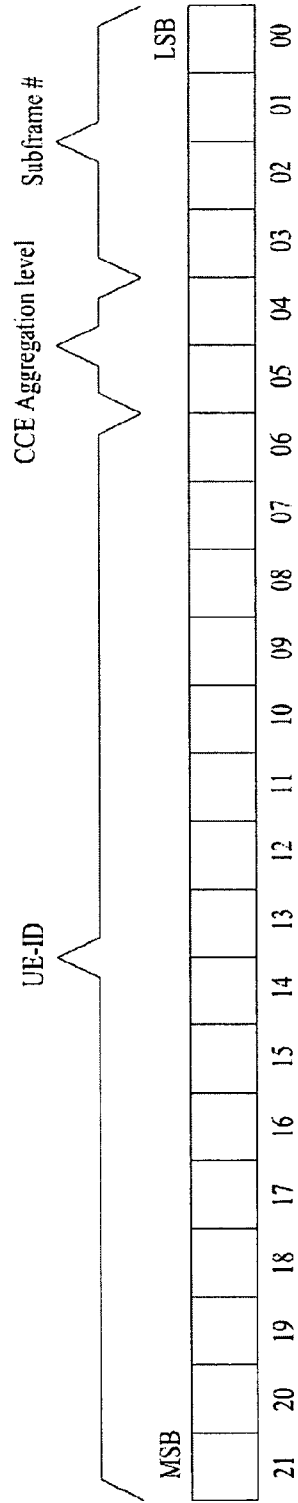


FIG. 13

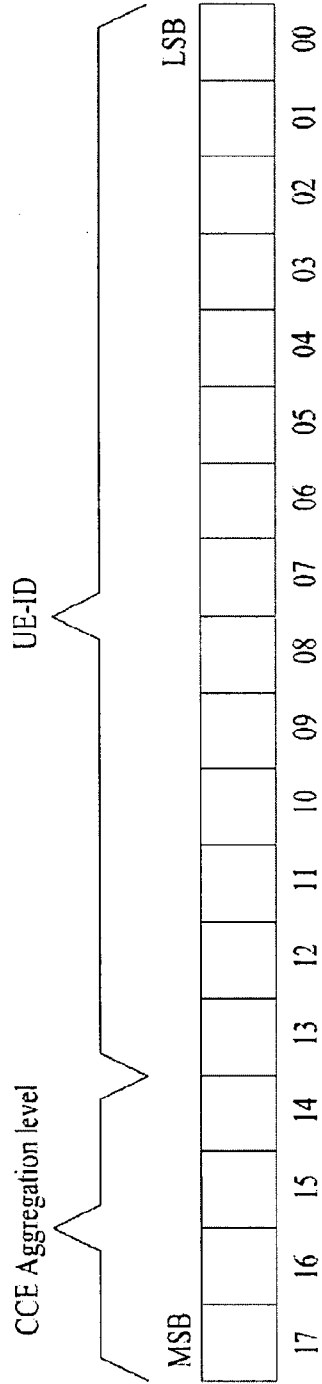


FIG. 14



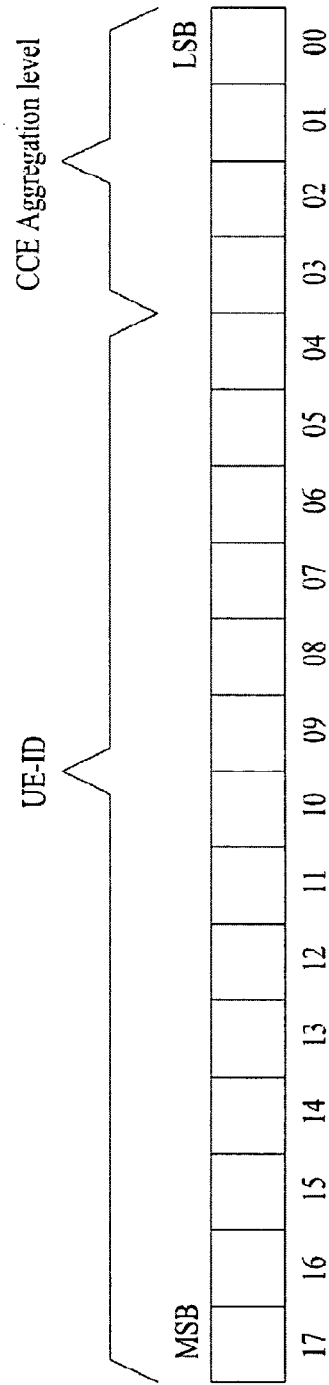


FIG. 15

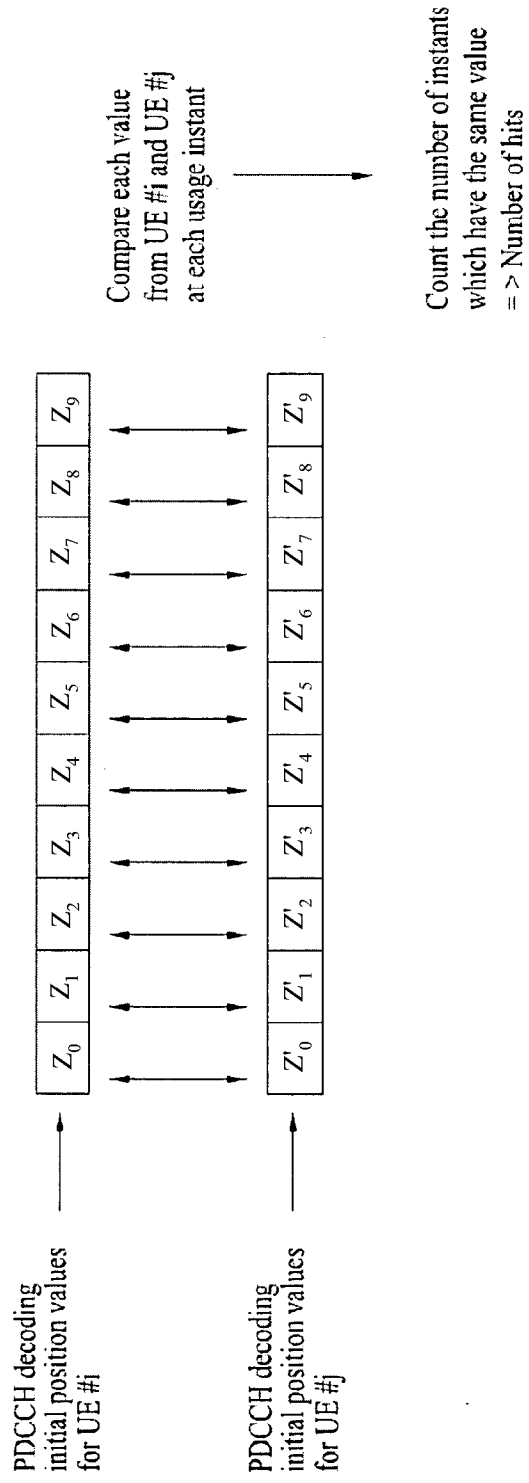

Generator initialization input number (sequence) : x

$$x = \{ \hat{x}_{N-1}, \hat{x}_{N-2}, \hat{x}_{N-3}, \dots, \hat{x}_0 \} \text{ or } x = \sum_{i=0}^{N-1} 2^i \cdot \hat{x}_i$$

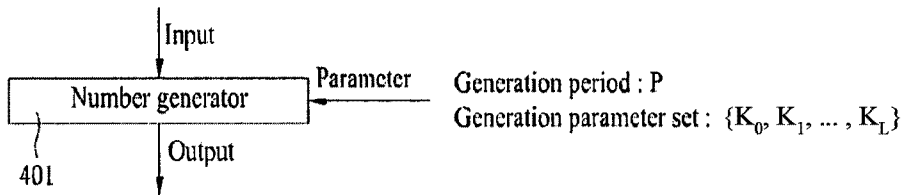

Sequence of output numbers $\bar{Z} = \{Z_0, Z_1, \dots, Z_{P-1}\}$