




(86) Date de dépôt PCT/PCT Filing Date: 2002/12/20
(87) Date publication PCT/PCT Publication Date: 2003/07/03
(45) Date de délivrance/Issue Date: 2008/02/19
(85) Entrée phase nationale/National Entry: 2004/06/18
(86) N° demande PCT/PCT Application No.: US 2002/040866
(87) N° publication PCT/PCT Publication No.: 2003/053527
(30) Priorité/Priority: 2001/12/20 (US10/028,497)

(51) Cl.Int./Int.Cl. *A63B 21/16* (2006.01),
A63B 21/055 (2006.01), *A63B 23/04* (2006.01)
(72) Inventeur/Inventor:
ENDELMAN, KEN, US
(73) Propriétaire/Owner:
BALANCED BODY, INC., US
(74) Agent: ROBIC

(54) Titre : APPAREIL D'EXERCICES DE REMISE EN FORME COMPRENANT UNE BARRE D'ANCRAGE A
RESSORTS NON PIVOTANTE

(54) Title: REFORMER EXERCISE APPARATUS HAVING A NON-ROTATING SPRING ANCHOR BAR

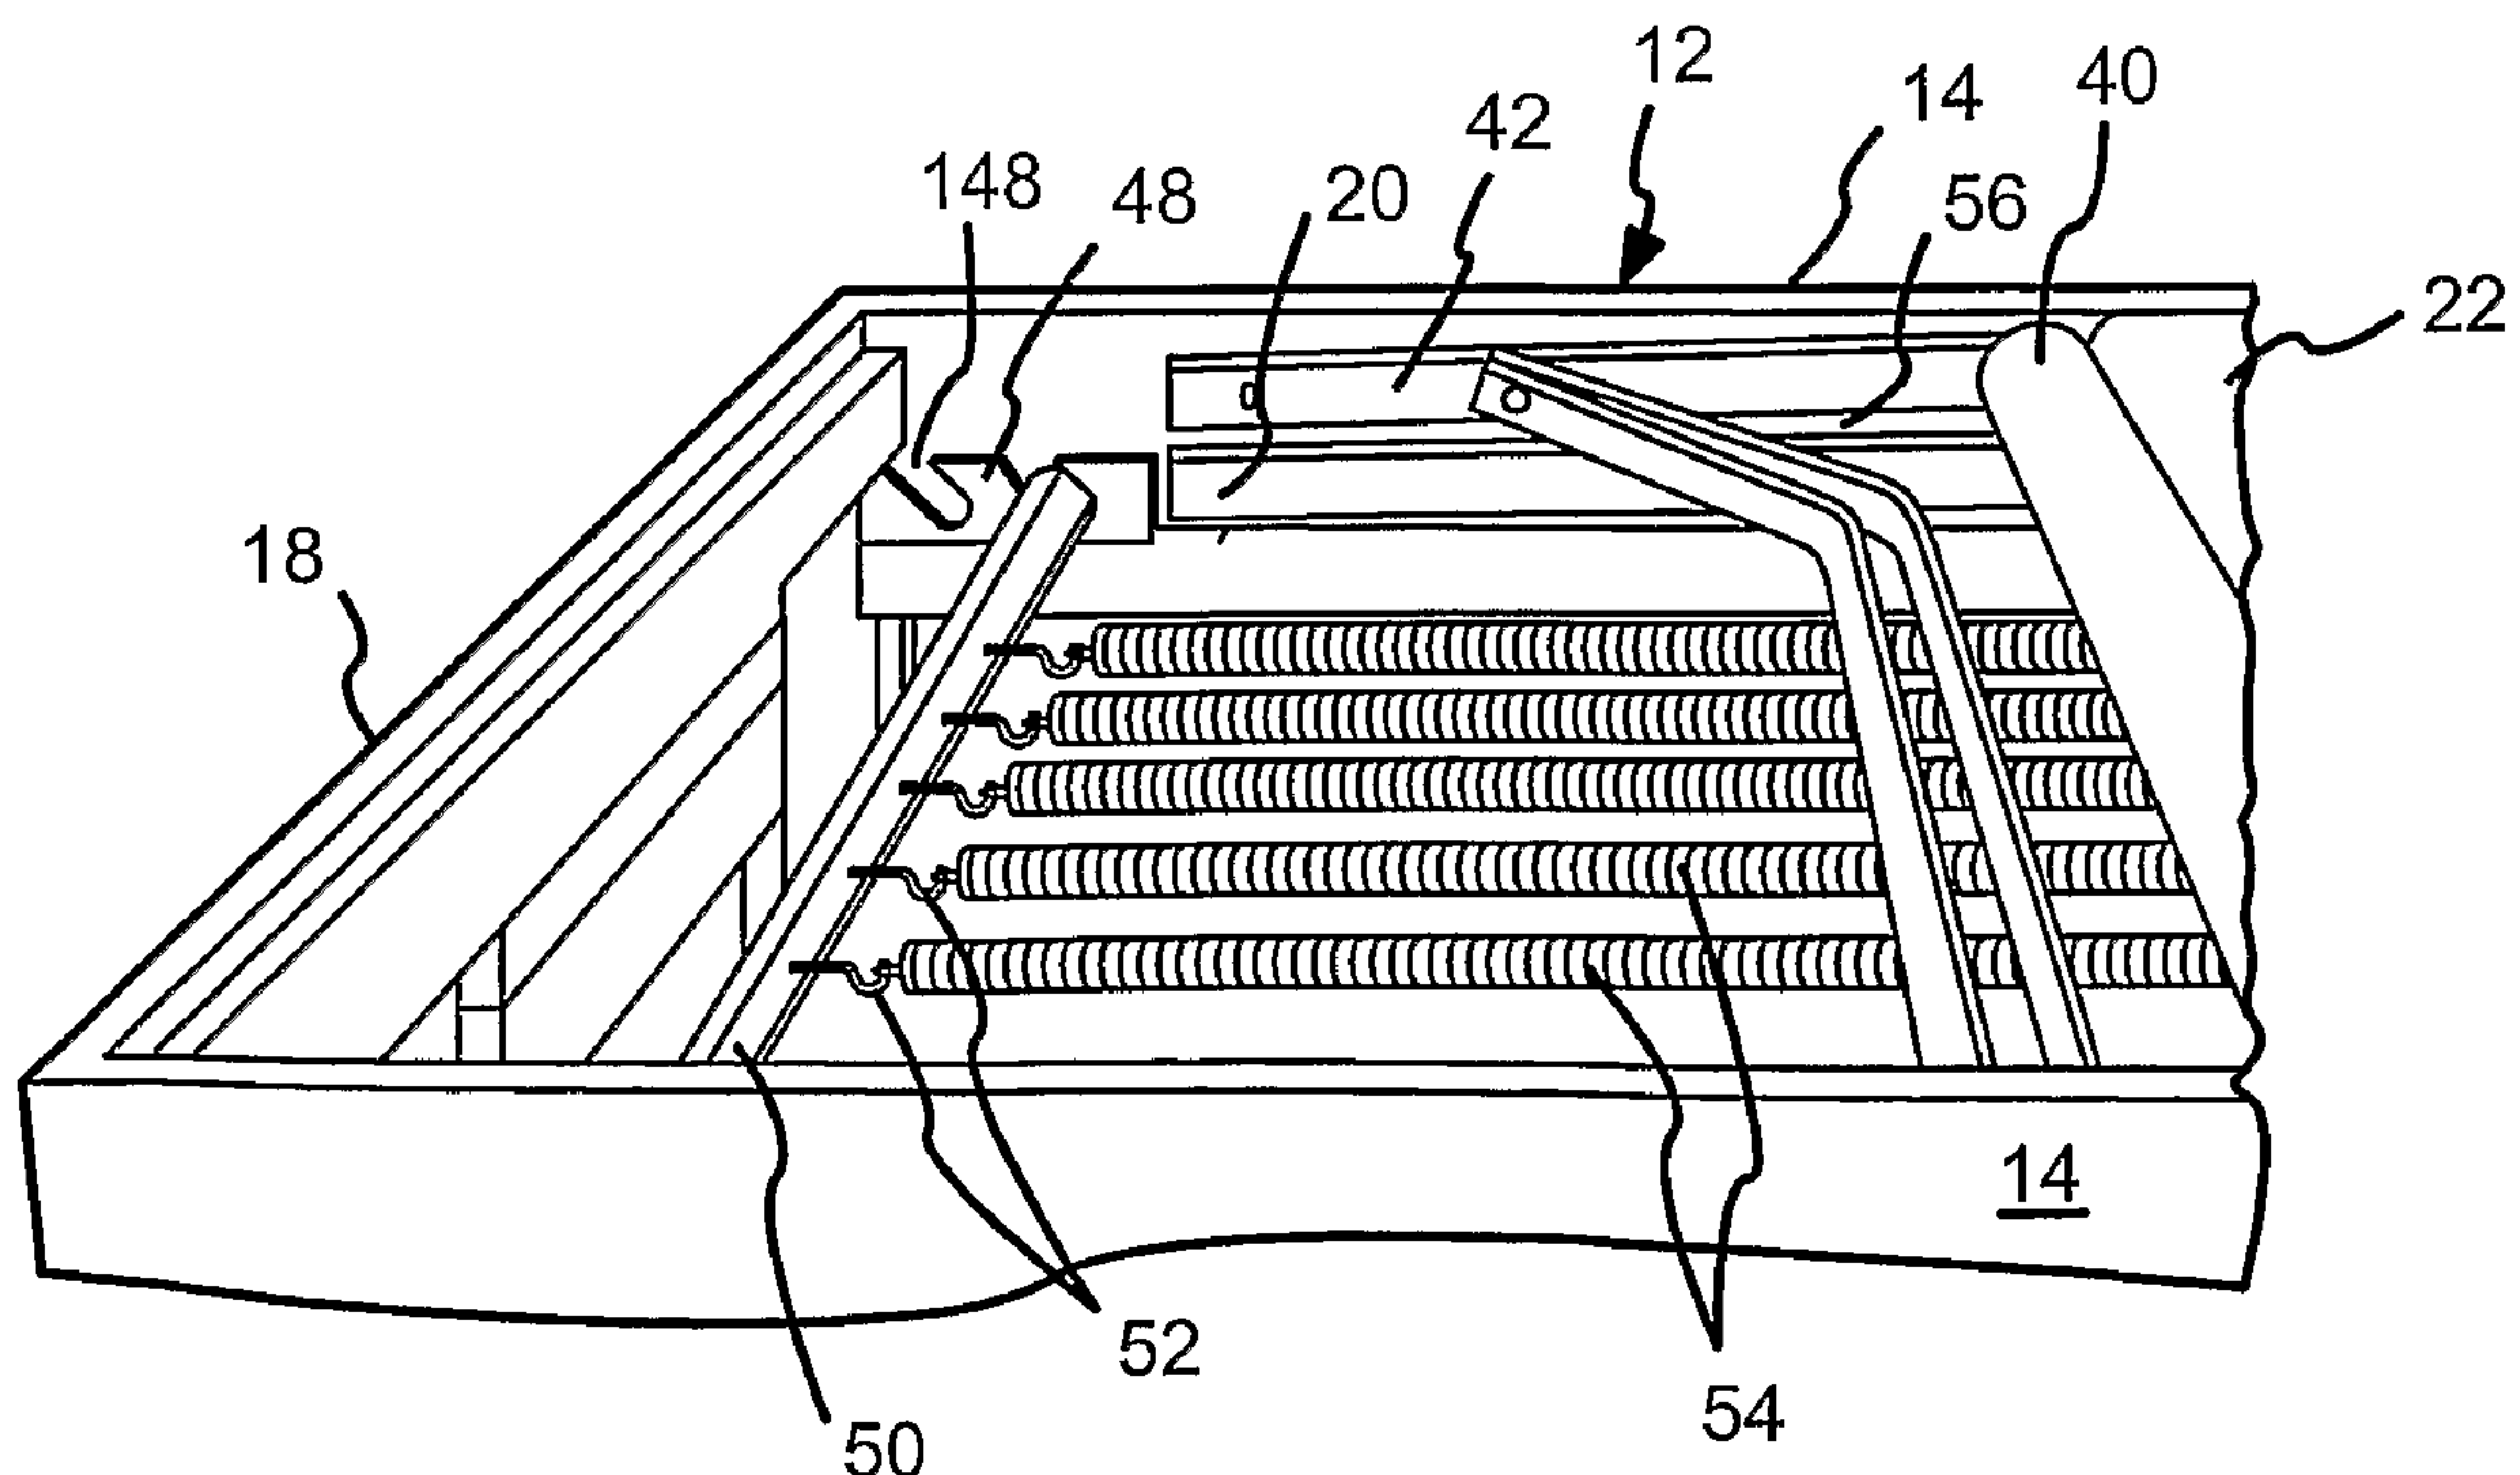

(57) Abrégé/Abstract:

A reformer exercise apparatus has a generally rectangular frame and a pair of spaced-apart parallel rails joining a head end and a foot end. A movable carriage is mounted on the frame for movement of the carriage along the rails. A pair of spaced-apart anchor bar support brackets is fastened near the foot end of the frame and each supports an end of spring anchor bar. Each bracket has a series of upwardly open slanted slots, and the anchor bar is received in a selected pair of the slots. The cross section of each anchor bar end is shaped to engage the slot walls to prevent rotation of the anchor bar.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 July 2003 (03.07.2003)

PCT

(10) International Publication Number
WO 03/053527 A1

(51) International Patent Classification⁷: **A63B 21/16**,
21/055, 23/04

(21) International Application Number: PCT/US02/40866

(22) International Filing Date:
20 December 2002 (20.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/028,497 20 December 2001 (20.12.2001) US

(71) Applicant: **BALANCED BODY, INC.** [US/US]; Suite
23, 7500 - 14th Street, Sacramento, CA 95820-3539 (US).

(72) Inventor: **ENDELMAN, Ken**; Suite 23, 7500 - 14th Av-
enue, Sacramento, CA 95820-3539 (US).

(74) Agent: **BRUESS, Steven, C.**; Merchant & Gould P.C.,
P.O. Box 2903, Minneapolis, MN 55402-0903 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: REFORMER EXERCISE APPARATUS HAVING A NON-ROTATING SPRING ANCHOR BAR

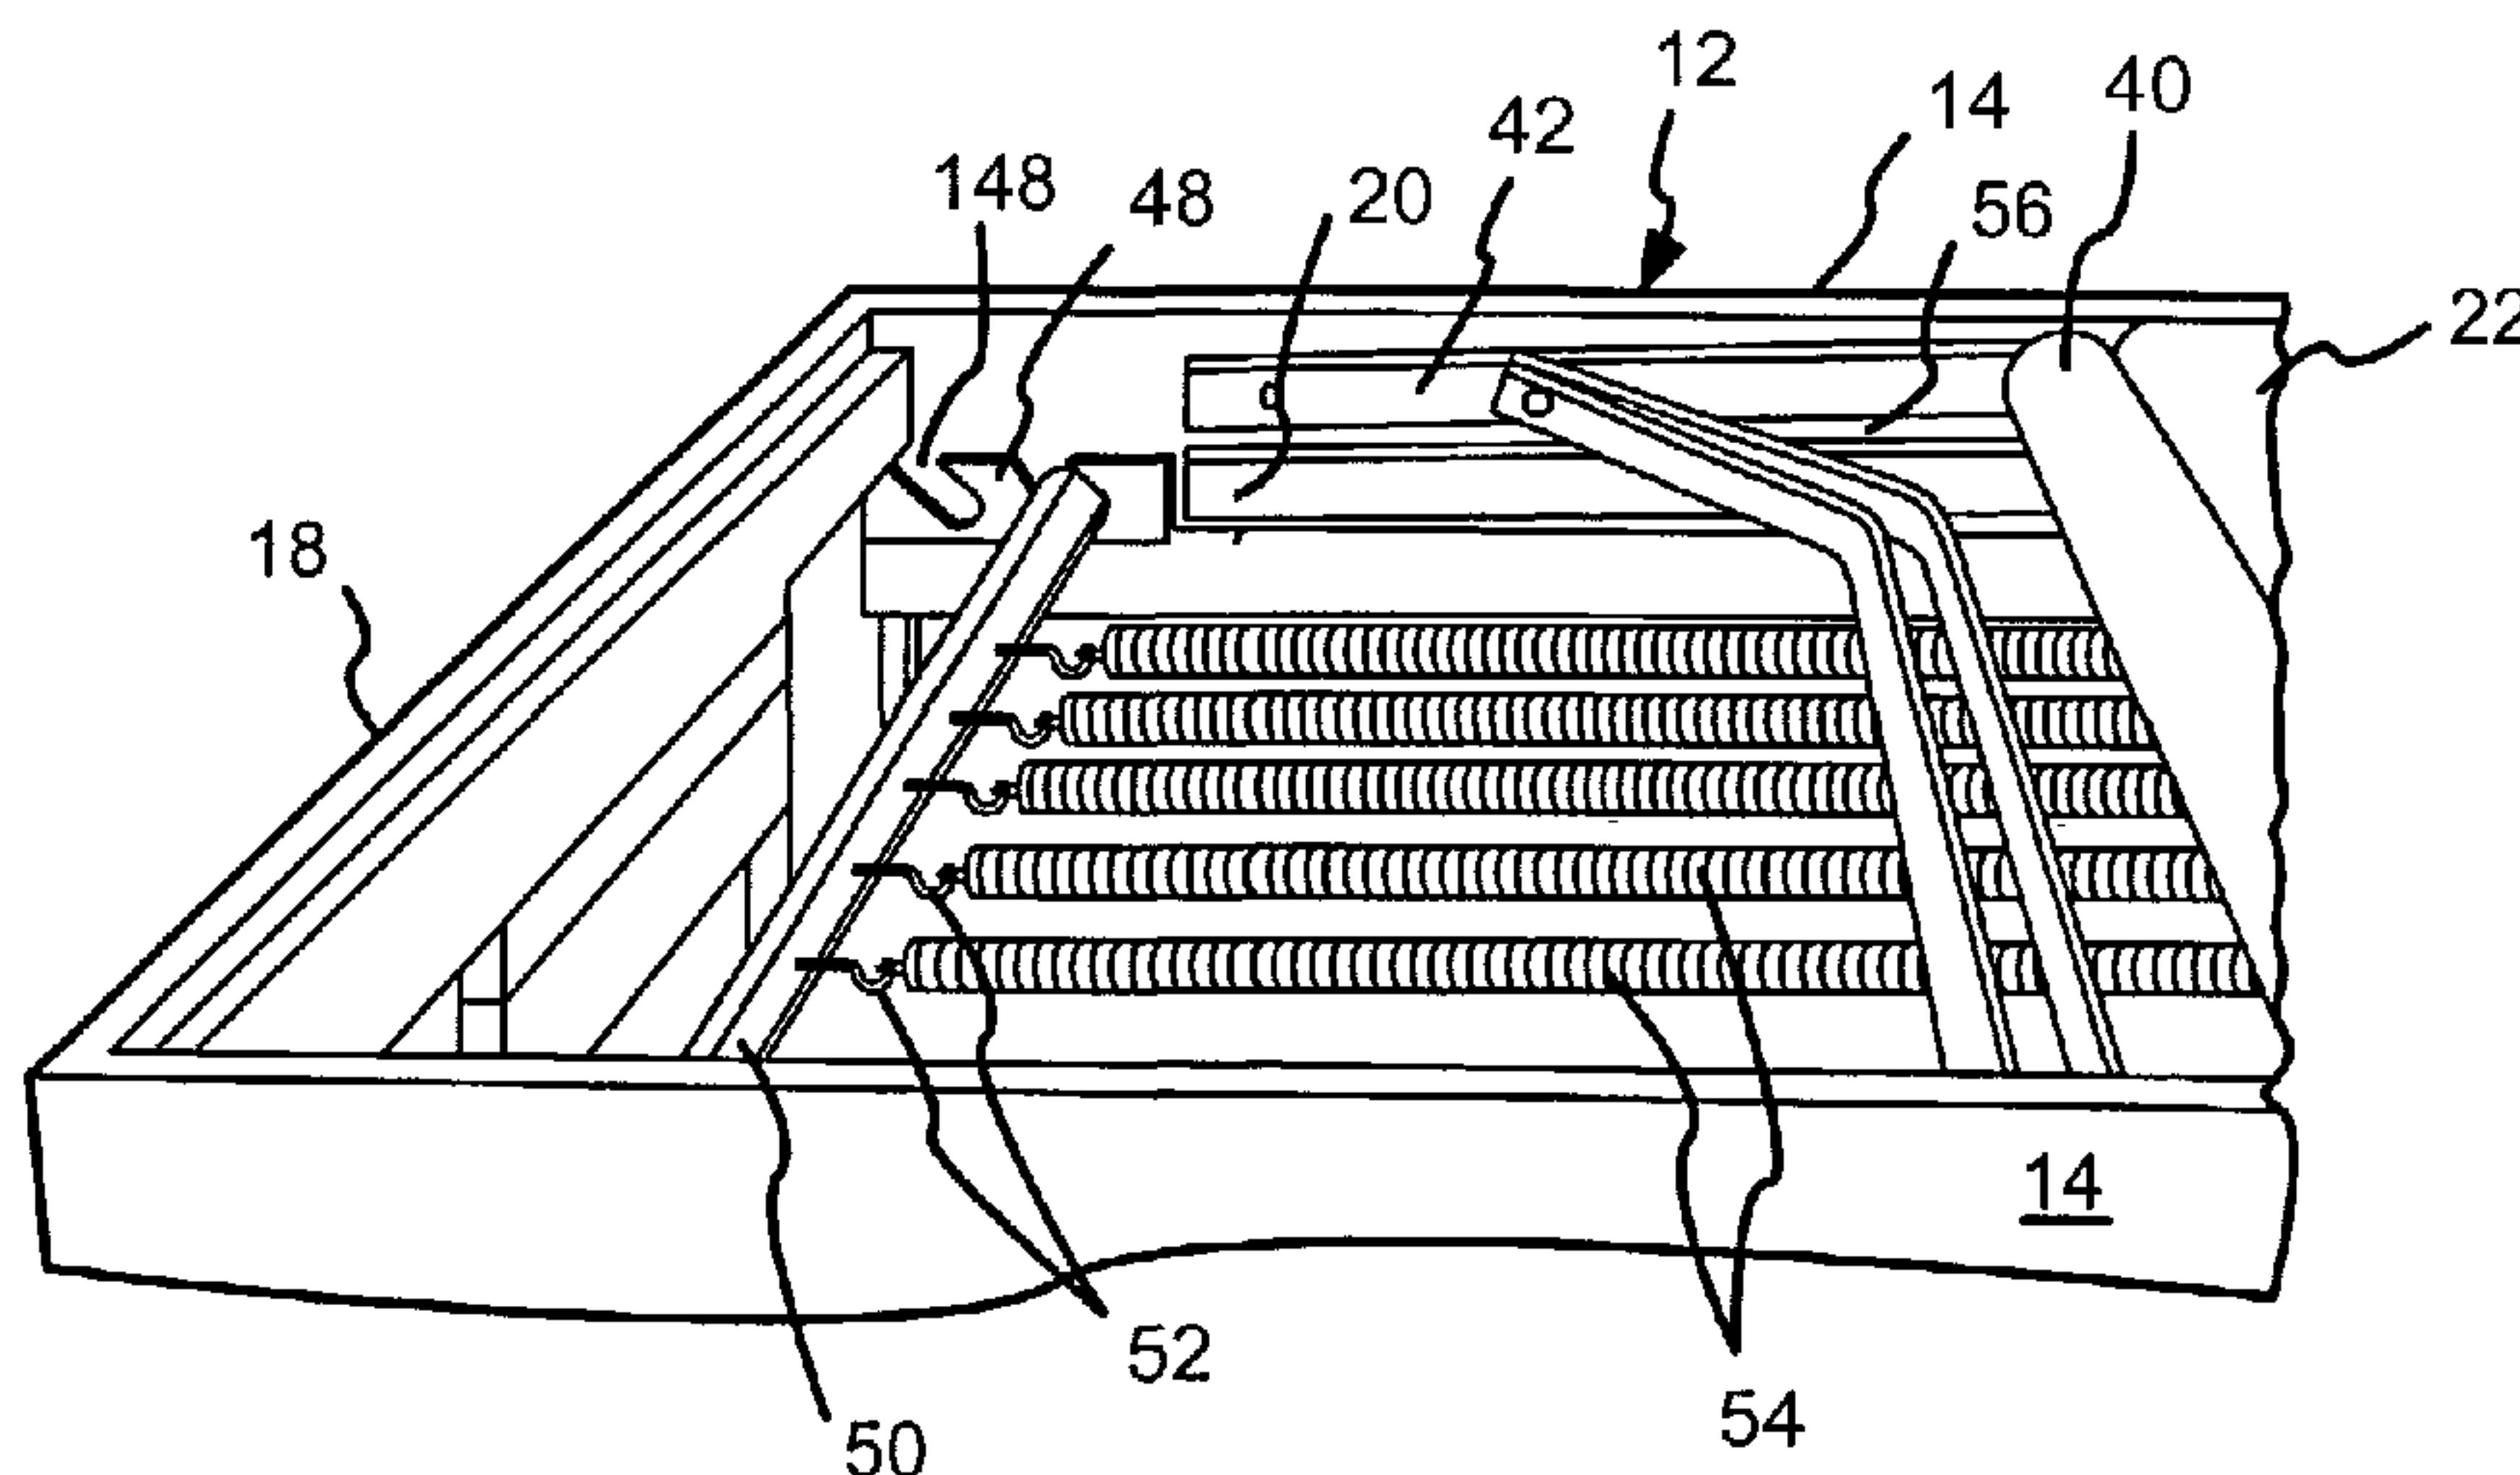

(57) Abstract: A reformer exercise apparatus has a generally rectangular frame and a pair of spaced-apart parallel rails joining a head end and a foot end. A movable carriage is mounted on the frame for movement of the carriage along the rails. A pair of spaced-apart anchor bar support brackets is fastened near the foot end of the frame and each supports an end of spring anchor bar. Each bracket has a series of upwardly open slanted slots, and the anchor bar is received in a selected pair of the slots. The cross section of each anchor bar end is shaped to engage the slot walls to prevent rotation of the anchor bar.



WO 03/053527 A1

WO 03/053527 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

REFORMER EXERCISE APPARATUS HAVING A NON-ROTATING SPRING ANCHOR BAR

Field of the Invention

This invention relates generally to the field of exercise equipment and more particularly to a reformer type exercise apparatus in which a movable carriage for supporting portions of a user's body is connected to one end of a rectangular frame via elastic members.

Background of the Invention

A conventional reformer exercise apparatus includes a wheeled platform carriage, which rides on a rectangular wooden or metal frame. The carriage is connected to a series of parallel elastic members, e.g. springs, which are in turn connected to a foot end of the rectangular frame. The carriage typically rides on parallel rails or tracks mounted to the longer side of the rectangular frame. This carriage has a flat, padded upper surface and typically includes a pair of spaced, padded, upright shoulder stops and a headrest at one end to support the shoulders and head of the user when the user is reclined on the carriage.

An adjustable foot bar, foot support, or foot rest against which the user places his/her feet is mounted at the foot end of the rectangular frame. A spring support rod is positioned across the foot end of the rectangular frame between the tracks and is held in place by a spring support bracket fastened to the frame. The rod typically fits in one of three or four pairs of upwardly open, slanted recesses or slots in the support bracket. Alternatively, the spring support rod may be permanently fastened to the foot end of the frame. The user can typically push against the foot rest to move the carriage along the track away from the foot rest against spring tension to exercise the leg and foot muscle groups of the user's body in accordance with prescribed movement routines.

The spring support rod is typically a cylindrical rod or tube with a circular cross-section. A series of hooks for securing ends of the elastic members or springs

are attached in a line along the cylindrical spring support rod. The other ends of the springs are connected to the carriage.

The springs provide resistance for biasing the carriage toward the foot end of the frame. A user can vary the resistance provided by the springs in order, for example, to change the intensity level of the exercise by selecting different combinations of springs. The hooks on the spring support rod allows a user to easily vary the number of springs by providing an easy way to disconnect the springs from the rod and reconnect the springs to the rod received in the slots. The user may also vary the relaxed spring tension on the carriage by changing the pair of slots into which the spring support rod is mounted. The spring support rod, when mounted in the slots nearest the foot end of the frame, for example, provides the maximum relaxed spring resistance.

The circular cross-sectional profile of the spring support rod allows rotational movement of the rod in the slots when the springs are loosely or are not connected to the rod at all. The spring support rod resting in the slots typically rotates (due to gravity) to a position where the hooks are pointed downward when no tension is applied by the springs. This is inconvenient for the user, requiring the use of one of the user's hands to rotate the bar to align the hooks horizontally while the user places the end of the spring on the hook with the other hand.

Summary of the Invention

A reformer exercise apparatus of the present invention has a generally rectangular frame formed by a foot end and a head end connected to two spaced-apart parallel side frame members. A movable carriage is mounted on the frame for supporting a user and for movement along the side frame members against spring tension from one or more elastic members, such as springs, are fastened between the foot end and the carriage. A pair of spaced-apart elastic member anchor bar support brackets are fastened to the frame near the foot end, and each supports one end of an elongated elastic member anchor bar. One or more of the elastic members are fastened between the carriage and the anchor bar to elastically bias the carriage toward the foot end of the frame.

Each bracket has a series of upwardly open slanted slots. Each slot is generally U-shaped and has a semicircular concave bottom wall portion extended by a pair of spaced parallel sidewall portions. The two bar ends of the elongated anchor bar are configured to prevent rotation of the anchor bar mounted in the slots about its longitudinal axis.

Thus, when all the springs are removed from the hooks, the hooks remain in a horizontal line parallel to the side frame members since the spring anchor bar cannot rotate about its longitudinal axis. This makes it easy for a user to attach various combinations of springs on the hooks of the spring anchor bar using only one hand.

Brief Description of the Drawings

FIG. 1 is a side view of an exercise apparatus incorporating the present invention.

FIG. 2 is a perspective view of the foot end of the apparatus shown in **FIG. 1** with the foot rest folded down into the frame and the non-rotating spring anchor bar received in the pair of slots of the spring support bracket.

FIG. 3 is a perspective view of the non-rotating spring anchor bar in accordance with a preferred embodiment of the present invention.

FIG. 4 is an end view of the non-rotating spring anchor bar shown in **FIG. 3** received in a pair of slots of the spring support bracket in accordance with a preferred embodiment of the present invention.

FIG. 5 is perspective view of a non-rotating spring anchor bar in accordance with another embodiment of the present invention.

FIG. 6 is an end view of the non-rotating spring anchor bar shown in **FIG. 5** received in one of the pair of slots of the spring support bracket.

Detailed Description

An exercise apparatus **10** incorporating a preferred embodiment of the present invention is shown with respect to **FIGS. 1-2**. The exercise apparatus **10** has

a generally rectangular frame 12, which has spaced, parallel long sidewalls 14. The head ends of the sidewalls 14 are joined by a head end wall 16, and the foot ends of the sidewalls 14 are joined by a foot end wall 18. Each of the sidewalls 14 carries an inside horizontal rail 20, preferably made of aluminum angle bar stock having an "L" shaped cross section. The rails 20 are bolted or screwed to the inside surfaces of the sidewalls 14 to form a pair of parallel and horizontally spaced tracks upon which a wheeled carriage 22 rides.

The wheeled carriage 22 has a flat rectangular base plate (not shown) and a carriage cushion pad 28, which is fastened on top of the flat rectangular base plate. The carriage cushion pad 28 supports portions of a user's body. The flat rectangular base plate has two pairs of roller wheels (not shown) mounted to its underside at its corners. These roller wheels ride along the rails 20 to constrain movement of the wheeled carriage 22 forward and backward between the head end wall 16 and the foot end wall 18 of the frame 12. A pair of spaced apart shoulder stops 30 and a headrest (not shown) are fastened to the head end of the flat rectangular base plate.

The exercise apparatus 10 includes an adjustable foot bar support assembly 38. The foot bar support assembly 38 preferably has a padded horizontal foot bar 40 that is adjustably positioned above the foot end of the frame 12 via support members 42. Each of the two support members 42 has one end pivotally mounted to the inside of one of the frame sidewalls 14. The support members 42 are positioned at a location spaced from the foot end wall 18 so that the support members 42 and the padded horizontal foot bar 40 may be folded down parallel with the upper edge of the frame 12.

The foot bar support assembly 38 is shown folded toward the foot end of the carriage 22 in FIG. 2 for clarity in description of this invention. The foot bar support assembly 38 further includes a pair of "U" shaped brace members 44, 46. One end of each of the two "U" shaped brace members 44, 46 is pivotally fastened to one of the support members 42 near its midpoint. The other end of each of the two "U" shaped brace members 44, 46 is pivotally fastened to the other support member 42 near its midpoint. These "U" shaped brace members 44, 46 are of different lengths so that they can position the padded horizontal foot bar 40 at different heights above the frame 12 and nest together between the support members

42 and the horizontal foot bar 40 in a folded position as shown in FIG. 2. In this folded position, spring tension can be used to hold the carriage 22 against the horizontal bar 40.

One of a pair of spring anchor bar support brackets 48 and a non-rotating
5 spring anchor bar 50 in accordance with a preferred embodiment of the present invention are shown in FIG. 2. Each spring anchor bar support bracket 48 is mounted at the foot end of each rail 20 and has a series of upwardly open slanted slots 148. One end of the non-rotating spring anchor bar 50 is received inside one of the upwardly open slanted slots 148. The other end of the non-rotating spring
10 anchor bar 50, received in a corresponding slot 148 in the other spring anchor bar support bracket 48, is hidden from view. The upwardly open slanted slots 148 are angled so that the openings of the slanted slots 148 are directed toward the foot end wall 18, that is, away from the ends of the springs 54. In this manner, gravity and the relaxed spring tension securely retains the non-rotating spring anchor bar 50
15 inside the selected pair of the slanted slots 148.

The embodiment of the non-rotating spring anchor bar 50 illustrated carries a plurality of spaced hooks 52 along its longitudinal axis. These hooks 52 are designed to receive one end of an elastic member such as a spring 54. The other end of the spring 54 is fastened to the underside of the foot end of the wheeled carriage
20 22 so as to bias the carriage toward the foot end of the frame. All of the springs 54 are shown attached to the hooks 52 in FIG. 2 for illustrative purposes only. A user of the exercise apparatus 10 can vary the spring tension applied to the carriage 22 during different exercise routines by changing the combination of the springs 54 attached to the hooks 52 and/or moving the non-rotating spring anchor bar 50 to the
25 other slot in each of the spring support brackets 48.

A separate perspective view of the non-rotating spring anchor bar 50 according to one embodiment of the invention is shown in FIG. 3. The non-rotating spring anchor bar 50 is an elongated bar or tube made from a material such as a metal, plastic, or wood. The non-rotating spring anchor bar 50 can be viewed as
30 having a mid bar portion 303 joining two bar end portions 304. The mid bar portion 303 and the bar end portions 304 of the non-rotating spring anchor bar 50 may share a common exterior shape and together form one elongated bar such as is shown in

FIG. 3. Alternatively, the mid bar portion may have a different exterior shape such as is shown in **FIG. 5.**

The two bar end portions **304** are received in one selected pair of the upwardly open slanted slots **148** of the spring support brackets **48**. **FIG. 4** shows a side view of the spring support bracket **48** with one bar end portion **304** received in one upwardly open slanted slot **148**. Two upwardly open slanted slots **148** are shown to be present in each spring support bracket **48** in **FIGS. 2, 4, and 6**; however, the total number of the slanted slots **148** in a spring support bracket **48** is a matter of design choice. Typically, there may be three to four slots in each spring support bracket **48**.

The bracket **48** has a pair of spaced sidewall portions **404** joining a concave bottom wall portion **406** to form each upwardly open slanted slot **148**. Each bar end portion **304** has a convex bottom portion **410** and a stabilizing portion **412**. The convex bottom portion **410** has an exterior shape preferably generally complimentary to the concave bottom wall portion **406** of the bracket **48** forming the upwardly open slanted slot **148**. The stabilizing portion **412** abuts one or both of the sidewall portions **404** to stabilize the non-rotating spring anchor bar **50** received inside the selected pair of upwardly open slanted slots **148**. This configuration prevents any substantial angular rotation of the non-rotating spring anchor bar **50** in the upwardly open slanted slots **148** about the axis A whenever the bar ends **304** are received within a selected pair of slots **148**.

As shown in **FIG. 4**, the anchor bar **50** is prevented from rotating when each of the bar ends **304** is positioned inside one of the selected pair of upwardly open slanted slots **148**. The convex bottom portion **410** of the bar end portion **304** is received at the bottom of the upwardly open slanted slot **148** and mates with the bottom concave wall portion **406**. The bar end portions **304** are prevented from rotating in either the clockwise or counter clockwise direction since the stabilizing portion **412** of each bar end portion **304** is closely and may be frictionally opposed by the sidewall portions **404** of the slot **148**.

The mid bar portion **303** makes no substantial contribution in preventing angular rotation of the non-rotating spring anchor bar **50** about the axis A in the slots

148 beyond rigidly tying the end portions together. Thus, the exterior form or shape of the mid bar portion 303 need not be identical or even similar to the exterior shape of the bar end portions 304 of the non-rotating spring anchor bar 50. As an example, FIG. 5 shows a non-rotating spring anchor bar 550 according to an alternate embodiment of the present invention in which the mid bar portion 503 has an exterior shape different than the exterior shapes of the two bar end portions 504. The mid bar portion 503 is an elongated cylindrical rod (or a tube). The two bar end portions 504 that join the mid bar portion 503 have the same exterior shape as the two bar end portions 304 in the first embodiment of the present invention that is shown in and described with respect to FIGS. 3-4.

In a manner similar to the embodiment of the present invention described with respect to FIGS. 3-4, the two bar end portions 504 of the alternate embodiment are sized to be received in one selected pair of the upwardly open slanted slots 148 of the spring support bracket 48. FIG. 6 shows a side view of one bar end portion 504 received in one upwardly open slanted slot 148 of the spring support bracket 48.

Each bar end portion 504 again has a convex bottom portion 510 and a stabilizing portion 512. The convex bottom portion has an exterior shape generally complimentary to the concave bottom wall portion 406 defining the upwardly open slanted slot 148. The stabilizing portion 512 stabilizes the non-rotating spring anchor bar 550 received inside the selected pair of upwardly open slanted slots 148 and prevents substantial angular rotation of the non-rotating spring anchor bar 550 in the upwardly open slanted slots 148 about the axis B whenever the bar ends 504 are received within a selected pair of slots 148. Again, the bar end portions 504 are prevented from rotating in either the clockwise or counter clockwise direction since the stabilizing portion 512 of each bar end portion 504 abuts against the sidewall portions 404 of the slot 148.

In general, the non-rotating spring anchor bar (50 or 550 shown in FIGS. 3 or 5) can be made from various materials (e.g., metal, wood, plastic, composite material, etc.) that are either solid or tubular. Further, various exterior shapes are permissible for the mid bar portion 303, 503 (e.g., cylindrical rod, elongated rectangular bar, etc.). More simply, the anchor bar 550 may be made from an aluminum tube by simply flattening the ends of the tube so as to fit within the slots

148. Alternatively, the bar may simply be an extrusion, for example, of aluminum, having an oval shape cross-section with parallel side portions as is shown in **FIGS. 3 and 4.**

In addition, various shapes of the bar end portions **304, 504** are also permissible so long as they can substantially prevent the non-rotating spring anchor bar (**50** or **550**) from rotating when the bar end portions **304, 504** are received inside a selected pair of the upwardly open slanted slots **148**. Any shape for the bar end portions **304, 504** that achieves this purpose is a suitable shape. For example, it is not a requirement that the bottom portion **410, 510** of the bar end portion **304, 504** must have a convex cross sectional profile that is complementary to the concave cross-sectional profile of the concave bottom wall portion **406** of the slot **148** as shown in **FIGS. 4-6** For example, the bottom of each of the slots **148** may be concave as shown or may be square cornered, with the bottom portions **410** and **510** curved as shown or vice versa. The stabilizing portion **412** and **512** may have a different shape so long as it engages with the sides **404** of the slot **148** to prevent rotation of the anchor bar **50** or **550**.

The specification and the drawings included herein disclose various embodiments of the present invention. However, the specification and the drawings of the present invention do not aim to disclose all variations of the reformer exercise apparatus and/or the anchor bar or all components that are used as in a reformer exercise apparatus. It is to be understood that the anchor bar of the present invention may be practiced in various exercise apparatuses other than as specifically described herein. For example, the angle of the slots in the anchor bar support brackets may be different in other reformers than that illustrated, and thus the placement of anchor hooks or other attachment devices may be different from those shown. In one alternative, the mid portion may simply be a rod over which hooks on the ends of the springs may be attached. The hooks may be replaced with eyes or vertical posts, etc. The oval cross section of the end portion may also be changed so long as its shape interferes with rotation of the bar in the slots **148**. Numerous other changes may be made which will readily suggest themselves to those skilled in the art and which are encompassed in the spirit of the invention disclosed and as defined in the appended claims.

Claims

What is claimed is:

1. A reformer exercise apparatus comprising:
 - a generally rectangular frame formed by a foot end and a head end
 - 5 connected to two spaced-apart parallel side frame rail members;
 - a movable carriage mounted on the rail members for supporting a user and for movement along the rails and biased toward the foot end of the frame by an elastic member;
 - a pair of spaced-apart anchor bar support brackets fastened to the
 - 10 frame near the foot end, each bracket having a series of slanted slots having a bottom wall portion joining a pair of spaced parallel sidewall portions; and
 - an elongated elastic member anchor bar having a central axis, mid portion and a pair of bar ends, each bar end being received within one of the slots in each bracket, each bar end having an exterior shape preventing
 - 15 rotation of the anchor bar within the slot.
2. The reformer exercise apparatus of claim 1, wherein each bar end comprises:
 - a bottom portion; and
 - a stabilizing portion joining the bottom portion, the stabilizing
 - 20 portion preventing angular rotation of the anchor bar about its axis when the bar ends are received within the selected pair of slots.
3. The reformer exercise apparatus of claim 2, wherein the mid portion and the pair of bar ends of the anchor bar have a uniform exterior cross sectional shape.
- 25 4. The reformer exercise apparatus of claim 2, wherein the bottom portion has convex exterior shape.
5. The reformer exercise apparatus of claim 4, wherein the bottom wall portion
- 30 of the slanted slot has concave exterior shape complimentary to the convex exterior shape of the bottom wall of the bar end.

1/2

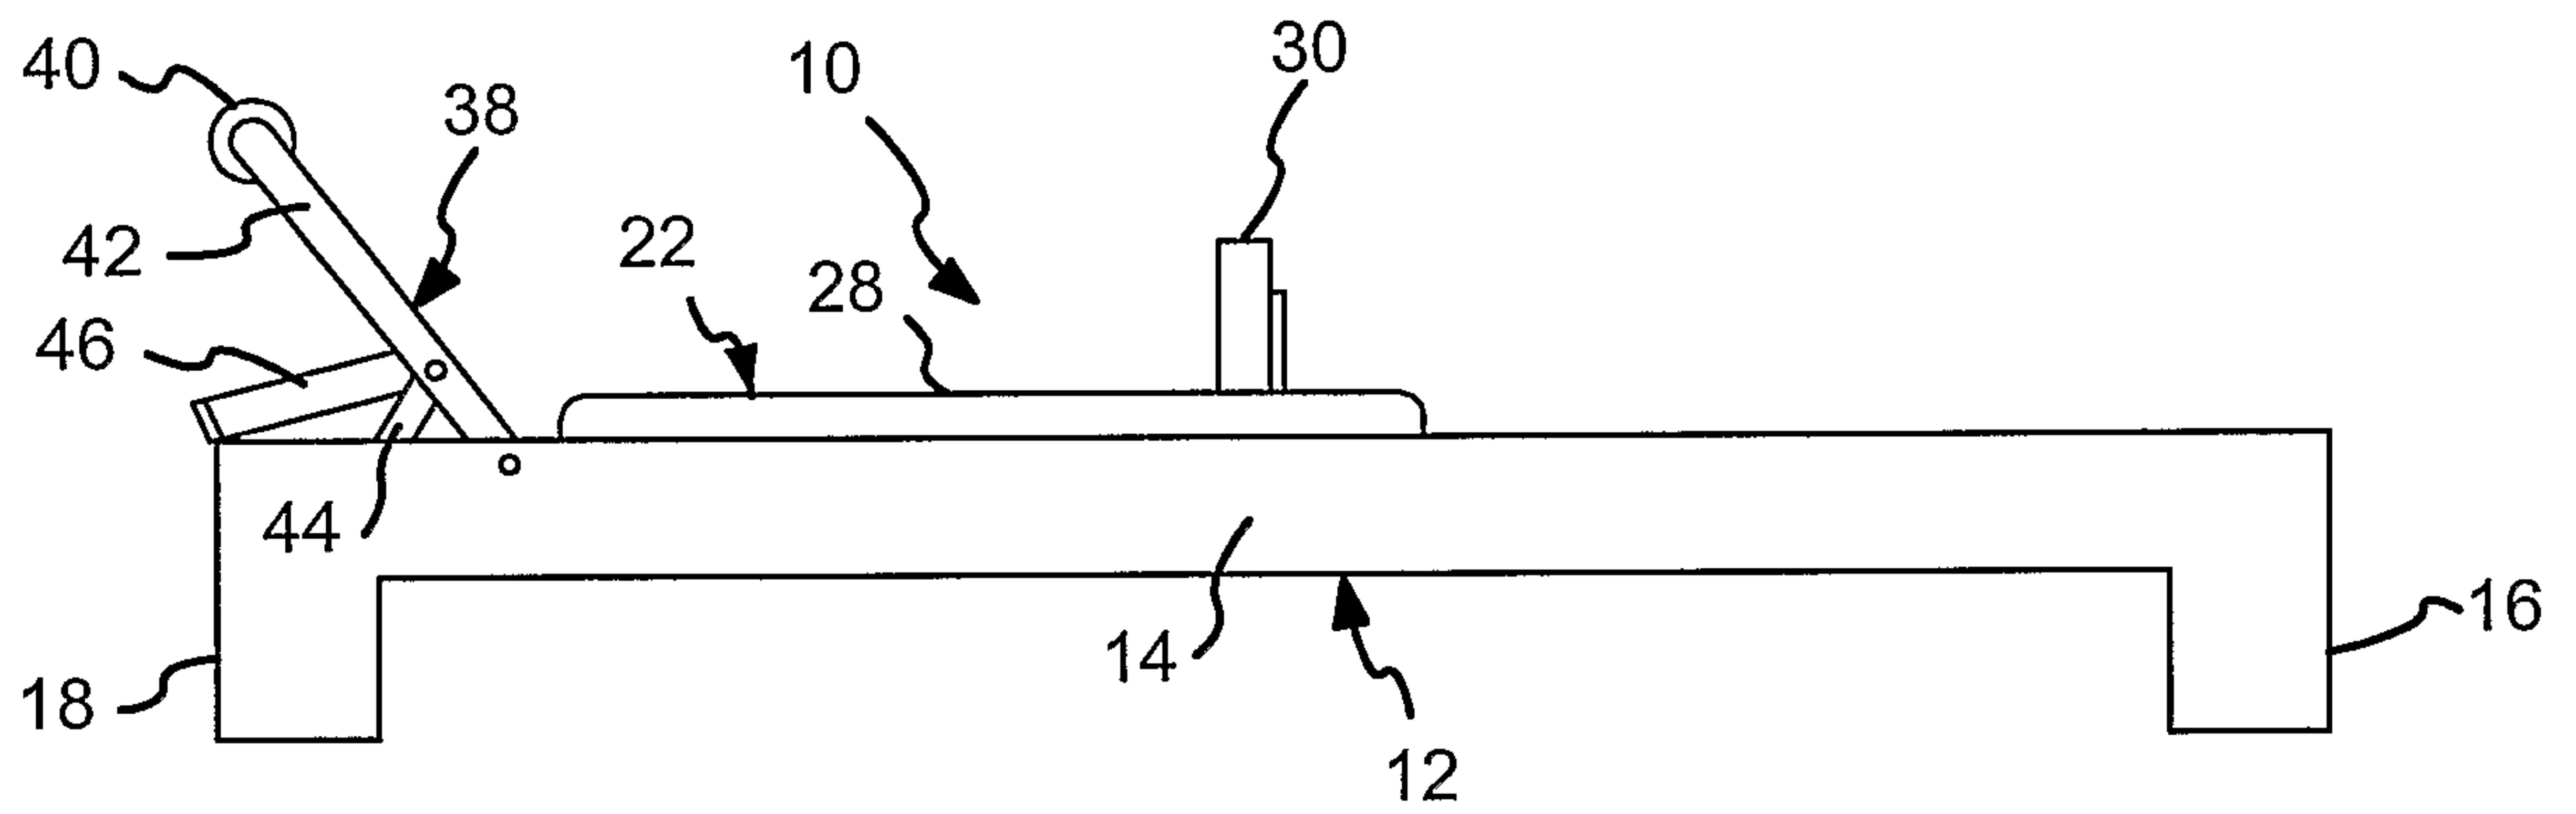


FIG. 1

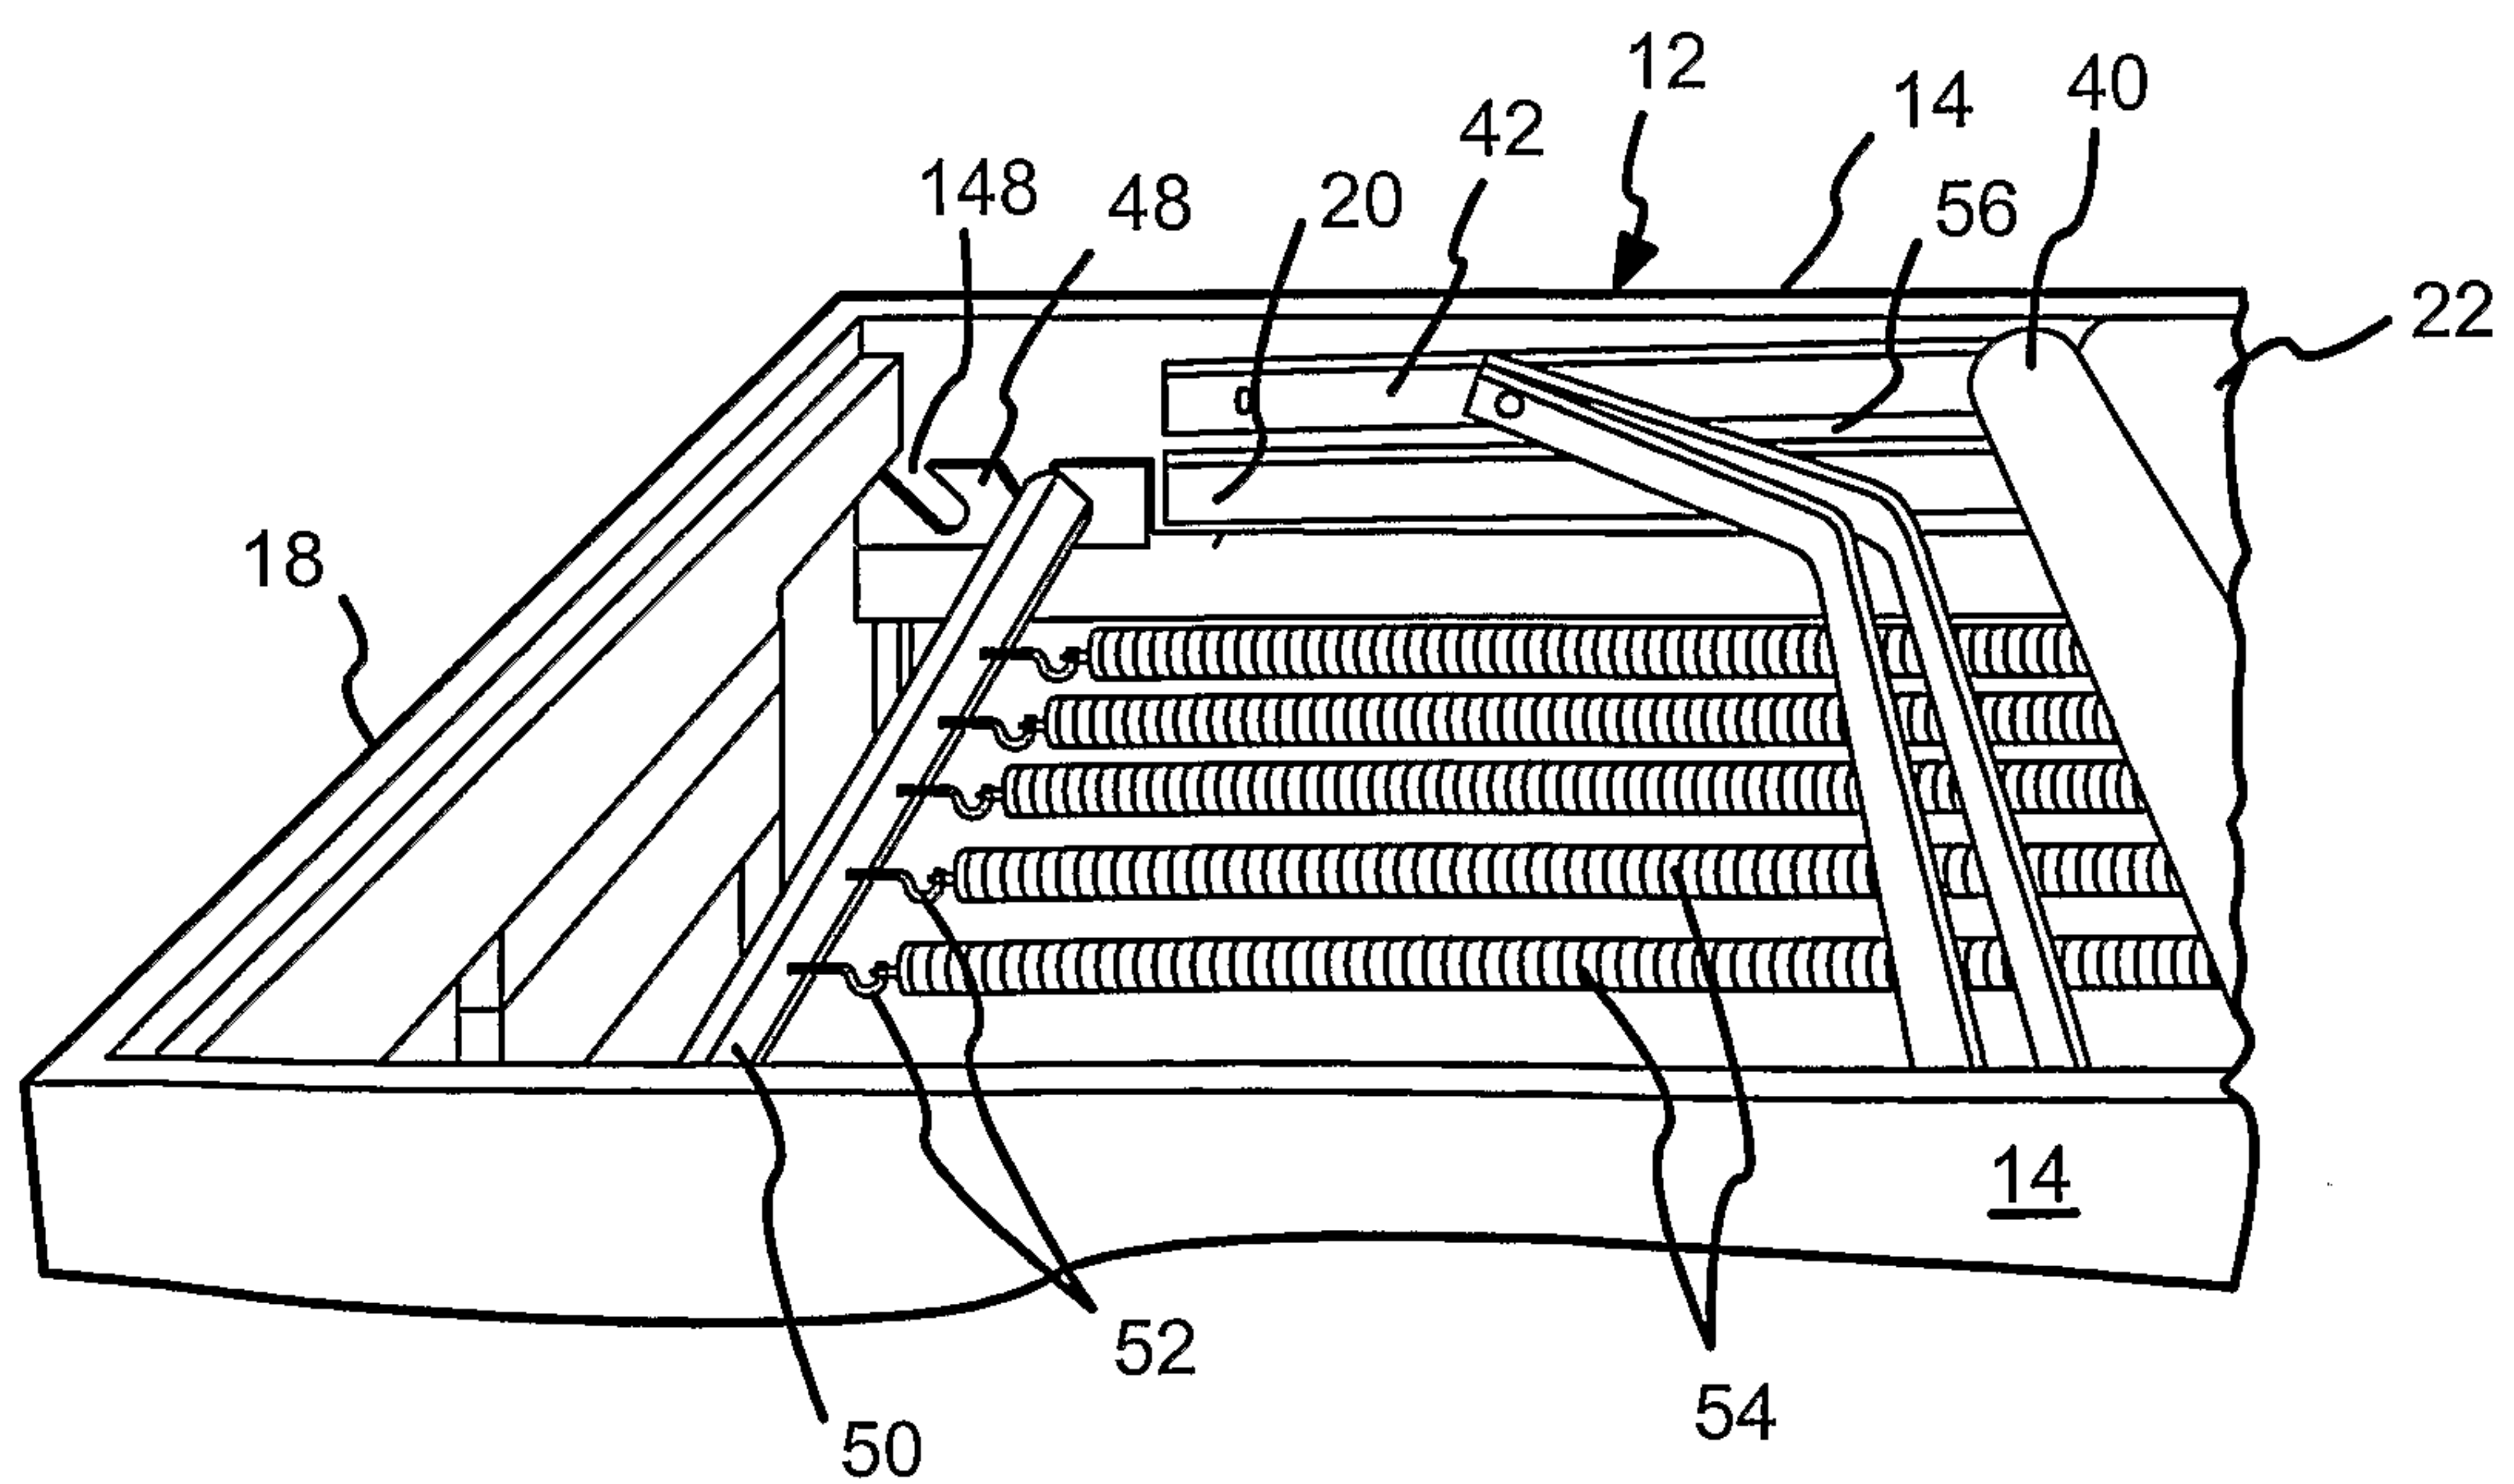


FIG. 2

2/2

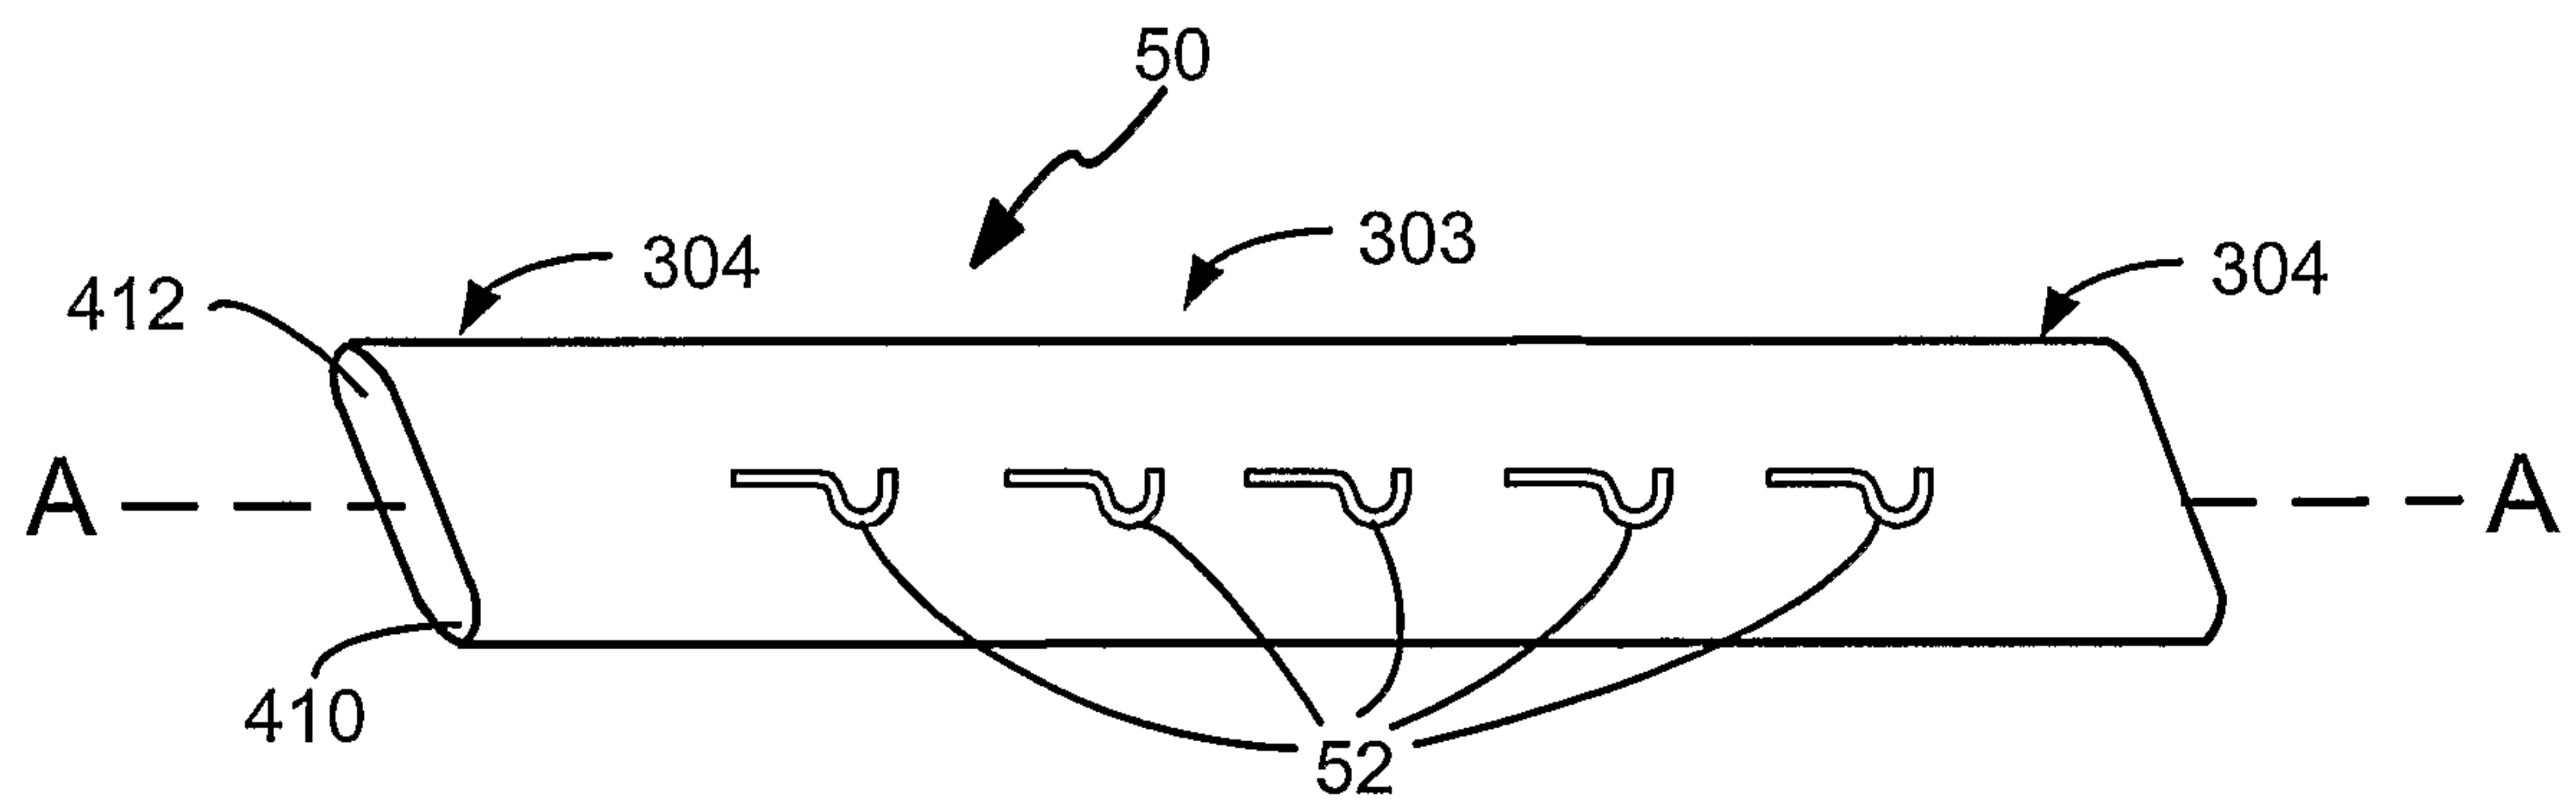


FIG. 3

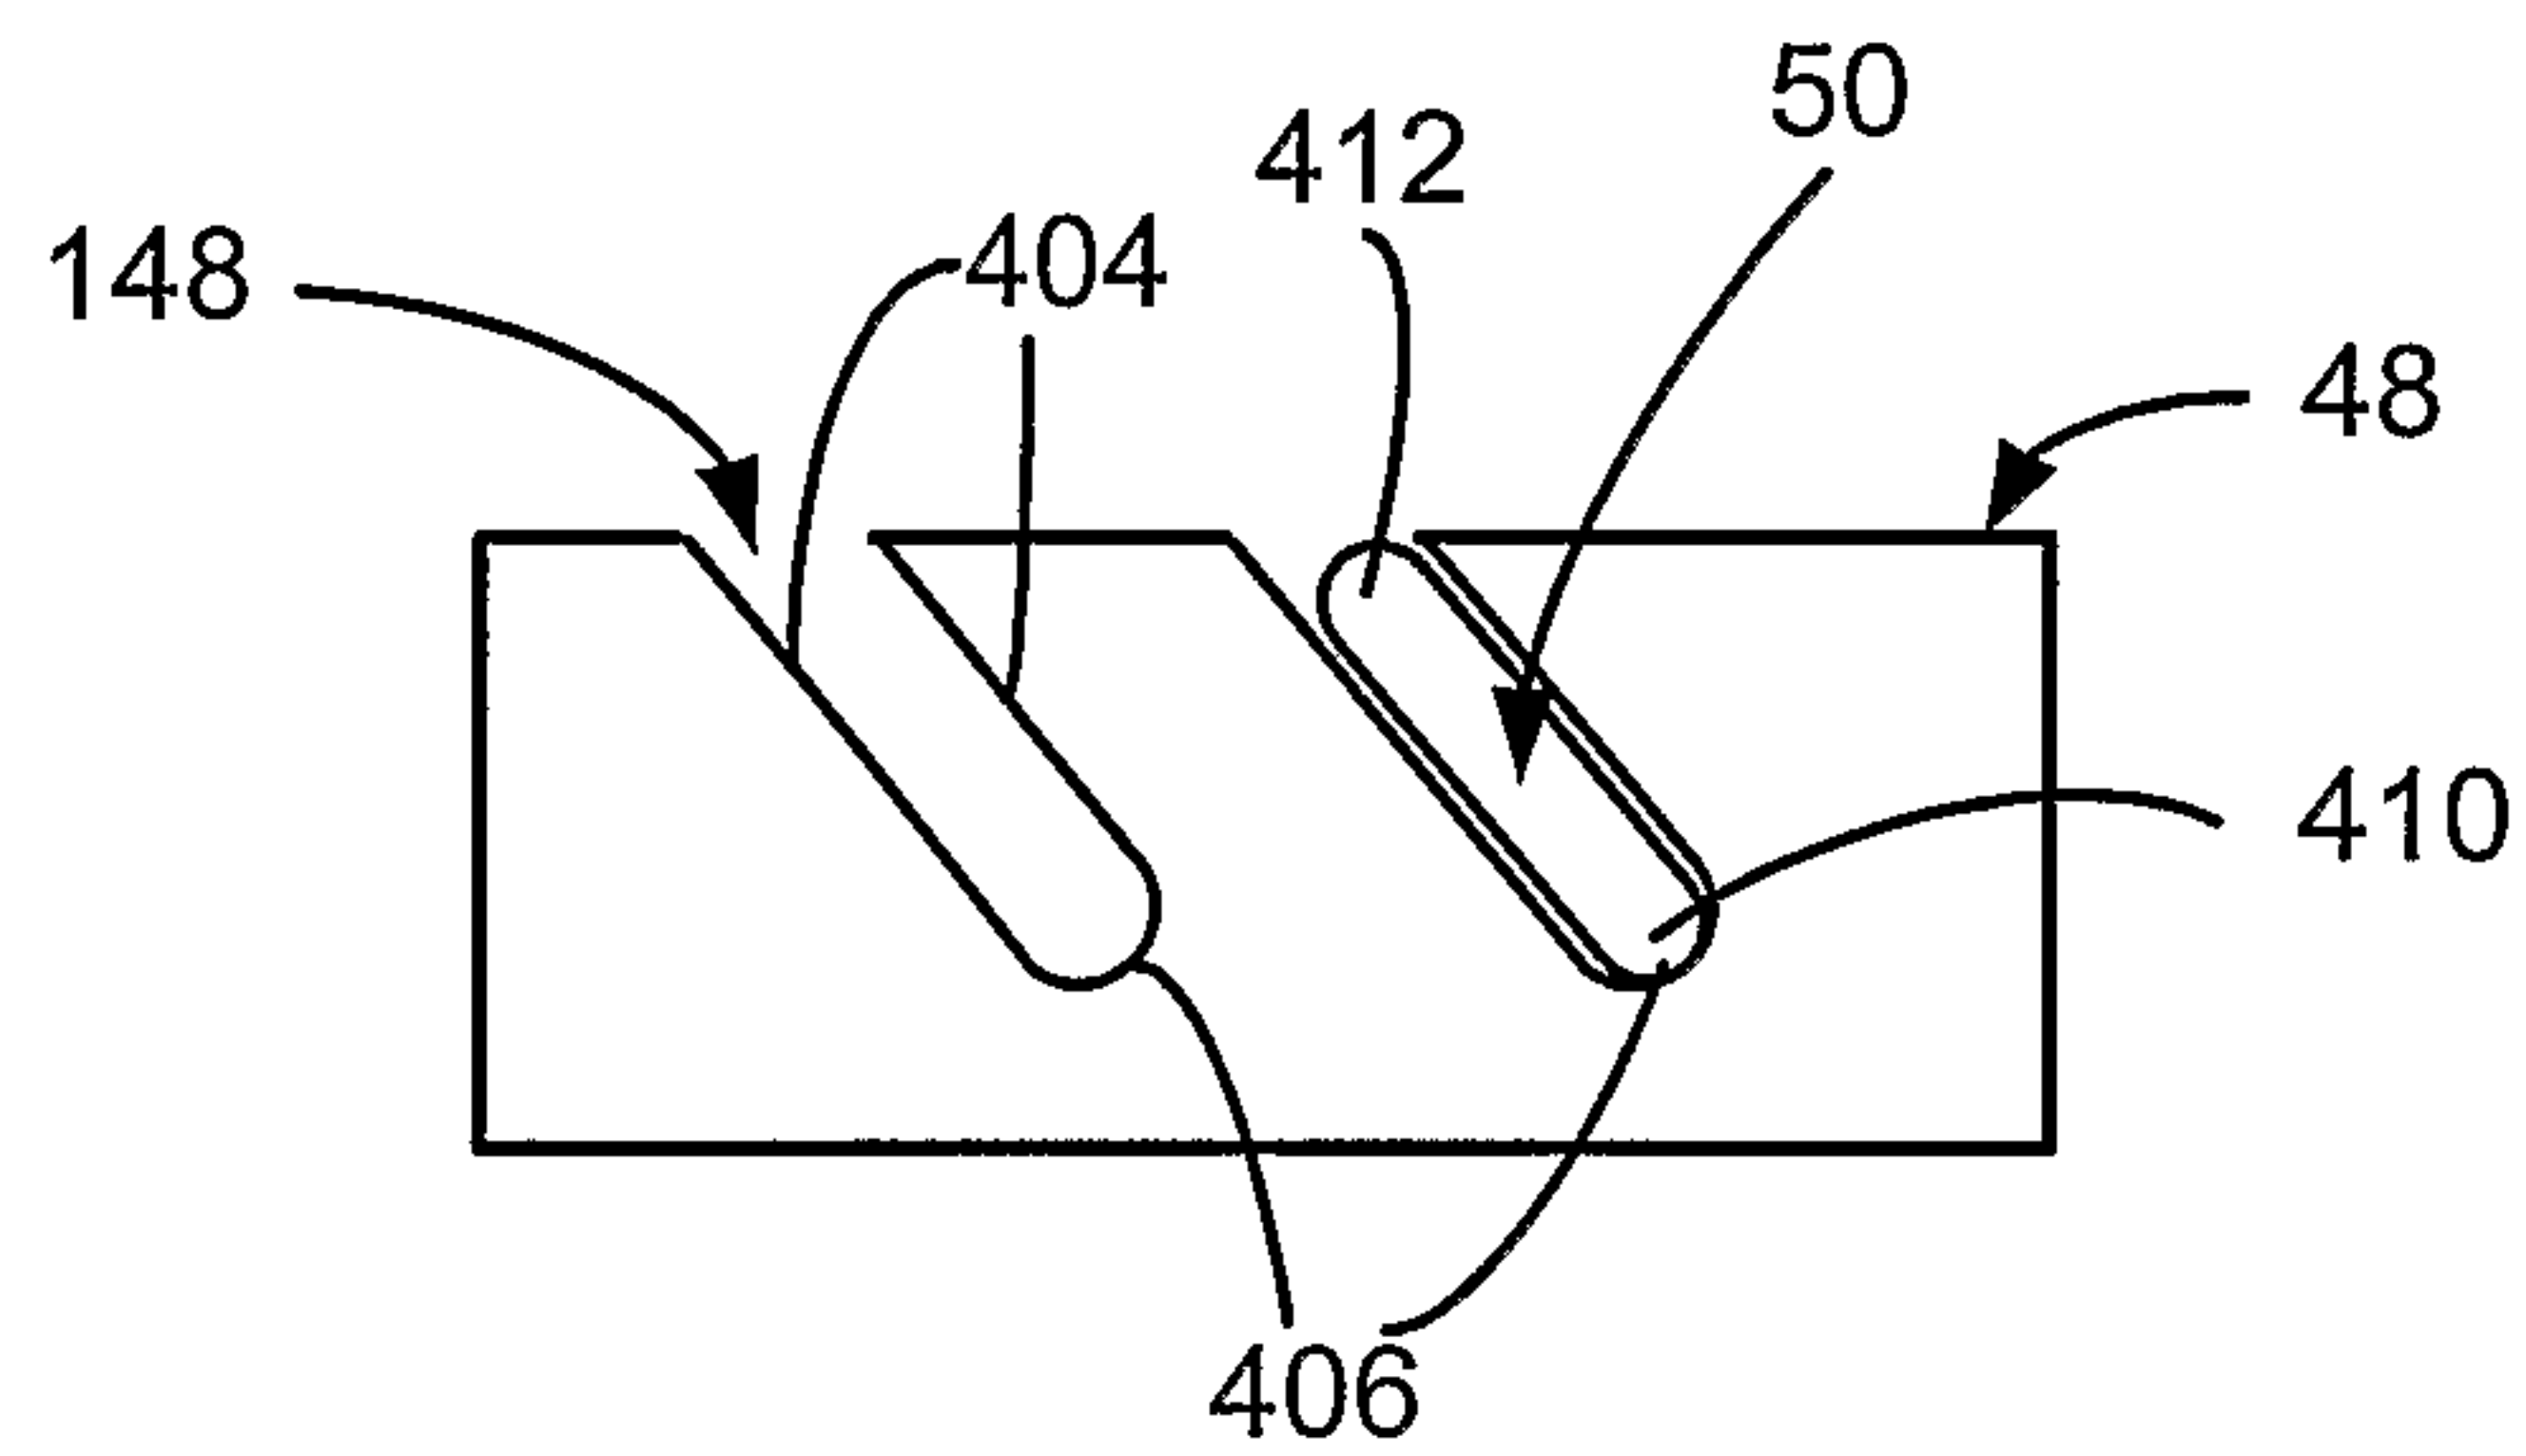


FIG. 4

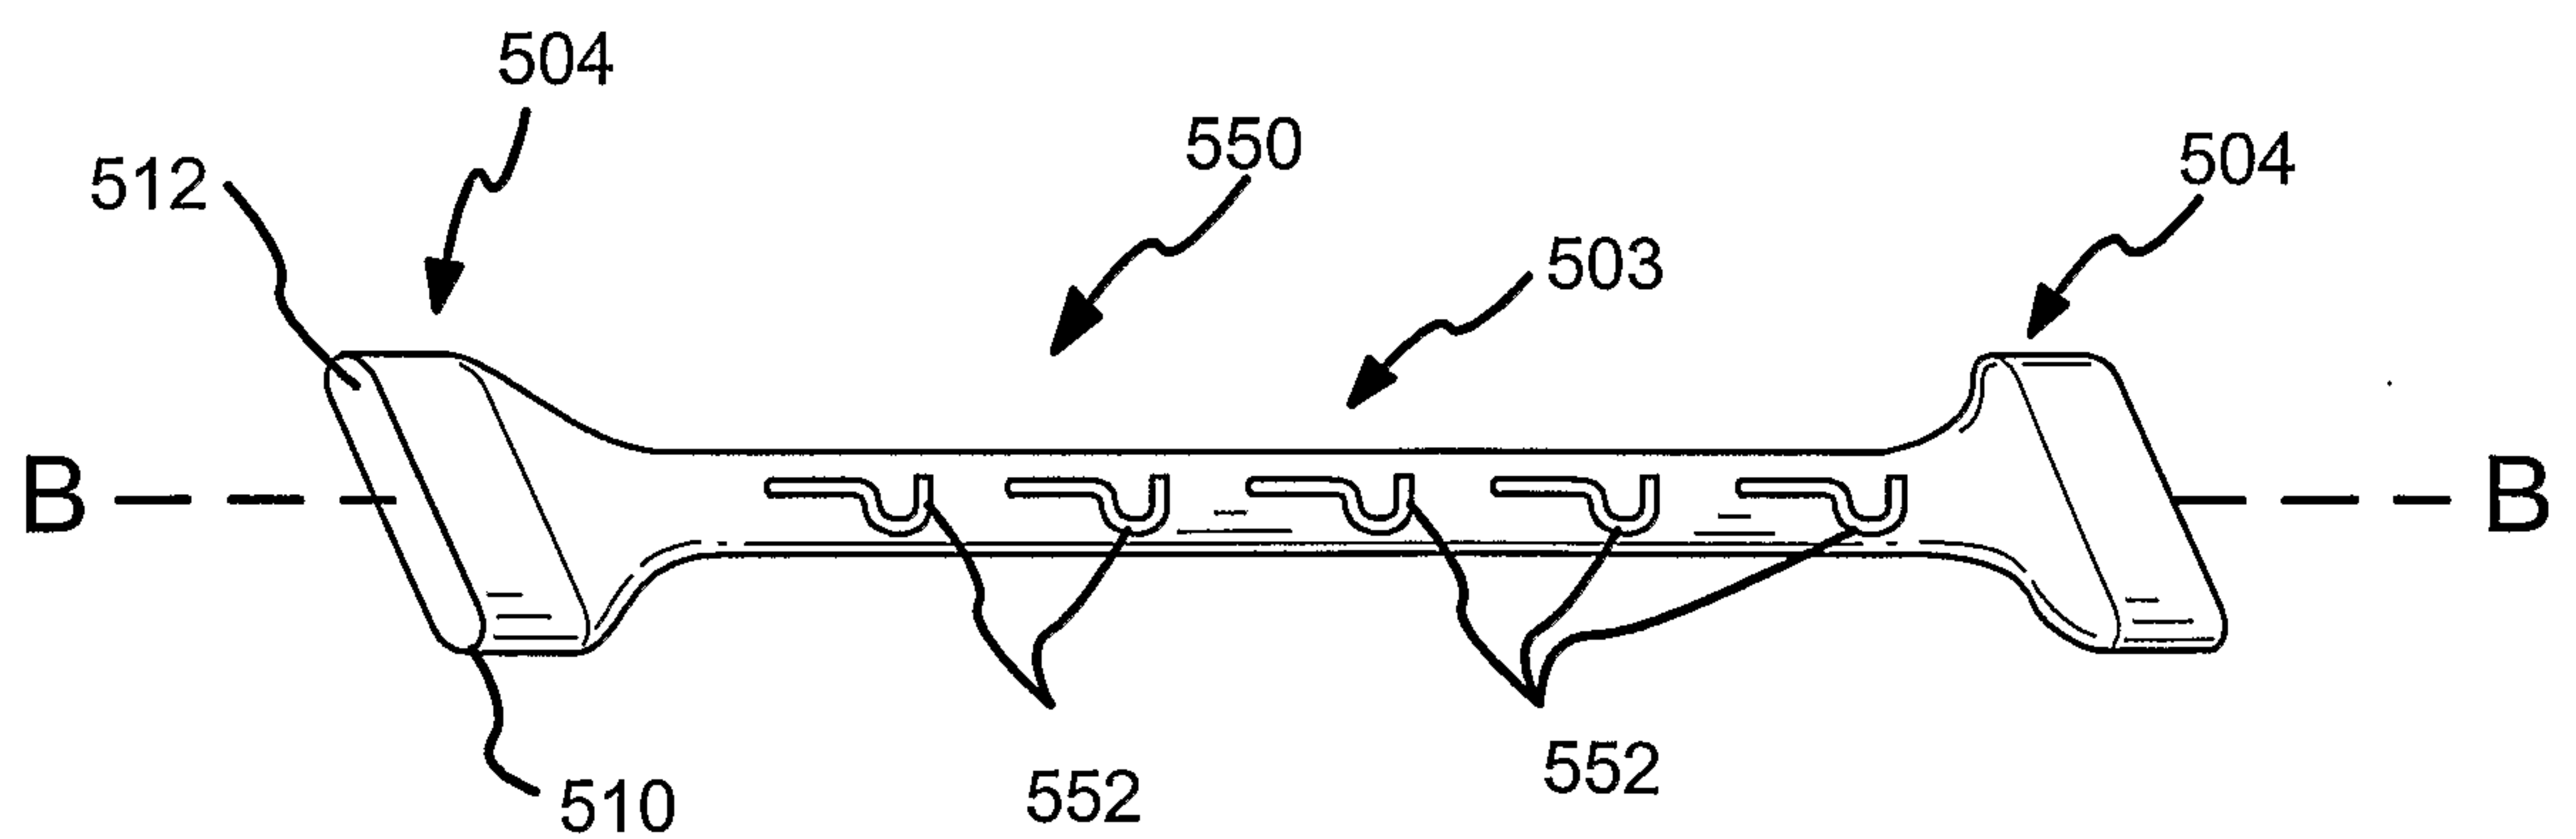


FIG. 5

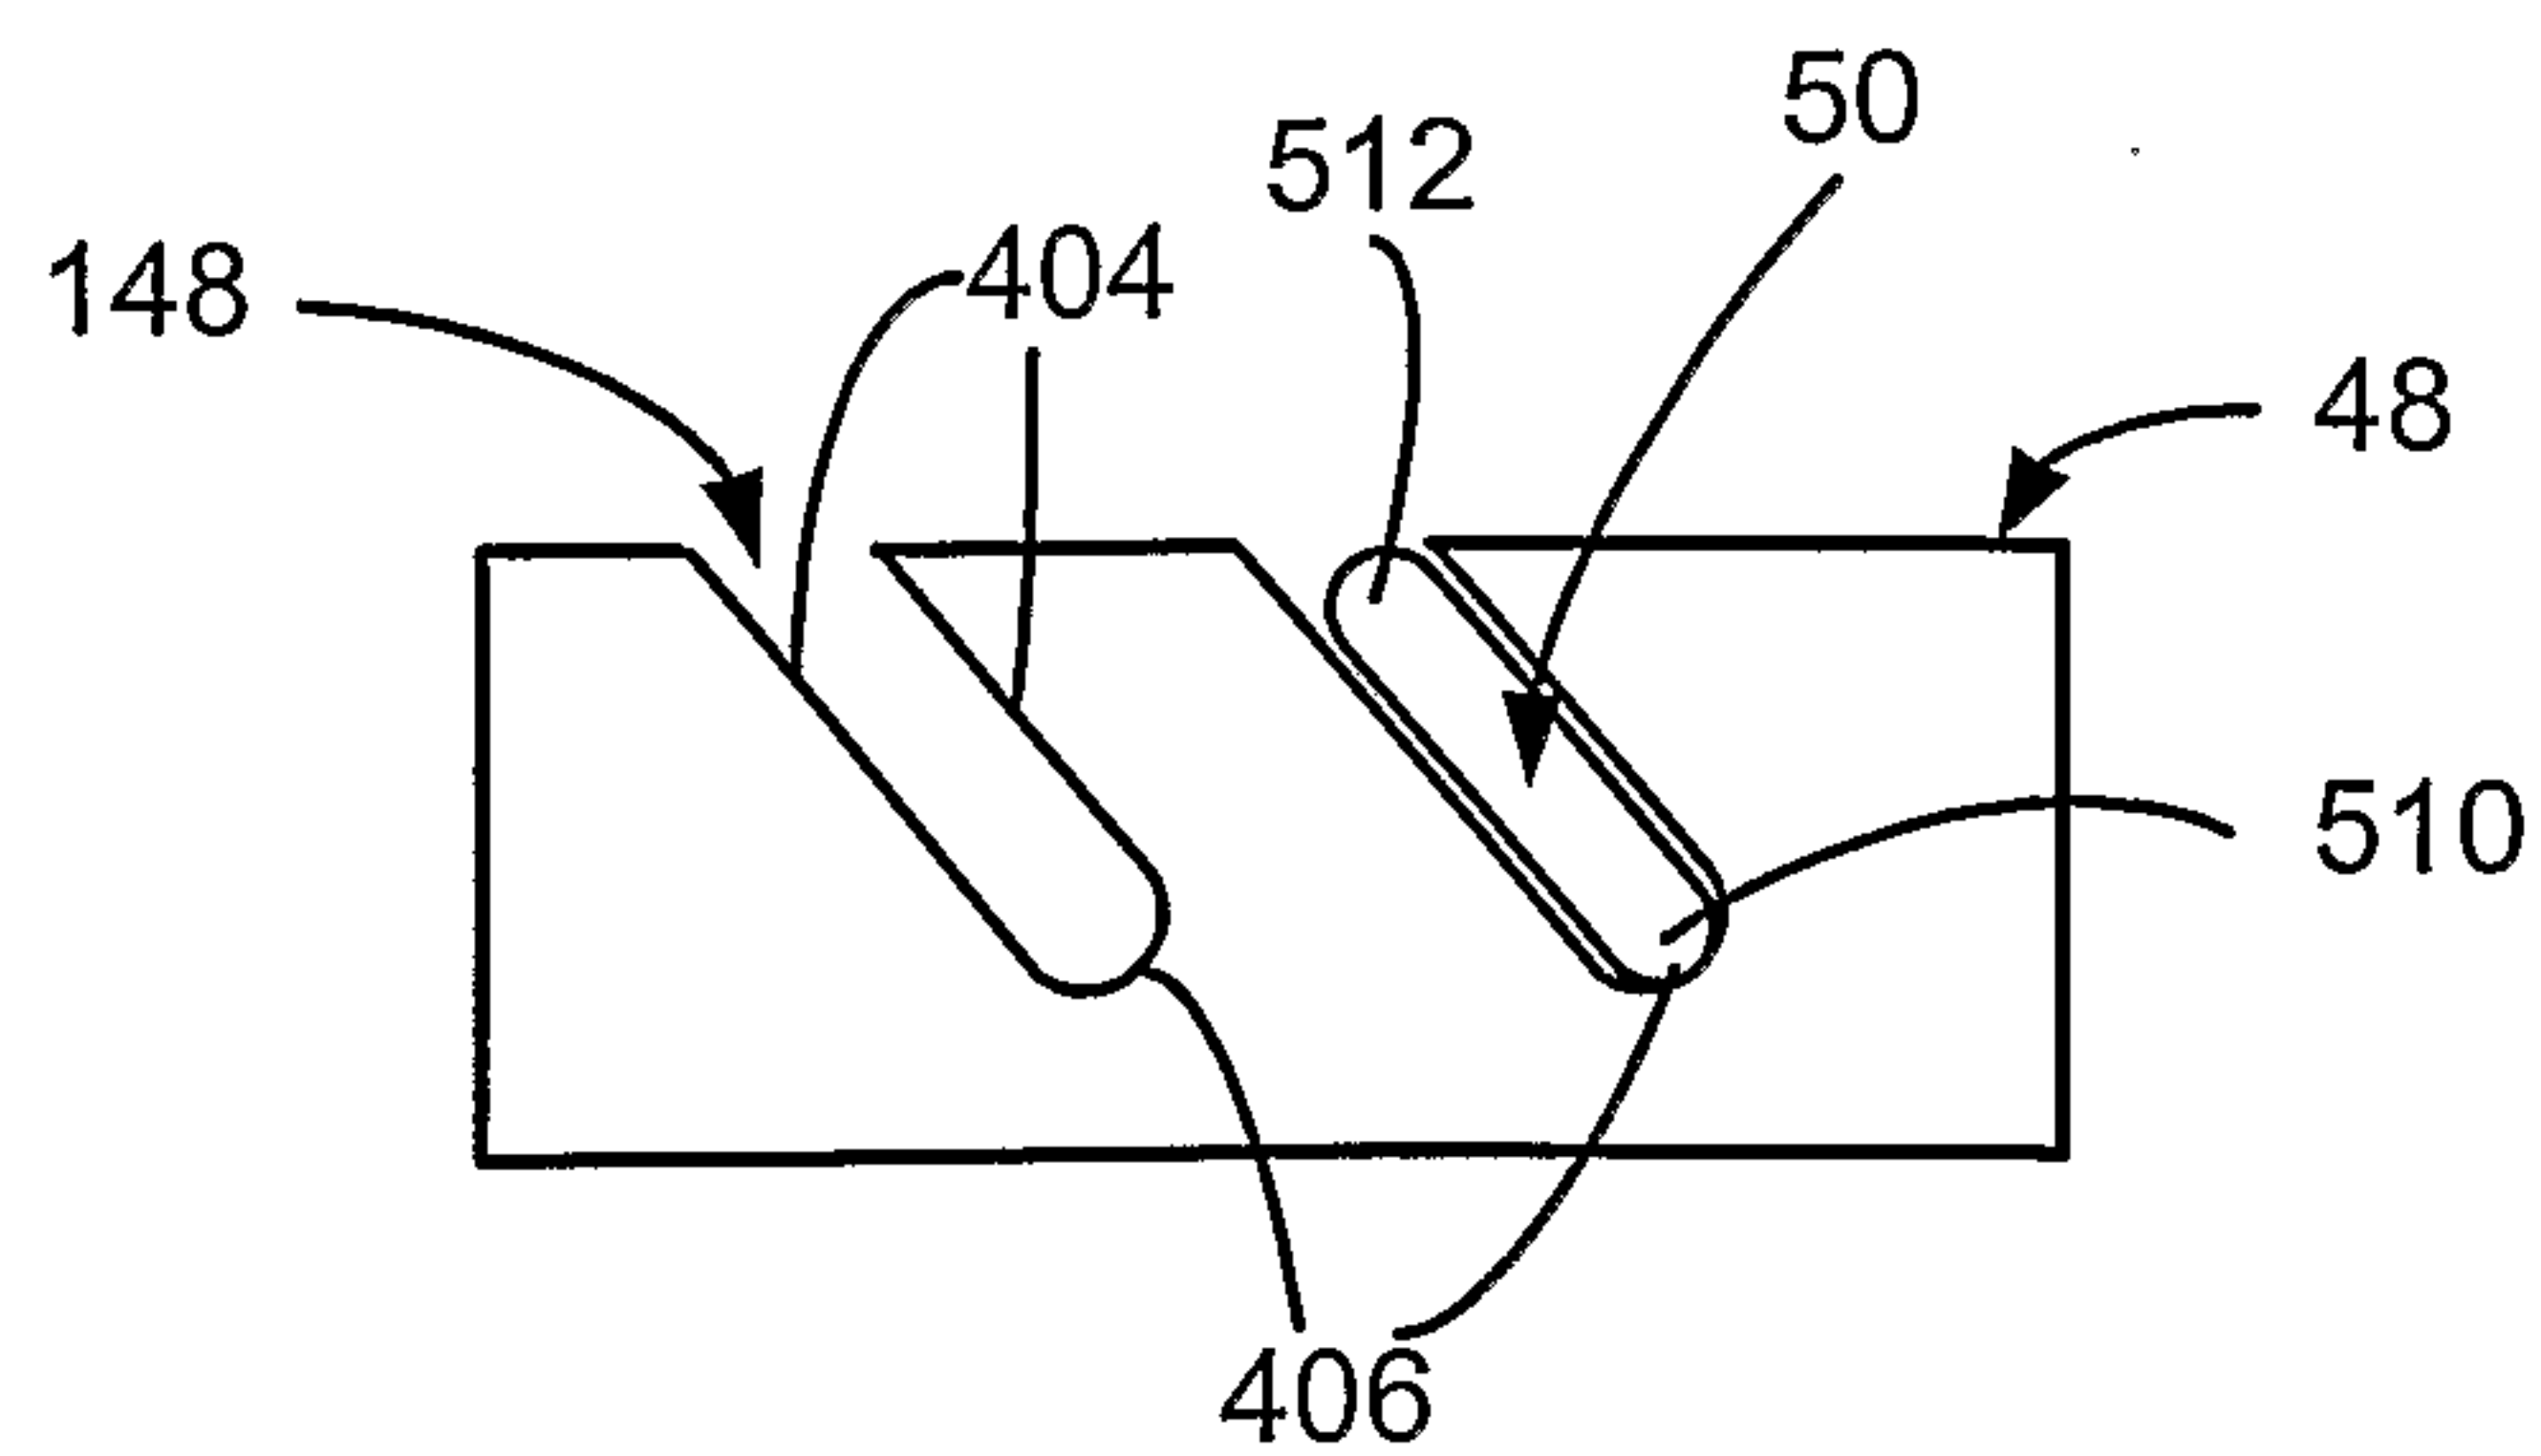


FIG. 6

