



(11) **EP 1 965 608 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**25.03.2015 Bulletin 2015/13**

(51) Int Cl.:  
**H05B 33/08 (2006.01)**

(21) Application number: **07004071.2**

(22) Date of filing: **27.02.2007**

(54) **Control circuit for automatically generating latch signal to control LED device according to input data signal and clock signal**

Steuerschaltung zur automatischen Erzeugung eines Latch-Signals zur Steuerung eines LED-Geräts in Übereinstimmung mit dem Eingangsdatensignal und dem Taktsignal

Circuit de contrôle pour générer automatiquement un signal de verrouillage pour contrôler le dispositif DEL selon le signal de données entrées et le signal d'horloge

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI  
SK TR**

(43) Date of publication of application:  
**03.09.2008 Bulletin 2008/36**

(73) Proprietor: **Silicon Touch Technology, Inc.  
Hsin-Chu (TW)**

(72) Inventor: **Lu, Guan-Ting  
E. District  
HsinChu City (TW)**

(74) Representative: **Schaeberle, Steffen  
Hoefer & Partner  
Patentanwälte  
Pilgersheimer Strasse 20  
81543 München (DE)**

(56) References cited:  
**US-A1- 2006 125 425**

**EP 1 965 608 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a control circuit according to the pre-characterizing clause of claim 1.

**[0002]** At present, there exist three conventional schemes for controlling an LED device, including a parallel control scheme, an address control scheme, and a series control scheme respectively. The parallel control scheme utilizes electronic lines to connect all independent lamp apparatuses and a system controller respectively. The disadvantage, however, is that the parallel control scheme costs a lot of electronic lines and results in a problem for settling lamp apparatuses. The problem is that distances between the lamp apparatuses and the system controller are different since not all lamp apparatuses are distributed over the same area. The address control scheme gives all lamp apparatuses different addresses such that the system controller can control a specific lamp apparatus by using an address corresponding to the specific lamp apparatus; however, transmitting controlling signals and address signals for the address control scheme to control lamp apparatuses is necessary. This causes problems when producing, settling, and maintaining lamp apparatuses. The series control scheme adds a control circuit on each lamp apparatus and uses electronic lines to connect one lamp apparatus to another for controlling all lamp apparatuses. The disadvantage of the series control scheme is that it requires six electronic lines for control.

**[0003]** This in mind, the present invention aims at providing a control circuit that utilizes an input data signal and a clock signal to generate a latch signal automatically for controlling an LED device.

**[0004]** This is achieved by a control circuit according to claim 1. The respective dependent claims pertain to corresponding further development and improvements.

**[0005]** As will be seen more clearly from the detailed description following below, the claimed control circuit includes at least a first control module. The first control module includes a shift register unit, a latch register unit, an LED driving circuit, and a latch signal generator. The shift register unit is coupled to the input data signal and the clock signal, and the shift register unit includes at least a shift register triggered by the clock signal to buffer data transmitted in the input data signal. The latch register unit is coupled to the shift register unit, and the latch register unit includes at least a latch register triggered by a latch signal to latch data buffered by the shift register. The LED driving circuit is coupled to the latch register unit and used for driving the LED device according to data latched by the latch register. The latch signal generator is coupled to the input data signal and the clock signal, and used for generating the latch signal according to the input data signal and the clock signal.

**[0006]** In the following, the invention is further illustrated by way of example, taking reference to the accompanying drawings. Thereof

Fig. 1 is a diagram of a prior art LED system;

Fig. 2 is a diagram of another prior art LED system using PWM technology;

Fig. 3 is a diagram of an embodiment of a control circuit applied in an LED device according to the present invention; and

Fig. 4 is a timing diagram of the input data signal, clock signal, and the latch signal utilized by the control circuit shown in Fig. 3.

**[0007]** Please refer to Fig. 1. Fig. 1 is a diagram of a prior art LED system 100. As shown in Fig. 1, the LED system 100 comprises a plurality of LED devices 102, 104, 106. It is necessary for the LED devices 102, 104, 106 to connect themselves to the power supply voltage level  $V_{CC}$ , ground voltage level  $V_{SS}$ , data signal DAT, clock signal CLK, latch signal LAT, and the enable signal EN. In order to prevent signals from degrading caused by the series connection structure, extra buffer amplifiers are added in the LED system 100 to prevent the data signal DAT, clock signal CLK, latch signal LAT, and enable signal EN respectively from degrading. Recently, the Pulse Width Modulation (PWM) technology has been applied to controlling LED devices. One of the advantages of the PWM technology is to reduce a large amount of driving data. More and more system designers incline to (prefer to) utilize the PWM technology for generating the latch signal automatically instead of using the manual latch signal and the enable signal simultaneously. Please refer to Fig. 2. Fig. 2 is a diagram of another prior art LED system 200 using the PWM technology, where the operation of automatically generating the latch signal is identical to that of US 2006/0125425 A1. As shown in Fig. 2, only four electronic lines, including the power supply voltage level  $V_{CC}$ , ground voltage level  $V_{SS}$ , data signal DAT, and the clock signal CLK, are needed for controlling the LED devices 202, 204, 206 within the LED system 200. The purpose of the PWM technology is to reduce the above-mentioned large amount data for transmission. Generating the latch signal automatically can be achieved by utilizing a clock loss detection circuit to detect the clock signal for checking if the clock signal is not received in a detection period. If the clock signal is not received in the detection period, the latch signal will be generated to control the LED devices. The detection period cannot be changed, however, since the detection period has to be set in advance for the clock loss detection circuit to detect the clock signal. The system will waste a lot of time for waiting if the detection period is too long. Oppositely, if the detection period is too short, the minimum input frequency of the clock signal will be limited. The latch signal will be generated easily by unexpected events, and therefore the LED devices are erroneously enabled. It is hard for the system to control the LED devices precisely.

**[0008]** Please refer to Fig. 3. Fig. 3 is a diagram of an embodiment of a control circuit 300 applied in an LED device 302 according to the present invention. As shown

in Fig. 3, the control circuit 300, comprising a plurality of control modules and a micro-controller 308, is utilized for controlling the LED device 302. Please note that, although only a first control module 304 and a second control module 306 are shown in Fig. 3, this is not a limitation of the present invention. In this embodiment, the first and second control modules 304, 306 are coupled together to form a series connection structure; however, in other embodiments of the present invention, a plurality of first control modules 304 can be coupled together to form another series connection structure before coupling to the second control module 306. This circuit configuration also belongs to the scope of the present invention. The micro-controller 308 is utilized for generating an input data signal DAT and filling a specific data pattern into the input data signal DAT after a driving data in the input data signal DAT. Additionally, the micro-controller 308 further generates a clock signal CLK and controls the clock signal CLK to remain at a specific logic level during a predetermined time. In this embodiment, the first control module 304 comprises a shift register unit 312, a latch register unit 314, an LED driving circuit 316, a latch signal generator 318, a multiplexer 319, a first output buffer 321, and a second output buffer 322. The shift register unit 312, comprising a plurality of shift registers 320a, 320b, and 320c, is triggered by the clock signal CLK for buffering data transmitted in the input data signal DAT. For example, the shift register 320a will output data registered within itself to the shift register 320b and receive data from its input end for registering the received data in itself when being triggered by the clock signal CLK. Since the operation and function of the shift register is well known to those skilled in the art, it is not detailed for brevity. The latch register unit 314 comprises a plurality of latch registers 322a, 322b, and 322c, which are triggered by a latch signal LAT for latching data registered by corresponding shift registers 320a, 320b, and 320c, respectively. Please note that only three shift registers and three latch registers are shown in Fig. 3. This is not a limitation of the present invention, however. That is to say, the numbers of shift registers and latch registers adopted in each control module can be designed according to different requirements.

**[0009]** The LED driving circuit 316 is utilized for driving the LED device 302 according to the data latched within the latch registers 322a, 322b, and 322c. In this embodiment, the latch signal generator 318 is utilized for generating the latch signal LAT according to the input data signal DAT and the clock signal CLK. That is to say, the latch signal generator 318 generates the latch signal LAT by detecting that the clock signal CLK remains at a specific logic level during a specific time and the specific data pattern exists in the input data signal DAT simultaneously. In addition, the latch signal generator 318 also controls the multiplexer 319 to output data registered in the shift register unit 312 or the input data signal DAT selectively. The first output buffer 321 and the second output buffer 323 are utilized for separately buffering an output of the

multiplexer 319 and the clock signal CLK to ensure a signal at the input end of a next control module coupled to the first control module 304 (for example, the second control module 306) does not degrade. Moreover, the first and second output buffers 312, 323 also provide a fixed delay time between the input data signal DAT and the clock signal CLK to avoid any phase shift between the input data signal DAT and the clock signal CLK so that the control circuit 300 can be always stabilized. Please note that, if the second control module 306 does not need to transmit signals to a next control module coupled to itself, the second control module 306 comprises all elements within the first control module 304 except the multiplexer 319, the first output buffer 321, and the second output buffer 323. The operation and names of elements in the second control module 306 are not detailed further for brevity.

**[0010]** Please refer to Fig. 4. Fig. 4 is a timing diagram of the input data signal DAT, the clock signal CLK, and the latch signal LAT utilized by the control circuit 300 shown in Fig. 3. In this embodiment, it is assumed that shift registers are triggered by the rising edge of the clock signal CLK. In other embodiments, however, shift registers can be triggered by other means, for example they can be triggered by the falling edge of the clock signal CLK. This is not a limitation of the present invention. As shown in Fig. 4, before time  $T_i$ , the micro-controller 308 continues generating the input data signal DAT having a driving data DAT' and outputting a normal clock signal CLK, and the multiplexer 319 outputs data registered in the shift register unit 312. The shift registers in the first and second control modules 304, 306 will be triggered by the rising edge of the clock signal CLK, and the driving data in the input data signal DAT will be transmitted to the shift registers in the first control module 304 and the second control module 306 until the driving data is registered in these shift registers exactly. Therefore, before time  $T_i$ , the latch signal LAT continues to remain at a stable voltage level (e.g. a high voltage level shown in Fig. 4), preventing erroneous triggering of any latch register, so driving the LED driving circuit 316 to control the LED device 320 before the driving data has arrived at the corresponding shift registers does not occur. In other embodiments of the present invention, according to different schemes for triggering the latch registers, the latch signal LAT can be controlled to be remain at a stable low voltage level, preventing latching of data registered in the shift registers by the latch registers. Any specific voltage level applied in the latch signal LAT for preventing triggering of the latch registers also obeys the spirit of the present invention.

**[0011]** When the driving data has arrived at the corresponding shift registers (e.g. the transmission of the driving data is just finished at time  $T_1$ ), the micro-controller 308 controls the clock signal CLK to remain at a specific logic level (e.g. a logic level "1"; however, a logic level "0" is also suitable in other embodiments) during a predetermined time T shown in Fig. 4. At this time, by re-

ceiving the clock signal CLK at the logic level "1", the latch signal generator 318 controls the multiplexer 319 to stop outputting data registered in the shift register unit 312 and outputs the input data signal DAT directly to the second control module 306 instead.

**[0012]** For the time being, a specific data pattern PAT exists in the input data signal DAT. In this embodiment, the specific data pattern PAT is a pulse signal having eight rising edges. For an example of the latch signal generator 318, when the latch signal generator 318 receives the clock signal CLK at the specific logic level and the specific data pattern PAT, i.e. when the latch signal generator 318 detects the pulse signal having eight rising edges (at time  $T_2$ ) on condition that the clock signal CLK remains at logic level "1", the latch signal generator 318 will generate the latch signal LAT having a low-level pulse to all latch registers. After receiving the latch signal LAT having low-level pulse, the latch registers latch data registered in the corresponding shift registers and drive the LED driving circuit 316 to control the operation of the LED device 302. After the predetermined time T is reached, the clock signal CLK will become normal and another driving data in the input data signal DAT will be transmitted to all shift registers for controlling the LED device 302. According to the above-mentioned description, if the frequency of the specific data pattern PAT is higher, an interval between timings for generating the latch signal LAT and time  $T_1$  becomes shorter. Therefore, the problem of a long transmission waiting time is solved. Additionally, the timing of generating the latch signal LAT can be designed according to the situation of the system loading in any time since the clock signal CLK and the input data signal DAT are controlled by the micro-controller 308. For this reason, the operating frequency of the clock signal CLK is not limited by a minimum input frequency compared to the prior art. Consequently, the control circuit 300 has better elasticity and reliability than conventional systems. Finally, the control circuit 300 only needs four electronic lines for providing the power supply voltage level  $V_{CC}$  and ground voltage level  $V_{SS}$ , and for transmitting the input data signal DAT and the clock signal CLK to control the LED device 302. Please note that the shift register unit 312, latch register unit 314, LED driving circuit 316, and the latch signal generator 318 can be integrated within a single chip for achieving the goal of circuit integration.

**[0013]** Please note that any scheme for controlling the LED device 302 according to the input data signal DAT and the clock signal CLK obeys the spirit of the present invention. Detecting the specific data pattern PAT is not limited to only detecting the rising edges of the specific data pattern PAT. For example, detecting falling edges of the specific data pattern PAT is also suitable. In addition, detecting the rising edges of the specific data pattern PAT is not limited to only detecting eight rising edges of the specific data pattern PAT; any method of detecting the specific data pattern PAT (e.g. counting signal level transitions or measuring the frequency of the specific data

pattern) is suitable for the present invention. Therefore, the waveform of the specific data pattern PAT can be designed according to different requirements, i.e. any designed signal can be used as the specific data pattern PAT, providing it can be detected by the latch signal generator 318. Any modification of the specific data pattern PAT also belongs to the scope of the present invention. Moreover, in this embodiment, the latch registers latch data registered in the corresponding shift registers when receiving the latch signal LAT having the low-level pulse. However, the latch registers can also latch data registered in the corresponding shift registers when receiving a rising edge of the latch signal LAT or a falling edge of the latch signal LAT. This also obeys the spirit of the present invention.

**[0014]** For completeness, various aspects of the invention are set out in the following numbered clauses:

1. A control circuit for controlling a Light Emitting Diode (LED) device according to an input data signal and a clock signal, comprising:

at least a first control module, comprising:

a shift register unit, coupled to the input data signal and the clock signal, the shift register unit comprising at least a shift register triggered by the clock signal to buffer data transmitted in the input data signal;  
a latch register unit, coupled to the shift register unit, the latch register unit comprising at least a latch register triggered by a latch signal to latch data buffered by the shift register;  
an LED driving circuit, coupled to the latch register unit, for driving the LED device according to data latched by the latch register; and  
a latch signal generator, coupled to the input data signal and the clock signal, for generating the latch signal according to the input data signal and the clock signal.

2. The control circuit of clause 1, further comprising:

a micro-controller, coupled to the first control module, for generating the input data signal and the clock signal, where the micro-controller stuffs the input data signal with a specific data pattern and controls the clock signal to remain at a specific logic level during a predetermined time;

wherein the latch signal generator generates the latch signal when detecting that the clock signal remains at the specific logic level and the specific data pattern exists in the input data signal.

3. The control circuit of clause 2, wherein the latch signal generator counts at least a specific number of signal edges corresponding to at least one edge type in the input data signal to detect the specific data pattern when the clock signal remains at the specific logic level during the predetermined time, and the latch signal generator generates the latch signal when the number of signal edges reaches a predetermined value.

4. The control circuit of clause 2, wherein the micro-controller fills the specific data pattern into the input data signal after a driving data and controls the clock signal to remain at the specific logic level after the driving data is transmitted completely.

5. The control circuit of clause 2, being coupled to a second control module serially connected to the first control module, wherein the first control module further comprises:

a multiplexer, coupled to the shift register unit and the input data signal, for selectively outputting data buffered in the shift register unit or the input data signal to be an input data signal of the second control module.

6. The control circuit of clause 5, wherein the multiplexer chooses to transmit the input data signal into the second control module directly after the clock signal remains at the specific logic level, and the multiplexer chooses to transmit data buffered in the shift register unit into the second control module after the latch signal generator generates the latch signal.

7. The control circuit of clause 6, wherein the latch signal generator outputs a selection control signal to the multiplexer during the predetermined time that the clock signal remains at the specific logic level for controlling the multiplexer to transmit the input data signal into the second control module directly.

8. The control circuit of clause 5, wherein the first control module further comprises:

a first output buffer, coupled to the multiplexer, for buffering an output of the multiplexer transmitted to the second control module; and  
a second output buffer, coupled to the clock signal, for buffering the clock signal transmitted to the second control module.

9. The control circuit of clause 1, wherein the shift register unit, the latch register unit, the LED driving circuit, and the latch signal generator are integrated in an integrated circuit.

10. The control circuit of clause 1, utilizing only four

electronic lines for providing a power supply voltage, a ground voltage, the input data signal, and the clock signal to control the LED device.

5 **[0015]** All combinations and sub-combinations of the above-described features also belong to the invention.

## Claims

10

1. A control circuit (300) for controlling a Light Emitting Diode (LED) device (302) according to an input data signal and a clock signal, **characterized by:**

15

at least a first control module (304), comprising:

20

a shift register unit (312), coupled to the input data signal and the clock signal, the shift register unit (312) comprising at least a shift register (320a, 320b, 320c) triggered by the clock signal to buffer data transmitted in the input data signal;

25

a latch register unit (314), coupled to the shift register unit (312), the latch register unit (314) comprising at least a latch register (322a, 322b, 322c) triggered by a latch signal to latch data buffered by the shift register;

30

an LED driving circuit (316), coupled to the latch register unit (314), for driving the LED device (302) according to data latched by the latch register (322a, 322b, 322c); and  
a latch signal generator (318), coupled to the input data signal and the clock signal, for generating the latch signal according to the input data signal and the clock signal.

35

2. The control circuit (300) of claim 1, **characterized in that** the control circuit (300) further comprises:

40

a micro-controller (308), coupled to the first control module (304), for generating the input data signal and the clock signal, where the micro-controller (308) stuffs the input data signal with a specific data pattern and controls the clock signal to remain at a specific logic level during a predetermined time; wherein the latch signal generator (318) generates the latch signal when detecting that the clock signal remains at the specific logic level and the specific data pattern exists in the input data signal.

45

50

3. The control circuit (300) of claim 2, **characterized in that** the latch signal generator (318) counts at least a specific number of signal edges corresponding to at least one edge type in the input data signal to detect the specific data pattern when the clock signal remains at the specific logic level during the

55

predetermined time, and the latch signal generator (318) generates the latch signal when the number of signal edges reaches a predetermined value.

4. The control circuit (300) of claim 2, **characterized in that** the micro-controller (318) fills the specific data pattern into the input data signal after a driving data and controls the clock signal to remain at the specific logic level after the driving data is transmitted completely.

5. The control circuit (300) of claim 2, **characterized in that** the control circuit (300) is coupled to a second control module (306) serially connected to the first control module (304), and the first control module (304) further comprises:

a multiplexer (319), coupled to the shift register unit (312) and the input data signal, for selectively outputting data buffered in the shift register unit (312) or the input data signal to be an input data signal of the second control module (306).

6. The control circuit (300) of claim 5, **characterized in that** the multiplexer (319) chooses to transmit the input data signal into the second control module (306) directly after the clock signal remains at the specific logic level, and the multiplexer (319) chooses to transmit data buffered in the shift register unit (312) into the second control module (306) after the latch signal generator (318) generates the latch signal.

7. The control circuit (300) of claim 6, **characterized in that** the latch signal generator (318) outputs a selection control signal to the multiplexer (319) during the predetermined time that the clock signal remains at the specific logic level for controlling the multiplexer (319) to transmit the input data signal into the second control module (306) directly.

8. The control circuit (300) of claim 5, **characterized in that** the first control module (304) further comprises:

a first output buffer (321), coupled to the multiplexer (319), for buffering an output of the multiplexer (319) transmitted to the second control module (306); and

a second output buffer (323), coupled to the clock signal, for buffering the clock signal transmitted to the second control module (306).

9. The control circuit (300) of claim 1, **characterized in that** the shift register unit (312), the latch register unit (314), the LED driving circuit (316), and the latch signal generator (318) are integrated in an integrated circuit.

10. The control circuit (300) of claim 1, **characterized in that** the control circuit (300) utilizes only four electronic lines for providing a power supply voltage, a ground voltage, the input data signal, and the clock signal to control the LED device (302).

## Patentansprüche

1. Eine Steuerschaltung (300) zum Steuern einer Leuchtdioden- (LED-) Vorrichtung (302) gemäß einem Eingangsdatensignal und einem Taktsignal, gekennzeichnet durch:

mindestens ein erstes Steuermodul (304), aufweisend:

eine Schieberegistereinheit (312), die mit dem Eingangsdatensignal und dem Taktsignal verbunden ist, wobei die Schieberegistereinheit (312) mindestens ein Schieberegister (320a, 320b, 320c) aufweist, welches durch das Taktsignal ausgelöst wird, um in dem Eingangsdatensignal übertragene Daten zwischenzuspeichern;

eine Latchregistereinheit (314), die mit der Schieberegistereinheit (312) verbunden ist, wobei die Latchregistereinheit (314) mindestens ein Latchregister (322a, 322b, 322c) aufweist, welches durch ein Latchsignal ausgelöst wird, um durch das Schieberegister zwischengespeicherte Daten zu speichern;

eine LED-Treiberschaltung (316), die mit der Latchregistereinheit (314) verbunden ist, zum Treiben der LED-Vorrichtung (302) gemäß Daten, die durch das Latchregister (322a, 322b, 322c) gespeichert sind; und einen Latchsignalgenerator (318), der mit dem Eingangsdatensignal und dem Taktsignal verbunden ist, zum Erzeugen des Latchsignals gemäß dem Eingangsdatensignal und dem Taktsignal.

2. Steuerschaltung (300) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die Steuerschaltung (300) weiter aufweist:

einen Microcontroller (308), der mit dem ersten Steuermodul (304) verbunden ist, zum Erzeugen des Eingangsdatensignals und des Taktsignals, wobei der Microcontroller (308) das Eingangsdatensignal mit einem bestimmten Muster auffüllt und das Taktsignal steuert, während einer vorbestimmten Zeit auf einem bestimmten logischen Pegel zu bleiben; wobei der Latchsignalgenerator (318) das Latchsignal erzeugt, wenn erkannt wird, dass das Taktsignal auf dem

bestimmten logischen Pegel bleibt und das bestimmte Datenmuster in dem Eingangsdatensignal vorkommt.

3. Steuerschaltung (300) gemäß Anspruch 2, **dadurch gekennzeichnet, dass** der Latchsignalgenerator (318) mindestens eine bestimmte Anzahl von Signalfanken, die zu mindestens einer Flankenart korrespondieren, in dem Eingangsdatensignal zählt, um das bestimmte Datenmuster zu erkennen, wenn das Taktsignal während der vorbestimmten Zeit auf dem bestimmten logischen Pegel bleibt, und der Latchsignalgenerator (318) das Latchsignal erzeugt, wenn die Anzahl der Signalfanken einen vorbestimmten Wert erreicht.

4. Steuerschaltung (300) gemäß Anspruch 2, **dadurch gekennzeichnet, dass** der Microcontroller (318) das bestimmte Datenmuster nach einem Treiberdatum in das Eingangsdatensignal einfügt und das Taktsignal steuert, auf dem bestimmten logischen Pegel zu bleiben, nachdem das Treiberdatum vollständig übertragen ist.

5. Steuerschaltung (300) gemäß Anspruch 2, **dadurch gekennzeichnet, dass** die Steuerschaltung (300) mit einem zweiten Steuermodul (306) verbunden ist, das seriell mit dem ersten Steuermodul (304) verbunden ist, und das erste Steuermodul (304) weiter aufweist:

einen Multiplexer (319), der mit der Schieberegistereinheit (312) und dem Eingangsdatensignal verbunden ist, um wahlweise Daten, die in der Schieberegistereinheit (312) zwischengespeichert sind, oder das Eingangsdatensignal auszugeben, um ein Eingangsdatensignal für das zweite Steuermodul (306) zu sein.

6. Steuerschaltung (300) gemäß Anspruch 5, **dadurch gekennzeichnet, dass** der Multiplexer (319), unmittelbar nachdem das Taktsignal auf dem bestimmten logischen Pegel bleibt, das Eingangsdatensignal zum Übertragen in das zweite Steuermodul (306) auswählt, und der Multiplexer (319) in der Schieberegistereinheit (312) zwischengespeicherte Daten zum Übertragen in das zweite Steuermodul (306) auswählt, nachdem der Latchsignalgenerator (318) das Latchsignal erzeugt hat.

7. Steuerschaltung (300) gemäß Anspruch 6, **dadurch gekennzeichnet, dass** der Latchsignalgenerator (318) während der vorbestimmten Zeit, in der das Taktsignal auf dem bestimmten logischen Pegel bleibt, ein Auswahlsteuersignal an den Multiplexer (319) ausgibt, um den Multiplexer (319) zu steuern, das Eingangsdatensignal direkt in das zweite Steuermodul (306) zu übertragen.

8. Steuerschaltung (300) gemäß Anspruch 5, **dadurch gekennzeichnet, dass** das erste Steuermodul (304) weiter aufweist:

einen ersten Ausgangspuffer (321), der mit dem Multiplexer (319) verbunden ist, zum Puffern eines Ausgangssignals des Multiplexers (319), das an das zweite Steuermodul (306) übertragen wird; und

einen zweiten Ausgangspuffer (323), der mit dem Taktsignal verbunden ist, zum Puffern des Taktsignals, das an das zweite Steuermodul (306) übertragen wird.

9. Steuerschaltung (300) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die Schieberegistereinheit (312), die Latchregistereinheit (314), die LED-Treiberschaltung (316) und der Latchsignalgenerator (318) in einer integrierten Schaltung integriert sind.

10. Steuerschaltung (300) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die Steuerschaltung (300) nur vier elektrische Leitungen zum Bereitstellen einer Versorgungsspannung, einer Massespannung, des Eingangsdatensignals und des Taktsignals verwendet, um die LED-Vorrichtung (302) zu steuern.

## Revendications

1. Circuit de commande (300) pour commander un dispositif de Diode Électroluminescente (LED) (302) en fonction d'un signal de données d'entrée et d'un signal d'horloge, **caractérisé par** :

au moins un premier module de commande (304), comprenant :

une unité de registre à décalage (312), couplée au signal de données d'entrée et au signal d'horloge, l'unité de registre à décalage (312) comprenant au moins un registre à décalage (320a, 320b, 320c) déclenché par le signal d'horloge pour mettre en mémoire tampon des données transmises dans le signal de données d'entrée ;

une unité de registre à verrouillage (314), couplée à l'unité de registre à décalage (312), l'unité de registre à verrouillage (314) comprenant au moins un registre à verrouillage (322a, 322b, 322c) déclenché par un signal de verrouillage pour verrouiller des données mises en mémoire tampon par le registre à décalage ;

un circuit d'attaque de LED (316), couplé à l'unité de registre à verrouillage (314), pour attaquer le dispositif LED (302) en fonction des données verrouillées par le registre à

- verrouillage (322a, 322b, 322c) ; et  
un générateur de signal de verrouillage (318), couplé au signal de données d'entrée et au signal d'horloge, pour générer le signal de verrouillage en fonction du signal de données d'entrée et du signal d'horloge.
2. Circuit de commande (300) de la revendication 1, **caractérisé en ce que** le circuit de commande (300) comprend en outre :
- un microcontrôleur (308), couplé au premier module de commande (304), pour générer le signal de données d'entrée et le signal d'horloge, où le microcontrôleur (308) permet de bourrer le signal de données d'entrée avec un modèle de données spécifique et commande le signal d'horloge de manière à rester à un niveau logique spécifique au cours d'une durée prédéterminée ; dans lequel le générateur de signal de verrouillage (318) génère le signal de verrouillage lorsqu'il détecte que le signal d'horloge reste au niveau logique spécifique et que le modèle de données spécifique existe dans le signal de données d'entrée.
3. Circuit de commande (300) de la revendication 2, **caractérisé en ce que** le générateur de signal de verrouillage (318) compte au moins un nombre spécifique de fronts de signal correspondant à au moins un type de front dans le signal de données d'entrée pour détecter le modèle de données spécifique lorsque le signal d'horloge reste au niveau logique spécifique au cours de la durée prédéterminée, et le générateur de signal de verrouillage (318) génère le signal de verrouillage lorsque le nombre de fronts de signal atteint une valeur prédéterminée.
4. Circuit de commande (300) de la revendication 2, **caractérisé en ce que** le microcontrôleur (318) introduit le modèle de données spécifique dans le signal de données d'entrée après des données d'attaque et commande le signal d'horloge de manière à rester au niveau logique spécifique après que les données d'attaque sont transmises complètement.
5. Circuit de commande (300) de la revendication 2, **caractérisé en ce que** le circuit de commande (300) est couplé à un deuxième module de commande (306) relié en série au premier module de commande (304), et le premier module de commande (304) comprend en outre :
- un multiplexeur (319), couplé à l'unité de registre à décalage (312) et au signal de données d'entrée, pour délivrer en sortie de manière sélective des données mises en mémoire tampon dans l'unité de registre à décalage (312) ou le signal
- de données d'entrée pour être un signal de données d'entrée du deuxième module de commande (306).
6. Circuit de commande (300) de la revendication 5, **caractérisé en ce que** le multiplexeur (319) choisit de transmettre le signal de données d'entrée dans le deuxième module de commande (306) directement après que le signal d'horloge reste au niveau logique spécifique, et le multiplexeur (319) choisit de transmettre des données mises en mémoire tampon dans l'unité de registre à décalage (312) dans le deuxième module de commande (306) après que le générateur de signal de verrouillage (318) génère le signal de verrouillage.
7. Circuit de commande (300) de la revendication 6, **caractérisé en ce que** le générateur de signal de verrouillage (318) délivre en sortie un signal de commande de sélection au multiplexeur (319) au cours de la durée prédéterminée à laquelle le signal d'horloge reste au niveau logique spécifique pour commander le multiplexeur (319) afin de transmettre le signal de données d'entrée dans le deuxième module de commande (306) directement.
8. Circuit de commande (300) de la revendication 5, **caractérisé en ce que** le premier module de commande (304) comprend en outre :
- une première mémoire tampon de sortie (321), couplée au multiplexeur (319), pour mettre en mémoire tampon une sortie du multiplexeur (319) transmise au deuxième module de commande (306) ; et  
une deuxième mémoire tampon de sortie (323), couplée au signal d'horloge, pour mettre en mémoire tampon le signal d'horloge transmis au deuxième module de commande (306).
9. Circuit de commande (300) de la revendication 1, **caractérisé en ce que** l'unité de registre à décalage (312), l'unité de registre à verrouillage (314), le circuit d'attaque de LED (316), et le générateur de signal de verrouillage (318) sont intégrés dans un circuit intégré.
10. Circuit de commande (300) de la revendication 1, **caractérisé en ce que** le circuit de commande (300) utilise seulement quatre lignes électroniques pour fournir une tension d'alimentation électrique, une tension de terre, le signal de données d'entrée, et le signal d'horloge pour commander le dispositif de LED (302).

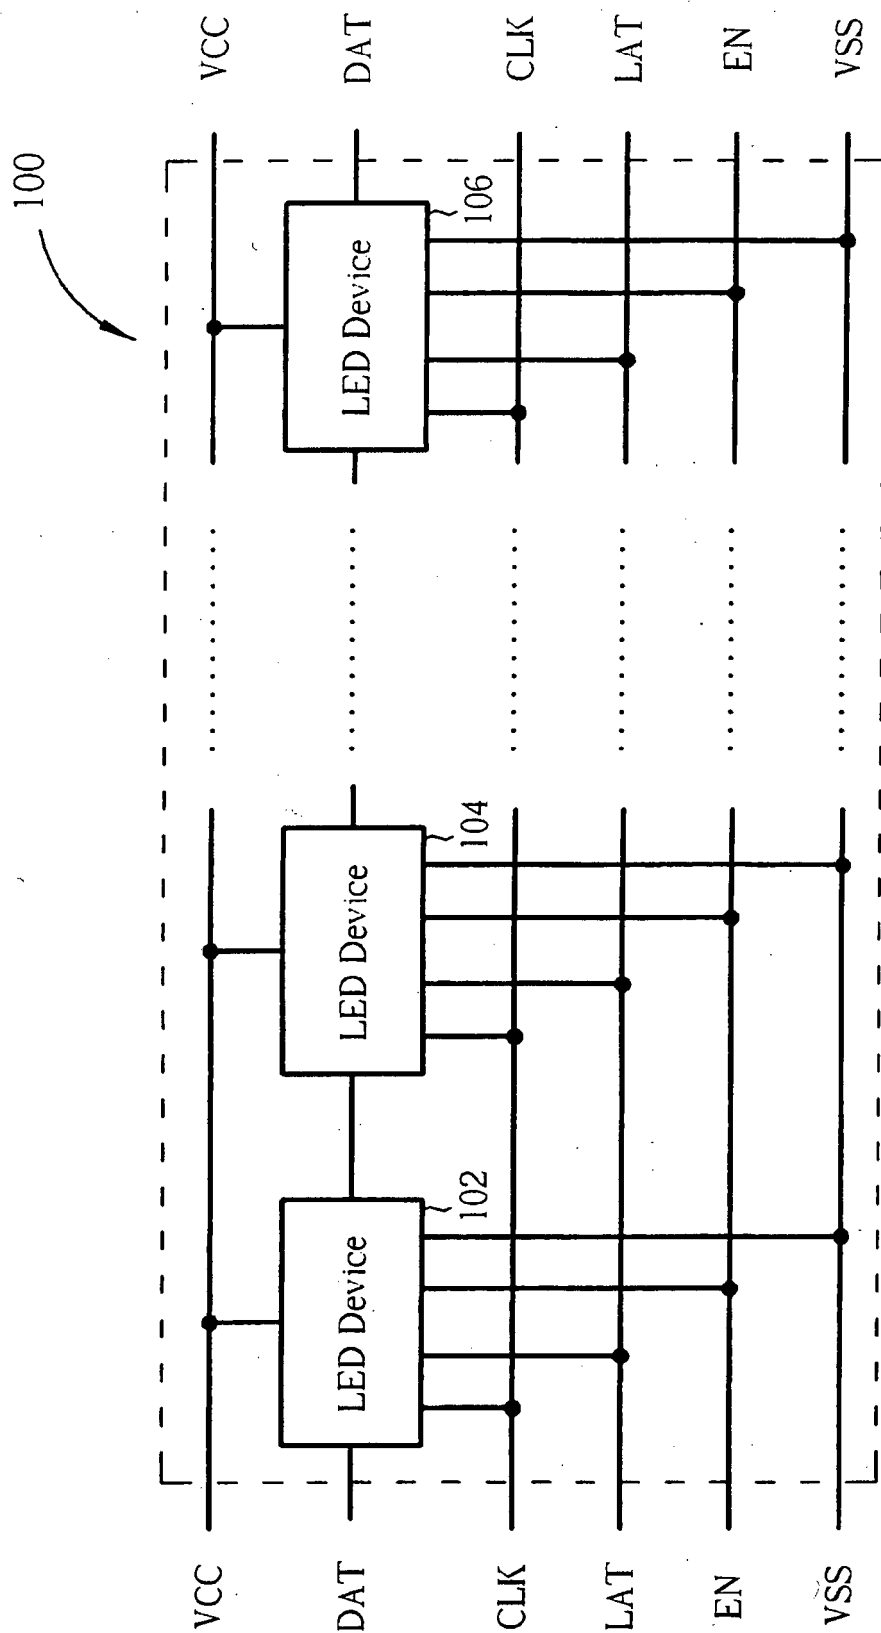


Fig. 1 Prior Art

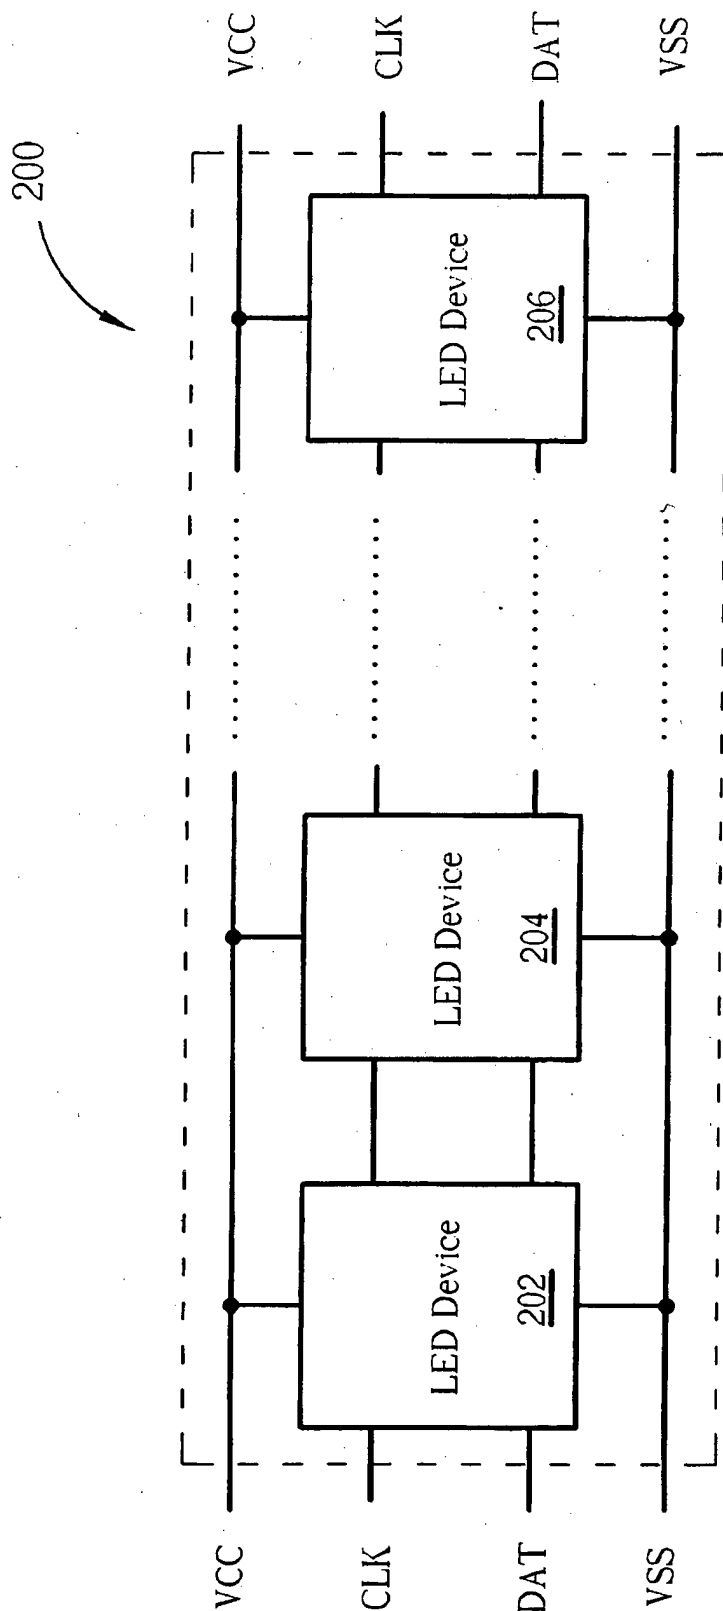


Fig. 2 Prior Art

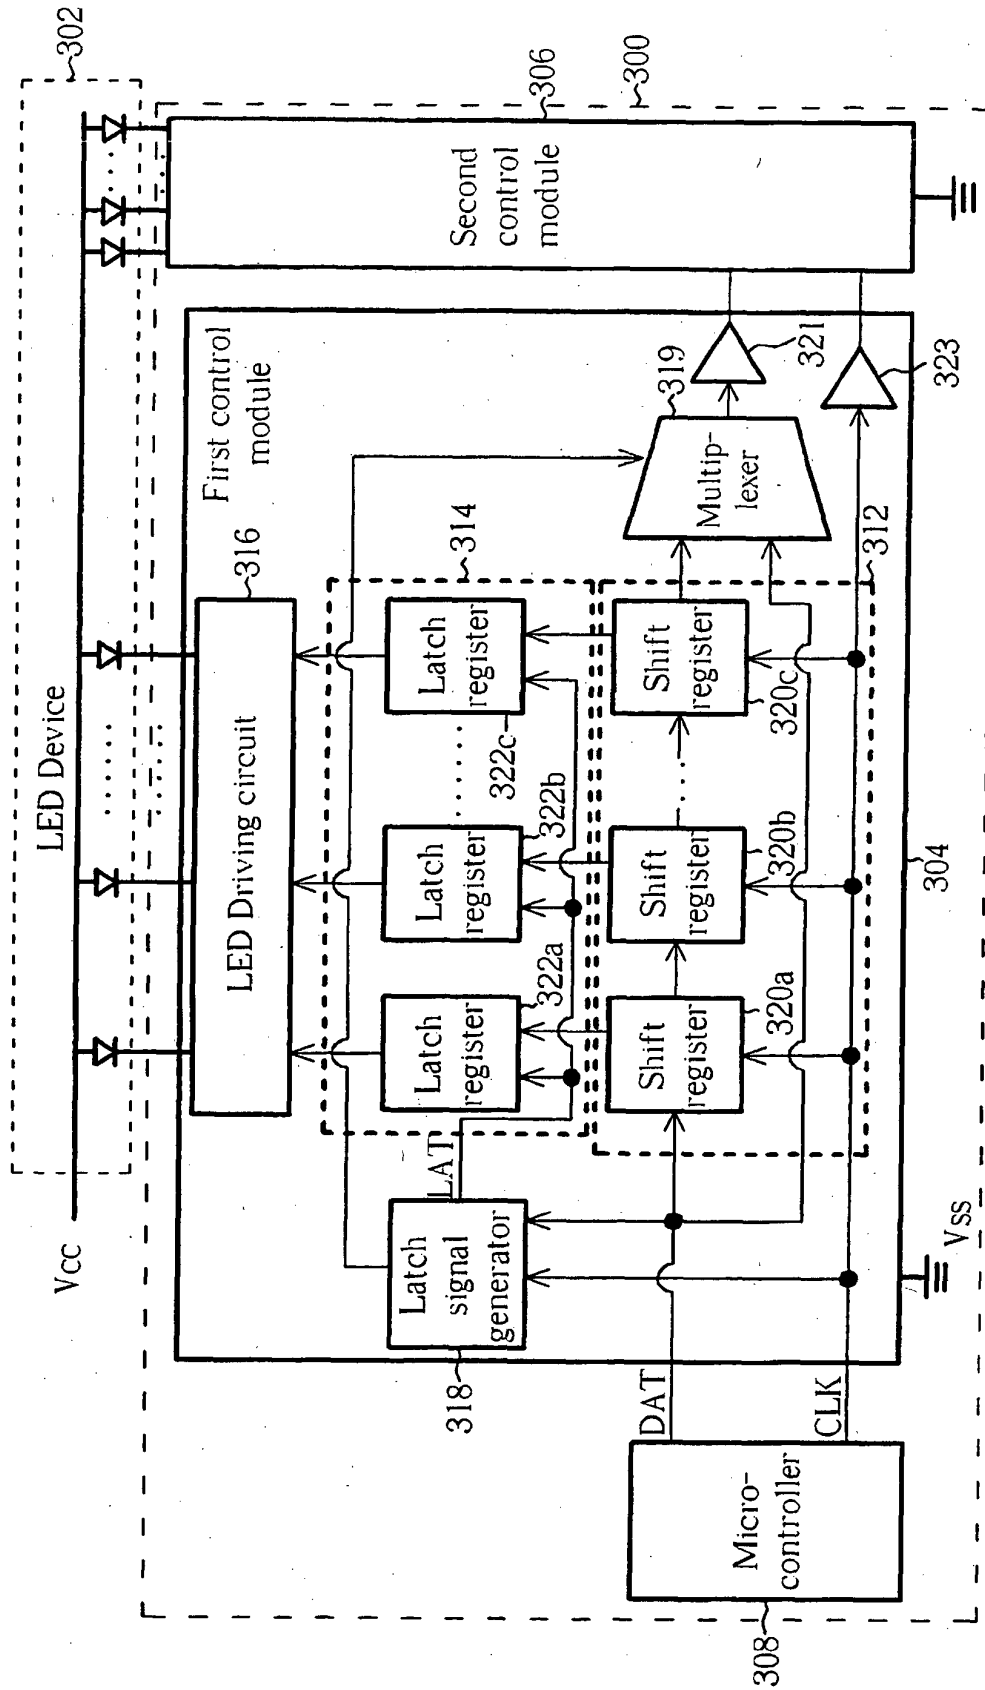


Fig. 3

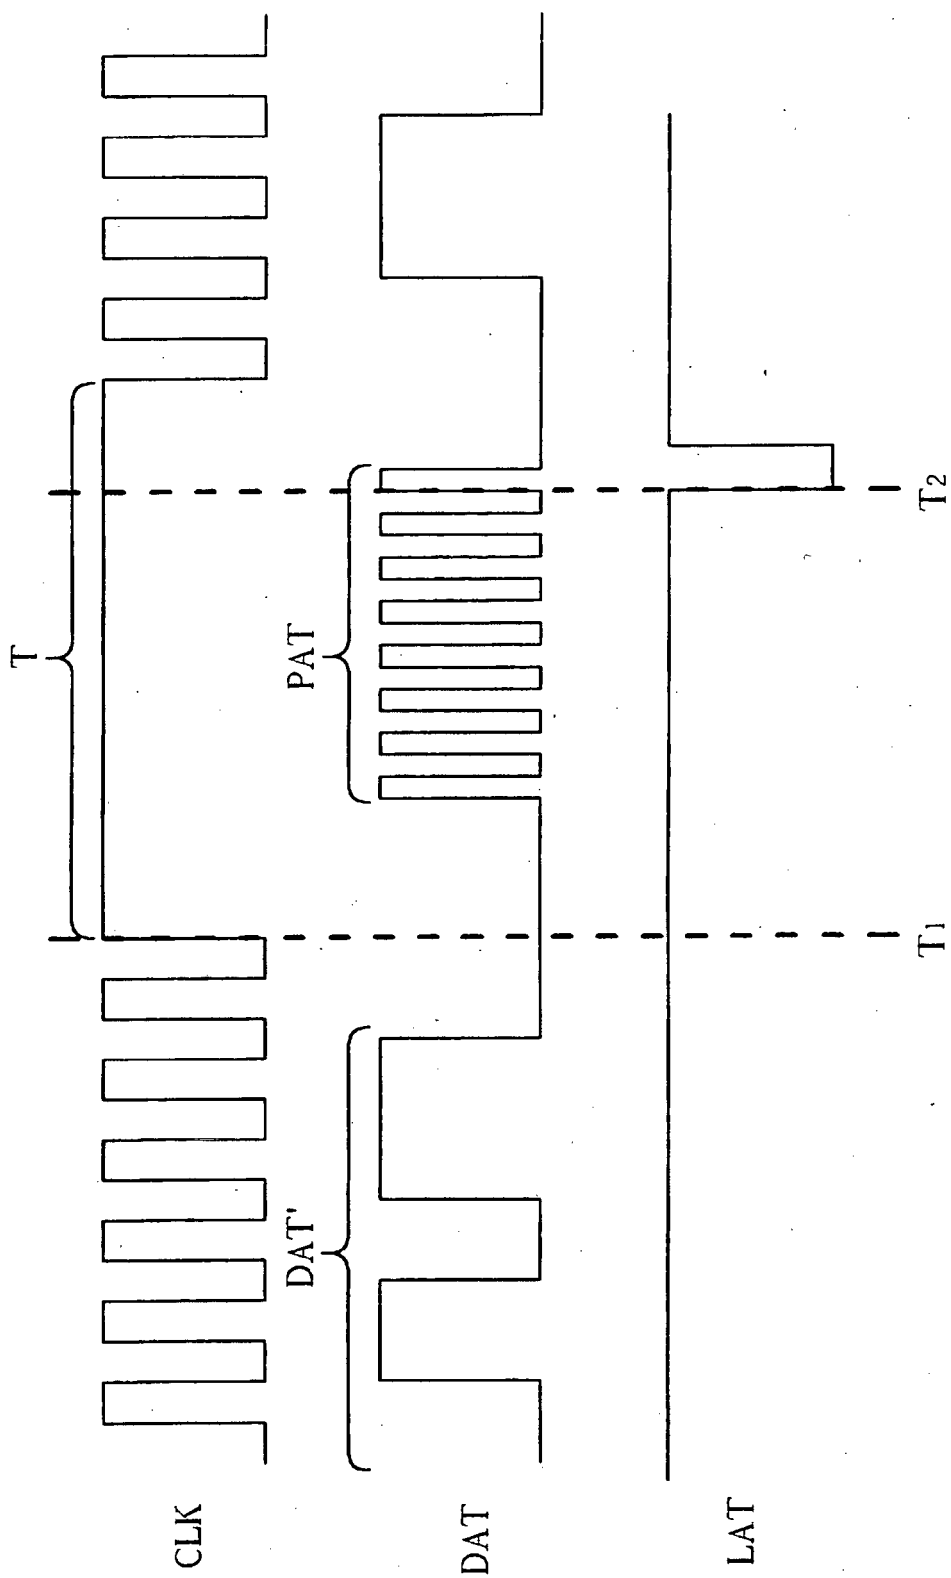


Fig. 4

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20060125425 A1 [0007]