



(51) International Patent Classification:
G06T 7/40 (2006.01)

(21) International Application Number:
PCT/IB20 11/002286

(22) International Filing Date:
6 July 2011 (06.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/361,868 6 July 2010 (06.07.2010) US
12/883,192 16 September 2010 (16.09.2010) US

(71) Applicant (for all designated States except US): DIGI-
TALOPTICS CORPORATION EUROPE LIMITED
[IE/IE]; Cliona, Building One, Parkmore East Business
Park, Ballybrit, Galway (IE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MICHROWSKI,
Guy [IL/IL]; Tel Aviv Development Center, 6 Habarzel

Street, 69710 Tel-aviv (IL). SHABTAY, Gal [IL/IL]; Tel
Aviv Development Center, 6 Habarzel Street, 69710 Tel-
aviv (IL). COHEN, Noy [IL/US]; 53 Dudley Lane, APT
103, Stanford, California 93405 (US). BEN-ELIEZER,
Eyal [IL/IL]; Tel Aviv Development Center, 6 Habarzel
Street, 69710 Tel-aviv (IL). GOLDENBERG, Ephraim
[IL/IL]; Tel Aviv Development Center, 6 Habarzel Street,
69710 Tel-aviv (IL).

(74) Agents: BOYCE, Conor et al; c/o FRKelly, 27 Clyde
Road, Ballsbridge, Dublin 4 (IE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SCENE BACKGROUND BLURRING INCLUDING RANGE MEASUREMENT

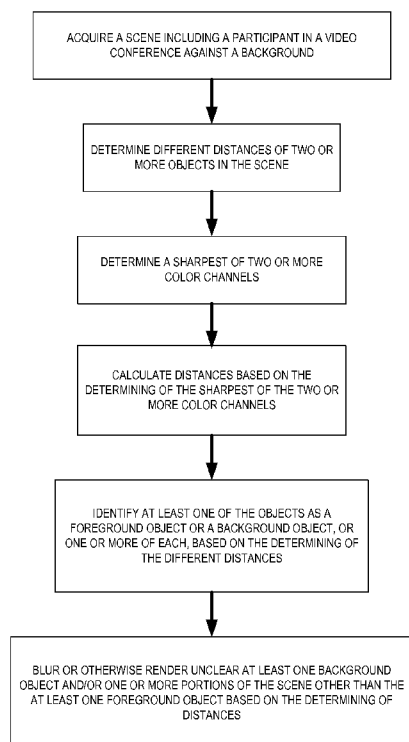


Figure 2

(57) Abstract: Different distances of two or more objects in a scene being cap-
tured in a video conference are determined by determining a sharpest of two or
more color channels and calculating distances based on the determining of the
sharpest of the two or more color channels. At least one of the objects is identified
as a foreground object or a background object, or one or more of each, based on
the determining of the different distances. The technique involves blurring or oth-
erwise rendering unclear at least one background object or one or more portions of
the scene other than the at least one foreground object, or combinations thereof,
also based on the determining of distances.



- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

SCENE BACKGROUND BLURRING INCLUDING RANGE MEASUREMENT

PRIORITY

This application claims priority to U.S. application serial number 12/883,192, filed September
5 16, 2010 and to U.S. provisional patent application number 61/361,868, filed July 6, 2010.

BACKGROUND

Video conference calls can be made using a wide variety of devices, such as office video
conferencing systems, personal computers, and telephone devices including mobile telephones.

10 Thus, video conferencing can be used at many different locations, including company offices,
private residences, Internet cafes and even on the street. The many possibilities and varied
locations for holding video conferences can create a problem since the video conference camera
reveals the location of the participant to all those watching or participating in the video
conference. For instance, if a video conference call is made from a participant's private place of
15 residence, the participant's privacy may be compromised since the participant's private
environment and members of his or her household may be exposed and photographed during the
video conference call. It is desired to be able to maintain the privacy and confidentiality of other
commercial issues that may inadvertently otherwise appear in the background of a video
conference. It is desired to have a technique that ensures that such items will not be revealed or
20 shared during the video conference.

Range measurement is important in several applications, including axial chromatic aberration
correction, surveillance means, and safety means. Active methods for calculating the distance
between an object and a measuring apparatus are usually based on the measurement of the time
25 required for a reflected electro-magnetic or acoustic wave to reach and be measured by
measuring apparatus, e.g., sonar and radar. Active methods of range measurement are
detrimentally affected by physical objects present in the medium between the measuring
apparatus and the object. Current passive methods use an autofocus mechanism. However,
determining the range typically involves varying the focal length by changing lens position,
30 which is not available in camera phones and many other camera-enabled devices.

Digital cameras are usually equipped with iris modules designed to control exposure, which are based on a detection result received from the sensor. Due to size and cost limitations, camera phones usually have fixed apertures and, hence, fixed F numbers. Existing mechanical iris modules are difficult to even incorporate in their simplest form into camera phones due to increased price of optical module, increased form factor since the iris module height is about 1 mm, greater mechanical sensitivity, consumption of electrical power, and complex integration (yield).

Digital cameras are usually equipped with iris modules designed to control exposure, which is based on a detection result received from a sensor. Due to size and cost limitations, camera phones usually have fixed apertures and, hence, fixed F numbers. Mobile phone cameras commonly have apertures that provide F numbers in the range of F/2.4-F/2.8. An advantage of the higher value, F/2.8, is mainly in its image resolution, but a drawback can be low performance under low light conditions. The lower value, F/2.4, compromises depth of focus and image resolution for a faster lens, i.e., better performance under low light conditions. Alternatively, a ND filter may be used to control exposure instead of changing F/#. Several high-end modules address the above-mentioned problems using mechanically adjustable apertures. Incorporating iris modules into camera phones offers a variable F number and achieves multiple advantages, including image quality improvement due to reduced motion blur, improved SNR and improved resolution. In addition, incorporation of iris modules into camera phones can tend to impart a digital still camera like "feel" due to the variable depth of field, i.e. Bokeh effect. Disadvantages of incorporating iris modules into camera phones include the increased price of the optical module, increased form factor due to the iris module height being about 1 mm, greater mechanical sensitivity, consumption of electrical power, and complex integration (yield). It is desired to have a digital iris that enables the user to enjoy the advantages of the mechanical iris without its disadvantages and to experience the "feel" of a digital still camera.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A illustrates a video conference display including a person's face in the foreground and clearly visible background items.

Figure 1B illustrates a video conference display including a person's face, neck and shoulders against a blurred background.

Figure 2 is a flow chart of an exemplary method in accordance with certain embodiments.

5

Figure 3 is a flow chart of an exemplary method in accordance with certain embodiments.

Figure 4 illustrates a digital iris in accordance with certain embodiments.

10 Figure 5 illustrates plots of calculated MTF curves per mm vs. defocus distance for high F/# compared to low F/# for the same focal length.

Figure 6 illustrates a digital iris in accordance with certain embodiments.

15 Figures 7A-7B illustrate plots of calculated MTF curves and through-focus MTF in accordance with certain embodiments.

Figures 8A-8B illustrate depth estimation using knowledge of longitudinal chromatic aberrations in accordance with certain embodiments.

20

Figure 9 illustrates relative sharpness measurements during autofocus convergence in accordance with certain embodiments.

Figure 10 illustrates using depth map to control depth of focus in accordance with certain
25 embodiments.

Figure 11 illustrates an extended depth of field using a digital iris in accordance with certain embodiments.

Figure 12 illustrates an auto focus mode using a digital iris in accordance with certain embodiments.

Figure 13 illustrates a Bokeh effect using a digital iris in accordance with certain embodiments.

Figure 14 illustrates a comparison of the three different modes illustrated in Figures 11-13.

Figure 15 illustrates an extended depth of field using a digital iris in narrow aperture mode in accordance with certain embodiments.

Figure 16 illustrates an auto-focus mode using a digital iris in wide aperture mode with focus at far in accordance with certain embodiments.

Figure 17 illustrates a Bokeh effect using a digital iris in accordance with certain embodiments.

Figure 18 illustrates a comparison of the three different modes illustrated in Figures 15-17.

Figure 19 illustrates extended depth of field using a digital iris in narrow aperture mode in accordance with certain embodiments.

Figure 20 illustrates an auto-focus mode using a digital iris in wide aperture mode with focus at far in accordance with certain embodiments.

Figure 21 illustrates a Bokeh effect using a digital iris in accordance with certain embodiments.

Figure 22 illustrates a comparison of the three different modes illustrated in Figures 19-21.

DETAILED DESCRIPTIONS OF THE EMBODIMENTS

A method is provided to display a participant during a video conference against a blurred or otherwise unclear background. The method according to certain embodiments involves

determining different distances of two or more objects in a scene being captured in video, including performing an auto-focus sweep of the scene. A depth map of the scene is generated based on the auto-focus sweep. At least one of the objects is identified as a foreground object or a background object, or one or more of each, based on the determining of the different distances.

5 The method further involves blurring or otherwise rendering unclear at least one background object and/or one or more portions of the scene other than the at least one foreground object, also based on the determining of distances.

A further method is provided, e.g., as illustrated in the flowchart of Figure 2, to display a participant during a video conference against a blurred or otherwise unclear background. The
10 method includes determining different distances of two or more objects in a scene being captured in video, including determining a sharpest of two or more color channels and calculating distances based on the determining of the sharpest of the two or more color channels. At least one of the objects is identified as a foreground object or a background object, or one or more of each are identified, based on the determining of the different distances. The method further
15 includes blurring or otherwise rendering unclear at least one background object or one or more portions of the scene other than the at least one foreground object, or combinations thereof, also based on the determining of distances.

A face may be detected within the scene and designating as a foreground object. An audio or visual parameter of the face, or both, may be enhanced, such as, e.g., loudness, audio tone, or
20 sound balance of words being spoken by a person associated with the face, or enhancing luminance, color, contrast, or size or location within the scene of the face, or combinations thereof. The method may include recognizing and identifying the face as that of a specific person, and the face may be tagged with a stored identifier. A nearest object may be designated as a foreground object. One or more objects may be designated as background that are at a
25 different distance than a foreground object. A nearest object or a detected face, or both, may be designated as the foreground object. The determining of the different distances may involve use of a fixed focus lens. A portion of the scene other than a foreground object may include a detected and recognized face or other object, and the method may also include determining that the recognized face or other object is private (and, e.g., made subject to being blurred or

6

otherwise rendered unclear). The distances may include a distance between a video camera component and at least one of the two or more objects in the scene. One or more distances may be determined based on applying a face model to a detected face within the scene. The determining of the sharpest of two or more color channel may involve calculating the following:

$$\text{sharpest} = \left\{ j \mid \frac{\sigma_j}{AV_j} = \max \left\{ \frac{\sigma_r}{AV_r}; \frac{\sigma_g}{AV_g}; \frac{\sigma_b}{AV_b} \right\} \right\} \quad (3)$$

5

where AV_i comprise averages of pixels for the three color channels $\{j|r, g, b\}$, and may further involve calculating one or both of the following:

$$\sigma_i = \sqrt{\frac{1}{N} \sum_{\text{pixel} \in i} \sum_{\text{ie } \{R, G, B\}} (i - AV_i)^2} \quad (1)$$

10 Or

$$\sigma_i \cong \frac{1}{N} \sum_{\text{pixel} \in i} \sum_{\text{ie } \{R, G, B\}} |i - AV_i| \quad (2)$$

Another method is provided, e.g., as illustrated in the flowchart of Figure 3, to display a participant during a video conference against a blurred or otherwise unclear background. A face is detected within a digitally-acquired image. A face model is applied to the face. A distance of

the face from a video camera component is determined based on the applying of the face model. At least one portion of the scene other than the face is identified as including a background object that is a different distance from the video camera component than the face. The background object is blurring or otherwise rendered unclear.

- 5 An audio or visual parameter of the face, or both, may be enhanced, such as, e.g., loudness, audio tone, or sound balance of words being spoken by a person associated with the face, or enhancing luminance, color, contrast, or size or location within the scene of the face, or combinations thereof. The method may include recognizing and identifying the face as that of a specific person, and the face may be tagged with a stored identifier.
- 10 The method may further include increasing a size of the face or centering the face, or both. Any one or more of brightness, luminance contrast, color or color balance of the face may be enhanced. The determining of the distance of the face from the video camera component may include determining one or more distances and/or other geometric characteristics of detected face features. The determining of the distance of the face from the video camera component may
- 15 involve determining a sharpest of two or more color channels and calculating the distance based on the determining of the sharpest of the two or more color channels. The determining of the different distances may involve use of a fixed focus lens.

The determining of the sharpest of two or more color channel may involve calculating the following:

$$sharpest = \left\{ j \mid \frac{\sigma_j}{AV_j} = \max \left\{ \frac{\sigma_r}{AV_r}; \frac{\sigma_g}{AV_g}; \frac{\sigma_b}{AV_b} \right\} \right\} \quad (3)$$

- 20 where AV_i comprise averages of pixels for the three color channels $\{j|r, g, b\}$, and may further involve calculating one or both of the following:

8

$$\sigma_i = \sqrt{\frac{1}{N} \sum_{pixel \in i} \sum_{ie \{R, G, B\}} (i - AV_i)^2} \quad (1)$$

where

Or

$$\sigma_i \cong \frac{1}{N} \sum_{pixel \in i} \sum_{ie \{R, G, B\}} |i - AV_i| \quad (2)$$

where

5

One or more computer-readable storage media having code embedded therein for programming a
 10 processor to perform any of the methods described herein.

A video conferencing apparatus is also provided, including a video camera including a lens, and
 an image sensor, a microphone, a display, a processor, one or more networking connectors, and a
 memory having code embedded therein for programming a processor to perform any of the
 15 methods described herein.

SCENE BACKGROUND BLURRING

A method is provided that enables video conference participants to be seen in focus while the
 rest of the scene around them is blurred. Thus, participants can maintain their privacy and
 20 confidentiality of other commercial issues they do not wish to reveal or share. The method may
 include face identification of the participant and an estimation of the distance between the

participant and the lens, or alternatively, the identification of those objects that are at a distance from the participant.

The method advantageously permits the maintenance of privacy of participants in video conferences, safeguards confidential information, and enables such calls to be made from any location without divulging the exact nature of the location from which the call is being made. Another advantage is the ability to use an existing face identification software package.

Embodiments are described that solve the above-mentioned problems of maintaining privacy in video conferencing, namely scene background blurring or SBB. Scene background blurring is based on the real-time estimation of the distance between objects in the scene. Specifically, the method may involve estimating the distance between the camera lens and the location of the person participating in the video conference call. Using image processing and the knowledge of this distance, it is possible to blur all other details that are located at a greater (and/or lesser) distance from the lens (see Figures 1A-1B). In order to estimate the distance between the video conference participant and the camera lens, face identification software may be used to identify the participant's location and then to estimate the participant's distance from the lens.

Alternatively, the system can determine which of the objects are farther away from the lens than the participant. Thus, it is possible to selectively blur the information that is farther away (and/or closer) than the participant. The distance from the lens to the participant or the relative distance between the objects and the participant can be determined using various optical properties as described hereinbelow. For example, a method that uses the relation between the focal length and the dispersion of the lens material, i.e., the variation of the refractive index, n , with the wavelength of light, may be used. The different position of the focal plane for different colors enables a determination of the distance of an object from the lens. It is also possible to utilize the eyes distance which is known to be 6-7 cm, or another geometric face feature or human profile feature, for estimating the relative distance of the participant. Other optical properties can also be used to determine which objects are farther away than the person identified. This can be achieved as part of an optical system that includes both image processing and the SBB or as part of a software system that can be implemented flexibly in cameras used for video conferencing.

Sharp, selective imaging of the participant or any other element of the image may be provided in a video conference, while the more distant environment may be blurred (and/or closer objects like desk items and the like). The method may involve face identification of the participant and
5 an estimation of the distance between the participant and the camera lens, or alternatively, identification of objects that are at a different distance from the participant.

RANGE MEASUREMENT APPLIED ON A BAYER IMAGE PATTERN

The dependence of focal length on the dispersion of the lens material of a camera is used in
10 certain embodiments. This dependence has to do with the variation of the refractive index n with wavelengths of light. The variation of the focal length for different colors provides a sharp channel (one of the R, G or B channels), while the rest of the channels are blurry. This enables at least a rough determination of the distance of an object from the camera lens.

Unlike active methods of range measurement, passive methods are less affected by physical
15 objects (such as window panes or trees) that may be present in the medium between the measuring apparatus and the object. Moreover, passive methods tend to be more accurate. It is also advantageous for a method that it is to be part of an ISP chain to work directly on a Bayer Image pattern, because there is significantly more flexibility in the placement of the block within the ISP chain. Moreover, ranges can be roughly determined with a fixed focus lens. A passive
20 method for range measurement in accordance with certain embodiments uses dispersion means, i.e., involves finding a sharpest channel between the R, G, and B color channels.

Embodiments are described herein of passive range measurement techniques that operate on a Bayer pattern, thus combining both advantages. In one example, a 9x9 Bayer window may be used, and three colors (R, G, and B) may be used, although different windows and different
25 combinations of two or more colors may be used. In one embodiment, an expansion to four colors (R, Gr, Gb, B) may be involved, whereby Gr are the green pixels in a red line and Gb are the green pixels in a blue line.

Three averages may be calculated for the red, green, and blue pixels respectively (AV_r, AV_g, AV_b). A measure of the amount of information may be calculated. Such a measure may be obtained, for instance, without loss of generality, by calculating the standard deviation or the average absolute deviation of each color (see Equations 1 and 2 below). Then, a sharpness measure may be derived, e.g., defined by σ_j/AV_j and the sharpest color is chosen (see Equation 3 below). For far objects, the vast majority of results from Step 3 are 'j=R' while for close objects, the vast majority of results are 'j=B'. If most of the results are 'j=G', the object is located at mid-range.

The range measurement can be refined even further since the transition from close to mid-range and then to far-range may be gradual. Therefore it is expected that in regions that are between close- and mid-range, a mixture of j=B and j=G will be obtained, while in regions between mid-range and far-range, a mixture of j=B and j=G will predominate. It is therefore possible to apply statistics, (the probability that a certain color channel will be the sharpest within a certain region), in order to more accurately determine the distance between an object and the lens.

The following equations may be used in a passive method for range measurement applied directly on a BAYER image pattern. The three averages of the red green and blue pixels may be respectively referred to as (AV_r, AV_g, AV_b).

The measure for the amount of information may be given, without loss of generality, by the following examples:

$$\sigma_i = \sqrt{\frac{1}{N} \sum_{\substack{\text{pixels } i \\ \text{where } ie \{R, G, B\}}} (i - AV_i)^2} \quad (1)$$

$$\sigma_i \cong \frac{1}{N} \sum_{\text{pixels } i} \sum_{j \in \{R, G, B\}} |i - AV_j| \quad (2)$$

The sharpest channel may be provided by:

$$\text{sharpest} = \left\{ j \mid \frac{\sigma_j}{AV_j} = \max \left\{ \frac{\sigma_r}{AV_r}, \frac{\sigma_g}{AV_g}, \frac{\sigma_b}{AV_b} \right\} \right\} \quad (3)$$

DIGITAL IRIS

5 A digital iris system in accordance with certain embodiments can achieve the effect of variable F/#. In addition, the system takes advantage of low F/# in low-light captures, creating effects such as the Bokeh effect (which generally is not achieved with a typical mechanical camera phone iris of F/2.4-4.8). This system enables users to enhance their experience by controlling depth of field. Additional advantages of the system include lower cost, lower module height,
10 lower complexity, and greater robustness.

The digital iris enables the user to enjoy, on a device that does not include a mechanical iris, the advantages of a device that includes a mechanical iris without its disadvantages, and to experience the "feel" of a digital still camera. Those advantages include better performance in low-light environments, elimination of motion blur, and improved signal-to-noise ratio (SNR).
15 Additional advantages of the system include lower cost, lower module height, lower complexity, and greater robustness.

A digital iris is provided in accordance with certain embodiments that acts with respect to a subject image, and performs advantageous digital exposure of one or more desired portions of the subject to be photographed. Advantages include better performance in low-light
20 environments, elimination of motion blur, and improved SNR. Under good light conditions, a large depth of field is obtained, which can be controlled by the user. Users' experiences can be

enhanced by the Bokeh effect, whereby the background of a photo is out of focus, while a blur effect has a unique aesthetic quality.

Two distinct possibilities for lens design are related to their $F/\#$ values, which are closely connected to the exposure value. The F number is defined as the focal length divided by the effective aperture diameter (f_{eff}/D). Each f -stop (exposure value) halves the light intensity relative to the previous stop. For the case of Low- $F/\#$ lenses (wide aperture), advantages include short exposure time, less motion blur, high resolution at focus, reduced depth of field - Bokeh effect, and improved low-light performance (less noise for the same exposure time). In certain embodiments, disadvantages such as tighter manufacturing tolerances, flare due to manufacturing errors, and diminished depth of field (with the lack of AF technology) are reduced or eliminated. For the case of high- $F/\#$ lenses (narrow aperture), advantages include large depth of field, improved low-frequency behavior (contrast), reduced flare, finer saturated edges, and relaxed manufacturing tolerances. In certain embodiments, disadvantages such as long exposure time, motion blur, and low-light noise performance are reduced or eliminated.

A digital iris in accordance with certain embodiments is illustrated at Figure 4, which shows a calculated through-focus MTF at a spatial frequency of 180 cycles per mm versus defocus distance (in units of millimeters) for high $F/\#$ compared to low $F/\#$ both for the same focal length. In Figure 4, the arrows superimposed on the through-focus MTF correspond to a delimit range of defocus distance over which the MTF is greater than 0.15. The defocus distances include the depth of field over which the range of defocus distances provide a contrast that is sufficient for resolving the image. Figure 4 exhibits an enhanced depth of focus for the case of the higher $F/\#$. Our results show that the DOF depends linearly on the $F/\#$. Figure 5 shows plots of calculated MTF curves for the imaging lens design for object distance of about 1m at different light wavelengths. The obtained resolution limit is found to be inversely proportional to the $F/\#$ of the lens. The lower $F/\#$ lenses reach higher spatial resolution, but field dependency is larger (mainly the tangential components).

As an example, a digital iris may be addressed for an F number of $F/2.4$ in certain embodiments. The lens may be designed with a wide aperture lens, i.e. low F number of $F/2.4$, where the

reduced DOF (see Figure 4) is extended to F/4.8 using a technique such as that described at US patent application serial number PCT/US08/12670, filed November 7, 2008 based on US provisional serial number 61/002,262, filed November 7, 2007, entitled "CUSTOMIZED DEPTH OF FIELD OPTICAL SYSTEM". Figure 6 illustrates a simplified block diagram of a digital iris architecture in accordance with this exemplary embodiment. As illustrated at Figure 6, the digital iris comprises in this example three independent components: a lens 2 with low F/# and extended depth of field (EDoF) standard mechanical AF engine 4, and Image processing algorithm block 6 with pre-processing 8, depth estimation 10 that generates a depth map of the image. Also, a focus engine 12 may be used to support the EDoF and also to provide a digital aesthetic blur function, and post-processing 14.

Figure 7A-7B illustrates plots of calculated MTF curves and the through-focus MTFs in accordance with certain embodiments. Figures 7A-7B show that for F/2.4 the calculated through-focus MTF at a spatial frequency of 180 cycles per mm the MTF is extended compared to that shown in Figure 4. The corresponding delimit range of defocus distance over which the MTF is greater than 0.15, becomes in accordance with certain embodiments almost equal to that of F/4.8 lens as is illustrated at Figure 4. The calculated MTF curves keep the value that enables high spatial resolution as illustrated at Figure 5 for the lens with F/2.4. Estimation depth is useful for the digital iris application. Under good light conditions, a large depth of field may be obtained, which can be controlled by the user. For each pixel used for the depth map, it can be determined where it is in focus and what the distance of it is from a finally selected focus plan. This distance will determine how much blur to introduce to this pixel when the digital post processing is applied. In the present embodiment of the digital iris, the focus plane may be determined by auto focus (AF) engine 4 (see Figure 6), according to user preference.

One example approach that may be used for generating the depth map include using the focal length dependence on the dispersion of the lens material i.e. the variation of the refractive index, n , with the wavelength of light. The different position of the focal plan for different colors

enables a determination of a range of an object from the lens, see Figures 8A and 8B. This technique is passive and operates on the BAYER pattern, i.e., the three colors (R, G and B).

Another example approach uses relative sharpness measurements during auto-focus (AF) convergence (with subsampled images), and is illustrated at Figure 9. Statistics are collected at
5 22 in this embodiment at multiple locations over the field of view (FOV). Best-focus positions for each region of interest (ROI) are determined at 24. A depth map is generated at 26.

Sharpness statistics may be collected on a preview stream during an AF convergence process at various image locations. A best focus position may be estimated for each location by comparing sharpness at different focus positions. After AF converges, the depth map may be calculated
10 from the focus position measurements.

Figure 10 shows as an example a depth map 26 that is used to control depth of focus (DOF) via focus engine 28 in accordance with an embodiment of the digital iris system. The depth map information may be input to the focus engine 28 along with user-selected F/#. This focus engine may be used to enhance sharpness or artistically blur the image to achieve a desired effect. Wide-
15 DOF (large F/#) may be generated by applying a standard focus algorithm. Narrow-DOF (small F/#) may be generated by somewhat blurring objects outside the focus plane. Bokeh effect is achieved 30 by applying large blur.

Figures 11-22 now illustrate multiple examples of images taken with three modules. Figures 11-13 present images obtained with three different modules, whereas Figure 14 presents a
20 comparison between them which displays the advantage of the digital iris with EDoF. Figures 15-17 present a comparison between narrow apertures, a wide aperture and the Bokeh effect. Figure 18 presents a comparison between them which displays the advantage of the digital iris with EDoF. Figures 18-21 present another comparison to emphasize the advantage of the digital iris. Figure 22 presents a comparison between them which displays the advantage of the digital
25 iris with EDoF.

The digital iris may be based on a low F/# lens design with extended depth of field. Digital processing modes of low F/# mode to reduce the depth of field of the lens and large F/# mode to keep the extended depth of field, as well as Bokeh mode are all advantageous. An estimation

depth map may be generated by relative sharpness measurements during AF convergence and/or based on the focal length dependence on the dispersion of the lens material.

In certain embodiments, a method of displaying a participant during a video conference against a blurred or otherwise unclear background is provided. Distances are determined of two or more
5 objects in a scene being captured in video. The method may include identifying at least one of the objects as a foreground object based on the determining of distances, and/or blurring or otherwise rendering unclear one or more portions of the scene other than the at least one foreground object also based on the determining of distances.

In certain embodiments, a method of displaying a participant during a video conference against a
10 blurred or otherwise unclear background is further provided. Distances are determined of two or more objects in a scene being captured in video. The method may further include identifying at least one of the objects as a background object based on the determining of distances, and/or blurring or otherwise rendering unclear the at least one background object based on the determining of distances.

15 A face may be detected within the scene and designated as a foreground object. A nearest object may be designated as a foreground object. One or more objects may be designated as background that are at a different distance than a foreground object. A nearest object or a detected face, or both, may be designated as foreground objects. The determining distances may involve determining a sharpest of two or more color channels and calculating distances based on
20 the determining of the sharpest of the two or more color channels.

While exemplary drawings and specific embodiments of the present invention have been described and illustrated, it is to be understood that that the scope of the present invention is not to be limited to the particular embodiments discussed. Thus, the embodiments shall be regarded as illustrative rather than restrictive, and it should be understood that variations may be made in
25 those embodiments by workers skilled in the arts without departing from the scope of the present invention.

In addition, in methods that may be performed according to preferred embodiments herein and that may have been described above, the operations have been described in selected typographical sequences. However, the sequences have been selected and so ordered for typographical convenience and are not intended to imply any particular order for performing the
5 operations, except for those where a particular order may be expressly set forth or where those of ordinary skill in the art may deem a particular order to be necessary.

What is claimed is:

1. A method of displaying a participant during a video conference against a blurred or otherwise unclear background, comprising:

- 5 using an imaging device including an optic, an image sensor and a processor;
 determining different distances of two or more objects in a scene being captured in video, including determining a sharpest of two or more color channels and calculating distances based on the determining of the sharpest of the two or more color channels;
 identifying at least one of the objects as a foreground object or a background object, or
10 one or more of each, based on the determining of the different distances; and
 blurring or otherwise rendering unclear at least one background object or one or more portions of the scene other than the at least one foreground object, or combinations thereof, also based on the determining of distances.

- 15 2. The method of claim 1, further comprising detecting a face within the scene and designating the face as a foreground object.

3. The method of any of claims 2, further comprising enhancing loudness, audio tone, or sound balance of words being spoken by a person associated with the face, or enhancing luminance,
20 color, contrast, or size or location within the scene of the face, or combinations thereof.

4. The method of any of claims 2-3, further comprising tagging the face with a stored identifier.

5. The method of any of the above claims, further comprising designating a nearest object as a
25 foreground object.

6. The method of any of the above claims, further comprising designating one or more objects as background that are at a different distance than a foreground object.

7. The method of any of the above claims, further comprising performing an auto-focus sweep of the scene and generating a depth map of the scene based on the auto-focus sweep.

8. The method of any of the above claims, wherein the determining of the different distances
5 comprises using a fixed focus lens.

9. The method of any of the above claims, wherein a portion of the scene other than a foreground object comprises a detected and recognized face or other object, and the method further comprises determining that the recognized face or other object is private.

10. The method of any of the above claims, wherein said distances comprises a distance between a video camera component and at least one of the two or more objects in the scene.

11. The method of any of the above claims, further comprising determining a sharpest of two or
15 more color channels and calculating distances based on the determining of the sharpest of the two or more color channels.

12. The method of claim 11, wherein the determining of the sharpest of two or more color channel comprises calculating the following:

$$sharpest = \left\{ j \mid \frac{\sigma_j}{AV_j} = \max \left\{ \frac{\sigma_r}{AV_r}, \frac{\sigma_g}{AV_g}, \frac{\sigma_b}{AV_b} \right\} \right\} \quad (3)$$

Where AV_i comprise averages of pixels for the three color channels $\{j|r, g, b\}$

13. The method of claim 11, wherein the determining of the sharpest of two or more color channel further comprises calculating the following:

$$\sigma_i = \sqrt{\frac{1}{N} \sum_{\text{pixel} \in i} \sum_{\text{ie } \{R, G, B\}} (i - AV_i)^2} \quad (1)$$

Or

$$\sigma_i \cong \frac{1}{N} \sum_{\text{pixel} \in i} \sum_{\text{ie } \{R, G, B\}} |i - AV_i| \quad (2)$$

14. One or more computer-readable storage media having code embedded therein for programming a processor to perform the method of any of the above claims.

15. A video conferencing apparatus, comprising:

a video camera including a lens, and an image sensor;

a microphone;

a display;

a processor;


one or more networking connectors; and

one or more computer-readable storage media having code embedded therein for programming a processor to perform the method of any of the above claims.


1 / 14

SBB – Scene Background Blurring Feature**SBB Off****Figure 1A****SBB on****Figure 1B**

2 / 14

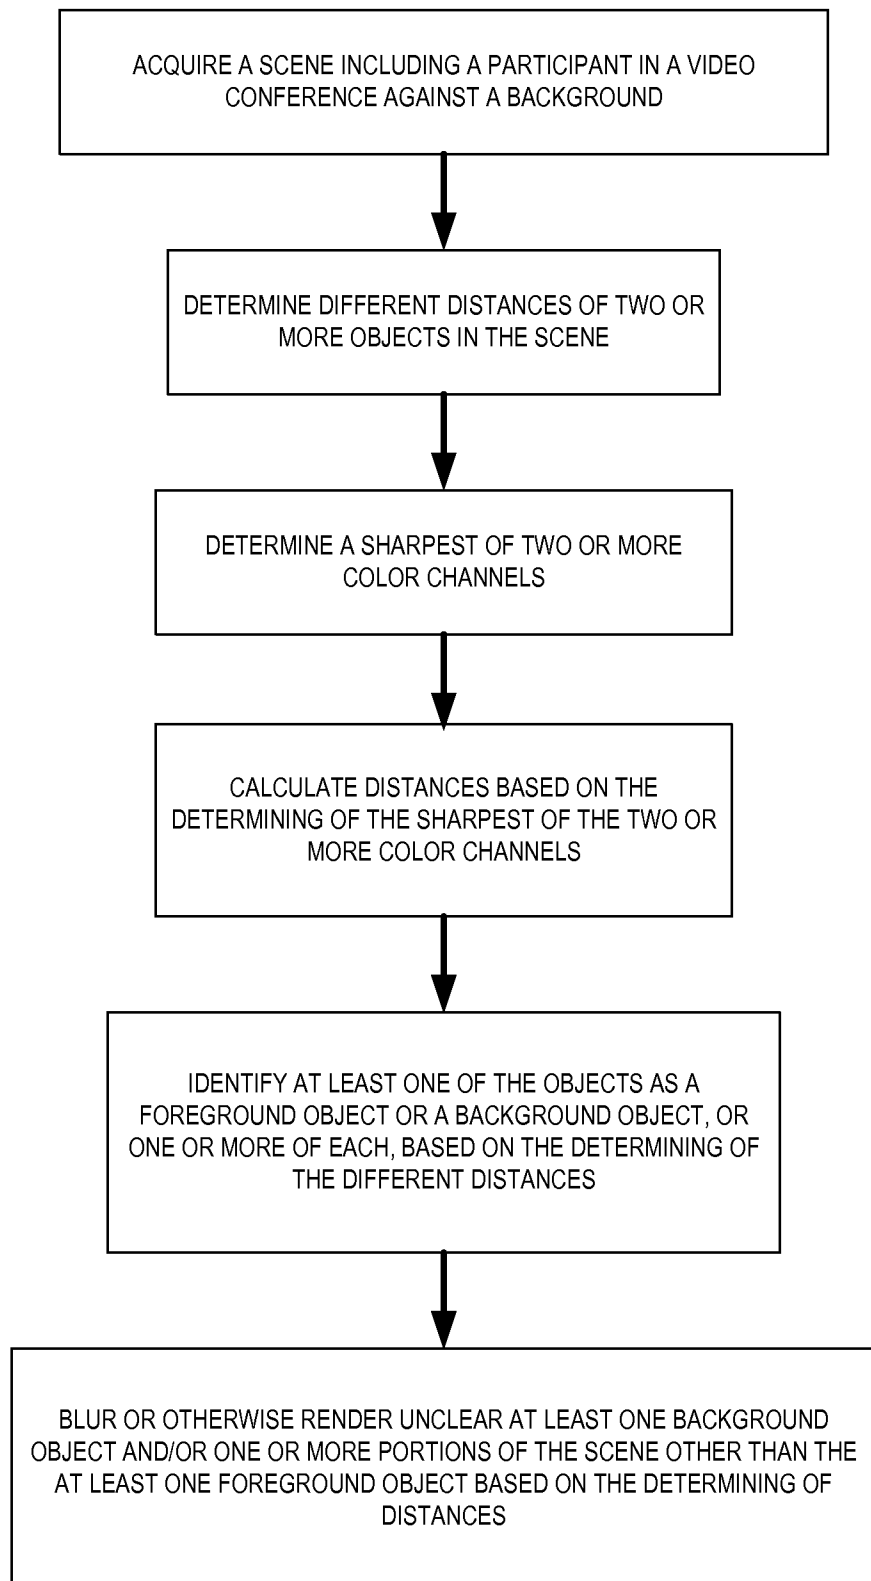**Figure 2**

3 / 14

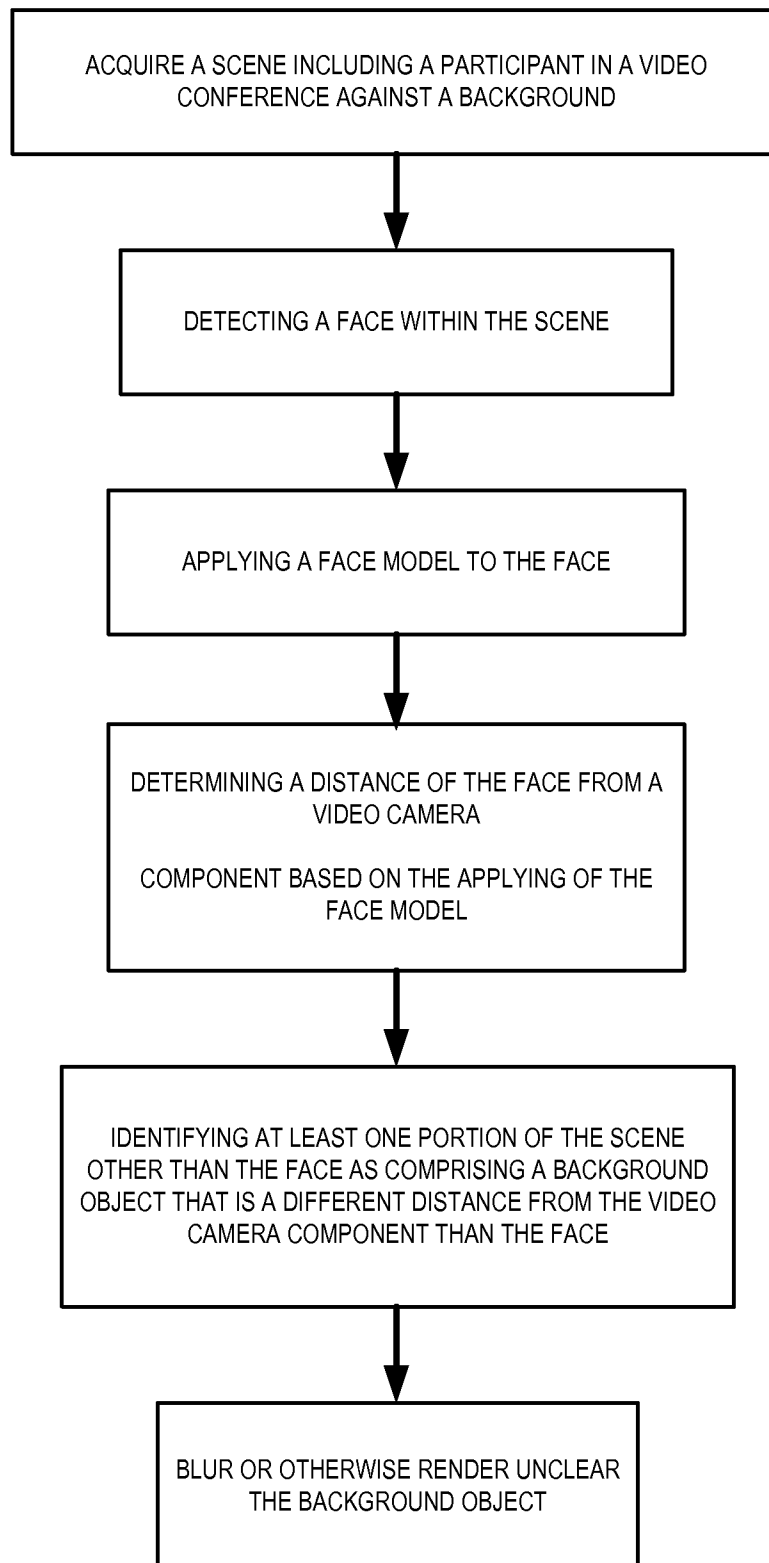**Figure 3**

4 / 14

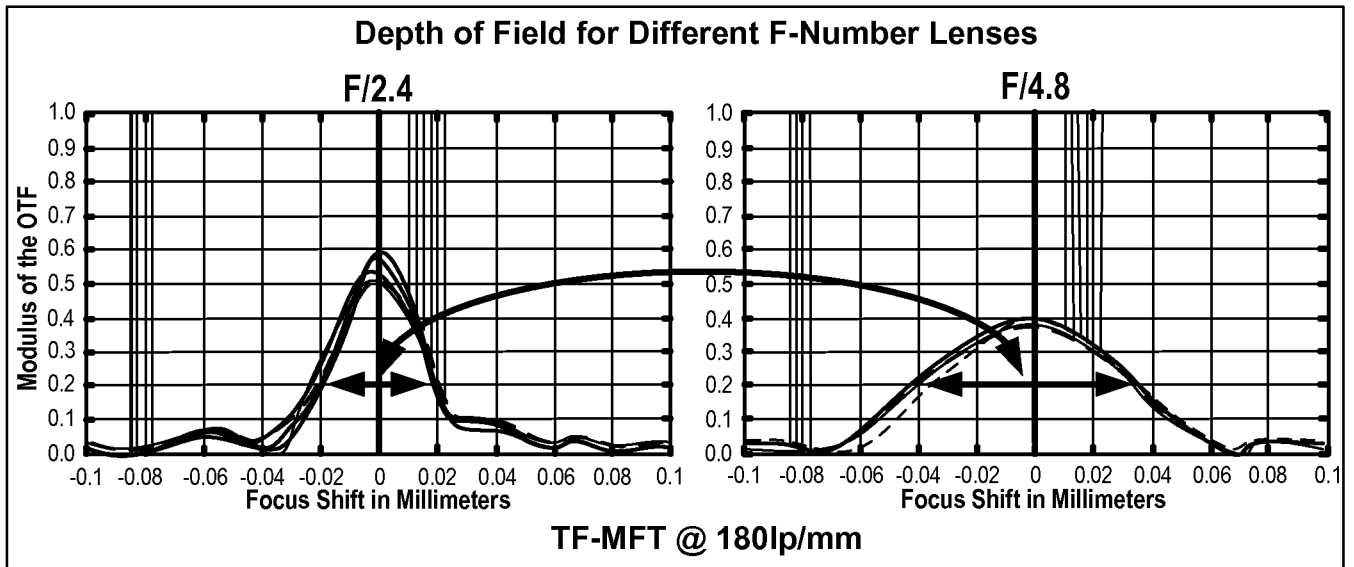


Figure 4

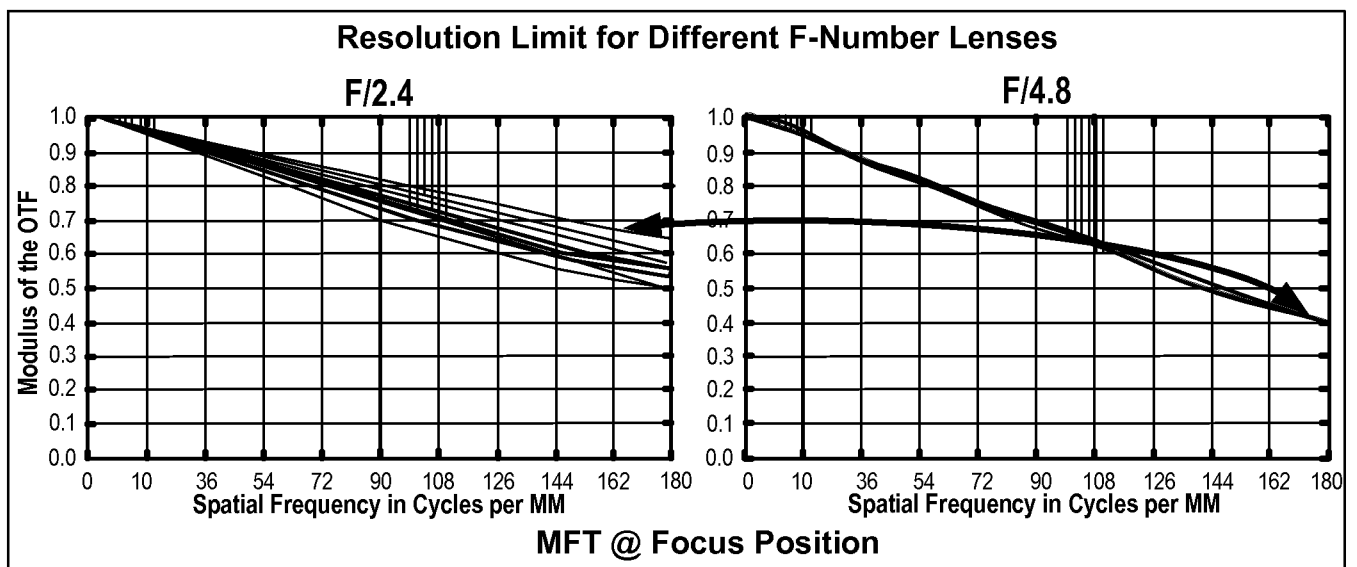
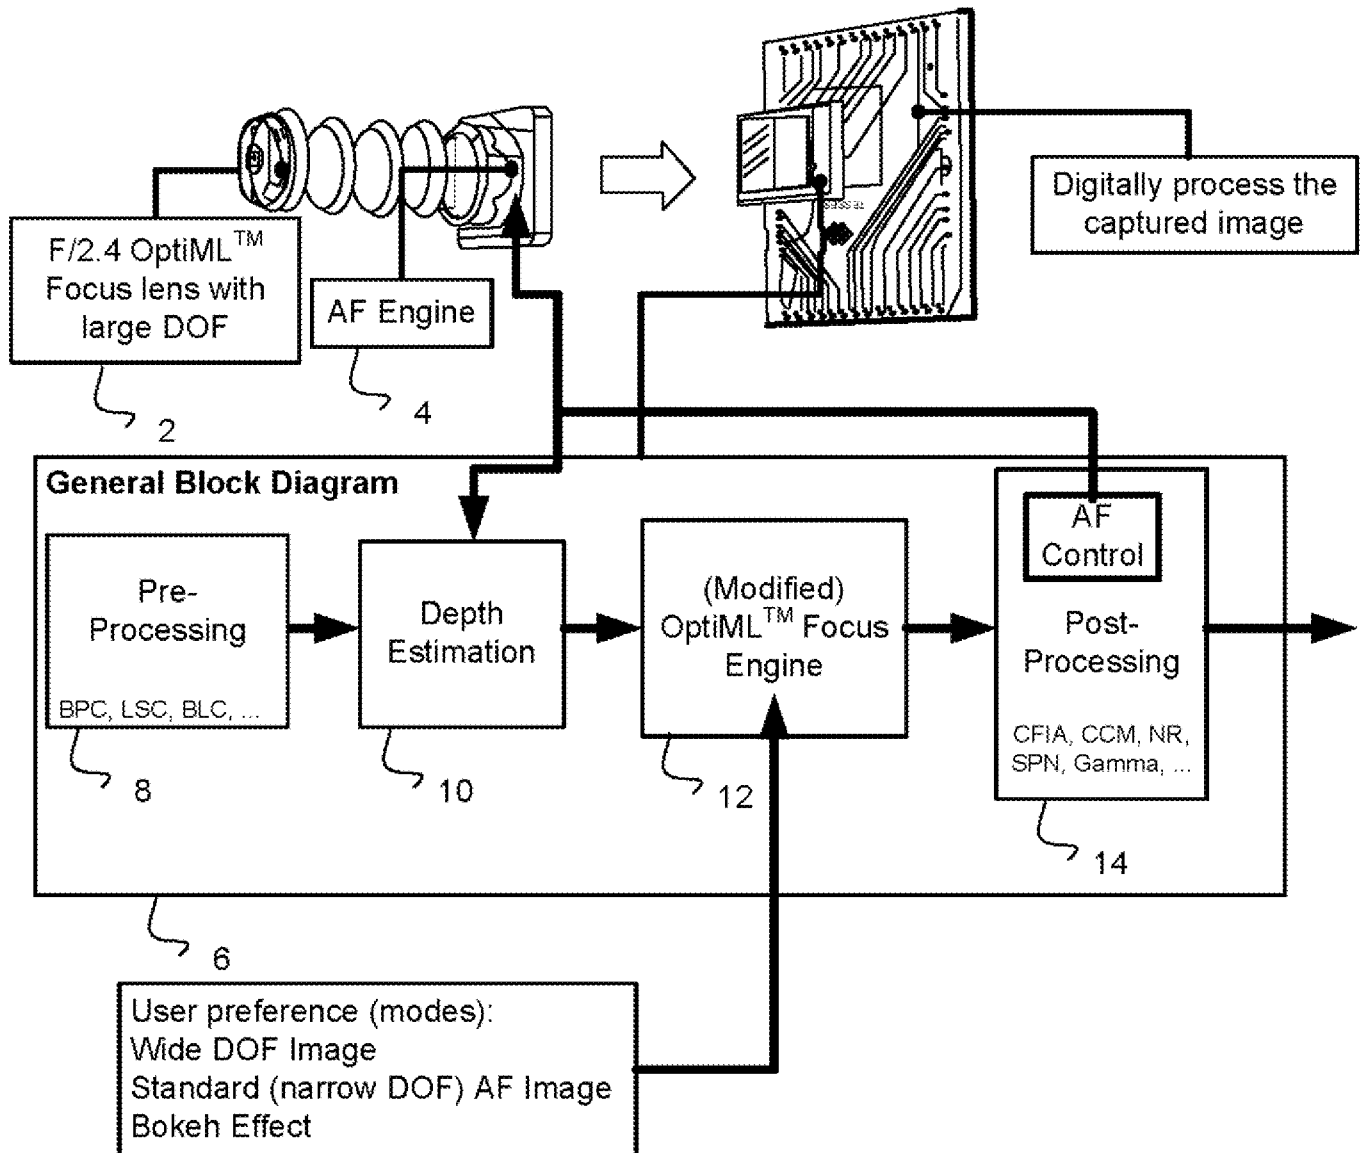
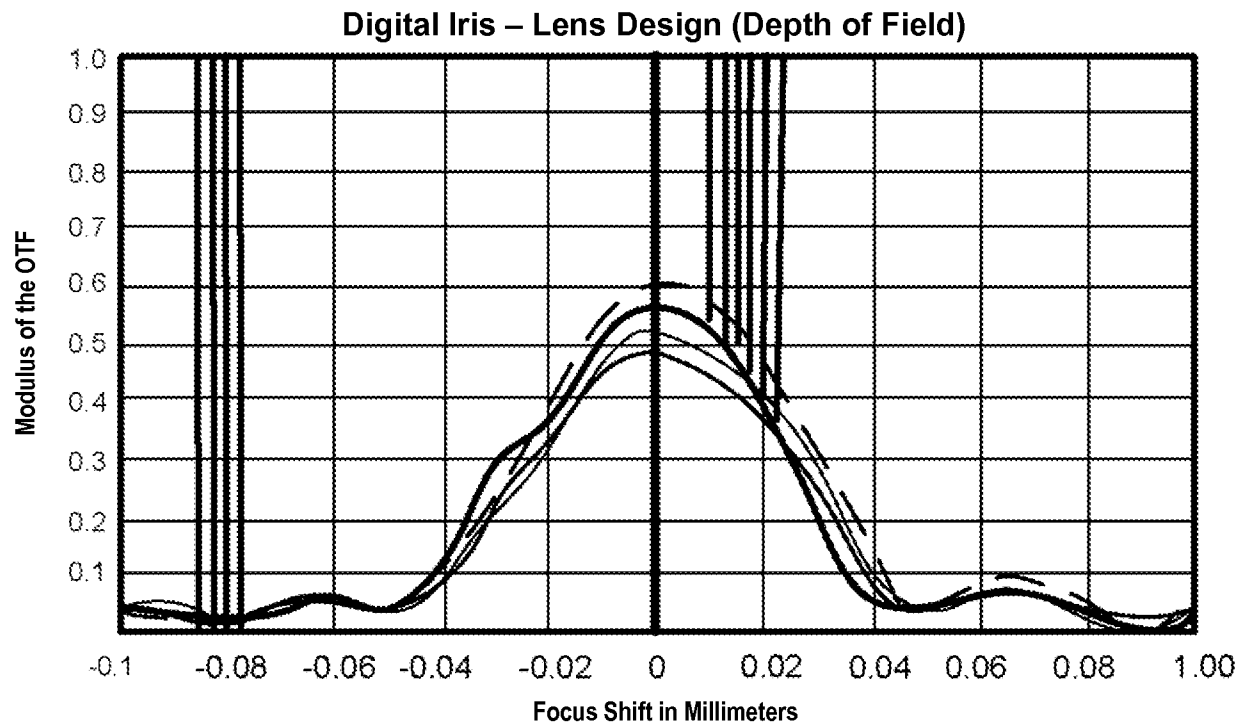
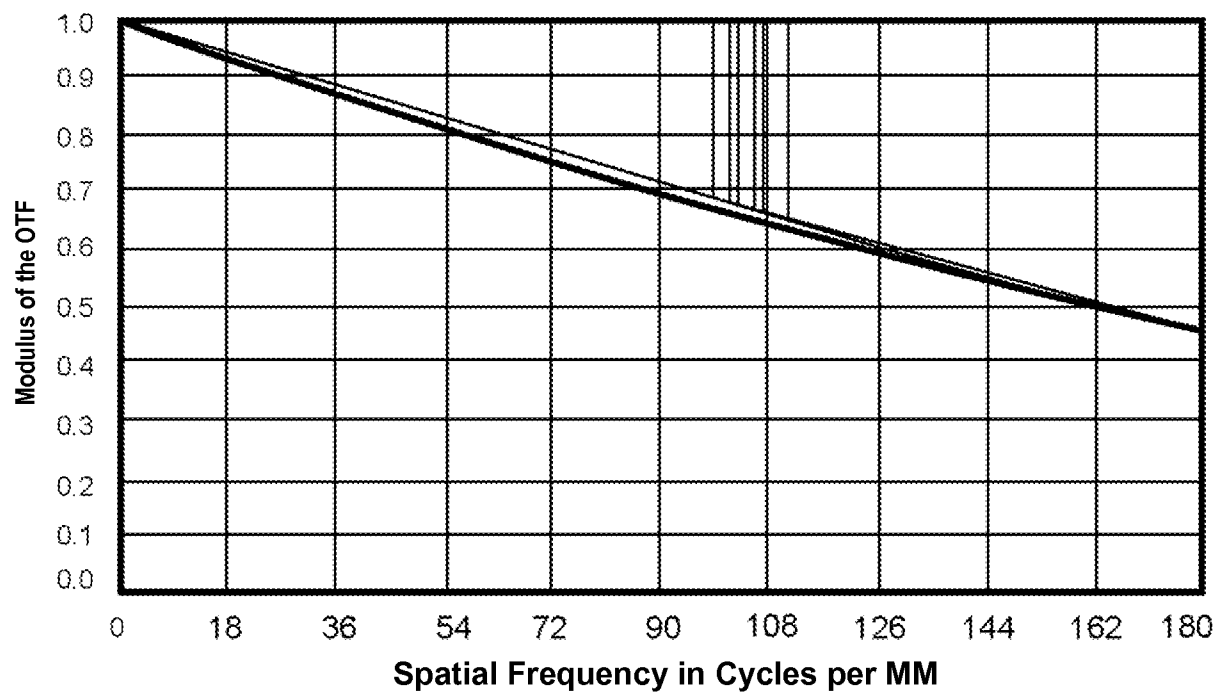


Figure 5



5 / 14

Digital Iris – Proposed System Architecture**Figure 6**

6 / 14

**Figure 7A****Figure 7A**

7 / 14

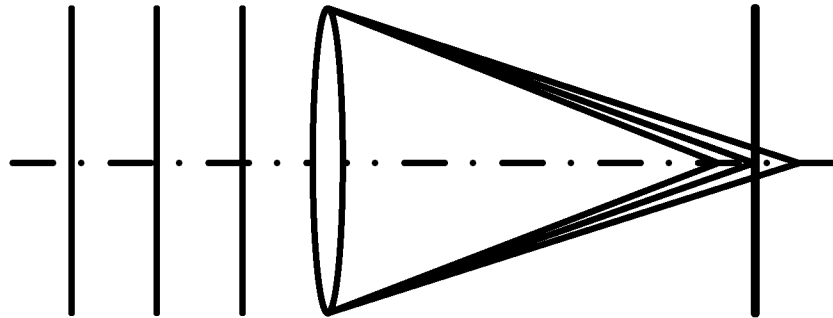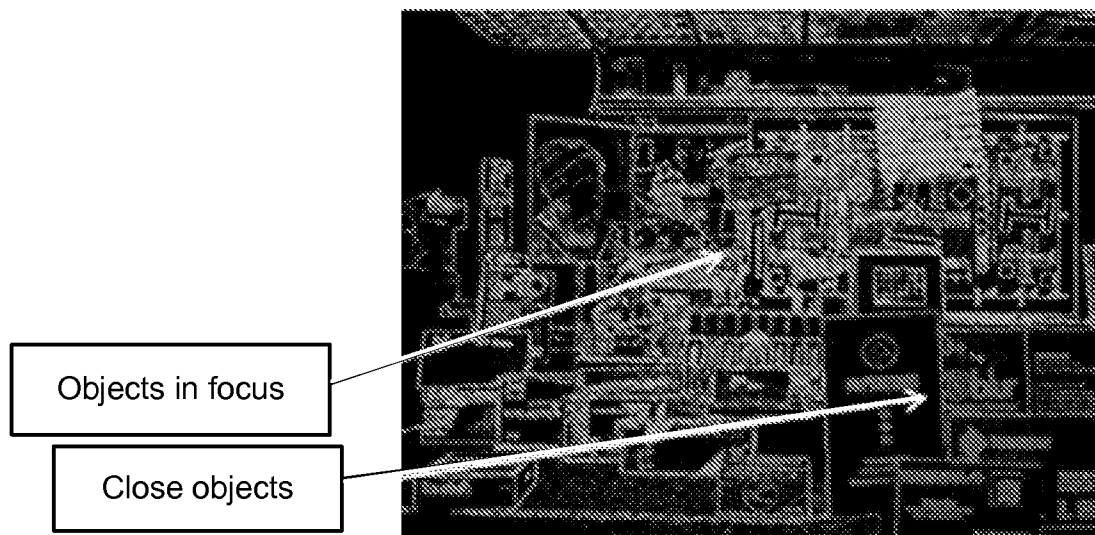Depth Estimation Through Longitudinal Chromatic Aberrations**Figure 8A****Figure 8B**

8 / 14

Relative Sharpness Measurements During AF Convergence

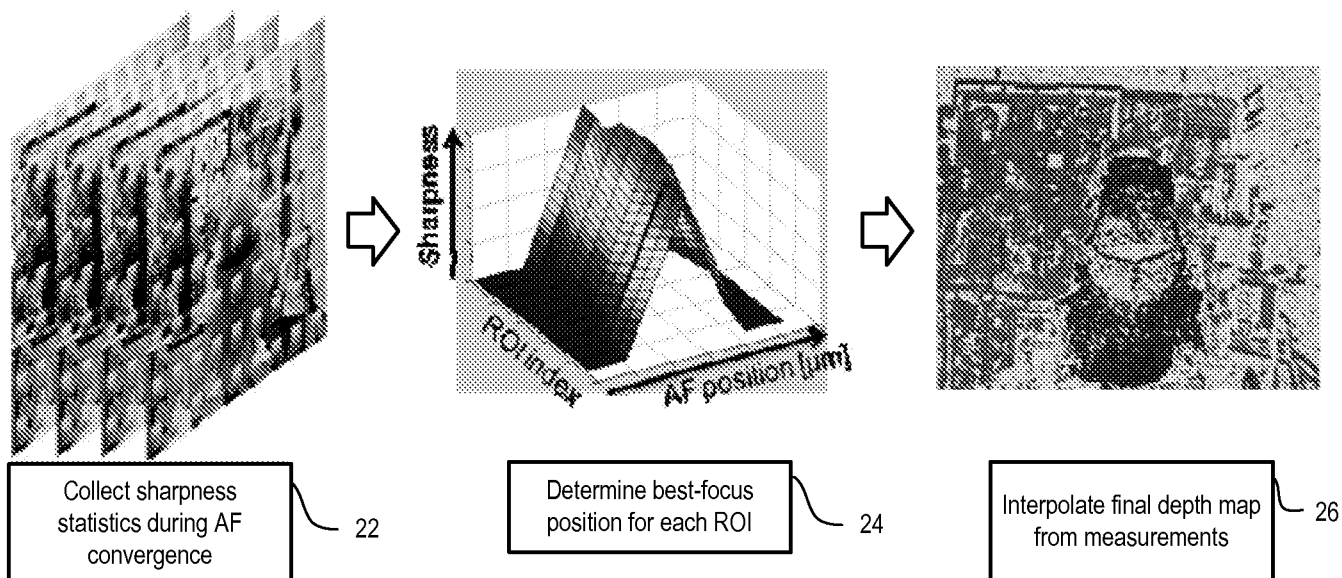


Figure 9

Using Depth Map to Control DOF via OptiML™ Focus Engine

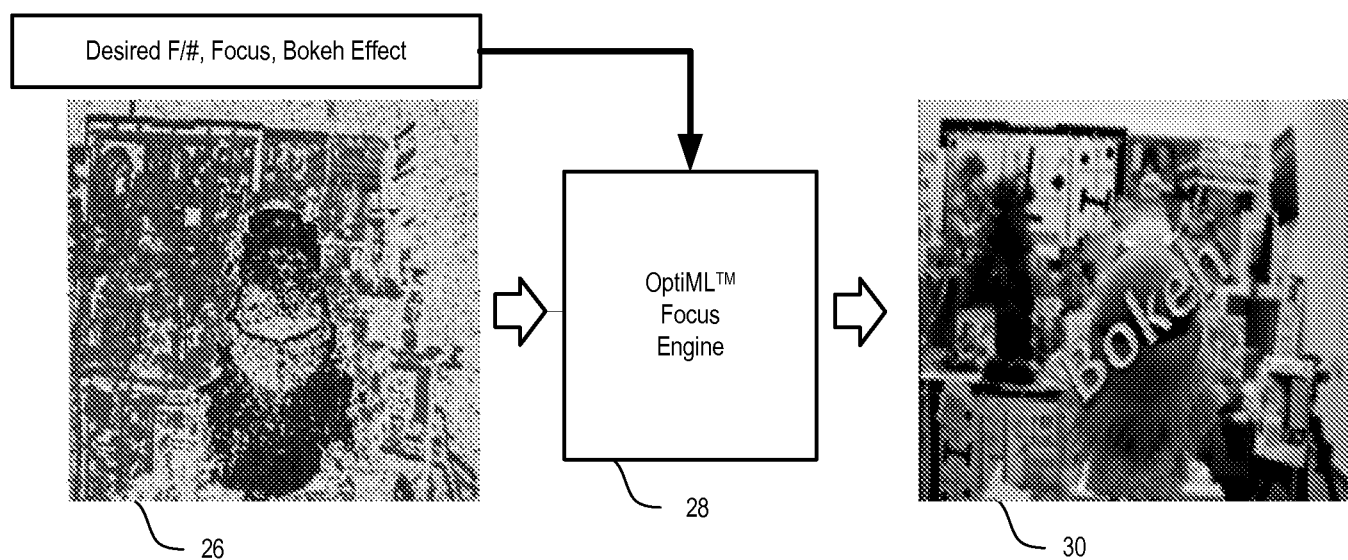


Figure 10

9 / 14



Figure 11



Figure 12

10 / 14


**Figure 13**

Comparison Between The Different Modes

Bokeh

EDOF

AF (far)

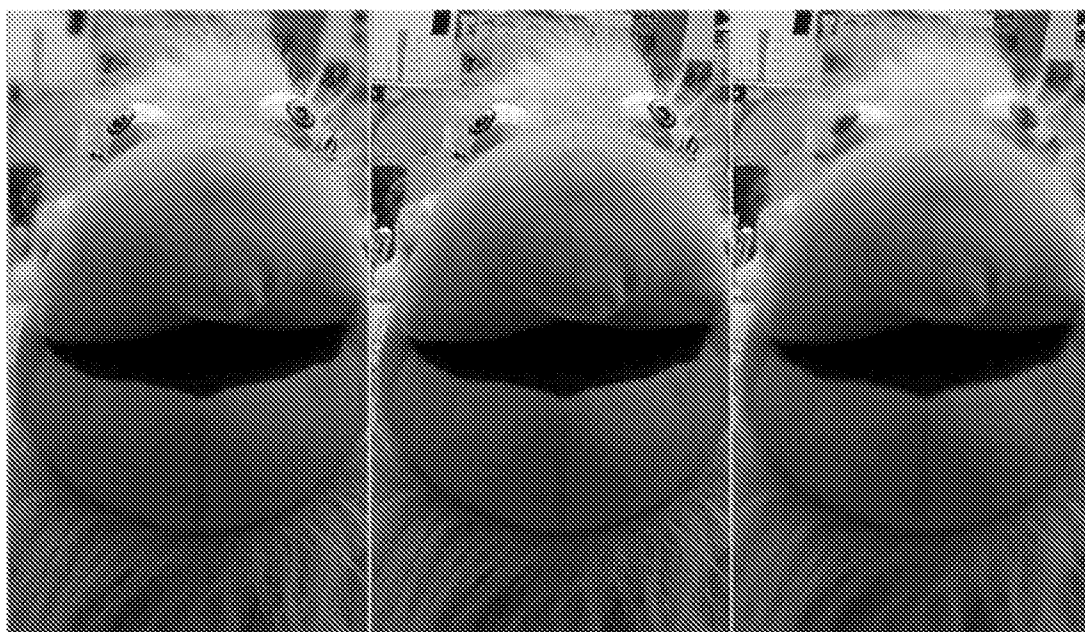**Figure 14**

11 / 14

Digital Iris: Extended Depth of Field (Narrow Aperture Mode)



Figure 15

Digital Iris: Wide Aperture Mode (focus at far)

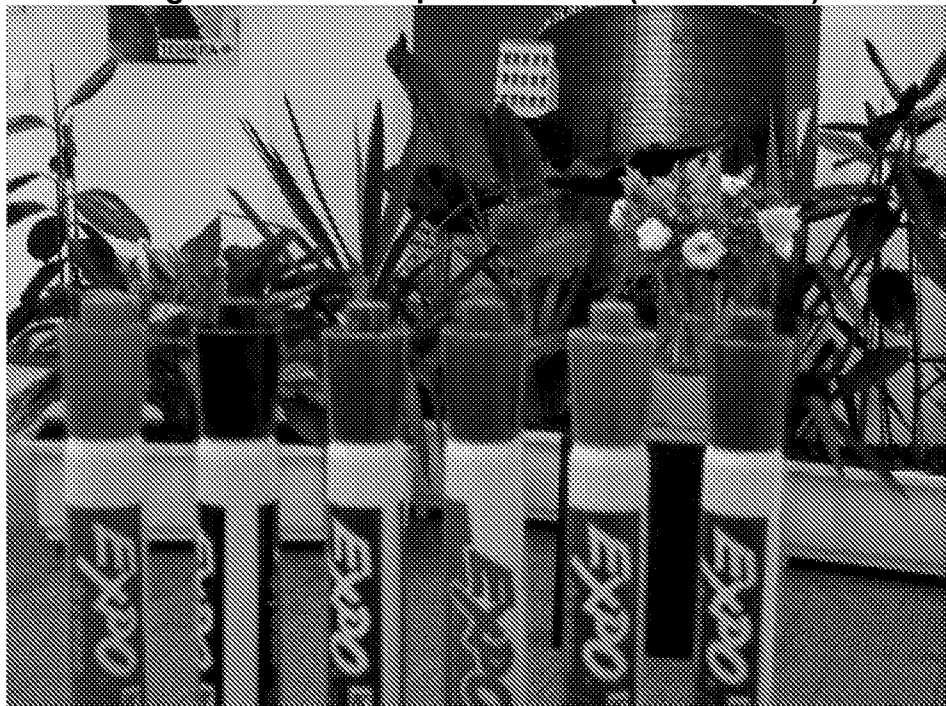


Figure 16

12 / 14

Digital Iris: Bokeh Effect



Figure 17

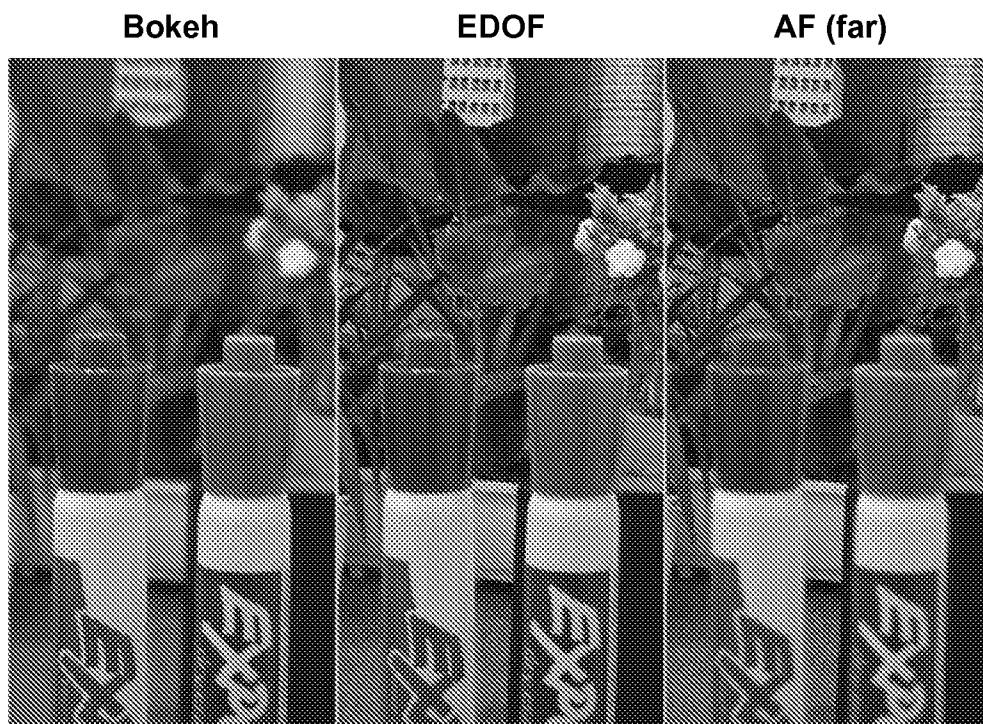


Figure 18

13 / 14

Digital Iris: Extended Depth of Field (Narrow Aperture Mode)



Figure 19

Digital Iris: Wide Aperture Mode (focus at far)



Figure 20

14 / 14

Digital Iris: Bokeh Effect



Figure 21

Bokeh

EDOF

AF (far)



Figure 22