

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 August 2007 (09.08.2007)

PCT

(10) International Publication Number
WO 2007/089760 A2

(51) International Patent Classification:
F16B 31/02 (2006.01)

(21) International Application Number:
PCT/US2007/002499

(22) International Filing Date: 29 January 2007 (29.01.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/344,028 31 January 2006 (31.01.2006) US

(71) Applicant (for all designated States except US): **INNOVATION PLUS, LLC** [US/US]; 3630 Horizon Drive, King Of Prussia, PA 19406 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIBBLEWHITE, Ian, E.** [US/US]; 728 Twin Bridge Drive, Wayne, PA 19087 (US). **MOLSBERGEN, Robert** [NL/US]; 412 Andorra Glen Court, Lafayette, PA 19444 (US).

(74) Agent: **COHEN, Gary, M.**; Strafford Building Number Three, 125 Strafford Avenue, Suite 300, Wayne, PA 19087-3318 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: THREAD FORMING FASTENERS FOR ULTRASONIC LOAD MEASUREMENT AND CONTROL

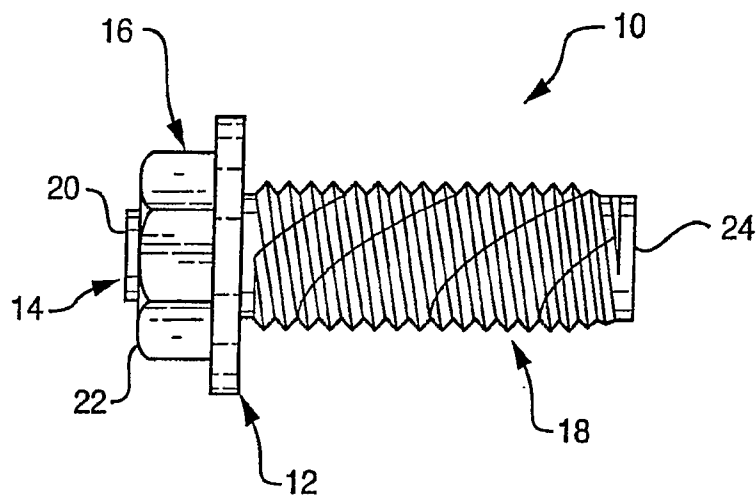

(57) Abstract: An ultrasonic load measurement transducer is mated with a thread-forming fastener to provide a load indicating thread-forming fastener that can be used for the precise and reliable assembly of critical bolted joints, such as those in the automobile and aerospace industries, among others. Steps can then be taken to accurately measure and control the load in the thread-forming fastener during tightening, and to inspect the load in the thread-forming fastener after assembly. A similar result can be achieved for a thread-locking fastener by mating an ultrasonic transducer with the thread-locking fastener assembly.

WO 2007/089760 A2

THREAD FORMING FASTENERS FOR
ULTRASONIC LOAD MEASUREMENT AND CONTROL

Background of the Invention

This invention relates to load indicating fasteners that are "thread-forming" (also referred to as "thread-rolling" or "self-tapping" fasteners), methods for making load indicating thread-forming fasteners, and methods for measuring the load in thread-forming fasteners.

Thread-forming fasteners are well known in many industries, such as in high-volume automotive assembly. Examples of such fasteners are described in U.S. Patent No. 5,242,253 (Fulmer), issued September 7, 1993, for example. Such fasteners are also marketed commercially, for example, by Reminc, Research Engineering and Manufacturing Inc., Middletown, RI, USA, under the trademark "Taptite" and "Taptite 2000", and a description of such fasteners can be found in their product literature, entitled "Taptite 2000 Thread Rolling Fasteners".

The major advantage of thread-forming fasteners is that they can be installed directly into a drilled hole, eliminating the cost of tapping the hole. Additionally, the thread formed by a thread-forming fastener has very tight tolerance since it is formed by the fastener itself and therefore forms a better nut.

Although thread-forming fasteners have been used in numerous applications in the automotive and aerospace industries to reduce cost, such fasteners are generally restricted to non-critical or less-critical applications. The difficulty in controlling the tightening process prevents their use in critical applications.

The primary reason for this is that the thread-forming process requires torque, in addition to the tightening torque, and this thread-forming torque varies significantly with hole tolerance, material, friction

conditions, etc. As a result, the precise tightening of a thread-forming fastener to a specified torque into a blind hole, where the thread is still being formed as the bolt is being tightened, will result in a 3 sigma load scatter of typically $\pm 50\%$, which is unacceptable in critical applications.

Summary of the Invention

For some time, ultrasonics has been used to accurately measure the load in bolts. Initially, removable ultrasonic devices were the most commonly used. More recently, low-cost permanent ultrasonic transducers, which can be permanently attached to one end of the fastener, have come to be used. Permanent fasteners of this type are described, for example, in U.S. Patent No. 4,846,001 (Kibblewhite), issued July 11, 1989, U.S. Patent No. 5,131,276 (Kibblewhite), issued July 21, 1992, U.S. Provisional Patent Application No. 60/264,877 (Kibblewhite), filed January 29, 2001, and International Application No. PCT/US02/03920 (Kibblewhite), filed May 17, 2002, the subject matter of which is incorporated by reference herein.

In accordance with the present invention, it has been determined that such ultrasonics can be mated with an otherwise conventional thread-forming fastener to provide a load indicating thread-forming fastener that can be used for precise and reliable assembly of critical bolted joints, such as those in automobile engines (e.g., cylinder heads, connecting rods, main bearings, etc.), drive trains, steering, brakes, suspensions, and a variety of other applications, including aerospace applications.

Steps can then be taken, using equipment and methods that are otherwise known and conventional, to accurately measure and control the load in the thread-forming fastener during tightening, and to inspect the load in the thread-forming fastener after assembly.

For further detail regarding preferred embodiments for implementing the improvements of the present invention, reference is made to the description which is provided below, together with the following illustrations.

5 Brief Description of the Drawings

Figure 1 shows an example of a typical load indicating thread-forming fastener which is produced in accordance with the present invention.

10 Figures 2 and 3 are graphs showing typical load and torque characteristics plotted against the angle of rotation of the load indicating thread-forming fastener of the present invention.

Detailed Description of the Invention

15 Figure 1 shows a typical embodiment of a load indicating thread-forming fastener which is produced in accordance with the present invention. In this illustrative example, the load indicating thread-forming fastener has been implemented in conjunction with an otherwise conventional "Taptite" fastener, which is commercially available from
20 Reminc, Research Engineering and Manufacturing Inc., Middletown, RI, USA. It is to be understood, however, that this embodiment is shown only for purposes of illustration, and that the load indicating thread-forming fastener of the present invention can also be implemented using any of a
25 variety of known and available load indicating devices, coupled or combined with any of a variety of known and available thread-forming fasteners.

 In the illustrative embodiment of Figure 1, the load indicating thread-forming fastener 10 generally includes a
30 fastener 12 (e.g., the above-mentioned "Taptite" fastener) and a permanent piezoelectric polymer film transducer 14 (e.g., of the type disclosed in the above-mentioned U.S. Patent No.

4,846,001, issued to Kibblewhite) attached to one end. The fastener 12 includes a head 16, which can be suitably engaged by a tool (not shown) for applying torque to the fastener 12, and a thread-forming body portion 18.

5 A suitable identifying element is applied to the thread-forming fastener which can be read and used to determine ultrasonic measurement parameters specific to the thread-forming fastener in order to provide more precise and more reliable load measurements by compensating for
10 differences resulting from manufacturing variations in individual thread-forming fasteners.

 For example, as disclosed in U.S. Provisional Patent Application No. 60/264,877 (Kibblewhite) and International Application No. PCT/US02/03920 (Kibblewhite),
15 the transducer 14 can further include a permanent mark such as a two-dimensional high-density bar code (not shown) or some other encodable medium, applied to the top electrode 20 of the transducer 14 for purposes of facilitating subsequent steps taken to obtain an indication of tensile load, stress,
20 elongation or other characteristic of the fastener 12 during a tightening operation, or at various other times during the service life of the fastener 12, as will be discussed more fully below.

 As an alternative, the permanent mark can be applied
25 directly to the thread-forming fastener, and the ultrasonic transducer can then be applied on top of the mark in such a way that the mark can be detected through the transducer. As an example, the bar code can be marked on an end surface of the fastener and the ultrasonic transducer can then be
30 provided on the surface with the bar code in such a manner that the bar code can be read through the transducer. In one such embodiment, the transducer layers are translucent or transparent, allowing the bar code to be read through the piezoelectric and conductive layers of the transducer.
35 In another embodiment, the bar code is marked using an indentation technique, such as dot peening, so that the

indentations are detectable, and the bar code is made readable, after application of the transducer.

As a further alternative, a non-volatile memory device can be applied to the thread-forming fastener for purposes of storing desired information. Such memory devices can be powered, written to and read from serially through a single input/output connection and an AC coupled return through the capacitance of the ultrasonic transducer. Such devices are capable of storing data such as unique identification, ultrasonic measurement parameters, tightening and inspection data for use in a manner similar to that of the above-described use of a permanent mark for the storage of information.

In one such embodiment, the previously described top electrode 20 is replaced with the non-volatile memory device, and portions of the top exposed surface of the memory device are made conductive by providing the surface with an electrical contact. This top conductive surface is then electrically connected to a conductive layer on the bottom of the memory device, adjacent to the active piezoelectric polymer film transducer 14, to provide a suitable electrode for the ultrasonic transducer. The top conductive surface is also electrically connected to the non-volatile memory device for purposes of writing information to and reading information from the memory device.

In another embodiment, the foregoing non-volatile memory device can be a radio frequency identification (RFID) chip or tag coupled with the transducer 14 for purposes of storing desired information. This can be accomplished with known RFID devices, such as the MetalSentinel (13.56MHz) device available from Interactive Mobile Systems, Inc., Port Townsend, WA, USA, which are capable of storing data such as unique identification, ultrasonic measurement parameters, and tightening and inspection data.

In such an embodiment, the previously described top electrode 20 is replaced with the RFID device, and portions of

the top exposed surface of the RFID device are made conductive by providing the exposed surface with an electrical contact. This top conductive surface is then electrically connected to a conductive layer on the bottom of the RFID device, adjacent
5 to the active, piezoelectric polymer film transducer 14, to provide a suitable electrode for the transducer 14. The piezoelectric polymer film transducer 14 is an electrical insulator and further functions as an isolator for the antenna associated with the RFID device for purposes of RF
10 transmission.

The size, shape and location of the conductive portions of the top exposed surface of the RFID device can vary to suit the particular RFID device which is used. For example, the conductive portions of the top exposed surface
15 can be placed along the periphery of the RFID device, leaving the central portions of the top exposed surface open to accommodate the antenna normally associated with the RFID device. The conductive portions of the top exposed surface should preferably cover as much of the top surface of the RFID
20 device as is possible, while leaving sufficient open space to accommodate the function of the antenna. The conductive layer on the bottom of the RFID device preferably covers the entire bottom surface, to maximize contact with the transducer 14.

Various different couplings are used with RFID
25 devices, including electromagnetic, capacitive and inductive couplings, with different coupling antennas. The antenna can be provided adjacent to non-conductive portions of the top exposed surface. Alternatively, the conductive portions of the top and bottom surfaces of the RFID device can be
30 constructed in such a way as to function as the antenna for the transponder associated with the RFID device which is used. It will further be appreciated that non-contact inductive or capacitive couplings used for RFID transponder communication in the above described embodiments can also be used to
35 couple the excitation signal to the ultrasonic transducer. Additionally, the RF communication frequency can be selected

to correspond to a preferred ultrasonic transducer excitation frequency. This then eliminates the need for an electrically conductive top surface for electrical contact with the transducer for load measurement, allowing both the reading
5 of information stored in the RFID device and the measurement of load to be performed even when the transducer is covered with paint or other protective coating.

As an example, the transducer 14 can be implemented using a thin piezoelectric polymer sensor (e.g., a 9 micron
10 thick, polyvinylidene fluoride copolymer film, of the type manufactured by Measurement Specialties Inc., Valley Forge, PA, USA) permanently, mechanically and acoustically attached to an end surface 22 of the fastener 12. The top electrode 20 of the transducer 14 can be implemented as a thin metallic
15 foil (e.g., an approximately 50 micron thick, type 316, full-hard, dull or matte finished stainless steel) which has been treated to provide a black oxide finish, which is then preferably provided with a black oxide treatment to provide an extremely thin, durable, corrosion resistant and electrically
20 conductive, black coating. A high-resolution bar code can be marked on the resulting surface by removing selected areas of the coating (e.g., by conventional laser ablation techniques), or by some other process, to provide a high contrast mark easily read with conventional, commercially available optical
25 readers. As an alternative, a non-volatile memory device, such as an RFID device, can be applied to the transducer 14 to provide data storage which can similarly be read with conventional, commercially available readers.

It is again to be understood that such
30 implementations are described only for purposes of illustration, and that any of a variety of transducer configurations can be used to implement the transducer 14 applied to the fastener 12, as desired. For example, the ultrasonic transducer 14 can be implemented as an oriented
35 piezoelectric thin film, vapor deposited directly on the head of the fastener 12, as is described in U.S. Patent No.

5,131,276 (Kibblewhite), issued July 21, 1992. As a further alternative, the ultrasonic transducer 14 can be implemented as a piezoelectric polymer film, chemically grafted on the head of the fastener 12, as is described in U.S. Provisional Patent Application No. 60/264,877 (Kibblewhite), filed January 29, 2001, and International Application No. PCT/US02/03920 (Kibblewhite), filed May 17, 2002. It will be readily understood that other alternative implementations are also possible.

In the embodiment illustrated in Figure 1, the ultrasonic transducer 14 is permanently attached to the head 16 of the fastener 12, as described in the above-referenced patents issued to Kibblewhite. An essentially flat, or spherically radiused surface 24 is provided on at least a portion of the threaded end of the fastener to provide an acoustically reflective surface to reflect the ultrasonic wave transmitted by the transducer back to the transducer. Load is then measured using standard, pulse-echo ultrasonic techniques, which are themselves known in the art and described, for example, in the above-referenced patents issued to Kibblewhite. Load control accuracies of $\pm 3\%$ have been achieved when tightening thread-forming fasteners into blind holes during both the first and subsequent tightenings.

In an alternative embodiment, an essentially flat surface is provided on the head 16 of the thread-forming fastener 12 and a removable ultrasonic transducer is temporarily attached to the fastener for the purpose of making load measurements. The threaded end of the fastener 12 is identical to the previous embodiment with the permanent ultrasonic transducer.

In practice, heat is generated as a result of the thread-forming work that takes place during the thread-forming run-down stage of the installation of a thread-forming fastener. This results in a slight increase in temperature in both the fastener (the bolt) and the resulting joint. This increase in temperature can cause errors in the ultrasonic

load measurements to be taken because of thermal expansion effects. For this reason, when using ultrasonics for inspecting the load in a fastener, it is usual to measure the temperature of the fastener or the joint in order to
5 compensate for the effects of thermal expansion.

However, in conjunction with a thread-forming fastener, the average temperature increase due to the heat generated during thread-formation can not be measured directly during the installation process and is subject to variations
10 in material, friction, and heat conduction properties of the joint components. Without compensation, this thermal effect can result in inaccuracies of load measurement on the order of 5% to 20%, depending on the bolt, the joint and the assembly process being used.

Figures 2 and 3 show typical load and torque characteristics plotted against the angle of rotation of a typical bolt. Figure 2 shows the tightening curves for a typical through-hole application, in which the torque reduces after the thread is formed through the entire hole. Figure
20 3 shows the tightening curves for a typical blind hole application, in which the thread is still being formed as the bolt is tightened.

Further in accordance with the present invention, more accurate load measurements in the thread-forming
25 load indicating fasteners are provided by eliminating the effects of fastener heating resulting from the thread-forming process. This is achieved by measuring the load (or acoustic time-of-flight) value immediately prior to the load-inducing stage of the assembly process, and by using this measured
30 value as the zero-load reading.

The load-inducing stage of the assembly process can be detected by any one of a variety of methods. For example, an increase in load above a predetermined threshold, a change in the increase in load with time, angle of rotation
35 of the fastener or torque, an increase in torque above a predetermined threshold, or a change in the increase in torque

with time, angle or load can be detected. Irrespective of the method used to detect the load-inducing stage of the assembly process, a new zero-load base measurement is taken as a value just prior to the load-inducing assembly stage by selecting
5 or calculating a load measurement prior to the load-inducing stage. This can be achieved by selecting a load measurement corresponding to a fixed time or angle prior to the detection of the commencement of the load-inducing stage, for example. Alternatively, for through-hole applications, the end of the
10 thread-forming phase can be detected by a reduction in torque. It is again to be understood that such methods are only illustrative, and that there are numerous other methods for determining the new zero-load base measurement prior to tightening, from load, time, torque and angle of rotation
15 measurements recorded during assembly operations with hand and powered assembly tools.

The thermal effect of thread forming causes an apparent positive load value at zero load just prior to tightening. An alternative to zeroing the load (or
20 time-of-flight measurement) is to add this load offset, measured prior to the load-inducing stage of the assembly process, to the target load (or target time-of-flight). The result is the same since the increase in measured load is the same.

Yet another alternative is to experimentally
25 determine an average value of load error due to the thread forming and adjust the zero-load measurement or target tightening parameter to compensate for this effect using one of the above-described methods. This approach, however, does
30 not compensate for variations with individual fasteners or joint components and is therefore presently considered less desirable.

The result is that, for the first time, ultrasonic load measurement technology can be used with thread-forming
35 fasteners. Errors in load measurement resulting from the thermal effects of thread-forming can be compensated. This

then results in accurate load measurement and tightening control of the thread-forming fasteners.

5 The above-described method of eliminating the effects of fastener heating resulting from the thread-forming process can also be used with other fastener assembly processes that generate heat prior to the load-inducing tightening stage. Thread-locking bolts and nuts, for example, are manufactured with a prevailing "locking" torque to prevent the fastener from loosening during service. Most often, the
10 thread of either the bolt or nut has an irregular profile causing the threads to elastically deform slightly upon mating. Alternatively, the bolt or nut has an insert or patch of a soft material to provide the prevailing torque or resistance to loosening. The prevailing torque provided
15 by these thread-locking features produces heating of the fastener during rundown in the same manner as the tapping torque does with a thread-forming fastener. Consequently, the above-described method for compensating for thermal-related errors in accordance with the present invention can be used
20 with prevailing torque-locking fasteners to improve the accuracy of ultrasonic load measurement during assembly.

It will be understood that various changes in the details, materials and arrangement of parts which have been herein described and illustrated in order to explain the
25 nature of this invention may be made by those skilled in the art within the principle and scope of the invention as expressed in the following claims.

Claims

What is claimed is:

1. An apparatus comprising:
a thread-forming fastener including a head for
5 engagement by a tool for applying a torque to the fastener,
and a body portion extending from the head and including
thread-forming portions; and
an ultrasonic transducer coupled with the fastener,
for making ultrasonic load measurements in the fastener.
- 10 2. The apparatus of claim 1 wherein the ultrasonic
transducer is coupled with the head of the fastener.
3. The apparatus of claim 1 wherein the ultrasonic
transducer is permanently attached to the fastener.
4. The apparatus of claim 3 wherein the ultrasonic
15 transducer is comprised of a piezoelectric polymer film
permanently attached to the head of the fastener.
5. The apparatus of claim 3 wherein the ultrasonic
transducer is comprised of an oriented piezoelectric thin
film, vapor deposited directly on the head of the fastener.
- 20 6. The apparatus of claim 1 wherein the ultrasonic
transducer is temporarily attached to the fastener.
7. The apparatus of claim 1 which further includes
an identifying element applied to the apparatus, wherein
the identifying element includes data associated with the
25 fastener.
8. The apparatus of claim 7 wherein the identifying

element is a permanent mark applied to the apparatus.

9. The apparatus of claim 8 wherein the permanent mark is a bar code.

10. The apparatus of claim 9 wherein the bar code is applied to the ultrasonic transducer.

11. The apparatus of claim 9 wherein the bar code is applied to the fastener, and the ultrasonic transducer is applied over the bar code.

12. The apparatus of claim 11 wherein the ultrasonic transducer is formed of a translucent material.

13. The apparatus of claim 8 wherein the permanent mark is an indentation formed in a surface of the fastener.

14. The apparatus of claim 8 wherein the permanent mark is applied to an end surface of the fastener.

15. The apparatus of claim 7 wherein the identifying element is a non-volatile memory device applied to the ultrasonic transducer.

16. The apparatus of claim 15 wherein the non-volatile memory device has a top surface and a bottom surface, and an exposed conductive layer on portions of the top surface which is electrically connected to a conductive layer on the bottom surface, and wherein the conductive layer on the bottom surface is in close proximity to an active element of the ultrasonic transducer so that the bottom conductive layer functions as an electrode.

17. The apparatus of claim 16 wherein the conductive layer on the top surface is electrically connected

to the non-volatile memory device, for writing information to and for reading information from the memory device.

18. The apparatus of claim 15 wherein the non-volatile memory device is a radio frequency identification device.

19. The apparatus of claim 18 wherein the portions of the conductive layer on the top surface and the conductive layer on the bottom surface function as an antenna for communicating with a transponder associated with the radio frequency identification device.

20. The apparatus of claim 18 wherein the radio frequency identification device has an antenna, and wherein the antenna provides a non-contact coupling with the ultrasonic transducer for performing ultrasonic load measurements.

21. The apparatus of claim 18 wherein the ultrasonic transducer and the radio frequency identification device each operate at a defined frequency, and wherein the frequency for the ultrasonic transducer is the same as the frequency for the radio frequency identification device.

22. A method of making a load indicating, thread-forming fastener, comprising the steps of:

providing a fastener having a first end including a surface for receiving an ultrasonic transducer, for making ultrasonic load measurements in the fastener, a shank extending from the first end and including thread-forming portions for tapping a hole, and a second end, opposite the first end and including a surface for reflecting an ultrasonic wave back to the first end; and

attaching an ultrasonic transducer to the first end of the fastener.

23. The method of claim 22 which further includes the step of attaching the ultrasonic transducer to a head associated with the first end of the thread-forming fastener, for engagement by a tool for applying a torque to the
5 fastener.

24. The method of claim 22 which further includes the step of permanently attaching the ultrasonic transducer to the fastener.

25. The method of claim 24 which further includes
10 the step of permanently attaching an ultrasonic transducer comprised of a piezoelectric polymer film to the first end of the fastener.

26. The method of claim 24 which further includes the step of vapor depositing an ultrasonic transducer
15 comprised of an oriented piezoelectric thin film directly onto the first end of the fastener.

27. The method of claim 22 which further includes the step of temporarily attaching the ultrasonic transducer to the fastener.

28. The method of claim 22 which further includes
20 the step of applying an identifying element to the fastener, wherein the identifying element includes data associated with the fastener.

29. The method of claim 28 which further includes
25 the step of applying a permanent mark to the fastener.

30. The method of claim 29 which further includes the step of applying a bar code to the fastener.

31. The method of claim 30 which further includes

the step of applying the bar code to the ultrasonic transducer.

32. The method of claim 30 which further includes the steps of applying the bar code directly to the fastener,
5 and applying the ultrasonic transducer over the bar code.

33. The method of claim 28 which further includes the step of forming an indentation in a surface of the fastener.

34. The method of claim 28 which further includes
10 the step of applying the identifying element to an end surface of the fastener.

35. The method of claim 28 which further includes the step of applying a non-volatile memory device to the ultrasonic transducer.

15 36. The method of claim 35 which further includes the steps of providing an exposed conductive layer on portions of a top surface of the non-volatile memory device, and electrically connecting the exposed conductive layer to a conductive layer on a bottom surface of the non-volatile
20 memory device, placing the conductive layer on the bottom surface in close proximity to an active element of the ultrasonic transducer so that the bottom conductive layer functions as an electrode.

37. The method of claim 36 which further includes
25 the step of electrically connecting the conductive layer on the top surface to the non-volatile memory device, for communicating with the memory device.

38. The method of claim 35 which further includes the step of applying a radio frequency identification device

to the ultrasonic transducer.

39. A method of measuring a load in a fastener, comprising the steps of:

5 providing a thread-forming fastener including a head for engagement by a tool for applying a torque to the fastener, and a body portion extending from the head and including thread-forming portions;

coupling an ultrasonic transducer with the fastener, for making ultrasonic load measurements in the fastener;

10 electrically connecting an apparatus to the ultrasonic transducer for supplying signals to the ultrasonic transducer and for receiving signals from the ultrasonic transducer;

15 monitoring the signals received from the ultrasonic transducer, providing an accurate measurement indicative of the load in the fastener; and

20 adjusting the measurement indicative of the load to compensate for effects of heating of the fastener resulting from forming a thread in a mating component during installation.

40. The method of claim 39 which further includes the step of imparting torque to the fastener and removing torque from the fastener in response to the measurement of the load in the fastener.

25 41. The method of claim 39 which further includes the step of determining a zero-load ultrasonic measurement, using the measurement indicative of the load in the fastener.

30 42. The method of claim 41 which further includes the step of measuring a torque in conjunction with the measurement indicative of the load in the fastener to determine the zero-load ultrasonic measurement.

43. The method of claim 41 which further includes the step of measuring an angle of rotation of the fastener in conjunction with the measurement indicative of the load in the fastener to determine the zero-load ultrasonic measurement.

5 44. The method of claim 41 which further includes the step of measuring time in conjunction with the measurement indicative of the load in the fastener to determine the zero-load ultrasonic measurement.

10 45. The method of claim 41 which further includes the step of taking measurements for determining the zero-load ultrasonic measurement prior to a load-inducing stage of the installation.

15 46. The method of claim 41 which further includes the step of taking measurements for determining the zero-load ultrasonic measurement during a load-inducing stage of the installation.

47. The method of claim 39 which further includes the step of placing an identifying element on the fastener which contains data associated with the fastener.

20 48. The method of claim 47 wherein the identifying element is a permanent mark applied to the ultrasonic transducer, and wherein the method further includes the step of directly reading the permanent mark applied to the ultrasonic transducer.

25 49. The method of claim 47 wherein the identifying element is a permanent mark applied to the fastener, wherein the ultrasonic transducer is applied over the permanent mark, and wherein the method further includes the step of reading the permanent mark applied to the fastener through the
30 ultrasonic transducer.

50. The method of claim 47 wherein the identifying element is a non-volatile memory device applied to the ultrasonic transducer, and wherein the method further includes the step of directly reading the non-volatile
5 memory device applied to the ultrasonic transducer.

51. A method of measuring a load in a fastener, comprising the steps of:

providing a thread-locking fastener assembly including a bolt having a head for engagement by a tool for
10 applying a torque to the fastener assembly and a body portion extending from the head, and a nut for cooperating with the body portion of the bolt, wherein portions of the fastener assembly include resistance-inducing threads;

coupling an ultrasonic transducer with the bolt, for
15 making ultrasonic load measurements in the fastener assembly;
electrically connecting an apparatus to the ultrasonic transducer for supplying signals to the ultrasonic transducer and for receiving signals from the ultrasonic transducer;

20 monitoring the signals received from the ultrasonic transducer, providing an accurate measurement indicative of the load in the fastener assembly; and

adjusting the measurement indicative of the load to compensate for effects of heating of the fastener assembly
25 resulting from prevailing torque associated with the thread-locking fastener assembly.

52. The method of claim 51 which further includes the step of imparting torque to the bolt and removing torque from the bolt in response to the measurement of the load in
30 the fastener assembly.

53. The method of claim 51 which further includes the step of determining a zero-load ultrasonic measurement, using the measurement indicative of the load in the fastener

assembly.

54. The method of claim 53 which further includes the step of measuring a torque in conjunction with the measurement indicative of the load in the fastener assembly
5 to determine the zero-load ultrasonic measurement.

55. The method of claim 53 which further includes the step of measuring an angle of rotation of the fastener in conjunction with the measurement indicative of the load in the fastener assembly to determine the zero-load ultrasonic
10 measurement.

56. The method of claim 53 which further includes the step of measuring time in conjunction with the measurement indicative of the load in the fastener assembly to determine the zero-load ultrasonic measurement.

15 57. The method of claim 53 which further includes the step of taking measurements for determining the zero-load ultrasonic measurement prior to inducing the load in the fastener assembly.

58. The method of claim 53 which further includes
20 the step of taking measurements for determining the zero-load ultrasonic measurement while inducing the load in the fastener assembly.

59. The method of claim 51 which further includes the step of placing an identifying element on the fastener
25 assembly which contains data associated with the fastener assembly.

60. The method of claim 59 wherein the identifying element is a permanent mark applied to the ultrasonic transducer, and wherein the method further includes the

step of directly reading the permanent mark applied to the ultrasonic transducer.

61. The method of claim 59 wherein the identifying element is a permanent mark applied to the fastener assembly, wherein the ultrasonic transducer is applied over the permanent mark, and wherein the method further includes the step of reading the permanent mark applied to the fastener assembly through the ultrasonic transducer.

62. The method of claim 59 wherein the identifying element is a non-volatile memory device applied to the ultrasonic transducer, and wherein the method further includes the step of directly reading the non-volatile memory device applied to the ultrasonic transducer.

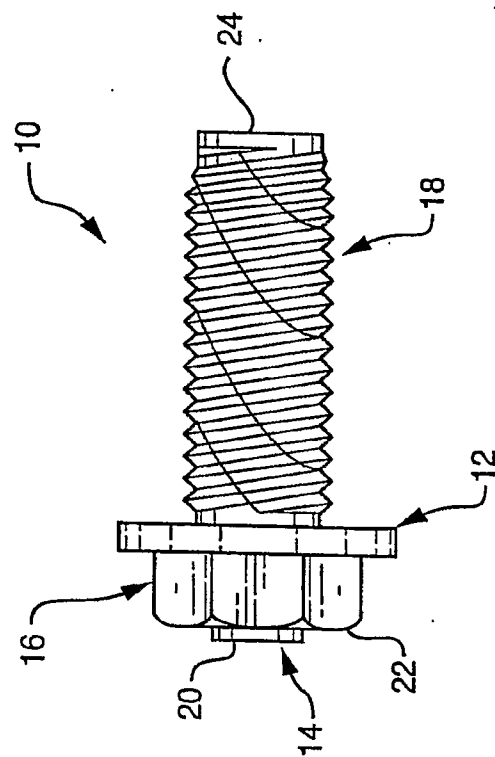


FIG. 1

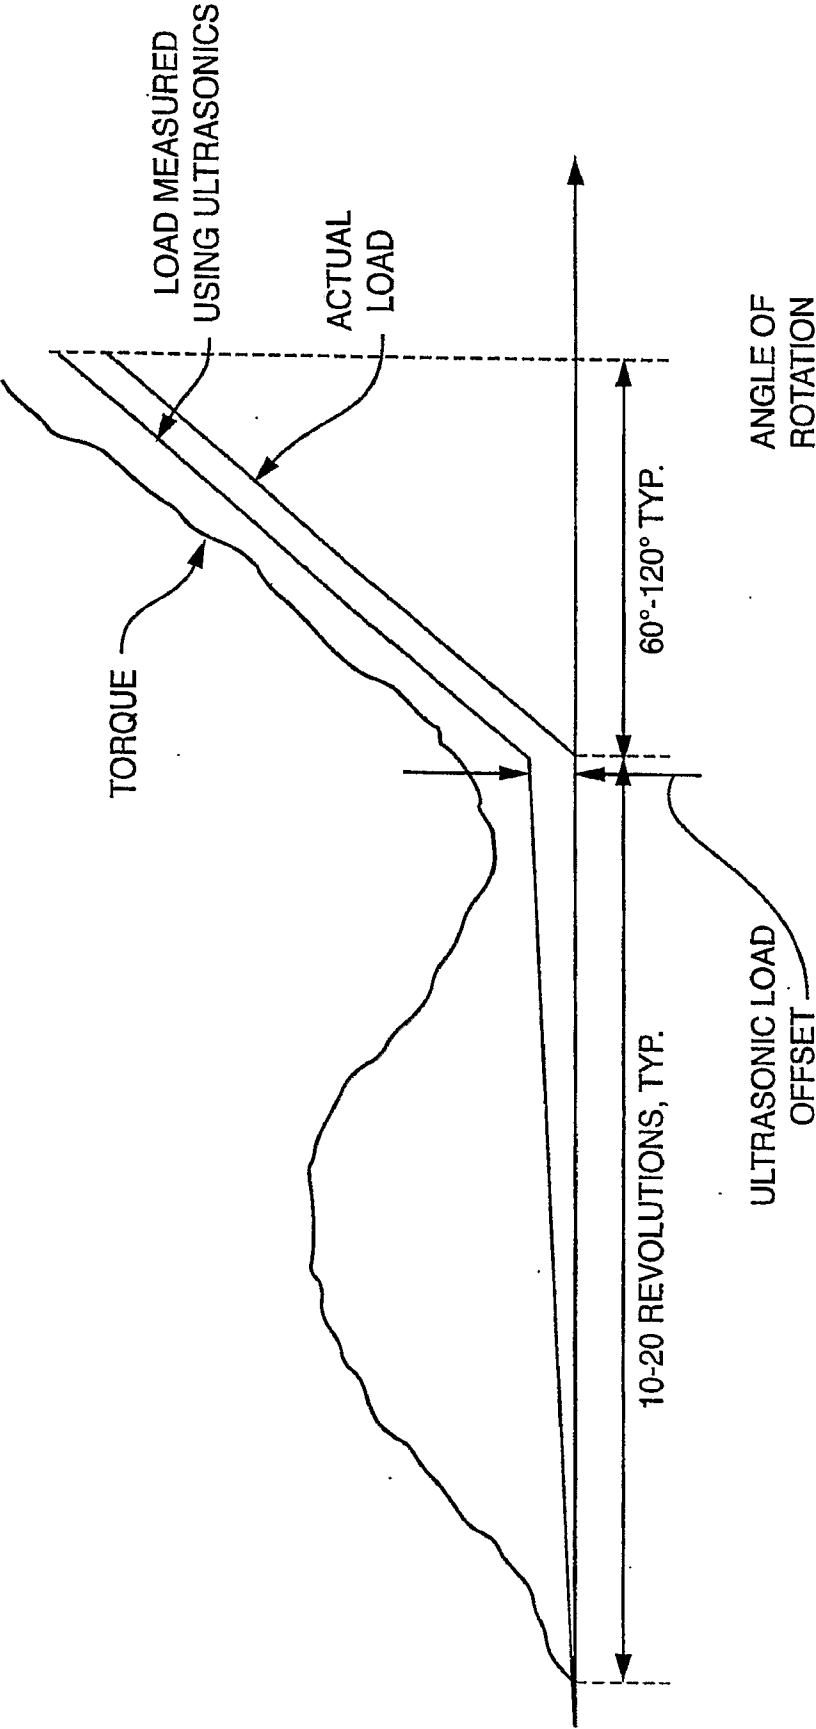


FIG. 2

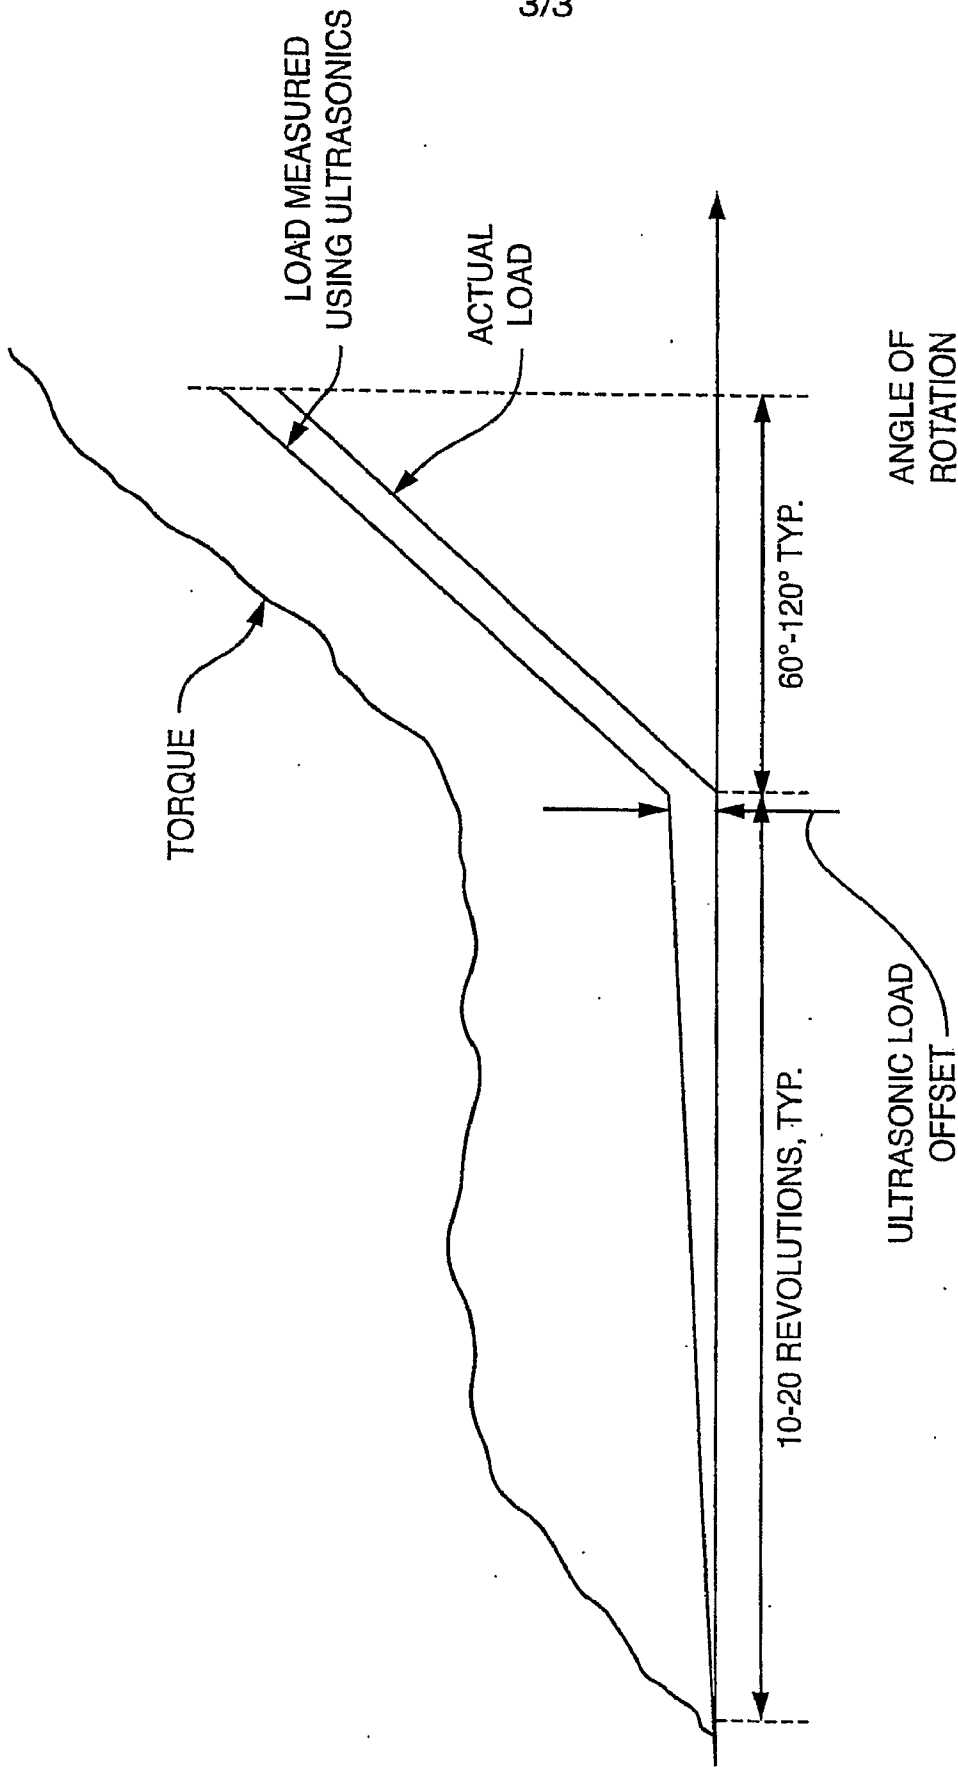


FIG. 3