



US00RE47893E

(19) **United States**
(12) **Reissued Patent**
Chavan et al.

(10) **Patent Number:** **US RE47,893 E**
(45) **Date of Reissued Patent:** ***Mar. 3, 2020**

(54) **CONDUIT CONNECTOR AND METHODS FOR MAKING AND USING THE SAME**

(58) **Field of Classification Search**
CPC H02G 3/065; H02G 3/0666; H02G 15/08; H02G 15/18; H01R 13/74; H01R 13/741;

(71) Applicant: **Sigma Electric Manufacturing Corporation**, Garner, NC (US)

(Continued)

(72) Inventors: **Vinayak Manohar Chavan**, Pune (IN);
Yuvraj Totaram Khodape, Pune (IN);
Ashok Alilughatta Sathanarayana, Pune (IN)

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,049,283 A 12/1912 Westphal
1,131,399 A 3/1915 McGinley
(Continued)

(73) Assignee: **SIGMA ELECTRIC MANUFACTURING CORPORATION**, Garner, NC (US)

FOREIGN PATENT DOCUMENTS

CA 1120113 3/1982
CA 2582792 A1 9/2008
(Continued)

(*) Notice: This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

(21) Appl. No.: **15/234,619**

French Patent No. 2863682; Date of Publication: Jun. 17, 2005; Abstract Only, 1 page.

(22) Filed: **Aug. 11, 2016**

(Continued)

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **8,803,008**
Issued: **Aug. 12, 2014**
Appl. No.: **13/409,409**
Filed: **Mar. 1, 2012**

Primary Examiner — Anjan K Deb

(74) *Attorney, Agent, or Firm* — Cantor Colburn LLP

U.S. Applications:

(60) Provisional application No. 61/448,872, filed on Mar. 3, 2011.


(51) **Int. Cl.**
H02G 3/04 (2006.01)
H02G 3/06 (2006.01)
(Continued)

(57) **ABSTRACT**

In one embodiment, the conduit connector can comprise: a body comprising a hollow center capable of receiving a conduit in a receiving end, wherein the hollow center extends from the receiving end to the connecting end; a spring disposed within the hollow center and extending out of the connecting end, wherein the spring comprises engagement tangs extending into the hollow center, toward the connection end, and spring tangs extending past the connection end and spaced apart a distance greater than or equal to an opening diameter in a junction box; and an antishort bush located in the connecting end of the body, retaining the spring in the body.

(52) **U.S. Cl.**
CPC **H02G 3/0616** (2013.01); **H02G 3/0691** (2013.01); **H01R 13/74** (2013.01); **H02G 3/18** (2013.01)

25 Claims, 7 Drawing Sheets

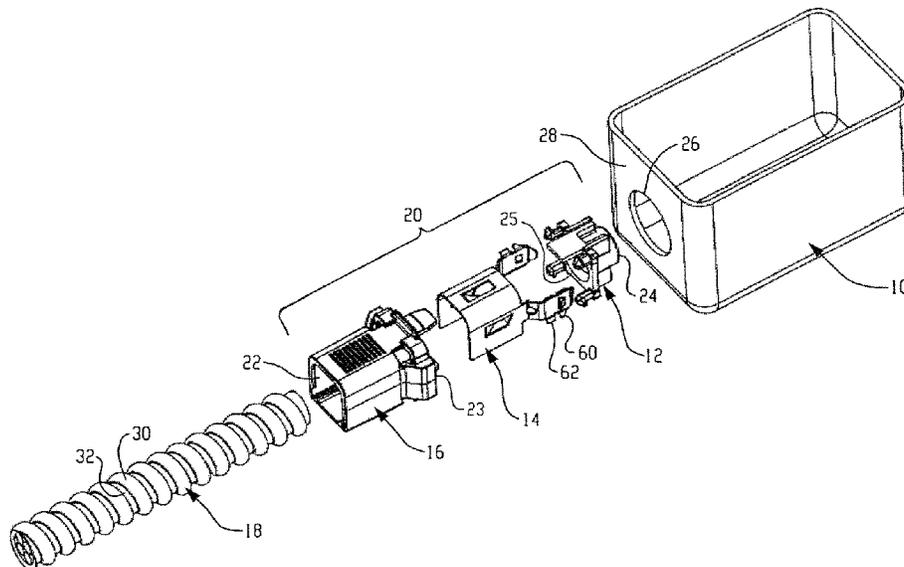

(56)

References Cited

U.S. PATENT DOCUMENTS

7,154,054 B1 12/2006 Gretz H02G 3/0666
16/2.1

7,156,671 B2 1/2007 Kauth

7,161,095 B1 1/2007 Gretz

7,164,086 B1 1/2007 Kiely

7,183,486 B2 2/2007 Pyron et al.

7,205,489 B2 4/2007 Auray et al.

7,211,744 B2 5/2007 Jorgensen

7,214,890 B2 5/2007 Kiely et al.

7,220,923 B1 5/2007 Sheehan et al.

7,226,308 B1 6/2007 Hanks

7,226,309 B1 6/2007 Gretz

7,238,894 B1 7/2007 Gretz

7,304,251 B1 12/2007 Gretz

7,329,144 B1 2/2008 Gretz

7,338,087 B2 3/2008 Bartholoma et al.

7,338,092 B1 3/2008 Cicconi, III

7,358,448 B2 4/2008 Auray et al.

7,381,088 B1 6/2008 Gretz

7,390,979 B1 6/2008 Johnson

7,390,980 B1 6/2008 Gretz

7,432,452 B2 10/2008 Gardner

7,442,079 B1* 10/2008 Gretz 174/661

7,461,870 B2 12/2008 Blake

7,485,806 B1 2/2009 Gretz

7,488,905 B2 2/2009 Kiely et al. H01R 13/745
174/650

7,495,184 B1 2/2009 Gretz H01R 13/5812
16/2.1

7,500,873 B1 3/2009 Hart

7,576,290 B1* 8/2009 Korcz H02G 3/0691
16/2.1

7,820,922 B2 10/2010 Auray et al.

7,824,213 B1 11/2010 Korcz et al.

8,162,693 B2* 4/2012 Auray et al. 174/657

8,253,043 B1* 8/2012 Kiely 174/659

8,857,039 B2 10/2014 Sathyanarayana et al.

2004/0177988 A1 9/2004 Kiely

2004/0251682 A1 12/2004 Pyron

2008/0053680 A1 3/2008 Kiely et al.

2008/0277160 A1 11/2008 Auray et al.

2008/0280506 A1* 11/2008 Ma H01R 13/111
439/816

2008/0284163 A1 11/2008 Proulx et al.

2009/0215306 A1 8/2009 Hanks

2009/0218131 A1 9/2009 Sheehan et al.

2010/0084854 A1 4/2010 Sathyanarayana et al.

2010/0285699 A1 11/2010 Auray et al.

2011/0226084 A1 9/2011 Chiou

FOREIGN PATENT DOCUMENTS

CA 2728542 A1 8/2011

FR 2863682 A1 6/2005

GB 1422355 1/1976

GB 1422355 A 1/1976

GB 2177268 A 1/1987

OTHER PUBLICATIONS

French Patent No. 2863682 (A1); Publication Date: Jun. 17, 2005;
Abstract Only; 1 Page.

* cited by examiner

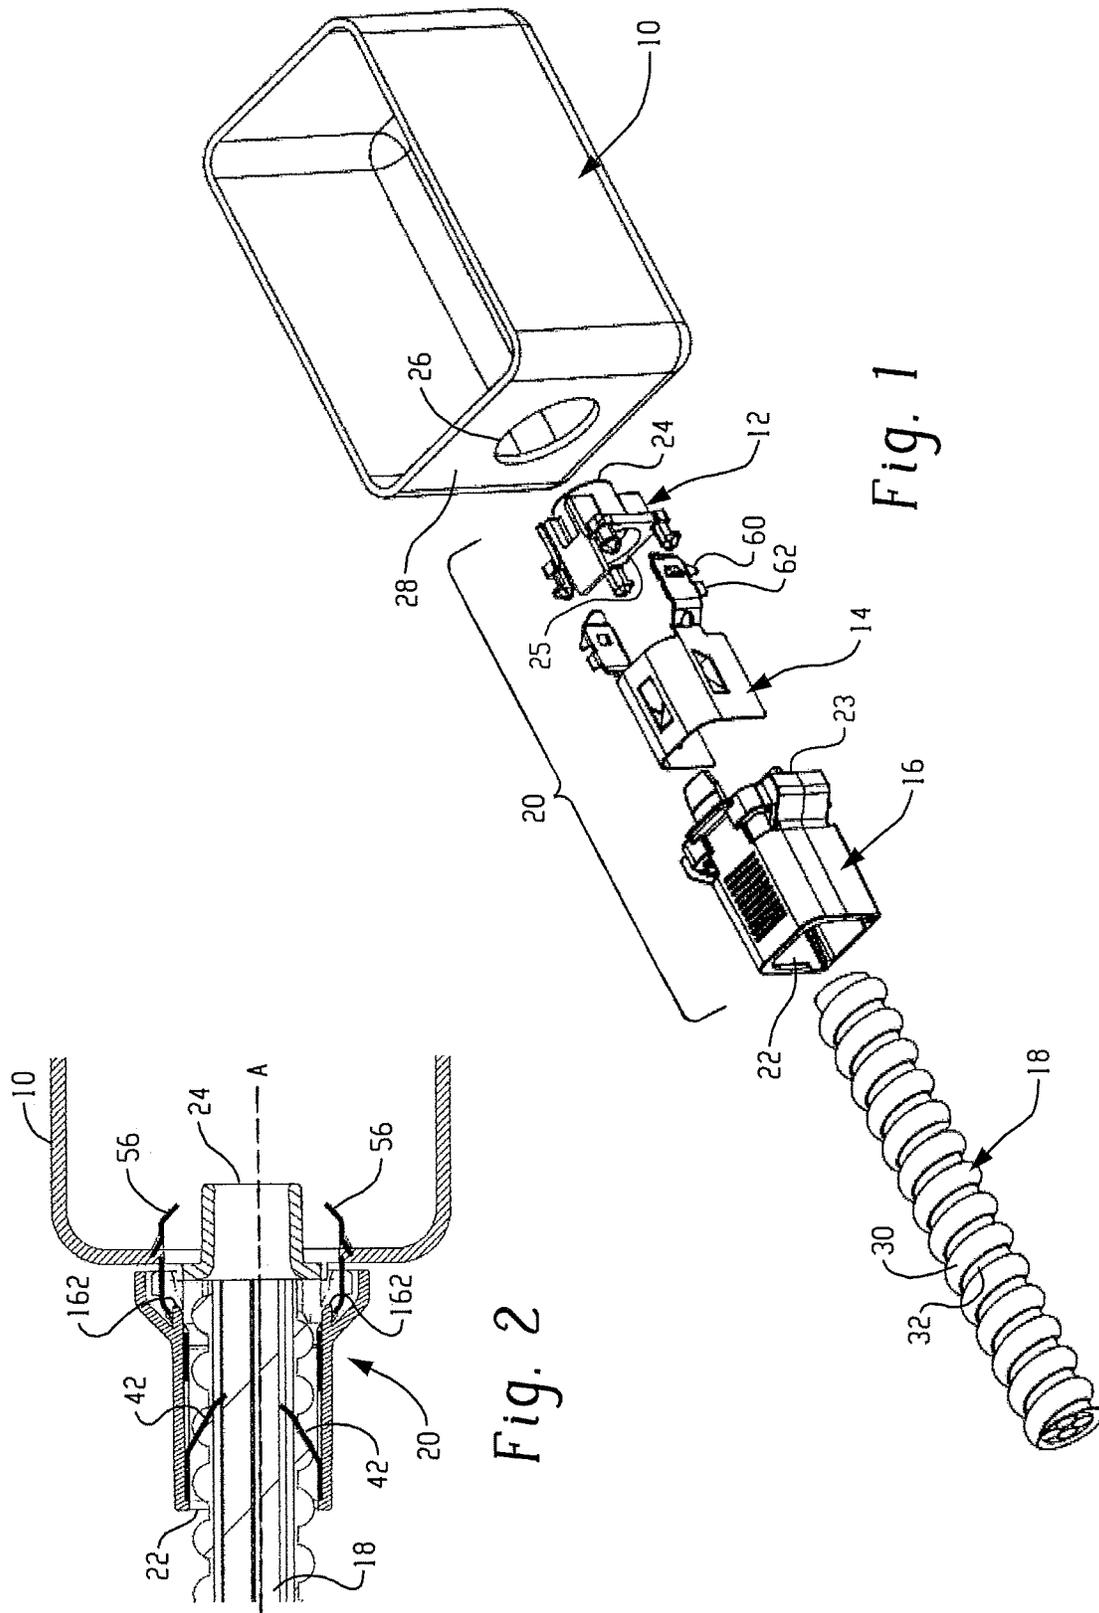


Fig. 1

Fig. 2

Fig. 3

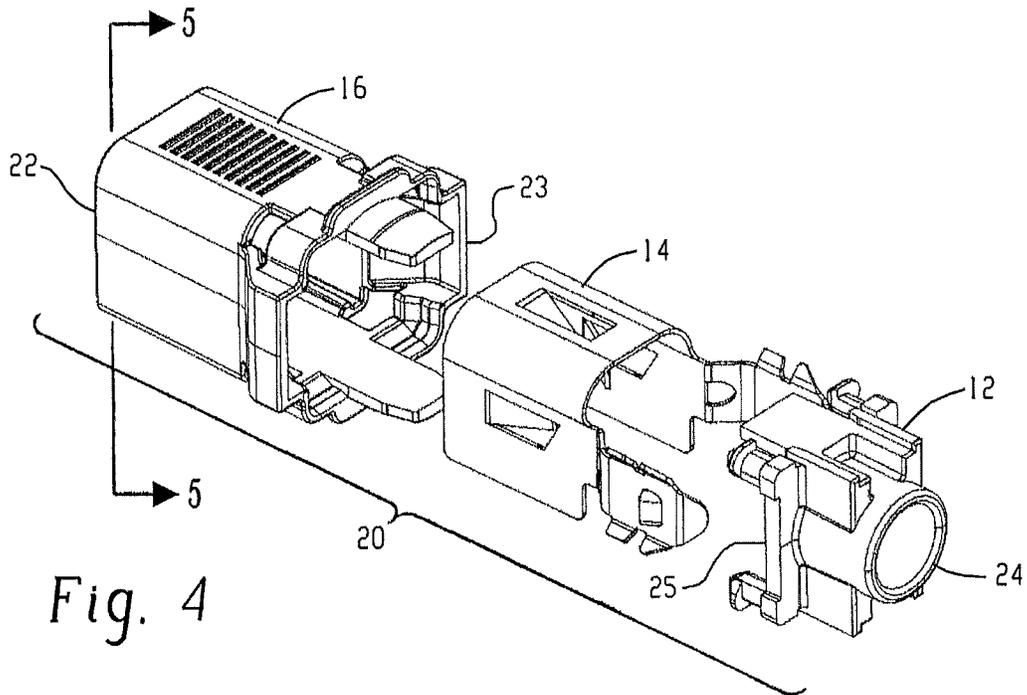
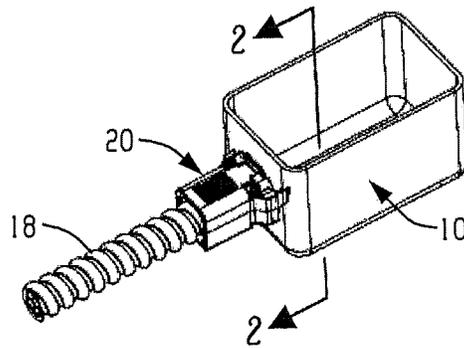


Fig. 4

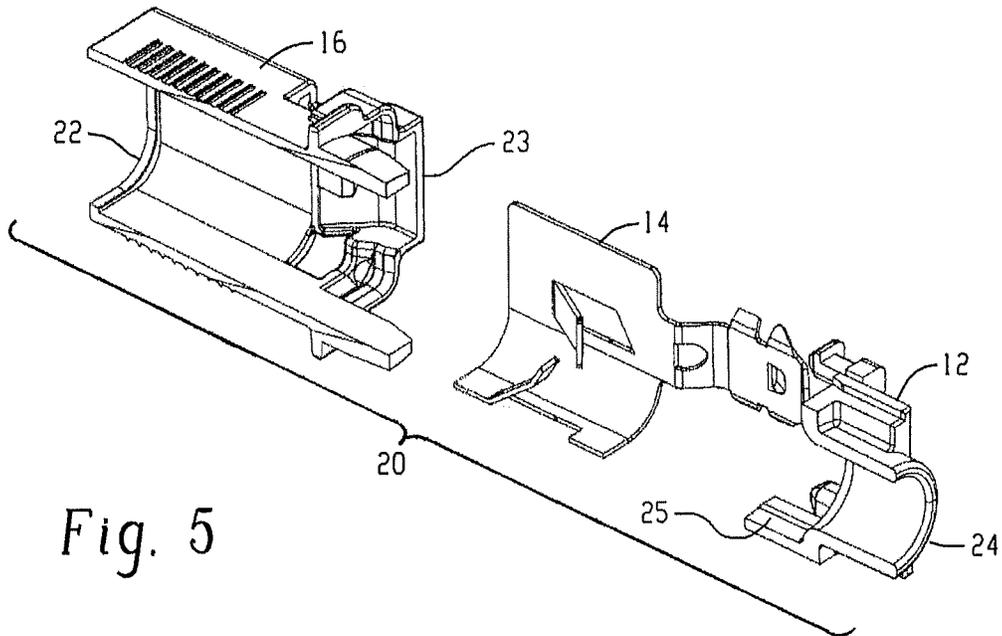


Fig. 5

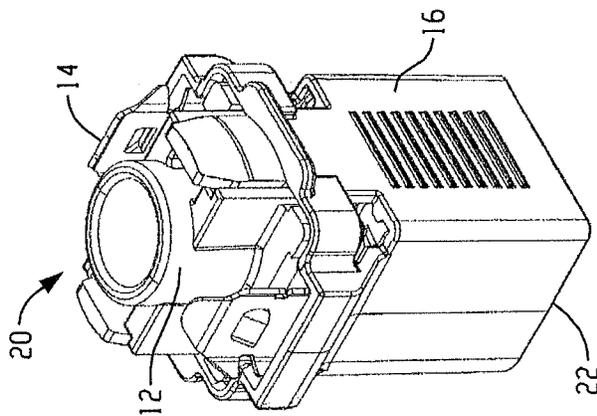


Fig. 6

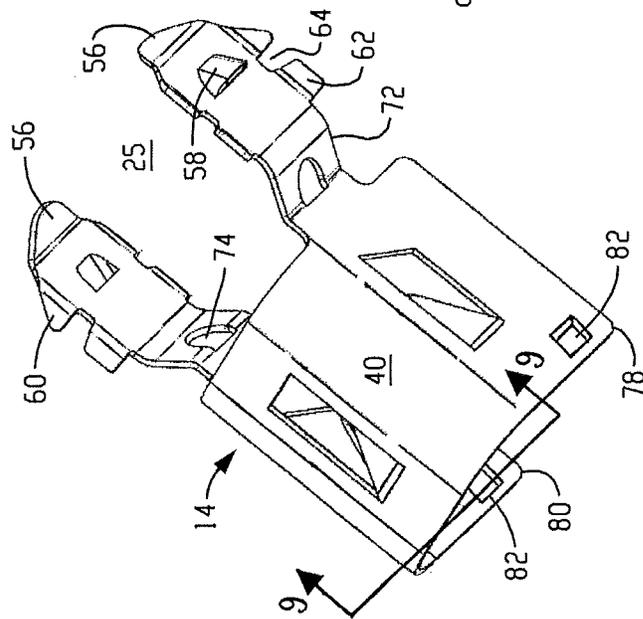


Fig. 7

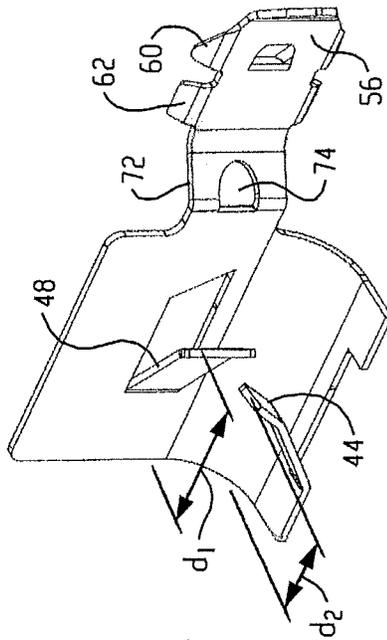


Fig. 8

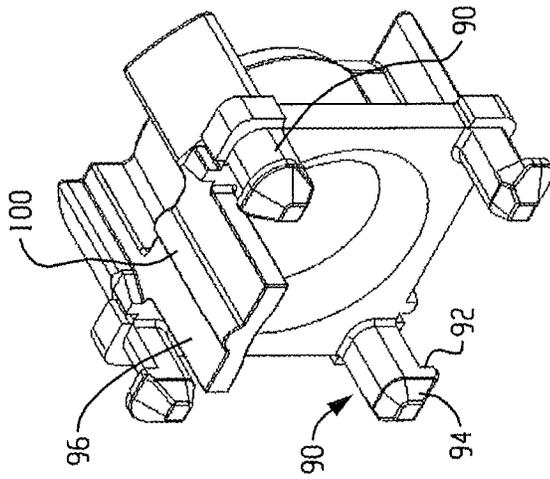


Fig. 14

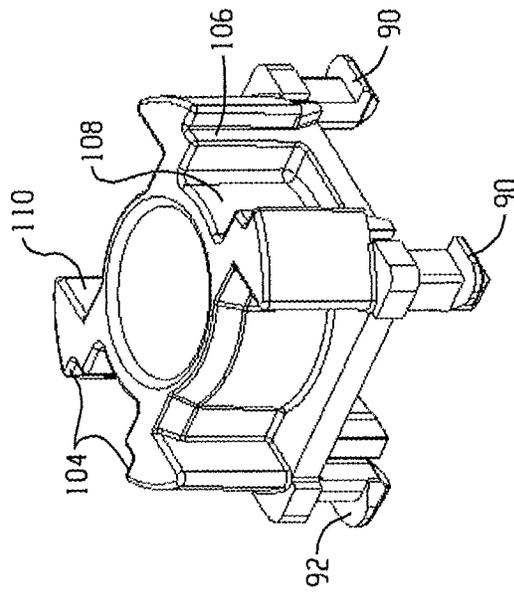


Fig. 13

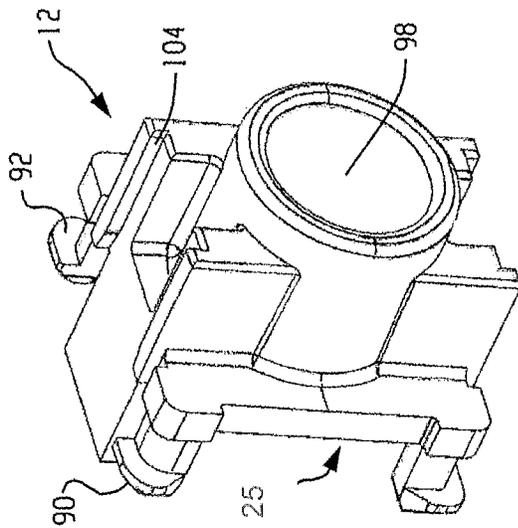


Fig. 12

Amended

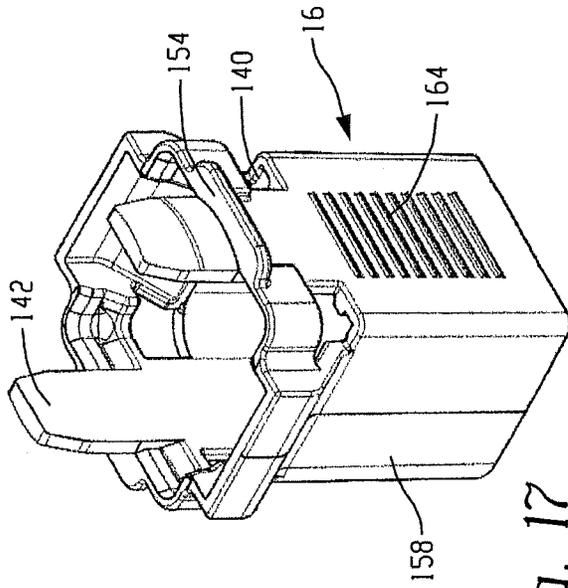


Fig. 17

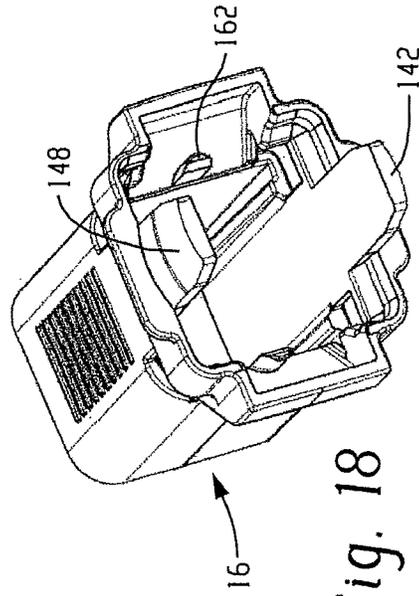


Fig. 18

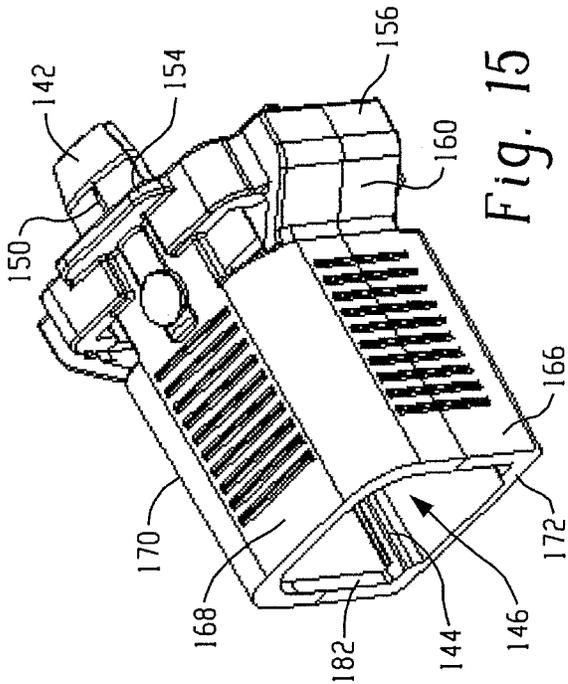


Fig. 15

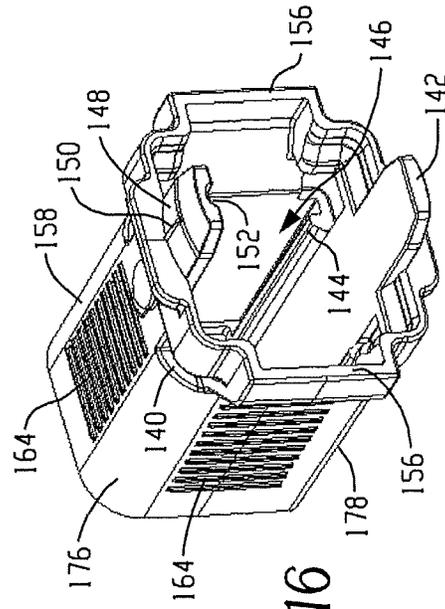


Fig. 16

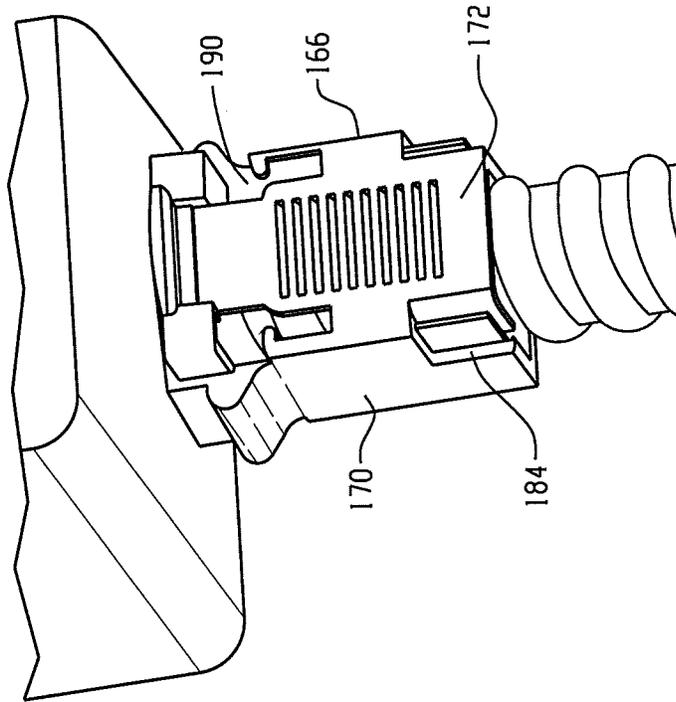


Fig. 20

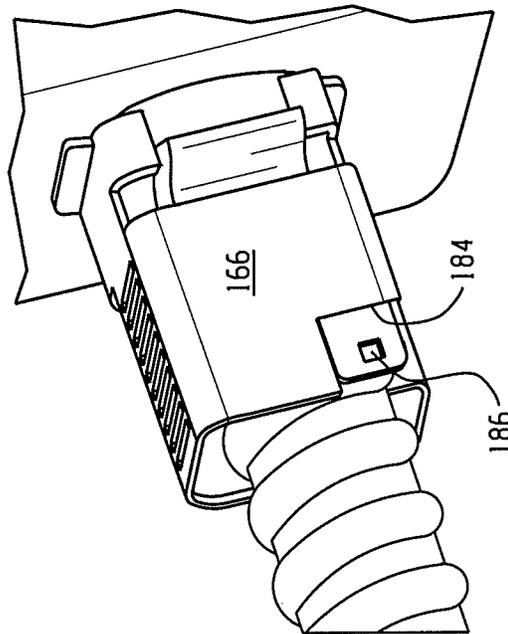


Fig. 19

CONDUIT CONNECTOR AND METHODS FOR MAKING AND USING THE SAME

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a reissue application of U.S. patent application Ser. No. 13/409,409, filed Mar. 1, 2012, which claims priority to U.S. Provisional Application Ser. No. 61/448,872, filed on Mar. 3, 2011, the entire contents of which are incorporated herein by reference.

TECHNICAL FIELD

The instant application relates to adapters for connecting conduits to enclosures, e.g., conduit connectors for connecting electrical conduit to junction boxes, outlet boxes, or other enclosures.

BACKGROUND

The most common use for electrical conduit connectors is to facilitate the connection of a conduit or cable to a junction box. The junction box can be a variety of electrical enclosures such as an outlet box, transformer enclosure, circuit panel, lighting fixture—the list is nearly endless. Similarly, the conduit can be rigid or flexible, or could be hose, other tubing capable of routing electrical wire, or cable. Cable can be non-metallic sheathed cable, portable cord, or a variety of other types of electrical conductors. The instant application is equally successful in connecting a plurality of types of conduits, cables, and other electrical conductors to a wide variety of boxes and other enclosures. Therefore, as used in this specification, the term conduit is not limited to standard rigid electrical conduit, but shall be intended to mean any type of conduit, any type of cable, or any other type of electrical conductor. Many commercial and residential buildings have electrical installations with many types of conduit-to-junction-box connections that utilize electrical connectors.

The two most common types of electrical connectors used are a snap-in connector, and a multipart connector which can be composed of two or more components that utilizes a threaded male end in conjunction with a threaded female locknut, hereinafter referred to collectively as a two-part locknut connector. In the case of the two-part locknut connector, the male threaded end is inserted into the junction box through a knockout (e.g., a hole or other opening). A rigid connection is established by threading the lock nut onto the male end in the junction box interior. The snap-in connector is another commonly used connector, which utilizes a snap ring to quickly connect it to the junction box. Either type of connector is integrated with an adapter end, which allows the attachment of conduit, cable, or a variety of types of hollow tubing.

The installation of electrical systems is generally expensive as an electrician must first install the enclosures, route conduit between each enclosure, and install connectors and then pull all necessary electrical wiring through the conduit.

In other words, installation is expensive because it is labor intensive. The commercially available electrical connectors are one factor accentuating the labor intensiveness. Locknut connectors increase the cost of installing electrical systems for a number of reasons. The current art two-part locknut connectors are plagued with labor intensive problems. First, the locknut connectors are shipped from the manufacturer preassembled. That is, the electrician must first remove the locknut from the male end before it can be installed. Once the male end of the connector is placed through the knockout, the electrician must rethread the locknut onto the connector from the interior of the junction box.

Two hands are required to disassemble and then reassemble the connectors in the knockout. Consequently, it is difficult to hold a tool or a piece of conduit while reassembling the connector. Once the locknut is threaded it must be tightened. In accordance with many building codes and safety regulations, connectors must be firmly and reliably attached to junction boxes. To properly tighten the two-part locknut connector, the electrician must use a tool, usually a set of pliers or a screwdriver. Occasionally, when the proper tool is unavailable, an electrician will use any object within reach. These situations, while rare, raise serious safety issues. In many instances, however, to “get the job done” the locknut is “finger” tightened. Those persons skilled in the art know that finger tightened two-part locknut connectors can eventually loosen, and a loose connector can cause great strain to be put onto the electrical wires and their connections resulting in an increase in the probability of an electrical fire or other electrical problems, such as poor grounding.

Secondly, when the electrician disassembles the fitting by taking the locknut off the connector, the locknut can be dropped or misplaced. This can occur when the electrician is in an elevated position, such as, on a scissor lift or on scaffolding because the electrical conduit is often installed in out-of-the-way places like in rafters and above ceilings. If the locknut cannot be found, the connector is useless. If the electrician decides to retrieve the dropped locknut, the installation time is prolonged.

A third common problem with the present locknut connectors is the locknut is easily cross threaded onto the male thread. When this occurs, the electrician must usually use a tool to remove the locknut. On occasion, cross threading the locknut will damage the male threads on the connector making it difficult or impossible to reuse the connector. Again, the electrician must spend their time either removing the defective connector or forcing the locknut through the damaged portion of the threads.

A fourth problem with the present two-part locknut connectors is the distance the male end protrudes into the junction box. In some installations, the space inside the enclosure is already minimal. The space limitation becomes an acute problem when an additional connector is installed. The male threaded end protrudes well past the depth of the locknut and may interfere with another connector, the contents of the enclosure, or wiring inside the box. Therefore, in a limited space enclosure, the excess thread must be removed. Typically, the electrician may clip off some of the receptacle or mounting screws, or completes a combination of space enlarging modifications, all of which prolong installation time and threaten the integrity of the system as designed. A fifth common problem with the present two-part locknut connectors occurs during disassembly of the connector from the enclosure. Electricians may disassemble an installation for a variety of reasons. The disassembly of the locknut connector is more time consuming than the instal-

3

lation. If the locknut was installed properly, that is, by tightening it with a tool, then the locknut must be removed with a tool. Similar to the installation, if the threads are damaged during disassembly, the connector is useless. Also similar to the installation problems, if the locknut is lost, it must be replaced if the connector is to be used again. The snap-in connector presents similar problems. However, the most significant problem is that these connectors, in most cases, do not create a rigid connection. Because the snap ring is sized to accept a variety of box wall thickness, it does not rigidly attach to many boxes. The loose fit may cause electrical continuity problems, a highly dangerous situation, since the box, the conduit, and the connector are intended to be part of the electrical grounding system in some applications.

There remains an unfulfilled need to provide a generally universal connector that is easy to use; e.g., which can be installed quickly and easily without tools, does not require access to the interior of the junction box, and/or can be easily removed and reused in the box.

BRIEF SUMMARY

Disclosed herein are conduit connectors and methods for making and using the same.

In one embodiment, the conduit connector can comprise: a body comprising a hollow center capable of receiving a conduit in a receiving end, wherein the hollow center extends from the receiving end to the connecting end; a spring disposed within the hollow center and extending out of the connecting end, wherein the spring comprises engagement tangs extending into the hollow center, toward the connection end, and spring tangs extending past the connection end and spaced apart a distance greater than or equal to an opening diameter in a junction box; and an antishort bush located in the connecting end of the body, retaining the spring in the body.

A method of using the conduit connector can comprise inserting a conduit into the channel so that the engagement tangs physically contact grooves along the outer surface of the conduit; and inserting the spring tangs into an opening (e.g., in a junction box), until the side lugs engage the inner surface of the box.

These and other features of the conduit connector and method will be understood from the drawings and description below.

BRIEF DESCRIPTION OF THE DRAWINGS

Refer now to the figures, which are merely exemplary, not limiting, and wherein like elements are numbered alike.

FIG. 1 is an exploded, disassembled, prospective view of an embodiment of a conduit connector, conduit, and junction box.

FIG. 2 is a cross-sectional side view of the conduit connector of FIG. 1 connecting a conduit to a junction box taken along lines 2-2 of FIG. 3.

FIG. 3 is a perspective view of the conduit connector of FIG. 1 connecting a conduit to a junction box.

FIG. 4 is an exploded (disassembled) perspective view of an embodiment the conduit connector elements.

FIG. 5 is an exploded (disassembled) cross-sectional view of the embodiment the conduit connector elements of FIG. 4 taken along lines 5-5.

FIG. 6 is an assembled, perspective view of the embodiment of the conduit connector elements of FIG. 4.

4

FIG. 7 is a perspective view of an embodiment of a spring for the conduit connector.

FIG. 8 is a perspective cross-sectional view of the spring of FIG. 7 taken along lines 9-9.

FIG. 9 is a perspective view of another embodiment of a spring for a conduit connector.

FIG. 10 is a partial side view of a connecting tang for the spring of FIG. 9.

FIG. 11 is a bottom view of a spring assembled within a body.

FIG. 12 is a perspective view of an embodiment of the anti short bush of FIG. 3.

FIG. 13 is a perspective view of another embodiment of an antishort bush for a conduit connector.

FIG. 14 is another perspective view of the antishort bush of FIG. 13.

FIG. 15 is a perspective view of an embodiment of a conduit connector body.

FIG. 16 is another perspective view of the conduit connector body of FIG. 15.

FIG. 17 is a perspective view of the conduit connector body of FIG. 3.

FIG. 18 is another perspective view of the conduit connector body of FIG. 3.

FIG. 19 is a side perspective view of another embodiment of a conduit connector attached to a junction box.

FIG. 20 is a bottom perspective view of the conduit connector of FIG. 19 connected to a junction box.

DETAILED DESCRIPTION

Disclosed herein are conduit connectors capable of connecting to an enclosure, e.g., capable of connecting an electrical conduit to a junction box. The conduit connector comprises a body, a spring, and an antishort bush. The spring inserts into the body and can be held in place with the antishort bush and/or due to connection(s) with the body. During use, tangs of the spring extend into and hold the connector to a junction box, while flanges extending from the spring engage and retain a conduit in side the body.

The conduit connector answers a long felt need for an electrical connector which can be installed quickly and easily without tools and does not require access to the interior of a junction box. The electrical connector has utility, among other uses, in the connection of a conduit to an enclosure (e.g., to an electrical junction box) through an opening in the side of the box commonly referred to as a knockout. Additionally, although this connector securely engages the enclosure and is not easily dislodged due to bumping or otherwise, it can be easily removed if desired. The conduit engagement region can cooperate with a variety of conduit, cables, and other electrical conductors.

Referring now to FIGS. 1-3, these figures illustrate the overall view of the conduit connector along with a conduit and a junction box. FIG. 1 provides an expanded view showing the junction box 10 located adjacent the connecting end 24 of [the conduit connector 20] an antishort bush 12, with a conduit 18 located adjacent the receiving end 22 of a body 16. The body 16 includes a connecting end 23 and the antishort bush 12 includes a receiving end 25. From the connecting end 24 of the antishort bush 12 to the receiving end 22 of the body 16, the conduit connector 20, comprises the antishort bush 12, the spring 14, and the body 16. FIGS. 2 and 3 illustrate the assembled connector 20 attached to the junction box 10 and engaging the conduit 18. In these figures the conduit 18 extends into the body 16 wherein receiving tangs 42 engage the outer convolutions of the conduit 18,

inhibiting the conduit **18** from being withdrawn from the body **20** through the receiving end **22** of the body **16**. Connecting tangs **56** extend through the opening **26** in the side of the junction box **10**, and engage the sides thereof to prevent the inadvertent removal or dislodging of the conduit connector **20** from the box **10**. FIGS. 4-6 provide further views of the conduit connector **20** of FIG. 1.

FIGS. 7-10 illustrate embodiments of a spring that is used to engage both the conduit **18** and the box **10**. The spring **14** is so sized and configured that a main portion **40** adjacent the [receiving end **24**] connecting end **23** of the body **16** is disposed within the body **16**, when the conduit connector is assembled. The main portion **40** of the spring can be enclosed with a cavity extending therethrough or have an open side with a channel **70** extending therethrough. The overall shape is complementary to the shape of the body so as to be inserted and retained within the body **16**. Some possible main portion **40** shapes include various polygonal shapes (e.g., U-shaped, rectangular, square, pentagonal, and so forth). Optionally, the [body] spring **14** can comprise aperture(s) **72** adjacent to the receiving end [22] **25** of the antishort bush **12**, e.g., can comprise a channel and an aperture **72** adjacent to each corner at the receiving end **25** of the antishort bush **12**. In some embodiments the main portion **40** comprises three sides. The opposing sides are arranged substantially perpendicular to the connecting side. The corners where the sides connect can be squared corners or can be rounded.

Extending inward and toward the [connecting end **24**] antishort bush **12** is a plurality of receiving tangs **42**. The receiving tangs **42** can form a shape that will align the conduit **18** within the connector **20**. For example, the tangs can form a generally V-shaped profile that will align the conduit **18** in the channel (e.g., can align the conduit **18** in the center of the connector **20**). Each tang **42**, can, individually, have a shape for gripping and restraining the conduit **18** and optionally for aligning the conduit **18**. For example, the spring **14** can comprise 3 receiving tangs **42**. The central receiving tang **44** can angle from the sides down toward the middle (e.g., to form a V-shaped end), the first side receiving tang **46** and the second side receiving tang **48** can both have diagonal ends **50,52**, respectively, that angle toward the central receiving tang **44**, to attain the generally V-shaped profile (dotted line **54**). Furthermore, the ends **50,52** can have an angle that is commensurate with the angle of curvature of the conduit convolutions. Optionally, each tang **44,46,48** can be oriented to extend into the body at the same distance from the receiving end **22** or can extend at different distances. For example, tang **44** can extend into the channel **70** at a distance d_1 from receiving end **22**, while tang **48** can extend at a different distance d_2 from receiving end **22** as is illustrated in FIG. 8, wherein the distance is from the receiving end to the point of the tang that would engage a conduit.

Extending from the main portion **40** of the spring **14** can be connector tang(s) **56**, such as at least two opposing connector tangs **56**. At the base of the tang **56** can be an aperture **74** configured to receive a knob on the body **16**, e.g., enhancing alignment of the spring within the body **16**. Each connector tang **56** can have an optional center lug **58**. This lug **58** can ease insertion through the opening in the box and can facilitate retention of the tangs **56** within the box, e.g., in case of external side forces. This tang extends outward from a surface **66** (e.g., main body portion) of the tang **56**, while the connector lugs extend from opposite sides of the tangs **56**. The lugs can be angled outward, e.g., to further enhance the engagement with the box (e.g., to

prevent unintentional withdrawal from the knockout), and/or to enhance electrical grounding connection.

Each tang **56** comprises a set of side lugs **60**. The side lugs **60** can be angled toward the receiving end **25** of the antishort bush **12**, e.g., have a negative angle, θ , e.g., to avoid disengagement of connector after applying pulling load. The side lugs can be angled such that the connecting tang **56** diverges from near the end **68** toward the main body **40** (e.g., the side lugs **60** can have a generally triangular shape) to allow facile insertion into the box **10**.

Engaging the outside of the box when the connector is attached to the junction box are the outside lugs **62**. In other words, the wall **28** of the junction box **10** is engaged on an inner surface by side lugs **60** and on an outer surface by outside lugs **62**; being located in the valley **64** therebetween. The valley **64** can be sized and shaped to receive a variety of junction box wall thicknesses. For example, the outside lugs **62** can also optionally comprise a negative angle Φ that allows different size walls to be readily received and securely engaged within the valley **64**. Angle Φ can be an angle of 10 to 20 degrees, specifically, 13 to 17 degrees.

Located at the [receiving end] connecting end **23** of the body **16** is the antishort bush **12**. (See FIGS. 12-14) The antishort bush **12** is designed to connect to the body **16** at the connecting end [24] **23**, such that the connecting tangs **56** extend along the sides of the antishort bush **12**. The antishort bush **12** comprises projections **90** for snap engagement with the body **16**. The number of snap engagements is dependent upon the general shape of the body and of the antishort bush. For a generally square cross-sectional body shape, two or more projections **90** can be employed, with four or more generally used for secure engagement. Each projection can comprise a lip **92** configured to engage an opening **140** in the body **16** (see FIG. 16). The projection **90** can extend toward the receiving end **22** with the lip **92** extending outward at a complementary angle from the body to engage the opening **140**, e.g., at an angle of 90° to the central axis A. (See FIG. 2) The foot **94** of the projection **90** can be angled so as to enable facile insertion into the body **16** and so as to facilitate flexing of the projection **90**. For example, the foot **94** can have a generally conical (e.g., truncated conical) shape that narrows towards the receiving end **22**. The angle of the foot can be different on different sides of the foot **94**. For example a lower angle can extend from the end of the lip **92** to the bottom of the foot **94** than on another side of the foot **94**.

In all embodiments, along one or more sides of the antishort bush **12** that will extend into the body **16** over the spring **14**, can optionally be a restrictor **96**. The restrictor **96** can extend toward the [receiving end] connecting end **23** of the body **16** at a distance that is equal to or greater than the projections **90**. When the connector **20** is assembled, the restrictor **96** can restrict movement of the spring **14** in the body **16**, e.g., in one axial direction. For example, the restrictor **96** can be configured to restrict the side of the spring comprising the center lug between the restrictor **96** and a side of the body **16**. Extending from the restrictor **96**, in a direction away from channel **98** can optionally be rib(s) **100**, e.g., to assist in orientation of the antishort bush **12** in body **16**. The rib **100** can extend along axis A for all or part of the length of the restrictor **96**.

At the connecting end **24** of the antishort bush **12** can be a chamfer, e.g., to allow bending of the connecting tangs **56** during insertion of the connector **20** through the opening **26**.

Along the sides of the antishort bush **12** can be cavity(ies) **108** each located and configured to receive a body lug **142** (See FIGS. 15 and 16). The cavity **108** has a distance between the walls **104** that is greater than or equal to the

width of the body lug **142**. While the connector is entering the opening in the box, the body lug **142** comes down into the channel. The lip **106** restricts the body lug movement into the channel.

Now referring to FIGS. **15-18**, the body **16** comprises a shape configured to receive the spring main portion **40** within the body cavity **146** and the antishort bush **12** at the connecting end [of] **23** the body **16**. At the [receiving end] *connecting end* **23** of the body **16** can be body lug(s) **142** that extend along the axis A from the connecting end [24] **23** of the body **16**. The body lug(s) **142** can be designed to have a rounded or chamfer outer body **148**, e.g., to facilitate insertion into the junction box. Extending from the outer surface of the body lug **142** can be crush rib(s) **150**. This rib **150** can provide a tight fit with the opening **26**, crushing as necessary to enable insertion of the connecting end **24** into the box **10**. On the opposite side of one or more of the body lug(s) **142** can be a groove **152** oriented and designed to receive the antishort bush rib **100**. In the various embodiments, two or more body lugs **142** can be provided. The optional body lug(s) can facilitate the entry of the connector into the hole in the box and/or can establish a good contact with the body to decrease the contact resistance between the box and the connector (e.g., resulting in good grounding connection).

Also located at the connecting end [24] **23** of the body **16** can be a stop protrusion extending outward from the body **16** and configured to limit the insertion of the connector **20** into the opening **26**. In addition to the stop protrusions **154**, the body **16** can comprise extensions **156** that angle outward from the main body portion **158**. The extensions **156** can also limit the amount of that the connector **20** at extends into the box **10**. In many embodiments, the body comprises two extensions **156** on opposite sides, with two body lugs **142** on the other two opposing sides. The extensions **156** flare away from the main body portion **158** so as to receive the tangs **56** in their relaxed state. Therefore, the extension **156** can have a diverging area **160** that diverges at an angle complementary to the outward flare **72** of the spring **14**. Within the extension **156** can be a knob **162** that has a size and shape to extend into aperture **74** of the spring **14** when the connector **20** is assembled.

The main body portion **158** can comprise grips **164** on one or more sides thereof. The grips **164** can be any combination of elements that facilitates gripping of the main body portion **158**, e.g., serrations, depressions, protrusions (e.g., bumps), holes, as well as combinations comprising at least one of the foregoing.

The shape of the main body portion **158** is complementary to the spring shape. The main body portion can be polygonal (e.g., square, rectangular, and so forth). For example, three sides can form a U-shape (e.g., sides **166,168,170**), with the fourth side (**172**) merely covering the opening (e.g., see the cross-sectional view of FIG. **11**), e.g., forming a generally square shape. As can be seen, the sides can meet in a rounded corner (**174,176**) or a squared corner (**178,180**). The forth side **172** can comprise guide rib(s) **144** extending adjacent to the sides **166,170** to guide the edges **76** of the spring **14** when inserting the spring into the body **16**, and to prevent the edges from bending inward, into body cavity **146**.

At the connecting end **23** of the main body portion **158** are the openings **140** each sized and configured to receive one of the antishort bush projections **90**. At the receiving end **22** of the body **16** can be a collar **182** that prevents the spring from being forced out of the receiving end [of the body] **22** *body 16*; e.g., the collar can restrict the spring in one of the axial directions. Also at the receiving end **22** of the main

body portion **158** can be a slot **184** in one or more sides (e.g., in opposite sides **166, 170**) sides and located to allow the corners **78,80** of the spring **14** to extend through the slot **184** such that the jut **186** extends into window **82**, e.g., to further secure the spring within the body.

The main body portion **158** can also optionally comprise pocket(s) **190** configured to receive lug **90/92** from the antishort bush **12**, e.g., to retain the spring in the body.

The conduit connector can be formed of various materials as appropriate for the particular element. For example, the body can comprise a metal or metal alloy, such as zinc, aluminum, steel, as well as combinations comprising at least one of the foregoing (e.g., zinc alloy, aluminum alloy, and/or steel alloy). The spring can comprise a material such as steel, (e.g., spring steel and/or stainless steel), as well as combinations comprising at least one of the foregoing. The antishort bush can be formed of a plastic, such as engineering plastics.

In use, a conduit **18** (e.g., an electrical conduit) is inserted through the body **16** until the conduit is accessible at a connecting end **24** of that will be inserted into the enclosure **10**. As the conduit **18** is inserted into the body **16**, the coils (peaks) **30** of the conduit **18** cause the receiving tangs **42** cantilever outward towards the walls of the body **16** and spring inward as the valleys **32** of the conduit **18** reaches the ends of the receiving tangs **42**. As the conduit **18** is inserted into the body **16**, the center lug **58** guides the conduit into the desired location within the body.

In one embodiment, the conduit connector can comprise: a body comprising a hollow center capable of receiving a conduit in a receiving end, wherein the hollow center extends from the receiving end to the connecting end; a spring disposed within the hollow center and extending out of the connecting end, wherein the spring comprises engagement tangs extending into the hollow center, toward the connection end, and spring tangs extending past the connection end and spaced apart a distance greater than or equal to an opening diameter in a junction box; and an antishort bush located in the connecting end of the body, retaining the spring in the body.

A method of using the conduit connector can comprise inserting a conduit into the channel so that the engagement tangs physically contact grooves along the outer surface of the conduit; and inserting the spring tangs into an opening (e.g., in a junction box), until the side lugs engage the inner surface of the box.

In the various embodiments, (i) each spring tang can comprise an aperture that receives a knob on the body; and/or (ii) each spring tang can comprise a center lug extending outward from a spring main portion, away from the spring and toward the receiving end; and/or (iii) each spring tang can comprise side lugs angled toward the receiving end at an angle so that, once the connector is attached to an opening, the lugs avoid disengagement after applying a pulling load; and/or (iv) the side lugs form wings on opposite sides of each spring tang and have a shape that diverges from near an end of the spring tang toward the receiving end; and/or (v) a spring main portion can have three sides, with the spring tangs extending from two opposite sides, and the engagement tangs extend into the channel from all three sides; and/or (vi) the engagement tangs form a generally V-shaped profile that is configured to align a conduit in the channel; and/or (vii) the engagement tangs can comprise a central receiving tang that is angled from the sides into the channel and having a generally V-shaped end, and a first side receiving tang having a diagonal ends that angles toward the central receiving tang

and a second side receiving tang having a diagonal end angled toward the central receiving tang forming a generally V-shaped profile of the engagement tangs; and/or (viii) each engagement tang can extend into the body at a different distance than another engagement tang; and/or (ix) the antishort bush can further comprise a restrictor extending toward the receiving end, wherein the restrictor restricts movement of the spring; and/or (x) the antishort bush can comprise projections that extend toward the body and through an opening such that a foot on the projection snapfits the antishort bush onto the body; and/or (xi) near the receiving end, the body can comprise a slot such that a corner at the receiving end of the spring passes through the slot and a window near the corner engages a jut on the body; and/or (xii) the body can have a polygonal shape.

Before or after the conduit 18 is disposed within the body 16, the conduit connector 20 can be connected to the junction box 10. Connection to the box 10 comprises exerting force on the conduit connector 20 in the direction of the opening 26. As the connector tangs enter the opening 26, they pivot (cantilever), decreasing the outer diameter of the spring 14, and enabling the side lugs 60 to pass into the box 10. Once the lugs 60 have passed through the opening 26, the connector tang springs outward causing the wall 28 to be located in the valley 64, the side lugs to be located within the box 10, and the outside lugs to be located outside the box 10, thereby grasping the box opening 26 and holding the connector 20 to the box 10. If the center lug(s) 58 are present along the connector tang(s) 56, they facilitate the inward flexing of the connector tang 56 as it passes through the opening 26.

What is claims is:

1. A conduit connector, comprising:

a body comprising a hollow center capable of receiving a conduit in a receiving end, wherein the hollow center extends from the receiving end to [the] a connecting end;

a spring disposed within the [hollow center and extending out of the connecting end] body, wherein the spring comprises engagement tangs extending into the hollow center[, toward the connection end] wherein the engagement tangs are configured to physically contact grooves along an outer surface of a conduit when the conduit is inserted into the body, and spring tangs extending past the [connection] connecting end and spaced apart a distance greater than or equal to an opening diameter in a junction box; and an antishort bush located in the connecting end of the body[, retaining the spring in the body].

2. The conduit connector of claim 1, wherein each spring tang comprises an [aperature] aperture that receives a knob on the body.

3. The conduit connector of claim 1, wherein each spring tang comprises a center lug extending outward from a spring main portion, away from the spring and toward the receiving end.

4. The conduit connector of claim 1, wherein each spring tang comprises side lugs angled toward the receiving end at an angle so that, once the connector is attached to an opening, the lugs avoid disengagement after applying a pulling load.

5. The conduit connector of claim 4, wherein the side lugs form wings on opposite sides of each spring tang and have a shape that diverges from near an end of the spring tang toward the receiving end of the antishort bush.

6. The conduit connector of claim 1, wherein a spring main portion can have three sides, with the spring tangs

extending from two opposite sides, and the engagement tangs extend into the channel from all three sides.

7. The conduit connector of claim 6, wherein the engagement tangs angle toward each other to form a generally V-shaped profile that is configured to align [a] the conduit in the [channel] center of the connector.

8. The conduit connector of claim 6, wherein the engagement tangs comprise a central receiving tang that is angled from the sides into the channel and having a generally V-shaped end, and a first side receiving tang having a diagonal [ends] end that angles toward the central receiving tang and a second side receiving tang having a diagonal end angled toward the central receiving tang forming a generally V-shaped profile of the engagement tangs.

9. The conduit connector of claim 6, wherein each engagement tang extends into the body at a different distance than another engagement tang.

10. The conduit connector of claim 1, wherein the antishort bush further comprises a restrictor extending toward the [receiving end] connecting end of the body, wherein the restrictor restricts movement of the spring.

11. The conduit connector of claim 1, wherein the antishort bush comprises projections that extend toward the body and through an opening such that a foot on the projection snapfits the antishort bush onto the body.

12. The conduit connector of claim 1, wherein, near the receiving end, the body comprises a slot such that a corner at the receiving end of the spring passes through the slot and a window near the corner engages a jut on the body.

13. The conduit connector of claim 1, wherein the body has a polygonal shape.

14. A conduit connector, comprising:

a body comprising a hollow center capable of receiving a conduit in a receiving end and a knob, wherein the hollow center extends from the receiving end to [the] a connecting end;

a spring disposed [within] into the [hollow center and extending out of the connecting end] body, wherein the spring comprises

engagement tangs extend into the hollow center, toward the [connection] connecting end, wherein the engagement tangs angle toward each other to form a generally V-shaped profile that is configured to align a conduit in the channel,

spring tangs comprise a center lug extending outward from a spring main portion, away from the spring and toward the receiving end, wherein the spring tangs [extend past the connection end and] are spaced apart a distance greater than or equal to an opening diameter in a junction box, and wherein each spring tang comprises side lugs angled toward the receiving end at an angle so that, once the connector is attached to an opening, the lugs avoid disengagement after applying a pulling load; and an aperture that received the knob; and

an antishort bush located in the connecting end of the body[, retaining the spring in the body].

15. The conduit connector of claim 14, wherein the side lugs form wings on opposite sides of each spring tang and have a shape that diverges from near an end of the spring tang toward the receiving end of the antishort bush.

16. The conduit connector of claim 14, wherein a spring main portion can have three sides, with the spring tangs extending from two opposite sides, and the engagement tangs extend into the channel from all three sides.

17. The conduit connector of claim 16, wherein the engagement tangs comprise a central receiving tang that is

11

angled from the sides into the channel and having a generally V-shaped end, and a first side receiving tang having a diagonal ends that angles toward the central receiving tang and a second side receiving tang having a diagonal end angled toward the central receiving tang forming a generally V-shaped profile of the engagement tangs.

18. The conduit connector of claim 16, wherein each engagement tang extends into the body at a different distance than another engagement tang.

19. The conduit connector of claim 14, wherein antishort bush further comprises a restrictor extending toward the [receiving] connecting end of the body, wherein the restrictor restricts movement of the spring, and comprises projections that extend toward the body and through an opening such that a foot on the projection snapfits the antishort bush onto the body.

20. The conduit connector of claim 14, wherein, near the receiving end, the body comprises a slot such that a corner at the receiving end of the spring passes through the slot and a window near the corner engages a jut on the body.

21. A conduit connector, comprising:

a hollow body capable of receiving a conduit in a receiving end, wherein the body has a rectangular body shape, wherein the body extends from the receiving end to a connecting end;

a spring inserted into the body, wherein the spring comprises engagement tangs extending into the body capable of engaging a conduit, and at least two spring tangs capable of engaging an opening in a junction box; and wherein the body is configured to receive the spring; and

12

an antishort bush located at the connecting end of the body.

22. The conduit connector of claim 21, wherein the spring has a rectangular shape that is complementary to the rectangular body shape.

23. The conduit connector of claim 21, wherein the antishort bush extends into the spring, between the spring tangs.

24. The conduit connector of claim 21, wherein the spring tangs are capable of removably engaging the opening in the junction box.

25. A method of securing a conduit to a junction box, comprising:

disposing a conduit into a conduit connector and engaging the conduit with engagement tangs that extend into the conduit connector, wherein the conduit connector comprises

a hollow body having a rectangular body shape, wherein the conduit extends into the body;

a spring disposed within the hollow body and comprising the engagement tangs and spring tangs extending out of the hollow body; and

an antishort bush, wherein the antishort bush extends through the opening in the junction box;

inserting a connecting end of the conduit connector into an opening in a junction box such that the spring tangs engage the opening.

* * * * *