



- (51) **International Patent Classification:**
H02J 17/00 (2006.01) *H02J 7/00* (2006.01)
- (21) **International Application Number:**
PCT/US2014/044071
- (22) **International Filing Date:**
25 June 2014 (25.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/839,618 26 June 2013 (26.06.2013) US
- (71) **Applicant:** **ROBERT BOSCH GMBH** [DE/DE]; Postfach 30 02 20, D-70442 Stuttgart (DE).
- (72) **Inventor; and**
(71) **Applicant :** **LANG, Christoph** [DE/US]; 520 Cheyenne Drive, Sunnyvale, CA 94087 (US).
- (74) **Agent:** **MAGINOT, Paul, J.**; Maginot, Moore & Beck LLP, One Indiana Square, Suite 2200, Indianapolis, IN 46204 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WIRELESS CHARGING SYSTEM

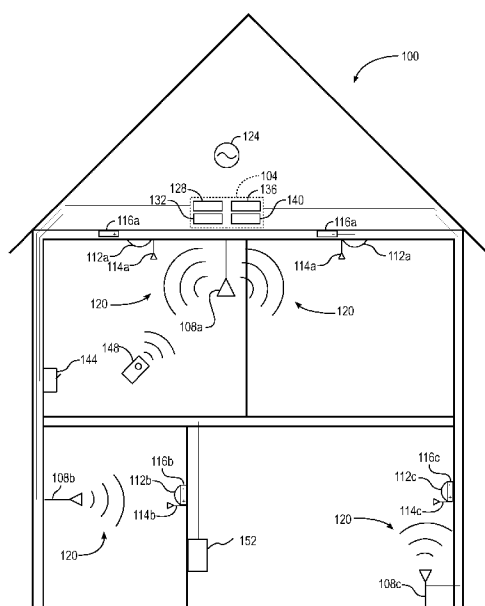


FIG. 1

(57) Abstract: A wireless power transmission system includes a first power transmitter configured to transmit a first electromagnetic field, a first power receiver configured to generate electrical energy using the first transmitted electromagnetic field, a first occupancy sensor configured to indicate a first presence of a first individual within a first sensed area, and a control unit configured to control the first power transmitter based upon the indicated first presence.

WIRELESS CHARGING SYSTEM

[0001] This application claims the benefit of U.S. Provisional Application No. 61/839,618 filed June 26, 2013, the entire contents of which are incorporated herein by reference.

5

Technical Field

[0002] This disclosure relates generally to power transfer systems, and, more particularly, wireless charging systems.

10 Background

[0003] Use of wireless sensors is rapidly increasing in residential, commercial, and industrial applications. For example, wireless sensors are used in alarm systems for residential and commercial buildings, for wireless temperature monitoring, and to detect occupancy in rooms. Buildings incorporating temperature and occupancy detection sensors, also known as “smart”
15 buildings, can automatically control climate systems and lighting within the building.

[0004] Using wireless sensors for building applications enables simple retrofitting of buildings without the need for wiring electrical power to the sensors. However, wireless sensors are typically powered by a battery, which can power the sensor only for a limited duration.

Replacing or recharging the batteries in wireless sensors can be cumbersome. One solution is to
20 charge the wireless sensors remotely using electromagnetic energy, for example electromagnetic waves in the radio frequency band, also referred to as radio frequency (“RF”) charging. In an RF charging system, a power transmitter broadcasts energy, which is received by an antenna and converted into electric power to charge the batteries in the attached sensor.

[0005] Although RF power transmission is designed to satisfy safety regulations, some people perceive the RF electromagnetic radiation as hazardous to human health. What is needed, therefore, are improvements in RF power transmission that reduce the potential for exposure to RF electromagnetic radiation.

5

Summary

[0006] In one embodiment, a wireless power transmission system includes a first power transmitter configured to transmit a first electromagnetic field, a first power receiver configured to generate electrical energy using the first transmitted electromagnetic field, a first occupancy
10 sensor configured to indicate a first presence of a first individual within a first sensed area, and a control unit configured to control the first power transmitter based upon the indicated first presence.

[0007] In another embodiment, a method of operating a wireless power transmission system includes indicating a first presence of a first individual within a first sensed area using a first
15 occupancy sensor, receiving the indication of the first presence of the first individual at a control unit, controlling with the control unit a first power transmitter based upon the received first indication, transmitting a first electromagnetic field with the first power transmitter under the control of the control unit, and generating electrical power from the first electromagnetic field with a first power receiver.

20

Brief Description of the Drawings

[0008] FIG. 1 is a schematic diagram of a building equipped with a wireless charging system having a control unit configured to selectively activate power transmitters.

[0009] FIG. 2 is a schematic diagram of another wireless charging system having a control unit connected to a web server.

[0010] FIG. 3 is a flow diagram of a process for selectively operating a wireless power transmitter.

5 [0011] FIG. 4 is a flow diagram of another process for selectively operating a wireless power transmitter.

[0012] FIG. 5 is a flow diagram of yet another process for selectively operating a wireless power transmitter.

10 Detailed Description

[0013] For the purposes of promoting an understanding of the principles of the embodiments described herein, reference is now made to the drawings and descriptions in the following written specification. No limitation to the scope of the subject matter is intended by the references. This disclosure also includes any alterations and modifications to the illustrated
15 embodiments and includes further applications of the principles of the described embodiments as would normally occur to one skilled in the art to which this document pertains.

[0014] FIG. 1 depicts a schematic diagram of a place or asset such as a building, a residential house, a garage, a hotel, a factory, a hospital, a mall, or the like equipped with a wireless charging system 100. In another embodiment, the asset can be a moving vessel such as a
20 vehicle, a truck, a plane, a boat, a ship, or the like. The wireless charging system 100 includes a control unit 104, at least one power transmitter, and at least one wireless device (e.g. sensor or actuator), each of which is operatively connected to an energy storage system/device/cell such as a battery. In the illustrated embodiment, the system 100 includes three power transmitters 108a,

108b, and 108c and four sensors 112a, 112b, and 112c, which are connected to batteries 116a, 116b, and 116c, respectively. The power transmitters 108a – 108c are each configured to generate an electromagnetic field 120. In the illustrated embodiment, the power transmitters 108a – 108c are radio-frequency (“RF”) antennas, though other power transmitters, such as
5 inductive resonance loops or magnetic antennas, are used in other embodiments.

[0015] The sensors 112a – 112c include occupancy sensors configured to detect whether a person occupies the room in which the sensors 112a – 112c are mounted and to generate a corresponding signal. The signals generated by the occupancy sensors are delivered to the control unit 104 via a wireless signal transmitter, three wireless signal transmitters 114a – 114c
10 are illustrated, which transmit the signals via a known wireless signal transmission standard, for example Bluetooth, WiFi, Zigbee, TransferJet, UWB, NFC, EnOcean, dedicated short-range communication (DSRC), or RF signal transmission. In some embodiments, a wired connection or power line communication through wired receptacles is used to transmit the signals. The sensors 112a – 112c each include a power receiver configured to receive electromagnetic
15 radiation 120 generated by the power transmitters 108a – 108c and convert the electromagnetic radiation 120 to electric power that charges the batteries 116a – 116c. In some embodiments, the sensors 112a – 112c include additional sensors, for example temperature sensors, alarm sensors, thermal sensors, motion sensors, optical sensors, camera sensors, atmosphere sensors, and resistive sensors. In other embodiments, the sensors 112a – 112c are connected directly to a
20 building power source via, for example, a wired receptacle, while the wireless power transmitters 108a – 108c are configured to deliver power to charge batteries connected to other sensors and electronic components in the building. In other embodiments, more than one sensor is connected to a shared power receiver to receive electromagnetic radiation generated by one or more power

transmitters 108a – 108c. In further embodiments, the sensors, power receivers, power transmitters, or any combination thereof can be mounted, embedded, or integrated in any asset structures such as a ceiling, a wall, a window, a door, a floor, a roof, or the like.

[0016] The control unit 104 is operatively connected to a power source 124 to receive electric power from the power source 124. In the illustrated embodiment, the power source 124 is AC power wired to the building in which the wireless charging system 100 is installed. In other embodiments, the power source is a battery, a generator, a solar receiver, or any other suitable source of electric power. The power source can be mounted, embedded, or integrated in any asset structures such as a ceiling, a wall, a window, a door, a floor, a roof, or the like. The control unit 104 includes a controller 128, a memory unit 132, a timer 136, and an optional web server 140. The control unit 104 is operatively connected to the power transmitters 108a – 108c to enable the control unit 104 to selectively activate the power transmitters 108a – 108c.

[0017] The control unit 104 is operatively connected to a switch 144 to enable a user to manually activate and deactivate the power transmitters 108a – 108c. In some embodiments, the switch 144 is positioned on one of the power transmitters 108a – 108c or a separate switch is positioned on each power transmitter 108a – 108c, while in other embodiments the switch 144 or switches are remote from the power transmitters 108a – 108c. In different embodiments, the wireless charging system 100 includes a remote control 148 that enables a user to selectively activate any or all of the power transmitters 108a – 108c or change operating parameters of the wireless charging system 100. In various embodiments, the control unit 104 is operatively connected to a building control system 152, which operates, for example, lighting, climate control, and an alarm system in the building. In other embodiments, the control unit 104 is

integrated with the building control system 152. In further embodiments, the control unit 104 is integrated into the power transmitter.

[0018] Operation and control of the various components and functions of the wireless charging system 100 are performed with the aid of the controller 128. The controller 128 is implemented with general or specialized programmable processors that execute programmed instructions. The instructions and data required to perform the programmed functions are stored in the memory unit 132 associated with the control unit 104. The processors, the memory 132, and interface circuitry configure the controller 128 to perform the functions described above and the processes described below. These components can be provided on a printed circuit card or provided as a circuit in an application specific integrated circuit (ASIC). Each of the circuits can be implemented with a separate processor or multiple circuits can be implemented on the same processor. Alternatively, the circuits can be implemented with discrete components or circuits provided in VLSI circuits. Also, the circuits described herein can be implemented with a combination of processors, ASICs, discrete components, or VLSI circuits.

[0019] In operation, the control unit 104 is configured to selectively activate any or all of the power transmitters 108a – 108c to generate the electromagnetic field 120. The sensors 112a – 112c each have a power receiving antenna that absorbs the electromagnetic energy 120 and converts the energy into electric power, which is used to charge the batteries 116a – 116c connected to the sensors 112a – 112c, respectively. In another embodiment, the sensors are configured to connect to a shared power receiving antenna.

[0020] The timer 136 is configured to recall a program stored in memory 128 such that the control unit 104 activates any or all of the power transmitters 108a – 108c only at predetermined times. The timer 136 is programmed by the remote control 148, by manual input, or by a

computer or smartphone connected to the timer 136 via the web server 140. To minimize exposure to the electromagnetic radiation, the timer 136 is preferably set such that the control unit 104 activates the power transmitters 108a – 108c only when the room in which they are located is typically unoccupied, for example at night in offices or during work hours in a residence.

[0021] The web server 140 connects the control unit 104 to an electronic device such as a computer, a smartphone, a tablet, a gaming console, a laptop, or the like via internet protocol (“IP”). In some embodiments, the web server 140 is a local server, connected only to a local area network, while in other embodiments the web server is connected to the internet, enabling the control unit 104 to be programmed and controlled remotely from any internet-connected computer or smartphone. The web server can also be in a remote place and control the power transmitters via a connection, for example an IP connection.

[0022] The memory 132 of the control unit 104 stores the programming instructions for the timer 136 and for the controller 128. Additionally, the control unit 104 generates a log, which is stored in the memory 132, to record the times when each of the power transmitters 108a – 108c are active. A user can then access the log via the web server 140 to monitor the human exposure to the electromagnetic radiation.

[0023] In the illustrated embodiment, the wireless charging system 100 includes three power transmitters 108a – 108c. Wireless power transmitter 108a is configured to transmit power to two wireless sensors 112a, located in different rooms of the building when the rooms are unoccupied. Wireless power transmitters 108b and 108c generate a lower strength electromagnetic field 120, and are configured to transmit power only within a single room to sensors 112b and 112c, respectively, when the associated occupancy sensor detects that the room

in which it is located is unoccupied. In some embodiments, the wireless charging system includes a single wireless power transmitter, which generates an electromagnetic field strong enough to be received by all sensors throughout the building. In such a system, the control unit can be configured to activate the wireless power transmitter only when the sensors indicate that
5 the entire building is unoccupied or nearly unoccupied.

[0024] FIG. 2 is a schematic illustration of another embodiment of a wireless charging system 200. The wireless charging system 200 includes a power transmission system 204, a receiving system 208, and an occupancy sensor system 212, which, in the illustrated embodiment, are all located in a single room 202.

10 **[0025]** The power transmission system 204 includes a control unit 216 and a power transmitter 220, both of which are operatively connected to a power source 224. The control unit 216 is configured to selectively activate the power transmitter 220 to emit electromagnetic energy 228 into the room 202, directed towards the receiving system 208 and the occupancy sensor system 212.

15 **[0026]** The receiving system 208 includes a power receiver 232, at least one sensor, for example an alarm sensor 236 and a temperature sensor 240, emergency lighting 244, and an energy storage system/device/cell such as a battery 248. The power receiver is configured to receive the electromagnetic energy 228 generated by the power transmitter 220 and convert the received energy into electric power to charge the battery 248. The battery 248 is operatively
20 connected to the sensors 236 and 240 and the lighting 244 to enable the sensors 236 and 240 and the lighting 244 to operate with the energy stored in the battery 248.

[0027] The occupancy sensor system 212 includes an optional power receiver 252, an occupancy sensor 256, and a battery 260. In alternate embodiments, the occupancy sensor

system is powered by a wired connection to a power supply. The power receiver 252 receives the electromagnetic energy 228 generated by the power transmitter 220 and converts the received energy to electrical energy to charge the battery 260, which powers the occupancy sensor 256. The occupancy sensor 256 is configured to detect the presence of a person in the room 202, and to generate a corresponding signal, which is delivered to the control unit 216. In some embodiments, the power receiver 252 is configured to transmit the sensor signal to the power transmitter, while in other embodiments other known wired or wireless signal transmission systems are used to transmit the sensor signal to the control unit.

[0028] The control unit 216 is optionally connected to a web server 264, which is remote of the power transmission system 204. The web server 264 is configured to be controlled by an electronic device such as a smartphone 268, a computer 272, a tablet, a gaming console, a laptop, or the like to enable a user to remotely select operating parameters for activating the power transmitter 224 and to manually activate or deactivate the transmitter 224. In some embodiments, the web server 264 operates a plurality of wireless charging systems, each located in a different room of an asset such as a building or building complex. Each wireless charging system can be programmed to operate independently of the others.

[0029] In other embodiments the web server can be implemented on the power transmission system 204.

[0030] In some embodiments, the control unit 216 is configured to selectively activate the wireless power transmitter 220 based on the sensor signals received from the occupancy sensor 212. If the sensor signal indicates that the room 202 is unoccupied, the control unit 216 activates the power transmitter 220 to generate electromagnetic energy 228, which is received by the power receivers 232 and 252 to charge the batteries 248 and 256, respectively. If the control unit

216 receives a sensor signal indicating that the room 202 is occupied, the control unit 216 deactivates the power transmitter 220, thereby minimizing exposure of occupants of the room 202 to the electromagnetic energy 228.

[0031] FIG. 3 illustrates a process 300 for operating a wireless charging system, such as the wireless charging systems of FIG. 1 and FIG. 2. The process 300 refers to a controller, such as the controller 128 and the control unit 216 described above, executing programmed instructions stored in a memory, for example memory 132, operatively connected to the controller to cause the controller to operate one or more components of the system to perform the specified function or action described in the process.

[0032] The process begins with the controller receiving an occupancy signal from an occupancy sensor (block 310). In some embodiments, the occupancy signal is localized to an individual room or area of a building, while in other embodiments the occupancy signal is indicative of occupancy in any portion of the building in which the system is installed. The controller then determines if occupancy is detected in the room or building (block 320). If the asset, such as the room or building, is occupied, the wireless power transmitter is deactivated (block 330), thereby minimizing exposure of occupants to electromagnetic radiation, and the process continues from block 310. If the room or building is unoccupied, the controller activates the wireless power transmitter (block 340) to enable the batteries of the occupancy sensors and other wireless electronic devices to charge without risking occupant exposure to electromagnetic radiation. In some embodiments, the controller is further configured to record when the power transmitter is active (block 350) in a log that is stored in a memory, to enable a user to recall the times during which the power transmitter is active. The process then continues from block 310.

[0033] FIG. 4 illustrates another process 400 for operating a wireless charging system. The process 400 refers to a controller, such as the controller 128 and the control unit 216 described above, executing programmed instructions stored in a memory, for example memory 132, operatively connected to the controller to cause the controller to operate one or more components of the system to perform the specified function or action described in the process.

[0034] The process 400 begins with the controller receiving a signal indicating a level of charge in a battery that operates a sensor or other electronic component (block 410). The controller determines whether the level of charge is below a threshold value, indicating that the battery has a low charge (block 420). If the charge is above the threshold value, the power transmitter is deactivated (block 430) and the process continues with block 410. If the charge is below the threshold value, the power transmitter is activated to enable the battery to be charged (block 440), and the process repeats from block 410. The power transmitter therefore emits electromagnetic radiation only when the batteries in the system are in need of charging, thus reducing the amount of time the power transmitter is active, and lowering the occupant exposure accordingly.

[0035] FIG. 5 illustrates another process 500 for operating a wireless charging system, such as the wireless charging systems of FIG. 1 and FIG. 2. The process 500 refers to a controller, such as the controller 128 and the control unit 216 described above, executing programmed instructions stored in a memory, for example memory 132, operatively connected to the controller to cause the controller to operate one or more components of the system to perform the specified function or action described in the process.

[0036] The process 500 begins with the controller receiving an occupancy signal from an occupancy sensor located in an asset, which may be for example, a room or a building (block

510). The controller then determines if occupancy is detected in the asset (block 520). If the asset is occupied, the wireless power transmitter is deactivated (block 530), thereby minimizing exposure of occupants to electromagnetic radiation, and the process continues from block 510. If the room or building is unoccupied, the controller then receives a signal indicating a level of charge in a battery that operates a sensor or other electronic component (block 540). The controller determines whether the level of charge is below a threshold value, indicating that the battery has a low charge (block 550). In one embodiment, the threshold value is approximately 98% of the full charge of the battery, though other threshold values are used in alternate embodiments. If the charge is above the threshold value, the power transmitter is deactivated (block 530) to reduce power consumption by the power transmitter, and the process continues with block 510. If the charge is below the threshold value, the power transmitter is activated to enable the battery to be charged (block 560) without risking occupant exposure to electromagnetic radiation. The controller is further configured to record when the power transmitter is active (block 570) in a log that is stored in a memory, to enable a user to recall the times during which the power transmitter is active. The process then continues from block 510.

[0037] The power transmitter therefore emits electromagnetic radiation only when the area in which the power transmitter is installed is unoccupied and the batteries in the system are in need of charging. Occupant exposure is reduced since the power transmitter is active when the area of the power transmitter is unoccupied. Furthermore, the cost of operation is reduced since the power transmitter is not active when the batteries are fully or nearly fully charged.

[0038] It will be appreciated that variants of the above-described and other features and functions, or alternatives thereof, may be desirably combined into many other different systems, applications or methods. Various presently unforeseen or unanticipated alternatives,

modifications, variations or improvements may be subsequently made by those skilled in the art that are also intended to be encompassed by the foregoing disclosure.

Claims

What is claimed is:

Claim 1. A wireless power transmission system comprising:

- 5 a first power transmitter configured to transmit a first electromagnetic field;
- a first power receiver configured to generate electrical energy using the first transmitted electromagnetic field;
- a first occupancy sensor configured to indicate a first presence of a first individual within a first sensed area; and
- 10 a control unit configured to control the first power transmitter based upon the indicated first presence.

Claim 2. The system of claim 1, wherein the control unit is configured to deactivate the first power transmitter upon indication of the first presence of the first individual.

15

Claim 3. The system of claim 2 further comprising:

- a second power transmitter operatively connected to the control unit and configured to transmit a second electromagnetic field; and
- a second occupancy sensor configured to indicate a second presence of a second
- 20 individual within a second sensed area, wherein the control unit is further configured to control the second power transmitter based upon the indicated second presence.

Claim 4. The system of claim 3, wherein:

the first power transmitter is configured to transmit the first electromagnetic field in a first room;

the first sensed area is in the first room;

5 the second power transmitter is configured to transmit the second electromagnetic field in a second room; and

the second sensed area is in the second room.

Claim 5. The system of claim 1 further comprising:

10 a wireless signal transmitter operatively connected to the first occupancy sensor and configured to wirelessly transmit a signal to the control unit based upon the indicated first presence.

Claim 6. The system of claim 1 further comprising:

15 an energy storage device operatively connected to the first power receiver and the first occupancy sensor, the energy storage device configured to store the generated electrical energy and to supply the stored electrical energy to the first occupancy sensor.

Claim 7. The system of claim 1 further comprising:

20 an energy storage device operatively connected to the first power receiver and configured to store the generated electrical energy; and

at least one electronic component operatively connected to the energy storage device and configured to receive stored electrical energy from the energy storage device.

Claim 8. The system of claim 7, wherein the at least one electronic component includes at least one component selected from the group consisting of a temperature sensor, an alarm sensor, a thermal sensor, a motion sensor, an optical sensor, a camera, an atmosphere sensor, a resistive
5 sensor, and a light.

Claim 9. The system of claim 1, wherein:

the first power transmitter is configured to receive power from a first wired receptacle;

the first occupancy sensor is configured to receive power from a second wired receptacle;

10 and

the first occupancy sensor is configured to indicate the first presence of the first individual through the second wired receptacle and the first wired receptacle.

Claim 10. The system of claim 9 further comprising:

15 a second power transmitter operatively connected to the control unit and configured to transmit a second electromagnetic field;

a second occupancy sensor configured to indicate a second presence of a second individual within a second sensed area, wherein the control unit is further configured to control the second power transmitter based upon the indicated second presence; and

20 a wireless signal transmitter operatively connected to the second occupancy sensor and configured to wirelessly transmit a signal to the control unit based upon the indicated second presence.

Claim 11. The system of claim 1, wherein the control unit includes a remote management system configured to enable a user to remotely manage operating parameters for the control unit.

Claim 12. The system of claim 11, wherein the remote management system includes a web
5 server.

Claim 13. A method of operating a wireless power transmission system comprising:
indicating a first presence of a first individual within a first sensed area using a first
occupancy sensor;
10 receiving the indication of the first presence of the first individual at a control unit;
controlling with the control unit a first power transmitter based upon the received first
indication;
transmitting a first electromagnetic field with the first power transmitter under the control
of the control unit; and
15 generating electrical power from the first electromagnetic field with a first power
receiver.

Claim 14. The method of claim 13 further comprising:
deactivating the first power transmitter with the control unit upon indication of the first
20 presence of the first individual.

Claim 15. The method of claim 14 further comprising:

indicating a second presence of a second individual within a second sensed area using a second occupancy sensor;

receiving the indication of the second presence of the second individual at the control
5 unit;

controlling with the control unit a second power transmitter based upon the received second indication;

transmitting a second electromagnetic field with the second power transmitter under the control of the control unit; and

10 generating electrical power from the second electromagnetic field with a second power receiver.

Claim 16. The method of claim 15, wherein:

the first power transmitter is configured to transmit the first electromagnetic field in a
15 first room;

the first sensed area is in the first room;

the second power transmitter is configured to transmit the second electromagnetic field in a second room; and

the second sensed area is in the second room.

20

Claim 17. The method of claim 13 further comprising:

wirelessly transmitting a signal to the control unit based upon the indicated first presence with a wireless signal transmitter operatively connected to the first occupancy sensor.

Claim 18. The method of claim 13 further comprising:

storing the generated electrical energy in an energy storage device operatively connected to the first power receiver and the first occupancy sensor; and

5 supplying the stored electrical energy to the first occupancy sensor.

Claim 19. The method of claim 13 further comprising:

storing the generated electrical energy in an energy storage device operatively connected to the first power receiver; and

10 supplying the stored electrical energy to at least one electronic component operatively connected to the energy storage device.

Claim 20. The method of claim 13, further comprising:

receiving power at the first power transmitter from a first wired receptacle;

15 receiving power at the first occupancy sensor from a second wired receptacle; and

indicating the first presence of the first individual through the second wired receptacle and the first wired receptacle.

Claim 21. The method of claim 19 further comprising:

20 deactivating the first power transmitter with the control unit in response to a charge level of the energy storage device being greater than a predetermined threshold.

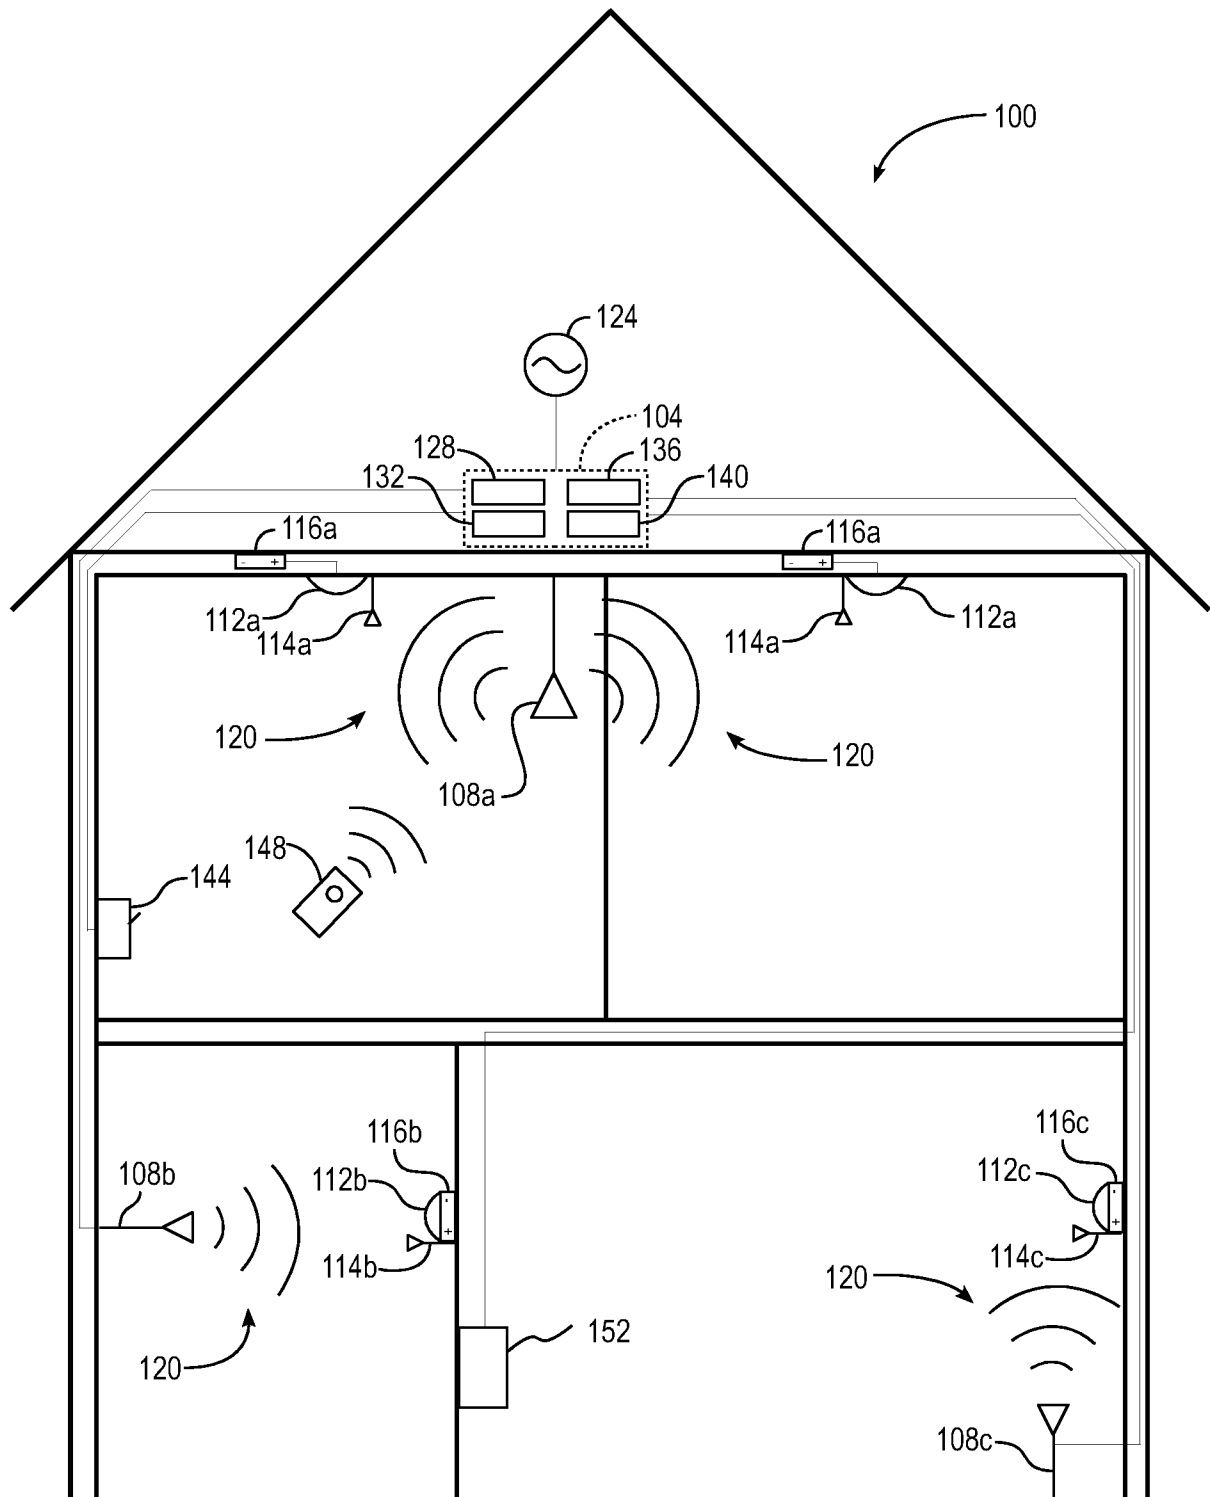


FIG. 1

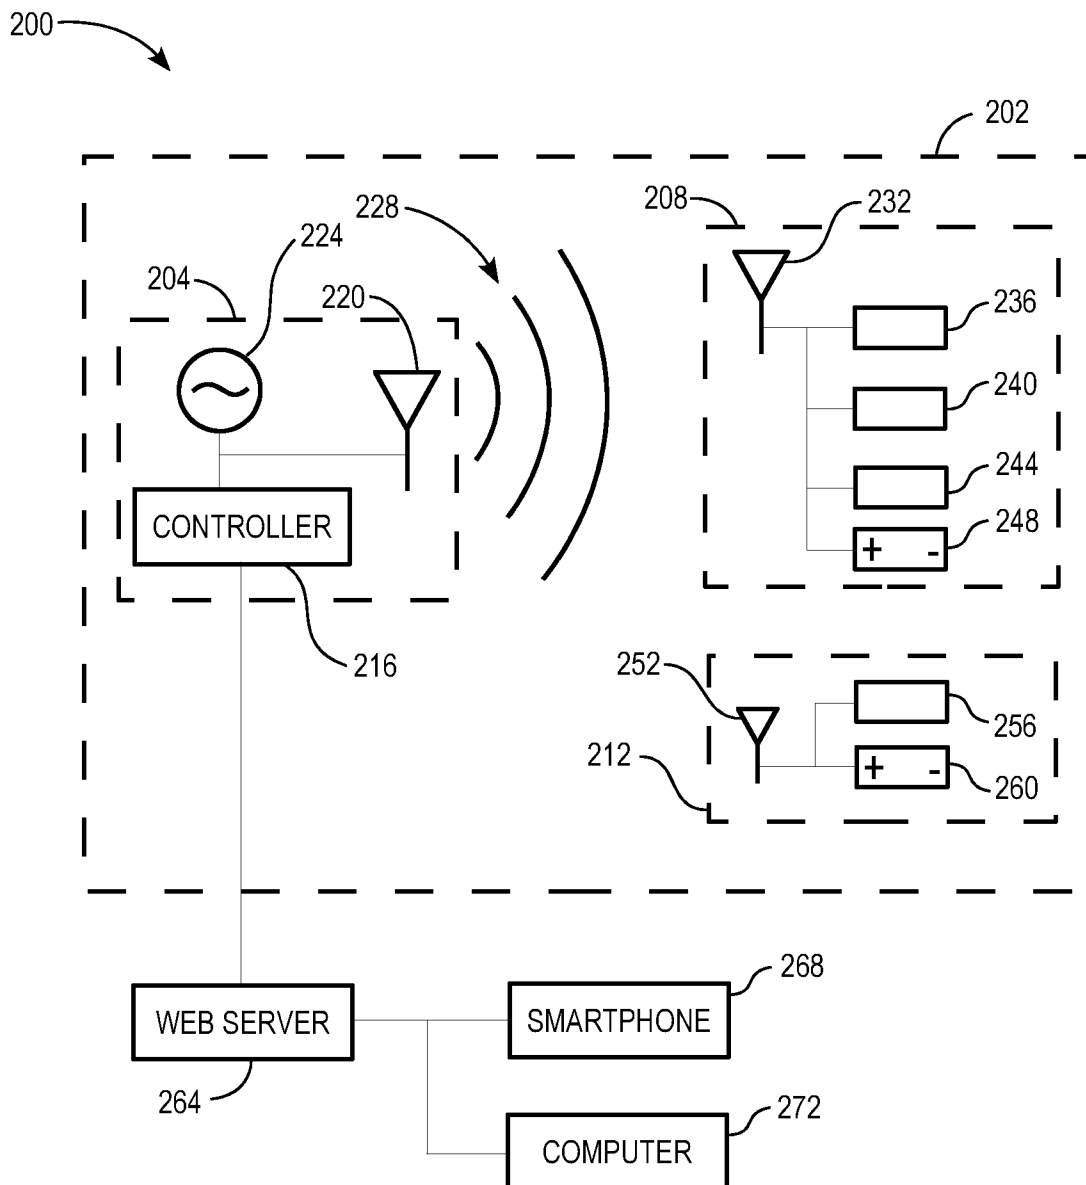
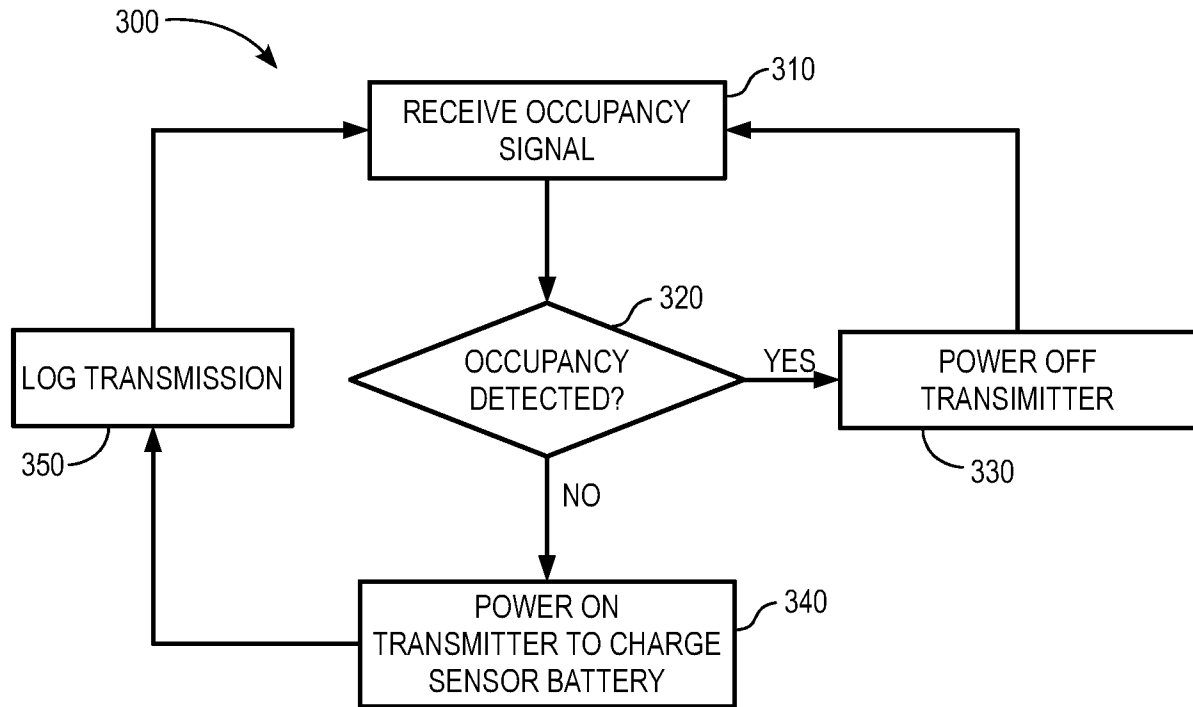
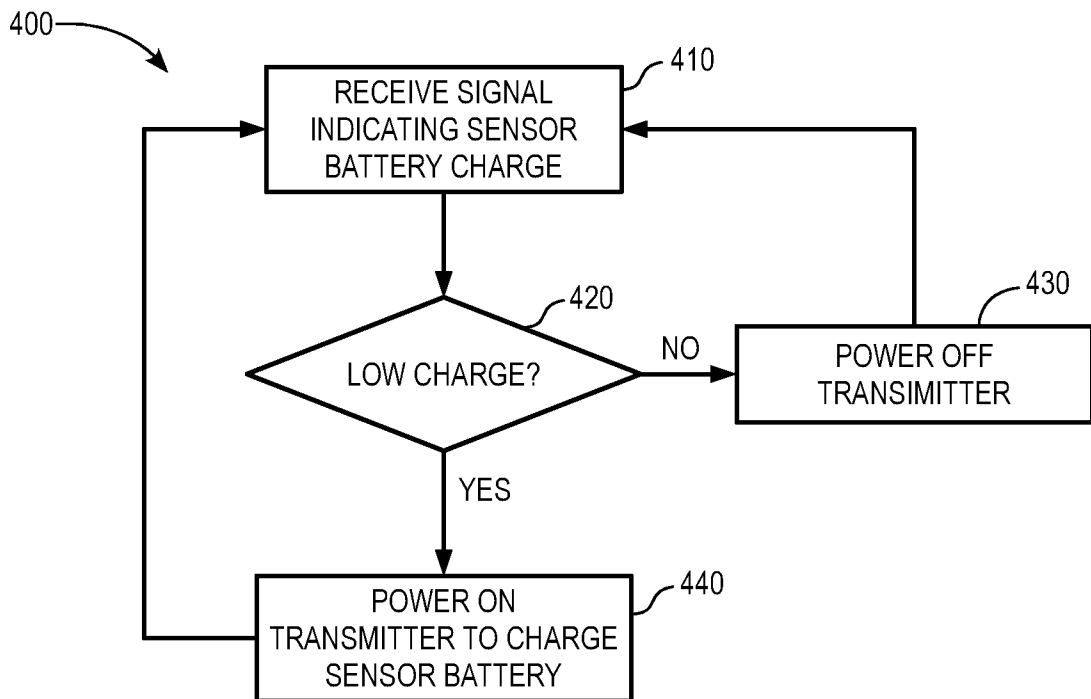
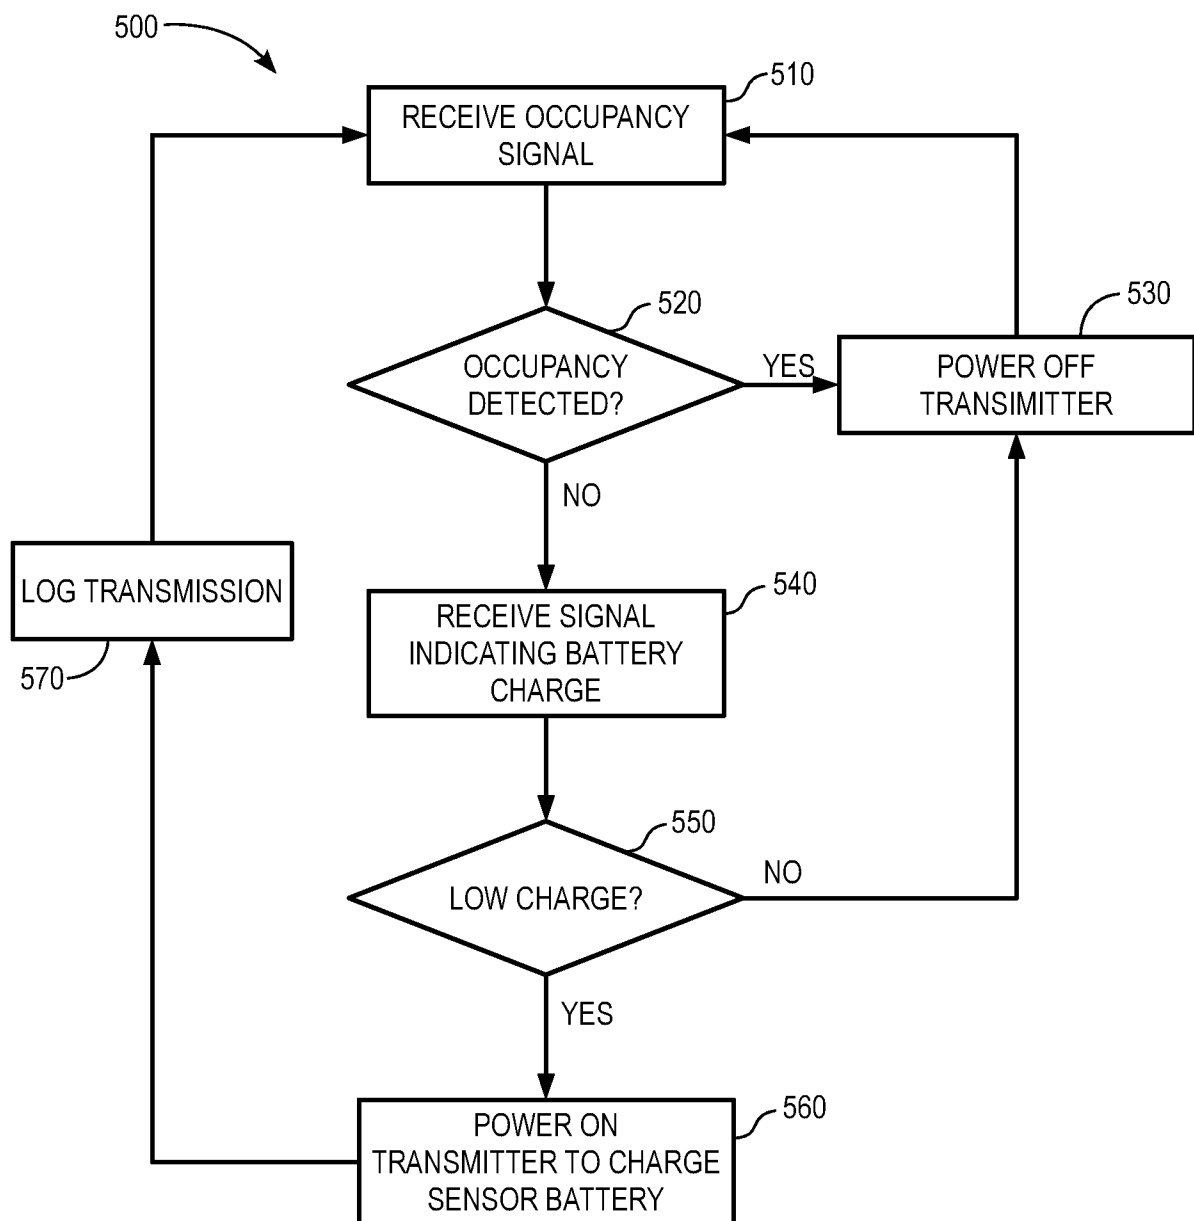


FIG. 2

**FIG. 3****FIG. 4**

**FIG. 5**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/044071**A. CLASSIFICATION OF SUBJECT MATTER****H02J 17/00(2006.01)i, H02J 7/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H02J 17/00; H02J 7/04; G06F 17/00; B60L 1/00; H02J 7/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: electromagnetic field, occupancy, sensor, presence, individual

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010-0201189 A1 (MILES ALEXANDER LYELL KIRBY et al.) 12 August 2010	1-7, 9-21
Y	See paragraphs [0050], [0170]-[0197], claims 19-25 and figures 25-32.	8
Y	WO 2009-140221 A2 (QUALCOMM INCORPORATED et al.) 19 November 2009	8
A	See abstract, claims 1-24 and figure 11.	1-7, 9-21
A	US 2013-0110318 A1 (RENATO COLJA et al.) 02 May 2013	1-21
	See paragraphs [0016]-[0030], claims 1, 11 and figures 1-3.	
A	US 2009-0102292 A1 (NIGEL P. COOK et al.) 23 April 2009	1-21
	See claims 1-14 and figure 1.	
A	US 2010-0090656 A1 (JOHN G. SHEARER et al.) 15 April 2010	1-21
	See claims 88-107 and figures 1-7.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 October 2014 (13.10.2014)

Date of mailing of the international search report

13 October 2014 (13.10.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0201189 A1	12/08/2010	CN 102318161 A	11/01/2012
		CN 102318210 A	11/01/2012
		CN 102318211 A	11/01/2012
		CN 102318212 A	11/01/2012
		CN 102318213 A	11/01/2012
		CN 102318213 B	26/02/2014
		EP 2396900 A1	21/12/2011
		JP 2012-517792 A	02/08/2012
		JP 2012-517793 A	02/08/2012
		JP 2012-517794 A	02/08/2012
		JP 2012-517795 A	02/08/2012
		JP 2012-517796 A	02/08/2012
		JP 5362038 B2	11/12/2013
		JP 5480300 B2	23/04/2014
		KR 10-2011-0114701 A	19/10/2011
		KR 10-2011-0114703 A	19/10/2011
		KR 10-2011-0114704 A	19/10/2011
		KR 10-2011-0117697 A	27/10/2011
		TW 201042878 A	01/12/2010
		TW 201042879 A	01/12/2010
		TW 201042880 A	01/12/2010
		TW 201042881 A	01/12/2010
		TW 201101640 A	01/01/2011
		TW 201130204 A	01/09/2011
		TW 201130205 A	01/09/2011
		US 2010-0201201 A1	12/08/2010
		US 2010-0201202 A1	12/08/2010
		US 2010-0201311 A1	12/08/2010
		US 2010-0201312 A1	12/08/2010
		US 2010-0201533 A1	12/08/2010
		US 2010-0289341 A1	18/11/2010
		US 2012-0019057 A9	26/01/2012
		US 2012-0153731 A9	21/06/2012
		WO 2010-093719 A1	19/08/2010
		WO 2010-093721 A1	19/08/2010
		WO 2010-093723 A1	19/08/2010
		WO 2010-093724 A1	19/08/2010
		WO 2010-093728 A2	19/08/2010
		WO 2010-093728 A3	16/12/2010
		WO 2010-093729 A1	19/08/2010
		WO 2010-093730 A2	19/08/2010
		WO 2010-093730 A3	16/12/2010
WO 2009-140221 A2	19/11/2009	CN 102027683 A	20/04/2011
		CN 102027684 A	20/04/2011
		CN 102027684 B	25/09/2013
		CN 102027685 A	20/04/2011
		CN 102027686 A	20/04/2011
		CN 102027687 A	20/04/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 102027688 A	20/04/2011
		CN 102027689 A	20/04/2011
		CN 102027690 A	20/04/2011
		CN 102027691 A	20/04/2011
		CN 103441783 A	11/12/2013
		EP 2286521 A1	23/02/2011
		EP 2294708 A1	16/03/2011
		EP 2294709 A2	16/03/2011
		EP 2294710 A2	16/03/2011
		EP 2294711 A1	16/03/2011
		EP 2294712 A1	16/03/2011
		EP 2294713 A1	16/03/2011
		EP 2294714 A2	16/03/2011
		EP 2294715 A1	16/03/2011
		JP 2011-523270 A	04/08/2011
		JP 2011-523336 A	04/08/2011
		JP 2011-523532 A	11/08/2011
		JP 2011-524156 A	25/08/2011
		JP 2011-524729 A	01/09/2011
		JP 2011-525097 A	08/09/2011
		JP 2011-525098 A	08/09/2011
		JP 2011-525723 A	22/09/2011
		JP 2011-525788 A	22/09/2011
		JP 2013-013319 A	17/01/2013
		JP 2014-030342 A	13/02/2014
		JP 2014-030349 A	13/02/2014
		JP 2014-075800 A	24/04/2014
		JP 2014-090429 A	15/05/2014
		JP 2014-112869 A	19/06/2014
		JP 5341180 B2	13/11/2013
		JP 5379221 B2	25/12/2013
		JP 5420643 B2	19/02/2014
		JP 5474939 B2	16/04/2014
		JP 5507547 B2	28/05/2014
		JP 5543433 B2	09/07/2014
		KR 10-1214029 B1	20/12/2012
		KR 10-1243544 B1	20/03/2013
		KR 10-1243592 B1	25/03/2013
		KR 10-1247419 B1	25/03/2013
		KR 10-1256723 B1	19/04/2013
		KR 10-1256776 B1	25/04/2013
		KR 10-1319146 B1	17/10/2013
		KR 10-1398367 B1	22/05/2014
		KR 10-1414390 B1	01/07/2014
		KR 10-2011-0009225 A	27/01/2011
		KR 10-2011-0009226 A	27/01/2011
		KR 10-2011-0009227 A	27/01/2011
		KR 10-2011-0009228 A	27/01/2011
		KR 10-2011-0009229 A	27/01/2011
		KR 10-2011-0010104 A	31/01/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 10-2011-0010105 A	31/01/2011
		KR 10-2011-0014641 A	11/02/2011
		KR 10-2011-0014642 A	11/02/2011
		KR 10-2012-0109643 A	08/10/2012
		KR 10-2012-0138828 A	26/12/2012
		KR 10-2013-0048801 A	10/05/2013
		KR 10-2013-0087591 A	06/08/2013
		KR 10-2014-0006995 A	16/01/2014
		KR 10-2014-0009538 A	22/01/2014
		TW 201001868 A	01/01/2010
		TW 201001869 A	01/01/2010
		TW 201004042 A	16/01/2010
		TW 201004088 A	16/01/2010
		TW 201004089 A	16/01/2010
		TW 201004090 A	16/01/2010
		TW 201004091 A	16/01/2010
		TW 201004092 A	16/01/2010
		TW 201010236 A	01/03/2010
		US 2009-0284082 A1	19/11/2009
		US 2009-0284218 A1	19/11/2009
		US 2009-0284220 A1	19/11/2009
		US 2009-0284227 A1	19/11/2009
		US 2009-0284245 A1	19/11/2009
		US 2009-0284369 A1	19/11/2009
		US 2009-0286470 A1	19/11/2009
		US 2009-0286475 A1	19/11/2009
		US 2009-0286476 A1	19/11/2009
		US 2010-0201202 A1	12/08/2010
		US 2012-0153731 A9	21/06/2012
		US 2013-0300358 A1	14/11/2013
		US 2014-0103881 A1	17/04/2014
		US 8487478 B2	16/07/2013
		US 8611815 B2	17/12/2013
		US 8629650 B2	14/01/2014
		WO 2009-140216 A2	19/11/2009
		WO 2009-140216 A3	07/01/2010
		WO 2009-140217 A2	19/11/2009
		WO 2009-140217 A3	07/01/2010
		WO 2009-140218 A1	19/11/2009
		WO 2009-140219 A1	19/11/2009
		WO 2009-140220 A1	19/11/2009
		WO 2009-140221 A3	07/01/2010
		WO 2009-140221 A8	15/04/2010
		WO 2009-140221 A9	23/12/2010
		WO 2009-140222 A1	19/11/2009
		WO 2009-140223 A1	19/11/2009
		WO 2010-047850 A1	29/04/2010
US 2013-0110318 A1	02/05/2013	CN 103947078 A	23/07/2014
		WO 2013-059919 A1	02/05/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009-0102292 A1	23/04/2009	CN 101803110 A	11/08/2010
		EP 2198477 A1	23/06/2010
		EP 2198477 A4	15/01/2014
		JP 2010-539887 A	16/12/2010
		JP 2013-243921 A	05/12/2013
		KR 10-2010-0072264 A	30/06/2010
		KR 10-2013-0026496 A	13/03/2013
		KR 10-2013-0029109 A	21/03/2013
		US 2013-278211 A1	24/10/2013
		US 8614526 B2	24/12/2013
		WO 2009-039308 A1	26/03/2009
US 2010-0090656 A1	15/04/2010	AU 2006-255054 A1	14/12/2006
		CA 2610266 A1	14/12/2006
		CN 101194219 A0	04/06/2008
		EP 1891741 A2	27/02/2008
		EP 1891741 A4	24/08/2011
		JP 2008-544730 A	04/12/2008
		KR 10-2008-0017460 A	26/02/2008
		MX 2007015229 A	21/04/2008
		NO 20080124 A	08/01/2008
		US 2006-0281435 A1	14/12/2006
		US 2014-111032 A1	24/04/2014
		US 8621245 B2	31/12/2013
		WO 2006-133204 A2	14/12/2006
		WO 2006-133204 A3	06/12/2007
		ZA 200710464 A	29/07/2009