



(86) Date de dépôt PCT/PCT Filing Date: 2012/10/19  
(87) Date publication PCT/PCT Publication Date: 2013/05/02  
(45) Date de délivrance/Issue Date: 2019/09/24  
(85) Entrée phase nationale/National Entry: 2014/04/24  
(86) N° demande PCT/PCT Application No.: GB 2012/052590  
(87) N° publication PCT/PCT Publication No.: 2013/061034  
(30) Priorité/Priority: 2011/10/25 (GB1118378.7)

(51) Cl.Int./Int.Cl. *B63B 9/00* (2006.01),  
*B23P 19/12* (2006.01), *B23Q 1/26* (2006.01),  
*B23Q 16/00* (2006.01), *B63H 23/34* (2006.01),  
*B66F 11/00* (2006.01)


(72) Inventeurs/Inventors:  
WATSON, TOBIAS JONATHAN, GB;  
HEATON, LEIGH FRANCIS, GB;  
BAIN, FRASER ANGUS, GB;  
FRASER, STEVEN MARTIN, GB;  
BLAIR, GRAHAM DAVID, GB;  
HALLEY, BOYD, GB

(73) Propriétaire/Owner:  
BAE SYSTEMS PLC, GB

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : INTRODUCTION D'UN ELEMENT ALLONGE DANS UN CORPS OU RETRAIT DE CELUI-CI A PARTIR D'UN CORPS

(54) Title: INTRODUCTION OR WITHDRAWAL OF AN ELONGATE MEMBER TO OR FROM A BODY

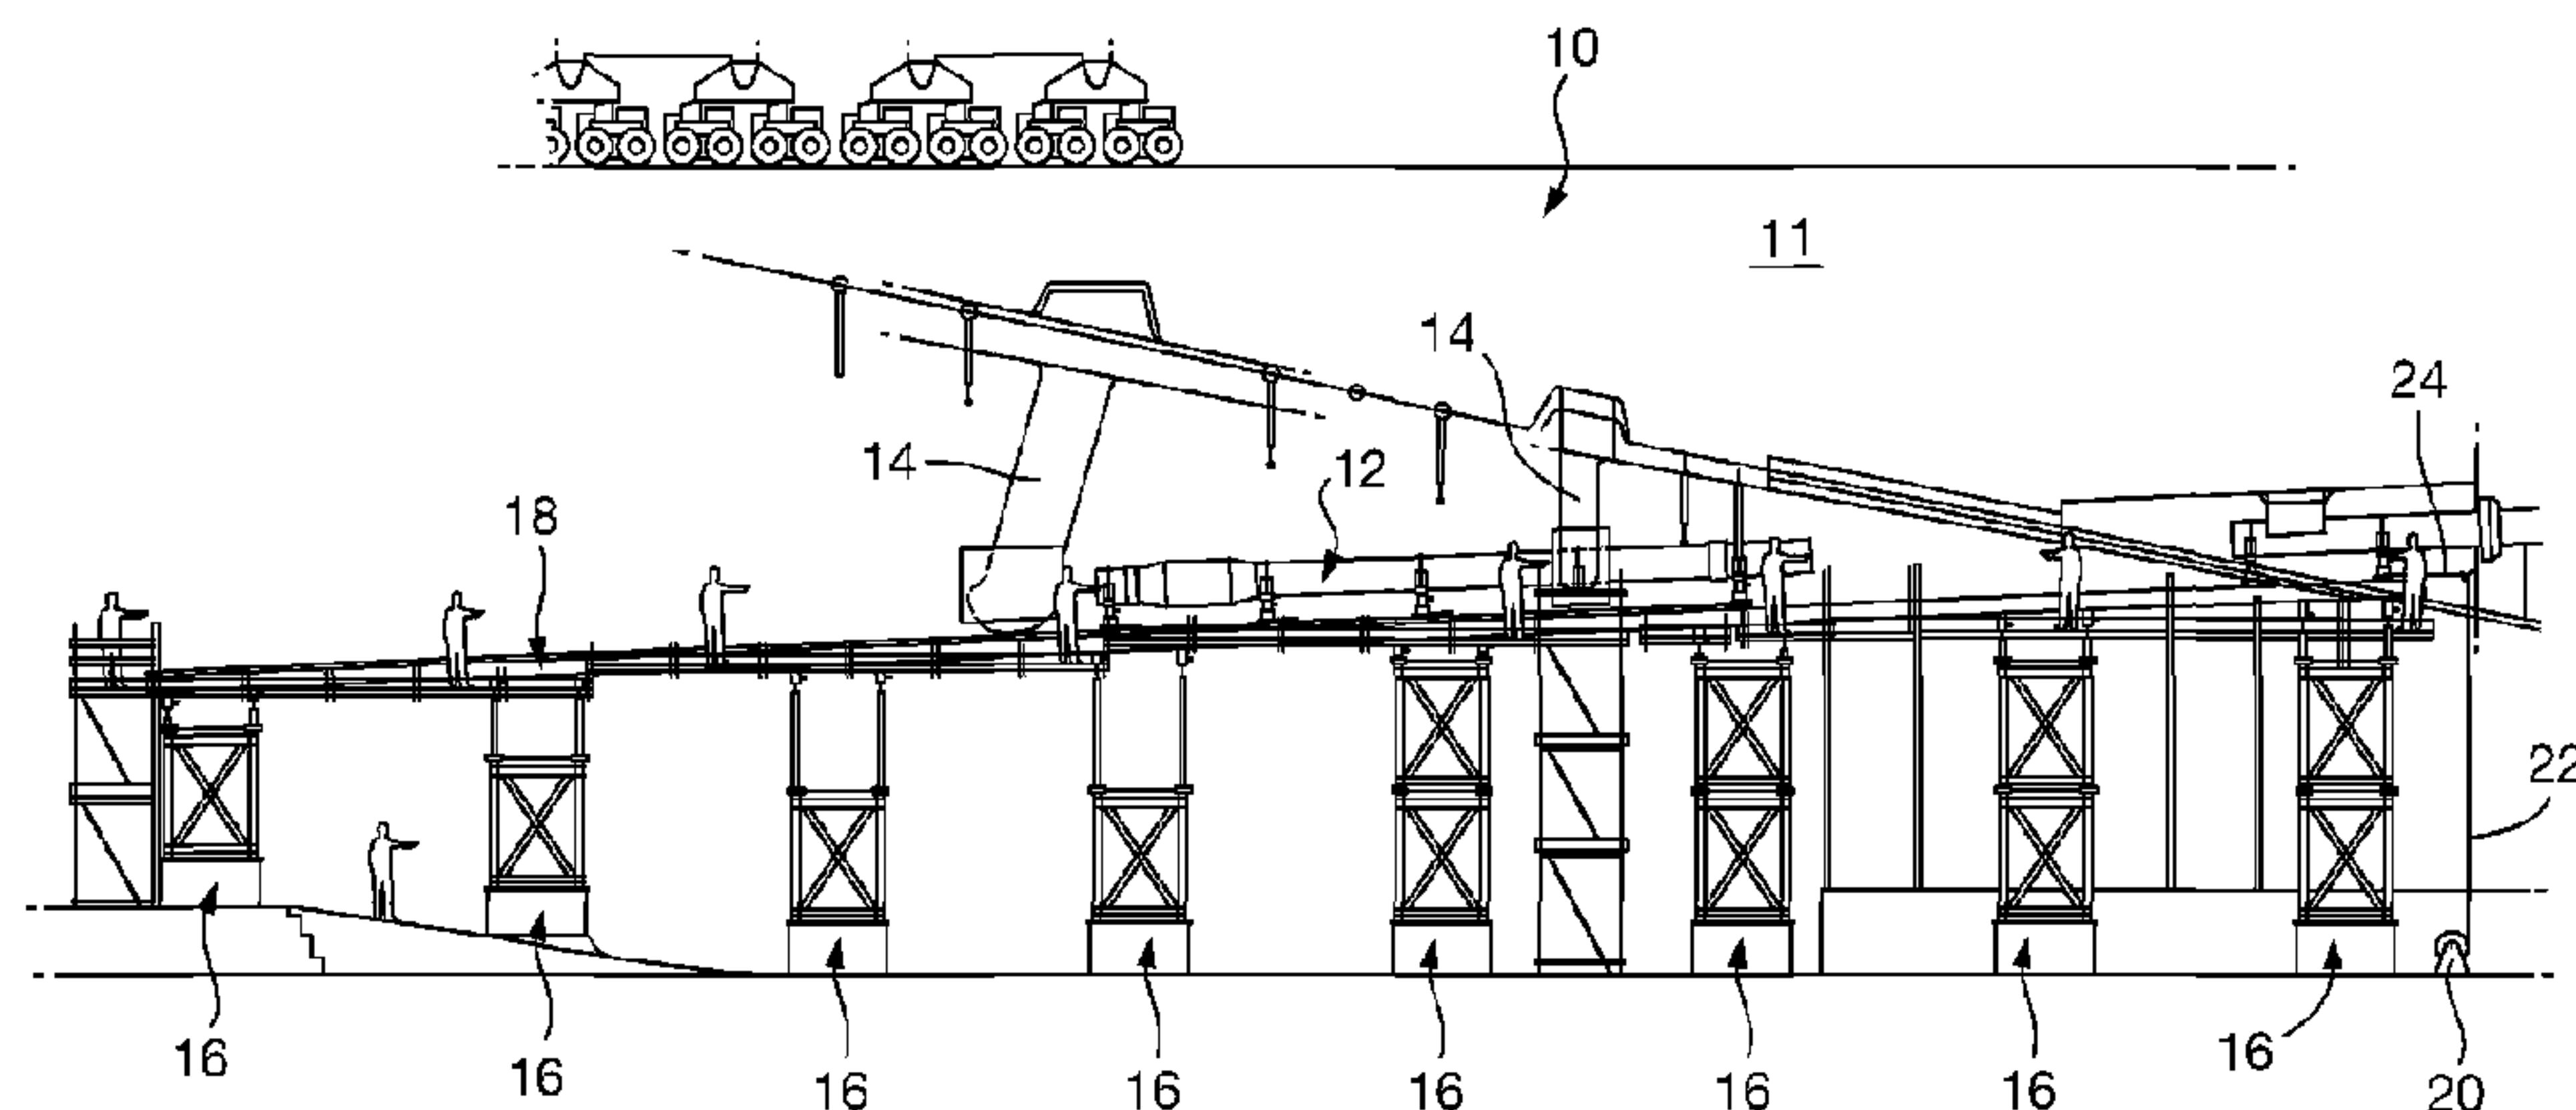

(57) Abrégé/Abstract:

A method of moving an elongate member (12) along a predetermined axis (A-A) for the introduction or withdrawal thereof to or from a free body (11). The method includes providing an elongate guide surface (18) extending parallel to the predetermined axis, and also providing a plurality of support elements (26) which are slidable on the support surface in a direction parallel to the predetermined axis. The elongate member is supported on the support elements so that at least a major portion of the mass is supported. The elongate member and the support elements are moved along the predetermined axis. Apparatus for moving an elongate member in this manner is also provided.

**(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)**

**(19) World Intellectual Property Organization**  
International Bureau



A standard linear barcode is positioned horizontally across the bottom of the page. It consists of vertical black bars of varying widths on a white background.

**(10) International Publication Number**

WO 2013/061034 A1

**(43) International Publication Date  
2 May 2013 (02.05.2013)**

**(51) International Patent Classification:**

*B63B 9/00* (2006.01)      *B63H 23/34* (2006.01)

*B63G 3/00* (2006.01)

(74) Agent: **BAE SYSTEMS PLC, GROUP IP DEPT; PO Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).**

(21) International Application Number: PCT/GB2012/052590

**(81) Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(22) International Filing Date:** 19 October 2012 (19.10.2012)

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(26) Publication Language: English  
(30) Priority Data: 1118378.7 25 October 2011 (25.10.2011) GB

(71) **Applicant:** BAE SYSTEMS PLC [GB/GB]; 6 Carlton Gardens, London SW1Y 5AD (GB).


(72) Inventors: WATSON, Tobias, Jonathan; Surface Ships,

PDC 4th Floor, South Street, Scotstoun, Glasgow Lanark-

shire G14 0XN (GB). **HEATON, Leigh, Francis**; Surface Ships, 2nd Floor, COC East, Scotstoun, Glasgow Lanarkshire G14 0XN (GB). **BAIN, Fraser, Angus**; Wet Basin Office, 1048 Govan Road, Govan, Glasgow Lanarkshire G51 4XP (GB). **FRASER, Steven, Martin**; Surface Ships, PDC 4th Floor, South Street, Scotstoun, Glasgow Lanarkshire G14 0XN (GB). **BLAIR, Graham, David**; Surface Ships, Berth Office, 1048 Govan Road, Glasgow Lanarkshire GU51 4XP (GB). **HALLEY, Boyd**; Surface Ships, 1048 Govan Road, Govan, Glasgow Lanarkshire G51 4XP (GB).

**(54) Title: INTRODUCTION OR WITHDRAWAL OF AN ELONGATE MEMBER TO OR FROM A BODY**

Fig. 1

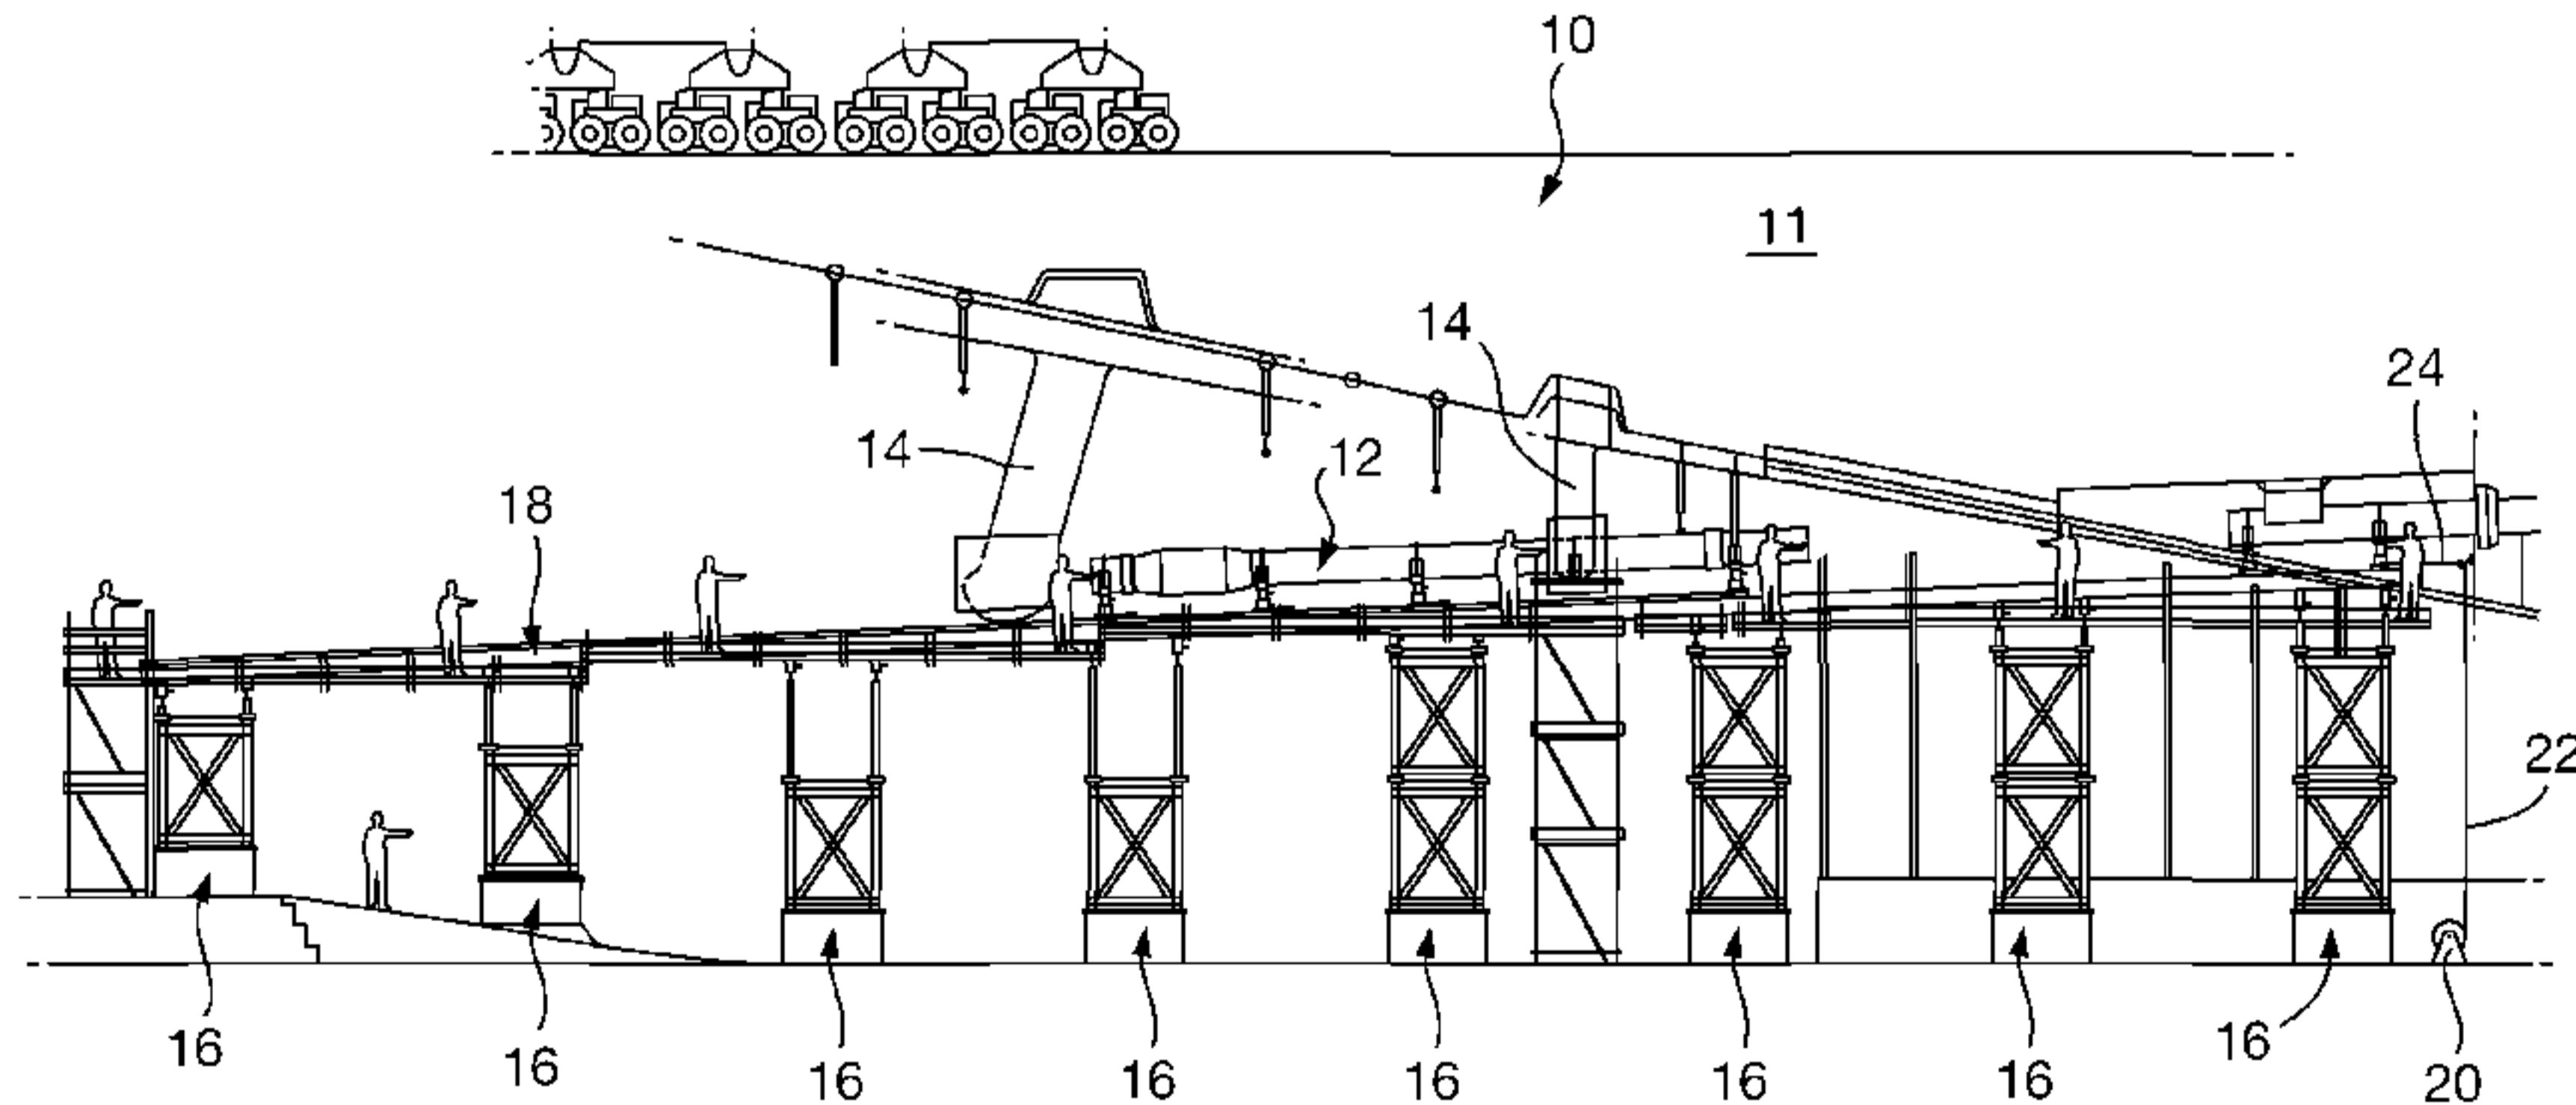

W02013/061034A1

**(57) Abstract:** A method of moving an elongate member(12) along a predetermined axis (A-A) for the introduction or withdrawal thereof to or from a free body (11). The method includes providing an elongate guide surface (18) extending parallel to the predetermined axis, and also providing a plurality of support elements (26) which are slidable on the support surface in a direction parallel to the predetermined axis. The elongate member is supported on the support elements so that at least a major portion of the mass is supported. The elongate member and the support elements are moved along the predetermined axis. Apparatus for moving an elongate member in this manner is also provided.

**INTRODUCTION OR WITHDRAWAL OF AN ELONGATE MEMBER TO OR FROM A BODY****FIELD OF INVENTION**

This invention relates to the introduction or withdrawal of an elongate member to or from a free body. In particular, but not exclusively, the invention is concerned with moving a shaft into/out of an enclosed space, where the shaft has to be inserted along its longitudinal axis and traversed across bearings along the route, such as the introduction or withdrawal of a propeller shaft to or from a naval vessel.

**BACKGROUND**

Conventionally, when building large naval vessels such as the Queen Elizabeth, the propeller shaft is manoeuvred into position towards and through one or more bracket barrels by "chaining in", whereby the shaft is manoeuvred inch by inch whilst it is supported by cables slung from eyepads on the nearby surface of the ship's hull. To give an idea of scale, a typical ship's propeller shaft section will be 1 metre in diameter, 20 metres in length, and weigh approximately 40 tonnes. To chain in such a shaft is extremely labour-intensive and relies on chain blocking and manual weight transfer. Unlike most shore applications, where the shafting would be simply be craned into place from above, this approach is not possible with the ship because the installation of the shaft involves a complicated alignment process that is principally dependent on the completeness of the surrounding structure for its "foundation". In fact, the alignment process begins with the locating of the outboard bearings and before the shaft is installed, but it requires the hull form to be substantially complete.

In addition to requiring large amounts of manpower and taking a long time, there is also a risk of damage to the shaft as it is chained in, due to

damage caused by the chain and/or misalignment of the shaft with associated bearing or support surfaces. Further, there are also health and safety risks associated with this conventional approach because the operatives are working close up to the shafting. If the shafting should suddenly lurch or drop then there is a significant risk of an operative getting trapped or injured.

It will be appreciated that there are other situations where space/location restrictions mean that no overhead lift for installing an elongate shaft, pipe or the like is possible; for example, when working in a cavern in the side of a hill, or specialist applications in the oil/gas, power generation and water industries.

## 10 SUMMARY OF INVENTION

We have therefore designed a method and apparatus which, in some embodiments, allows controlled sliding movement of the shaft along the installation axis and which can reduce the amount of chain blocking, manual weight transfer and the number of people required to be involved.

15 According to an aspect of the present invention, there is provided a method of  
moving an elongate member along a predetermined axis for the introduction or  
withdrawal thereof to or from a free body, the method including: providing an elongate  
guide surface extending parallel to said predetermined axis; providing a plurality of  
support elements which are slidable on said elongate guide surface in a direction parallel  
20 to said predetermined axis; supporting said elongate member on said support elements  
so that at least a major portion of the mass is supported thereby; and causing said  
elongate member and said support elements to move along said predetermined axis;  
wherein the support elements are dismantleable whereby, when the elongate member is  
supported by a series of three or more said supporting elements, one of said supporting  
25 elements of the series can be dismantled to leave the elongate member supported in  
alignment with said predetermined axis by the remaining support elements, wherein said  
elongate member comprises a propeller shaft for propelling a naval vessel, and wherein  
said free body comprises at least a stern portion of the naval vessel.

According to another aspect of the present invention, there is provided a method of moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body, the method including:

providing an elongate guide surface extending parallel to said predetermined axis;

5 providing a plurality of support elements which are slideable on said elongate guide surface in a direction parallel to said predetermined axis; supporting said elongate member on said support elements so that at least a major portion of the mass is supported thereby; and causing said elongate member and said support elements to move along said predetermined axis; wherein the support elements are

10 dismantleable whereby, when the elongate member is supported by a series of three or more said supporting elements, one of said supporting elements of the series can be dismantled to leave the elongate member supported in alignment with said predetermined axis by the remaining support elements, wherein an end of the elongate member is caused to move towards and beyond an associated structural

15 member, and wherein the method further comprises: causing said elongate member to move in the direction of said associated structural member until said one end is adjacent to said associated structural member; dismantling a leading said support element, leaving the elongate member supported by remaining said support elements; and causing further movement of said elongate member beyond said

20 associated structural member.

In one aspect, the present disclosure provides a method of moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body, which method comprises the steps of:

providing an elongate guide surface extending parallel to said

25 predetermined axis;

providing a plurality of support elements which are slideable on said support surface in a direction parallel to said predetermined axis;

supporting said elongate member on said support elements so that at least a major portion of the mass is supported thereby, and

causing said elongate member and said support elements to move along said predetermined axis.

5 In this way the majority of the mass of the elongate member is supported on the support elements which may be slid along the guide surface so as to give continuous linear movement of the elongate member.

In some embodiments, said elongate guide surface preferably comprises a straight load-supporting surface, and said support elements each comprise one or 10 more load-supporting pads that engage and are slideable along said load-supporting surface.

In some embodiments, each load-supporting pad is conveniently made of low friction material, such as e.g. polytetrafluoroethylene (PTFE). The support elements are preferably constrained against transverse movement with respect to 15 said load-supporting surface by suitable means, for example by spaced generally parallel side elements upstanding from opposite edges of said load-supporting surface, although other constraints may be used.

In some embodiments, preferably the effective height of the support elements is adjustable. Preferably said support elements are interconnected by tie 20 elements to transmit a drive load therebetween. In some embodiments, the tie elements are conveniently flexible.

In some embodiments, each support element preferably comprises a cradle portion upwardly open to receive and engage a portion of the elongate member when lowered in use. It is preferred for the support elements to be dismantleable into parts 25 whereby, when the elongate member is supported by a series of three or more support elements, one of said support elements of the series may be dismantled and removed to leave the elongate member still supported in alignment with said

26158-338

predetermined axis by the remaining support elements.

Although the method may be used to introduce or withdraw the elongate member to or from a bore which supports and encloses the adjacent portion of the elongate member, it is particularly useful for situations where a elongate member needs to be passed through and beyond a structural member, such as a propeller shaft bracket boss (or an "A bracket barrel"). Thus, where an end of the elongate member is caused to move towards and beyond an associated structural member in use the method may conveniently comprise:

causing said elongate member and said at least three support elements  
10 to move in the direction of said associated structural member until said one end of the elongate member is adjacent said associated structural member,

dismantling said leading support element leaving the elongate member supported at least partially by the remaining elements, and

causing further movement of said elongate member beyond said  
15 associated structural member. In some such cases part of the load may be supported by the associated structural member after dismantling of said leading support element.

In some embodiments, where the elongate member needs to be supported to the other side of the support bracket, the said elongate guide  
20 surface provided may extend beyond said associated structural member, and the method may further include the steps of:

reassembling said leading support element at a location beyond said associated structural member,

26158-338

5

continuing movement of said elongate member until the next support element in the series approaches said associated structural member, dismantling said next support element, and further moving said elongate member, and

5       optionally repeating said moving, dismantling, moving and reassembling steps until the required support elements have been reassembled beyond said associated structural member.

In some embodiments, the elongate member may comprise a propeller shaft and the free member may comprise a waterborne vessel, or at least the

10     stern portion of a waterborne vessel. The waterborne vessel may in particular be a naval vessel, and the invention extends to a method of constructing a naval vessel comprising applying the above method.

The present disclosure extends to apparatus for use in the method. Thus, in another aspect, the disclosure provides apparatus for moving an

15     elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body, which comprises:

an elongate guide surface extending parallel to said predetermined axis;

a plurality of support elements which are slidable on said guide surface in a direction parallel to said predetermined axis;

20     said support elements being adapted to receive and support at least a major portion of the mass of said elongate member, and

a drive for causing said elongate member and said support elements to move along said predetermined axis.

Whilst aspects and embodiments of the invention have been described above, other aspects and embodiments extend to any inventive combination of features set out above in the following description or drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5 By way of example only, one specific embodiment of the invention will now be described by reference to the accompanying drawings, in which:

Figure 1 is a side view of the aft end of a naval vessel into which a propeller shaft is to be installed;

10 Figure 2 is a view of a system for slideably supporting a propeller shaft for movement along an installation axis;

Figure 3(a) is a detailed view of a cradle when assembled, and

Figure 3(b) is a detailed view on the underside of the foot of a cradle.

#### DETAILED DESCRIPTION

Referring initially to Figure 1, there is shown the stern portion 10 of a naval vessel 11 in which an elongate (i.e. the length of the shaft is greater than the span of the bearings (described below) provided for it) propeller shaft 12 is required to be aligned with an axis A-A, a few degrees below horizontal, and inserted along this axis. The shaft will normally be a single component, but in some cases can be formed of several components fixed together. The shaft passes through associated structural members, which, in this embodiment, are two "A" bracket barrels 14 aft of the shaft's emergence from the hull. An "A" bracket is a bracket that is attached to the side of the vessel and is so called because it is shaped like the letter "A", with the shaft running through a bearing that is placed inside a bearing boss (commonly known as a "barrel" in ship building because of its similarity in shape) located at the apex of the "A". In order to install the shaft, a platform structure is built comprising a number of support

towers 16 which support a straight, elongate guide surface 18 parallel to, but spaced by a set distance from, the shaft centre line or installation axis A-A. The guide surface 18 and associated structure will be described in further detail in relation to the following figures. A cable winch 20 is disposed on the ground at the forward end of 5 the platform structure with the cable 22 passing over a pulley 24 to then pass to the structure as to be described below.

Referring now to Figures 2, 3(a) and 3(b), the installation system comprises the elongate guide surface 18 on which can slide a number of support elements, for example, cradles 26, of which four are illustrated. In this embodiment, the elongate 10 guide surface 18 serves as a flat, planar load-supporting surface. The cradles 26 are interconnected by tie cables 28 with the forwardmost cradle being connected to the winch cable 22. As best seen in Figures 3(a) and 3(b), each cradle 26 has a lower portion 30 of rectangular form connected to a foot 32, on the underside of which are provided one or more (three in the example) load supporting, low-friction pads 34 15 (e.g. of PTFE). The guide surface 18 is provided with upstanding lateral constraint edges 19 which ensure that the cradle is constrained to move in the direction parallel to the installation axis. In this embodiment, the upstanding lateral constraint edges 19 form spaced, generally parallel side elements. The upper part of the cradle 26 is provided with a dismantlable, rigid height adjustable wedge jack 33 which connects 20 the box section 30 to an upwardly open, e.g. semi-circular, cradle portion 40 designed to receive the shaft when lowered into it. The cradle portion has slots 42 or other suitable attachment means to allow a strap 44 to be applied in order to strap the shaft into the cradle. The wedge jacks may be eg Titan™ wedge jacks.

In addition to the cradles, the shaft may be supported by top steadies 46 25 (see Figure 2), e.g. of webbing. The top steadies function as a safety harness

and are intended to receive the load quickly and safely if there is a failure in the mechanism. In this arrangement, the majority of the mass of the shaft is supported by the cradles. In use, the shaft may be drawn along the installation direction by operating the winch 20 which moves cradles (four in the example) 5 26 and the supported shaft 12, via the winch cable 22 and the tie cables 28. The shaft 12 may be passed through the "A" bracket barrels 14 by moving the shaft and the cradle assemblies 26 towards the first "A" bracket barrel 14. As the first cradle assembly 26 approaches the first "A" bracket barrel 14, the associated wedge jacks 33 can be adjusted upwards or downwards to ensure 10 alignment between the shaft and the bracket barrel. The jack and the box section 30 must then be removed to allow the shaft to pass through the bracket barrel. When a cradle assembly approaches, and is close to contact, the Titan™ jack is lowered to take that cradle assembly off load. The jack and the box section can then be unbolted and removed. This will allow the shaft - with semi 15 circular cradle 40 still attached - to pass through the bracket barrel unhindered when the winch 20 is used. When the shaft emerges from the bracket barrel, the procedure is reversed and the jack and the box section are reassembled to support the shaft and the winch 20 is applied again and the process repeated for each of the successive cradles.

20 It will be appreciated that the apparatus and method described above can be adapted to install and/or remove other types of elongate members, such as pipes in height-restricted locations.

CLAIMS:

1. A method of moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body, the method including:

providing an elongate guide surface extending parallel to said predetermined axis;

providing a plurality of support elements which are slidable on said elongate guide surface in a direction parallel to said predetermined axis;

supporting said elongate member on said support elements so that at least a major portion of the mass is supported thereby; and

10 causing said elongate member and said support elements to move along said predetermined axis;

wherein the support elements are dismantleable whereby, when the elongate member is supported by a series of three or more said supporting elements, one of said supporting elements of the series can be dismantled to leave the elongate 15 member supported in alignment with said predetermined axis by the remaining support elements,

wherein said elongate member comprises a propeller shaft for propelling a naval vessel, and

20 wherein said free body comprises at least a stern portion of the naval vessel.

2. A method according to claim 1, wherein said elongate guide surface comprises a flat planar load-supporting surface, and said support elements each comprise at least one load-supporting pad that, in use, engage and are slidable along said load-supporting surface.

3. A method according to claim 2, wherein each said support element comprises a plurality of said load-supporting pads, and wherein each said load-supporting pads is of low friction material.

4. A method according to claim 2 or 3, wherein said support elements are 5 constrained against transverse movement with respect to said load-supporting surface by spaced generally parallel side elements upstanding from opposite edges of said load-supporting surface.

5. A method according to any one of claims 1 to 4, wherein said support elements are interconnected by flexible tie elements.

10 6. A method according to any one of claims 1 to 5, wherein each said support element comprises a cradle portion upwardly open to receive and engage a portion of the elongate member when said elongate member is lowered in use.

7. A method according to any one of claims 1 to 6, wherein an end of the elongate member is caused to move towards and beyond an associated structural 15 member, and wherein the method further comprises:

causing said elongate member to move in the direction of said associated structural member until said one end is adjacent to said associated structural member;

20 dismantling a leading said support element, leaving the elongate member supported by remaining said support elements; and

causing further movement of said elongate member beyond said associated structural member.

8. A method according to claim 7, wherein said elongate guide surface extends beyond said associated structural member and the method further includes:

reassembling said leading support element at a location beyond said associated structural member;

continuing movement of said elongate member until a next said support element approaches said associated structural member;

5 dismantling said next support element; and

further moving said elongate member.

9. A method according to claim 8, further comprising repeating said moving, dismantling, moving and reassembling until a preset number of said supporting elements have been reassembled beyond said associated structural member.

10 10. A method of constructing a naval vessel comprising applying the method of any one of claims 1 to 9.

11. A method of moving an elongate member along a predetermined axis for the introduction or withdrawal thereof to or from a free body, the method including:

15 providing an elongate guide surface extending parallel to said predetermined axis;

providing a plurality of support elements which are slidable on said elongate guide surface in a direction parallel to said predetermined axis;

supporting said elongate member on said support elements so that at least a major portion of the mass is supported thereby; and

20 causing said elongate member and said support elements to move along said predetermined axis;

wherein the support elements are dismantleable whereby, when the elongate member is supported by a series of three or more said supporting elements,

one of said supporting elements of the series can be dismantled to leave the elongate member supported in alignment with said predetermined axis by the remaining support elements,

wherein an end of the elongate member is caused to move towards and  
5 beyond an associated structural member, and wherein the method further comprises:

causing said elongate member to move in the direction of said associated structural member until said one end is adjacent to said associated structural member;

dismantling a leading said support element, leaving the elongate member  
10 supported by remaining said support elements; and

causing further movement of said elongate member beyond said associated structural member.

12. A method according to claim 11, wherein said elongate guide surface comprises a flat planar load-supporting surface, and said support elements each  
15 comprise at least one load-supporting pad that, in use, engage and are slidable along said load-supporting surface.

13. A method according to claim 12, wherein each said support element comprises a plurality of said load-supporting pads, and wherein each said load-supporting pads is of low friction material.

20 14. A method according to claim 12 or 13, wherein said support elements are constrained against transverse movement with respect to said load-supporting surface by spaced generally parallel side elements upstanding from opposite edges of said load-supporting surface.

15. A method according to any one of claims 11 to 14, wherein said support  
25 elements are interconnected by flexible tie elements.

16. A method according to any one of claims 11 to 15, wherein each said support element comprises a cradle portion upwardly open to receive and engage a portion of the elongate member when said elongate member is lowered in use.

17. A method according to any one of claims 11 to 16, wherein said elongate 5 guide surface extends beyond said associated structural member and the method further includes:

reassembling said leading support element at a location beyond said associated structural member;

10 continuing movement of said elongate member until a next said support element approaches said associated structural member;

dismantling said next support element; and


further moving said elongate member.

18. A method according to claim 17, further comprising repeating said moving, dismantling, moving and reassembling until a preset number of said supporting 15 elements have been reassembled beyond said associated structural member.


19. A method according to any one of claims 11 to 18, wherein said elongate member comprises a propeller shaft for a naval vessel, and wherein said free body comprises a naval vessel, or at least the stern portion of a naval vessel.

20. A method of constructing a naval vessel comprising applying the method of 20 claim 19.

Fig. 1

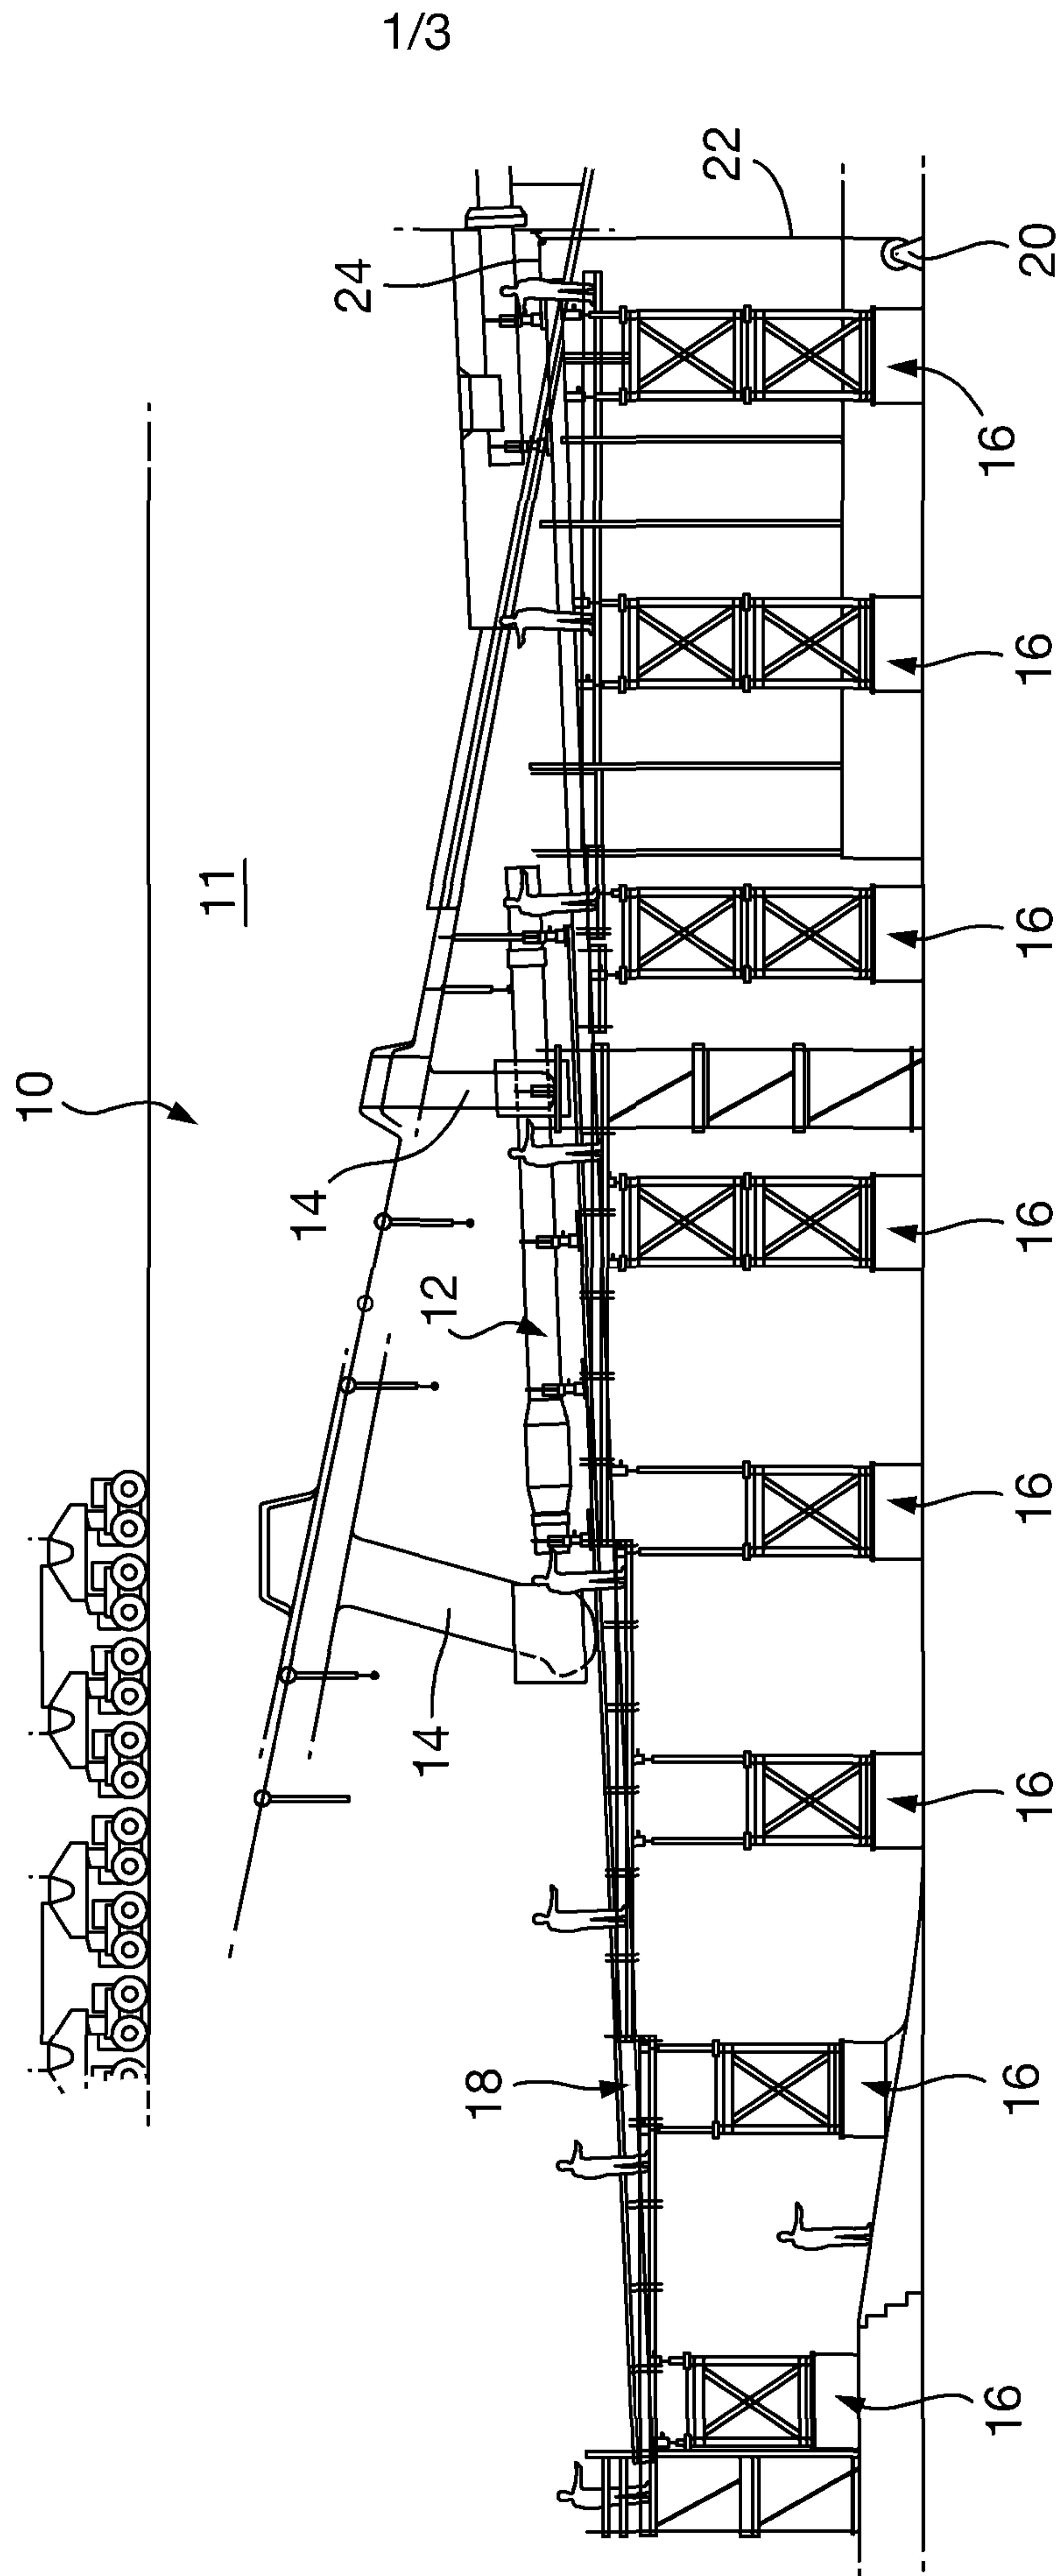

2/3

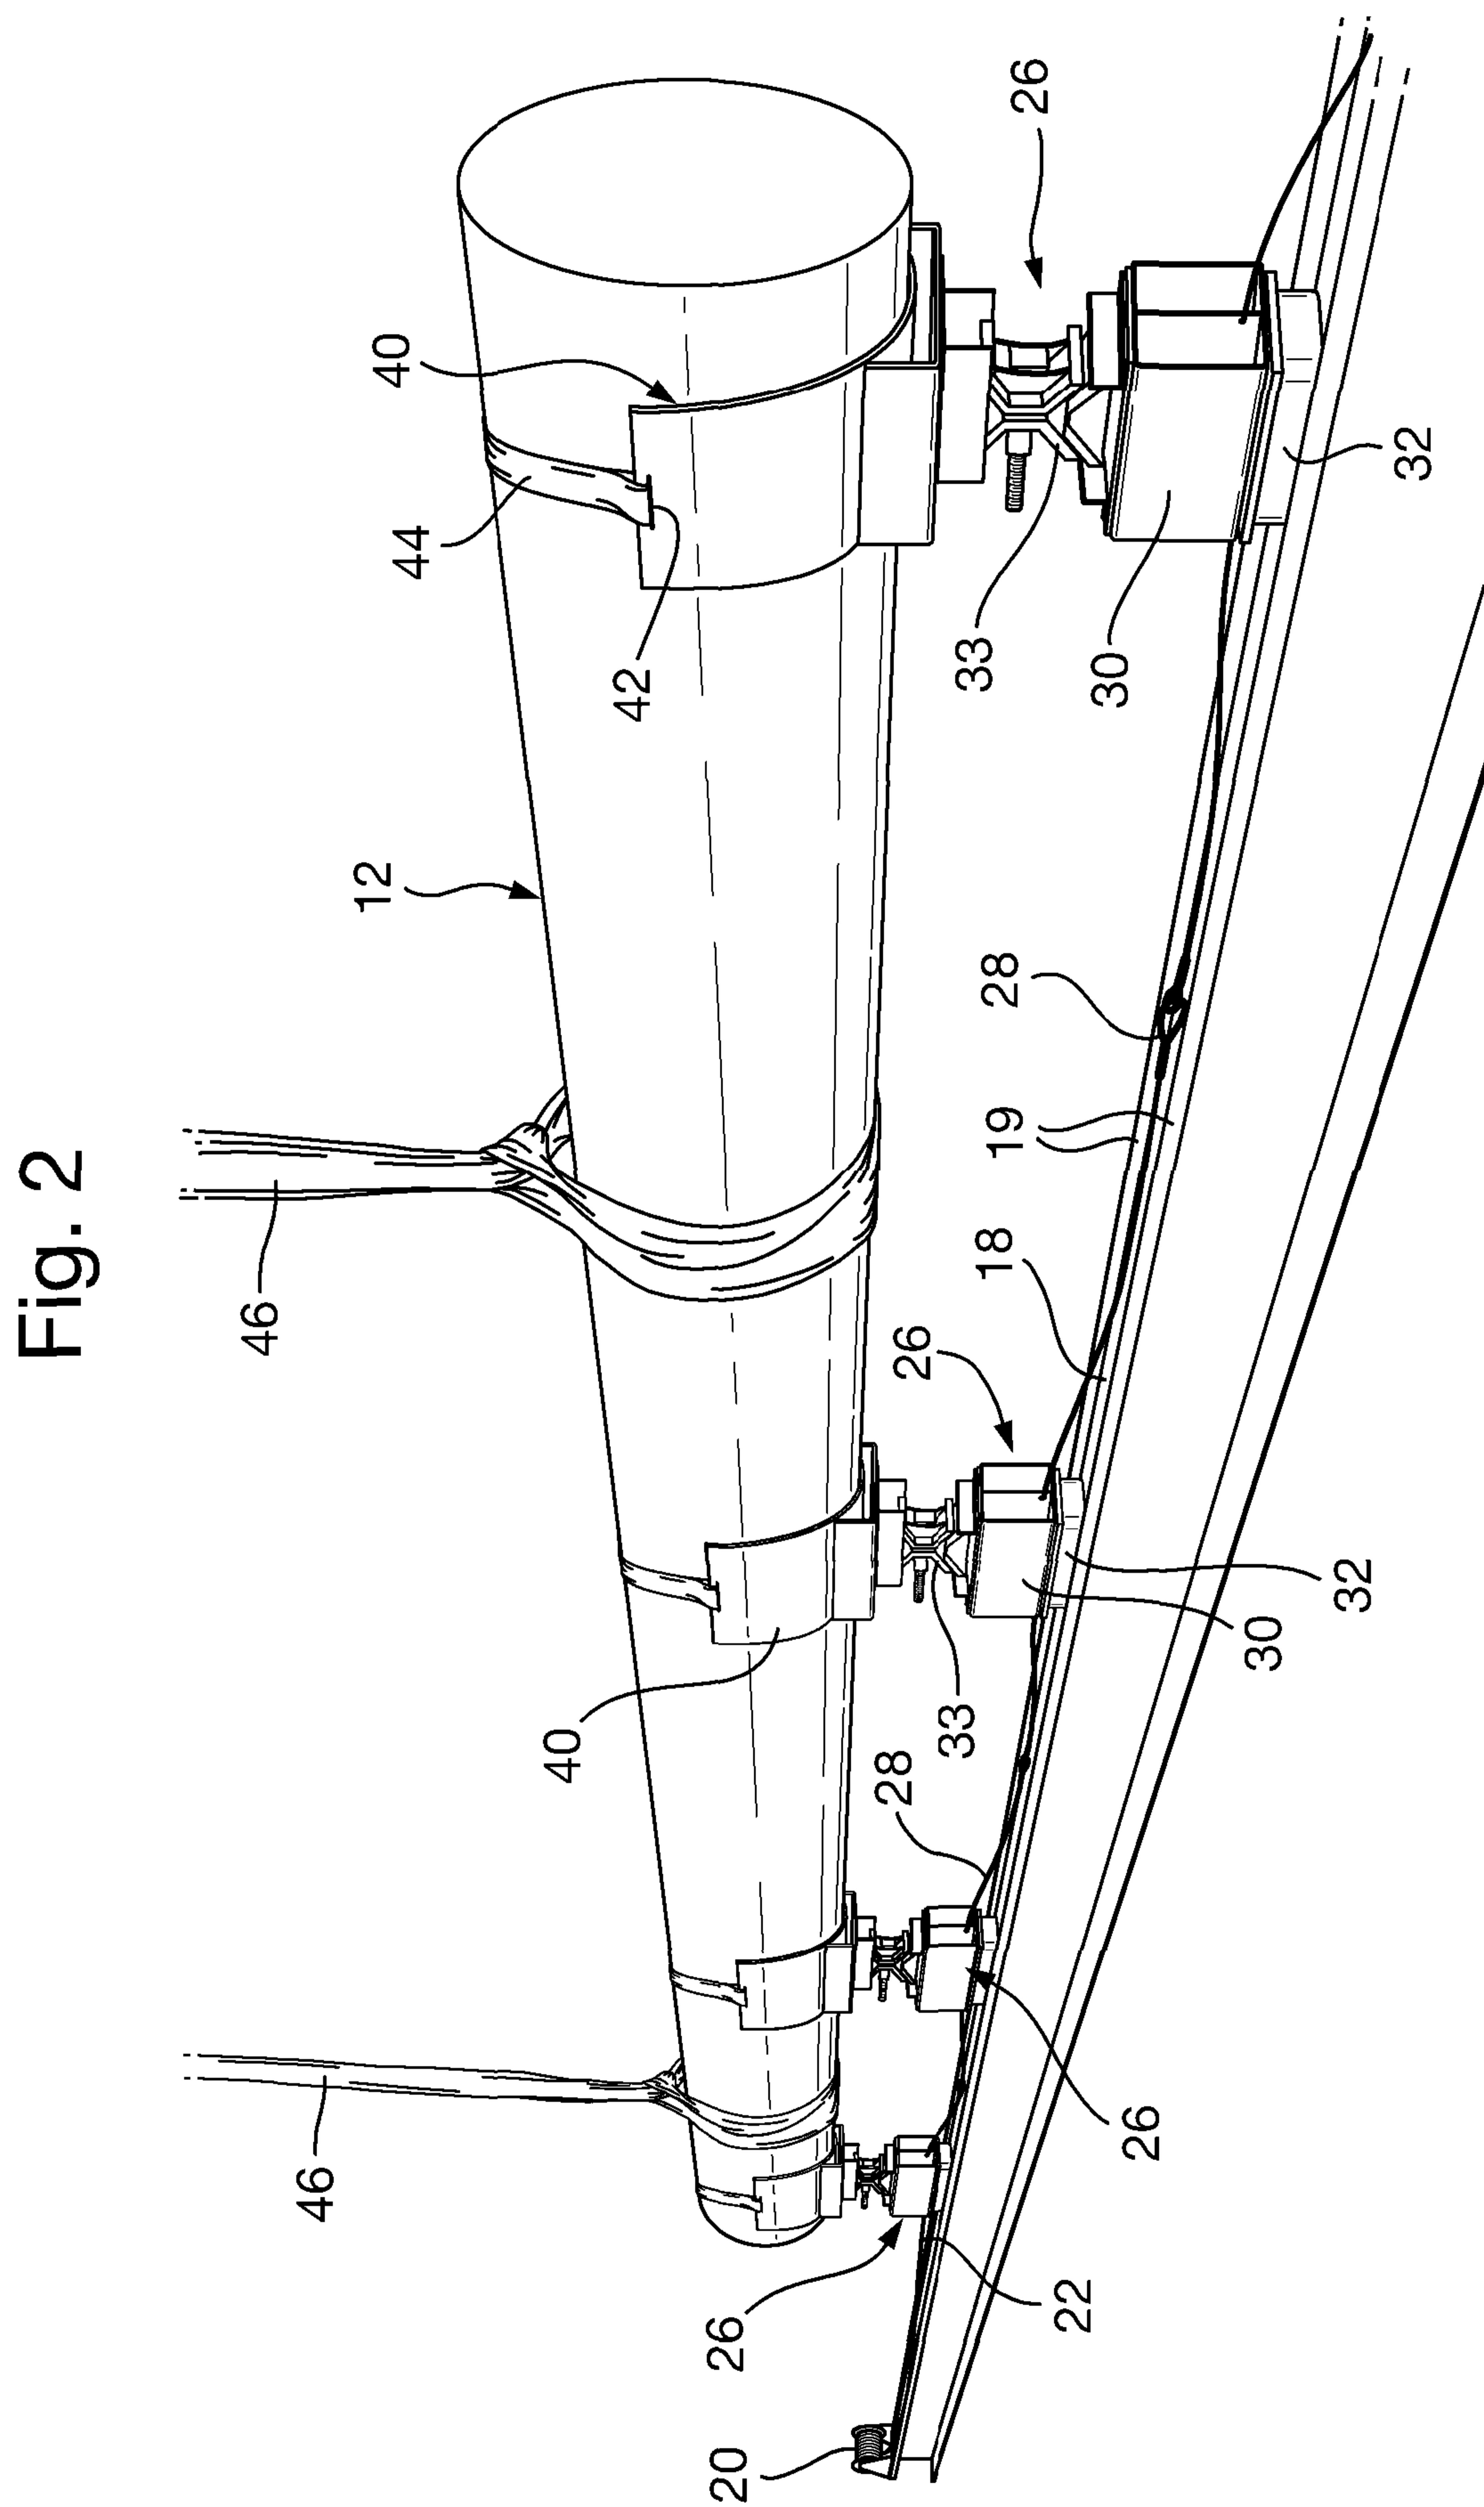

3/3

Fig. 3(a)

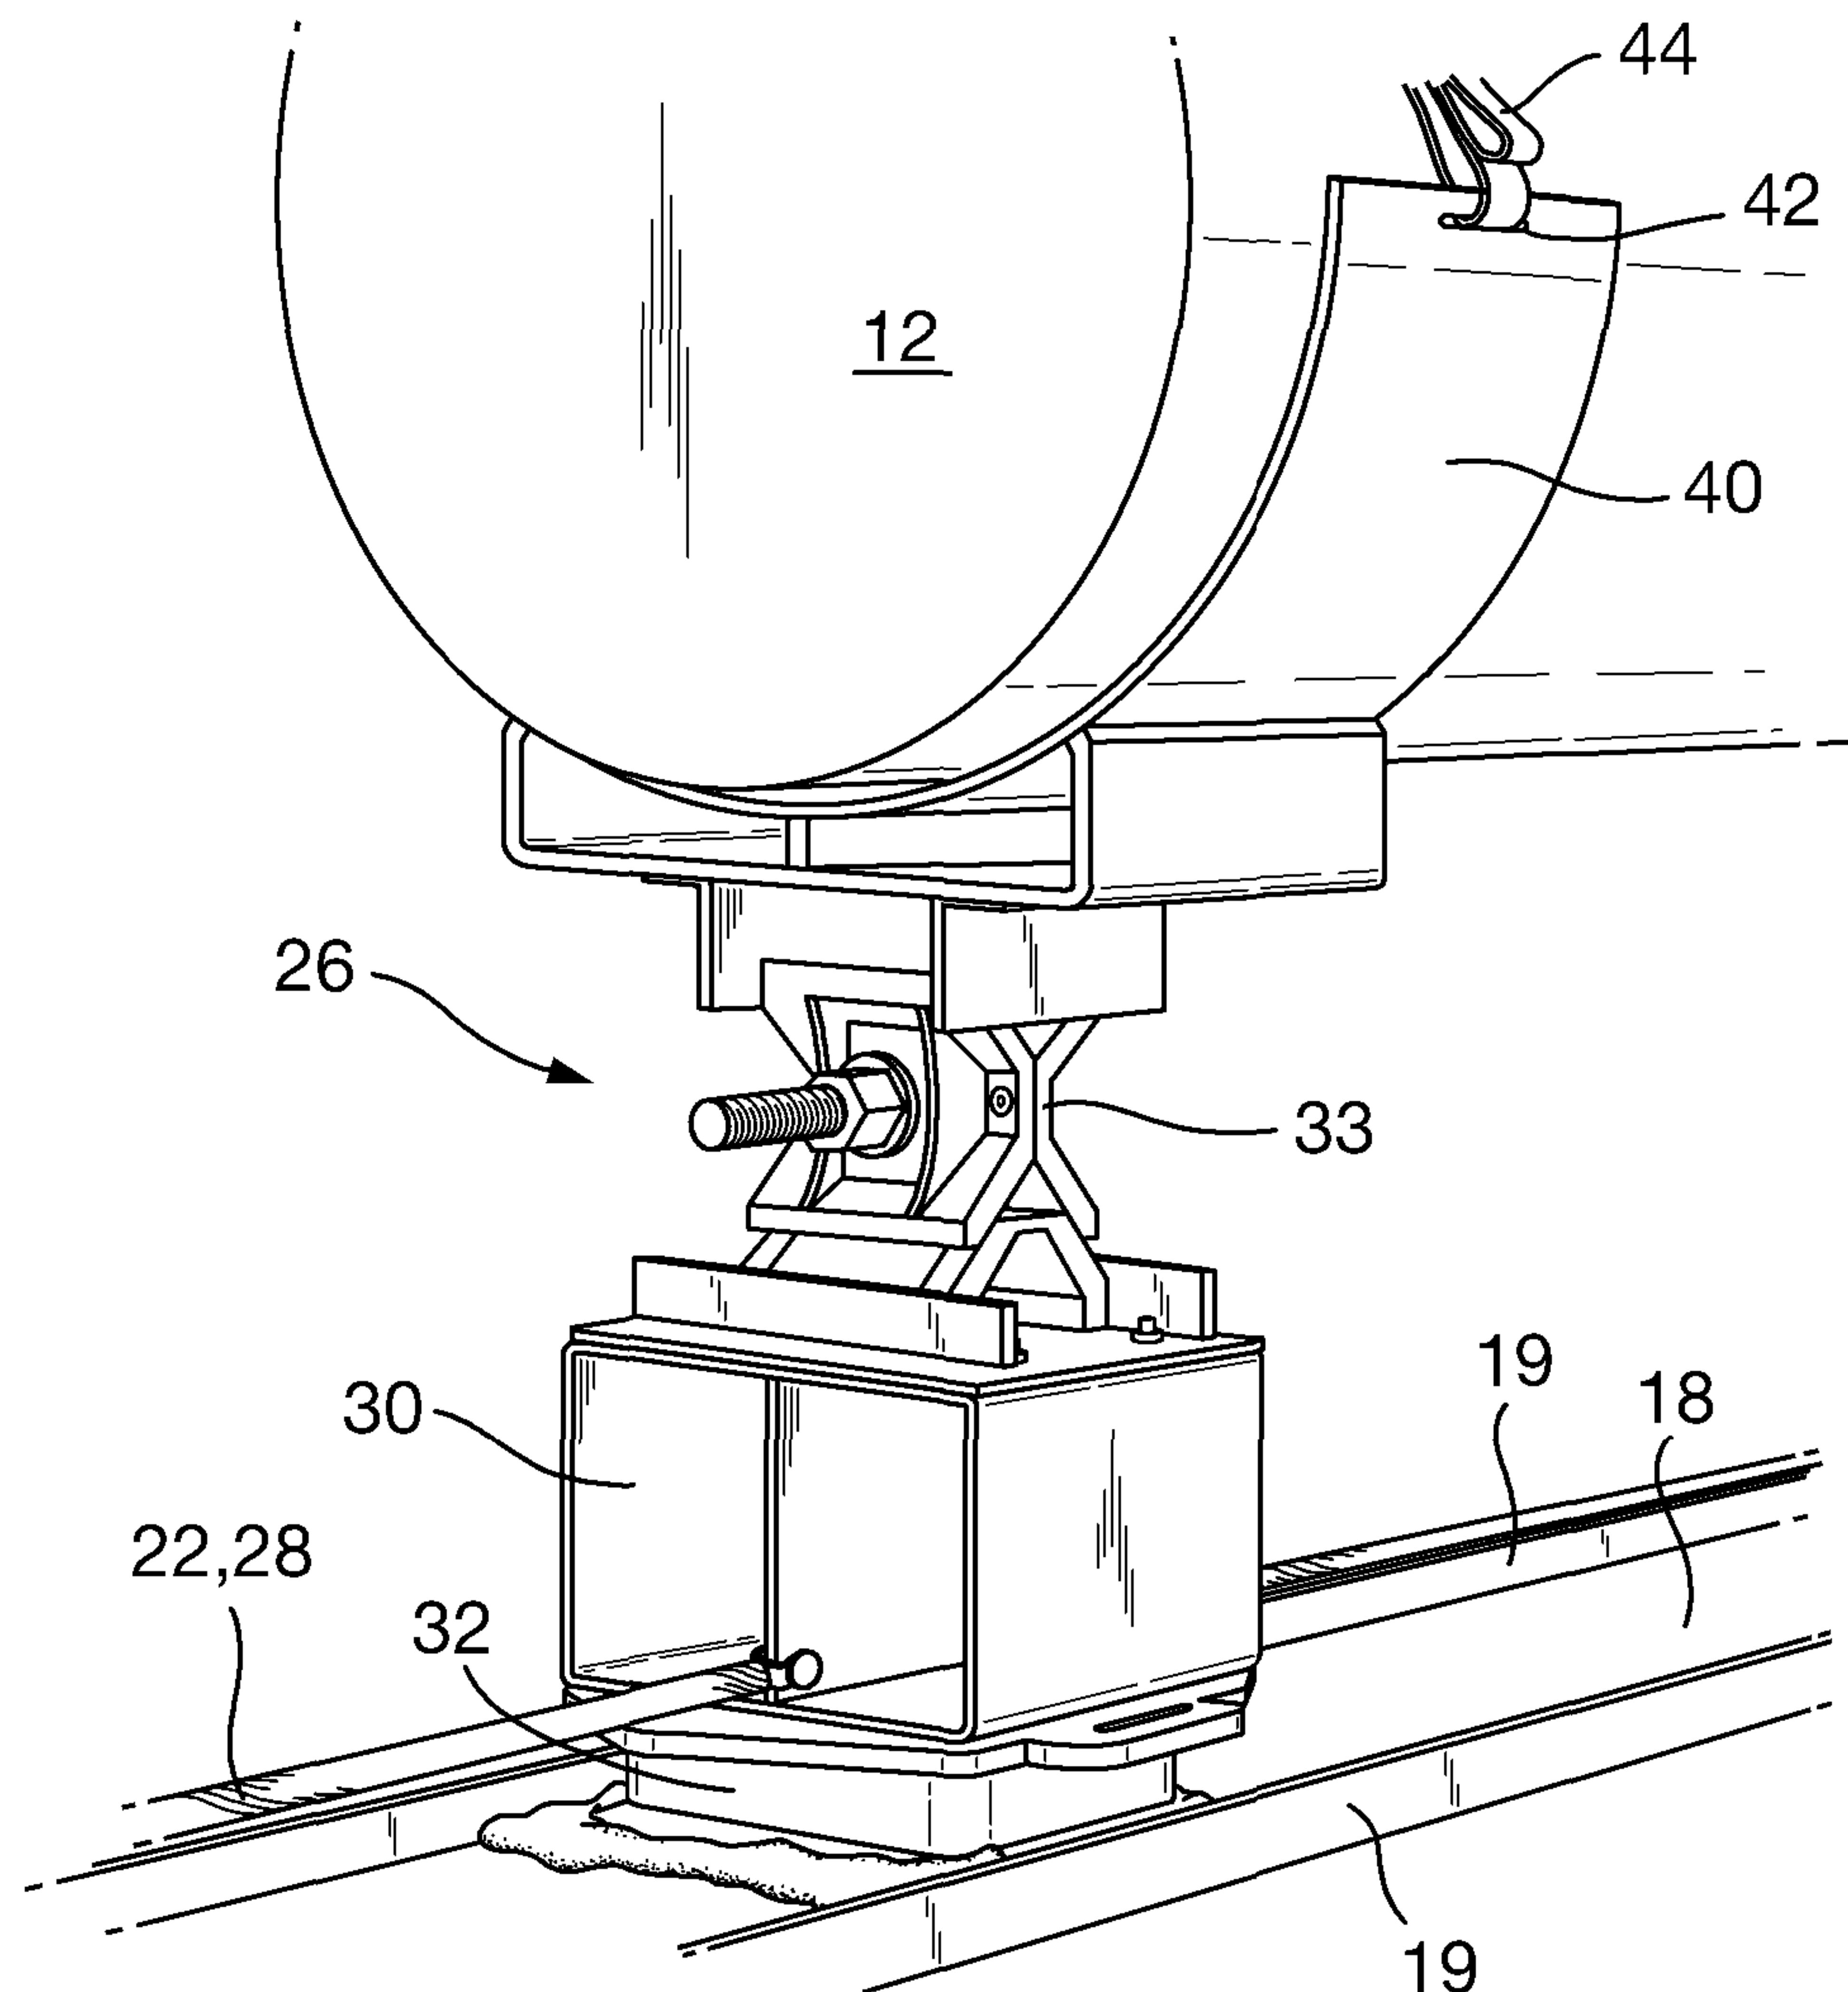


Fig. 3(b)

