



- (51) International Patent Classification:
A47G 19/22 (2006.01)
- (21) International Application Number:
PCT/EP2015/051728
- (22) International Filing Date:
28 January 2015 (28.01.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1401497.1 29 January 2014 (29.01.2014) GB
1410978.9 19 June 2014 (19.06.2014) GB
14/570,476 15 December 2014 (15.12.2014) US
- (71) Applicant: **JACKEL INTERNATIONAL LIMITED**
[GB/GB]; Northumberland Business Park West, Dudley Lane, Cramlington Northumberland NE23 7RH (GB).
- (72) Inventors: **PARKER, Richard**; 1 Jesmond Business Crt, 217 Jesmond Road, Newcastle Upon Tyne NE2 1LA (GB). **O'BRIEN, Matthew**; 1 Jesmond Business Crt, 217 Jesmond Road, Newcastle Upon Tyne NE2 1LA (GB). **ROE, James**; Glossop Gasworks, Office 4, Arundel St, Glossop Derbyshire SK13 7AB (GB). **ROEBUCK, Jason**; Glossop Gasworks, Office 4, Arundel St., Glossop Derbyshire SK13 7AB (GB). **ANGUS, Peter**; 1 Jesmond Business Crt, 217 Jesmond Road, Newcastle Upon Tyne NE2 1LA (GB).
- (74) Agent: **KILBURN & STRODE LLP**; 20 Red Lion Street, London WC1R 4PJ (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: VALVE ASSEMBLY AND MANUFACTURING METHOD THEREFOR

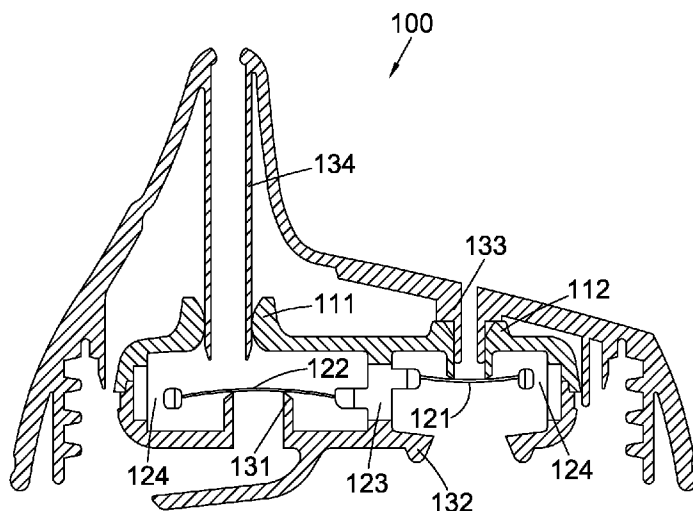


Fig. 11

(57) Abstract: There is described a valve assembly (100) for a drinking vessel. The valve assembly comprises a first valve portion (130) having a fluid outlet (131) formed therein, and a second valve portion (120) comprising a flexible diaphragm (122) having a blocking portion movable from a closed sealing position to an open position. The second valve portion (120) holds the flexible diaphragm (122) relative to the first valve portion (130) such that in the closed sealing position the blocking portion seals the fluid outlet (131) so as to prevent fluid flow therethrough. The second valve portion (120) further comprises one or more apertures (124) formed therein and spaced from the blocking portion such that a fluid flow path is formed from the fluid outlet (131) to at least one of the apertures (124) when the blocking portion is moved from the closed sealing position to the open position. By having the blocking portion seal the fluid outlet, the blocking portion may flex in the same direction as fluid flowing through the liquid outlet, therefore making it easier for a user to break the seal when using a drinking cup.

- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

VALVE ASSEMBLY AND MANUFACTURING METHOD THEREFOR

Field of the Invention

The present invention relates to a valve assembly, and in particular to a valve assembly for a drinking cup. In some embodiments, the invention relates to a novel valve assembly for use with a no-spill infant drinking cup.

Background to the Invention

It is common for infant cup valve assemblies, and their respective components, to be formed from various types of plastic, and as such injection moulding is a common manufacturing method. However, valve assemblies often comprise complex arrangements of small components. This has traditionally led to the components being moulded separately and subsequently being assembled during manufacture to form the completed valve assembly. Thus, different moulds are required depending on the size, form and desired type of material to be used when forming the valve assembly components. These parts may then need to be glued or otherwise coupled together during manufacture. For example, in EP2134617B1, there is described a no-spill infant cup valve assembly. The assembly, however, consists of at least two separately moulded parts, and therefore requires at least one assembly step during the manufacturing process. In addition, the valve requires the user to reassemble it by coordinating small locating features every time the valve is removed for cleaning; failure to reassemble the valve correctly results in liquid leaking from the cup. Clearly, therefore, there is a need for both an improved method of manufacture, and a simpler valve assembly, which can benefit from reduced cost and manufacturing time.

One type of well-known drinking cup is the so-called no-spill drinking cup, suitable for infant usage. The aim of a no-spill cup and associated valve is to provide a cup which allows the contents of the cup to escape through the valve only upon usage by the user, for example via the application of suction. Suction-operated valves may sometimes be referred to as 'demand valves' to differentiate them from other non-spill valves, such as 'bite valves', which are opened by the user temporarily deforming the closure device with their teeth or lips to allow liquid to escape. A demand valve incorporated into a no-spill cup should therefore prevent

the contents of the cup from escaping when for example when the cup is vigorously shaken, when the cup is inverted, or when the cup is accidentally dropped. However, there is always a risk that such a valve having, for example, a flexible component designed to move in response to a pressure differential can be easily deformed by the impact of liquid on the component, which often occurs during such shaking or dropping. Thus, undesirable leakage can occur. Conversely, a user should not have to apply excessive suction in order to open the valve. There is therefore a need in the art for a valve assembly suitable for a drinking cup in which an improved seal is provided, whilst ensuring that a user is not inconvenienced when using the drinking cup.

In EP2134617B1, the closure element relies on a stem that passes through the same channel that the liquid flows through. There is therefore only a small space around the stem for liquid to flow and flow rate is limited accordingly. If the stem were made narrower (to allow more water to flow around it), there may not be sufficient closure force on the 'mushroom head' to seal the valve closed, and the mushroom head may become difficult to install by pushing through the channel. Alternatively, if the mushroom head and liquid channel were made larger relative to the stem, to accommodate more flow, then the head may become too flexible to cap the channel inlet.

It is also a known problem with demand valves that control liquid flow via a slit in a flexible material that they have a tendency to 'heal' (see for example EP1014839B1). This can affect, for example, slits in silicone diaphragms and may mean that the material can repair itself during shipping so that the user finds difficulty in getting the valve to work when they first try to use it.

The present invention seeks to address these and other disadvantages encountered in the prior art, by providing an improved valve assembly for a drinking cup.

Summary of the Invention

In a first aspect of the present invention, there is provided a valve assembly for a drinking cup. The valve assembly comprises a first arm having a first valve portion and a second arm having a second valve portion. Each valve portion has a respective aperture for fluid flow. The valve assembly is foldable from an unfolded

state to a folded state, such that the first arm is moveable relative to the second arm. This allows the first valve portion to be engaged with the second valve portion to form, in the folded state, a fluid flow path between the first and second apertures.

The inventive valve assembly, hereinafter referred to as an assembly, chassis or frame, may be used with any type of drinking cup or vessel, such as an infant drinking cup or beaker. The valve assembly may be particularly well suited for use with a no-spill drinking cup as described above. The provision of first and second arms, which may take a variety of forms and structures, may allow the assembly to be moulded in a single part according to known techniques. The arms of the assembly may also be referred to as, for example, extending members, appendages, attachments or limbs.

The first and second valve portions may be sub-components or sub-units of a completed valve. For example, one of the valve portions may comprise a valve seat whilst the second valve portion may be arranged to receive a flexible valve face. Only when the first and second valve portions are brought together may the two function together as a completed valve. The valve portions may be located at any position on their respective arms such that when one arm is moved relative to the other the valve portions may be brought into engagement.

Each valve portion may comprise one or more apertures formed therein. In particular, the apertures may be designed such that, when the first and second valve portions are brought into engagement, only some of the apertures may be arranged to allow fluid flow therethrough, whilst others may be designed to be sealed off with a flexible member or other diaphragm.

The folding of the first arm relative to the second arm may take place along a predetermined fold line or other point along which folding, rotating or bending may take place. The engagement of the first valve portion with the second valve portion may comprise a non-fixed joining or contacting of the two valve portions, or may also comprise more permanent attachment such as coupling or fixed connection of one valve portion to the other.

The assembly may also comprise a third arm. The valve assembly may be further foldable such that the third arm is moveable relative to the first and second arms. The third arm may be rotated or moved relative to the first arm, the second arm, or both. The third arm may also be joined to only one of the first and second arms, or both.

The third arm may also comprise a locking mechanism for locking the first and second valve portions together in the folded state. The provision of a locking mechanism may ensure that the first and second arms do not detach or spring apart post-assembly. Even without the locking mechanism, the engagement of the third arm with the first and/or second arms may serve to reinforce the coupling or engagement of the first and second valve portions. The third arm may incorporate a spout, and may also incorporate attachment means to a drinking cup.

The third arm may comprise a third aperture. In the folded state, the third arm may engage at least one of the first and second valve portions to form a fluid flow path between the first, second and third apertures. Thus, when in the folded state, a fluid flow path may be formed through the valve assembly, running from each of the apertures of the first and second valve portions and the third arm.

In the folded state, the first and second valve portions may be detachably interlocked, for example, with a locking tab and clasp, or by other means known in the art. Advantageously, when a user wishes to clean the valve components, the locking mechanism may be disengaged and the assembly reverted to its unfolded state for cleaning. Such unfolding is generally a simple process. The valve assembly components can then be cleaned, and the assembly can be easily returned to the folded state.

In the folded state the first and second valve portions may be engaged to form a demand valve. A demand valve may be defined as a valve that switches from a closed to an open configuration due to suction.

A length of the fluid flow path may be less than a width of the valve assembly. Other lengths of fluid flow paths are contemplated within the scope of this disclosure. Thus, the inventive assembly may avoid the more tortuous and lengthy flow paths that are associated with prior art valve assemblies. Such tortuous flow paths generally require the sucking out of a lot of air before liquid arrives, and generate a relatively higher amount of drag/friction as a result of their long flow paths.

The valve assembly may further comprise a flexible diaphragm. The flexible diaphragm may comprise at least one aperture. The diaphragm may comprise apertures of different shapes and sizes, positioned at different points on the diaphragm. This set of apertures may correspond to the type in either of the first or second valve portions which is not sealed off with a flexible member or other diaphragm. The diaphragm may also be referred to herein as a membrane, flexible

cover, valve face or other such term. The flexible diaphragm may be coupled to one of the first and second arms such that in the folded state the flexible diaphragm may act to block the fluid flow path between the aperture(s) in the first and second valve portions. Thus, when the first and second valve portions are engaged to one another, a completed valve may be formed such that the flexible diaphragm may block the fluid flow path and at times flex so as to open the fluid flow path.

In the folded state, a blocking portion of the flexible diaphragm may act to block the fluid flow path between the first and second apertures. The blocking portion may be spaced from an aperture formed within the flexible diaphragm. The blocking portion may be a central portion of the flexible diaphragm.

In the folded state the flexible diaphragm may be sealingly coupled to at least one of the first and second valve portions. The flexible diaphragm may be positioned so as to seal off the aperture in the first/second valve portion.

The first arm may further comprise a third valve portion. The second arm may further comprise a fourth valve portion. Each of the third and fourth valve portions may have a respective aperture for air flow. Thus, an air valve may be incorporated into the valve assembly.

The valve assembly may be foldable from an unfolded to a folded state such that the first arm is moveable relative to the second arm, to allow the third valve portion to be engaged with the fourth valve portion and to thereby form in the folded state an air flow path between the third and fourth apertures.

The valve assembly may further comprise a second flexible diaphragm. The second flexible diaphragm may comprise at least one aperture. The second flexible diaphragm may be coupled to one of the first and second arms such that in the folded state the second flexible diaphragm acts to block the air flow path between the third and fourth apertures. Thus, much like the first flexible diaphragm, the second flexible diaphragm may combine with the third and fourth valve portions to form a completed valve, such that the second flexible diaphragm may block the fluid flow path and at times flex so as to open the fluid flow path through the third and fourth valve portions.

In the folded state, a blocking portion of the second flexible diaphragm may act to block the air flow path between the third and fourth apertures. The blocking portion being spaced from an aperture formed within the second flexible diaphragm. The blocking portion may be a central portion of the second flexible diaphragm.

The valve assembly may further comprise a gripping member extending away from a plane of the valve assembly. The gripping member may take various shapes and sizes, and is primarily designed to allow a user to easily handle the valve assembly (especially in its folded state), for example by assisting in engaging or disengaging the valve assembly with a lid of a drinking cup.

In a further aspect of the present invention, there is provided a method of manufacturing a valve assembly for a drinking cup. The method comprises moulding a first arm and a second arm, the first and second arms being coupled to one another. The first arm has a first valve portion and the second arm has a second valve portion. Each valve portion has a respective aperture for fluid flow. A fold line is formed in the valve assembly such that the valve assembly is foldable from an unfolded state to a folded state, and such that the first arm is moveable relative to the second arm to allow the first valve portion to be engaged with the second valve portion. A fluid flow path is therefore formed between the first and second apertures.

Advantageously, the fold line allows the first arm to be moved relative to the second arm so as to bring valve portions into engagement with one another. According to this method, a relatively complex valve may therefore be formed in a single moulding process. By forming the valve as different valve portions located on different arms, the valve portions can then be brought together and engaged without the need to manufacture them as separate, individual parts.

The method may further comprise moulding a first flexible diaphragm such that the first flexible diaphragm is coupled to the first arm.

The method may further comprise moulding a second flexible diaphragm such that the second flexible diaphragm is coupled to the first or second arm.

The first and second arms may comprise a first material, such as a rigid plastic, for example polypropylene. The first and/or second flexible diaphragms may comprise a second, different material, such as a thermoplastic elastomer or silicone.

In a further aspect of the invention, there is provided a method of using a valve assembly as described above. The method comprises folding the valve assembly so as to move the first arm relative to the second arm. The first valve portion is thus brought into engagement with the second valve portion to form a fluid flow path between the first and second apertures.

In a further aspect of the invention, there is provided a valve assembly for a drinking cup. The valve assembly comprises a liquid inlet, a liquid outlet, a blocking member, and a flexible member arranged to seal against the blocking member. The valve assembly further comprises a conduit extending from the liquid inlet to the liquid outlet. The conduit comprises at least one bend and is arranged such that fluid may flow from the liquid inlet, past the bend and through the liquid outlet to at least indirectly impinge the flexible member.

The blocking member may be any component or member arranged to prevent the flow of liquid therethrough, and for example is impervious to the passage of a liquid. The flexible member may take different shapes and forms and may be arranged to form a seal around at least a portion of the blocking member. The bend acts as a baffle and may comprise any feature of the conduit designed to induce a not insubstantial deviation in a flow path defined by the conduit, such that a liquid flowing through the conduit will undergo a velocity change. The bend may be curved or straight in nature. The bend may have any suitable angle, and in one embodiment is a right-angle bend. The conduit may be arranged such that liquid exiting the conduit is directed directly onto the flexible member. Alternatively, the liquid may be directed such that it may rebound off a surface (for example the blocking member) and then in so doing indirectly impinge the flexible member.

Advantageously, the bend or other similar deformation in the conduit reduces the momentum of a liquid flowing through the conduit such that the pressure exerted by the flowing liquid on the flexible member is reduced. Thus, the seal of the flexible member is improved and is weakened less over time through repeated usage of the valve assembly. In prior art valve assemblies, liquid generally impinges the flexible member without any slow-down effect induced by one or more bends in a conduit, which can result in weakening of the seal.

The blocking member may comprise a valve seat having the liquid outlet formed therein. The flexible member may comprise a flexible valve face arranged to seal against the liquid outlet so as to prevent fluid flow therethrough.

The valve assembly may be arranged to couple to a lid of a drinking cup with the liquid inlet located within the drinking cup when the drinking cup is joined to the lid. When suction is applied to a drinking hole of the drinking cup, the flexible member may be caused to lift off the blocking member. Thus, the inventive valve assembly may be incorporated with a drinking cup to provide an improved drinking

cup in which the valve's seal is stronger and more durable as a result of the bent conduit.

The conduit may comprise a first section and a second section. The first section may extend from the liquid inlet to the bend, and the second section may extend from the bend to the liquid outlet. Further sections in the conduit may be provided. For example, the conduit may comprise a plurality of bends, each bend acting to slow down the flow of liquid drawn through the conduit as a user applies suction so as to consume the contents of the cup.

The first and second sections may be substantially linear.

The first section may be longer than the second section. In other words, the bend may be located proximal or adjacent to the liquid outlet such that the reduction in speed of the liquid is maximised before the liquid exits through the liquid outlet. In one embodiment, the first section is approximately 13mm long and the second section is approximately 5mm long.

A cross-section of the first section may have a smaller surface area than a corresponding cross-section of the second section. Increasing the cross-section of the first section in this manner may further improve the dampening or baffle-like effects of the bend. In one embodiment, the cross-section of the first section is approximately 8mm^2 and the cross-section of the second section is approximately 12.5mm^2 .

In a further aspect of the invention, there is provided a valve assembly for a drinking cup. The valve assembly comprises a valve seat having a liquid outlet formed therein. The valve assembly further comprises a flexible valve face having a blocking portion arranged to seal the liquid outlet so as to prevent fluid flow therethrough. The flexible valve face comprises one or more apertures formed therein and spaced from the blocking portion.

Thus, by having a blocking portion of a flexible valve face seal a liquid outlet of the valve, the flexible valve face (and in particular the blocking portion) may flex in the same direction as liquid flowing through the liquid outlet, therefore making it easier for a user to break the seal when using a drinking cup with the inventive valve assembly. Thus, the valve assembly may make it easier for the user to apply suction and open the valve.

The blocking portion may comprise a central portion of the flexible valve face. The blocking portion may be impermeable to the passage of liquid. A peripheral portion of the flexible valve face may be fixed to the valve seat. The peripheral portion may be spaced from the blocking portion, and for example may form part of a periphery of the flexible valve face. A periphery of the flexible valve face may be fixed to the valve seat. The peripheral portion may be spaced from the liquid outlet. The one or more apertures may be formed adjacent the peripheral portion.

The valve assembly may further comprise a liquid inlet. The valve assembly may be arranged to couple to a lid of a drinking cup with the liquid inlet located within the drinking cup when the drinking cup is joined to the lid. When suction is applied to a drinking spout of the drinking cup, the flexible valve face may be caused to lift off the liquid outlet, thereby allowing fluid in the cup to flow from the liquid inlet to the liquid outlet.

The flexible valve face may be arranged to lift off the liquid outlet in a substantially similar direction to a direction of fluid flow through the liquid outlet.

The one or more apertures of the flexible valve face may be located such that when the valve is closed (e.g. when the flexible member seals off the aperture in the valve seat) the apertures in the flexible valve face are not in fluid communication with the aperture formed in the valve seat. In particular, the one or more apertures of the valve face may be located substantially along a periphery of the flexible valve face. A central portion of the flexible valve face may seal off the aperture of the valve seat.

At least a portion of the flexible valve face may be held fixedly in a position (using any suitable means) such that the blocking portion is sealingly tensioned over the liquid outlet. An improved seal can be achieved as a result, as the tension in the flexible member assists in creating the seal.

The valve assembly may further comprise an air inlet and a flexible diaphragm arranged to seal off the air inlet. The valve assembly may be further arranged such that when suction is applied to the drinking hole the flexible diaphragm is caused to lift off the air inlet, thereby allowing air to flow into the drinking cup. Thus, an air valve may be provided which may serve to equalise the pressure within the drinking cup when the valve assembly is in use.

In a further aspect of the invention, there is provided a valve assembly for a drinking cup. The valve assembly comprises a valve seat having a liquid outlet

formed therein. The valve assembly further comprises a flexible valve face having a blocking portion arranged to seal the liquid outlet so as to prevent fluid flow therethrough. A peripheral portion of the flexible valve face is fixed to the valve seat. This further aspect of the invention may further comprise any of the above-described features.

In a further aspect of the invention, there is provided a valve assembly as set out in the appended claims.

The first valve portion may comprise a part of the valve assembly against which the flexible diaphragm (such as a valve face or other flexible member) may seal against. Thus, the first valve portion may comprise a valve seat or similar valve component. The second valve portion may comprise a supporting frame or similar structural member arranged to hold or fix the flexible diaphragm relative to the first valve portion. The apertures may be formed in either the flexible diaphragm, or a portion of the supporting frame, or both.

The flexible diaphragm may be sealingly tensioned over the fluid outlet such that the flexible diaphragm may take on a curved or bowed appearance. The curve may be in a direction of fluid flow through the fluid outlet.

The second valve portion adjacent the flexible diaphragm may comprise a crenelated perimeter. The crenelations or other such projections may improve the adhesion of the flexible diaphragm to the supporting frame or other such element of the second valve portion.

In some embodiments, the valve assembly may be integrated into a drinking spout of a drinking vessel such that the valve assembly may take on a substantially vertical orientation. Thus, the movement of the diaphragm, and in particular the blocking portion, may be substantially perpendicular, or at least non-parallel, to the direction of fluid flow through the spout. This design may be more space-efficient.

The fluid outlet may comprise a bowed portion arranged to cause a corresponding bowing in the blocking portion when in the closed sealing position. This may serve to improve the seal between the blocking portion and the fluid outlet.

In a further aspect of the invention, there is provided a valve assembly for a drinking vessel. The valve assembly comprises a valve element having a supporting frame and a flexible diaphragm, the supporting frame dividing the flexible diaphragm

into first and second diaphragm portions. The valve assembly further comprises a movable valve base having a fluid outlet formed therein. The valve base is arranged relative to the valve element such that the valve base contacts the supporting frame with the second diaphragm portion sealing the liquid outlet, and such that a tension in the second diaphragm portion is independent of movement of the valve base.

The first and second diaphragm portions may be integrally formed with the supporting frame, or may be individual components each attached to or otherwise coupled to the supporting frame.

The valve base may be arranged during movement to push against the supporting frame. In particular, the valve base may be arranged to move relative to the flexible diaphragm in a direction of fluid flow through the fluid outlet.

During movement of the valve base, a tension in the second diaphragm portion may remain substantially constant.

The valve base may be further arranged relative to the valve element such that a tension in the first diaphragm portion may depend on movement of the valve base. Thus, during movement of the valve base a tension in the first diaphragm portion may change.

The valve base may be integrated into a base of a drinking vessel.

Further embodiments of the invention are set out below. In one such embodiment, there is provided a valve assembly adapted to be connected to a lid of a drinking vessel comprising:

an upper case being engageable with the lid of the drinking vessel, the upper case having a valve outlet, and an air inlet, the air inlet having a valve seat,

a lower case having a liquid inlet, an air outlet, and a liquid outlet, the liquid outlet having valve seat,

at least one flexible diaphragm interposed between the upper case and lower case such that the flexible diaphragm seals both the air inlet and the liquid outlet; and

wherein the upper case engages the lower case to form a first fluid flow path between the liquid outlet and valve outlet and a second fluid flow path between air inlet and air outlet.

Optionally, engagement of the upper case with the lower case comprises a non-fixed joining or contacting of the two cases.

Optionally, a peripheral edge of the flexible diaphragm is supported by a supporting frame.

Optionally, the flexible diaphragm is movable in response to a reduced pressure in the valve outlet, the air outlet, or both.

Optionally, the flexible diaphragm further comprises a first flexible diaphragm arranged to block the liquid outlet, and a second flexible diaphragm arranged to block the air inlet.

Optionally, the first flexible diaphragm and liquid outlet are selectively closer to a liquid in the drinking vessel than the second flexible diaphragm.

Optionally, a conduit extends from the liquid inlet to the liquid outlet valve portion.

Optionally, the conduit further comprises at least one bend.

In a further embodiment, there is provided a valve assembly for a drinking vessel, comprising:

an upper case arranged to be removably attached to a lid of the drinking vessel, the upper case having a valve outlet and air inlet,

a lower case arranged to be coupled to the upper case, the lower case having a liquid inlet, a liquid outlet, and an air outlet,

an intermediate frame arranged to be located between the upper case and the lower case, the intermediate frame supporting a first flexible diaphragm and a second flexible diaphragm,

the first flexible diaphragm adapted to block the liquid outlet,

the second flexible diaphragm adapted to block the air inlet; and

wherein negative pressure in the valve outlet moves the first flexible diaphragm up from the liquid outlet and negative pressure in the air outlet moves the second flexible diaphragm down from the air inlet.

In a further embodiment, there is provided a method of using a valve assembly for a drinking vessel, the method comprising:

applying a pressure to the valve assembly, thereby folding the valve assembly so as to move an upper case towards a lower case,

aligning a first valve portion having a first aperture with a second valve portion having a second aperture,

engaging the first valve portion with the second valve portion; and

forming a fluid flow path between the first aperture and the second aperture.

In a further embodiment, there is provided a valve assembly for a drinking vessel, comprising:

- a liquid inlet,
- a liquid outlet,
- a valve seat,
- a flexible diaphragm, and

a conduit extending from the liquid inlet to the liquid outlet; the conduit comprises at least one bend.

Optionally, the valve seat has the liquid outlet formed therein, and the flexible diaphragm is arranged to seal against the valve seat and block the fluid flow from the liquid outlet. Optionally, the bend is a right-angle bend.

Optionally, the valve assembly further comprises:

a lid for enclosing the drinking vessel, the lid having a liquid outlet tube, the valve assembly being arranged to couple with the liquid outlet tube; and the liquid inlet is located within the drinking vessel when enclosed with the lid. Optionally, the conduit further comprises a conduit first section and a conduit second section, the conduit first section extending from the liquid inlet to the bend, and the conduit second section extending from the bend to the liquid outlet.

In a further embodiment, there is provided a valve assembly for a drinking vessel, comprising:

- a valve portion having a fluid outlet,
- a frame comprising:

at least one flexible diaphragm having a blocking portion movable from a closed sealing position to an open position,

at least one aperture, the at least one aperture being spaced from the blocking portion; and

wherein the frame positions the at least one flexible diaphragm relative to the valve portion such that in the closed sealing position the blocking portion seals the fluid outlet so as to prevent fluid flow and in the open position a fluid flow path is formed from the fluid outlet to the at least one aperture of the frame.

Optionally, the valve assembly further comprises:

a lid for enclosing the drinking vessel, the lid having a liquid outlet tube, the valve assembly being arranged to couple with the lid; and wherein the flexible diaphragm is arranged relative to the liquid outlet tube such that when moving from the closed sealing position to the open position the blocking portion moves in a direction parallel to a direction of fluid flow through the liquid outlet tube.

Optionally, the valve assembly further comprises:

a lid for enclosing the drinking vessel, the lid having a liquid outlet tube and an air inlet tube,

the valve assembly being arranged to couple with the lid,

a second valve portion having an air inlet,

a second flexible diaphragm having a blocking portion movable from a closed sealing position to an open position; and

wherein the frame positions the second flexible diaphragm relative to the second valve portion such that suction applied to a liquid outlet tube causes a blocking portion of the second flexible diaphragm to lift off the air inlet, thereby allowing air to flow through the air inlet tube into the drinking vessel.

Optionally, the flexible diaphragm is sealingly tensioned over the fluid outlet such that the flexible diaphragm has a convex shape and protrudes in a direction away from the fluid outlet.

Optionally, the drinking vessel is a cup or a bottle.

Optionally, at least a portion of the frame comprises a crenelated perimeter.

Optionally, the frame is formed of a compressible silicone material.

Optionally, the second flexible diaphragm is selectively higher than the flexible diaphragm.

Brief Description of the Drawings

A preferred embodiment of the invention will now be described in connection with the accompanying drawings, of which:

Figure 1 is a first perspective view of a valve assembly in accordance with an embodiment of the invention, shown in its unfolded state;

Figure 2 is a second perspective view of the valve assembly of Figure 1;

Figure 3 is a perspective view of the valve assembly of Figure 1, including the liquid and air diaphragms;

Figure 4a is a first perspective view a liquid diaphragm in accordance with an embodiment of the invention;

Figure 4b is a second perspective view the liquid diaphragm of Figure 4a;

Figure 5a is a first perspective view an air diaphragm in accordance with an embodiment of the invention;

Figure 5b is a second perspective view the air diaphragm of Figure 5a;

Figure 6a is a perspective view of the valve assembly of Figure 3 during folding;

Figures 6b and 6c show cross-sections of a hinge that may be used with the valve assembly of Figure 6a;

Figure 7 is a perspective view of the valve assembly of Figure 3, shown in its folded state;

Figure 8 is a cross-sectional view of the valve assembly of Figure 7 with the liquid and air valves closed;.

Figure 9 is a cross-sectional view of the valve assembly of Figure 7 with the liquid and air valves open;

Figures 10a-10g are perspective views of components of a valve assembly in accordance with embodiments of the invention;

Figure 11 is a cross-sectional view of the valve assembly of Figures 10a-10g with the liquid and air valves closed;

Figures 12a and 12b are perspective views of a valve assembly in accordance with an embodiment of the invention, shown in its unfolded state;

Figure 12c is a perspective view of a valve assembly in accordance with an embodiment of the invention, shown in its unfolded state;

Figures 13a-17d are cross-sectional views of various valve assemblies integrated into bottles for venting;

Figures 18a-21b are cross-sectional views of various valve assemblies in accordance with alternative embodiments of the invention; and

Figures 21c-21e show the valve assembly of Figures 21a and 21b in greater detail.

Detailed Description of Specific Embodiment

The present invention seeks to provide an improved valve assembly for a drinking cup. Whilst various embodiments of the invention are described below, the invention is not limited to these embodiments, and variations of these embodiments may well fall within the scope of the invention which is to be limited only by the appended claims.

In accordance with a preferred embodiment of the invention, there is shown in Figure 1 a valve assembly 10 suitable for use with a drinking cup, in particular an infant drinking cup. Figure 2 shows an underside of assembly 10. In Figures 1 and 2, assembly 10 is shown in an unfolded or disassembled state.

Assembly 10 comprises three arms 12, 14 and 16. Arms 12 and 14 are joined to one another along fold line 11. Arm 14 is further joined to arm 16 by means of hinge 13. Arm 12 is in line with arm 14, whilst arm 16 extends perpendicularly away from arm 14 and in the same plane as arms 12 and 14. Whilst in the present embodiment arms 12 and 14 are shown to have a substantially elongate shape, the invention is not limited to such a shape and the arms may take any other shape provided they can still carry out their intended function, as will be described below in more detail.

At an end of arm 12 is located a first valve portion 15 having a central aperture 15a and four peripheral apertures 15b disposed around the outside of central aperture 15a. Apertures 15a and 15b are formed within a circular recess of arm 12 such that a fluid flow path extends from one side of arm 12 to the other side of arm 12, through each of apertures 15a and 15b.

Adjacent valve portion 15 is located a third valve portion 17, comprising a nozzle 18. Nozzle 18 comprises an aperture 19 such that a fluid flow path is formed from one side of arm 12 to the other side of arm 12, through aperture 19. Aperture 19 defines an air inlet 19a and air outlet 19b (see Figures 8 and 9). In particular, the fluid flow path extends from air inlet 19a of nozzle 18, on an upper side of arm 12 (Figure 1), to air outlet 19b of nozzle 18, on a lower side of arm 12 (Figure 2).

Arm 14 comprises second and fourth valve portions 21 and 20. Valve portion 20, adjacent fold line 11, comprises a circular recessed portion 22 with a central aperture 23a formed therein and two peripheral apertures 23b located on either side of central aperture 23a. Apertures 23a and 23b extend from one side of arm 14 such that a fluid flow path is formed from one side of arm 14 to the other side of arm 14, through each of apertures 23a and 23b.

Adjacent valve portion 20, at the opposite end of arm 14, is second valve portion 21. Valve portion 21 comprises a circular recessed portion with an upwardly extending sealing wall 24 along its periphery. Sealing wall 24 is topped with an angled portion in the shape of an inverted V (see Figures 8 and 9 for more detail). Within the centre of the recessed portion is a nozzle or liquid outlet 25. As will be described below in more detail, valve portion 21 further comprises a conduit extending from a liquid inlet 26 formed in arm 14 and extending to liquid outlet 25. On the underside of assembly 10 (best seen in Figure 2) is located a fin-like projection or gripping member 30, extending away from arm 14. In other embodiments gripping member 30 may extend in other directions away from assembly 10.

Adjacent arm 14 and extending substantially perpendicularly away from arm 14 is arm 16. Arm 16 comprises a central aperture or bore 27 extending from one side of arm 16 to the opposite side of arm 16, such that a fluid flow path is formed from the one end of bore 27 to the other. Arm 16 comprises a locking member 28 engageable with a clasp 29 positioned on arm 14 and adjacent valve portion 21.

Assembly 10 is moulded as a single part using techniques known in the art, to obtain the shape and structure shown in Figures 1 and 2. The arrangement of the components of assembly 10 means that all features can be moulded in the line of draw such that assembly 10 can be moulded using a simple injection moulding tool. In the illustrated embodiment, liquid inlet 26 is not arranged in the line of draw but this could still be achieved, if required. Assembly 10 is preferably moulded using polypropylene, although other materials may be used, for example common rigid plastics capable of injection-moulding such as polyethylene, nylon or polyester.

Once assembly 10 is moulded, a pair of flexible diaphragms, liquid diaphragm 40 and air diaphragm 50, are moulded in receptive positions on assembly 10. For simplest manufacturing, the pair of flexible diaphragms may be moulded immediately after moulding assembly 10, for example by known co-moulding techniques, or they may be moulded separately at a later time. In particular, liquid diaphragm 40 is moulded in position over valve portion 15 to acquire the shape shown in Figures 4a and 4b. Likewise, air diaphragm 50 is formed by moulding over valve portion 20 to acquire the shape shown in Figures 5a and 5b. Figure 3 shows assembly 10 in its

unfolded state following the moulding of liquid diaphragm 40 and air diaphragm 50 in their respective positions over valves portions 15 and 20.

Both sides of liquid diaphragm 40 are shown in more detail in Figures 4a and 4b. Liquid diaphragm 40 comprises a double-layered disc-like shape with an internal recessed portion 41. Four equally-spaced apertures 43b extend from one side of liquid diaphragm 40 to its other side, each passing through a double-walled peripheral section 42. Other shapes of liquid diaphragm are contemplated within the scope of the invention. For example, fewer or more apertures 43b may be incorporated into liquid diaphragm 40. Liquid diaphragm 40 is made of a flexible material, preferably a thermoplastic elastomer.

Air diaphragm 50 is illustrated in Figures 5a and 5b and comprises a disc-shaped flexible member having a pair of apertures 53b extending through it, on opposite sides of the member. Air diaphragm 50 further comprises a shallow, circular recessed portion 52 on one side of air diaphragm 50. Again, fewer or more apertures 53b may be incorporated into air diaphragm 50.

Returning to Figure 3, as a result of the moulding, note that apertures 43b are aligned with apertures 15b, and that apertures 53b are aligned with apertures 23b. Note also that liquid diaphragm 40 and air diaphragm 50 are preferably moulded with their recessed portions, respectively 41 and 52, on the underside of the moulding, as shown in Figure 3.

Fold line 11 and hinge 13 are known as 'live hinges', which are regions designed by their shape to be deformable and to allow relative movement between two components of the same moulded part.

In order to assemble valve assembly 10, assembly 10 must be moved from an unfolded state (as in Figures 1 and 2) to a folded, ready state. This is shown in more detail in Figure 6a. Arm 12 is first moved relative to arm 14 by folding assembly 10 along fold line 11. When arm 12 is rotated through 180 degrees about fold line 11 and relative to arm 14, valve portion 15 is engaged with corresponding valve portion 21 such that liquid diaphragm 40 is sandwiched between arm 12 and arm 14. Similarly, valve portion 17 is engaged with corresponding valve portion 20 such that air diaphragm 50 is sandwiched between arm 12 and arm 14.

In some cases folding of assembly 10 may be difficult due to the restricted movement of fold line 11, and fold line 11 may be placed under stress when folded and may cause distortion of assembly 10 such that the seal formed around the air

vent is broken. One solution is to have a longer, more flexible fold line or hinge that allows assembly 10 to be folded whilst ensuring arms 12 and 14 come together in parallel and without distortion. An example of such an elongate hinge 11c is shown in Figure 6c, whilst Figure 6b shows a shorter hinge 11b which may lead to distortion during folding.

Once arm 12 has been rotated relative to arm 14, arm 16 is then rotated using hinge 13 so as to bring it into engagement with the underside of arm 12. Arm 16 therefore engages with valve portion 15 and detachably locks arm 12 to arm 14 by means of locking member 28 engaging with clasp 29. Locking member 28 and clasp 29 may be based on known devices and may be chosen to be permanently closed, to prevent unfolding by users, or to be operable by users so that valve assembly 10 may be readily unfolded and re-folded e.g. for thorough cleaning. However, it may be possible to do away with arm 16 altogether by location of a suitable clasp on arm 12.

In its folded state, ready for use, assembly 10 is shown in more detail in Figure 7. A cross-section of assembly 10 in its folded state is shown in Figure 8. As can be seen, air diaphragm 50 seals against nozzle 18 so as to close off or cap air outlet formed by aperture 19. When arm 12 is rotated relative to arm 14, nozzle 18 contacts the central portion of air diaphragm 50 and pushes the central portion downwards, thereby tensioning air diaphragm 50 around the rim of aperture 19. The periphery of air diaphragm 50 is held sealingly in place between valve portion 17 and valve portion 20. Apertures 23b of valve portion 20 are aligned with apertures 53b of air diaphragm 50.

Similarly, when arm 12 is rotated relative to arm 14, the central blocking portion of liquid diaphragm 40 contacts the rim of liquid outlet 25 in valve portion 21, which causes the central blocking portion of liquid diaphragm 40 to be pushed upwards relative to the periphery of liquid diaphragm 40. Thus, liquid diaphragm 40 is tensioned around the rim of liquid outlet 25 so as to seal off liquid outlet 25, and the central portion of liquid diaphragm 40 takes on the shape of an inverted V. The periphery of liquid diaphragm 40 is held sealingly in place by the engagement of valve portion 15 with valve portion 21. In particular, sealing wall 24 is resiliently biased into double-walled peripheral section 42 of liquid diaphragm 40 so as to form

a seal. Apertures 15b of valve portion 15 are aligned with apertures 43b of liquid diaphragm 40.

Although not shown in Figure 8, arm 16 serves to hold arm 12 in engagement with arm 14, thereby assisting with the engagement of valve portion 15 with valve portion 21, and valve portion 17 with the engagement of valve portion 20.

Figure 8 also shows in more detail the conduit 50 extending from liquid inlet 26 to liquid outlet 25. Conduit 50 comprises a right-angle bend 51 such that bend 51 divides conduit 50 into a first horizontal section starting at liquid inlet 26, and a second vertical section ending at liquid outlet 25.

In use, valve assembly 10 in its folded state may be incorporated into the lid of a drinking cup, especially an infant drinking cup. For example, the lid may be arranged to receive and engage with valve assembly 10. By grasping gripping member 30, a user may more easily engage assembly 10 with the lid. Once assembly and lid are coupled, the lid may be screwed on or otherwise placed over a lidless drinking cup (such as a cup designed for engagement with the particular lid), such that liquid inlet 21 and gripping member 30 are positioned within the cup.

The lid preferably comprises a spout (or other apertured element) for drinking from. When a user sucks on the spout, pressure is reduced within a chamber 60 of assembly 10 (see Figures 8 and 9). The negative pressure causes the central blocking portion of liquid diaphragm 40 to lift off liquid outlet 25 and thereby break the seal between liquid diaphragm 40 and the rim of aperture forming liquid outlet 25. A fluid flow path is then formed extending from liquid inlet 26, past bend 51, through liquid outlet 25 and through apertures 15b and 43b of valve portion 21 and liquid diaphragm 40, to reach chamber 60. Fluid may then flow from chamber 60 out through the spout. For example, if a user sucks on the spout whilst the cup is up-ended, fluid may flow out from drinking cup and into the user's mouth.

Recessed portions 41 and 52 of liquid diaphragm 40 and air diaphragm 50 may vary in depth, or may even be absent, depending on the thickness of diaphragms 40 and 50. For example, the thickness of liquid diaphragm 40, and hence the depth of recessed portion 41, can be adjusted to best balance the need for liquid diaphragm 40 to respond to low suction levels, for example by being thin and easily stretched, with the desire to retain enough tension in liquid diaphragm 40 to reliably seal against liquid outlet 25. These characteristics may also be adjusted

by changing the grade of elastomer for a harder or softer grade. Air diaphragm 50 may be adjusted in the same manner.

As fluid is sucked from the drinking cup, the pressure within the drinking cup decreases. This creates a negative pressure within drinking cup which causes air diaphragm 50 to lift off of air outlet 19 in a downwards manner, thereby breaking the seal between air diaphragm 50 and nozzle 18. A fluid flow path is then formed from air inlet 19a to air outlet 19b, such that air may flow from air inlet 19a, through air outlet 19b, and subsequently through apertures 23b and 53b of valve portion 20 and air diaphragm 50. Entry of air within drinking cup serves to equalise the pressure within drinking cup such that suction on spout is not impeded.

A further embodiment of a valve assembly in accordance with the present invention is shown in Figures 10a-10g. Assembly 100 is similar to assembly 10, though, unlike assembly 10, assembly 100 is formed of three individually moulded components: upper case 110, lower case 130 and intermediate frame 120 arranged to support two flexible diaphragms 121 and 122.

Upper case 110 comprises valve outlet 111 and air inlet 112, whilst lower case 130 comprises liquid outlet 131 and air outlet 132. As shown in Figure 10c, intermediate frame 120 comprises two central apertures 127 and 128 formed within rigid frame portion 123. Outer projecting wall 126 runs substantially along the perimeter of intermediate frame 120. Although only one side of intermediate frame 120 is shown in Figure 10c, the other side of intermediate frame 120 is identical. Figure 10f shows intermediate frame 120 with diaphragms 121 and 122 received and held in respective central apertures 127 and 128.

A plurality of apertures or fluid outlets 124 are formed within rigid frame portion 123 of intermediate frame 120, adjacent central apertures 127 and 128. Thus, unlike apertures 43b and 53b of assembly 10, apertures 124 are formed within rigid frame portion 123 as opposed to within diaphragms 121 and 122 themselves.

Figure 10d shows a modified version of intermediate frame 120. In this embodiment, in-between apertures 124 are located indents, castellations or crenulations 125' formed within rigid frame portion 123'. Projections 125' allow for an increased surface area of diaphragms 121 and 122 to contact intermediate frame 120' so as to aid adhesion and improve the seal between the co-moulded parts, as can be seen in more detail in Figure 10g.

Unlike intermediate frame 120 of Figure 10d, intermediate frame 120' comprises a notched aperture 129' for locating a corresponding notch 129 in the underside of upper case 110, which can be seen in more detail in Figure 10e. Without notched aperture 129', intermediate frame 120 would be symmetrical between its upper and lower faces, and there would be the possibility that intermediate frame 120' could be loaded into lower case 130 upside down and as a result diaphragm 121 may not engage and cap liquid outlet 131 (as described in more detail below). Notched aperture 129' ensures intermediate frame 120' can only be loaded into lower case 130 with diaphragm 121 in the correct orientation.

Intermediate frame 120 (or intermediate frame 120') may be made from a rigid material over-moulded or co-moulded with a second, flexible material. In particular, relatively rigid frame portion 123 of intermediate frame 120 may be made from polypropylene, whilst diaphragms 121 and 122 may be made from a relatively flexible thermoplastic elastomer. Of course, other materials may be used if desired.

In order to assemble assembly 100, diaphragms 121 and 122 are first received in their respective central apertures 127 and 128 of intermediate frame 120/120'. Preferably, diaphragms 121 and 122 are over-moulded or co-moulded onto intermediate frame 120, either immediately after intermediate frame 120 is formed in the injection moulding tool, or in a later, separate moulding step. Intermediate frame 120 is then attached to lower case 130 such that diaphragm 121 caps liquid outlet 131 in lower case 130, and such that outer projecting wall 126 of intermediate frame 120 is received in a corresponding groove along the perimeter of lower case 130.

When attaching intermediate frame 120/120' to lower frame 130, notched aperture 129' points away from lower case 130. Upper case 110 is then attached to lower case 130 by engaging a groove along its perimeter with corresponding outer projecting wall 126 of intermediate frame 120. Notch 129 is received in notched aperture 129'. The preferred method of attachment between intermediate frame 120, lower case 130 and the upper case 110 is ultrasonic welding, but other methods could be employed, e.g. using adhesives, so long as they create a seal around each valve compartment.

As described above, intermediate frame 120 (or intermediate frame 120') may be made from two-part silicone. In particular, relatively rigid frame portion 123 of intermediate frame 120 may be made from hard grade silicone, whilst diaphragms

121 and 122 may be made relatively soft grade silicone. An advantage of this arrangement is that the relatively hard silicone of rigid frame portion 123 is generally not as hard as typical plastics, and so retains a small degree of compressibility. Hence, the assembly of valve assembly 100 may be simplified such that only upper case 110 need be welded to lower case 130, without requiring the step of welding intermediate frame 120 to lower case 130 or upper case 110. Instead, the sealing around each valve compartment may rely on compression of rigid frame portion 123 by upper and lower cases 110 and 130. The compression may be held by, for example, an ultrasonic weld around the perimeter of lower and upper cases 110 and 130, although other means could be used, e.g. using adhesives.

Once assembled, the structure and function of assembly 100 are largely identical as those of assembly 10. For example, an angled channel or bent conduit may lead from the outside of assembly 100 to liquid outlet 131, so as to minimise direct pressure from moving water, e.g. as generated by a child shaking the cup.

Once assembled, assembly 100 can be fitted to the underside of a cup lid, with air inlet tube 133 and liquid outlet tube 134 plugging respectively into air inlet 112 and valve outlet 111, as seen in Figure 11. To ensure effective sealing, diaphragms 121 and 122 are located such that liquid outlet 131 and air inlet 121 press on the underside of their respective diaphragms 121 and 122, slightly stretching and deforming them.

Alternative embodiments to assembly 100 are shown in Figures 12a-12c. In these embodiments, the valve assembly incorporates the foldability aspect described in connection with assembly 10. In Figures 12a and 12b, upper and lower cases 210 and 230 are moulded as a single, hinged piece. Intermediate frame 220 (with diaphragms 221 and 222) is then attached to lower case 230, as described above in relation to Figures 10a-10d. Upper case 210 is then folded over and attached to both lower case 230 and intermediate frame 220.

As seen in Figure 10c, in an alternative embodiment valve assembly 200 may also be moulded as a single part. Upper case 210 and lower case 230 are hingedly connected to and located on respective sides of intermediate frame 220. To assemble valve assembly 200, intermediate frame 220 is folded over (with upper case 210) to locate into lower case 230. Intermediate frame 220 is then attached to

lower case 230 (e.g. by sonic welding) before upper case 210 is folded over onto lower case 230 and intermediate frame 220, and attached to both.

In the above embodiments, the upper/lower cases and intermediate frame may be attached / folded over in different sequences, and the above-described sequences of assembly steps are merely exemplary and should not be construed as limiting.

The above embodiments describe a valve assembly that may be used for example with an infant drinking cup so as to prevent spillages. However, the valve concept may in addition be applied to baby bottles or similar such drinking cups or vessels. In particular, the valve assembly may therefore be used to vent a baby bottle when suction is applied to the bottle's teat by the infant. To be used with a baby bottle, the assembly may be simplified such that only an air valve need be provided – in other words the liquid valve portion of the valve assembly may be dispensed with.

Figures 13a-17b illustrate various embodiments in which the valve assembly of the present invention is incorporated into a baby bottle, in particular at the base of the bottle, to provide venting capability. As the infant draws liquid out of the bottle through suction at the bottle's teat, air may be automatically allowed to enter into the bottle at the base, via the valve assembly, to equalise the pressure and facilitate suction of the liquid out of the bottle.

Figures 13a and 13b illustrate an open system wherein the liquid product is allowed to flow around the valve, but is baffled from any shocks to avoid leaks. Inner 1310 is a twin shot component that uses a relatively soft diaphragm 1320 and bottle seal 1330. To assemble the parts, inner 1310 is pushed into base 1340 of bottle 1350. Base 1340 is then screwed or otherwise attached to bottle 1350. A relatively thicker section of soft material between inner 1310 and base 1340 enables greater tolerance of the final base position whilst maintaining the desired diaphragm interference.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1320 lifting off first fluid inlet 1321 (the central spigot) when suction is applied to bottle 1350. Air may then flow into bottle 1350 through second fluid inlet 1322 and apertures 1323.

Figures 13c – 13g illustrate a variant of the embodiment of Figures 13a and 13b. Figure 13c shows a closed system with a twin shot inner component 1360

shown in more detail in Figure 13f. On the underside of inner component 1360 is a barrier seal 1362 arranged to sealingly engage base 1370 (seen more clearly in Figures 13c and 13d). Inner component 1360 comprises a diaphragm 1364, with apertures 1366 disposed adjacent the periphery of diaphragm 1364 and formed within inner component 1360. Base 1370 comprises air inlet 1372. When compared to the embodiment of Figures 13a and 13b, the redundant space between inner component 1360 and base 1370 is reduced. In addition, barrier seal 1362 serves to insulate air inlet 1372 from the milk or other contents of the bottle.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1364 lifting off air inlet 1372 when suction is applied to the feeding bottle. Air may then flow into the bottle through air inlet 1372, pushing open barrier seal 1362, and subsequently passing through apertures 1366.

In Figures 14a and 14b, the valve comprises a two-part valve with a twin shot inner component 1410 that is spin welded onto bottle 1420, with base 1430 being able to screw on and off inner 1410. The flexible diaphragm comprises an outer portion 1450 with apertures 1480 formed therein, and a central portion 1440. Outer portion 1450 and central portion 1440 are separated by a ring 1460 (or diaphragm frame) of rigid material that is formed as part of the twin shot.

As base 1430 is screwed onto inner 1410, diaphragm frame 1460 is pushed up by central spigot 1470 allowing for a greater base assembly tolerance. The distance between diaphragm frame 1460 and central spigot 1470 is a controlled dimension. In other words, as base 1430 is screwed further onto inner 1410, the tension in outer portion 1450 of the flexible diaphragm will increase, whilst the tension in central portion 1440 will remain substantially constant due in part to diaphragm frame 1460 which isolates the central portion 1440 from upward movement of the push ring 1465.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with central portion 1440 lifting off the fluid inlet in central spigot 1470 when suction is applied to bottle 1420. Air may then flow into bottle 1420 through apertures 1480. Apertures 1480 may be slits or very small holes or similar in outer portion 1450 of the flexible diaphragm that substantially prevent liquid from within bottle 1420 from entering into base 1430.

Figures 15a and 15b illustrate a further alternative embodiment of the air valve assembly. The valve uses two components: a twin shot base valve and base cover 1520. To assemble the parts, base cover 1520 is rotated to a lock position on the bottom of base 1530 and the assembled base is screwed onto bottle 1540. Base 1530 could also be spin welded onto bottle 1540, leaving only base cover 1520 to remove for cleaning. As base cover 1520 is locked into position, a push ring 1550 engages with diaphragm frame 1560 as described above in relation to the valve assembly of Figures 14a and 14b. Thus, the distance and relative heights from push ring 1550 to fluid inlet 1570 (e.g. the central spigot) is a controlled dimension. In other words, as base cover 1520 is screwed further onto base 1530, the tension in the outer portion of the flexible diaphragm will increase, whilst the tension in the central portion (within diaphragm frame 1560) will remain substantially constant.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with the diaphragm lifting off the fluid inlet 1570 when suction is applied to bottle 1540. Air may then flow into bottle 1540 through fluid inlet 1580 and through apertures 1590 in the outer portion of the diaphragm. Apertures 1590 may be slits or very small holes or similar as per apertures 1480 described above.

Figures 15c – 15g illustrate a variant of the embodiment of Figures 15a and 15b. The valve comprises a twin shot base 1591 and a removable base cover or insert 1592 including an air inlet 1593. Base 1591 includes an umbrella flap 1594 or similar valve member (as can be more clearly seen in Figures 15c and 15d) for creating a secondary seal to reduce open headspace in the valve. Umbrella flap 1594 also serves to keep liquid away from air inlet 1593. Base 1591 may be either screwed onto the bottle for ease of assembly/cleaning, or spin welded to reduce complexity. Base 1591 further comprises diaphragm 1595 and apertures 1596 disposed adjacent the periphery of diaphragm 1595 and formed within base 1591. Base cover 1592 includes a gripping member to assist in screwing base cover 1592 into base 1591. The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1595 lifting off air inlet 1593 when suction is applied to the feeding bottle. Air may then flow into the bottle through air inlet 1593, pushing open umbrella flap 1594, and subsequently passing through apertures 1596.

In Figures 16a and 16b, the valve comprises base 1610 and twin shot valve insert 1620. Valve insert 1620 is pressed into base 1610 which is then screwed onto bottle 1630. Valve insert 1620 can be removed with finger and thumb. Unlike the valve of Figures 13a and 13b, the valve is a closed system in which the liquid is kept away from the valve by flap 1680 that runs around valve insert 1620. Flap 1680 therefore serves to keep the liquid out of the cavity 1640 in base 1610. An inner seal allows diaphragm 1650 to operate with lower forces. The valve assembly uses a similar diaphragm frame to Figures 14a, 14b, 15a and 15b, engaging with a push ring on base 1610 to control the tension in the central portion of the diaphragm during screwing of base 1610 onto bottle 1630.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with the central portion of diaphragm 1650 lifting off the fluid inlet 1660 (e.g. the central spigot) when suction is applied to bottle 1630. Air may then flow into bottle 1630 through fluid inlet 1670 and flap 1680.

Figures 16c – 16g illustrate a variant of the embodiment of Figures 16a and 16b. Figure 16c shows a closed system with a twin shot insert 1690 shown in more detail in Figure 16f. On the underside of inner component 1690 is a barrier seal 1691 arranged to sealingly engage base 1692 (seen more clearly in Figures 16c and 16d). Insert 1690 comprises a diaphragm 1693, with apertures 1694 disposed adjacent the periphery of diaphragm 1693 and formed within insert 1690. Air inlet 1695 is seen in the underside of base 1692. Insert 1690 is large enough to seal the opening in the base of the feeding bottle.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1693 lifting off air inlet 1695 when suction is applied to the feeding bottle. Air may then flow into the bottle through air inlet 1695, pushing open barrier seal 1691, and subsequently passing through apertures 1694.

Figures 17a and 17b illustrate a further alternative embodiment of the air valve assembly in which a larger silicone diaphragm 1710 is used to keep the liquid out of the valve area and to provide a bottle/base seal. Central diaphragm 1710 works in the same way as the cartridge-type systems described above in relation to Figures 13a-16b, but the larger size of diaphragm 1710 makes it easier to open under suction. To maintain its shape, central diaphragm 1710 is circled by a thicker section 1720 of silicone or other similar material. Beyond this are a series of

apertures 1730 that allow air into bottle 1740 from the lower chamber whilst sealing against base 1750 to keep the liquid away from the valve. To assemble bottle 1740, silicone diaphragm 1710 is pressed into base 1750 which is then screwed onto bottle 1740 sealing against the silicone, holding it in place.

The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1710 lifting off first fluid inlet 1780 (the central spigot) when suction is applied to bottle 1740. Air may then flow into bottle 1740 through second fluid inlet 1790 and apertures 1730.

Figures 17c and 17d illustrate a variant of the embodiment of Figures 16c – 16g. Like features are therefore referenced using like reference numbers. The operation of the valve is similar to that described above in connection with valve assemblies 10, 100 and 200, with diaphragm 1793 lifting off air inlet 1795 when suction is applied to the feeding bottle. Air may then flow into the bottle through air inlet 1795 and subsequently apertures 1796.

Further examples of valve assemblies in accordance with the present invention are shown in Figures 18a-21b.

Figures 18a and 18b show a two-part valve 1800 using convoluted paths 1810 and 1820 to control the air intake and fluid flow. Rigid retaining plate 1830 pushes the elastomer mouthpiece 1840 through the top of the lid 1860 so they can be clamped together when the bottle is shut. Flap valves (such as flap valve 1850) in the elastomer act against retaining plate 1830, and open (as shown in Figure 18b) when negative pressure is applied, allowing fluid around convoluted path 1810. Air returns along convoluted path 1820. The multiple U-bends of convoluted paths 1810 and 1820 prevent fluid from easily leaking out of mouthpiece 1840.

Figures 19a and 19b show a two-part valve 1900 using a flexible elastomer tube 1920 and a bi-injected retaining tube 1910. In its natural state (Figure 19a), inner tube 1920 blocks the apertures 1930 in retaining tube 1910. When negative pressure is applied to mouthpiece 1940 (Figure 19b), inner tube 1920 deforms, allowing fluid to pass through apertures 1930 and 1950. Retaining tube 1910 may also be attached to and integral with the air-intake valve 1960.

Figures 19c and 19d show a modified embodiment of valve 1900. Like features are identified using like reference numbers. In particular the valve now includes a bump or other protuberance 1970 to better seal against the hole 1950 in the flexible valve.

Figures 20a and 20b show a single-part valve 2000 whereby the valving operation is moved into a removable mouthpiece 2010. Mouthpiece 2010 is securely held in place in the cap 2020 but can be removed for cleaning. When the valve is open (as in Figure 20b), fluid flows out of mouthpiece 2010 through an integral slit valve 2030 and air returns via an integral flap-style valve 2040 formed by mouthpiece 2010.

Figures 21a and 21b show a single-part valve 2100 that uses a rigid ring 2110 which folds and clips into a retaining plate 2120 around the mouthpiece 2130. A thin-walled elastomer 2150 forms the valve allowing fluid to flow to mouthpiece 2130 when negative pressure is applied (Figure 21b). Instead of the elastomer 2150 shown in Figures 21a and 21b, collapsible bellows could be used instead. An easy-grip handle 2140 is formed on the bottom of retaining plate 2120 to assist removal. More details of rigid ring 2110 and retaining plate 2120 are shown in Figures 21c-21e, showing how ring 2110 fits into retaining plate 2120.

Whilst the invention has been described in connection with preferred embodiments, it is to be understood that the invention is not limited to these embodiments, and that alterations, modifications, and variations of these embodiments may be carried out by the skilled person without departing from the scope of the invention.

CLAIMS

1. A valve assembly for a drinking cup, comprising:
 - a liquid inlet;
 - a liquid outlet;
 - a blocking member;
 - a flexible member arranged to seal against the blocking member; and
 - a conduit extending from the liquid inlet to the liquid outlet, wherein the conduit comprises at least one bend and is arranged such that fluid may flow from the liquid inlet, past the bend and through the liquid outlet to at least indirectly impinge the flexible member.
2. The valve assembly of claim 1, wherein the blocking member comprises a valve seat having the liquid outlet formed therein, and wherein the flexible member comprises a flexible valve face arranged to seal against the liquid outlet so as to prevent fluid flow therethrough.
3. The valve assembly of claim 1 or 2, wherein the bend is a right-angle bend.
4. The valve assembly of any of claims 1-3, wherein the valve assembly is arranged to couple to a lid of a drinking cup with the liquid inlet located within the drinking cup when the drinking cup is joined to the lid, such that when suction is applied to a drinking hole of the drinking cup the flexible member is caused to lift off the blocking member.
5. The valve assembly of any of claims 1-4, wherein the conduit comprises a first section and a second section, the first section extending from the liquid inlet to the bend, and the second section extending from the bend to the liquid outlet.
6. The valve assembly of claim 5, wherein the first and second sections are substantially linear.

7. The valve assembly of claim 5 or 6, wherein the first section is longer than the second section.
8. The valve assembly of any of claims 5-7, wherein the first section is approximately 13mm long, and wherein the second section is approximately 5mm long.
9. The valve assembly of any of claims 5-8, wherein a cross-section of the first section has a smaller surface area than a corresponding cross-section of the second section.
10. The valve assembly of claim 9, wherein the cross-sectional area of the first section is approximately 8mm^2 , and wherein the cross-sectional area of the second section is approximately 12.5mm^2 .
11. A valve assembly for a drinking vessel, comprising:
 - a first valve portion having a fluid outlet formed therein; and
 - a second valve portion comprising a flexible diaphragm having a blocking portion movable from a closed sealing position to an open position, the second valve portion holding the flexible diaphragm relative to the first valve portion such that in the closed sealing position the blocking portion seals the fluid outlet so as to prevent fluid flow therethrough, wherein the second valve portion further comprises one or more apertures formed therein and spaced from the blocking portion such that a fluid flow path is formed from the fluid outlet to at least one of the apertures when the blocking portion is moved from the closed sealing position to the open position.
12. The valve assembly of claim 11, wherein the drinking vessel is a drinking cup or a bottle.
13. The valve assembly of claim 11 or 12, wherein the one or more apertures are formed in the flexible diaphragm.

14. The valve assembly of claim 11 or 12, wherein the second valve portion further comprises a frame coupled to the flexible diaphragm, and wherein the one or more apertures are formed in the frame.
15. The valve assembly of any of claims 11-14, wherein a perimeter of the flexible diaphragm is held in place relative to the first valve portion by the frame.
16. The valve assembly of any of claims 11-15, wherein the valve assembly is arranged such that, when in the closed sealing position, the flexible diaphragm is sealingly tensioned over the fluid outlet.
17. The valve assembly of any of claims 11-16, wherein the blocking portion comprises a central portion of the flexible diaphragm.
18. The valve assembly of any of claims 11-17, wherein a peripheral portion of the flexible diaphragm is fixed to the second valve portion, the peripheral portion being spaced from the blocking portion.
19. The valve assembly of any of claims 11-18, wherein a periphery of the flexible diaphragm is fixed to the second valve portion.
20. The valve assembly of any of claims 11-19, wherein the blocking portion is impermeable to the passage of liquid.
21. The valve assembly of any of claims 18-20, wherein the peripheral portion is spaced from the fluid outlet.
22. The valve assembly of any of claims 11-21, wherein the fluid outlet is a first fluid outlet, and wherein the valve assembly further comprises a second fluid outlet.
23. The valve assembly of claim 22, wherein the valve assembly is arranged to couple to a lid of a drinking vessel with the second fluid outlet located within the drinking cup when the drinking cup is joined to the lid, such that when suction is

applied to a drinking hole of the drinking cup the flexible diaphragm is caused to lift off the first fluid outlet, thereby allowing fluid in the vessel to flow from the first fluid outlet to the second fluid outlet .

24. The valve assembly of claim 23, wherein the flexible diaphragm is arranged to lift off the first fluid outlet in a substantially similar direction to a direction of fluid flow through the first fluid outlet .

25. The valve assembly of any of claims 11-24, wherein the valve assembly is arranged to be integrated in a base of a drinking vessel for venting air into the drinking vessel.

26. The valve assembly of any of claims 11-25, wherein the one or more apertures are located substantially along a periphery of the flexible diaphragm.

27. The valve assembly of any of claims 11-26, wherein at least a portion of the second valve portion adjacent the flexible diaphragm comprises a crenelated perimeter.

28. The valve assembly of any of claims 11-27, wherein the second valve portion is formed of a slightly compressible silicone material.

29. The valve assembly of any of claims 11-28, wherein the valve assembly is arranged to couple to a drinking spout of a drinking vessel, and wherein the flexible diaphragm is arranged relative to the drinking spout such that when moving from the closed sealing position to the open position the blocking portion is arranged to move in a direction substantially non-parallel to a direction of fluid flow through the drinking spout.

30. The valve assembly of any of claims 11-29, wherein the fluid outlet comprises a bowed portion arranged to cause a corresponding bowing in the blocking portion when in the closed sealing position.

31. The valve assembly of any of claims 11-30, further comprising an air inlet and a further flexible diaphragm arranged to seal off the air inlet.

32. The valve assembly of claim 31 when dependent on claim 23, wherein the valve assembly is further arranged such that when suction is applied to the drinking hole the further flexible diaphragm is caused to lift off the air inlet, thereby allowing air to flow into the drinking vessel.

33. A drinking vessel comprising a valve assembly, the valve assembly comprising:

a first valve portion having a fluid outlet formed therein; and

a second valve portion comprising a flexible diaphragm having a blocking portion movable from a closed sealing position to an open position, the second valve portion holding the flexible diaphragm relative to the first valve portion such that in the closed sealing position the blocking portion seals the fluid outlet so as to prevent fluid flow therethrough, wherein the second valve portion further comprises one or more apertures formed therein and spaced from the blocking portion such that a fluid flow path is formed from the fluid outlet to at least one of the apertures when the blocking portion is moved from the closed sealing position to the open position.

34. The drinking vessel of claim 33, wherein the drinking vessel is a drinking cup or a bottle.

35. A valve assembly for a drinking vessel, comprising:

a valve element comprising a supporting frame and a flexible diaphragm, the supporting frame dividing the flexible diaphragm into first and second diaphragm portions; and

a movable valve base having a fluid outlet formed therein, wherein the valve base is arranged relative to the valve element such that the valve base contacts the supporting frame with the second diaphragm portion sealing the liquid outlet, and such that such that a tension in the second diaphragm portion is independent of movement of the valve base.

36. The valve assembly of claims 35, wherein during movement of the valve base the tension in the second diaphragm portion remains substantially constant.
37. The valve assembly of claim 35 or 36, wherein the valve base is further arranged relative to the valve element such that a tension in the first diaphragm portion depends on movement of the valve base.
38. The valve assembly of any of claims 35-37, wherein during movement of the valve base a tension in the first diaphragm portion changes.
39. The valve assembly of any of claims 35-38, wherein the valve base is integrated into a base of a drinking vessel.
40. The valve assembly of any of claims 35-39, wherein the supporting frame comprises an annular structure.
41. A valve assembly for a drinking cup, the valve assembly comprising a first arm having a first valve portion and a second arm having a second valve portion, each valve portion having a respective aperture for fluid flow, and wherein the valve assembly is foldable from an unfolded state to a folded state such that the first arm is moveable relative to the second arm, allowing the first valve portion to be engaged with the second valve portion to form in the folded state a fluid flow path between the first and second apertures.
42. The valve assembly of claim 41, wherein the valve assembly further comprises a third arm, and wherein the valve assembly is further foldable such that the third arm is moveable relative to the first and second arms.
43. The valve assembly of claim 42, wherein the third arm comprises a locking mechanism for locking the first and second valve portions together in the folded state.

44. The valve assembly of claim 42 or 43, wherein the third arm comprises a third aperture, and wherein in the folded state the third arm engages at least one of the first and second valve portions to form a fluid flow path between the first, second and third apertures.

45. The valve assembly of any of claims 41-44, wherein in the folded state the first and second valve portions are detachably interlocked.

46. The valve assembly of any of claims 41-45, wherein in the folded state the first and second valve portions are engaged to form a demand valve.

47. The valve assembly of any of claims 41-46, wherein a length of the fluid flow path is less than a width of the valve assembly.

48. The valve assembly of any of claims 41-47, further comprising a flexible diaphragm.

49. The valve assembly of claim 48, wherein the flexible diaphragm comprises at least one aperture.

50. The valve assembly of claim 48 or 49, wherein the flexible diaphragm is coupled to one of the first and second arms such that in the folded state the flexible diaphragm acts to block the fluid flow path between the first and second apertures.

51. The valve assembly of claim 50, wherein in the folded state a blocking portion of the flexible diaphragm acts to block the fluid flow path between the first and second apertures, the blocking portion being spaced from an aperture formed within the flexible diaphragm.

52. The valve assembly of any of claims 48-51, wherein in the folded state the flexible diaphragm is sealingly coupled to at least one of the first and second valve portions.

53. The valve assembly of any of claims 41-52, wherein the first arm further comprises a third valve portion and the second arm further comprises a fourth valve portion, each of the third and fourth valve portions having a respective aperture for air flow.

54. The valve assembly of claim 53, wherein the valve assembly is foldable from an unfolded to a folded state such that the first arm is moveable relative to the second arm, allowing the third valve portion to be engaged with the fourth valve portion to thereby form in the folded state an air flow path between the third and fourth apertures.

55. The valve assembly of claim 53 or 54, further comprising a second flexible diaphragm.

56. The valve assembly of claim 55, wherein the second flexible diaphragm comprises at least one aperture.

57. The valve assembly of claim 55 or 56, wherein the second flexible diaphragm is coupled to one of the first and second arms such that in the folded state the second flexible diaphragm acts to block the air flow path between the third and fourth apertures.

58. The valve assembly of claim 57, wherein in the folded state a blocking portion of the second flexible diaphragm acts to block the air flow path between the third and fourth apertures, the blocking portion being spaced from an aperture formed within the second flexible diaphragm.

59. The valve assembly of any of claims 41-58, wherein the valve assembly further comprises a gripping member extending away from a plane of the valve assembly.

60. The valve assembly of any of claims 41-59, wherein the first arm is movable relative to the second arm through folding of the valve assembly along an axis substantially longitudinal to the first and second arms.

61. The valve assembly of any of claims 41-60, wherein the third arm is movable relative to the second arm through folding of the valve assembly along an axis substantially longitudinal to the first, second and third arms.

62. A method of manufacturing a valve assembly for a drinking cup, the method comprising:

moulding a first arm and a second arm, the first and second arms being coupled to one another, the first arm having a first valve portion and the second arm having a second valve portion, each valve portion having a respective aperture for fluid flow; and

forming a fold line in the valve assembly such that the valve assembly is foldable from an unfolded state to a folded state, and such that the first arm is moveable relative to the second arm to allow the first valve portion to be engaged with the second valve portion, thereby forming a fluid flow path between the first and second apertures.

63. The method claim 62, further comprising moulding a first flexible diaphragm such that the first flexible diaphragm is coupled to the first arm.

64. The method claim 62 or 63, further comprising moulding a second flexible diaphragm such that the second flexible diaphragm is coupled to the first or second arm.

65. The method of any of claims 62-64, wherein the valve assembly comprises polypropylene.

66. The method of any of claims 63-65, wherein the first and/or second flexible diaphragm comprises at least one of: a thermoplastic elastomer; and silicone.

67. A method of using a valve assembly as defined in any of claims 41-61, the method comprising folding the valve assembly so as to move the first arm relative to the second arm, thereby bringing the first valve portion into engagement with the second valve portion to form a fluid flow path between the first and second apertures.
68. A drinking vessel comprising the valve assembly of any of claims 1-10; 11-32; or 41-61.
69. The drinking vessel of claim 68, wherein the drinking vessel is a drinking cup or a bottle.
70. A valve assembly substantially as described hereinbefore and with reference to Figures 1-21e.
71. A method of manufacturing a valve assembly, substantially as described hereinbefore and with reference to Figures 1-21e.
72. A method of using a valve assembly, substantially as described hereinbefore and with reference to Figures 1-21e.

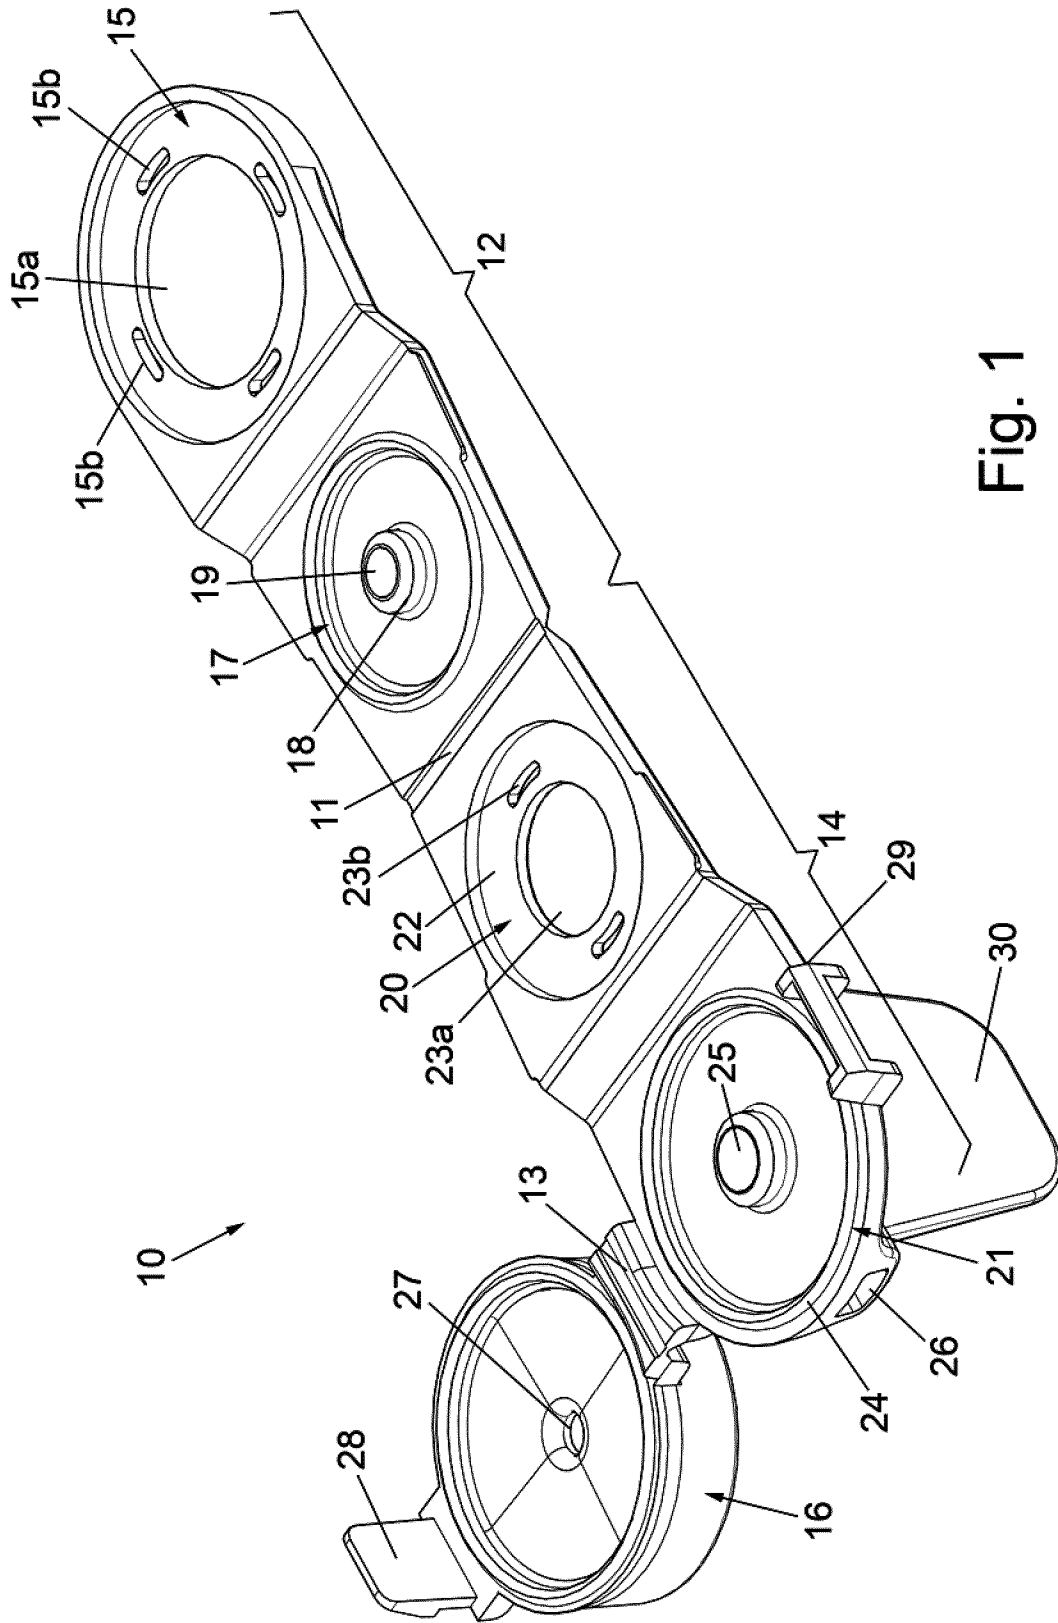


Fig. 1

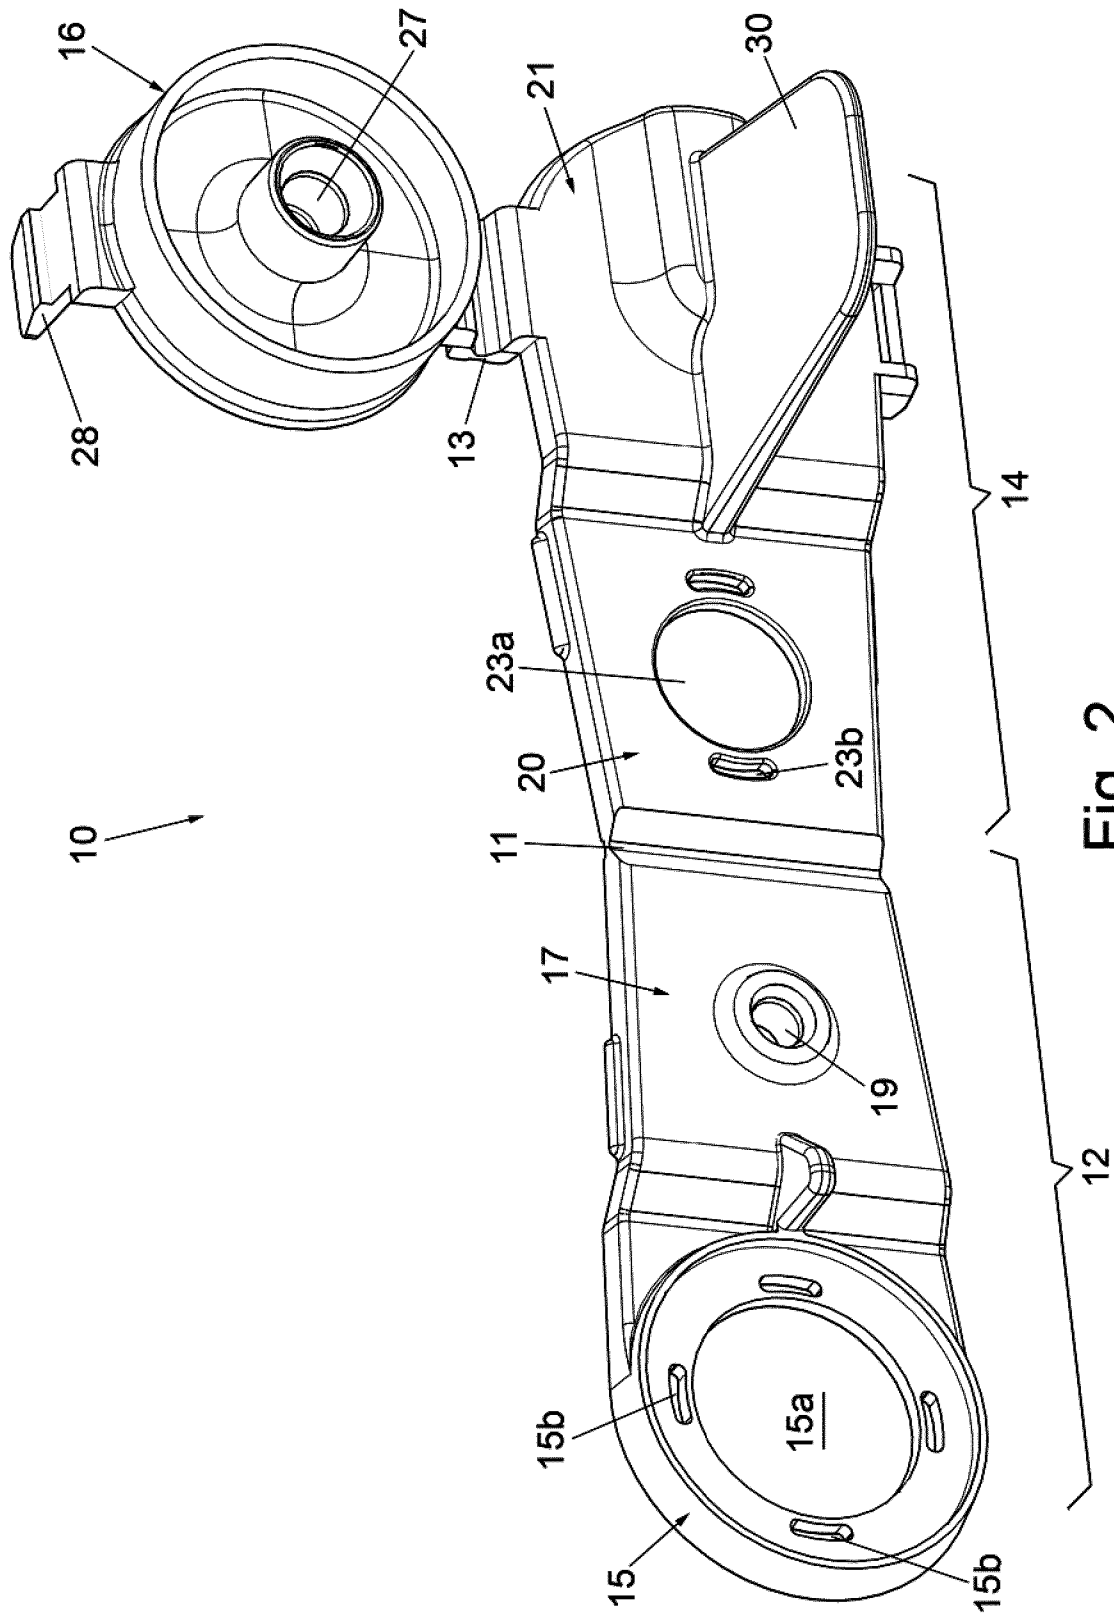


Fig. 2

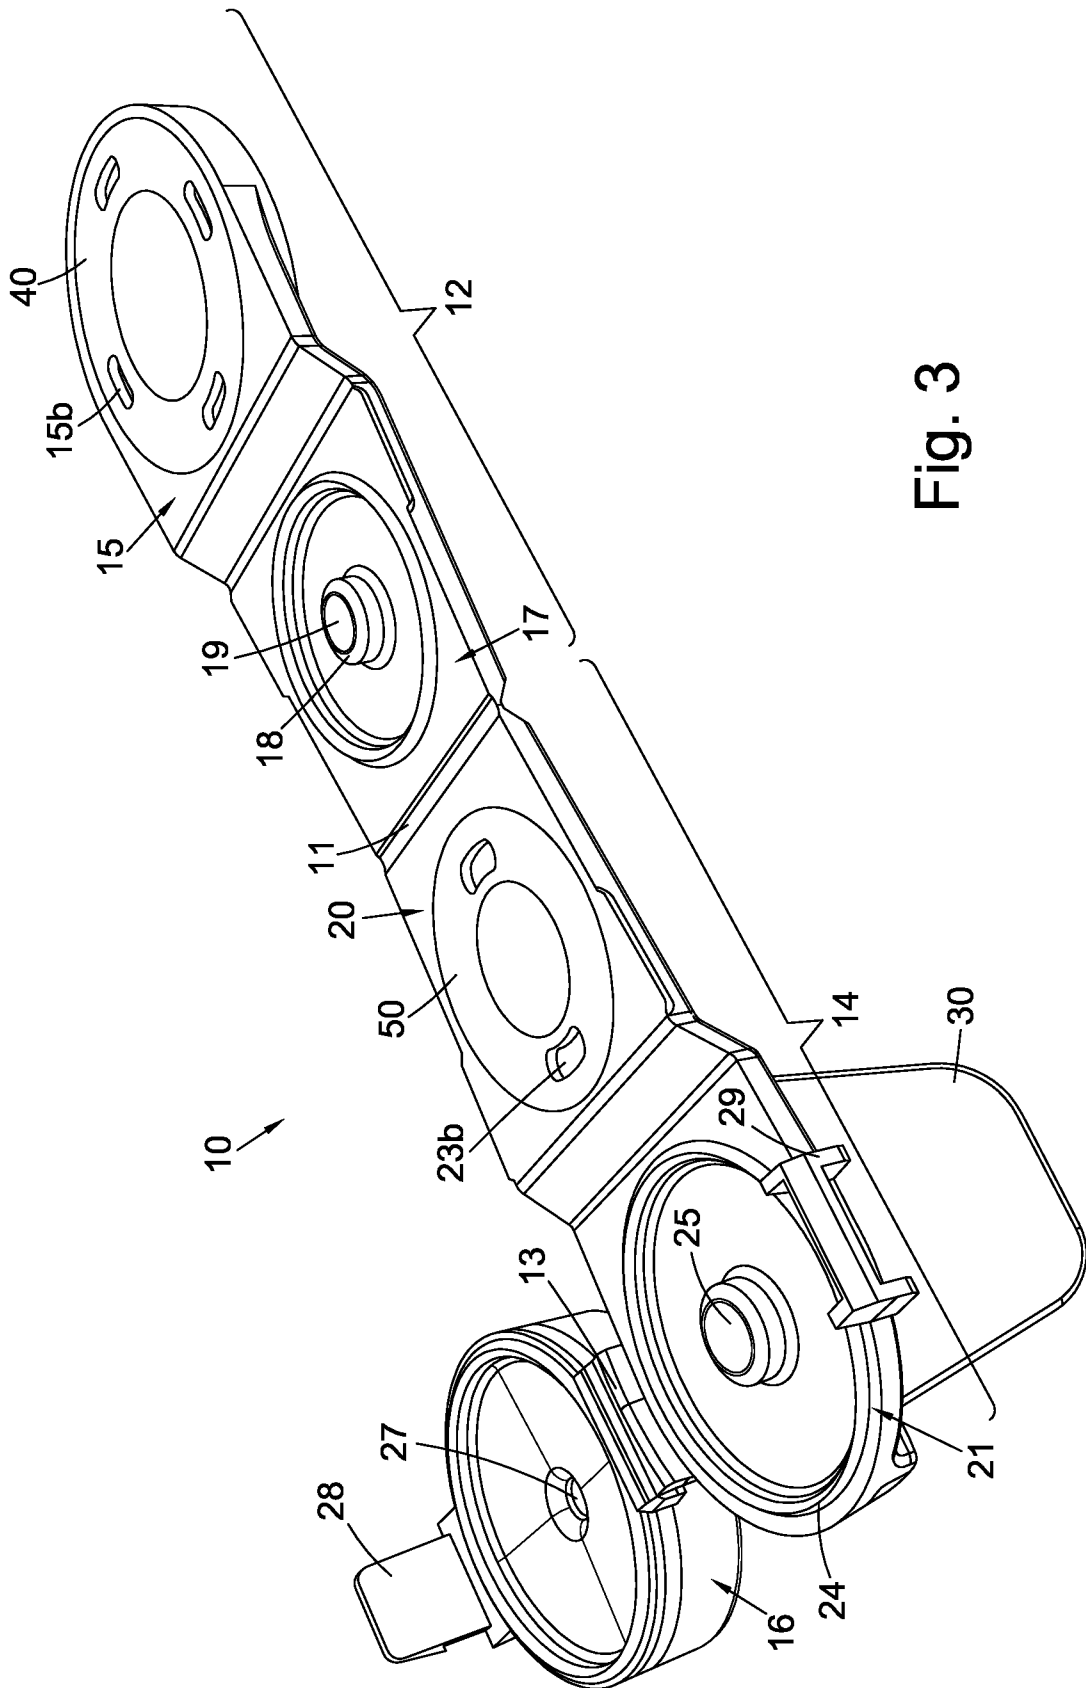


Fig. 3

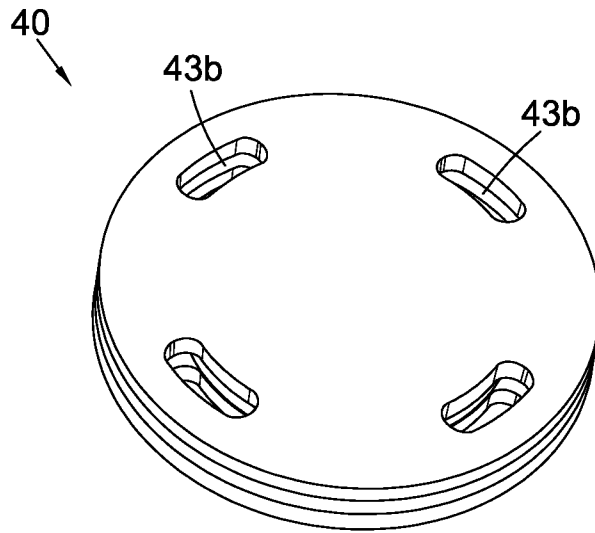


Fig. 4a

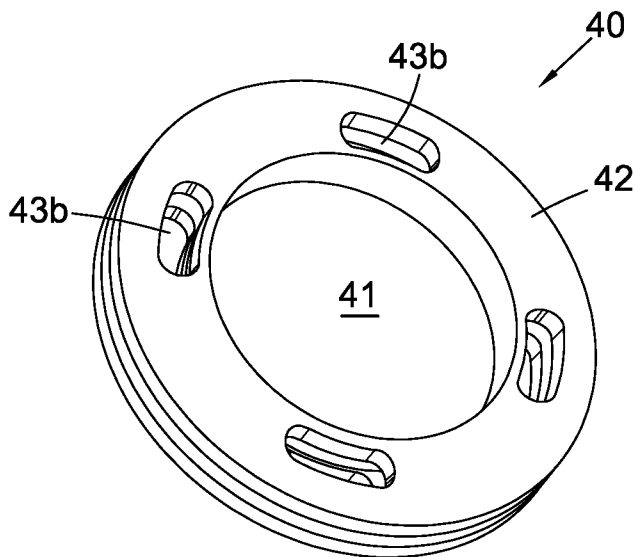


Fig. 4b

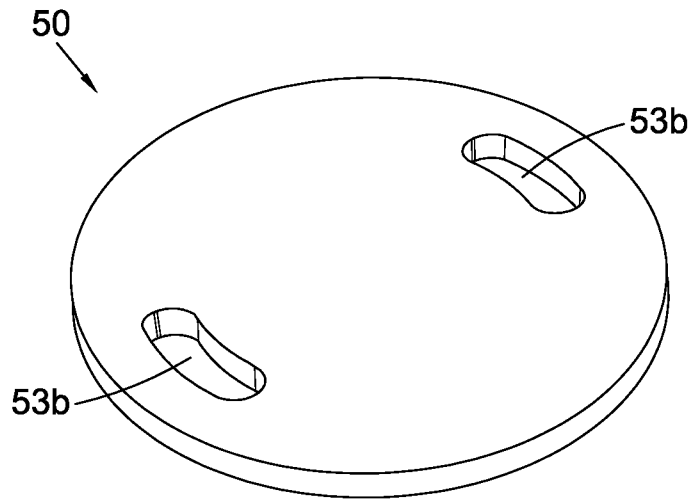


Fig. 5a

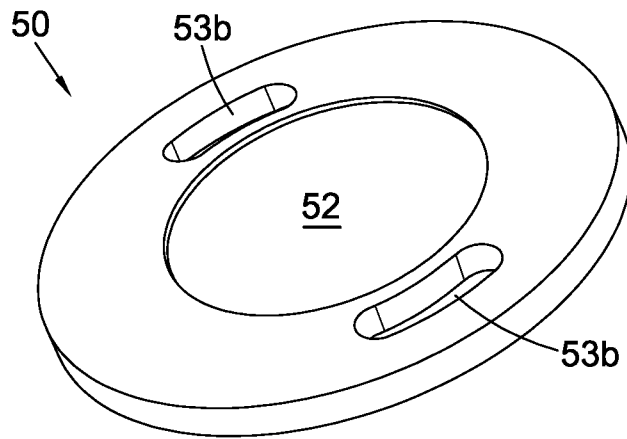


Fig. 5b

6/31

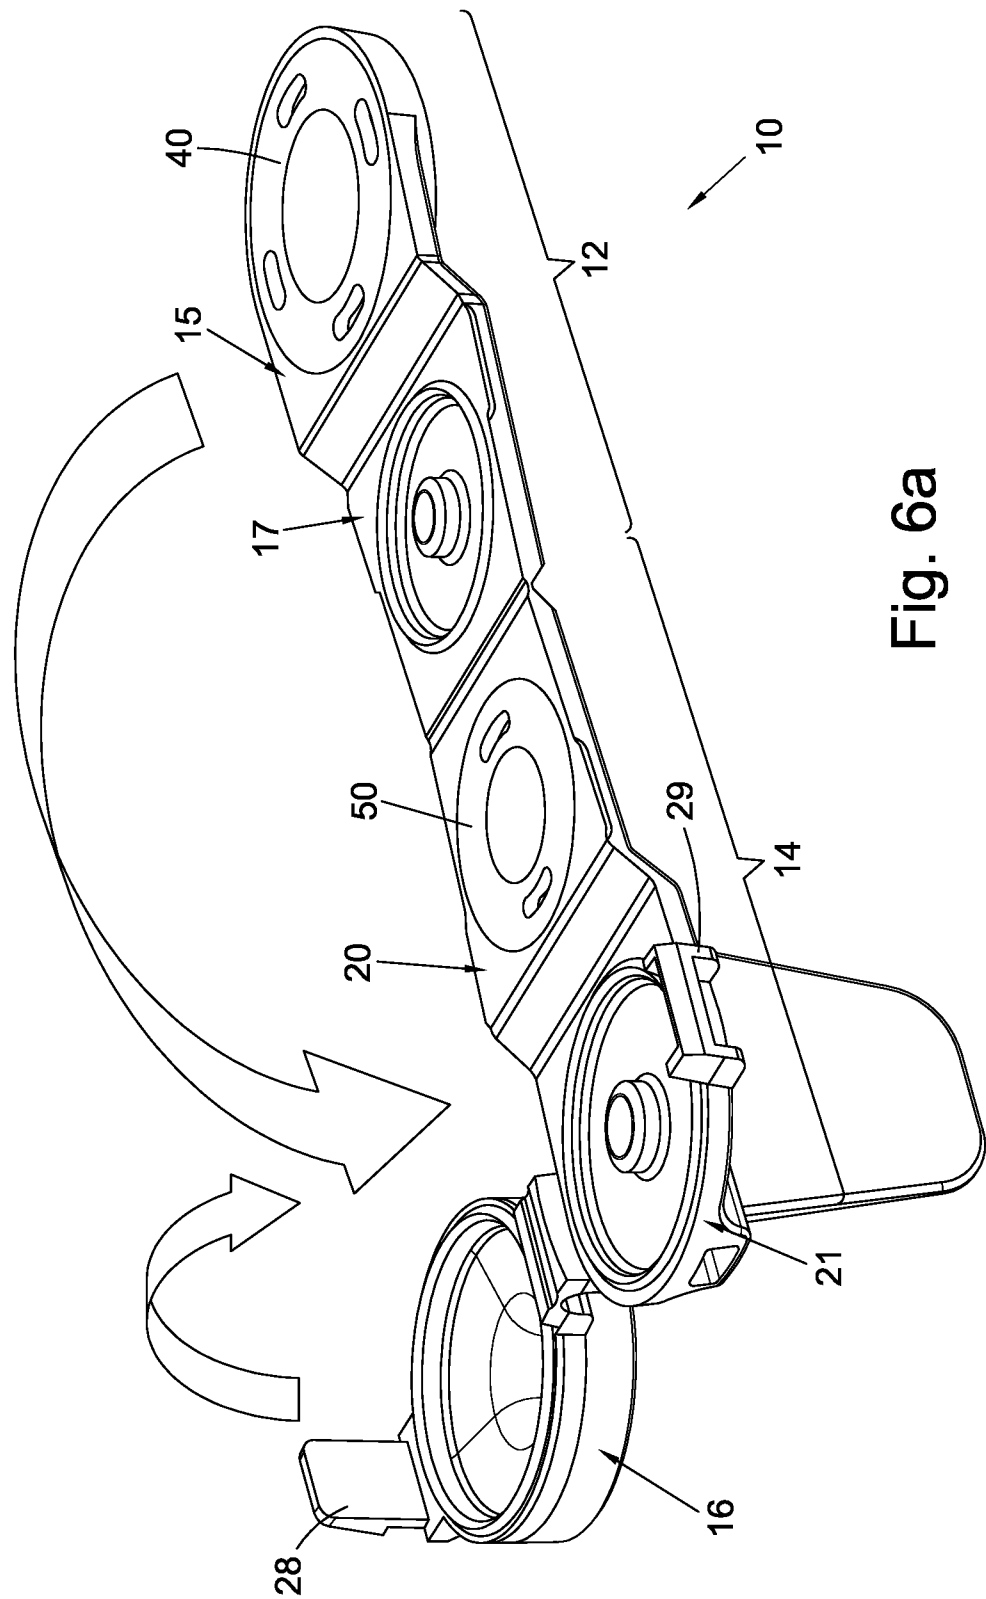


Fig. 6a

7/31

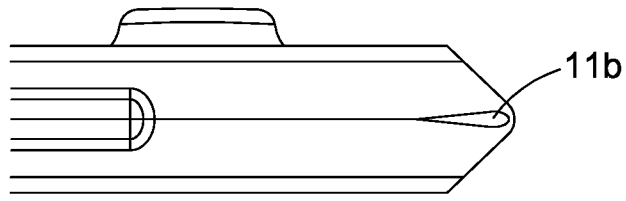


Fig. 6b

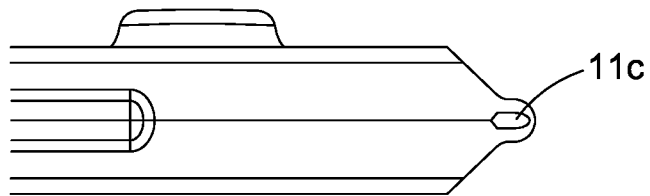


Fig. 6c

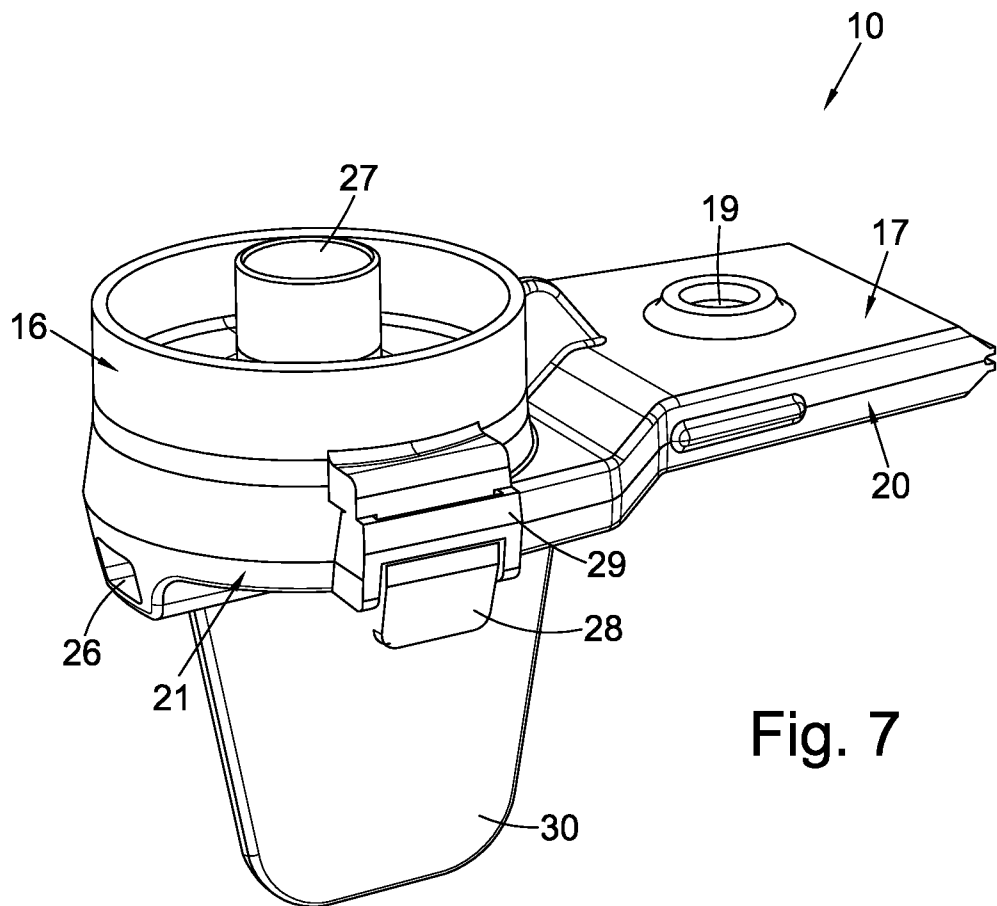


Fig. 7

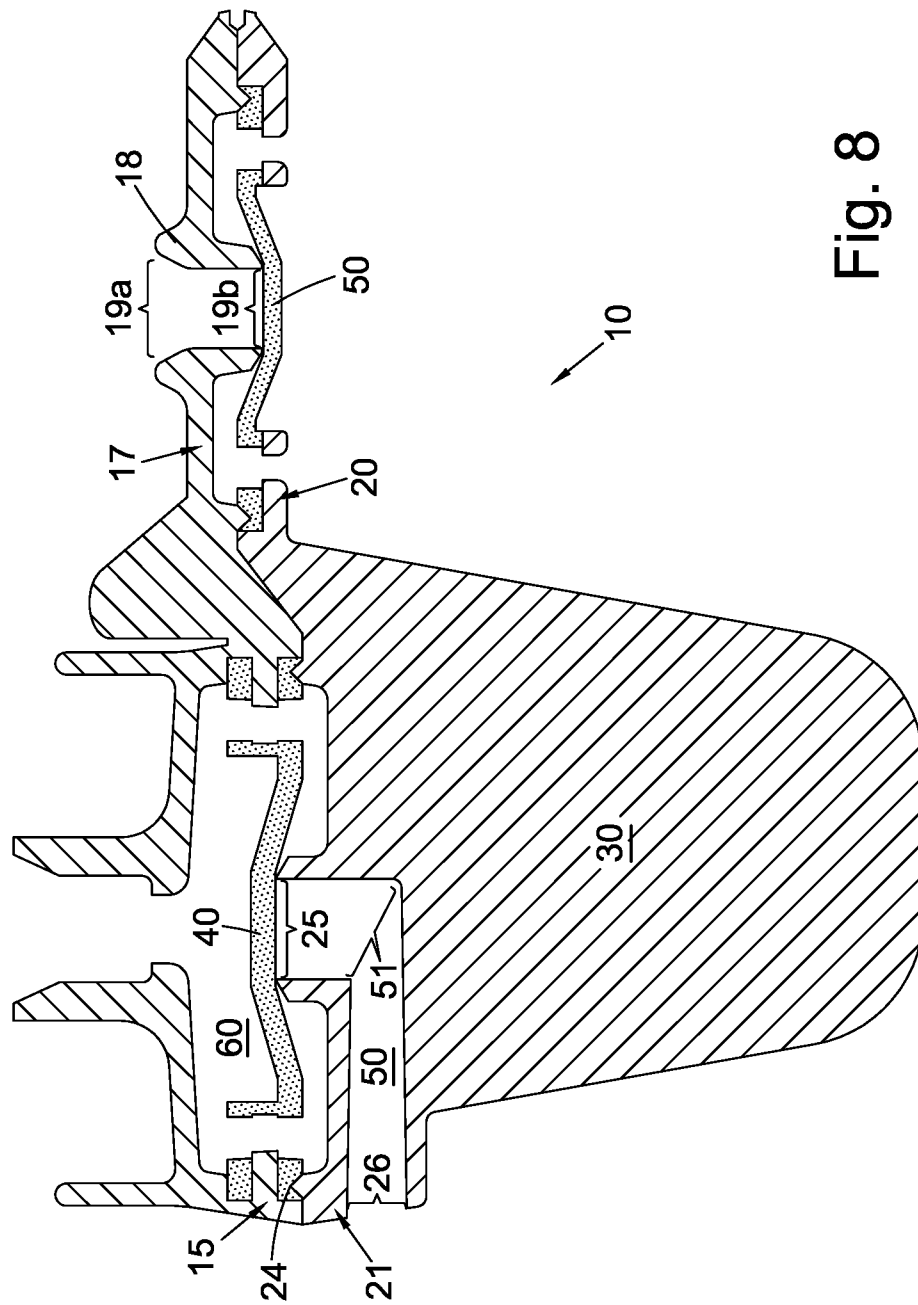


Fig. 8

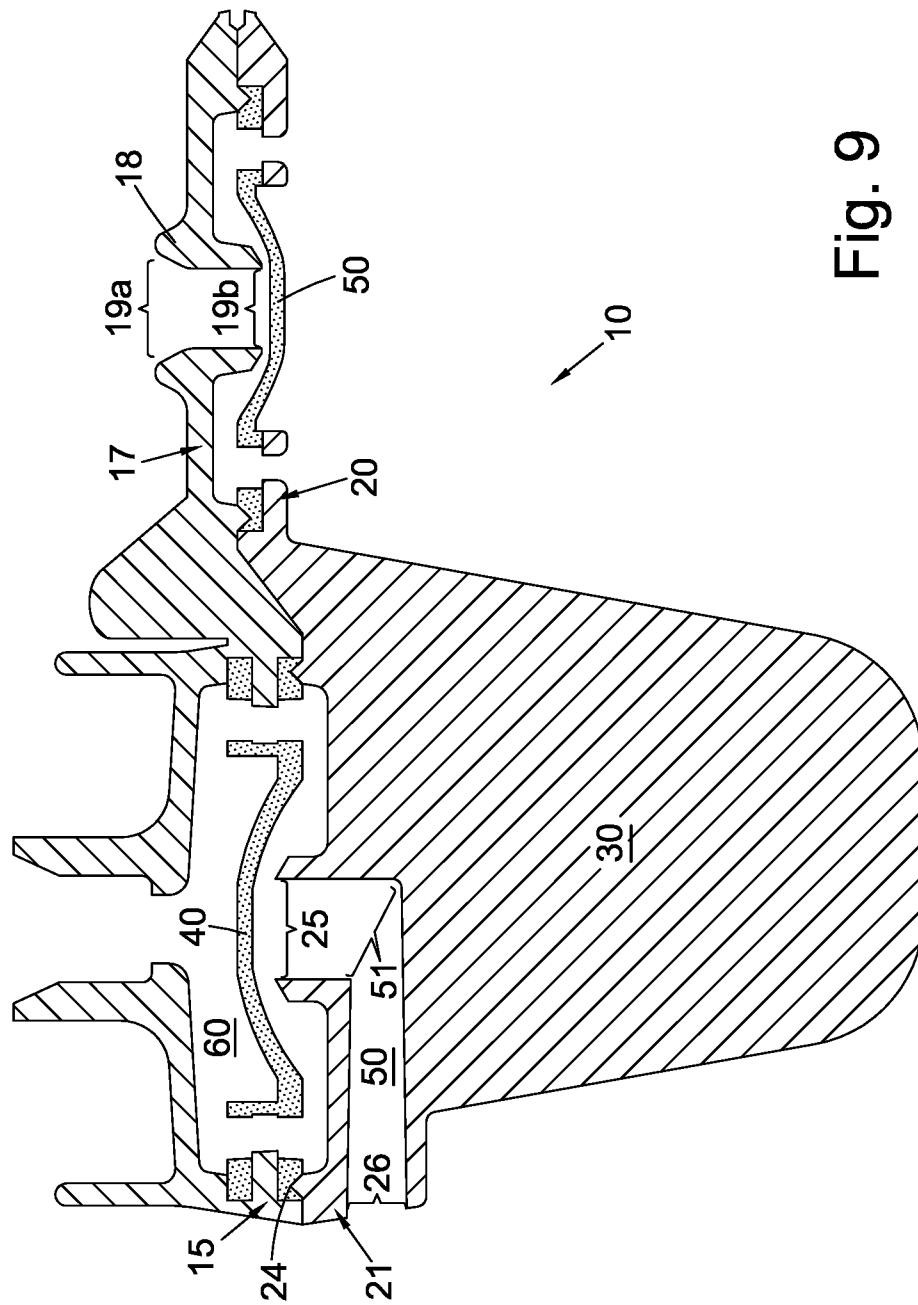


Fig. 9

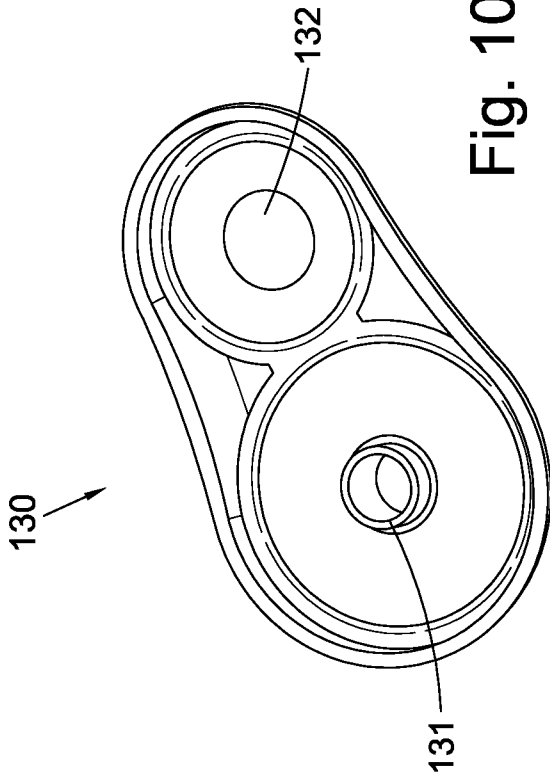


Fig. 10a

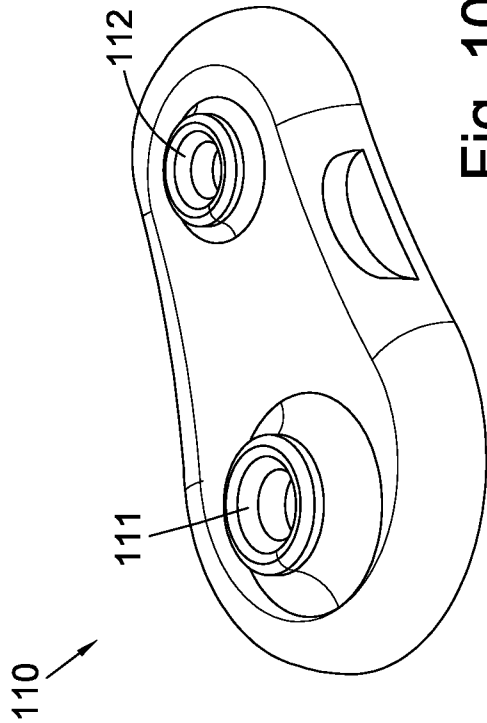


Fig. 10b

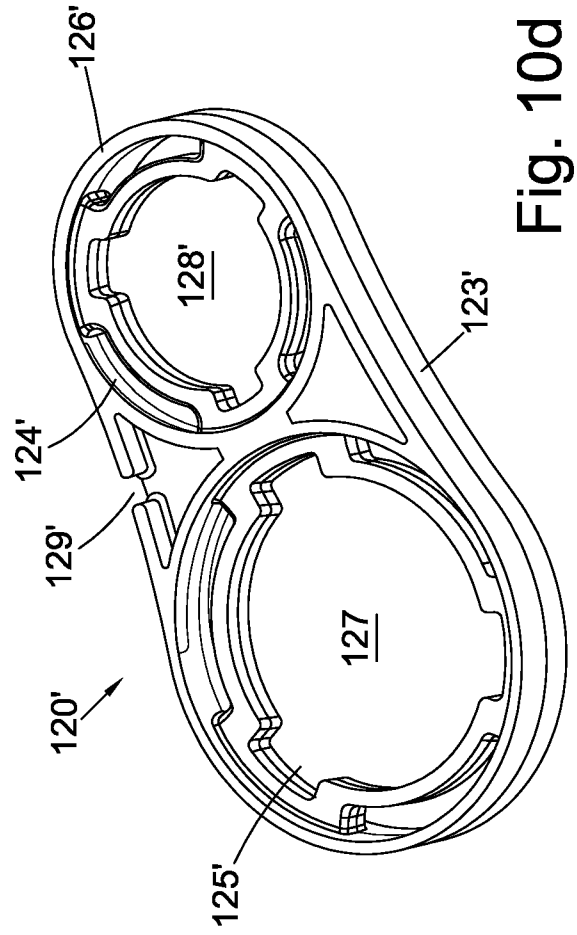


Fig. 10c

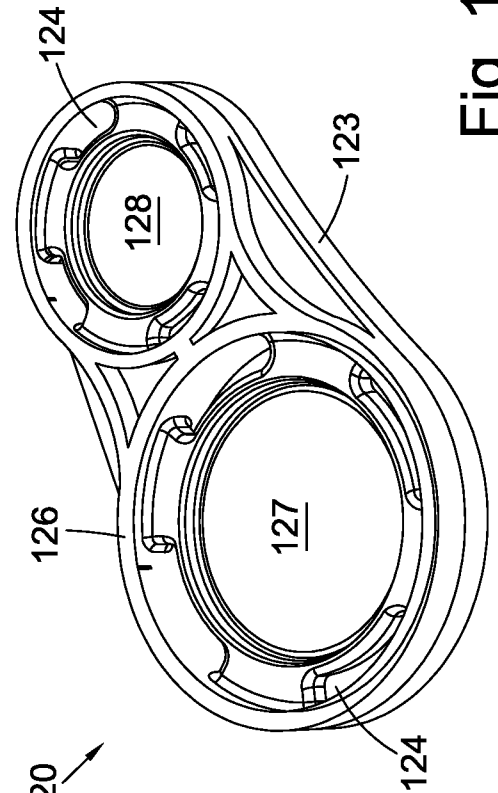


Fig. 10d

11/31

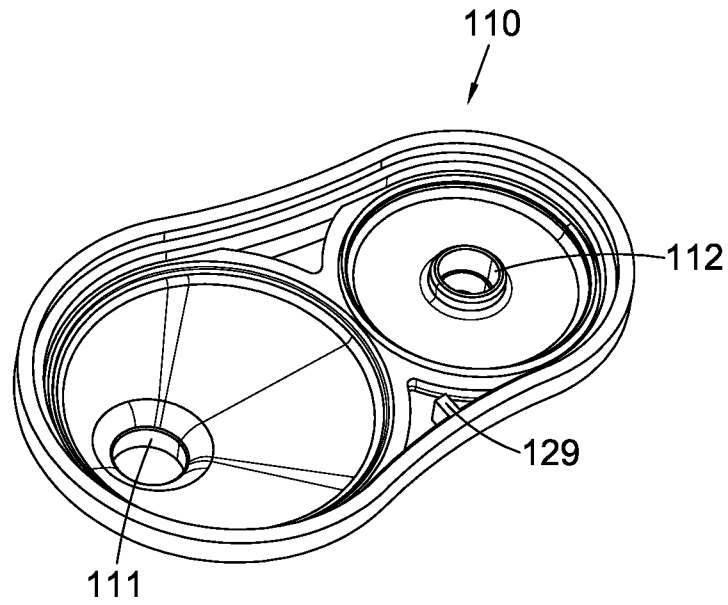


Fig. 10e

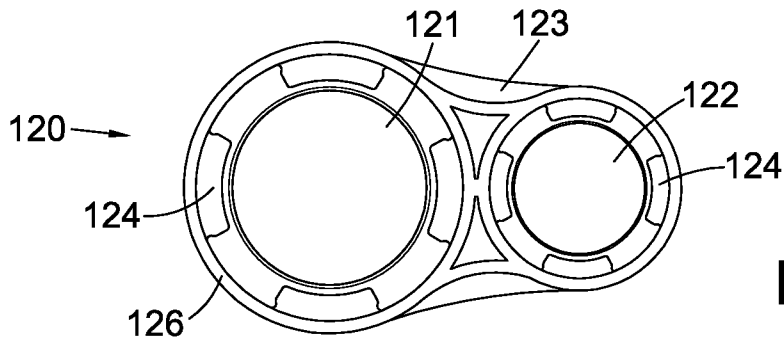


Fig. 10f

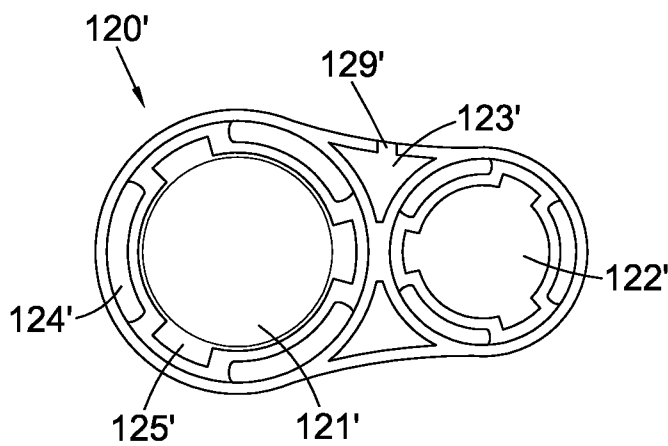


Fig. 10g

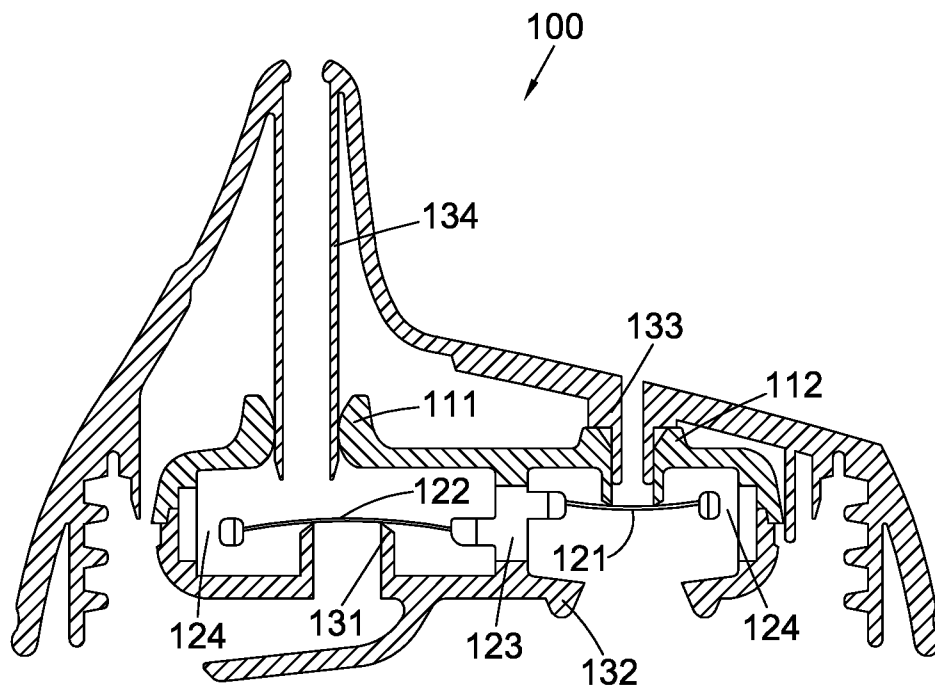


Fig. 11

13/31

Fig. 12a

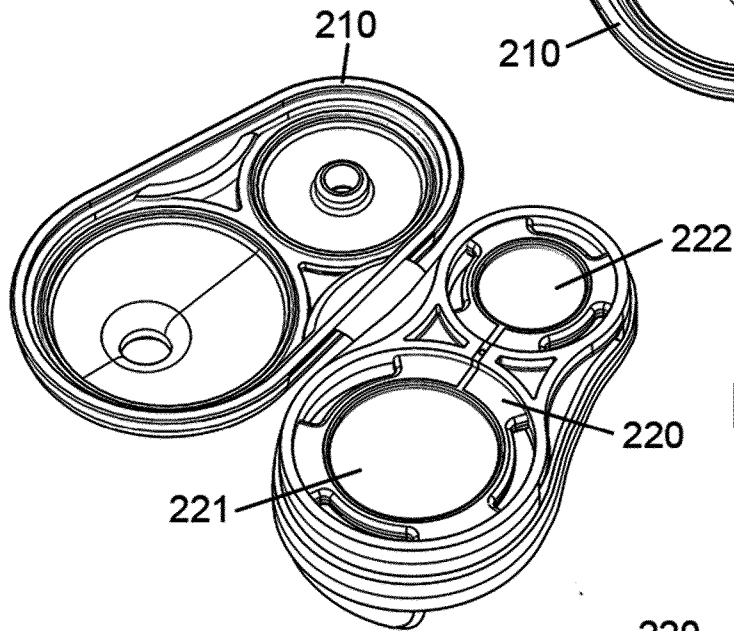
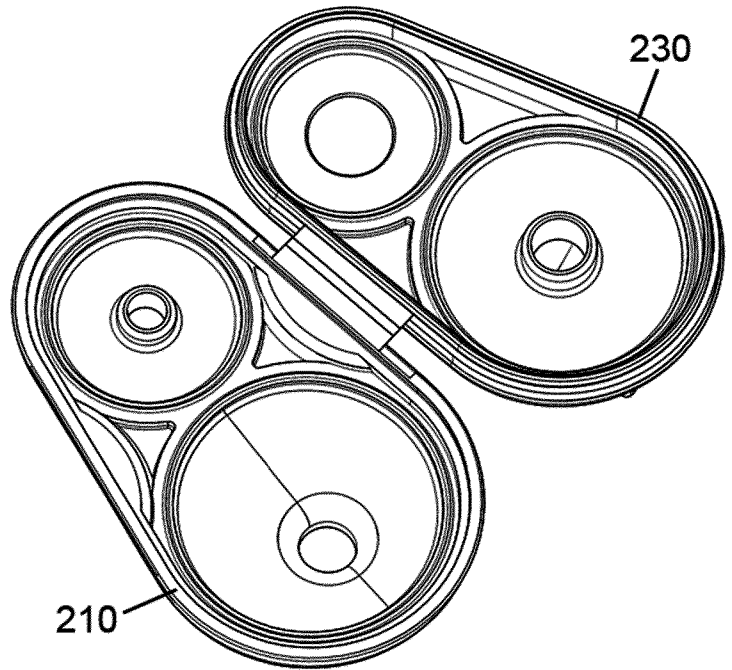


Fig. 12b

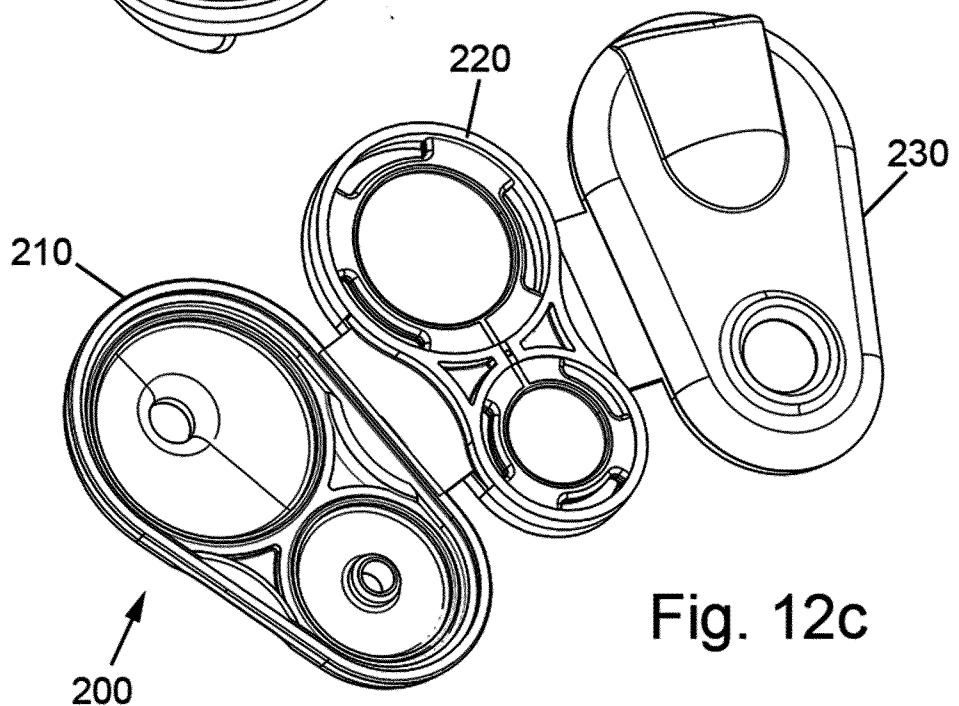


Fig. 12c

200

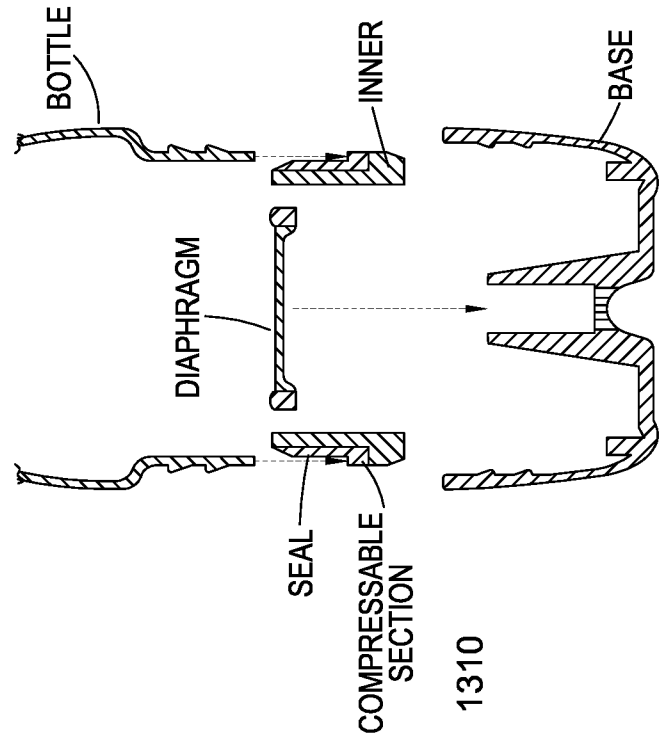


Fig. 13b

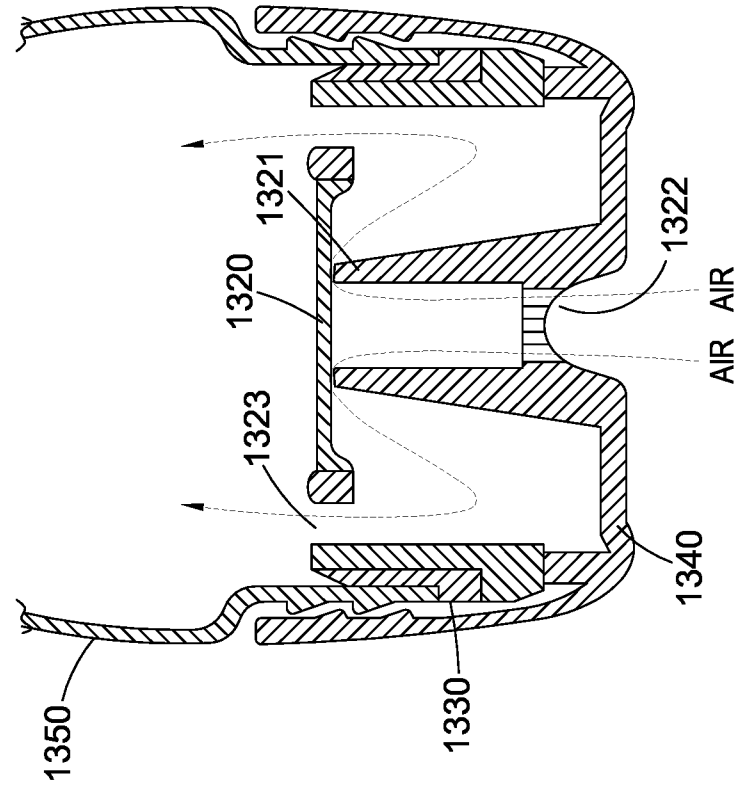


Fig. 13a

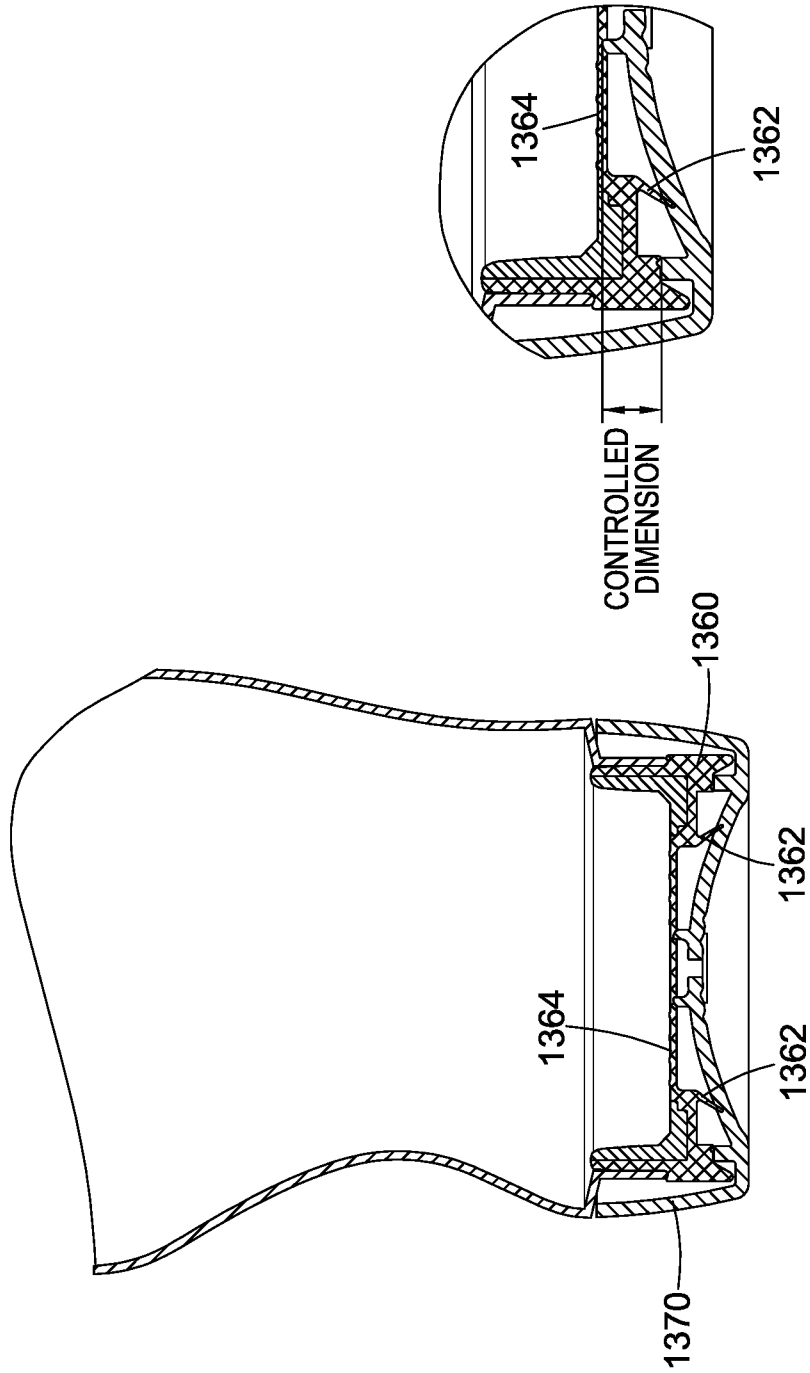


Fig. 13d

Fig. 13c

16/31

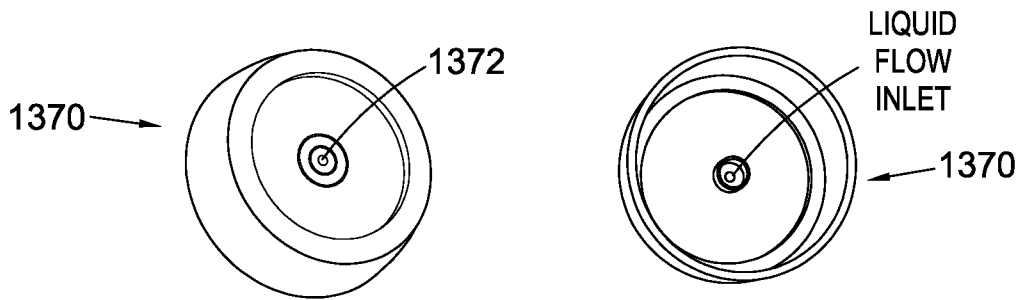


Fig. 13e

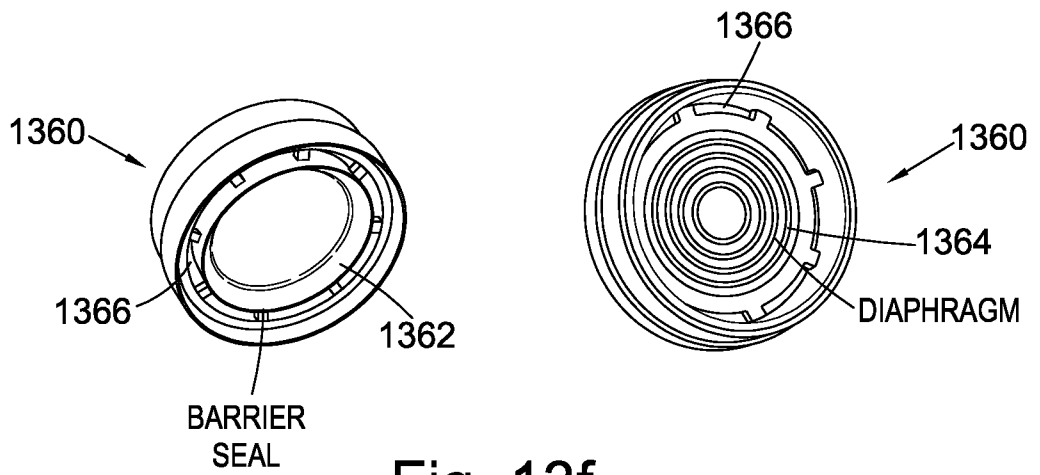


Fig. 13f

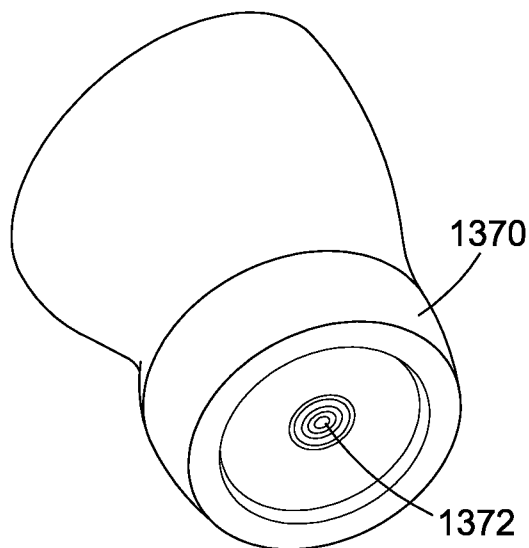


Fig. 13g

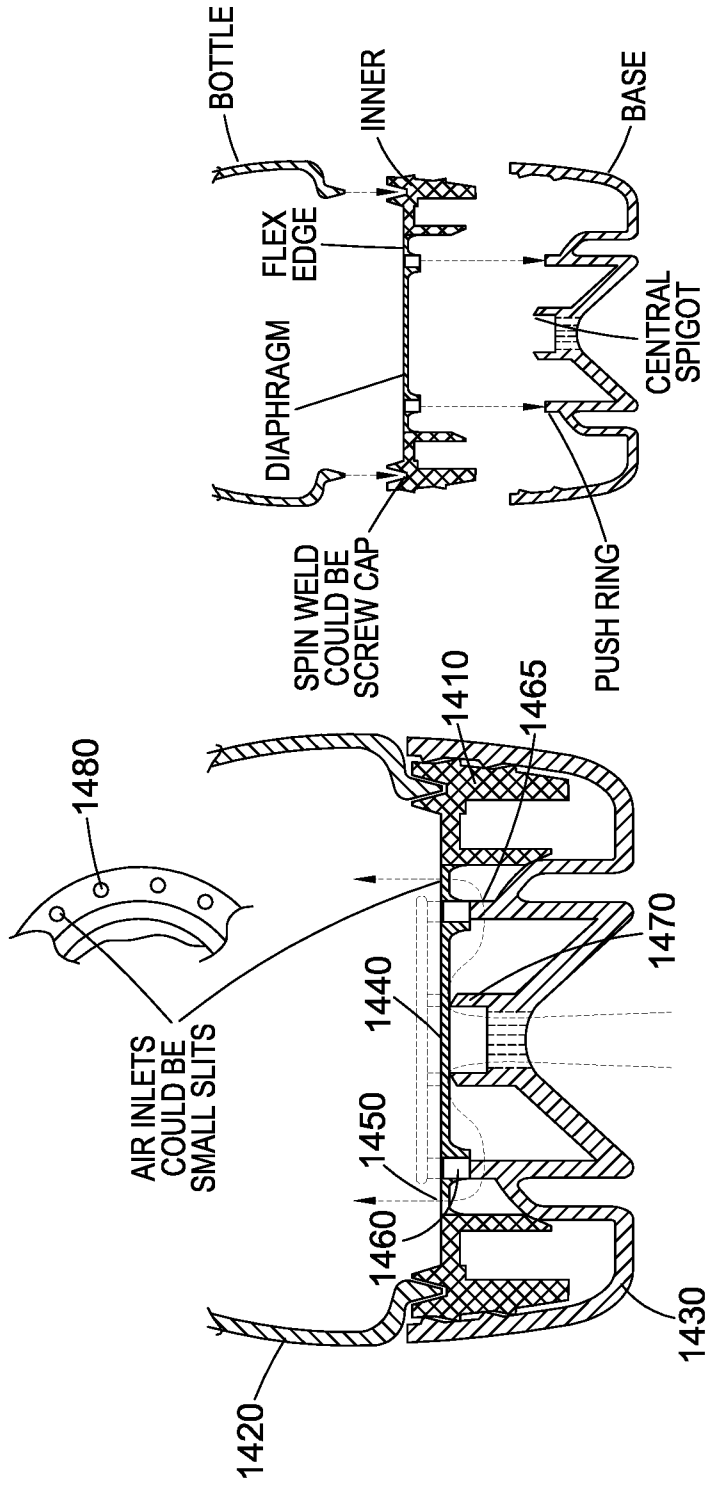


Fig. 14b

Fig. 14a

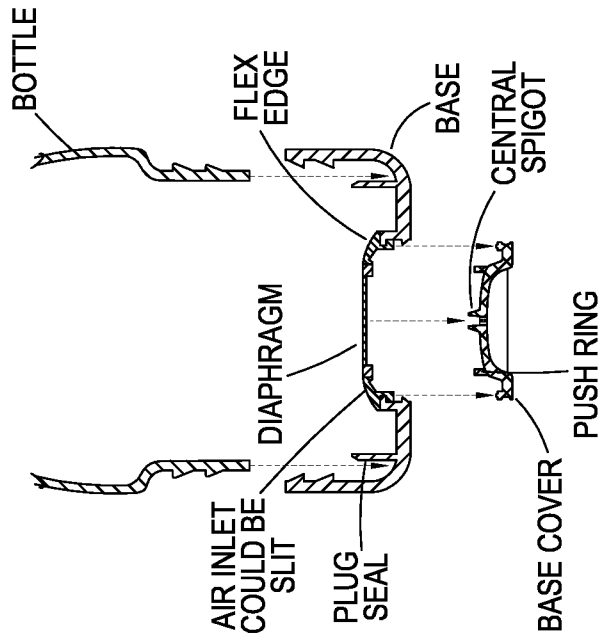


Fig. 15b

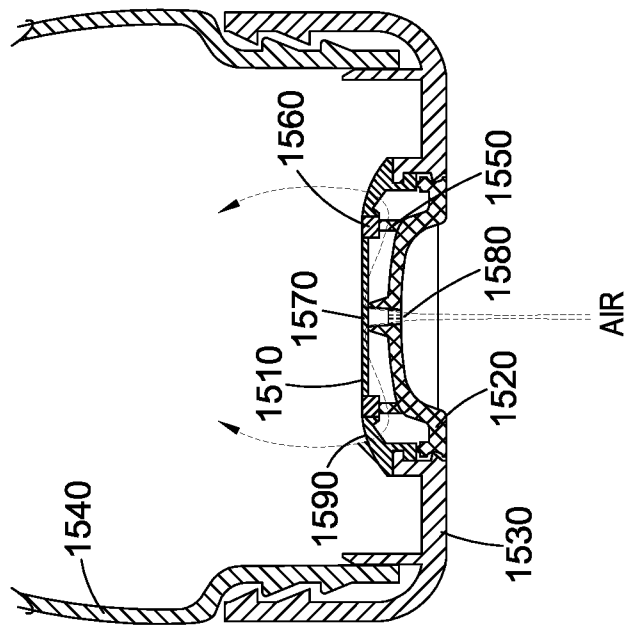


Fig. 15a

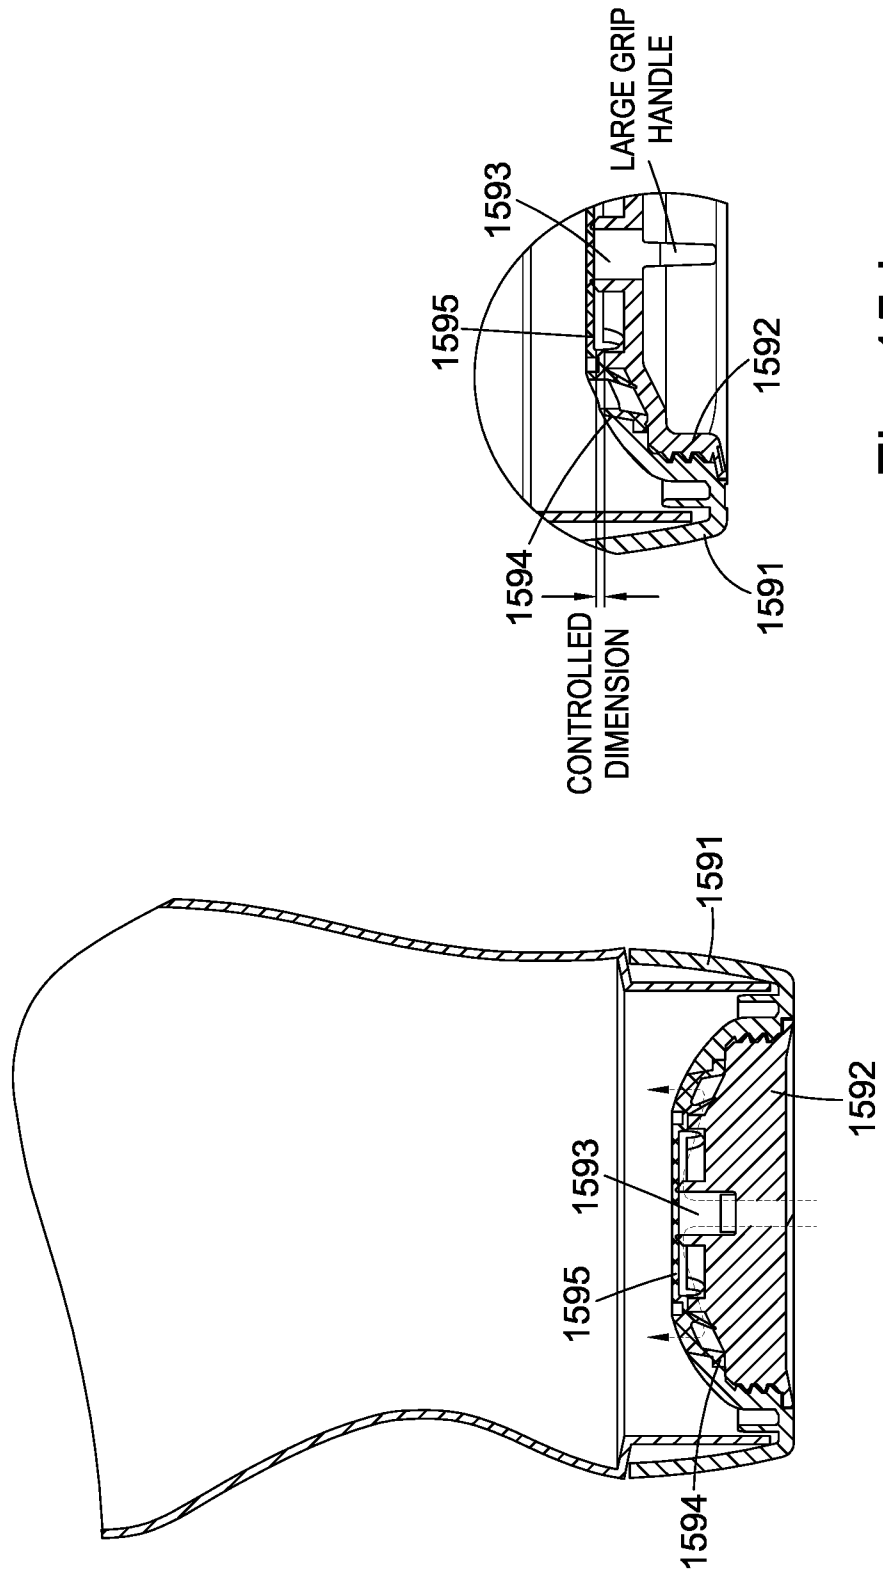


Fig. 15d

Fig. 15c

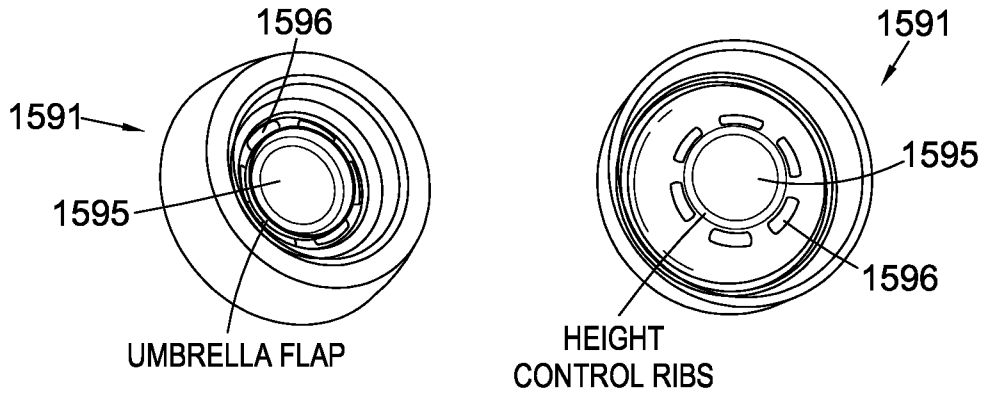


Fig. 15e

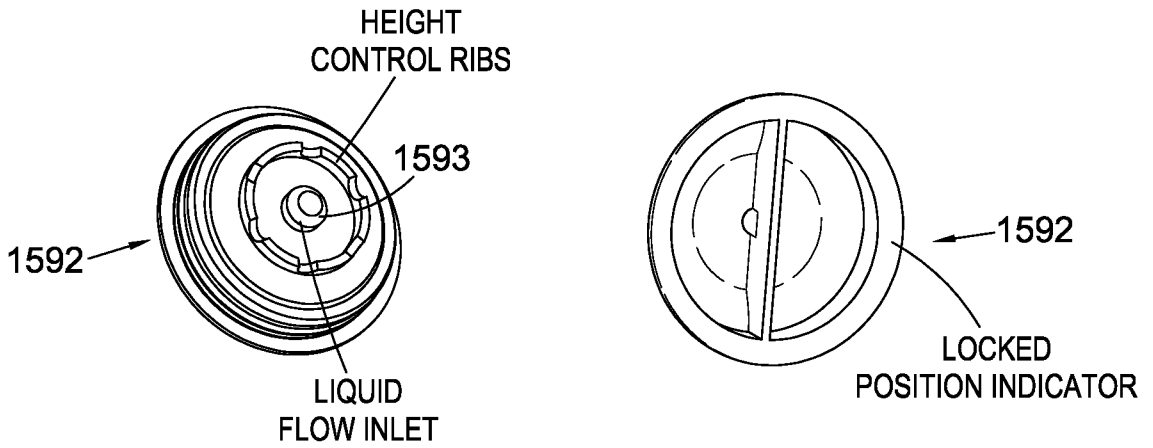


Fig. 15f

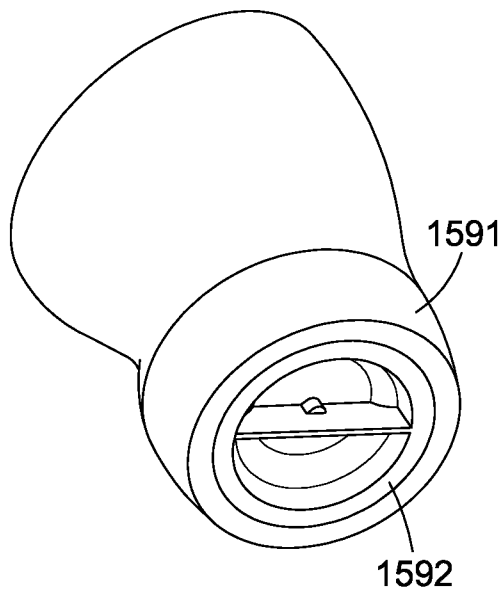


Fig. 15g

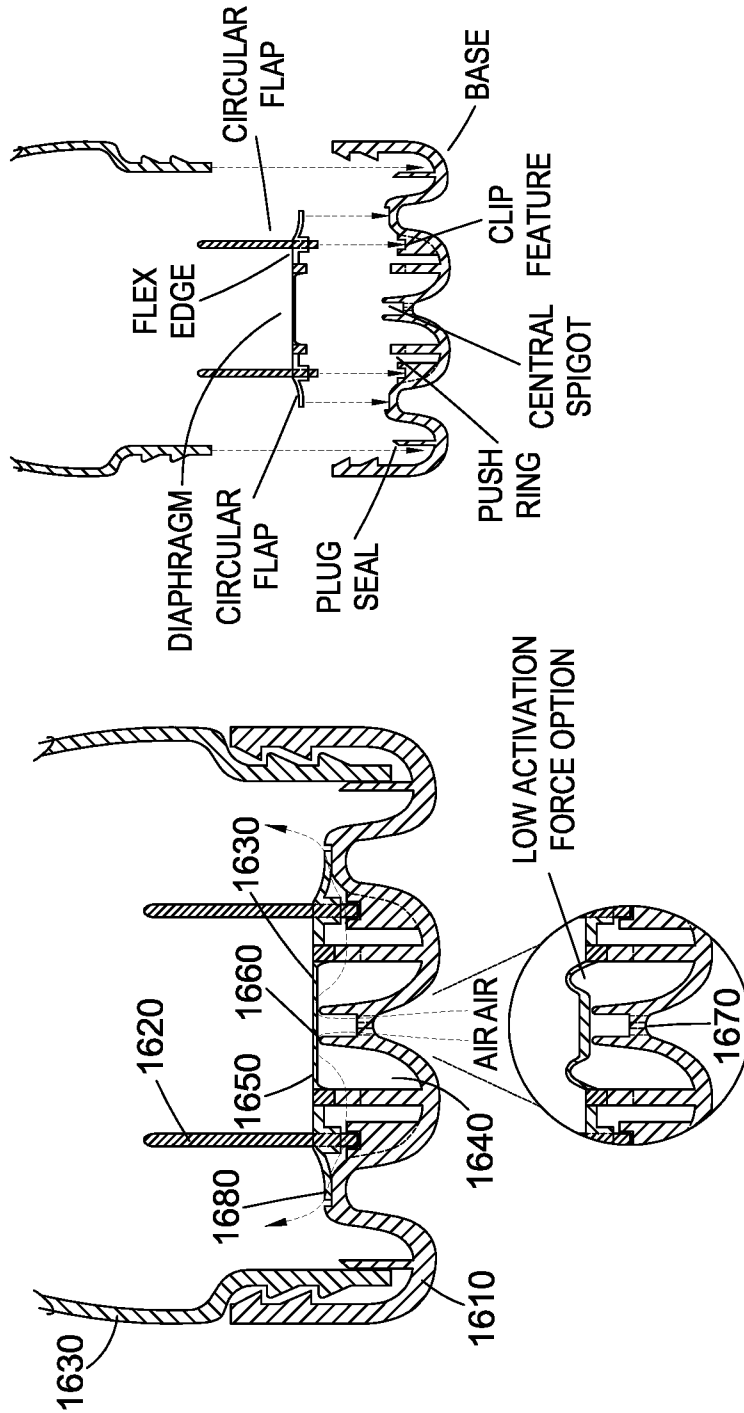


Fig. 16b

Fig. 16a

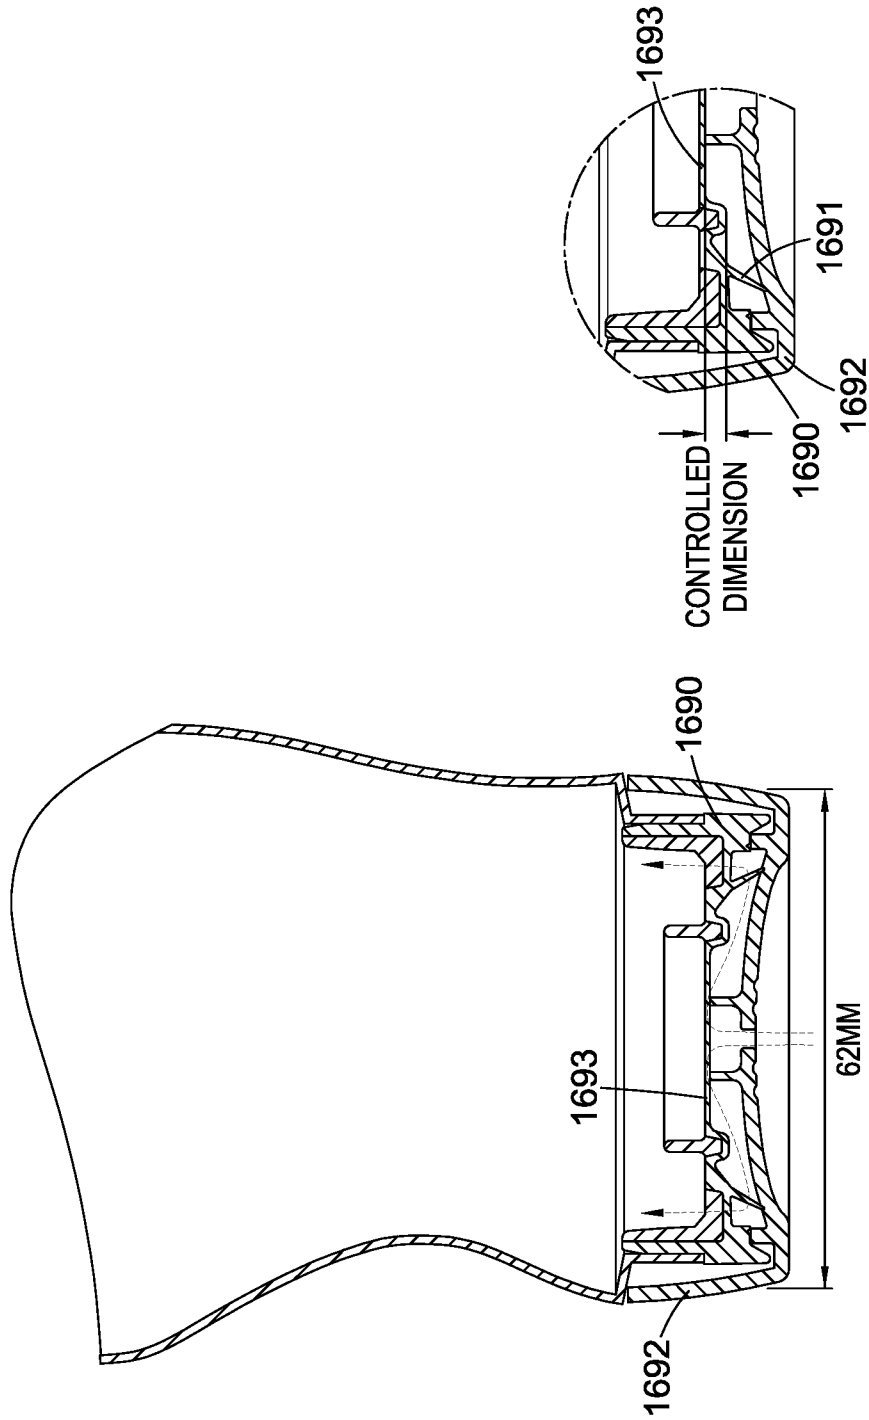


Fig. 16d

Fig. 16c

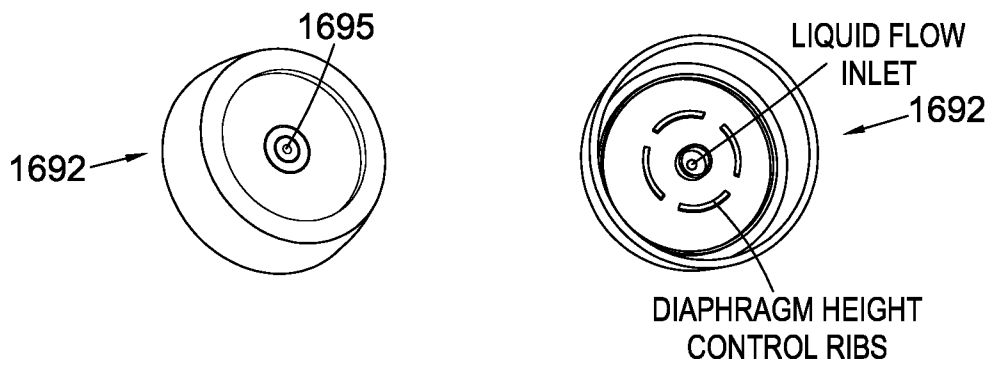


Fig. 16e

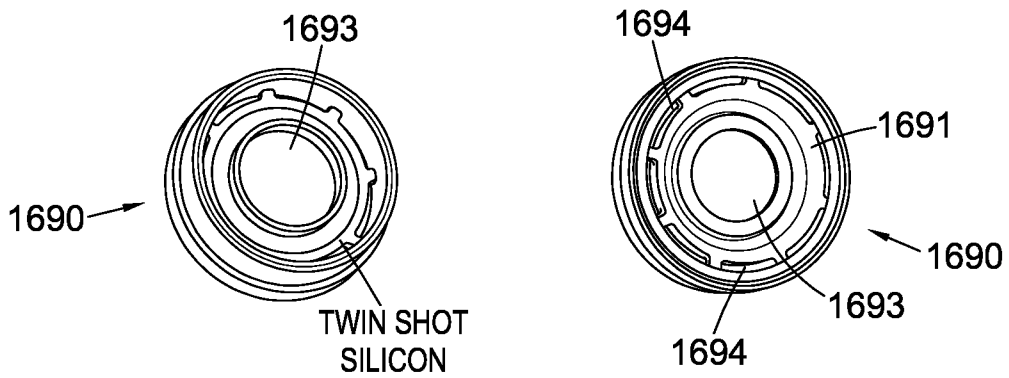


Fig. 16f

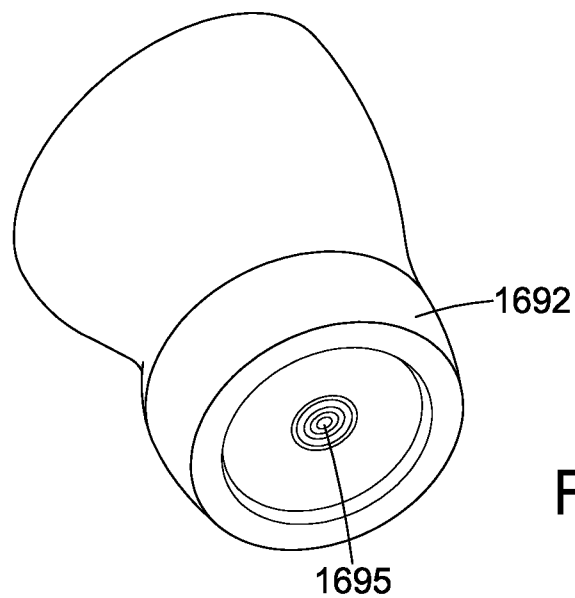


Fig. 16g

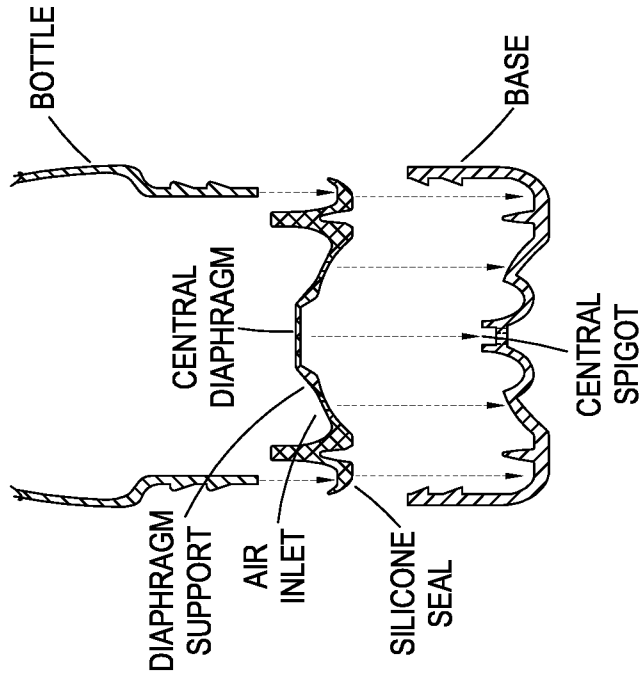


Fig. 17b

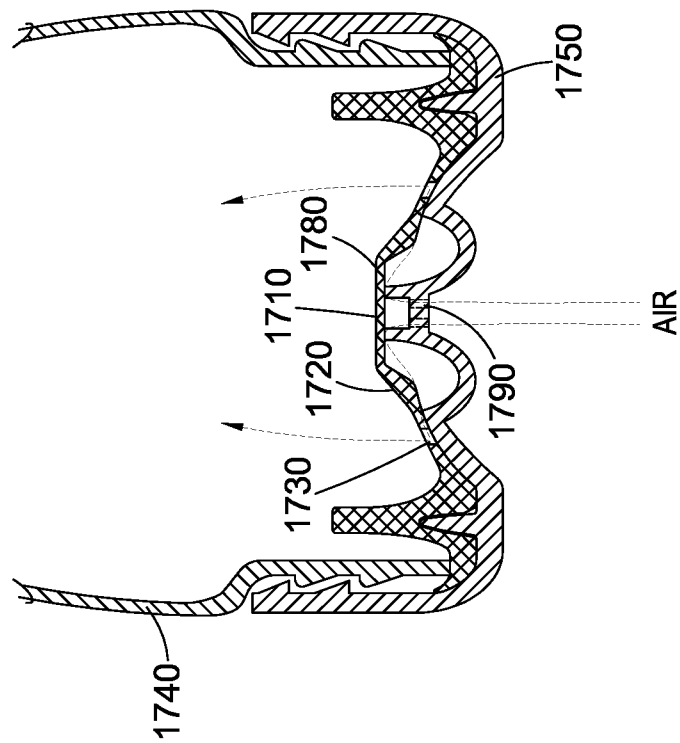


Fig. 17a

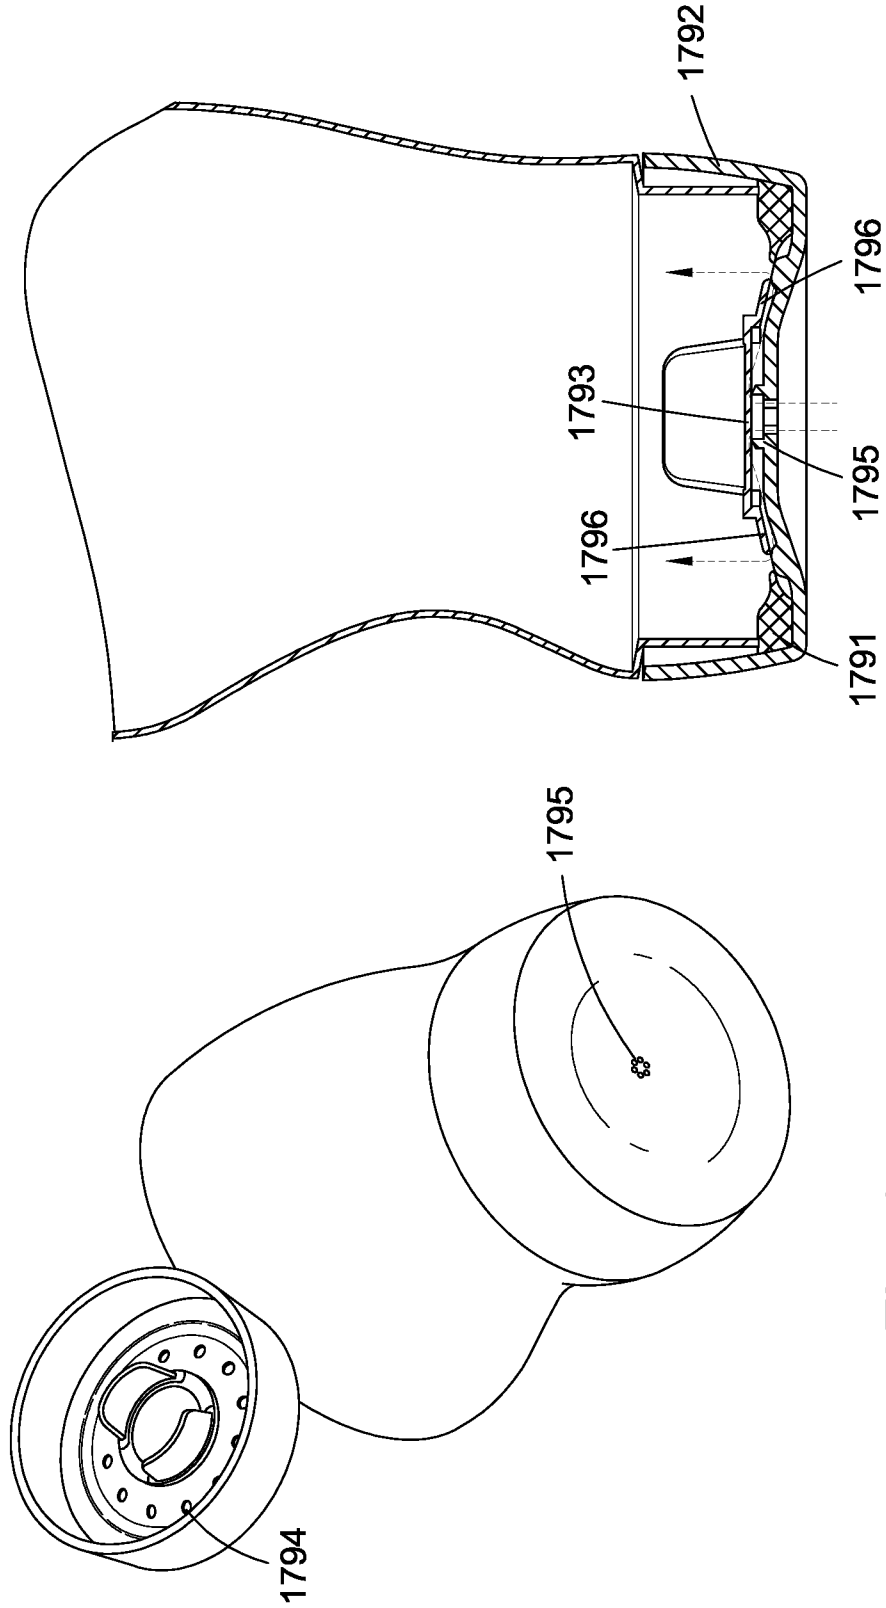


Fig. 17d

Fig. 17c

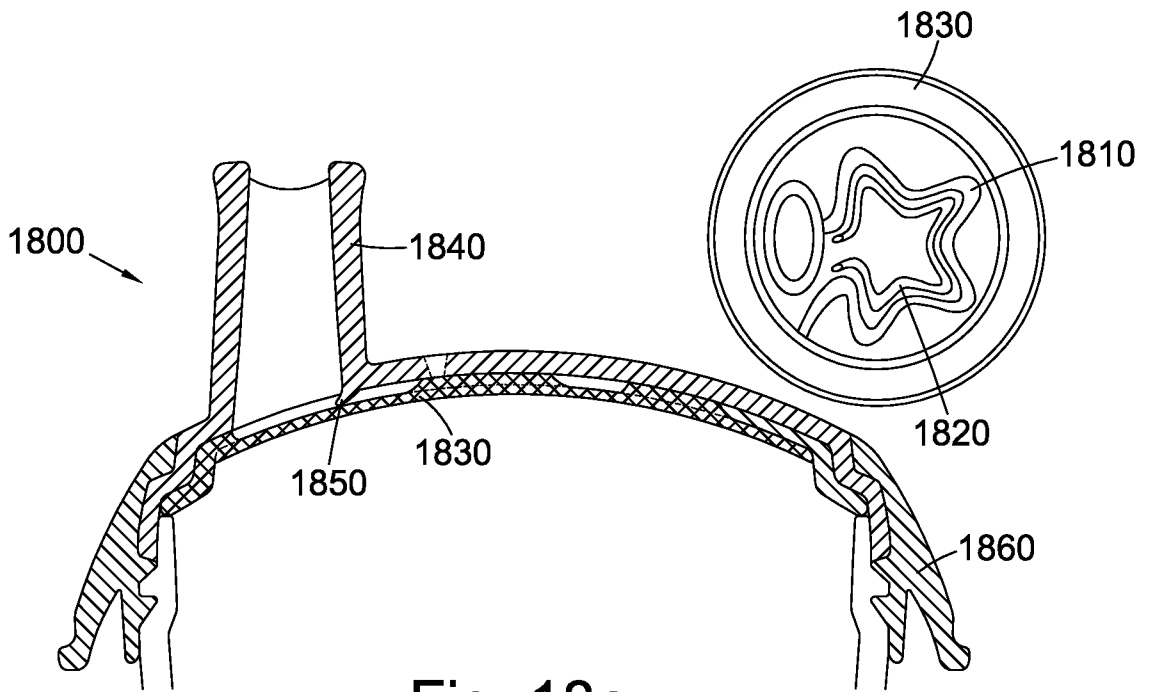


Fig. 18a

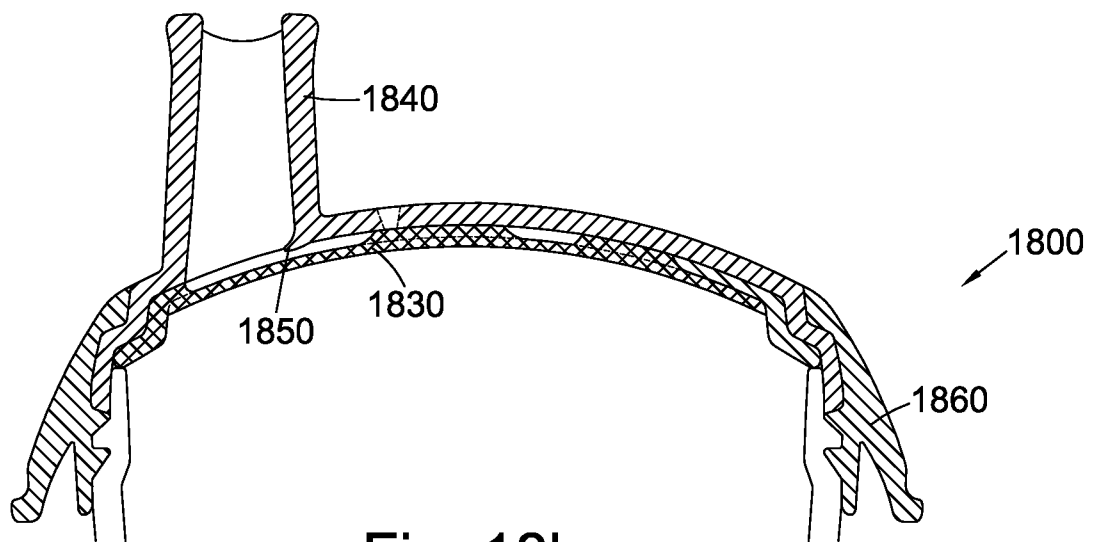


Fig. 18b

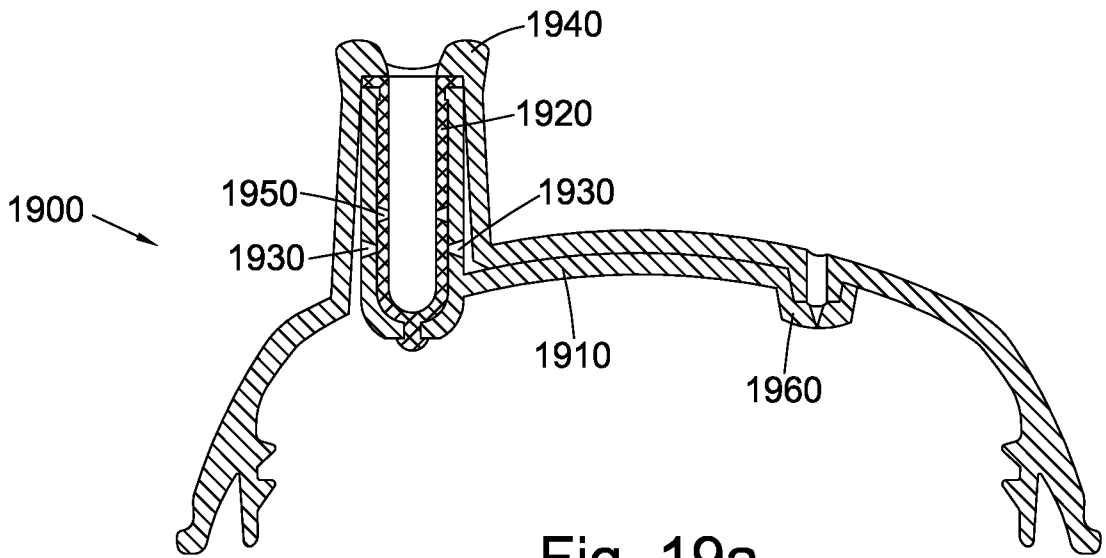


Fig. 19a

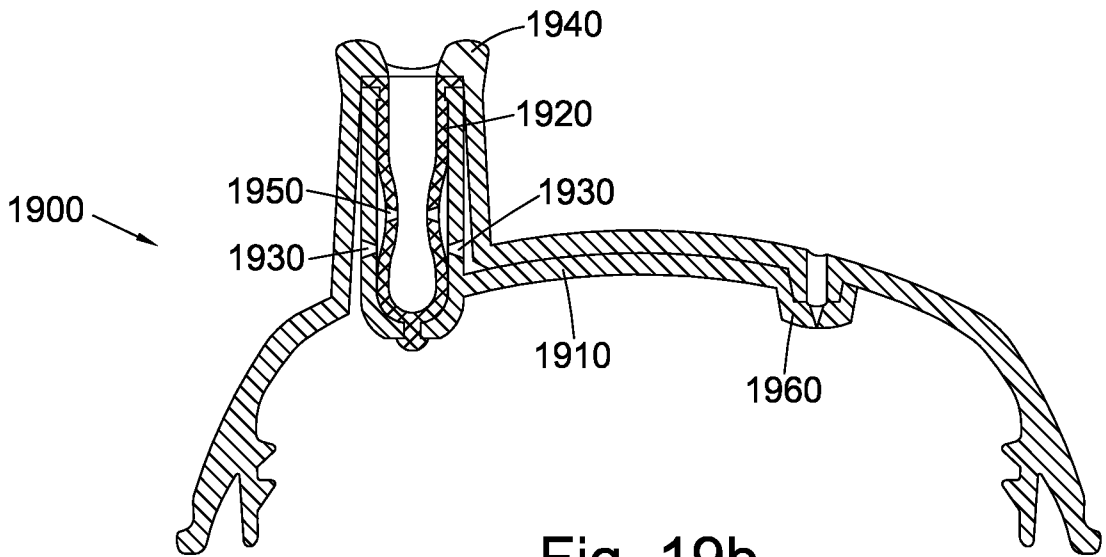


Fig. 19b

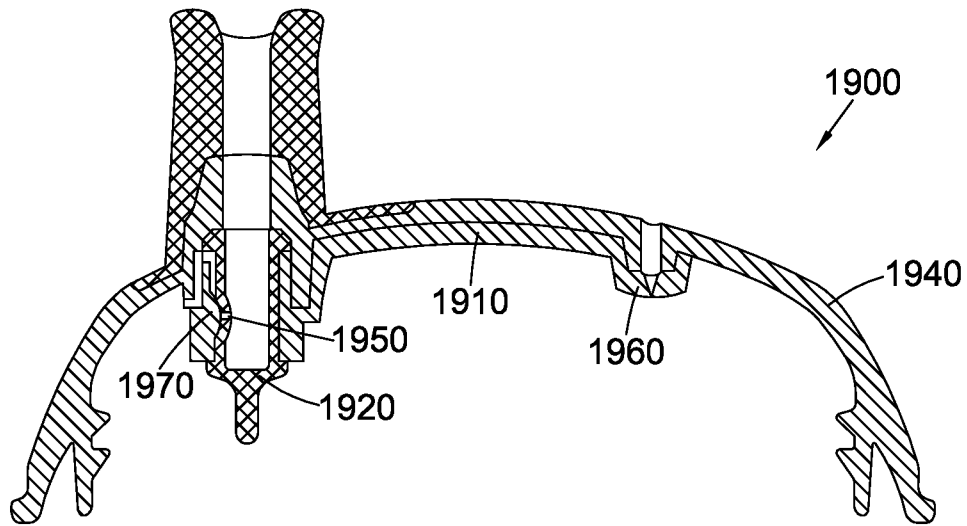


Fig. 19c

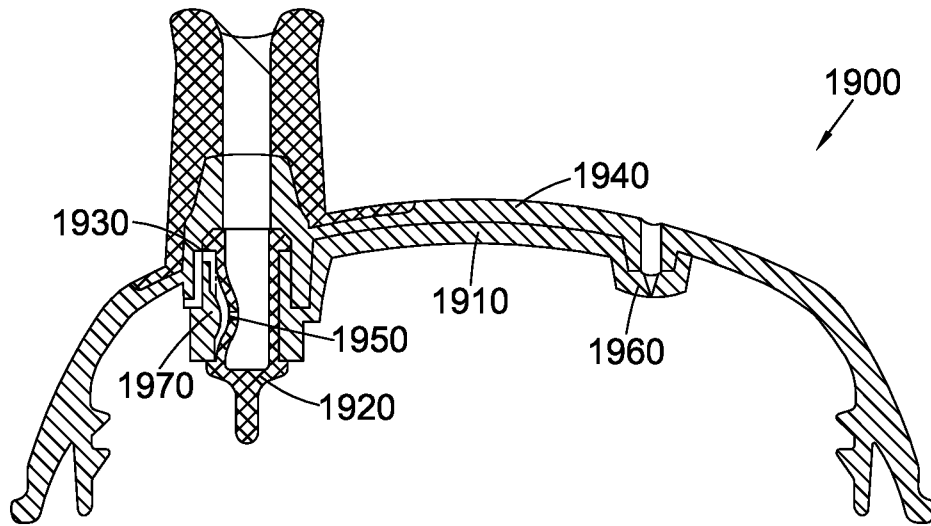


Fig. 19d

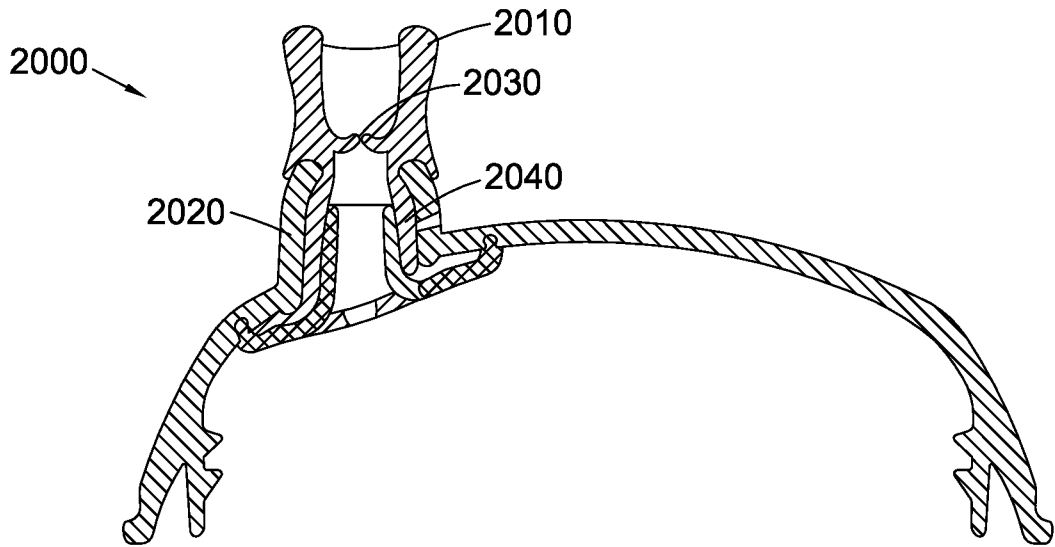


Fig. 20a

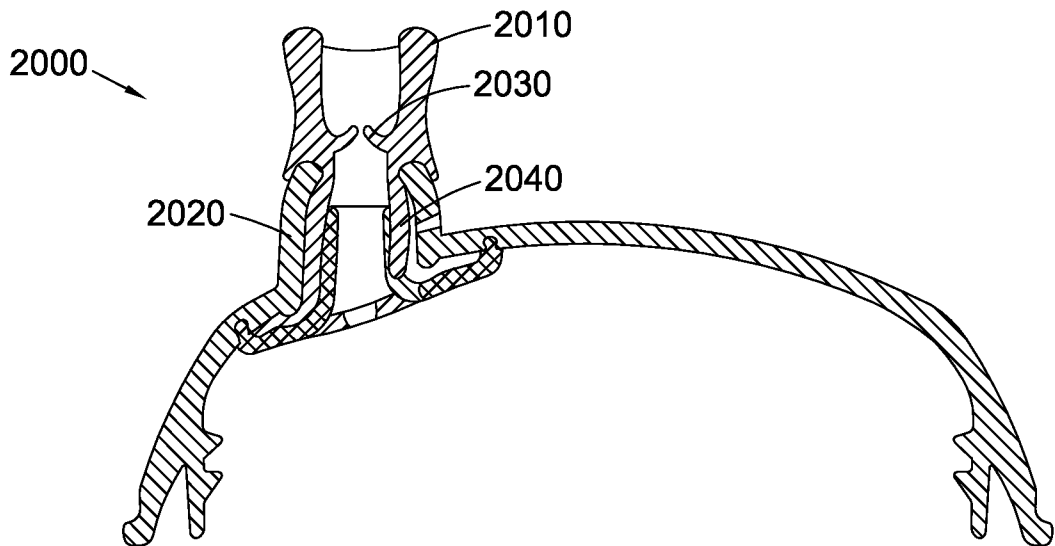


Fig. 20b

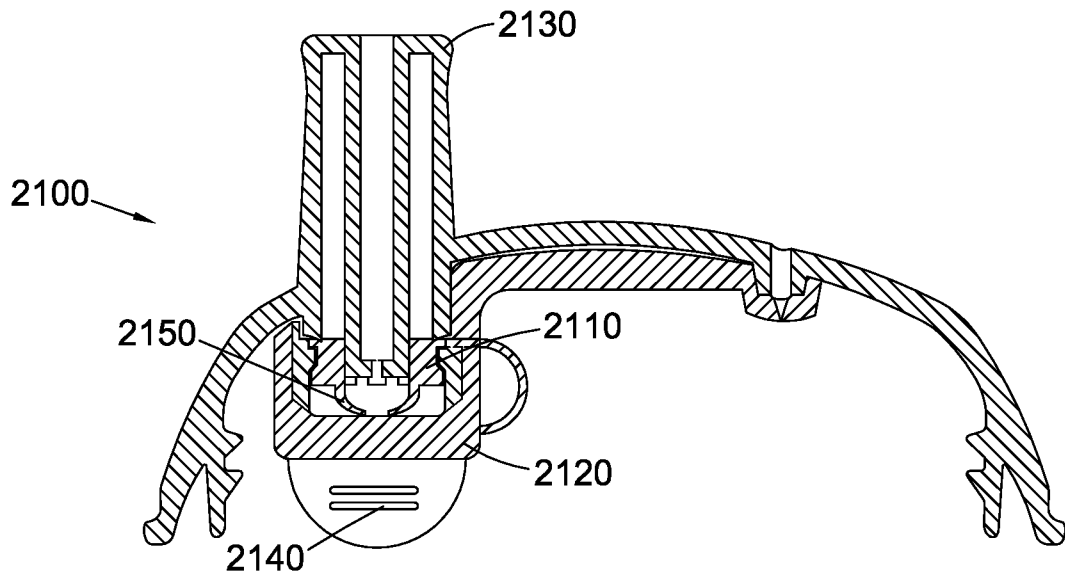


Fig. 21a

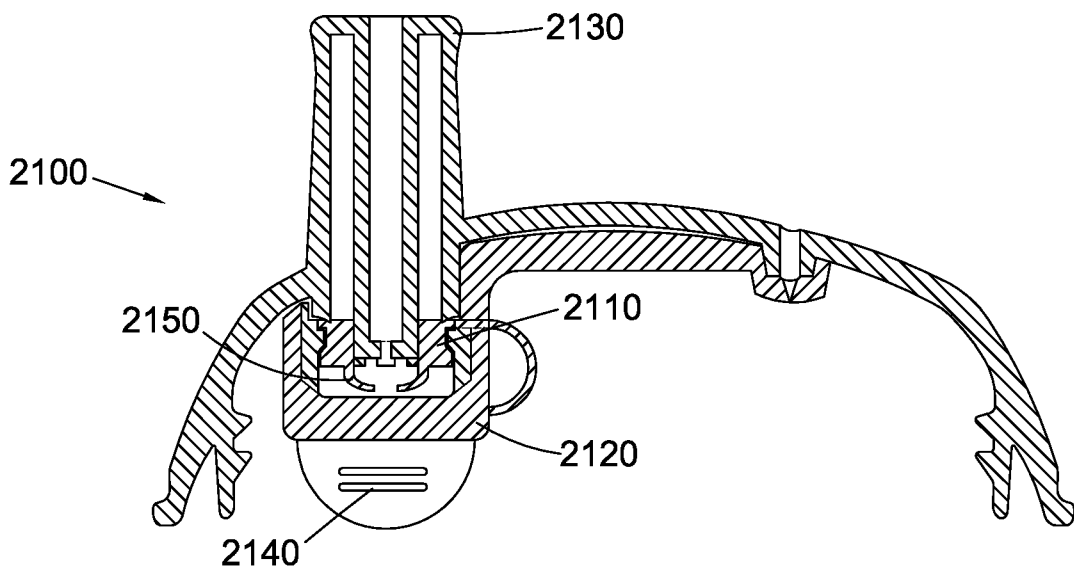


Fig. 21b

31/31

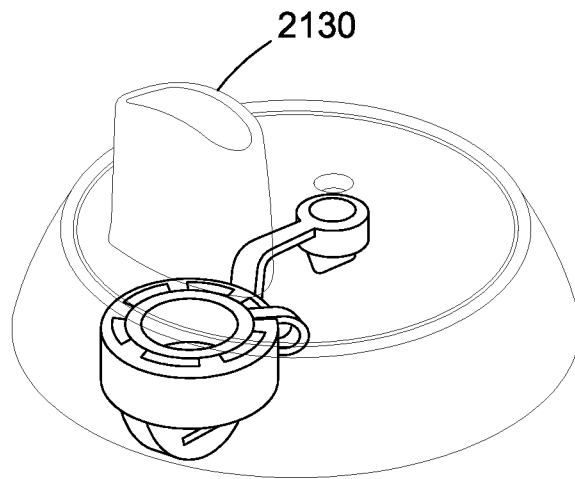


Fig. 21c

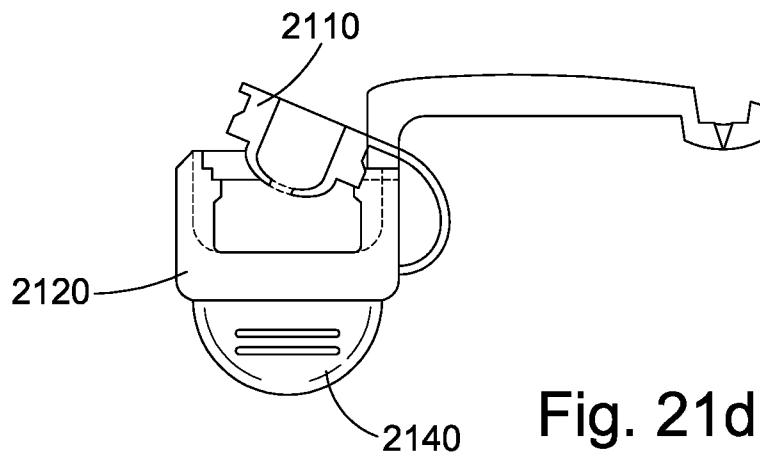


Fig. 21d

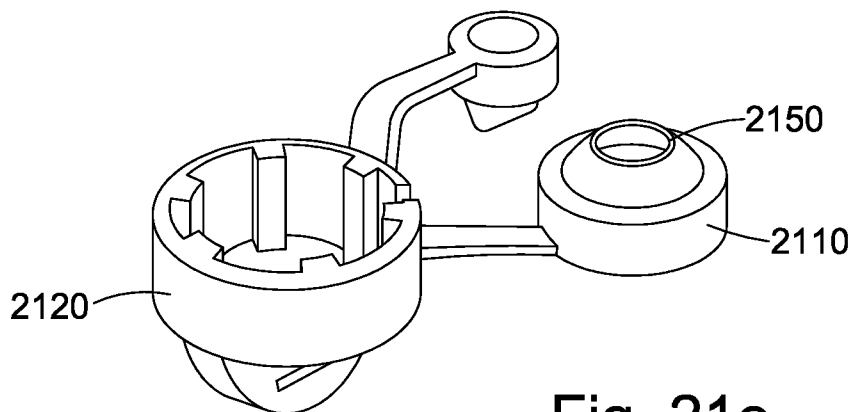


Fig. 21e

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/051728

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47G19/22
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A47G B65D
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 890 620 A (BELCASTRO DOMENIC [US]) 6 April 1999 (1999-04-06) the whole document -----	1-10,68, 69
A	EP 2 134 617 A1 (SAMSON ILAN [GB]) 23 December 2009 (2009-12-23) the whole document -----	1
A	US 2012/175378 A1 (HAKIM NOURI E [US]) 12 July 2012 (2012-07-12) the whole document -----	1
A	US 2008/054027 A1 (SKILLIN CLIFFORD W [US] ET AL SKILLIN CLIFFORD [US] ET AL) 6 March 2008 (2008-03-06) the whole document -----	1

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 3 March 2015	Date of mailing of the international search report 14/07/2015
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Serrano Galarraga, J
--	--

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2015/051728

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-10, 68-72

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-10, 68-72

Valve assembly comprising a bent flow conduit.

2. claims: 11-34, 68, 69

Valve assembly comprising apertures spaced from a blocking portion.

3. claims: 35-40

Valve assembly with movable valve base.

4. claims: 41-69

Foldable valve assembly.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2015/051728

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5890620	A	06-04-1999	NONE

EP 2134617	A1	23-12-2009	AT 507158 T 15-05-2011
		AU 2008237682 A1	23-10-2008
		CA 2683856 A1	23-10-2008
		CN 101657360 A	24-02-2010
		EP 2134617 A1	23-12-2009
		ES 2365112 T3	22-09-2011
		GB 2448296 A	15-10-2008
		JP 5041560 B2	03-10-2012
		JP 2010523422 A	15-07-2010
		KR 20090123958 A	02-12-2009
		NZ 580717 A	27-05-2011
		RU 2009140687 A	20-05-2011
		US 2010044386 A1	25-02-2010
		WO 2008125877 A1	23-10-2008

US 2012175378	A1	12-07-2012	AT 369774 T 15-09-2007
		AU 9113098 A	08-03-1999
		BR 9811973 A	15-08-2000
		CA 2301542 A1	25-02-1999
		CN 1271257 A	25-10-2000
		CN 1475187 A	18-02-2004
		DE 69838255 T2	08-05-2008
		EP 1014839 A1	05-07-2000
		ES 2292205 T3	01-03-2008
		JP 3995033 B2	24-10-2007
		JP 2001514914 A	18-09-2001
		US RE43077 E1	10-01-2012
		US 6321931 B1	27-11-2001
		US 2003098312 A1	29-05-2003
		US 2007187419 A1	16-08-2007
		US 2011000910 A1	06-01-2011
		US 2012175378 A1	12-07-2012
		WO 9908578 A1	25-02-1999

US 2008054027	A1	06-03-2008	CA 2662528 A1 06-03-2008
		EP 2074052 A2	01-07-2009
		US 2008054027 A1	06-03-2008
		WO 2008028189 A2	06-03-2008
