



(51) International Patent Classification:

C08J 3/075 (2006.01) C08J 3/24 (2006.01)
A61B 8/00 (2006.01)

(21) International Application Number:

PCT/US2015/066981

(22) International Filing Date:

21 December 2015 (21.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/095,243 22 December 2014 (22.12.2014) US
14/970,704 16 December 2015 (16.12.2015) US

(71) Applicant: MASSACHUSETTS INSTITUTE OF
TECHNOLOGY [US/US]; 77 Massachusetts Avenue,
Cambridge, MA 02139 (US).

(72) Inventors: ZHAO, Xuanhe; 165 Everett St., Aliston, MA
02134 (US). LIN, Shaoting; 22 Marcella St., Cambridge,
MA 02141 (US). YUK, Hyunwoo; 285 3rd St., Unit 406,
Cambridge, MA 02142 (US).

(74) Agents: CONNORS, Matthew, E. et al.; Gesmer Upde-
grove LLP, 40 Broad Street, Boston, MA 02109 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: EXTREMELY COMPLIANT YET TOUGH HYDROGEL SYSTEMS AS ULTRASOUND TRANSMISSION AGENTS

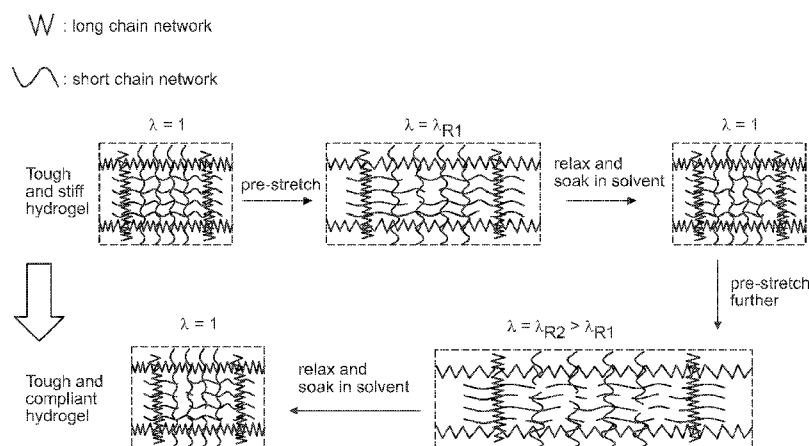


FIG. 1

(57) Abstract: Method for making a tough and compliant hydrogel. A precursor hydrogel is made of a first polymer selected to maintain high elasticity and a second polymer selected to dissipate mechanical energy. The precursor hydrogel is stretched to a multiple of its original length to form a pre-stretched hydrogel. The pre-stretched hydrogel is allowed to relax and is soaked in a biocompatible solvent to reach equilibrium swelling of the pre-stretched hydrogel whereby shear modulus of the hydrogel is reduced.



EXTREMELY COMPLIANT YET TOUGH HYDROGEL SYSTEMS AS ULTRASOUND TRANSMISSION AGENTS

Sponsorship Information

5 This invention was made with government support under grant number N00014-14-1-0619 awarded by the Office of Naval Research. The government has certain rights in the invention.

Priority Information

10 This application claims priority to United States utility application serial number 14/970,704 filed on December 16, 2015 and to provisional application serial number 62/095243 filed on December 22, 2014, the contents of which are incorporated herein by reference.

Background of the Invention

15 This invention relates to a method for making a tough and compliant hydrogel with a low shear modulus that is extremely tough and robust.

20 It is desirable to have hydrogels be both resilient and tough. A particular use for such a hydrogel is as a transmission agent for ultrasound because resiliency allows it to conform to a body part. Resilience and toughness appear to be intrinsically contradictory properties but can be achieved according to the methods disclosed herein.

Summary of the Invention

25 The method for making a tough and compliant hydrogel according to the invention includes combining a long chain polymer network to maintain high elasticity and a sacrificial chain polymer network to dissipate mechanical energy to form an interpenetrating hydrogel.
30 The interpenetrating hydrogel is prestretched to a prescribed multiple of its original length and then relaxed for multiple cycles. Thereafter, the pre-stretched hydrogel is soaked in a biocompatible medium to reach equilibrium swelling of the hydrogel. As a result, the shear modulus of the hydrogel is significantly reduced. To achieve extremely low modulus, multiple loading-unloading steps are performed to deplete most of the sacrificial polymer
35 network to a controlled degree.

The long chain network may be selected from a group consisting of polyacrylamide, polyethylene glycol, poly (vinyl alcohol), poly (N-isopropyl acrylamide), and poly (2-hydroxyethyl methacrylate). The sacrificial chain network may be selected from the group consisting of alginate, hyaluronic acid, collagen, agarose, gelatin, fibrin and chitosan. The hydrogel made by the method of the invention may be used as an ultrasound transmission agent.

Brief Description of the Drawing

Fig. 1 is a schematic illustration of the steps performed according to the invention to transform a tough and stiff hydrogel into a tough and compliant hydrogel by pre-stretching the gel, relaxing and soaking it in a solvent such media or PBS.

Fig. 2 is a graph of modulus against pre-stretch. One can see that soaking the pre-stretched hydrogel in solvent can significantly reduce the shear modulus of the hydrogel from over 10 kPa to approximately 1 kPa.

Fig. 3 is a comparison graph of stress versus stretch for hydrogels with different treatments.

Figs. 4a and 4b are photographs of the soft and tough hydrogel of the invention conformally attached to different regions of a human body.

Figs. 5a and 5b are ultrasound images of a phantom object measured through conventional liquid hydrogel as shown in Fig. 5a and the extremely compliant and tough hydrogel of the invention shown in Fig. 5b.

Description of the Preferred Embodiment

We have invented a method and material system to make new hydrogels that have a shear modulus as low as 1 kPa but are extremely tough and robust. The extraordinary properties of the hydrogels are achieved through the mechanisms of delayed stiffening and mechanical dissipation. The hydrogels of the invention can be formed and printed into various shapes with different dimensions. As a result of their low rigidity and high robustness, the gels of the invention can be conformally attached to different regions of the human body. This aspect is important when the novel gel system of the invention is used as an ultrasound transmission agent.

In general, materials from which the hydrogels are made according to the invention are from two types of polymers. One type of polymer maintains high elasticity of the hydrogel and the other type of polymer dissipates mechanical energy when the hydrogel is deformed. The first type of polymers include polyacrylamide, polyethylene glycol, poly(vinyl alcohol), poly(N-isopropyl acrylamide), and poly(2-hydroxyethyl methacrylate). The second type of polymers include alginate, hyaluronic acid, collagen, agarose, gelatin, fibrin, and chitosan, which are generally capable of reversible crosslinking.

The first type of polymers are usually crosslinked by methods including free-radical polymerization, UV crosslinking, gamma irradiation, electron beam irradiation and freeze thawing. The second type of polymers are usually crosslinked by methods including adding multivalent ions, changing ambient temperature and varying pH of the solution. The chain length between two adjacent crosslinkings of the first type polymers is generally much longer than that of the second type polymers. In addition, the volume concentration of the first type of polymers in the hydrogel can range from 5% to 40%, and that of the second type is usually lower than the first type, ranging from 0.15% to 10%. Therefore, the crosslinking density of the second type polymers is usually much larger than the first type polymers. The possible combination of different polymers to form tough hydrogels are summarized in the matrix shown in Table 1.

Network for dissipating energy (short chain) Network for maintaining elasticity (long chain)	Alginate	Hyaluronic acid	Collagen,	Agarose	Gelatin	Fibrin	Chitosan
Polyacrylamide							
Polyethylene glycol							
Poly (vinyl alcohol)							
Poly(N-isopropylacrylamide)							
Poly(2-hydroxyethyl methacrylate)							

Table 1. Tough hydrogels are fabricated by combining two types of polymer networks with different concentrations and crosslinking densities. A matrix is used to guide the selection of different polymers.

An example protocol for making a specific hydrogel with polyacrylamide and alginate is now described. A pre-gel solution was prepared by mixing alginate (Sigma, A20330) and acrylamide (sigma, A8887) into a solution with one to five weight percent of alginate and 5-40 weight percent of acrylamide. We then added N, N-methylenebisacrylamide (Sigma, 146072) as the crosslinker for polyacrylamide and ammonium persulphate (Sigma, 248614) as photo initiator for polyacrylamide. The concentration of the N, N-methylenebisacrylamide needs to be very low (i.e., less than 4×10^{-4} g per 10 mL of the polymer solution) to enable the low modulus of the hydrogels in future steps. After degassing the pre-gel solution in a vacuum chamber, we added calcium sulfate (Sigma, C3771) as the crosslinker for alginate and N, N, N', N'-tetramethylethylenediamine (Sigma, T7024-50M) as the crosslinking accelerator for polyacrylamide. Thereafter, the pre-gel solution was infused into molds of different shapes and was subjected to ultraviolet light for 60 minutes with 8W power and 254nm wavelength to fabricate the initial hydrogel.

The as-fabricated pre-gel hydrogels are relatively stiff with a shear modulus over 10 kPa and up to 100 kPa as shown in Fig. 2. The inventors have developed an innovative and practical method to reduce the modulus of the hydrogel while maintaining its high fracture toughness. With reference first to Fig. 1, we first pre-stretch the hydrogel for a prescribed time to a multiple of its original length (i.e., $\lambda_{r1} = 2 \sim 10$) and then relax for multiple cycles. We then soak the pre-stretched hydrogel in a biocompatible solvent such as PBS or media over a period of time to reach equilibrium swelling of the hydrogel. We then stretched the hydrogel again to a ratio higher than the first pre-stretch (i.e., $\lambda_{r2} > \lambda_{r1}$) and then relax for multiple cycles. As a result, the shear modulus of the hydrogel will be significantly reduced as shown in Fig. 2. For example, when the ratio of the second stretch $\lambda_{r2} > 7$, the shear modulus of the hydrogel is reduced to approximately 1 kPa. Although the resultant hydrogel has a very low shear modulus, it is still very tough as indicated by the stress versus strain curve of the hydrogel under loading and unloading. With reference to Fig. 3 it can be seen that the pre-stretched and soaked hydrogel still provides very high stretchability (over 11 times) and significant mechanical dissipation indicated by the hysteresis loop. The combination of high stretchability and mechanical dissipation give high fracture toughness to the resulting compliant hydrogel.

As shown in Figs. 4a and 4b, the extremely soft and tough hydrogel disclosed herein can be conformally attached to different regions of a human body. The material can also conformally deform and wrap around ultrasound probes of various shapes. In addition, because the hydrogel is elastic and extremely tough, it will not flow or fracture as commonly
5 used ultrasound gels do. Furthermore, since the shear modulus of the hydrogel is very low (approximately 1 kPa), it is expected to give excellent transmission efficiency for ultrasound. As shown in Figs. 5a and 5b, the extremely compliant and tough hydrogel of the invention gives high quality ultrasound images. However, whereas conventional liquid hydrogel flows away or dehydrates after approximately one minute of measurement, the novel compliant and
10 tough hydrogel of the invention can last 30 minutes to hours.

Additional information concerning this invention may be found in Lin et al., "Designing Extremely Resilient and Tough Hydrogels via Delayed Dissipation", Extreme Mechanics Letters 1 (2014) 70-75. Reference may also be made to international publication
15 number WO2013/103956. The contents of both of these references are incorporated herein by reference.

It is recognized that modifications and variations of the invention will be apparent to those of ordinary skill in the art and it is intended that all such modifications and variations
20 be included within the scope of the appended claims.

What is claimed is:

- 1 1. Method for making a tough and compliant hydrogel comprising:
2
3 combining a long chain polymer network selected to maintain high elasticity and a
4 sacrificial chain polymer network to dissipate mechanical energy to form an interpenetrating
5 hydrogel;
6
7 stretching the interpenetrating hydrogel to a multiple of its original length to form a
8 pre-stretched hydrogel;
9
10 allowing the pre-stretched hydrogel to relax; and
11
12 soaking the relaxed hydrogel in a biocompatible medium to reach equilibrium
13 swelling of the hydrogel whereby shear modulus of the hydrogel is reduced.
- 1 2. The method of claim 1 including multiple stretching and relaxing steps.
- 1 3. The method of claim 2 including a second stretching wherein the second
2 stretching is greater than the first stretching.
- 1 4. The method of claim 1 wherein the multiple of its original length is in the
2 range of 2-10.
- 1 5. The method of claim 1 wherein the long chain polymer network is selected from the
2 group consisting of polyacrylamide, polyethylene glycol, poly (vinyl alcohol), poly (N-
3 isopropyl acrylamide), and poly (2-hydroxyethylmethacrylate).
- 1 6. The method of claim 1 wherein the sacrificial chain polymer network is selected from
2 the group consisting of alginate, hyaluronic acid, collagen, agarose, gelatin, fibrin and
3 chitosan.
- 1 7. Hydrogel made by the method of claims 1-6 used as an ultrasound transmission agent.

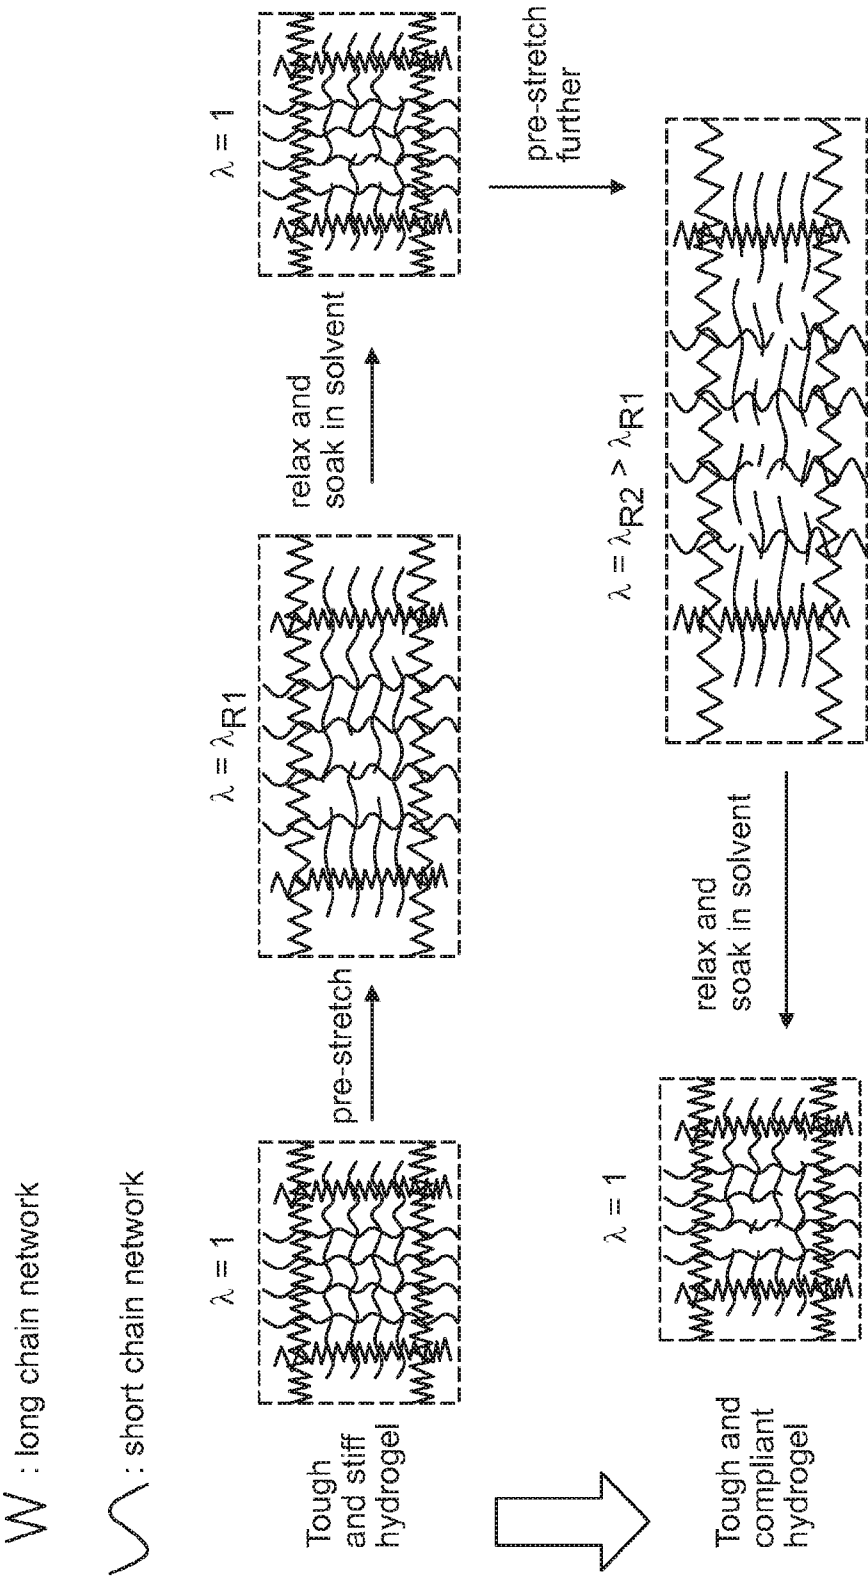


FIG. 1

2/4

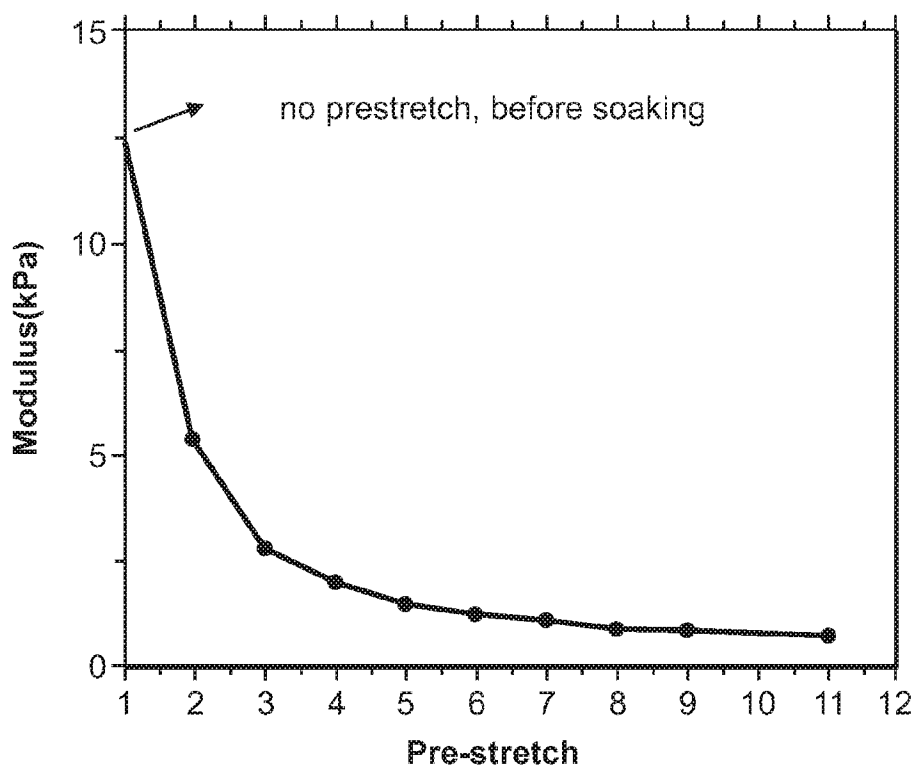


FIG. 2

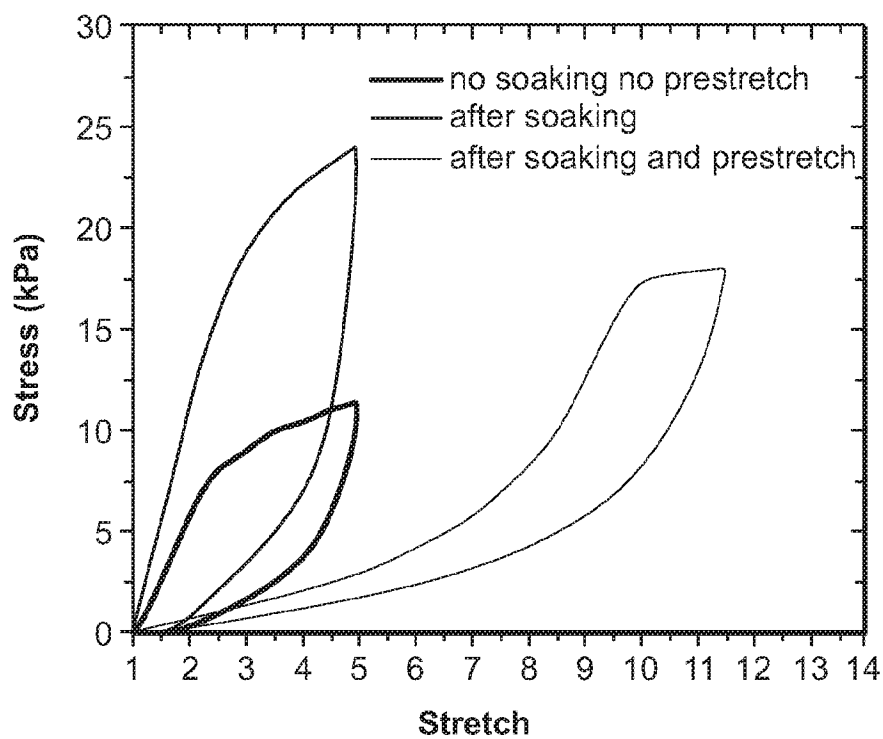


FIG. 3

3/4

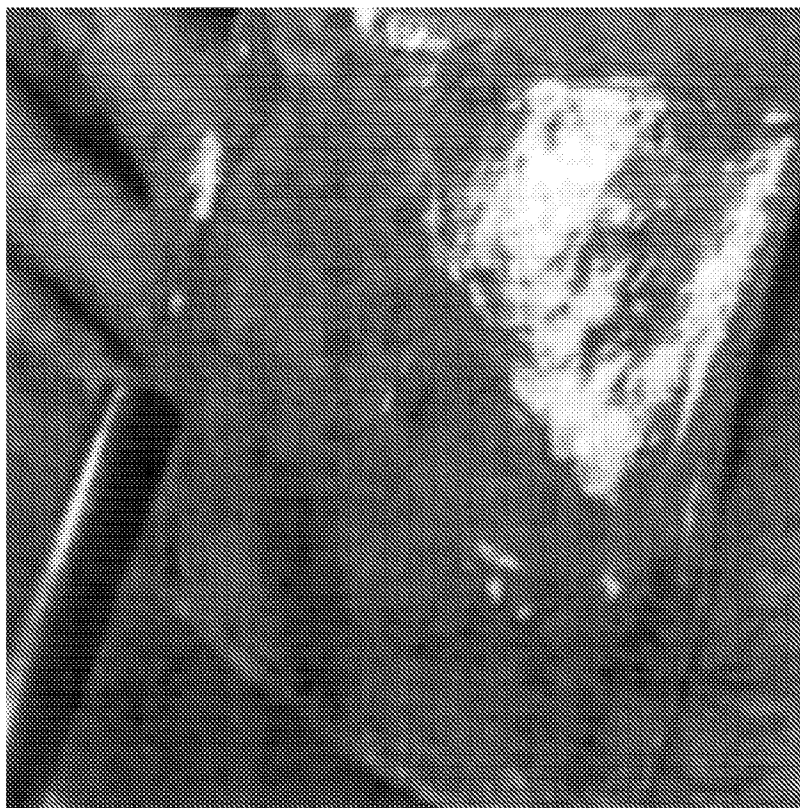


FIG. 4B

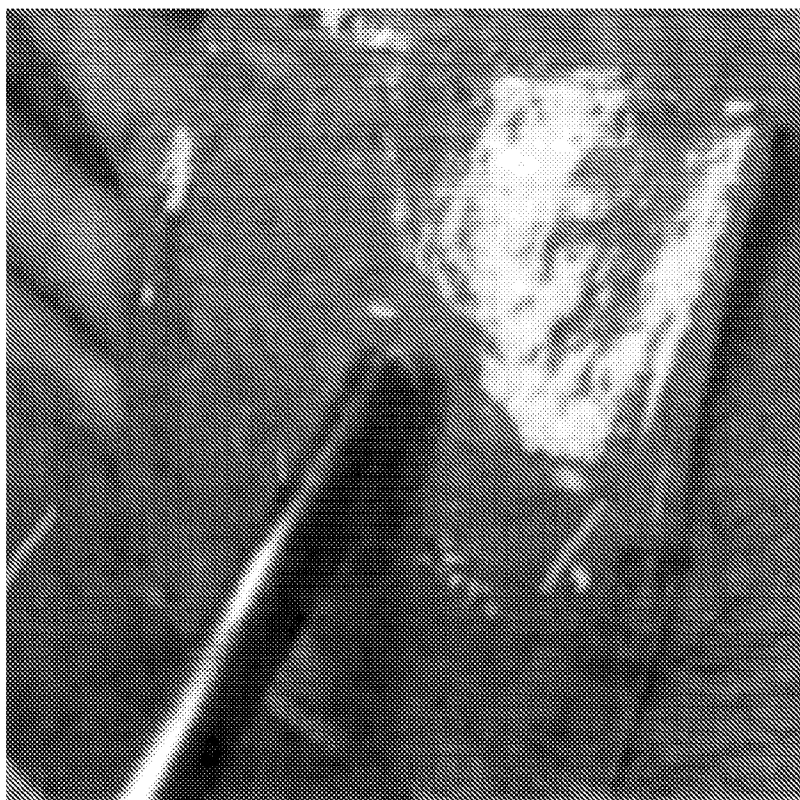


FIG. 4A

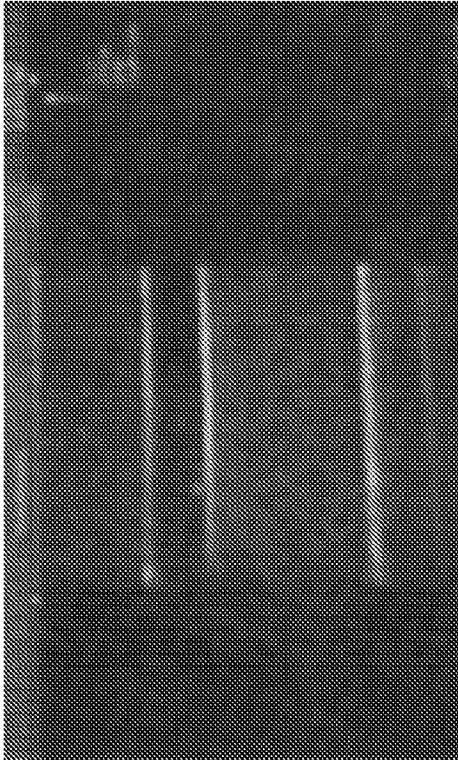


FIG. 5A



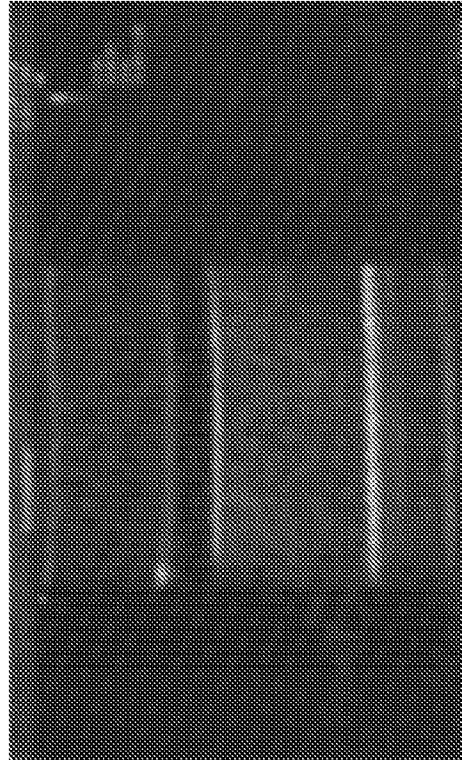


FIG. 5B

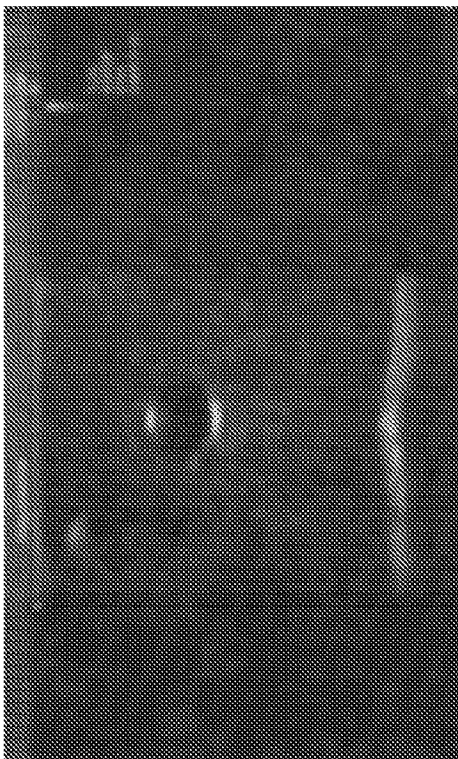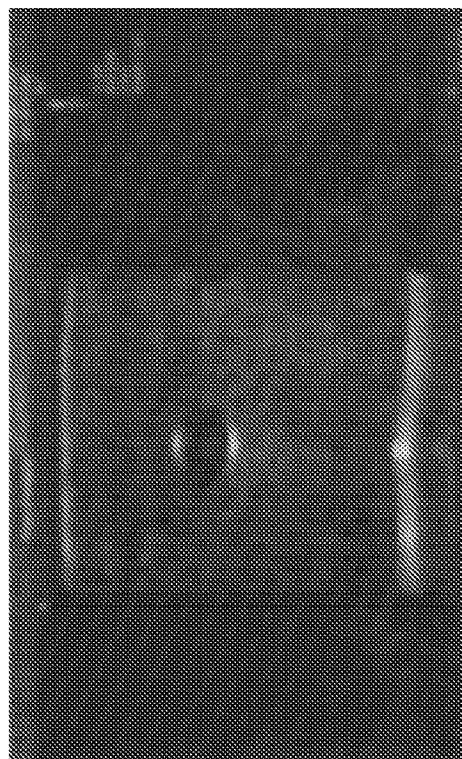

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/066981

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08J3/075 A61B8/00 C08J3/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C08J A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/055184 A1 (ZEITELS STEVEN M [US] ET AL) 4 March 2010 (2010-03-04) claims 1,11,12,16	7
A	----- WO 2013/103956 A1 (HARVARD COLLEGE [US]; SEOUL NAT UNIV IND FOUNDATION [KR]; SUN JEONG-YU) 11 July 2013 (2013-07-11) cited in the application claims 21,1; examples 3,1 ----- -/-	1,7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 2016

Date of mailing of the international search report

17/05/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kanetakis, Ioannis

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2015/066981

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
T	SHAOTING LIN ET AL: "Designing extremely resilient and tough hydrogels via delayed dissipation", EXTREME MECHANICS LETTERS, vol. 1, 24 December 2014 (2014-12-24), pages 70-75, XP055265648, ISSN: 2352-4316, DOI: 10.1016/j.eml.2014.11.002 the whole document -----	
A	HOSSEIN OMIDIAN ET AL: "Elastic, Superporous Hydrogel Hybrids of Polyacrylamide and Sodium Alginate", MACROMOLECULAR BIOSCIENCE, vol. 6, no. 9, 15 September 2006 (2006-09-15), pages 703-710, XP055054987, ISSN: 1616-5187, DOI: 10.1002/mabi.200600062 last page; Results and Discussion; Conclusion -----	1,7
A,P	DATABASE WPI Week 201523 Thomson Scientific, London, GB; AN 2015-18829N XP002756618, & CN 104 311 841 A (UNIV JIANGNAN) 28 January 2015 (2015-01-28) abstract -----	1,7
A	CHANGCHENG HE ET AL: "Tough and super-resilient hydrogels synthesized by using peroxidized polymer chains as polyfunctional initiating and cross-linking centers", SOFT MATTER, vol. 9, no. 10, 24 January 2013 (2013-01-24), page 2837, XP055266080, GB ISSN: 1744-683X, DOI: 10.1039/c2sm27605d abstract -----	1,7
A	QUNWEI TANG ET AL: "Fabrication of a high-strength hydrogel with an interpenetrating network structure", COLLOIDS AND SURFACES. A, PHYSICACHEMICAL AND ENGINEERING ASPECTS, vol. 346, no. 1-3, 9 June 2009 (2009-06-09), pages 91-98, XP055266081, NL ISSN: 0927-7757, DOI: 10.1016/j.colsurfa.2009.05.031 abstract -----	1,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/066981

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010055184 A1	04-03-2010	EP 2341953 A2	13-07-2011
		JP 5702723 B2	15-04-2015
		JP 2012501724 A	26-01-2012
		US 2010055184 A1	04-03-2010
		WO 2010027471 A2	11-03-2010

WO 2013103956 A1	11-07-2013	US 2015038613 A1	05-02-2015
		WO 2013103956 A1	11-07-2013

CN 104311841 A	28-01-2015	NONE	
