
BABY STRAP

Filed July 29, 1946

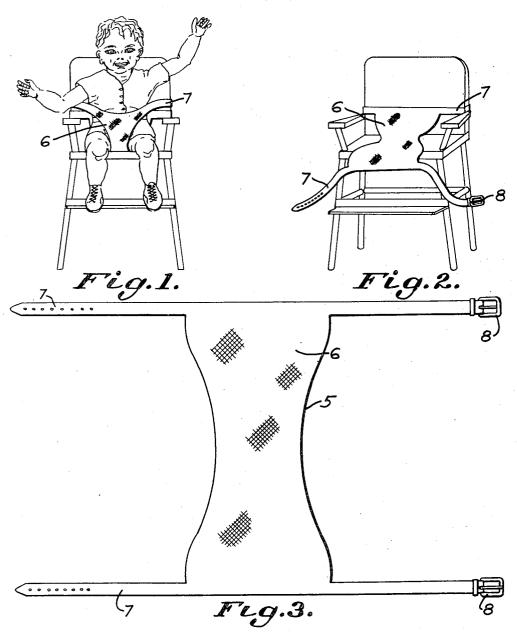

G.K.White

#### UNITED STATES PATENT

2,451,007

#### BABY STRAP

Gertrude K. White, Philadelphia, Pa.

Application July 29, 1946, Serial No. 686.851

1 Claim. (Cl. 155—189)

This invention relates to a strap designed for use in securing babies in high chairs or the like, to prevent the babies or infants from working loose or falling from the high chairs in which the babies are secured.

An important object of the invention is to provide a device of this character which will present wide surfaces for contact with the body of the baby held by the strap, for the comfort of the

Still another object of the invention is to construct a strap in such a way that the securing straps of the device will rest on the handles of the high chair to prevent them from sliding downwardly over the chair when in use.

Another object of the invention is to construct the strap of material which may be readily washed, to maintain the strap in a sanitary condition at all times.

With the foregoing and other objects in view 20 which will appear as the description proceeds, the invention consists of certain novel details of construction and combinations of parts hereinafter more fully described and pointed out in the made in the construction and arrangement of parts without departing from the spirit of the invention as claimed.

Referring to the drawing

application of the strap, forming the essence of the present invention.

Figure 2 is a perspective view of a high chair showing the manner of securing the strap to the

Figure 3 is a view illustrating the strap prior to positioning it on a high chair.

Referring to the drawing in detail, the strap comprises a length of fabric material, the side edges thereof being curved inwardly as at 5, pro- 40 viding clearances for the legs of the baby held by the strap.

At each end of the body portion 6 of the strap, is a securing strap 7 which straps include buckles 3, whereby the body portion may be secured to 45

the back of a high chair, as shown by the drawing. In positioning the device, the strap 7 at one end of the body portion 6 is positioned around the back of a high chair, as shown by Fig. 2 of the drawing. The baby is then seated on the narrow portion of the body 6, and the loose end of the strap is now brought upwardly between the legs of the baby, and the strap 7 at this end of the body 6, is positioned around the back of the 10 high chair, securing the baby in the high chair.

From the foregoing it will be seen that due to the construction shown and described, I have provided a strap which may be secured within a high chair and a baby held within the high chair, 15 by the strap, in such a way that the baby cannot possibly work out of the strap, or slide through the sides of the strap to fall or get out of the high chair.

What is claimed is:

A strap for tying babies in chairs, comprising a body portion including a length of wide fabric material, the side edges of the body portion being curved inwardly from the ends thereof providing wide ends and a narrow intermediate portion claim, it being understood that changes may be 25 forming a clearance for the legs of the baby positioned within the strap, laterally extended strap sections formed integral with each end of the body portion, the laterally extended straps adapted to be secured to the back of a high chair Figure 1 is an elevational view illustrating the 30 above the arms thereof, and the intermediate portion of the body portion providing a sling in which the baby using the device is held.

### GERTRUDE K. WHITE.

## REFERENCES CITED

The following references are of record in the file of this patent:

# UNITED STATES PATENTS

Number	Name	Date		
921,057	Ayers	May	11.	1909
1,172,103	Bennett	. Feb.	15.	1916
1,205,384	Peck			
2,302,710	Nordblom	_ Nov	. 2 <del>4</del> ,	1942