

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
13 January 2011 (13.01.2011)

PCT

(10) International Publication Number
WO 2011/003846 A1(51) International Patent Classification:
C09K 19/20 (2006.01) *C09K 19/46* (2006.01)(21) International Application Number:
PCT/EP2010/059528(22) International Filing Date:
5 July 2010 (05.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09164992.1 9 July 2009 (09.07.2009) EP
10151538.5 25 January 2010 (25.01.2010) EP(71) Applicant (for all designated States except US): **Rolic AG** [CH/CH]; Chamersrasse 50, CH-6300 Zug (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ECKERT, Jean-François** [FR/FR]; 43 rue des Fauvettes, F-67750 Kientzville (FR). **ROTH, Martin** [CH/CH]; Holenweg 44, CH-4434 Hölstein (CH).(74) Agent: **VEENSTRA, Eva**; Rolic Technologies Ltd., Gewerbestrasse 18, CH-4123 Allschwil (CH).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ESTER GROUP CONTAINING LIQUID CRYSTALS FOR OPTICAL OR ELECTRO OPTICAL DEVICES



(57) Abstract: The invention relates to polymerisable liquid crystals compound (I) having a liquid crystalline phase and to liquid crystalline compositions comprising compounds (I), their use as birefringence layer.



WO 2011/003846 A1

Ester group containing liquid crystals for optical or electro optical devices

The invention relates to polymerisable liquid crystal compounds (I) and their compositions and polymers, which are used for the preparation of birefringent layers
5 for optical or electro optical devices.

Birefringent layers are used in the manufacture of optical or electro optical components such as waveguides, optical gratings, filters, retarders, rotators, piezoelectric cells and non-linear optical cells and films. The choice of liquid crystal
10 compounds for use in any one of the aforementioned optical or electro optical components depends upon its associated optical properties such as the optical anisotropy, refractive index, transparency and dispersion.

Birefringent layers can for example be manufactured by orientating a layer
15 comprising a liquid crystal compound.


The configuration imposed by an orientation layer on a liquid crystal compound can be stabilised if the liquid crystal is polymerisable, and herewith gives access to fix the orientation by forming a polymer network. The resulting birefringent layer has a high
20 viscosity and is stable to mechanical stresses, temperature and light exposure.

Desired are polymerisable liquid crystal compounds, which are stable against chemical, thermal influences or electromagnetic radiation. Further, good manufacturing properties deriving from polymerisable liquid crystal compounds are
25 desired, such as easy and economic accessibility. In addition, of advantage are polymerisable liquid crystal compounds having good applicatory properties such as good adhesion, solubility and miscibility with other polymerisable liquid crystal compounds, and extended liquid crystalline phase(s) over a large temperature range such as from 25 to 80 °C, more advantageously 25 to 150 °C.


30

There is a need for further polymerisable liquid crystal compounds which exhibits a broad liquid-crystalline thermal range and which can be orientated on a substrate, preferably prior to cross-linking in such a way that the orientation of the polymerisable liquid crystal compounds or mixture on the substrate remains stable over the period required for manufacturing the polymer network. Further, these polymerisable liquid crystal compounds should economically be accessible and show good applicatory properties.

The present invention relates to a polymerisable liquid crystal compound (I) having a liquid crystalline phase:



wherein R^1 and R^2 are independently from each other a group of formula (Ia)



wherein:

“- - - -”, the interrupted line, symbolizes the linkage to compound (I), and

wherein

$-(C^1 - X^1)_{n1} - C^2 - (X^2 - C^3)_{n2}-$ is a divalent core, wherein;

C^1 and C^3 are in each case independently substituted or unsubstituted non-

aromatic, aromatic, carbocyclic or heterocyclic groups, and

C^2 is a nonaromatic, aromatic, carbocyclic or heterocyclic group which is

unsubstituted or substituted with an unbranched hydrocarbon group of 1 to 20

C-atoms, wherein one or more C-atom, -CH- or -CH₂-group, is not replaced or, in

which one or more C-atom, -CH- or -CH₂-group, is replaced by a heteroatom, such

as -O-, -S-, -NH-, -N(CH₃)-, or is replaced by a replacing-group selected from the

group consisting of -N=N-, -CO-C=C-, -CH(OH)-, -CO-, -SO-, -CH₂(SO)-, -SO₂-,

-CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH=CH-

and -C≡C- with the proviso that oxygen atoms are not directly linked to each other;

X^1 and X^2 each independently represent -O-, -S-, -NH-, -N(CH₃)-, -N=N-, -CH=N-,
 , -N=CH-, -CO-C=C-, -CH(OH)-, -CO-, -CH₂O-, -OCH₂-, -CH₂(CO)-, -SO-, -CH₂(SO)-,
 -SO₂-, -CH₂(SO₂)-, -OCF₂-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-,
 -OSO-, -CH₂-CH₂-, -CH₂-CH₂-CH₂-CH₂-, -OCH₂-, -CH₂O-, -CH=CH-, -C≡C- or a
 5 single bond;

n^1 and n^2 are integers, each independently having a value from 0, 1, 2, 3, 4,
 preferably 1,

SP¹ represents a nonaromatic or aromatic, carbocyclic or heterocyclic group, or a
 CH=CH-group, C≡C-group or a branched or unbranched C₃-C₂₄-alkylen group,
 10 wherein one or more C-atom, -CH- or -CH₂-group, is not replaced, or, in which one
 or more C-atom, -CH- or -CH₂-group, is replaced by a heteroatom or at least a single
 replacing-group selected from the group consisting of -N=N-, -CO-C=C-, CO-,
 -CH₂(CO)-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-,
 -S-CO-, -CO-S-, -SOO-, -OSO-, OCH₂-, -CH₂O-, -CH=CH- and -C≡C-; with the
 15 proviso that oxygen atoms are not directly linked to each other;

more preferably SP¹ represents a CH=CH-group (cis or trans), C≡C-group or
 substituted or unsubstituted C₃-C₁₂alkylen, most preferably C₃-C₆alkylen, especially
 n-propylen, n-butylen, n-pentylen, n-hexylen, wherein one or more C-atom, -CH- or
 -CH₂-group, is not replaced, or, in which one or more C-atom, -CH- or -CH₂-group, is
 20 replaced by -O- or -S-, or at least a single CH=CH-group (cis or trans); with the
 proviso that oxygen atoms are not directly linked to each other;

SP² represents a substituted or unsubstituted spacer;

preferably SP² represents a nonaromatic or aromatic, carbocyclic or heterocyclic
 25 group, or branched or unbranched C₁-C₂₄-alkylen group, wherein one or more C-
 atom, -CH- or -CH₂-group, is not replaced, or, in which one or more C-atom, -CH- or
 -CH₂-group, is replaced by a heteroatom or at least by a single replacing-group
 selected from the group consisting of -N=N-, -CO-C=C-, CO-, -CH₂(CO)-, -SO-,
 -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-,
 30 -OSO-, OCH₂-, -CH₂O-, -CH=CH- and -C≡C-; with the proviso that oxygen atoms are
 not directly linked to each other;

- more preferably SP^2 represents substituted or unsubstituted C_1 - C_{12} alkylen, most preferably C_1 - C_6 alkylen, especially methylen, ethylene, n-propylene, n-butylen, n-pentylen, n-hexylen, wherein one or more C-atom, -CH- or - CH_2 -group, is not replaced, or, in which one or more C-atom, -CH- or - CH_2 -group, is replaced by a heteroatom or at least a single by a replacing-group selected from the group consisting of -N=N-, -CO-C=C-, CO-, - CH_2 (CO)-, -SO-, - CH_2 (SO)-, -SO₂-, - CH_2 (SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, OCH₂-, - CH_2 O-, -CH=CH- and -C≡C-; with the proviso that oxygen atoms are not directly linked to each other;
- 10 especially most preferably SP^2 represents unsubstituted C_1 - C_6 alkylene, methylene, ethylene, n-propylene, n-butylen, n-pentylen, n-hexylen, wherein one or more C-atom, -CH- or - CH_2 -group, is not replaced, or, in which one or more C-atom, -CH- or - CH_2 -group, is replaced by -O- or -S-, or at least a single CH=CH-group; with the proviso that oxygen atoms are not directly linked to each other;
- 15 P is a polymerizable group.

Further preferred is compound (I) wherein SP^1 and SP^2 are different from each other.


- 20 In the context of the present invention
- halogen has the meaning of fluoride, chloride, bromide and iodide, preferably of fluoride and chloride;
 - -CH=CH- has the meaning of the corresponding cis or trans group;
 - substituent(s) are preferably halogen, aryl, cycloalkyl, amino, cyano, epoxy, hydroxy, nitro, oxo, alkyl, alkoxy, C_1 - C_{20} -alkoxycarbonyl, alkylcarbonyloxy, alkylcarbonyl, alkylcarbonylamino;
 - the term alkyl used as a single term or in combined words or in combination with other terms is for example C_1 - C_{24} alkyl, preferably C_1 - C_{10} alkyl, more preferably C_1 - C_6 alkyl, which is substituted, unsubstituted, branched, unbranched, unreplaced or in which one or more C-atoms may be replaced by heteroatom, such as -O-, -S-, -N(CH₃)-, or replacing-groups selected from the
- 30

- group consisting of -N=N-, -CO-C=C-, -CO-, -CH₂(CO)-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH₂-CH₂-, -OCH₂-, -CH₂O-, -CH=CH-, -C≡C- and a single bond; preferred is methyl, ethyl, propyl, isopropyl, n-butyl, iso-butyl, isopentyl, n-pentyl, n-hexyl, iso-hexyl, or is replaced by -O-, -COO-, -OCO -;
- 5
- the term alkylene is the biradical derivative of alkyl, wherein alkyl has the above-described meanings and preferences;
 - the term alkoxy is the -O-alkyl derivate, the term alkoxycarbonyl is the -COO-alkyl derivate, the term alkylcarbonyloxy is the -OCO-alkyl derivate, the term
- 10
- alkylcarbonyl is the OC-alkyl derivate, the term alkylcarbonylamino is the -HNOC-alkyl derivate, wherein alkyl has the above given meanings and preferences,
 - the term aryl is the residue of an aromatic group;
 - the term cycloalkyl is the residue of an non-aromatic, carbocyclic or
- 15
- heterocyclic group;
 - the term hydrocarbon includes straight-chain and branched alkyl, alkylene, alkenyl, alkenylene, alkenyl, alkinylene;
 - the term nonaromatic includes carbocyclic or heterocyclic groups
 - the term aromatic includes carbocyclic or heterocyclic groups, which are
- 20
- monocyclic, two adjacent monocyclic rings of five or six atoms, a bicyclic ring system of eight, nine or ten atoms, or a tricyclic ring system of thirteen or fourteen atoms; preferably, the term "aromatic", denotes incorporating five, six, ten or 14 ring atoms, e.g. furan, benzene or phenylene, pyridine, triazine, pyrimidine, naphthalene, phenanthrene, biphenylene or triphenylene, or
- 25
- tetraline units which are uninterrupted or interrupted by at least a single heteroatom and/or at least a single bridging group; preferred aromatic group are benzene, phenylene, biphenylene or triphenylen and most preferably phenylene; preferably the aromatic, carbocyclic or heterocyclic group is for example unsubstituted or mono- or poly-substituted; preferred substituents of
- 30
- carbocyclic or heterocyclic aromatic groups are at least one polar group and/or an alkyl, acryloyloxy, alkylacryloyloxy, alkoxy, alkylcarbonyloxy, alkylloxycarbonyloxy, alkylloxocarbonyloxy, methacryloyloxy, vinyl, vinyloxy

and/or allyloxy group; preferred polar groups are nitro, halogen, hydroxyl; cyano or a carboxy group;

- the term phenylene or phenyl, as used in the context of the present invention, preferably denotes a 1,2-, 1,3- or 1,4-phenylene or phenyl groups, which are optionally substituted. It is preferred that the phenylene group is either a 1,3- or a 1,4-phenyl(ene) group. 1,4-phenyl(ene) groups are especially preferred.


Preferably, C¹ and C³ are selected from:

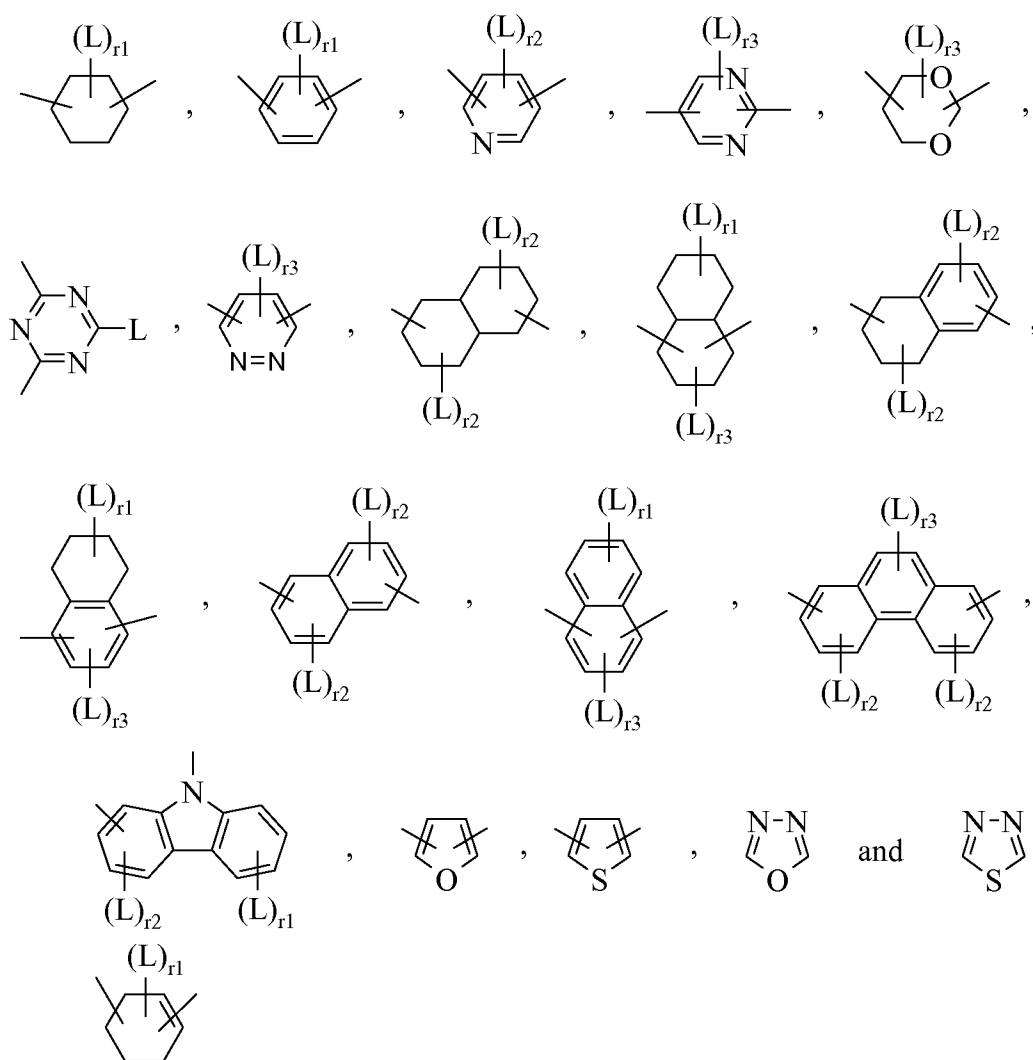

wherein:

- L represents hydrogen, halogen, C₁–C₂₄-alkyl, preferably methyl, ethyl, n-butyl, n-hexyl; C₁–C₂₄-alkoxy, C₁–C₂₄-alkoxycarbonyl, C₁–C₂₄-alkylcarbonyloxy, C₁–C₂₄-alkylcarbonyl, preferably -COCH₃; cyano, C₁–C₂₄-alkylcarbonylamino; or -NO₂,
- 5 r¹ being 0, 1, 2, 3, or 4,
 r² being 0, 1, 2, or 3, and
 r³ being 0, 1, or 2.


More preferably C¹ and C³ are selected from the group of compounds consisting of

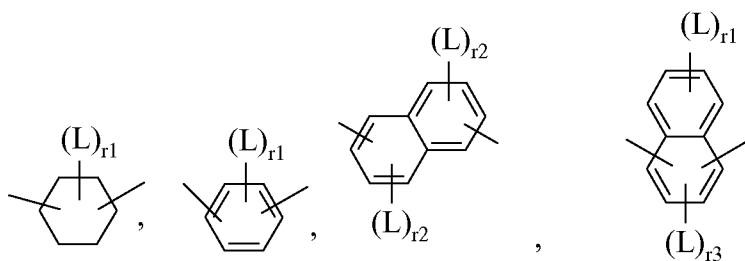


- 10 wherein


L represents hydrogen, halogen, methyl, ethyl, propyl, butyl, pentyl, hexyl;
 C₁–C₆-alkoxy, -COCH₃ nitrile or -NO₂,
 r¹, r² and r³ being independently from each other 0 or 1.

- 15 Preferably, C² is selected from the achiral groups C²ⁱ of compounds shown below:

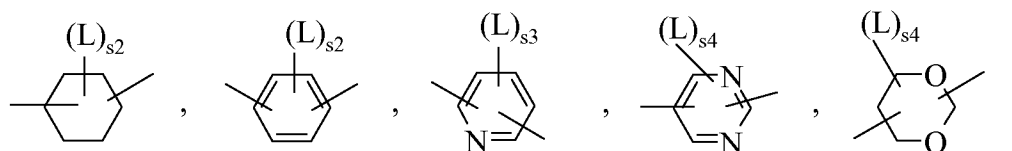

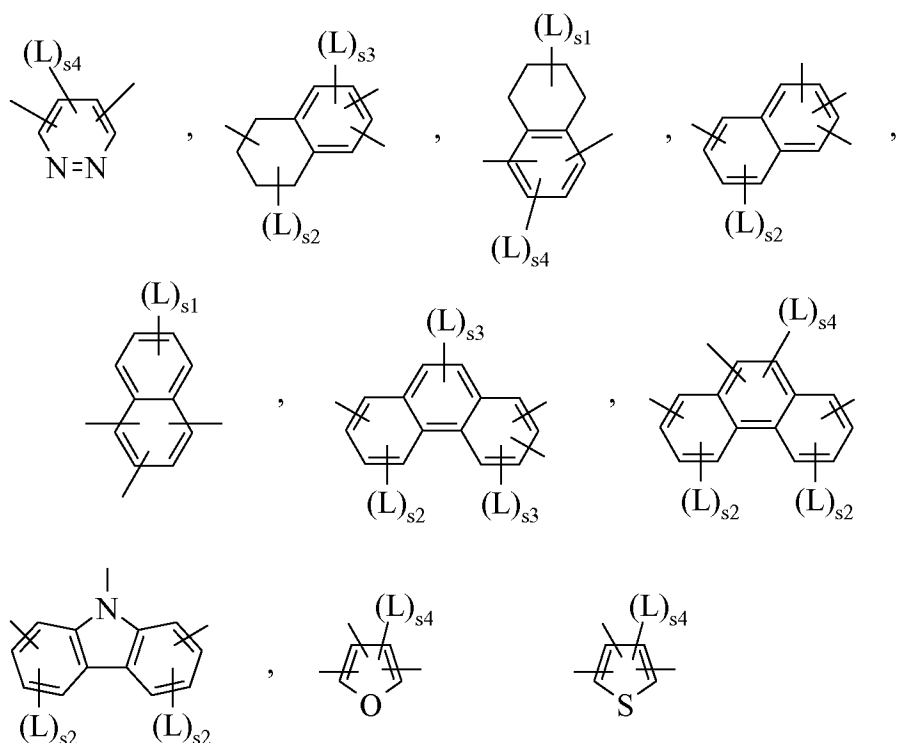

and the chiral groups $C^{2''}$ of compounds shown below:

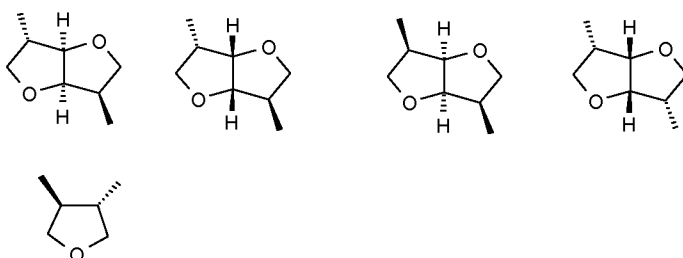

5

wherein:

- L represents hydrogen, unbranched hydrocarbon group of 1 to 6 C-atoms, wherein one or more C-atom, -CH- or -CH₂-group, is not replaced, or, in which one or more C-atom, -CH- or -CH₂-group, is replaced by a heteroatom, which is -O-, -S-, -NH-, -N(CH₃)-, or is replaced by a replacing-group selected from the group consisting of -N=N-, -CO-C=C-, -CH(OH)-, -CO-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH=CH- and -C≡C-, with the proviso that oxygen atoms are not directly linked to each other; preferably
- 10

in which one or more C-atom, -CH- or -CH₂-group is not replaced, or is replaced by a -O-, or -COO-, -O(CO)-, -O(CO)-O; more preferably

L is hydrogen, methyl, ethyl, propyl, methoxy and most preferably hydrogen or methyl, ethyl or methoxy, and especially most preferred hydrogen or methyl;

5

s¹ being 0, 1, 2, 3, or 4,


s² being 0, 1, 2, or 3,

s³ being 0, 1, or 2 and

s⁴ being 0 or 1; and preferably s¹, s² and s⁴ being independently from each other 0 or 1.


10

More preferably C² is selected from the achiral groups C^{2'} of compounds shown below:

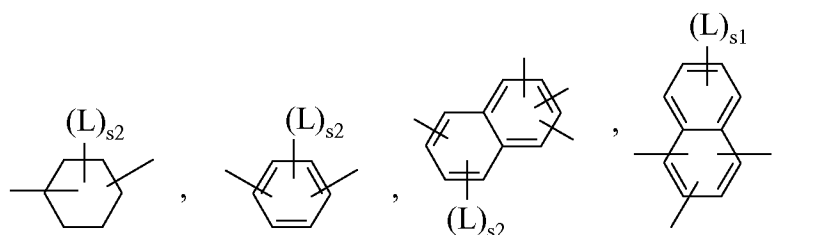

15


and the chiral groups C^{2''} of compounds shown below:

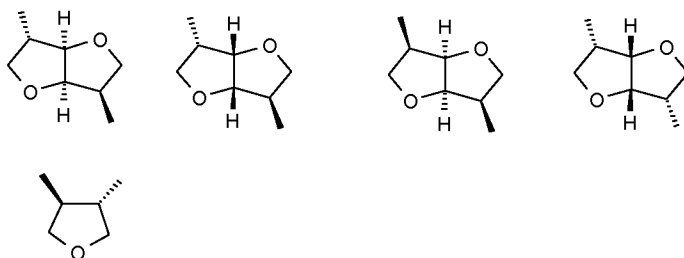


wherein L, s¹ and s² have the same meanings and preferences described above.

20

Most preferably C² is selected from the achiral groups C^{2'} of compounds shown below:

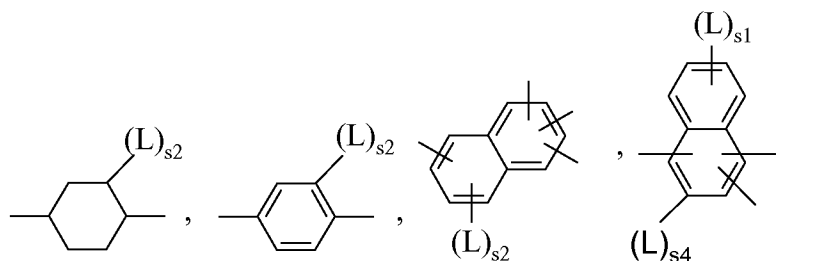


and the chiral groups $C^{2'}$ shown below:



- 5 wherein L, s^1 , s^2 and s^4 have the same meanings and preferences described above.


Further, more preferred is a compound (I), wherein P is $CH_2=CZ^1-COO-$,



wherein k is an integer from 1 to 20; or

- 10 P is $HO-CZ^2Z^3-$, $HS-CZ^2Z^3-$, HZ^2N- , $CH_2=CZ^1-CO-NH-$,
 $CH_2=CZ^2-(O)_{k1}-$, wherein $k1$ is 0 or 1; $CH_3-CH=CH-O-$, $(CH_2=CH)_2CH-OCO-$,
 $(CH_2=CH-CH_2)_2CH-OCO$, $(CH_2=CH)_2CH-O-$, $(CH_2=CH-CH_2)_2N-$,
 $(CH_2=CH-CH_2)_2N-CO-$ or $Z^4Z^5Z^6Si-$, wherein Z^1 is H, Cl, CN, phenyl or C_1-C_6 alkyl, Z^2
and Z^3 each independently being H or C_1-C_6 alkyl,
15 Z^4 , Z^5 and Z^6 each independently being Cl, oxaalkyl or oxacarbonylalkyl with 1 to 6 C-atoms.

Preferably P is $CH_2=CZ^1-COO-$




wherein Z^1 and Z^2 are independently from each other H or C_1 - C_6 alkyl, preferably H or methyl and K is an integer from 1 to 6, preferably 1.

More preferably P is $CH_2=CZ^1-COO-$ wherein Z^1 is H, or C_1 - C_6 alkyl, which is especially methyl.

5


In addition, more preferred is a compound of formula (II):

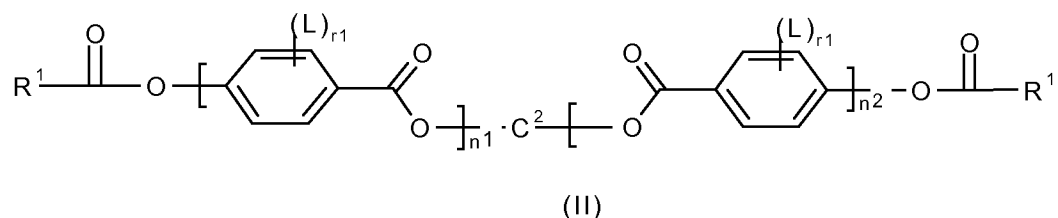

wherein C^2 , R^1 , L, r^1 , n^1 , n^2 have the meanings and preferences as given above; and especially more preferred is compound (II), wherein

- 10 C^2 is 1,4:3,6-dianhydro-2,5-dideoxy-2,5-dimethyl-D-mannitol, 1,4:3,6-dianhydro-D-mannitol, 1,4:3,6-dianhydro-2,5-dideoxy-2,5-dimethyl-D-glucitol, 1,4:3,6-dianhydrosorbitol-2,5-dimethyl-ether, or 1,4-phenylene, which is unsubstituted or substituted with an unbranched C_1 - C_6 alkylen group, wherein one or more C-atom, -CH- or - CH_2 -group, is not replaced, or, is replaced by -O-, -CO-, -COO-, -O(CO)-, or -O(CO)-O-, with the proviso that oxygen atoms are not directly linked to each other, and; and R^1 , L, r^1 have the meaning and preferences as given above;
- 15 and more preferred wherein r^1 is 0.

Especially more preferred is compound of formula (IV):

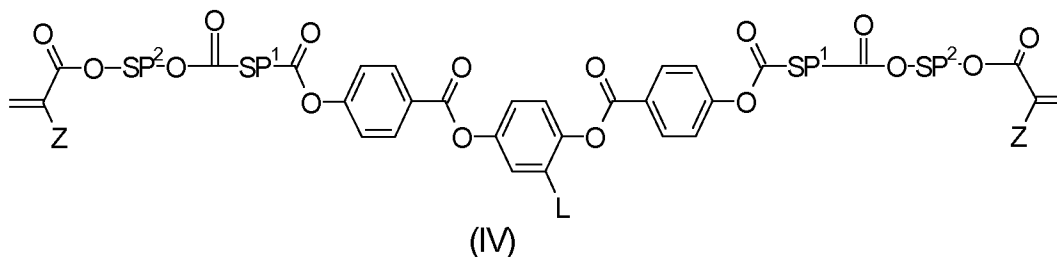

20

wherein SP^1 , SP^2 and L have the same meanings and preferences as described above, and Z is hydrogen or methyl.

Further, more preferred are compounds (I) having an adhesion of > 4 , preferably of more than >5 .

The adhesion values are based on the average of a 2 times testing, a removing test by pulling at 180° and then at 90° to the substrate, and belong to following scale:

- 5 5- 0% of the area is removed
4- less than 10% of the area is removed
3- between 10-30% of the area is removed
2- between 30-50% of the area is removed
1- more than 50% of the area is removed
10 *removed area is the released area of the sample, which was stuck with an adhesive tape, which was then tried to pull at 180° and 90° .

- The adhesion values are generated under the following standard procedure: First a surface area of a sample comprising compound (I) (manufactured in accordance to application/example 7 of this invention), which is free of defects such as for example
15 scratch or dusts, and which is 1-2 cm away from the edges, is selected. Then an adhesive tape (Nichiban adhesive tape) is applied perpendicularly to the direction of the linearly polarised light used for orienting the orientation layer (at a temperature of 25°C ($\pm 2^\circ\text{C}$) and a humidity of 50% ($\pm 10\%$)) and strongly stuck on the lattice
20 surface, and then let stayed there for 1 min waiting time. After this waiting time the adhesive tape is quickly removed by pulling first at 180° to the substrate and secondly at 90° to the substrate.

- A further embodiment of the present invention relates to a liquid crystalline composition comprising at least a compound of formula (I) and optionally a further
25 polymerisable liquid crystal compound and/or additive.

- Polymerisable liquid crystal compounds are known in the art and especially preferred and herewith incorporated by reference are polymerisable liquid crystalline compounds described in WO 2005/105932, WO 2005/054406, WO 2004/085547,
30 WO 2003/027056, US 2004/0164272, US 6746729, US 6733690, WO 2000/48985, WO 2000/07975, WO 2000/04110, WO, 2000/05189, WO 99/37735, US 6395351, US 5700393, US 5851424 and US 5650534.


More preferred is a liquid crystalline composition comprising at least a compound of formula (I), wherein C^2 is selected from the achiral groups $C^{2'}$ within the above-given meanings and preferences.

5

Further, more preferred is a liquid crystalline composition comprising compounds of formula (I), wherein C^2 is selected from the achiral groups $C^{2'}$ within the above-given meaning, and at least a single compound of formula (I), wherein C^2 is a chiral group selected from the groups $C^{2''}$ within the above-given meanings and preferences; or a composition comprising at least two different compounds of formula (I) with are C^2 .


10

In addition, more preferred do liquid crystalline compositions comprise at least a compound (I), and at least a compound (III)


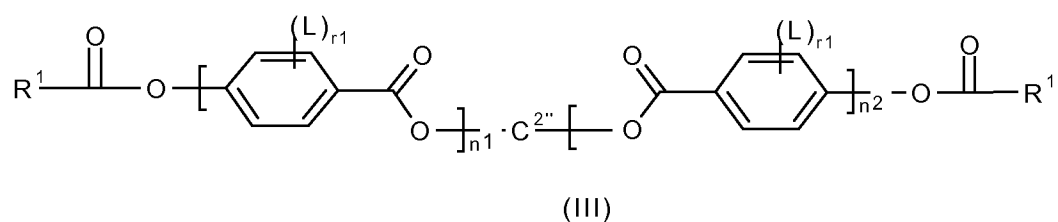


15 wherein C^2 , $C^{2''}$, R^1 , L , r^1 , n^1 , n^2 have the meanings and preferences as given above.

Further, more preferred do liquid crystalline compositions comprise at least a single compound (I), and three compounds (V), (VI) and (VII)

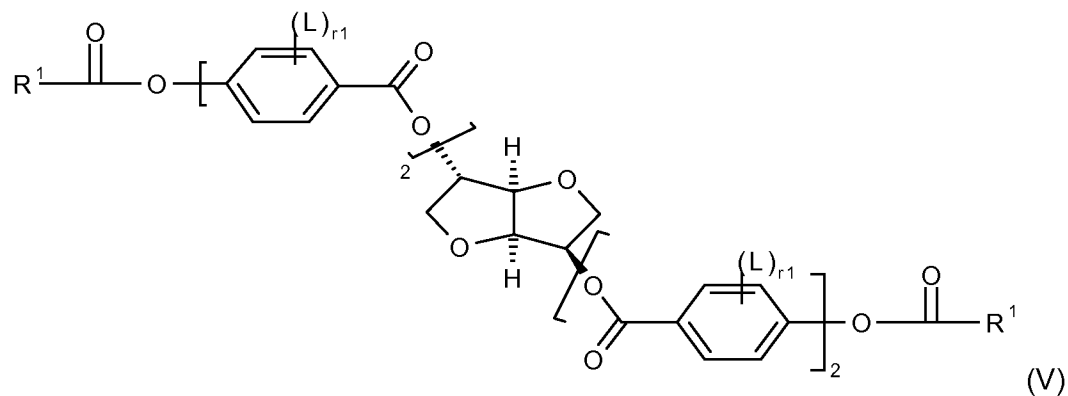

20

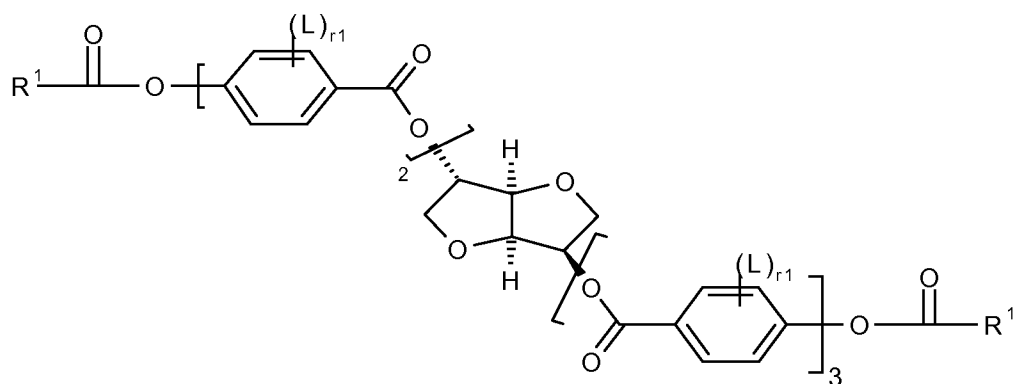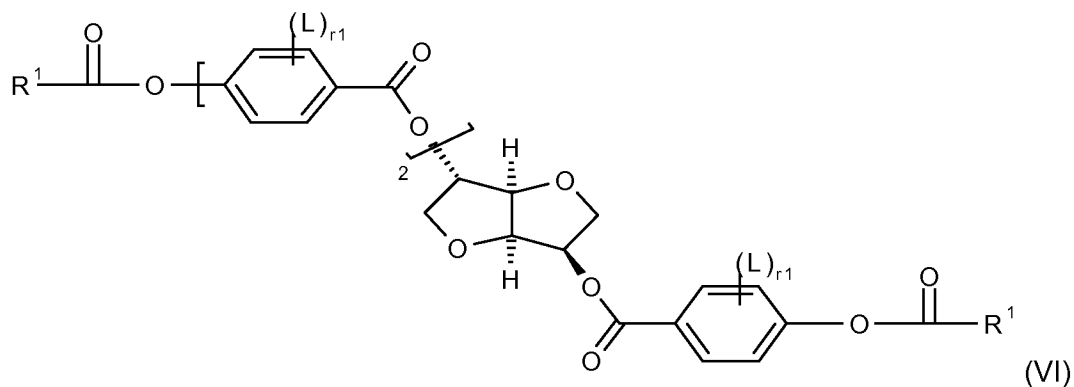

(VII)

5 wherein R^1 , L and r_1 have the above given meanings and preferences.

The amount of the components in a liquid crystalline composition depends on the envisaged use. If a liquid crystalline composition are desired the amount of components in the compositions of the invention is limited by the liquid crystal phase of the composition which has to be preserved. Conventionally, compound (I) with or without chiral groups C^2 have an amount of 0.1 to 99% by weight of the composition, preferably an amount of 1 to 50% by weight, even more preferably an amount of 1 to 30 % by weight and especially even more preferably an amount of 1 to 10% by weight, with the proviso that the sum of the weight percentages of all components of the mixture is 100.

Further preferably the liquid crystalline compositions of the present invention comprise

- a) 0.1 to 99.1% by weight of a compound (I), wherein C^2 is $C^{2'}$,
b) 0.1 to 99.1% by weight of a chiral compound (I), wherein C^2 is $C^{2''}$
, wherein C^2 , $C^{2'}$ and $C^{2''}$ have the above-given meanings and preferences, and
wherein the sum of the weight percentages of all components of the mixture is 100;
5 preferably, the chiral component (I), is in an amount of 0.1 to 20% by weight in the
composition.

In addition, preferably the liquid crystalline compositions of the present invention
comprise compound (I) and reactive or not-reactive chiral compound.

- 10 Reactive and not-reactive chiral compounds are known in the art and described in
U.S. Patent No 5,798,147 and herewith incorporated by reference.

Most preferred is a liquid crystalline composition comprising compounds of formula
(I) and further components, such as for example additives, solvents.

15

Generally used additives are antioxidants, initiators, such as photoinitiators,
accelerators, dyes, inhibitors, activators, fillers, chain transfer inhibitor, pigments,
anti-static agents, flame-retardant agents, thickeners, thixotropic agents, surface-
active agents, viscosity modifiers, extending oils, plasticizers, tackifiers, catalysts,
20 sensitizers, stabilizers, such as e.g. phenol derivatives, such as 4-ethoxyphenol or
2,6-di-tert-butyl-4-methylphenol (BHT), lubricating agents; dispersing agents; a
polymeric binder and/or monomeric compounds which can be converted into the
polymeric binder by polymerization, or, in the case of emulsion coatings and printing
inks, a dispersion auxiliary, such as disclosed in U.S. Patent No 5,798,147;
25 hydrophobing agents, adhesive agents, flow improvers, defoaming agents,
deaerators, diluents, auxiliaries, colorants, dyes and pigments, curing inhibitors, such
as hydroquinone, p-tert.-butyl catechol; 2,6-di tert.-butyl-p-methylphenol;
phenothiazine; N-phenyl-2-naphthylamine; or a photo-orientable monomer or
oligomer or polymer as described in EP 1 090 325 B;

30

The amount of additives in the composition is limited by the requirement that the liquid crystal phase of the composition of the invention has to be preserved.

Conventionally, the reactive or non reactive additives have an amount of 0.01 to 50% by weight of the composition, preferably an amount of 1 to 30% by weight, even more preferably an amount of 1 to 10 % by weight.

In case the compositions of the invention comprise a stabilizer, the latter is generally present in an amount of 0.01 to 5% by weight of the composition, preferably in an amount of 0.1 to 1% by weight.

The initiator is employed in an amount effective for initiating cure of the composition.

The effective amount depends upon the process parameters and starting material properties. Typical, the amount ranges from 0.01 to 10 % by weight relative to the total weight % of the composition, preferably from 0.5 to 8 % by weight, more preferred from 1 to 5 % by weight. Combinations of two or more initiators (photo- or thermal initiators) may also be employed.

The liquid crystalline composition of the present invention is solid, or diluted in a solvent, which is an organic solvent and/or water, as a solution, gel, dispersion or emulsion.

Preferably, the composition is a clear solution. The solvent or solvent mixture used in the present application may be any compound that can dissolve the liquid crystal composition according to the invention. At least one solvent such as a common polar solvent or a nonpolar solvent may be used. The solvents which are particularly preferred are those leading to a good coatability or printability of the solution of the material to the substrate to be coated.

Most preferred does a liquid crystalline composition comprise compounds of formula (I) and a non-polar solvent.

Non-polar solvents are compounds that have low dielectric constants and are not miscible with water, such as preferably hexane, benzene, toluene, diethyl ether, 1,4-dioxane, tetrahydrofuran (THF), chloroform, ethyl acetate, dichloromethane, 1,3-dioxolane (DXG), and more preferably 1,3-dioxolane (DXG).

Polar solvents are aprotic or protic.

Most preferred does a liquid crystalline composition comprise compounds of formula (I) and a polar solvent.

Polar aprotic solvents are solvents that share ion dissolving power with protic solvents but lack an acidic hydrogen. These solvents generally have high dielectric constants and high polarity. Preferred polar solvents are acetone, acetonitrile (MeCN), dimethylformamide (DMF), dimethyl sulfoxide (DMSO), N-methylpyrrolidone (NMP), N-ethylpyrrolidone, N-vinylpyrrolidone, gamma.-butyrolactone (BL), N-methylmorpholine, propylene glycol diacetate, chlorobenzene, tetrahydrofuran, cyclopentanone (CP), methylethylketone (MEK), anisole (AN), cyclohexanone (CHN), methyl isobutyl ketone (MIBK), 1-methoxy-2-propanol acetate (MPA) and mixtures thereof.

Polar protic solvents are solvents, which contain dissociable H⁺, such as hydrogen fluoride. The molecules of such solvents can donate an H⁺ (proton). Conversely, aprotic solvents cannot donate hydrogen bonds. Common characteristics of protic solvents are to display hydrogen bonding, to have an acidic hydrogen (although they may be very weak acids), to be able to stabilize ions (cations by unshared free electron pairs, anions by hydrogen bonding). Examples are acetic acid, n-butanol, isopropanol, n-propanol, ethanol, methanol, formic acid, 2-butoxyethanol (BC), ethylcarbitol, butylcarbitol, ethylcarbitol acetate, ethylene glycol, propylene glycol monoacetate, dipropylene glycol, and dipropylene glycol monomethyl ether, and water.

Preferably the organic solvents used in the present application are protic or aprotic polar or non-polar solvents.

Preferred solvents are, however not limited to:

- ketones such as for example acetone, cyclopentanone (CP), cyclohexanone (CH), methyl isobutyl ketone (MIBK), methylethylketone (MEK),
- amides such as N,N-dimethylformamide (DMF), N-methylpyrrolidone (NMP), N-ethylpyrrolidone, N-vinylpyrrolidone, N,N-dimethylacetamide,
- carbamates
- ether such as tetrahydrofuran (THF), ethylene glycol, dipropylene glycol, butylcarbitol, ethylcarbitol acetate, dipropylene glycol monomethyl ether, 1,3-dioxolane (DXG)

- ester such as ethyl acetate (EA), 1-methoxy-2-propanol acetate (MPA), gamma-butyrolactone (BL), propylene glycol monoacetate, propylene glycol diacetate,
- alcohols, such as 2-butoxyethanol (BC), ethylcellosolve, butylcellosolve,
- dimethyl sulfoxide (DMSO),

- 5 - halogen hydrocarbons such as dichloromethane, chlorobenzene,
- apolar solvents as for example, however not limited to hydrocarbons, such as hexane, heptane, toluene; anisol, petrolether.

and mixtures thereof.

- More preferred solvents are acetone, cyclopentanone (CP), cyclohexanone (CH),
- 10 methyl isobutyl ketone (MIBK), methylethylketone (MEK), N,N-dimethylformamide (DMF), N-methylpyrrolidone (NMP), N-ethylpyrrolidone, N-vinylpyrrolidone, N,N-dimethylacetamide, (AN), tetrahydrofuran (THF), 1,3-dioxolane (DXG), ethylene glycol, dipropylene glycol, butylcarbitol, ethylcarbitol acetate, dipropylene glycol monomethyl ether, ethyl acetate (EA), 1-methoxy-2-propanol acetate (MPA), gamma-
- 15 butyrolactone (BL), propylene glycol monoacetate, propylene glycol diacetate, dipropylene glycol monomethyl ether, dimethyl sulfoxide (DMSO).

Most preferred are cyclopentanone (CP), cyclohexanone (CH), methyl isobutyl ketone (MIBK), methylethylketone (MEK), ethyl acetate (EA), 1-methoxy-2-propanol acetate (MPA), 1,3-dioxolane (DXG), dimethyl sulfoxide (DMSO).

20

Depending on the envisaged use, it can be of advantage to add a solvent. Typical concentrations of the compositions disposed in a solvent are between 2 and 50%, preferred between 10 and 40% by weight of the active ingredients, such as compound (I) and optionally an additive, in said solvent.

25


The compounds (I) of the present invention can be prepared by method known in the art.

Further, the present invention relates also to a process for the preparation of ester group comprising compounds, preferably compound (I),


30

comprising


- a) bringing into contact a compound of formula (VIII)




with a compound of formula (IX)



- 5 b) and a dihydroxy compound of formula (XI)



or a compound of formula (XII)



wherein P, Sp^2 , Sp^1 , C^1 , C^2 , C^3 , n^1 , n^2 have the same meanings as described above,

- 10 Z is hydrogen or methyl and Y represents COOH, COOC₁-C₆alkyl, halogen or CN, Y is preferably CN.

Preferably, the steps a) and b) are conducted in a "one pot reaction", or alternatively the process can be conducted in more than one step, by isolating for example the
15 intermediate generated in step a).

Preferably the compounds are brought in contact by coupling them.

In general, the coupling in steps a) can be conducted with or without solvent.

- 20 However, it may be of advantage to use solvents, such as polar or unpolar aprotic solvents within the below given meaning of solvents. Preferred solvents are tetrahydrofuran, toluene, xylene.

Process step b) is preferably conducted in the presence of a solvent, preferably of an aprotic solvent.

25

Further, the coupling steps a) and b) can be conducted in the presence of stabilizers, 2,6-di-tert-butyl-4-methyl-phenol.

Preferably, steps a) is conducted in the presence of a base such as a tertiary amine.

The temperature of the coupling steps a) and b) depends on the reacting parameters such as the reacting material used.

5 Preferably, step a) is conducted by elevated temperature up to for example 30 to 180°C.

Preferably, the molar ratio of the starting materials in step a) is for example in the range of 1:0.8 to 0.8 :1 and depends on the reactivity and solubility of the used solvents.

10 Preferably, the molar ratio of the dihydroxy (XI) to the compound obtained in step a) is for example in the range of (0.5: 1 to 0.1 : 1); and the molar ratio of the monohydroxy compound of formula (XII) to the compound obtained in step a) is for example in the range of (1: 1 to 1: 0.8).

15 The coupling of step b) is preferably conducted by esterification of the activated carboxylic acids, such as acid chlorides, or by carbodiimide coupling, or by using a mixed anhydride such as methansulfonylchloride, of the compound obtained in step a). Preferably, step b) is conducted in the presence of DMAP or pyridine.

20 The acid chloride of compound obtained in step a) can be conducted according to known processes for the formation of acid chlorides, such as described in standard books. Also the carbodiimide coupling and the reaction with mixed anhydrides can be conducted under known processes described in standard books of chemistry.


25 The hydroxyalkyl acrylates are either commercial products or can be easily prepared by reaction of e.g. acrylic chloride with dihydroxy compound.

The compounds $\text{HO}-(\text{C}^1\text{-X}^1)_n\text{-C}^2\text{-(X}^2\text{-C}^3)_n\text{-OH}$ (XI) or $\text{HO}-(\text{C}^1\text{-X}^1)_n\text{-C}^2\text{-(X}^2\text{-C}^3)_n\text{-Y}$ (XII) are known and can be synthesized according to literature methods (e.g. JP 11080090). They can for example be prepared by or in analogy to the reaction of 4-hydroxybenzoic acid with toluhydroquinone in para-toluenesulfonic acid monohydrate in an aprotic solvent such as o-xylene.


30

A further embodiment of the present invention relates also to a process for the preparation of compound (I) comprising

- a) coupling a dihydroxy compound (XI), $\text{HO}-(\text{C}^1-\text{X}^1)\text{n}^1-\text{C}^2-(\text{X}^2-\text{C}^3)\text{n}^2-\text{OH}$ (XI) or a
 5 monohydroxy compound of formula (XII), $\text{HO}-(\text{C}^1-\text{X}^1)\text{n}^1-\text{C}^2-(\text{X}^2-\text{C}^3)\text{n}^2-\text{Y}$ (XII)
 with a compound of formula (IX)



b) then, coupling the compound obtained in step a) with



- 10 wherein P, Sp^2 , Sp^1 , C^1 , C^2 , C^3 , n^1 , n^2 Y have the above-given meanings and preferences.

- The reaction conditions of steps a) and b) and preferences are as described above for the process of the preparation of compound (I), with the proviso that the starting
 15 material is replaced and the molecule ratios are adapted accordingly.

In addition, the present invention relates to the product obtained by a process described above.

- 20 Further, the present invention comprises methods for the preparation of an unpatterned or patterned birefringent layer comprising polymerising compound (I) or the composition according to the invention.

- The present invention also comprises the use of the compound (I) or the composition
 25 of the invention for the preparation of an unpatterned or patterned birefringence layer.

Preferably, the term “patterning” denotes to birefringence patterning and/or thickness patterning and/or patterning of the optical axis orientation, and/or patterning of the degree of polymerization, and preferably comprising photo-

polymerizing. Birefringence denotes the difference between the extra-ordinary and the ordinary index of refraction.

5 The term "unpatterned" denotes to an uniform oriented birefringence layer over the whole area of the layer.

Further, the present invention comprises a method for the preparation of a birefringence layer comprising polymerizing preferably on an aligning surface a compound (I) or the composition of the invention.

10

In the context of the present invention aligning surface shall mean any surface of a substrate that has aligning capabilities for liquid crystals.

15

The substrate is for example plastic such as PET, polyethyleneterephthalate, or TAC, cellulose triacetate, or any other material such as glass that can be optionally coated with indium tin oxide (ITO). Further, the substrates may comprise coatings which generate or transfer such aligning capabilities. Such coatings are well known as alignment layers.

20

Alignment layers can be prepared using any technique known in the art, which include but is not limited to rubbing, such as rubbed polyimide or polyamic acid, embossing, scratching, oblique deposition of SiO or the like, photolithographic grating, LB films (Langmuir Bodgett films), SAMS (Self Assembled Monolayer Surface), ion irradiation process, laser writing of surface structures, alignment texture transfer by stamping, photo-alignment including for example photo-polymerization, photo-dimerization, photo-decomposition, photo-isomerisation.

25

Preferred alignment layer is a layer of photo-oriented photopolymers. For the preparation of alignment layers the composition of the invention is applied on a substrate and photo-polymerized. Photo-polymerization means that the composition is cured using light, preferably UV light and more preferably UVA, to give a cross-linked birefringent layer. The curing time is dependent, inter alia, on the reactivity of the polymerizable material, the thickness of the coated layer, the type of the polymerization initiator and the power of the UV lamp. Preferred are linearly

30

photo-polymerized alignment layers. Preferred aligning surfaces are PET and alignment layers, especially photo alignment layers.

5 The present invention also relates to a process for the preparation of a birefringent layer comprising compound (I) or a composition according to the invention.

Preferably the process for the preparation of a birefringent layer comprises

- a) coating or printing compound (I) or a composition of the invention on an aligning surface,
- 10 b) optionally drying, and
- c) then, polymerizing, preferably photopolymerizing .

In general the composition is applied by general coating and printing methods known in the art. Coating methods are for example spin coating, air doctor coating, blade
15 coating, knife coating, reverse-roll coating, transfer roll coating, gravure roll coating, kiss roll coating, cast coating, spray coating, slot-orifice coating, calendar coating, electrodepositing coating, dip coating or die coating.

Printing methods are for example relief printing such as flexographic printing, ink jet
20 printing, intaglio printing such as direct gravure printing or offset gravure printing, lithographic printing such as offset printing, or stencil printing such as screen printing.

It depends on the consistence of the composition whether a drying step is conducted. If solvents are comprised by the composition, the composition is usually dried after
25 the applying step.

In general "drying" consists in the extraction of the solvent(s) for example by application of heated gas using for example an air stream that applies the heat by convection and carries away the vapor of solvents (convective or direct drying). Drying is faster at higher temperatures. In addition, product or film qualities also have
30 to be considered in the determination of the temperature applied for the drying. Other possibilities are vacuum drying, where heat is supplied by contact conduction or

radiation (or microwaves) while the produced vapor is removed by the vacuum system; indirect or contact drying (heating through a hot wall), as drum drying, vacuum drying; dielectric drying (radiofrequency or microwaves being absorbed inside the material); freeze drying or lyophilization; mechanical extraction of the solvent.

In a preferred embodiment of the invention, the process comprises photo-polymerizing the applied compound (I) or the composition obtained in step a) or b).

The photo-polymerizing is conducted by radiation.

10 In the context of the present invention radiation is polarized or unpolarized light.

Preferred is unpolarized light, but in specific cases polarized or partially polarized, linearly, circularly or elliptically polarized light can also be applied.

Conventionally, a lamp is used for photo-polymerization. The intensity of the lamp used for the irradiation should be preferably higher than $0,2 \text{ mW/cm}^2$, more preferably higher than 10 mW/cm^2 , most preferably higher than 20 mW/cm^2 , especially most preferably higher than 50 mW/cm^2 .

The photo-polymerizing is also accessible by electron beam (EB).

The present invention also relates to the use of the unpatterned or patterned birefringence layer for optical or electro-optical components and systems, especially multilayer systems, or devices.

Further, the present invention also relates to a method for the preparation of optical or electro-optical components and systems, especially multilayer systems, or devices, which may comprise cholesteric layers, and/or unpatterned or patterned birefringence layer of the present invention.

Patterned or patterned birefringent layer comprising polymerised compound (I) or the composition of the invention.

An optical component, system or device creates, manipulates, or measures electromagnetic radiation.

An electro-optical component, system or device operates by modification of the optical properties of a material by an electric field. Thus it concerns the interaction between the electromagnetic (optical) and the electrical (electronic) states of materials.

5

The present invention further relates to an optical or electro-optical component comprising compound (I) or the composition of the invention.

Preferably, the unpatterned or patterned optical or electro-optical component, can be used for (but are not limited to) a waveguide, a security or brand protection element, a bar code, an optical grating, a filter, a retarder, a compensation film, a reflectively polarizing film, an absorptive polarizing film, an anisotropically scattering film compensator and retardation film, a twisted retarder film, a cholesteric liquid crystal film, a guest-host liquid crystal film, a monomer corrugated film, a polarizer, a piezoelectric cell, a thin film exhibiting non-linear optical properties, a decorative optical element, a brightness enhancement film, a component for wavelength-band-selective compensation, a component for multi-domain compensation, a component of multiview liquid crystal displays, an achromatic retarder, a polarization state correction / adjustment film, a component of optical or electro-optical sensors, a component of brightness enhancement film, a component for light-based telecommunication devices, a patterned G/H-polarizer with an anisotropic absorber, a patterned reflective circular polarizer, a patterned reflective linear polarizer, a patterned MC (monomer corrugated film).

Preferred are security elements, especially transmissive or reflective one; polarizer, compensator and retardation films.

A further aspect of the invention provides an optical or electro-optical component and multi-layer system comprising a compound (I) or composition according to the invention.

30

In addition, the present invention relates to a method for the preparation of optical or electro-optical component comprising compound (I) or the composition of the invention.

Preferably, the present invention relates also to the use of unpatterned or patterned optical or electro-optical component according to the invention as retardation film and/or compensation film and/or reflectively polarizing film and/or absorptively polarizing film and/or anisotropically scattering film for

- 5 (a) twisted nematic (TN) liquid crystal displays, hybrid aligned nematic (HAN) liquid crystal displays, electrically controlled birefringence (ECB) liquid crystal displays, supertwisted nematic (STN) liquid crystal displays, optically compensated birefringence (OCB) liquid crystal displays, pi-cell liquid crystal displays, in-plane switching (IPS) liquid crystal displays, fringe field switching (FFS) liquid crystal
10 displays, vertically aligned (VA) liquid crystal displays; all above display types are applied in either transmissive or reflective or transfective mode;

(b) displays generating three dimensional images or images varying with viewing angle;

- (c) security or brand protection devices;
15 (d) decorative optical devices;
(e) brightness enhancement films;
(f) optical sensors;
(e) light-based telecommunication devices.

- 20 Further, preferably the present invention relates to a monomer corrugated film.

Further, preferably the present invention relates to stacks of above given devices.

A further embodiment of the present invention relates to devices comprising an optical or electro-optical component,

- preferably compensation and retardation films (viewing angle, color shift, contrast,
25 gray level stability, brightness) for:

security elements, such as transmissive and reflective ones;

wavelength-band-selective compensation: birefringent compensation film which is patterned according to the RGB, red, green and blue, subpixels of the liquid crystal display to provide compensation properties optimally adapted to the respective
30 wavelength band transmitted by the subpixel,

multi-domain (e.g. transfective liquid crystal displays) compensation: birefringent compensation film with patterned properties according to the laterally varying properties of the device to be compensated,

- component of multiview liquid crystal displays: compensation or retardation film as a component of a display providing different images for different viewing angles,
component of three dimension liquid crystal displays: compensation or retardation film used as a component of a liquid crystal display providing three dimensional
5 image information,
achromatic retarder: retarder film which in contrast to a simple chromatic retarder provides for a similar change in polarization state for a broader wavelength band, e.g. the whole visible wavelength spectrum,
polarization state correction / adjustment films: birefringent films which are used to
10 correct or adjust the polarization state with the goal to enable the function or improve the performance of an optical device,
component of optical or electro-optical sensors, in particular polarization sensitive/selective sensors,
component of brightness enhancement film,
15 security devices or decorative optical devices,
components for light-based telecommunication devices, in particular devices based on polarized light.

- A further embodiment of the present invention relates to devices comprising a
20 patterned G/H-polarizer with an anisotropic absorber.
Preferably the patterned G/H-polarizer with an anisotropic absorber is a thin film polarizer, in-cell polarizer, a security device or a decorative optical device.

- A further embodiment of the present invention relates to devices comprising a
25 patterned reflective circular polarizer.

- Preferably the patterned reflective circular polarizer is a brightness enhancement film, a security device or a decorative optical device.

- 30 A further embodiment of the present invention relates to devices comprising a patterned reflective linear polarizer.

Preferably the patterned reflective linear polarizer is a brightness enhancement film, a security device or a decorative optical device.

5 A further embodiment of the present invention relates to a beam steering device, which comprises an optical or electro-optical component, preferably compensation and retardation films for wavefront adjustment devices.

10 A further embodiment of the present invention relates to devices comprising a patterned MC, monomer corrugated, film.

Preferably the patterned monomer corrugated film is an anisotropically scattering film, an anisotropic reflector, an anti-reflection film, a film with enhanced birefringence, a security device or a decorative optical device.

15

Especially preferred are in the present invention devices such as for example twisted nematic (TN) liquid crystal displays, hybrid aligned nematic (HAN) liquid crystal displays, electrically controlled birefringence (ECB) liquid crystal displays, supertwisted nematic (STN) liquid crystal displays, optically compensated
20 birefringence (OCB) liquid crystal displays, pi-cell liquid crystal displays, in-plane switching (IPS) liquid crystal displays, fringe field switching (FFS) liquid crystal displays, vertically aligned (VA) liquid crystal displays; all above display types are applied in either transmissive or reflective or transflective mode, which can be used for displays generating three dimensional images or images varying with viewing
25 angle; beam steering device; a light-based telecommunication device; optical sensor; stacks of devices.

In the present invention novel compounds (I) and compositions were found, which exhibit a broad liquid-crystalline thermal range, which have good adhesive properties to substrates and aligning surfaces. Further, these compounds are accessible by way
30 of a simple process. This easy accessibility is very useful for various applications.

Examples:

Definitions used in the examples

TAC = Triacetylcellulose

LPP has the meaning of "linearly photo-oreintable polymer".

For the production of an alignment layer, suitable LPP materials are described for example in patent publications EP 0 611 786, WO 96/10049 and EP 0 763 552, and include cinnamic acid derivatives and ferulic acid derivatives. For the following examples, the LPP material as described in U.S. Patent No. 6,107,427, example 4, is chosen.

This photo-alignment polymer is based on cinnamate as photo-reactive groups. The polymer backbone of the photo-alignment material is of acrylate type.

10 CHN = cyclohexanon

CP = cyclopentanon

AD42 = Irgacure 369, 2-benzyl-2-dimethylaminio-1-(4-morpholinophenyl)-butanone-1 commercially available from BASF

AD282: Irgacure 907, 2-methyl-1[4-(methylthio)phenyl]-2-morpholino-propan-1-one

15 AD138: Tris (2,4-di-tert-butylphenyl)phosphate commercially available from Aldrich

AD184: Tego Flow 300, solution of polyacrylates, from EVONIK

AD43 = BHT, 2,6-di-tert-butyl-4-methyl-phenol, commercially available from Fluka

PP = Polypropylen

K = crystal form


20 N = nematic phase

I = isotropic phase

M = liquid crystalline phase

(S_A) = monotrop smectic A phase


25 Preparation Example 1:

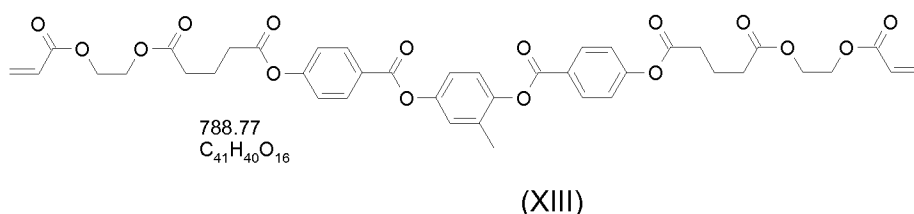


1.1) Preparation (XIII) by Variant a)

1.1.1) A mixture consisting of 276.24 g 4-hydroxybenzoic acid, 124.12 g toluhydroquinone, 20.00 g p-toluenesulfonic acid monohydrate and 1800 ml o-xylene

in a chemical reactor equipped with stirrer, thermometer and separator for the azeotropic removal of water under reflux is heated to reflux in an oil bath of 178°C. Refluxing and separation of water starts at a vapour temperature of ca. 137°C and is continued for a total of 18 hours with ca. 35 ml of water separated. A beige, slightly viscous suspension is formed. It is cooled to 65°C and 1250 ml of toluene are added. After further cooling to 25°C the mixture is stirred for 30 minutes at this temperature and then filtered. The crystalline filter residue is washed with toluene to yield a beige solid. The orange filtrates are discarded. The solid is suspended in 1250 ml ethyl acetate and stirred for 1 hour at 45°C. The suspension is cooled to 6°C, filtered, the filter residue washed with ca. 800 ml of ice-cold ethyl acetate and dried in vacuum at 50°C to constant weight to yield 341.60 g nearly colourless diphenol (XIV). HPLC purity is 99 area%

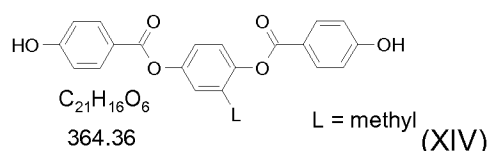

1.1.2) A mixture of 156.76 g 2-hydroxyethyl acrylate, 154.04 g glutaric anhydride and 0.40 g 2,6-di-tert.-butyl-4-methyl-phenol is loaded into a chemical reactor equipped with stirrer and thermometer. The mixture is heated to ca. 30°C and stirred until a homogeneous solution is attained. The heating is stopped and 4.725 ml of triethylamine are added. The exothermic reaction drives the temperature to ca. 90°C within 15 minutes. Cooling is applied to keep the temperature below 90°C. After the exotherm has subsided the reaction mixture is kept at 75°C for 2.5 hours and cooled to ambient temperature. The acid (XV) is obtained as a colourless, viscous liquid in quantitative yield.

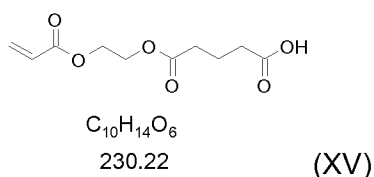

1.1.3.) The mixture consisting of 218.60 g of the diphenol (XIV), 322.20 g of the acid (XV), 24.40 g 4-dimethylaminopyridine, 2.50 g 2,6-di-tert.butyl-p-cresol (BHT) and 1400 ml toluene in a chemical reactor equipped with stirrer, thermometer and

addition funnel is cooled to +4°C. The solution of 289.00 g dicyclohexylcarbodiimide (DCC) in 500 ml toluene is added within 1 hour, keeping the reaction temperature below +10°C. The cooling device is removed and the reaction mixture stirred overnight (16 hours) at room temperature (22 – 25°C). To the suspension are added
5 1000 ml of a aqueous 5%-solution of sodium bicarbonate, stirring continued for 15 minutes, and then the mixture is filtered to remove the precipitated DCC-urea. The 2-phase filtrate is separated and the lower aqueous phase discarded. The toluene phase is once washed with 1000 ml 10%-sodium chloride solution and the toluene partly distilled off to yield ca. 825 g of a yellow solution. It is diluted with 825 ml
10 toluene to give a solid content of ca. 35%. The product is crystallized by slowly adding this solution to 4720 ml of isopropanol, cooled to -10°C. The suspension is stirred for 1 hour at -10°C, filtered and the crystalline product dried in vacuum at 25°C to constant weight. The yield of colourless, crystalline product (XIII) is 470 g. Analytical data:

15 HPLC purity: 93 area%

Melting point: 5°C

1.2) Preparation (XIII) by Variant b)

1.2.1 A mixture of 17.4g 2-hydroxyethyl acrylate, 17.1g glutaric anhydride and 0.05g
20 2,6-di-tert.-butyl-4-methyl-phenol is loaded into a chemical reactor equipped with stirrer and thermometer. THF 60mL and 22g of triethylamine are added to the mixture. The solution is heated to 50°C and stirred for two hours. The solution is cooled to -30°C and a mixture of 23g of triethylamine and 18.9g of methansulfonyl chloride is added in drops. After 1.5h, 10.9g of diphenol (XIV) and 1.5g of 4-
25 dimethylaminopyridine in 60mL tetrahydrofuran are added to the mixture and stirred overnight (16 hours) at room temperature (22 – 25°C). The mixture is filtrated off through celite and silica gel. The solution is extracted with 200mL of ethyl acetate, washed with 100mL of HCl 0.5N and 100mL of water. The organic phase is dried over sodium sulfate, and the excess of solvent is removed under vaccum. Purification
30 on chromatography column: SiO₂, cyclohexyl/ ethyl acetate 6/4 as eluent, gives a 19g of a slight yellow oil. The product is crystallized by slowly adding 30mL ethanol to a solution made by 19g of product solubilised in 20mL ethyl acetate cooled at -10°C. The suspension is stirred for 1 hour at -10°C, filtered and the crystalline product is

dried in vacuum at 25°C to constant weight. The yield of colourless, crystalline product (XIII) is 13.3g. Analytical data:


HPLC purity: 96 area%

Melting point: 5°C

5 Mass spectroscopy +EMS: 806.4 M NH₄⁺








According to the synthesis of Example1/Variant b) the below in Table 1 listed compounds are prepared, with the proviso that for the preparation

- 10 - of B1, 2-hydroxyethyl acrylate, is replaced by 2-hydroxyethyl methacrylate and glutaric anhydride is replaced by maleic anhydride;
- of B2, glutaric anhydride is replaced by maleic anhydride;
- of B3, 2-hydroxyethyl acrylate, is replaced by 2-hydroxyethyl methacrylate and glutaric anhydride is replaced by maleic anhydride and the reactant methansulfonyl chloride is replaced by thionyle chloride;
- 15 - of B4, 2-hydroxyethyl acrylate, is replaced by 2-hydroxypropyl acrylate;
- of B5, 2-hydroxyethyl acrylate, is replaced by 2-hydroxybutyl acrylate;
- of B6, 2-hydroxyethyl acrylate, is replaced by 4-hydroxybut-2-enyl- acrylate;
- of B7, 2-hydroxyethyl acrylate, is replaced by 2-hydroxypentyl acrylate;

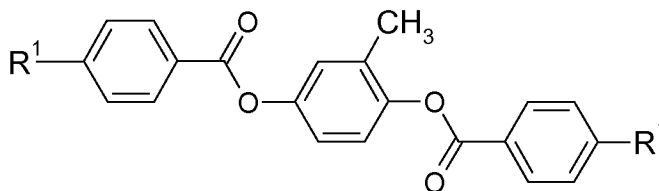

25


Table 1

Structure R ¹	Liquid crystalline properties	Mass spectroscopy +EMS
 B1	K-78-N-158-I Supercooling 20°C	802.2 M NH ₄ ⁺
 B2	K-78-N-192-I Supercooling 20°C	774.2 M NH ₄ ⁺
 B3	K-82-N-161-I Supercooling to 52°C	802.2 M NH ₄ ⁺
 B4	K-54-N-83-I Supercooling to 39°C	834.3 M NH ₄ ⁺
 B5	K-60-N-75-I Supercooling to 35°C	862.5 M NH ₄ ⁺
 B6	K-52-N-79.5-I Supercooling to 20°C	858.3 M NH ₄ ⁺
 B7	K-34-N-70.5-I Supercooling 20°C	890.3 M NH ₄ ⁺

According to the synthesis of Example 1/Variant b) the below in Table 2 listed compounds are prepared, with the proviso that for the preparation

- of C1, diphenol (XIV), which is prepared according to example 1.1.1) is replaced by a diphenol, wherein L is hydrogen, and the starting material toluhydroquinone is replaced by hydroquinone;

- of C2, diphenol (XIV), which is prepared according to example 1.1.1) is replaced by a diphenol, wherein L is methoxy, and the starting material toluhydroquinone is replaced by 2-methoxy-hydroquinone;

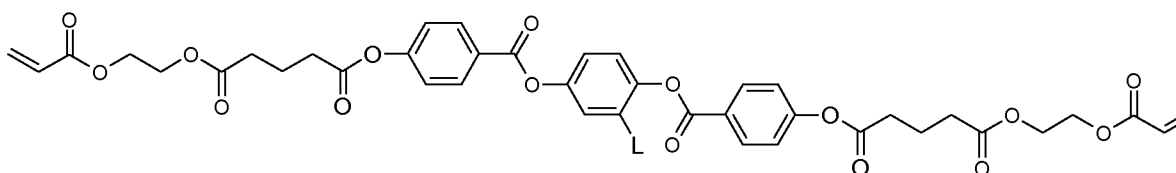

5

Table 2


L =	Liquid crystalline properties	Mass spectroscopy +EMS
H (C1)	K-114-M	792.3 M NH ₄ ⁺
O-methyl (C2)	K-45-(N)-Iso monotrope	822.2 M NH ₄ ⁺

Example 2:

Synthesis of a monoreactive compound

- 10 According to the synthesis of Example 1/Variant b) the below, in table 3, listed compounds are prepared, with the proviso that for the preparation

- of D3, diphenol (XIV) is replaced by



- , which is prepared in analogy to example 1.1.1) from 4-hydroxybenzoic acid and 4-hydroxy-4'-cyano-biphenyl-.

15

Table 3		Mass
D3		545.3 M NH ₄ ⁺
Liquid crystallinity K-105-(S _A)-153N-159-I		

Application/Example 1a: retarder/quarter wave plate (on TAC substrate with hard coat)

5 A 40 micron thick hard coated TAC foil is corona treated (parameters: Power = 0.3kW ; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in 80%MEK and 20%CHN). The wet film is dried at 80°C for 60s; the dry film thickness was about 60nm. Then the dry film is exposed to linearly polarized collimated UVB light (25mJ/cm²)

10 Then the sample is k bar (size 1) coated with a 30% formulation of
98.4% compound (XIII) as synthesized in example 1
1.0% AD42
0.5% AD184
0.1% AD43

15 in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibited an uni-axial, uniform (=unpatterned, equal birefringent of the whole area of the film) anisotropy without visible defects. The thickness of the cross linked polymer film turns out to be 1310 nm. The film exhibits an optical retardance of 135nm at 550 nm.

20

Application/Example 1b: retarder/quarter wave plate (on TAC substrate with hard coat)

25 A 40 micron thick hard coated TAC foil was corona treated (parameters: Power = 0.3kW ; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in 80%MEK and 20%CHN). The wet film was dried at 80°C for 60s; the dry film thickness was about 60nm. Then the dry film was exposed to linearly polarized collimated UVB light (25mJ/cm²)

30 Then the sample was k bar (size 1) coated with a 30% formulation of
95.4% compound (XIII) as synthesized in example 1
4.0% AD282
0.5% AD184
0.1% AD43

in a solvent mixture of 80% DXG and 20% CHN. The wet film was annealed and dried at 60°C for 120s and cross-linked under air atmosphere with 1.5 J/cm² of un-polarized UVA light. After this treatment the film exhibited an uni-axial, uniform (=unpatterned, equal birefringent of the whole area of the film) anisotropy without visible defects. The thickness of the cross linked LCP film turned out to be 1310 nm. The film exhibited an optical retardance of 135nm at 550 nm.

Application/Example 2: half wave plate (on TAC substrate with hard coat)

A 40 micron thick hard coated TAC foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in 80%MEK and 20%CHN). The wet film is dried at 80°C for 60s; the dry film thickness was about 60nm. Then the dry film is exposed to linearly polarized collimated UVB light (25mJ/cm²).

Then the sample is k bar (size 2) coated with a 40% solution of

98.4% compound (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibited an uni-axial, uniform anisotropy without visible defects. The thickness of the cross linked polymer film turned out to be 2620 nm. The film exhibited a retardance of 270nm at 550 nm. It is well suited for half wave plate applications. Other intermediate retarder plates are also feasible.

Application/Example 3: security element (reflective)

A 20 micron thick metalized PP foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in a solution of 80%MEK and 20%CHN). The wet film is dried at 80°C for 120s; the dry film thickness was about 60nm. Then the dry film is first exposed to linearly polarized collimated UVB light (25mJ/cm²; polarization azimuth angle $\Phi = 0^\circ$) through a mask and subsequently with 10mJ/cm² without mask at a polarization azimuth angle of $\Phi = 45^\circ$.

Then the sample is k bar (size 1) coated with a 30% solution of

98.4% (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

5 0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibited a patterned uni-axial anisotropy without visible defects. The thickness of the cross linked polymer film turns out to be 1310 nm and exhibited a retardance of 135nm at 550 nm. The optical axis of the birefringent film is oriented 0° in the areas which were covered by the mask in a first exposure and is uniformly oriented along the 45° polarization azimuth angle in areas which were subsequently exposed without a mask.

10 When the sample is observed using a polarizer then the pattern is easily visible showing either a positive or a negative image depending on the orientation of the polarizer. This feature can be used for second level security elements.

Application/Example 4: security element (transmissive)

A 40 micron thick hard coated TAC foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in a solution of 80%MEK and 20%CHN). The wet film is dried at 80°C for 120s; the dry film thickness is about 60nm. Then the dry film is first exposed to linearly polarized collimated UVB light (25mJ/cm²; polarization azimuth angle $\Phi = 0^\circ$) through a mask and subsequently with 10mJ/cm² without mask at a polarization azimuth angle of $\Phi = 45^\circ$

25 Then the sample is k bar (size 1) coated with a 40% solution of

98.4% compound (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

30 0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits a patterned uni-axial anisotropy without visible

defects. The thickness of the cross linked birefringent film turns out to be 2610 nm. The film exhibits a retardance of 270 nm at 550 nm. The optical axis of the birefringent film is oriented 0° in the areas which are covered by the mask in a first exposure and is uniformly oriented along the 45° polarization azimuth angle in areas which are subsequently exposed without a mask.

When the sample is observed between crossed polarizers (in transmission) then the pattern is easily visible showing either a positive or a negative image depending on the orientation of the sample.

10 Application/Example 5: Cholesteric circular reflection layer

A 40 micron thick hard coated TAC foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in a solution of 80%MEK and 20%CP). The wet film is dried at 80°C for 120s; the dry film thickness was about 60nm. Then the dry film is exposed to linearly polarized collimated UVB light (25mJ/cm²)

Then the sample is k bar (size 0) coated with a 2% formulation of
98.4% compound (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits an uni-axial uniform anisotropy without visible defects. The thickness of the cross linked polymer film turns out to be about 50 nm.

Then the sample is k bar (size 2) coated with a 40% solution of
94.4% compound (XIII) as synthesized in example 1

4.0 % Lumogen S750 (commercially available by BASF)

1.0% AD42

0.5% AD138

0.1% AD43

in MPK. The wet film is annealed and dried at 50°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits a

cholesteric orientation with a reflection band centred at 620nm and the width of the selective reflection band of is about 40 nm. The layer appeared uniform without visible defects. The thickness of the cross linked cholesteric film turned out to be 2500 nm. It is well suited for circular reflection filter applications in the region of the selective reflection.

Application/Example 6a: Cholesteric circular polarizer

A 40 micron thick hard coated TAC foil was corona treated (parameters: Power = 0.3kW ; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in 80%MEK and 20%CHN). The wet film is dried at 80°C for 120s; the dry film thickness is about 60nm. Then the dry film is exposed to linearly polarized collimated UVB light (25mJ/cm²)

Then the sample is k bar (size 1) coated with a 30% solution of

98.4% compound (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light.

After this treatment the film exhibited an uni-axial, uniform anisotropy without visible defects. The thickness of the cross linked polymer film turned out to be 1310 nm and exhibited a retardance of 135nm at 550 nm.

Then the sample is k bar (size 2) coated with a 40% solution of

94.4% compound (XIII) as synthesized in example 1

4.0% Lumogen S750

1.0% AD42

0.5% AD138

0.1% AD43

in MPK. The wet film is annealed and dried at 57°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits a cholesteric orientation with a reflection band centred at 615nm and the width of the selective reflection band of a single cholesteric layer is about 40 nm. The layer

appeared uniform without visible defects. The thickness of the cross linked cholesteric film turned out to be 2500 nm.

This combination of quarter wave plate and cholesteric film is well suited for circular polarizer applications in the region of the selective reflection.

5

Application/Example 6b: Cholesteric circular polarizer

A 40 micron thick hard coated TAC foil was corona treated (parameters: Power = 0.3kW ; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in 80%MEK and 20%CHN). The wet film was dried at 80°C for 120s; the dry film thickness was about 60nm. Then the dry film was exposed to linearly polarized collimated UVB light (25mJ/cm²)

Then the sample was k bar (size 1) coated with a 30% formulation of 95.4% compound (XIII) as synthesized in example 1

15 4.0% AD282

0.5% AD184

0.1% AD43

in a solvent mixture of 80% DXG and 20% CHN. The wet film was annealed and dried at 60°C for 120s and cross-linked under air atmosphere with 1.5 J/cm² of unpolarized UVA light. After this treatment the film exhibited an uni-axial, uniform (=unpatterned, equal birefringent of the whole area of the film) anisotropy without visible defects. The thickness of the cross linked LCP film turned out to be 1310 nm. The film exhibited an optical retardance of 135nm at 550 nm.

25 Then the sample was k bar (size 2) coated with a 40% solution of

94.7% compound (XIII) as synthesized in example 1

4.0% Lumogen S750

4.0% AD282

0.2% AD138

30 0.1% AD43

in 80%MEK and 20% DXG2. The wet film was annealed and dried at 52°C for 120s and cross-linked under air atmosphere with 1.5 J/cm² of un-polarized UVA light. After this treatment the film exhibited a cholesteric orientation with a reflection band

centred at 615nm and the width of the selective reflection band of a single cholesteric layer was about 40 nm. The layer appeared uniform without visible defects. The thickness of the cross linked cholesteric film turned out to be 2500 nm.

This combination of quarter wave plate and cholesteric film is well suited for circular polarizer applications in the region of the selective reflection.

Application/Example 7: Security element on PET substrate

A 20 micron thick PET foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6) and then K bar (size 0) coated with a LPP solution (2% solid content in a solution of 80%MEK and 20%CHN). The wet film is dried at 80°C for 120s; the dry film thickness was about 60nm. Then the dry film is first exposed to linearly polarized collimated UVB light (25mJ/cm²; polarization azimuth angle $\Phi = 45^\circ$ with respect to the orientation of the optical axis of the PET foil) through a mask and subsequently with 10mJ/cm² without mask at a polarization azimuth angle of $\Phi = -45^\circ$.

Then the sample is k bar (size 1) coated with a 30% solution of

98.4% compound (XIII) as synthesized in example 1

1.0% AD42

0.5% AD184

0.1% AD43

in a solvent mixture of 80%MEK and 20% CHN. The wet film is annealed and dried at 60°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits a patterned uni-axial anisotropy without visible defects. The thickness of the cross linked birefringent film turns out to be 1310 nm and exhibits a retardance of 135nm at 550 nm. The optical axis of the birefringent film is parallel oriented along the 45° azimuth angle (in the areas which were covered by the mask during the first exposure) and parallel oriented to -45° (with respect to the optical axis of the PET foil)

Then the sample is k bar (size 2) coated with a 40% solution of

94.4% compound (XIII) as synthesized in example 1

4.0% Lumogen S750

1.0% AD42

0.5% AD138

0.1% AD43

in MPK. The wet film is annealed and dried at 57°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibited a cholesteric orientation with a reflection band centred at 615nm. The layer appeared uniform without visible defects. The thickness of the cross linked cholesteric film turned out to be 2500 nm.

Finally, a black film is applied using a commercially available black lacquer (Rayoflex produced by Sun Chemicals) diluted with MEK. The adhesion to the cholesteric layer is excellent.

When observed through the PET foil with a polarizer this sample (comprising a patterned quarter wave plate and a cholesteric film) can be used as a second level security element showing a covered positive and a negative image respectively depending on the orientation of the polarizer. It also shows a first level colour shift effect, as a security feature.

Application/Example 8

A 20 micron thick PET foil is corona treated (parameters: Power = 0.3kW; rotation speed 120m/min; No of turns: 6)

Then the sample is k bar (size 2) coated with a 40% solution of

94.4% compound (XIII) as synthesized in example 1

4.0% Lumogen S750

1.0% AD42

0.5% AD138

0.1% AD43

in MPK. The wet film is annealed and dried at 57°C for 120s and cross-linked under nitrogen with 1 J/cm² of un-polarized UVA light. After this treatment the film exhibits a cholesteric orientation with a reflection band centred at 620nm and a width of the selective reflection band of a single cholesteric layer is about 40 nm. The layer appears uniform without visible defects. The thickness of the cross linked cholesteric film turns out to be 2500 nm. In addition the film shows exceptionally good adhesion to the PET foil. It is well suited for circular reflection filter applications in the region of the selective reflection.

Application/Example 9 - Retarder on glass substrate

A glass substrate is spin coated with a LPP solution (2% solid content in 98% cyclopentanon). The wet film is dried at 180°C for 10s; the dry film thickness was about 60 nm. Then the dry film is exposed to linearly polarized collimated UVB light (120 mJ/cm²).

Then the sample is spin coated with a 20% formulation of 67% compound B2 (as described in preparation example 1.2.1) 30% of LCP (1), 2,5-bis-[4-6-acryloyloxyhexyloxy]benzoic acid pentyl Ester, commercially available from ROLIC Technologies, Switzerland or prepared in analogy to Schemes 1, 2, 3, 4 of U.S. Patent No. 5,593,617, 1.0% AD 42 1.0% AD18 1.0% AD43

in anisol. The wet film is annealed and dried at 180°C for 10s and crosslinked under nitrogen with 120 mJ/cm² of Hg-lamp. After this treatment the film exhibited an uni-axial, uniform orientation without visible defects. The thickness of the cross linked film turned out to be 802 nm. The film exhibits a retardance of 105 nm at 550 nm.

Application/Example 10 - Retarder on glass substrate

Example 10 is identical to example 9 with the proviso that

- the compound B2 is replaced by compound B7 (as described in preparation example 1.2.1)

The thickness of the cross linked film turns out to be 790 nm. The film exhibits a retardance of 89 nm at 550 nm.

Application/Example 11 - Retarder on glass substrate

A glass substrate is spin coated with a LPP solution (2% solid content in 98% cyclopentanon). The wet film is dried at 180°C for 4min; the dry film thickness is about 60 nm. Then the dry film is exposed to linearly polarized collimated UVB light (200 mJ/cm²).

Then the sample is spin coated with a 20% formulation of 87.9% of compound (XIII) as synthesized in example 1 10% of C2 as synthesized in example 1, table 2

1.0% Irgacure 369

1.0% Tinuvin 123

0.1% BHT

- 5 in anisol. The wet film is annealed and dried at 60°C for 120s and crosslinked under nitrogen with 200 mJ/cm² of Hg-lamp. After this treatment the film exhibited an uni-axial, uniform orientation without visible defects. The thickness of the cross linked film turns out to be 710 nm. The film exhibits a retardance of 84 nm at 550 nm.

Application/Example 12 - Retarder on glass substrate

- 10 A glass substrate is spin coated with a LPP solution (2% solid content in 98% cyclopentanone). The wet film is dried at 180°C for 4min; the dry film thickness is about 60 nm. Then the dry film is exposed to linearly polarized collimated UVB light (200 mJ/cm²).

Then the sample is spin coated with a 20% formulation of

- 15 87.9% of compound (XIII) as synthesized in example 1

10% of B6 as synthesized in example 1, table 1

1.0% Irgacure 369


1.0% Tinuvin 123

0.1% BHT


- 20 in anisol. The wet film is annealed and dries at 73°C for 120s and crosslinks under nitrogen with 200 mJ/cm² of Hg-lamp. After this treatment the film exhibits an uni-axial, uniform orientation without visible defects. The thickness of the cross linked film turns out to be 760 nm. The film exhibited a retardance of 97 nm at 550 nm.

Claims:

1.) Polymerisable liquid crystall compound (I) having a liquid crystalline phase:



wherein R^1 and R^2 are independently from each other a group of formula (Ia)



wherein:

“-----” the interrupted line, symbolizes the linkage to compound (I), and

wherein

$-(C^1-X^1)_{n1}-C^2-(X^2-C^3)_{n2}-$ is a divalent core, wherein;

10 C^1 and C^3 are in each case independently substituted or unsubstituted non-aromatic, aromatic, carbocyclic or heterocyclic groups, and

C^2 is a nonaromatic, aromatic, carbocyclic or heterocyclic group which is unsubstituted or substituted with an unbranched hydrocarbon group of 1 to 20 C-atoms, wherein one or more C-atom, -CH- or -CH₂-group, is not replaced or, in
15 which one or more C-atom, -CH- or -CH₂-group, is replaced by a heteroatom, such as -O-, -S-, -NH-, -N(CH₃)-, or is replaced by a replacing-group selected from the group consisting of -N=N-, -CO-C=C-, -CH(OH)-, -CO-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH=CH- and -C≡C- with the proviso that oxygen atoms are not directly linked to each other;

20 X^1 and X^2 each independently represent -O-, -S-, -NH-, -N(CH₃)-, -N=N-, -CH=N-, -N=CH-, -CO-C=C-, -CH(OH)-, -CO-, -CH₂O-, -OCH₂-, -CH₂(CO)-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -OCF₂-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH₂-CH₂-, -CH₂-CH₂-CH₂-CH₂-, -OCH₂-, -CH₂O-, -CH=CH-, -C≡C- or a single bond;

25 n^1 and n^2 are integers, each independently having a value from 0, 1, 2, 3, 4, SP^1 represents a nonaromatic or aromatic, carbocyclic or heterocyclic group, or a CH=CH-group, C≡C-group or a branched or unbranched C₃-C₂₄-alkylen group,


- wherein one or more C-atom, -CH- or -CH₂-group, is not replaced, or, in which one or more C-atom, -CH- or -CH₂-group, is replaced by a heteroatom or at least a single replacing-group selected from the group consisting of -N=N-, -CO-C=C-, CO-, -CH₂(CO)-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-,
- 5 -S-CO-, -CO-S-, -SOO-, -OSO-, OCH₂-, -CH₂O-, -CH=CH- and -C≡C-; with the proviso that oxygen atoms are not directly linked to each other;


SP² represents a substituted or unsubstituted spacer;

P is a polymerizable group.

- 10 2.) Compound (I) according to claim 1, wherein

C¹ and C³ are selected from:

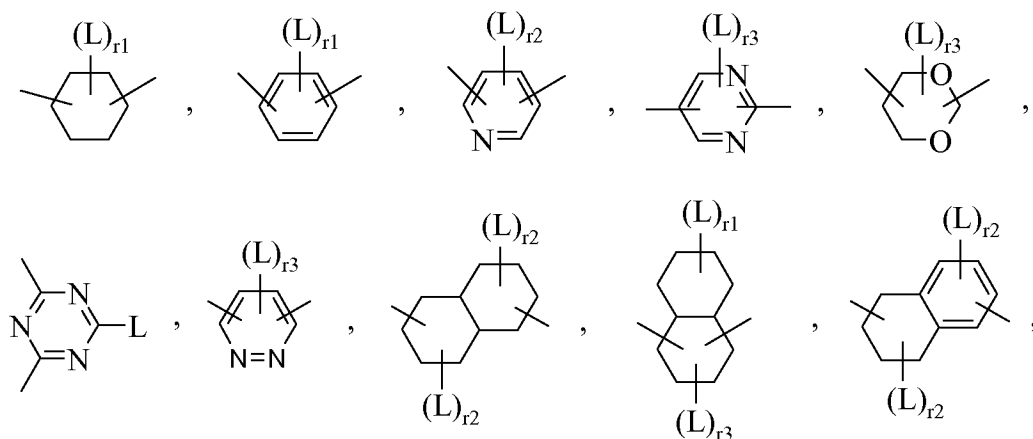


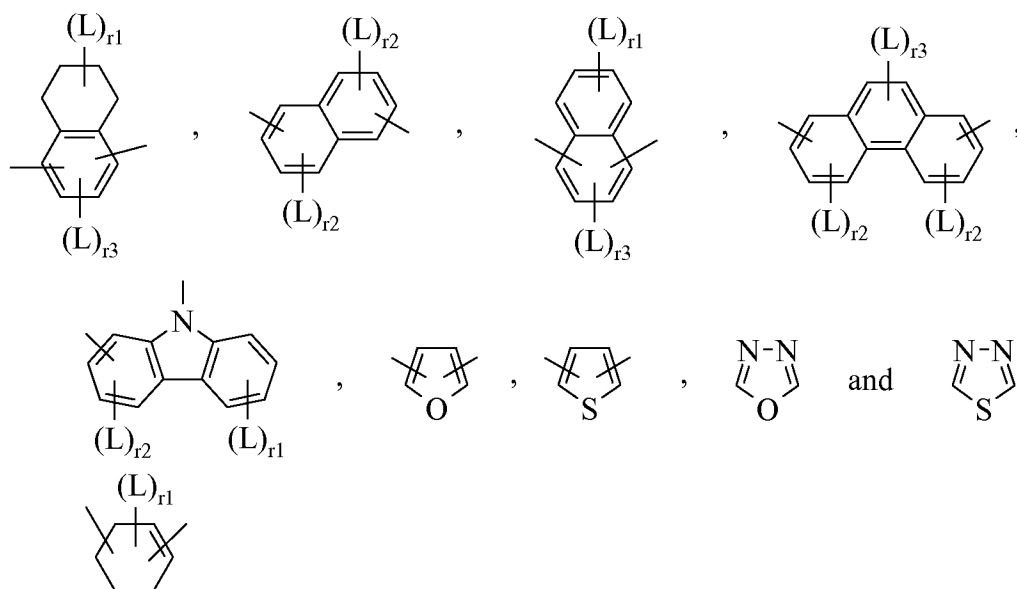


wherein:


- 5 L represents hydrogen, halogen, C_1 – C_{24} -alkyl, C_1 – C_{24} -alkoxy, C_1 – C_{24} -alkoxycarbonyl, C_1 – C_{24} -alkylcarbonyloxy, cyano, C_1 – C_{24} -alkylcarbonyl or $-NO_2$,
- r^1 being 0, 1, 2, 3, or 4,
- r^2 being 0, 1, 2, or 3, and
- 10 r^3 being 0, 1, or 2.

3. Compound (I) according to claim 1, wherein C^2 is selected from the achiral groups $C^{2'}$ shown below:

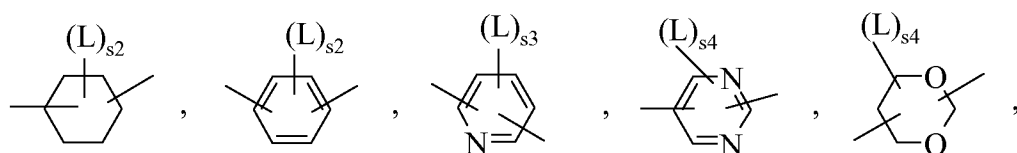

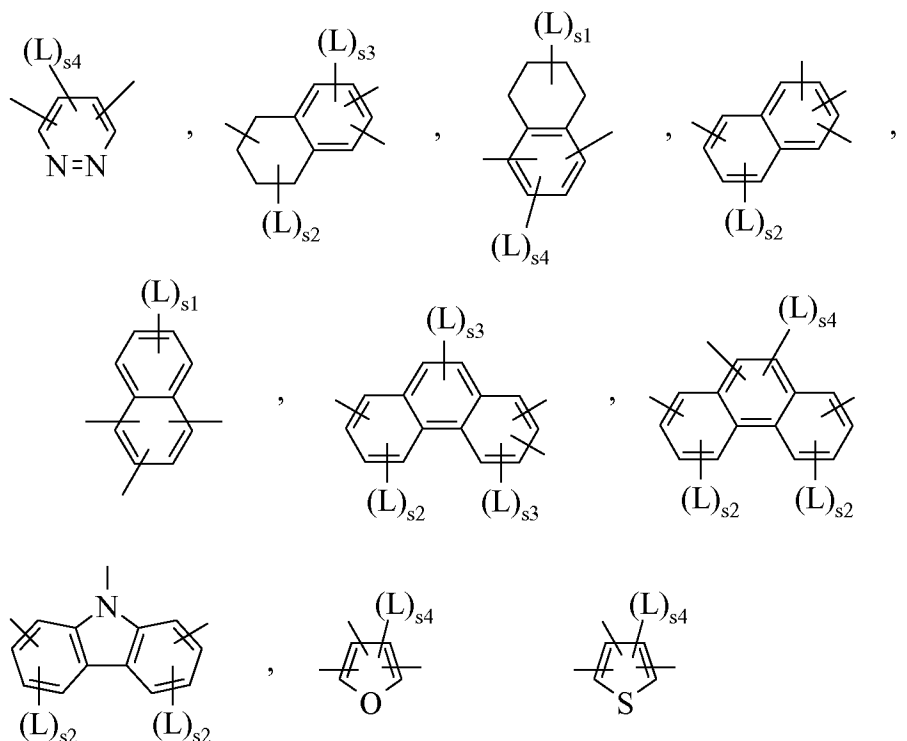

and the chiral groups $C^{2''}$ shown below:

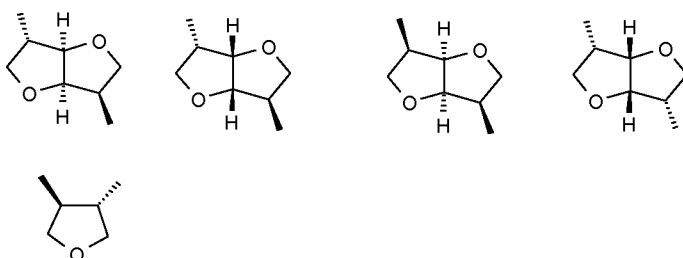

5


wherein:

- L represents hydrogen, unbranched hydrocarbon group of 1 to 6 C-atoms, wherein one or more C-atom, -CH- or -CH₂-, is not replaced, or, is replaced by a heteroatom, which is -O-, -S-, -NH-, -N(CH₃)-, or is replaced by a replacing-group selected from the group consisting of -N=N-, -CO-C=C-, -CH(OH)-, -CO-, -SO-, -CH₂(SO)-, -SO₂-, -CH₂(SO₂)-, -COO-, -O(CO)-, -O(CO)-O-, -S-CO-, -CO-S-, -SOO-, -OSO-, -CH=CH- and -C≡C-, with the proviso that oxygen atoms are not directly linked to each other;
- s^1 being 0, 1, 2, 3, or 4,

10

- s^2 being 0, 1, 2, or 3,
 s^3 being 0, 1, or 2 and
 s^4 being 0 or 1.

- 5 4. Compound (I) according to claim 1, wherein P is $\text{CH}_2=\text{CZ}^1\text{-COO-}$,



wherein k is an integer from 1 to 20; or

P is $\text{HO-CZ}^2\text{Z}^3\text{-}$, $\text{HS-CZ}^2\text{Z}^3\text{-}$, $\text{HZ}^2\text{N-}$, $\text{CH}_2=\text{CZ}^1\text{-CO-NH-}$, $\text{CH}_2=\text{CZ}^2\text{-(O)}_{k1}\text{-}$, wherein k_1 is 0 or 1; $\text{CH}_3\text{-CH=CH-O-}$, $(\text{CH}_2=\text{CH})_2\text{CH-OCO-}$, $(\text{CH}_2=\text{CH-CH}_2)_2\text{CH-OCO-}$,
 10 $(\text{CH}_2=\text{CH})_2\text{CH-O-}$, $(\text{CH}_2=\text{CH-CH}_2)_2\text{N-}$, $(\text{CH}_2=\text{CH-CH}_2)_2\text{N-CO-}$, or $\text{Z}^4\text{Z}^5\text{Z}^6\text{Si-}$,

wherein Z^1 is H, Cl, CN, phenyl or $\text{C}_1\text{-C}_6\text{alkyl}$,


Z^2 and Z^3 each independently being H or $\text{C}_1\text{-C}_6\text{alkyl}$,

Z^4 , Z^5 and Z^6 each independently being Cl, oxaalkyl or oxacarbonylalkyl with 1 to 6 C-atoms.

15

5. Compound (I) according to claim 1, wherein the spacer SP^2 represents a non-aromatic or aromatic, carbocyclic or heterocyclic group, or branched or unbranched $\text{C}_1\text{-C}_{24}\text{-alkylen}$ group, wherein one or more C-atom, -CH- or $\text{-CH}_2\text{-}$ group, is not replaced, or, in which one or more C-atom, -CH- or $\text{-CH}_2\text{-}$ group, is replaced by a
 20 heteroatom or at least by a single replacing-group selected from the group consisting of -N=N- , -CO-C=C- , CO- , $\text{-CH}_2(\text{CO})\text{-}$, -SO- , $\text{-CH}_2(\text{SO})\text{-}$, $\text{-SO}_2\text{-}$, $\text{-CH}_2(\text{SO}_2)\text{-}$, -COO- , -O(CO)- , -O(CO)-O- , -S-CO- , -CO-S- , -SOO- , -OSO- , $\text{OCH}_2\text{-}$, $\text{-CH}_2\text{O-}$, -CH=CH- and $\text{-C}\equiv\text{C-}$; with the proviso that oxygen atoms are not directly linked to each other.


6. Compound according to claim 1, which is represented by a compound of formula (II)

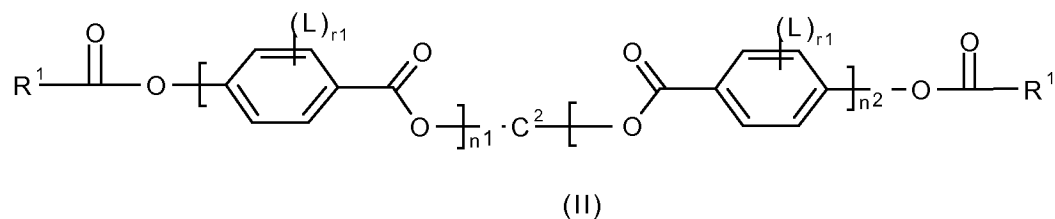

wherein C^2 , R^1 , n^1 and n^2 have the same meanings as described in claim 1, and

- 5 L and r^1 have the same meanings as described in claim 2.

7. Compound according to claim 1, which is represented by a compound of formula (IV):

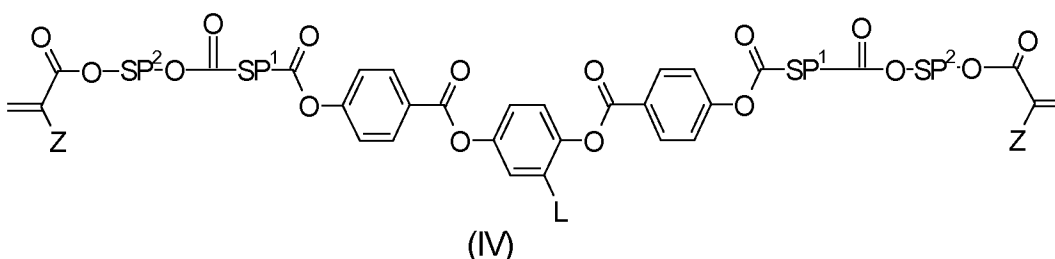

wherein SP^2 and SP^1 have the same meanings as described in claim 1, and Z is

- 10 hydrogen or methyl, and L has the same meanings as described in claim 3.


8. Compound (I) according to claim 1, having an adhesion of > 4 .

9. Process for the preparation of ester group comprising compounds, preferably


- 15 compound (I),

comprising


- a) bringing into contact a compound of formula (VIII)




with a compound of formula (IX)



b) and a dihydroxy compound of formula (XI)



or a compound of formula (XII)



5 wherein P, Sp², Sp¹, C¹, C², C³, n¹, n² have the same meanings as given in claim 1, Z is hydrogen or methyl and Y represents COOH, COOC₁-C₆alkyl, halogen or CN.

10. Product obtained by the process according to claim 9.

10 11. Liquid crystalline composition comprising at least a compound of formula (I) as described in claim 1 or a product prepared according to claim 10.

12. Methods for the preparation of an unpatterned or patterned birefringent layer comprising polymerising compound (I) as described in claim 1, a product prepared
15 according to claim 10, or a liquid crystalline composition as described in claim 11.

13. Patterned or patterned birefringent layer comprising polymerised compound (I) as described in claim 1, a product prepared according to claim 10, or a liquid crystalline composition as described in claim 11.

20

14. Method for the preparation of optical or electro-optical component comprising compound (I) as described in claim 1, a product prepared according to claim 10, or a liquid crystalline composition as described in claim 11.

25 15. Optical or electro-optical component comprising compound (I) as described in claim 1, a product prepared according to claim 10, or a liquid crystalline composition as described in claim 11.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/059528

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09K19/20 C09K19/46
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/168633 A1 (WELLINGHOFF STEPHEN T [US] ET AL) 11 September 2003 (2003-09-11) claims 1,45,88; compounds paragraph [0023] - paragraph [0030]; compound paragraph [0073]; compound	1-15
A	US 2006/049381 A1 (KLEIN MARKUS [DE] ET AL) 9 March 2006 (2006-03-09) page 7; compound paragraphs [0118], [0119], [0124] pages 14-16; example 1; compounds 1, 12, 13, 24 claims	1-15
A	DE 44 08 170 A1 (BASF AG [DE]) 14 September 1995 (1995-09-14) claims 1-7; examples; compounds	1-15
-/-		

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 October 2010

Date of mailing of the international search report

19/10/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Serbetsoglou, A

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/059528

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/219548 A1 (MEYER FRANK [DE] ET AL) 27 November 2003 (2003-11-27) claims; examples; compounds -----	1-15
A	WO 2005/054406 A (ROLIC AG [CH]; CHERKAOUI ZOUBAIR MOHAMMED [CH]; LUKAC TEODOR [CH]; REI) 16 June 2005 (2005-06-16) cited in the application claims; examples; compounds -----	1-15
A	WO 03/027056 A (ROLIC AG [CH]; PEGLOW THOMAS [DE]; BENECKE CARSTEN [DE]; CHERKAOUI ZOU) 3 April 2003 (2003-04-03) cited in the application claims; examples; compounds -----	1-15
A	US 5 798 147 A (BECK ERICH [DE] ET AL) 25 August 1998 (1998-08-25) cited in the application columns 1-4; compounds claims 1-3,12-14 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/059528

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003168633 A1	11-09-2003	US 2005189516 A1	01-09-2005
US 2006049381 A1	09-03-2006	AT 391159 T	15-04-2008
		DE 602005005749 T2	30-04-2009
DE 4408170 A1	14-09-1995	WO 9524455 A1	14-09-1995
US 2003219548 A1	27-11-2003	NONE	
WO 2005054406 A	16-06-2005	AT 400627 T	15-07-2008
		JP 2007522267 T	09-08-2007
		KR 20060123423 A	01-12-2006
		US 2007257230 A1	08-11-2007
WO 03027056 A	03-04-2003	CN 1556787 A	22-12-2004
		EP 1295863 A1	26-03-2003
		JP 2005502730 T	27-01-2005
		US 2005040364 A1	24-02-2005
US 5798147 A	25-08-1998	AT 178636 T	15-04-1999
		BR 9510303 A	11-11-1997
		CN 1166851 A	03-12-1997
		CZ 9701529 A3	17-06-1998
		WO 9602597 A2	01-02-1996
		EP 0793693 A2	10-09-1997
		ES 2130680 T3	01-07-1999
		JP 3830512 B2	04-10-2006
		JP 10508882 T	02-09-1998