



(19) **United States**

(12) **Patent Application Publication**
Cate et al.

(10) **Pub. No.: US 2014/0125499 A1**

(43) **Pub. Date: May 8, 2014**

(54) **BARRIER OPERATOR FEATURE ENHANCEMENT**

(52) **U.S. Cl.**
CPC . *G05B 15/00* (2013.01); *G08G 1/00* (2013.01)
USPC **340/933; 340/3.9**

(71) Applicant: **THE CHAMBERLAIN GROUP, INC.**,
Elmhurst, IL (US)

(72) Inventors: **Casparus Cate**, Chicago, IL (US);
James J. Fitzgibbon, Batavia, IL (US);
Robert R. Keller, Jr., Park Ridge, IL (US);
Sapta Gireesh Pudipeddi,
Carpentersville, IL (US); **Cory Sorice**,
LaGrange, IL (US)

(73) Assignee: **THE CHAMBERLAIN GROUP, INC.**,
Elmhurst, IL (US)

(21) Appl. No.: **13/671,602**


(22) Filed: **Nov. 8, 2012**

Publication Classification

(51) **Int. Cl.**
G05B 15/00 (2006.01)
G08G 1/00 (2006.01)

(57) **ABSTRACT**

A barrier operator feature enhancement device is designed to provide one or more features found in modern barrier operator devices and to incorporate those features into a previously installed barrier operator system. To facilitate ease of use, the barrier operator feature enhancement device can communicate with a large variety of barrier operators. Such communication may be wireless or wired, depending on the communication protocol implemented by a particular previously installed barrier operator. To facilitate the ease of installation, the device is designed to configure itself to operate with the communication protocol of the previously installed barrier operator. Once configured to be able to communicate with the previously installed barrier operator, the feature enhancement device works with the barrier operator to provide one or more additional features to enhance the capabilities of the previously installed barrier operator.

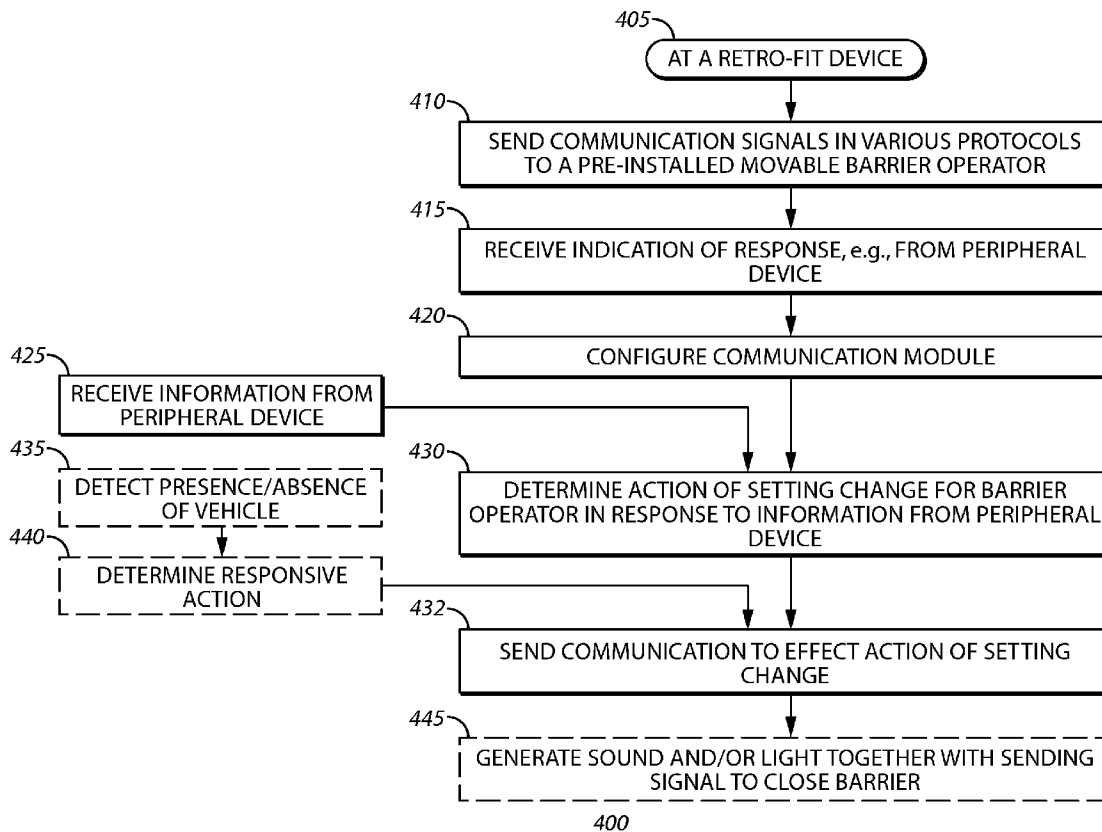

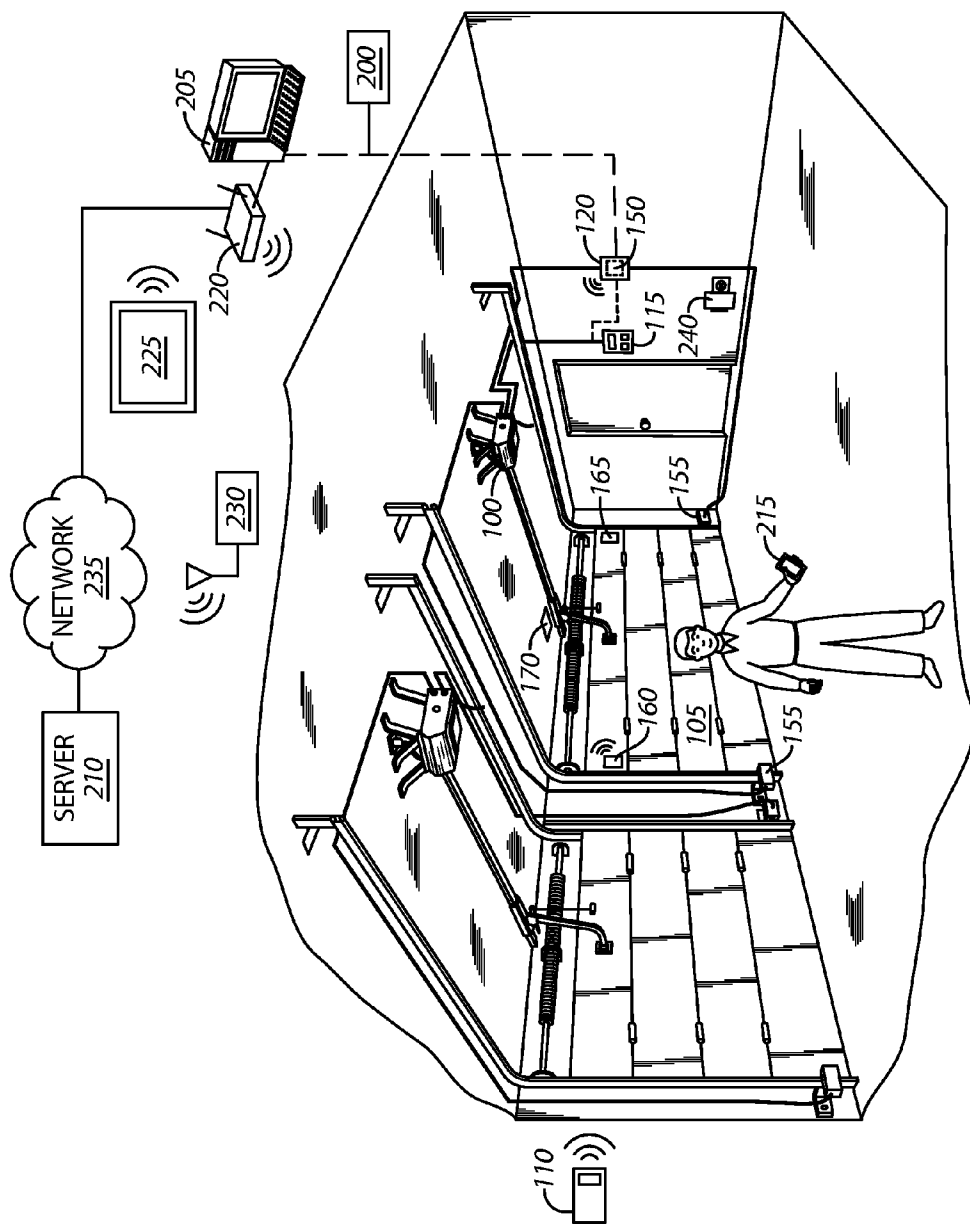


FIG. 1

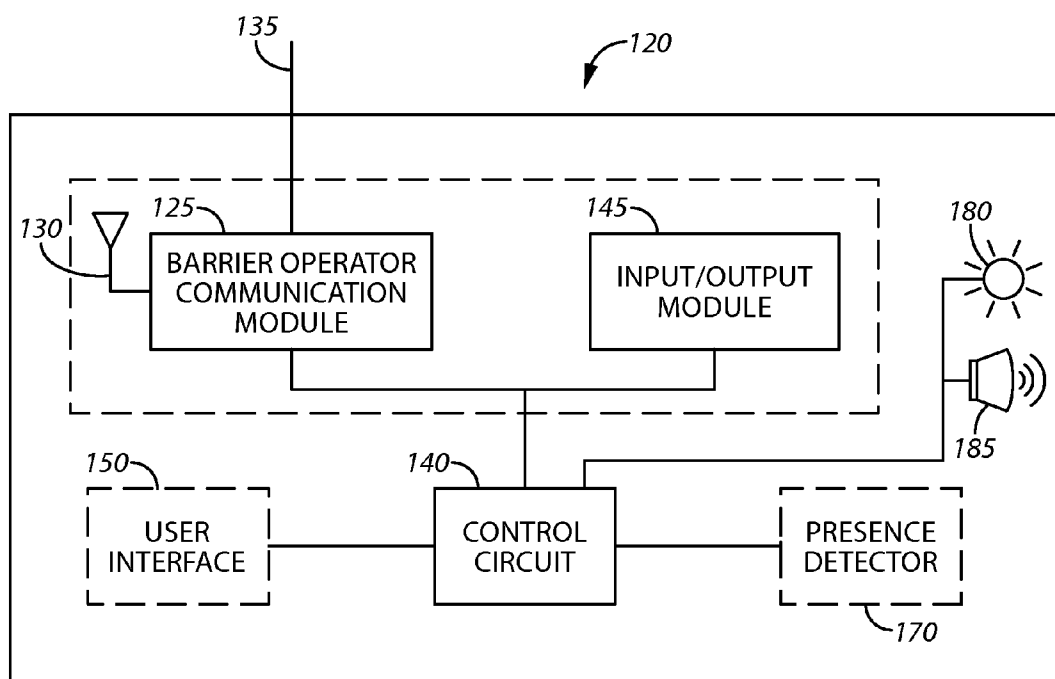


FIG. 2


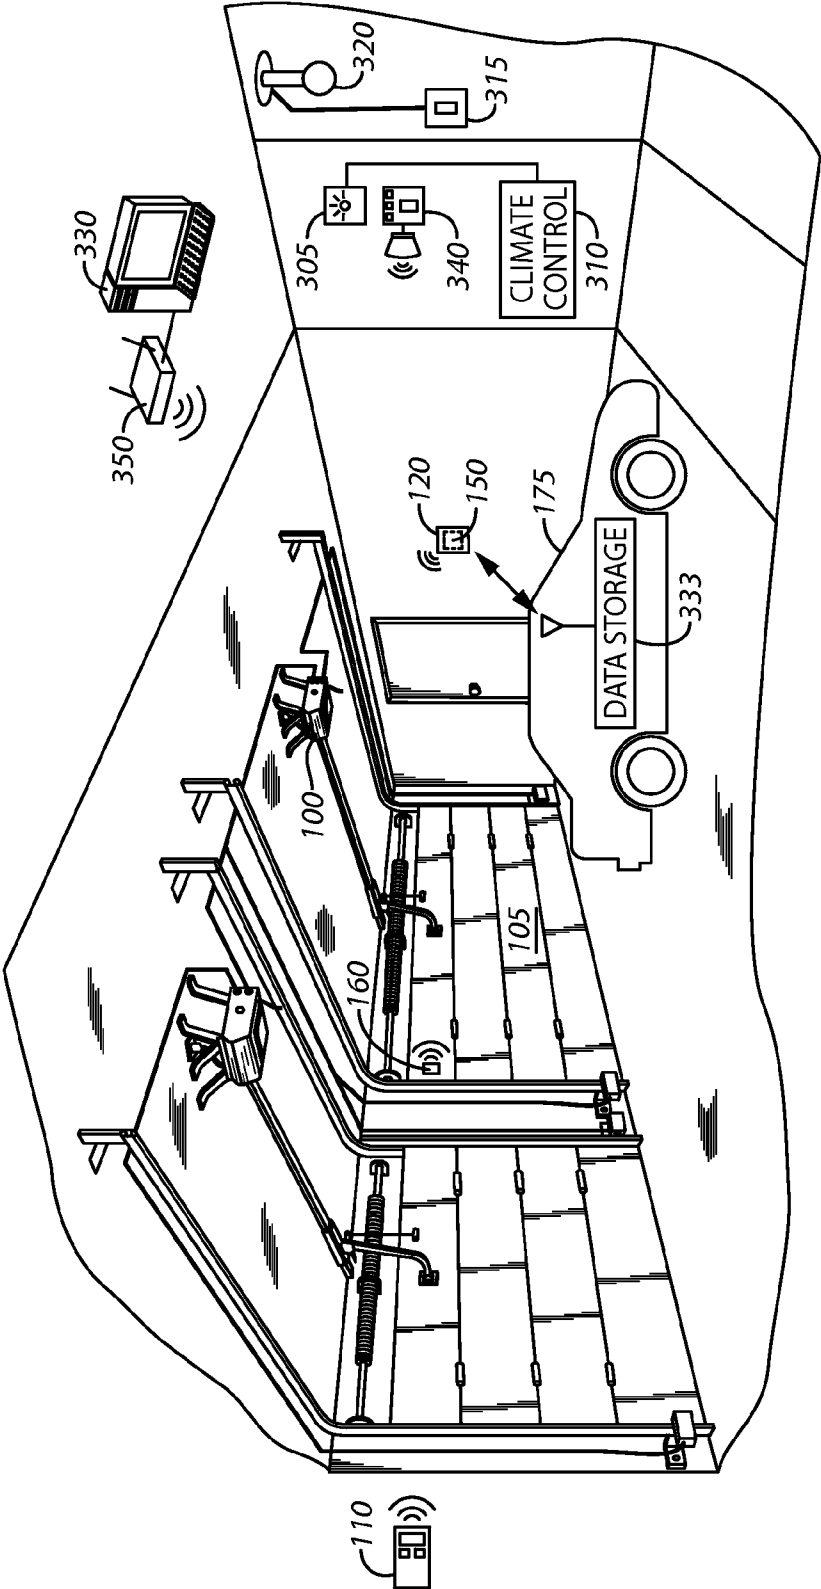


FIG. 3

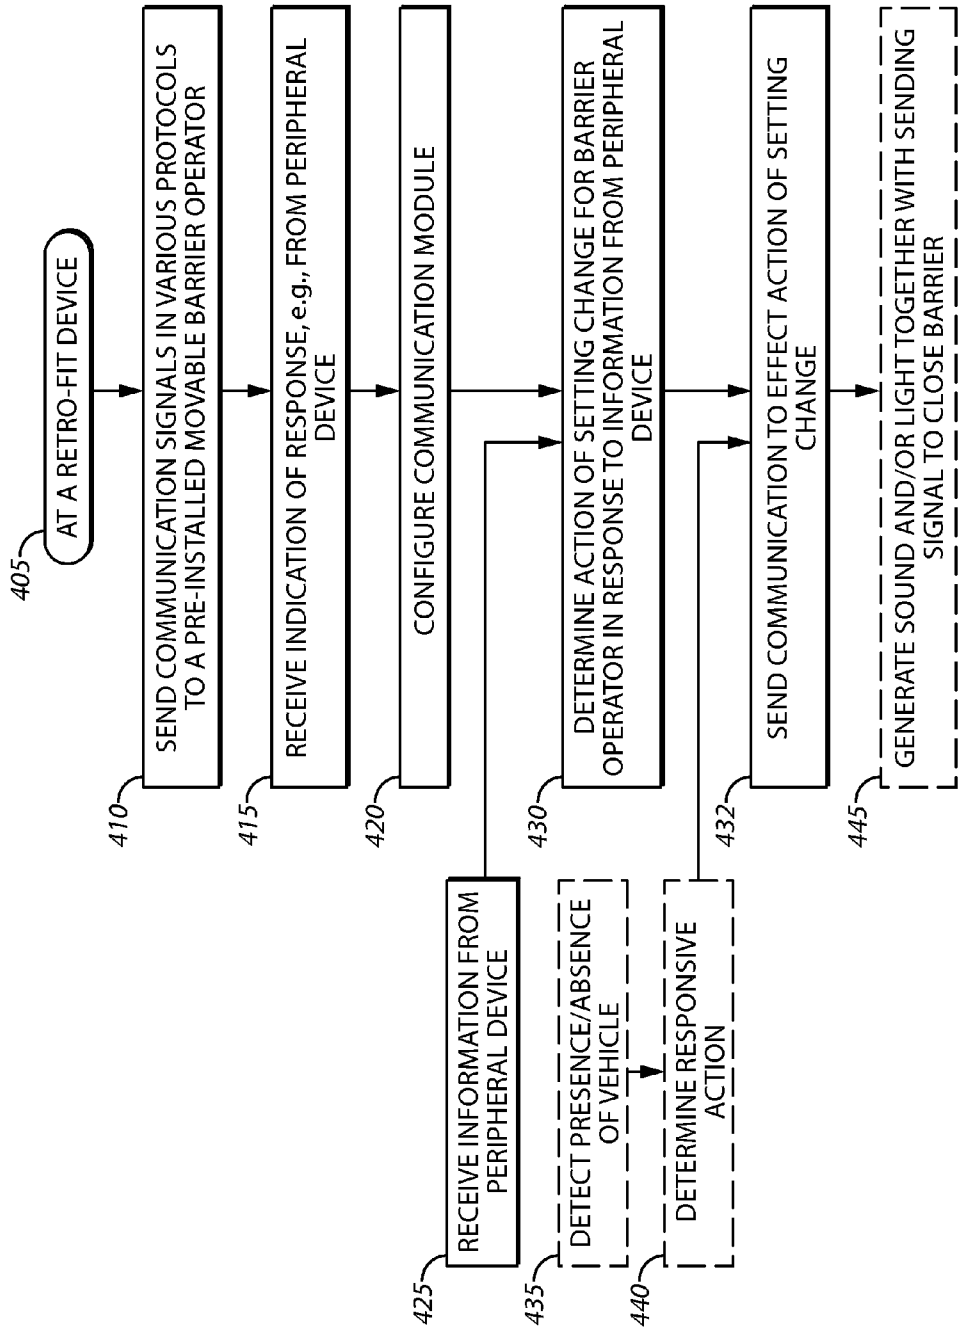

400
FIG. 4

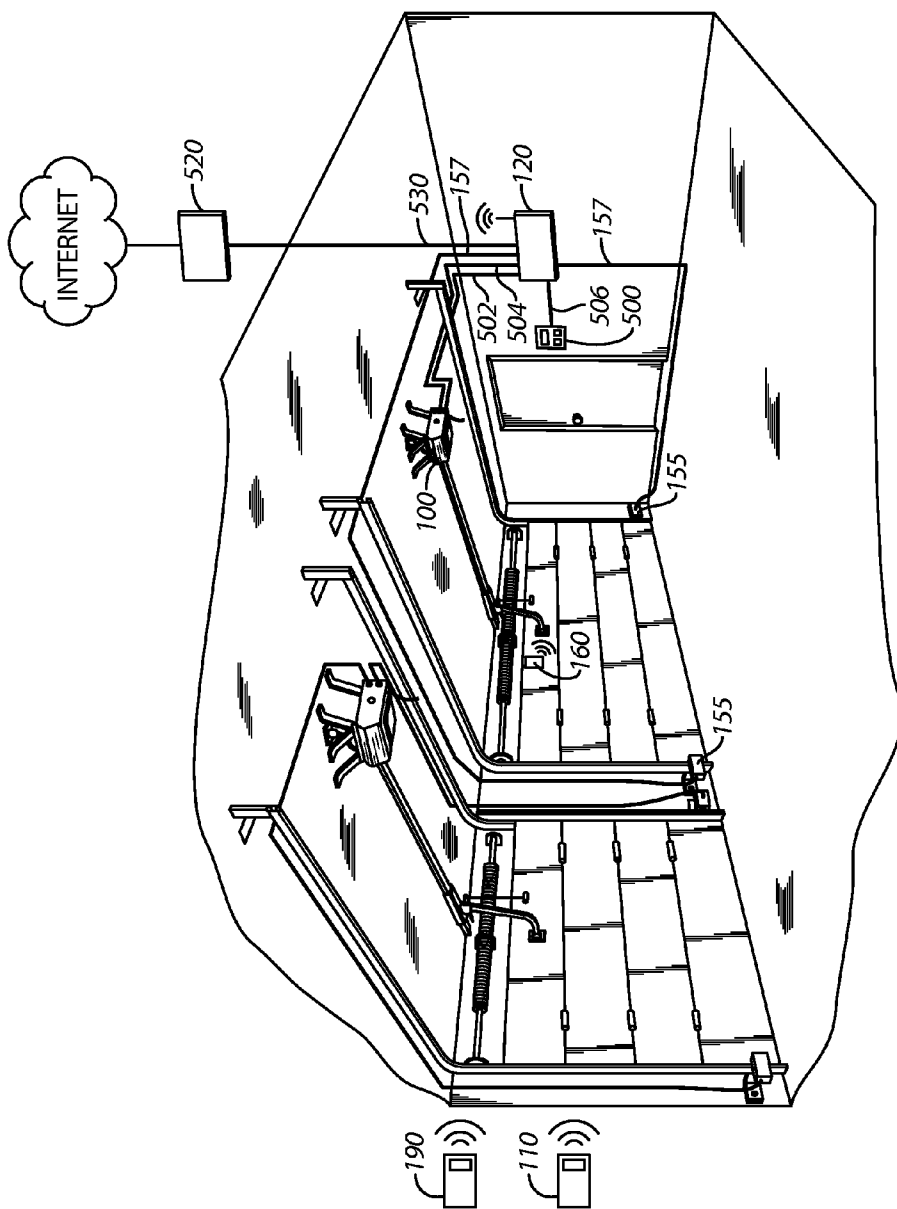


FIG. 5

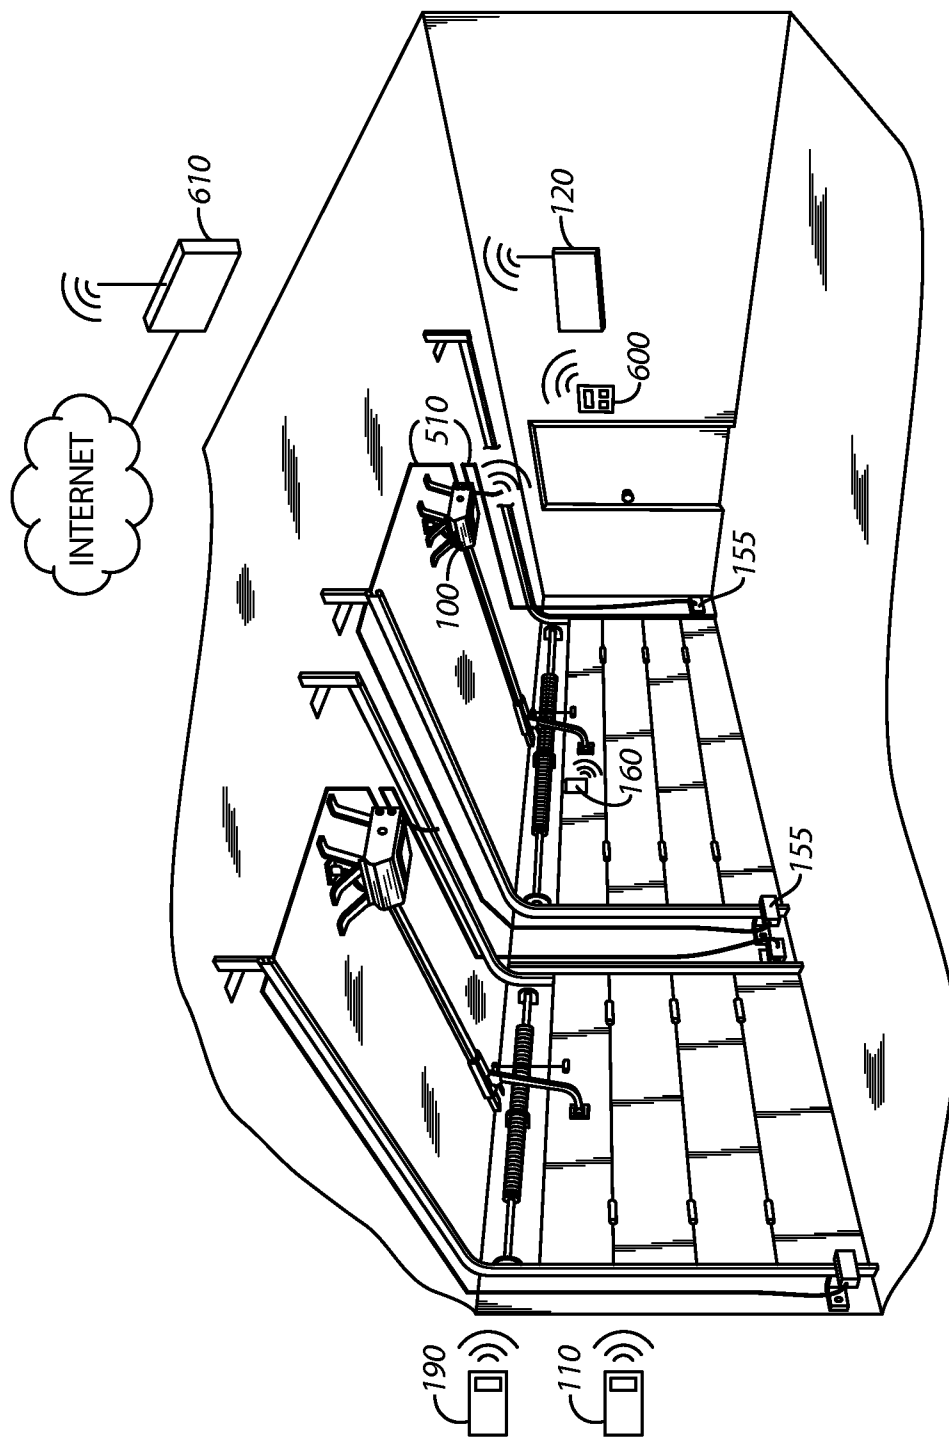


FIG. 6

**BARRIER OPERATOR FEATURE
ENHANCEMENT**

TECHNICAL FIELD

[0001] This invention relates generally to barrier operators and more specifically to adding features to pre-installed barrier operators.

BACKGROUND

[0002] Barrier operators of various kinds have been known and used for many years. Examples of such barrier operators include gate operators, rolling shutter operators, garage door operators, and the like. In one example, garage door operators are mounted within a garage to automate the process of opening and closing a garage door. Such garage door operators are designed to last for many years. In its simplest form, a garage door operator includes a motor connected to move a barrier between an open position and a closed position and control circuitry configured to control the motor. Such garage door operators can last and reliably operate a garage door for many years with basic maintenance.

[0003] More recently, however, barrier operators have begun evolving to include additional features beyond the simple task of opening and closing the barrier. Such new features include various safety features, lighting options, network communication options including remote operation of the barrier operator, and the like. To have access to such features, however, typically a completely new barrier operator with a new motor and connection equipment must be purchased and installed for a user to have access to the new features. This contradicts the reality where barrier operators are generally designed to perform their core function of opening and closing a barrier for many years.

SUMMARY

[0004] Generally speaking, and pursuant to these various embodiments, a barrier operator feature enhancement device is designed to provide one or more features found in modern barrier operator devices and to incorporate those features into a previously installed barrier operator system. To facilitate ease of use, the barrier operator feature enhancement device is designed to be able to communicate with a large variety of older model barrier operator systems. Such communication may be wireless or wired, depending on the communication protocol implemented by a particular previously installed barrier operator. To facilitate the ease of installation of the feature enhancement device, the device is designed to, in one approach, step through a variety of communication protocols and to receive feedback information from either the barrier operator or another device to indicate that the previously installed barrier operator performed an action in response to receipt of a communication from the feature enhancement device. Based on that feedback, the feature enhancement device configures itself to operate going forward with the communication protocol that elicited the response from the previously installed barrier operator.

[0005] Once configured to be able to communicate with the previously installed barrier operator, the feature enhancement device works with the barrier operator to provide one or more additional features to enhance the capabilities of the previously installed barrier operator. Examples include adding safety features such as the use of obstacle detectors, adding remote communication and network based communication

features, enabling timer based open and close features, enabling vehicle and person detection features, and the like. These and other benefits may become clearer upon making a thorough review and study of the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The above needs are at least partially met through provision of the barrier operator feature enhancement described in the following detailed description, particularly, when studied in conjunction with the drawings wherein:

[0007] FIG. 1 comprises a perspective view of an example environment in which a barrier operator feature enhancement device may be applied as configured in accordance with various embodiments of the invention;

[0008] FIG. 2 comprises a block diagram of an example barrier operator feature enhancement device as configured in accordance with various embodiments of the invention;

[0009] FIG. 3 comprises a schematic diagram of a building having various devices that may communicate with a barrier operator feature enhancement device as configured in accordance with various embodiments of the invention;

[0010] FIG. 4 comprises a flow diagram of an example method of operation for a barrier operator feature enhancement device as configured in accordance with various embodiments of the invention;

[0011] FIG. 5 comprises a perspective view of an example environment in which a barrier operator feature enhancement device may be applied as configured in accordance with various embodiments of the invention; and

[0012] FIG. 6 comprises a perspective view of an example environment in which a barrier operator feature enhancement device may be applied as configured in accordance with various embodiments of the invention.

[0013] Skilled artisans will appreciate the elements and the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions and/or relative positioning of some of the elements in the figures may be exaggerated relative to other elements to help improve understanding of various embodiments. Also, common but well understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted to facilitate a less obstructive view of these various embodiments. It will further be appreciated that certain actions and/or steps may be described or depicted in a particular order of occurrence while those skilled in the art will understand that such specificity with respect to sequence is not actually required. It will also be understood that the terms and expressions used herein have the ordinary technical meaning as is accorded to such terms and expressions and a person skilled in the technical field as set forth above, except where different specific meanings have otherwise been set forth herein.

DETAILED DESCRIPTION

[0014] Referring now to the drawings and, in particular, to FIG. 1, an example environment in which a barrier operator feature enhancement device may operate will now be presented. A previously installed barrier operator 100 is configured to move a barrier 105 between open and closed positions. In the illustrated example, the barrier operator is a garage door opener configured to open and close a garage door for a typical garage although the subject matter described herein can be applied to a variety of other barrier operator settings.

The barrier operator **100** can be activated to open or close the barrier **105** using a remote control device **110** or a wired wall control **115**. The remote control device **110** communicates directly with the barrier operator **100** using a radio frequency based, wireless communication that is received and analyzed by the barrier operator **100** to determine what action it should take in response to receipt of the signal from the remote control device **110**. Similarly, the wall control device **115** includes buttons that when pressed effect sending a signal over the wire to the barrier operator **100** to effect the opening or closing of the barrier **105** or performance of another action. A barrier operator feature enhancement device **120** can be introduced into this space to add additional features to the barrier operator system present within this particular garage.

[0015] With reference to FIG. 2, an example barrier operator feature enhancement device **120** will be described. This apparatus includes a barrier operator communication module **125** that is configured to be able to communicate with a plurality of barrier operator types by sending communication signals by wireless or wired communication protocols. To facilitate this ability, the barrier operator communication module **125** includes an antenna **130** that may be built-in or external to the device **120**. The communication module **125** may also include a wired communication port **135** configured to be connected through one or more wires to a barrier operator. The feature enhancement device **120** also includes control circuitry **140** configured to use the barrier operator communication module **125** to communicate with any of the plurality of barrier operator types. So configured, the barrier operator feature enhancement device readily facilitates installation and coordination with a variety of previously installed barrier operator types. For example, the barrier operator feature enhancement device is configured to communicate with all or a subset of all barrier operators currently installed. Thus, a user who purchases a barrier operator feature enhancement device can be reasonably assured that the enhancement device is compatible with the user's particular previously installed barrier operator.

[0016] One approach for configuring communication between the barrier operator feature enhancement device **120** and the previously installed barrier operator **100** includes the control circuitry **140** being configured to effect sending communication signals from the barrier operator communication module **125** via a plurality of communication protocols to the pre-installed barrier operator **100**. For example, the barrier operator communication module **125** can be configured to be able to communicate with the plurality of barrier operator types by sending communication signals by one or more of wire-line relay switch activation, wire-line serial communications, wire-line encrypted serial communications, a first wireless transmission protocol based on a hand-held transmitter frequency, a second wireless transmission protocol different from the first wireless transmission protocol, radio frequency communications based on a frequency different from hand-held transmitter frequencies, radio frequency communications based on frequency hopping for spread spectrum, to name but a few, and combinations thereof. Generally speaking, as used in this application, a "hand-held transmitter" refers to a typical garage door controller that, for instance, clips to a vehicle visor and has a button that a user presses to open and close a garage door.

[0017] By one approach, the control circuitry **140** can wait for a time after sending a communication signal to the pre-installed barrier operator **100** to receive a communication

indicating a response from the pre-installed barrier operator **100** before sending another communication signal using a different protocol. The communication indicating the response from the pre-installed barrier operator can be received in a number of ways. For example, the receipt may occur through an input/output module **145** that will be described below. Examples signals include ones from a door sensor or limit sensor indicating door movement. In response to receiving the communication indicating the response from the pre-installed barrier operator, the control circuitry **140** configures the barrier operator communication module **125** to operate according to the communication protocol that effected the response from the pre-installed barrier operator **100**. By this example approach, the barrier operator feature enhancement device **120** can configure itself or learn the communication protocol with which it can communicate with the pre-installed barrier operator **100** with minimal intervention or effort on behalf of the device's user.

[0018] By another approach, the control circuitry **140** may be configured to learn the communication protocol for the pre-installed barrier operator **100** by analyzing a signal received by the barrier operator feature enhancement device **120** from a peripheral device. In one such approach, the control circuitry **140** is configured to analyze a signal received at the input/output module **145** from a peripheral device comprising a hand-held transmitter **110** associated with the pre-installed barrier operator **100** to determine a communication protocol associated with the pre-installed barrier operator **100**. For example, the control circuitry **140** can break down the radio frequency communication sent by the hand-held transmitter **110** to determine its characteristics and then adopt those characteristics for the barrier operator communication module **125**. U.S. Pat. Nos. 7,057,494 and 7,741,951, incorporated herein by reference, describe example approaches currently known to those skilled in the art for learning a transmission protocol. Accordingly, this control circuitry **140** can configure the barrier operator communication module **125** to operate according to the communication protocol associated with the pre-installed barrier operator **100**.

[0019] In still another approach, the barrier operator feature enhancement device **120** can include a user interface **150**. For example, the control circuitry **140** configures the barrier operator communications module **125** to operate according to a communication protocol in response to receipt of an instruction signal through the user interface **150**. In one such approach, a list of barrier operator types can be provided to a user through the user interface **150** or through separate documentation that will allow the user to use the user interface **150** to input the barrier operator type to the feature enhancement device **120**. In response to receipt of this feedback from the user interface **150**, the control circuitry **140** can access a memory or other storage such as an online database that will associate a communication protocol with the barrier operator type information received through the user interface **150**. The control circuitry **140** will then configure the barrier operator communication module **125** to operate in accordance with that communication protocol. In a further aspect, a similar user interface can be provided on other device remote from the feature enhancement device **120**. For instance, a mobile device or other computer can be programmed, run an application, or receive signals from another device to effect display of a user interface that allows a user to interact with the feature enhancement device **120**.

[0020] Once the communication protocol for the previously installed barrier operator **100** is determined, the control circuitry **140** is configured to use the barrier operator communication module **125** to communicate to at least one pre-installed barrier operator **100** to effect at least one of control of operation of at least one feature of the at least one pre-installed barrier operator **100** or monitoring at least one aspect of the at least one pre-installed barrier operator **100**. Control of the operation of a feature of a pre-installed barrier operator **100** can include moving a barrier **105**, stopping or overriding a function of the pre-installed movable barrier operator **100**, operating another function of a pre-installed movable barrier **100** such as operating a light, controlling a vacation mode, and the like, or changing an operation parameter such as a force setting or programmed operation mode of a pre-installed barrier operator **100** to name but a few examples. Generally speaking, sending a communication to a pre-installed barrier operator **100** to control operation can be considered effecting a change in function of the barrier operator **100**. Monitoring an aspect of a pre-installed barrier operator includes monitoring a barrier **105** status (such as open or closed) and watching other operation statuses of the operator **100** including error conditions, tamper warnings, and usage history to name only a few examples. As illustrated in FIG. 1, the feature enhancement device **120** can be deployed in a garage or other setting where more than one pre-installed barrier operator **100** is in use. In such a setting, the feature enhancement device **120** can be configured to operate with one, both, or in other installations, several or a subset of a group of previously installed barrier operators. In an example multiple barrier installation, the feature enhancement device can communicate with peripheral devices for a variety of barriers by storing identification information that is sent from individual peripheral devices together with communication signals to the feature enhancement device. So paired, the feature enhancement device can accurately monitor and control each of the multiple barriers with which it is paired.

[0021] Moreover, the communication to be had with any one pre-installed barrier operator **100** depends upon the capabilities of that operator **100**. For instance, older operators generally only communicated through receipt of a signal that causes immediate operation of the motor to open or close the barrier **105**. In such a situation, the feature enhancement device **120** will merely send signals to effect such operation and rely on other peripheral devices to facilitate monitoring of other aspects of the barrier operator such as door position and obstacle detection. Other operators have the ability to send information out regarding its status. For example, some operators are able to determine barrier position, force settings, light settings, and the like and provide this information to other devices. For those operators, the feature enhancement device **120** is configured to be able to send signals to such an operator to effect the operator **100** sending back such status information in a manner that the feature enhancement device **120** can understand the information and use the information to provide enhanced feature control for a user including, for example, automatically sending control signals to change a function of the barrier operator **100** in response to receiving particular status information from the operator **100**.

[0022] Turning again to FIG. 2, the input/output module **145** is operatively in communication with the control circuitry **140**. The input/output module **145** is configured to receive communications from at least one peripheral device configured to provide at least one of information regarding an

operation status of the pre-installed barrier operator **100** or information to effect operation of the pre-installed barrier operator **100**. These communications can be performed by a number of different physical layer structures. In one example, the communication can be carried via a wired or bus connection or via a wireless radio communication. The wireless communication can follow any protocol including single frequency, spread spectrum, Wi-Fi, BLUETOOTH, and the like. Generally speaking, the input/output module **145** is designed to provide for communications with any of a variety of devices other than the barrier operator **100**. So configured, the input/output module **145** can facilitate many types of interactions with other devices, examples of which will be disclosed below.

[0023] Those skilled in the art will recognize and understand that such a module **145** and operator communication module **125** may be comprised of a plurality of physically distinct elements as is suggested by the illustration shown in FIG. 2. It is also possible, however, to view this illustration as comprising a logical view, in which case one or more of these elements can be enabled and realized via a shared platform such that the operations described as being separate at the operator communication module **125** and the input/output module **145** are performed by the same physical elements. It will also be understood that such a shared platform may comprise a wholly or at least partially programmable platform as are known in the art. Moreover, the interfaces for the feature enhancement device **120** for the peripheral devices may include different physical implementations to effect such communication, such as with wireless or wired obstacle detectors, with a wired or wireless wall controller, with a wireless or radio communication device, or with another device. Such communication hardware configured to communicate with the individual peripheral devices are generally known and applicable by those of skill in the art and need no further discussion herein.

[0024] For example and with reference to FIG. 1, such peripheral devices with which the input/output module **145** communicates may include a computing device **200**, a home computer **205**, a server computing device **210**, a mobile computing device **215**, a gateway device **220** configured to enable communications with one or more of a home computer **205**, server computing device **210**, a mobile computing device **225**, or a mobile computing device **230** over a network **235**, and combinations thereof. Communications with any of these devices can be made using wired or wireless protocols as are known in the art. Communications with such computing devices can facilitate all manner of network communications such as communications with applications on smart phones and the like or facility monitoring systems as may be available or controlled by networked computing devices.

[0025] Other than just computing devices, the peripheral device from which the input/output module **145** can be configured to receive communications may also include one or more of an obstacle detector **155**, a network adapter **240**, a separate barrier operator **102**, a hand-held transmitter **110**, a wall control **115**, a door position sensor **160**, to name but a few, and combinations thereof. Communications with such devices allow the feature enhancement device **120** to provide features such as automatic barrier control in response to obstacle detection through which the feature enhancement device **120** can stop operation of a pre-installed barrier operator **100**. In one such example, the obstacle detector **155** is connected to the feature enhancement device **120**. If the fea-

ture enhancement device 120 receives a communication from the obstacle detector 155 that an obstacle has been detected and the feature enhancement device 120 knows that the barrier operator 100 is closing the barrier, the feature enhancement device 120 can communicate with the barrier operator 100 to stop the barrier and potentially send the barrier in the opening direction.

[0026] The feature enhancement device 120 can perform barrier position determination through communication with such peripheral devices to be able to determine and report out barrier 105 position among other possibilities or features that can be provided. The position determination peripheral device 160, 170 allows the feature enhancement device 120 to determine whether or not the barrier 105 is closed and to report to a remote user the position of the barrier 105 prior to activation of the movable barrier operator. Example position determination devices include limit switches 170, door monitors, tilt switches 160, and the like. The position determination peripheral device 160, 170 could be a transmit only device that transmits position information in response to any change of the position of the barrier 105. In an alternative approach, the position determination peripheral device 160, 170 could be a bidirectional communication device allowing the feature enhancement device 122 to request information about the position of the barrier 105.

[0027] In still another approach, the input/output module 145 is configured to receive communications from at least one peripheral device including a sending device where the communications include an identification signal indicating that the sending device is available for communication with the input/output module 145. In this example, the sending device may be any peripheral device described above that can have communications with a feature enhancement device 120 and facilitate installation and configuration of these peripheral or sending devices with the feature enhancement device 120. In one example, a sending device may include a button or other user interactive element that can be actuated by a user that will effect sending a signal that, on receipt by the feature enhancement device 120, indicates to the feature enhancement device 120 that the sending device is ready and able to be used by or communicate with the feature enhancement device 120. As yet another example, the sending device can be a device used for notification of imminent barrier motion. In this approach, the feature enhancement device 120 can be designed such that it requires the detection of the sending device prior to allowing at least a particular barrier motion.

[0028] In another example, the input/output module 145 can receive wireless local area network communications with one or more of the peripheral devices. Based on these communications from the wireless local area network, the control circuitry 140 is configured to decide which radio frequency communication format is sent to the pre-installed barrier operator 100. The wireless local area network devices may communicate using Wi-Fi, Bluetooth, or any other wireless based communication between or among peripheral devices located in the vicinity of the feature enhance device 120. In one example, the control circuitry 140 may recognize a communication style or command sent to or from the pre-installed barrier operator 100 via the wireless local area network and configure the operator communication module 125 accordingly. In another example, the control circuitry 140 may receive a communication over the wireless local area network with information identifying the pre-installed barrier operator 100 or its communication method. In one such example, a

user may look up the pre-installed barrier operator 100 on a computing device 215 and send that information regarding the operator 100 to the feature enhancement device 120 using, for example, the wireless local area network.

[0029] In another example, the input/output module 145 is configured to receive the communications from at least one peripheral device comprising an obstacle detector 155, as shown in FIG. 1. Such a configuration in combination with the feature enhancement device 120 communication with the pre-installed barrier operator 100 allows the feature enhancement device 120 to add obstacle detection features to a pre-installed barrier operator 100 incapable of incorporating such features. For example, the control circuitry 140 can be configured to not send a signal to effect closing the barrier 105 by the pre-installed barrier operator 100 in response to receiving any one of a variety of signals from the obstacle detector 155 that it would be unsafe to close the barrier 105. For example, the control circuitry 140 is configured not to send a signal to effect closing the barrier 105 in response to receiving a command to do so when detecting that the obstacle detector 155 is unable to detect an obstacle. This may occur where the obstacle detector 155 is an optical detector that is not properly aligned or otherwise rendered incapable of performing its task of detecting an obstacle and thus being unable to warn against operation if an obstacle is present. In another approach, the control circuitry 140 will not send a signal to effect closing the barrier 105 in response to receiving an indication from the input/output module 145 that the obstacle detector 155 detected an obstacle or in response to receiving indication that the pre-installed barrier operator 100 is opening the barrier 105. In still another approach, the control circuitry 140 may be configured to send a signal to effect opening a barrier 105 by the pre-installed barrier operator 100 in response to detecting that the obstacle detector 155 is unable to detect an obstacle or in response to receiving indication from the input/output module 145 that the obstacle detector 155 detected an obstacle. Similarly, in response to receiving an indication from a peripheral device that the pre-installed barrier operator 100 is closing a barrier 105 such as from a barrier position sensor 160 or the like, the control circuitry 140 is configured to send a signal to effect opening the barrier 105 by the pre-installed barrier operator 100 in response to detecting that the obstacle detector 155 is unable to detect an obstacle or in response to receiving an indication from the input/output module 145 that the obstacle detector 155 detected an obstacle. So configured, a variety of the advantages to having an obstacle detector can be added to pre-installed barrier operator 100 that is otherwise incapable of using such obstacle detector technology.

[0030] In another specific example, the input/output module 145 can be configured to receive communications from at least one peripheral device including a sensor 160 disposed to detect a location of a barrier 105 operated by the pre-installed barrier operator 100. The sensor 160 is illustrated as a tilt sensor, although any of a variety of other sensors may be used such as a limit switch, an accelerometer, a gravity sensor, or combinations thereof. Limit switches can be magnetic or physical switches placed along a track or other path of travel for the barrier 105 to detect the location of the barrier 105. A tilt sensor may comprise a microelectromechanical (MEMS) switch, an optical sensor, or other physical switch that is mounted to detect the barrier's 105 orientation. For example, the tilt sensor 160 as known in the art is mounted on the barrier 105 to determine the barrier 105's vertical or horizontal ori-

entation and based on that information, a determination can be made as to whether the door is open, i.e., the barrier is horizontally disposed, or closed, i.e., the barrier is vertically disposed. An accelerometer may be piezo electric based or MEMS switch as known in the art. In still another approach, the input/output module 145 can be configured to receive communications from at least one peripheral device including a hand-held transmitter 110 configured to send barrier commands via a radio frequency transmission to the input/output module 145.

[0031] In yet another approach, the input/output module 145 is configured to receive communications from at least one peripheral device including a network adapter 240 to effect a connection to the Internet. As illustrated in FIG. 1, the network adapter 240 is a separate device plugged into the wall that can communicate with the input/output module 145 with the feature enhancement device 120 using any available communication method. The network adapter 240 then has a separate connection to a network that facilitates a communication to the Internet. This communication or connection can be accomplished in a variety of ways as recognized by those skilled in the art. For example, the network adapter 240 may have a wireless connection to a cellular standard to facilitate the connection to the Internet. By another approach, the network adapter 240 can incorporate a power line communication protocol whereby communications are transmitted over local power lines between devices connected to the power lines. In still another approach, the network adapter 240 can create a network connection via an Ethernet wire line connection to a network device. Another example network adapter 240 connection approach is a Wi-Fi connection such as with the wireless device 220. The network adapter 240 in various approaches can plug into the feature enhancement device 120 to provide such communication abilities or be built into the device as part of the input/output module 145. For instance, in this example, the input/output module 145 can communicate using a wireless communication standard such as Wi-Fi to exchange network communications with the network device 220.

[0032] In any event, the input/output module 145 is configured to send communications to and receive communications from devices over the Internet. Such communications may include receiving commands to operate the pre-installed barrier operator 100 from a device over the Internet or to send status information regarding the pre-installed barrier operator 100 to a device over the Internet. So configured, the feature enhancement device 120 can allow a user to use a mobile computing device 230 that is located remote from the pre-installed barrier operator 100 to operate the barrier operator 100 or to simply receive information regarding whether the barrier is open or closed, for example, or whether a particular vehicle is in the garage.

[0033] For example, and as illustrated in FIGS. 2 and 3, the barrier operator feature enhancement device 120 may include a presence detector 170 configured to detect presence of a vehicle 175 and is in operable communication with the control circuitry 140. Presence detectors 170 can include passive infrared detectors, a photo beam system, a magnetic detector, a capacitance detector, sound detector, a camera with image analysis algorithms, or a communication system designed to detect identification information from a vehicle 175, or cell phone of the user from the radio communications such as Bluetooth, each of which is known in the art and needs no further description here. Examples include U.S. Pat. Nos.

7,221,289 and 7,994,896, each of which is incorporated by reference in its entirety herein. As an example a magnetic detection peripheral device can be mounted just below the preinstalled operator 100. When the vehicle is present it affect the magnetic field generated by the detector in such a way that the detector device can determine whether the vehicle is positioned below is or not. In turn, the control circuitry 140 is configured to effect communication with one or more of the peripheral devices in response to an initial detection of the vehicle 175. As described above and is further illustrated in FIG. 3, the feature enhancement device 120 through its input/output module 145 can be configured to communicate with any of a variety of other devices. Accordingly, the feature enhancement device 120 can effect changes in the operation of a variety of those devices in response to detecting presence or absence of a vehicle 175. For example, in response to an initial detection of the vehicle 175 the control circuitry 140 can effect a communication with a thermostat device 305 to effect a change in temperature setting for a climate control system 310 of a structure associated with the barrier 105. Another example includes effecting communication with a lighting control device 315 to effect a change in a lighting configuration such as lights for a home 320. For instance, in response to detecting an initial presence of a vehicle 175 driving into the driveway or garage, the feature enhancement device 120 can effect lighting of certain rooms that the driver of the vehicle 175 will first enter upon exiting the garage. Other lighting configurations are of course possible. In another example, in response to initial detection of the vehicle, the control circuitry 140 can effect communication with a computing device 330 to effect synchronization of data stored in the vehicle 175 at a data storage device 333 with data stored on the computing device 330. Such data can be any of a variety of things, such as media files, mapping data, navigation data, vehicle information (including operation statistics, maintenance needs, and the like), and combinations thereof.

[0034] In still another example, in response to an initial detection of the vehicle 175, the control circuitry 140 can effect a communication with a security system 340 to effect a change in status of the security system 340. For instance, detection of the vehicle 175 in the garage can initiate a disarming of a home security system with respect to an entry from the garage into the house or other building or security structure. A similar approach can be applied to a commercial setting with respect to causing a change in a commercial security system in response to detecting presence of a particular vehicle.

[0035] In still another example, in response to an initial detection of the vehicle 175, control circuitry 140 can effect communication with the home-based computing device 330 to effect sending a message to a user of the home-based computing device 330. One such message may simply be a text or similar message to someone else at the home indicating that a vehicle has arrived in the garage. In still another example, in response to an initial detection of the vehicle 175, control circuitry 140 can effect a communication with a gateway communication device 350, such as a Wi-Fi router or home automation gateway device, or a direct communication with one or more of the thermostat device 305, climate control system 310, lighting controller 315, computing device 330, security system 340, and home-based computing device 330 as opposed to having direct communication in between the feature enhancement device 120 and those various other

devices. The communication can be any known communication method including Z-wave, Zigbee, INSTEON, and X10 to name but a few examples.

[0036] Similarly, the feature enhancement device 120 may also communicate with any of the above devices in response to an initial detection of the absence of the vehicle 175. In this example, after the vehicle 175 drives out of the garage, the presence detector 170 will notice that the car 175 is no longer in the garage, and in response to the presence detector 170 making that determination, the control circuitry 140 can effect communication with any of the above devices to effect a change in their status, as described above. For example, the thermostat device 305 may be commanded to change a default temperature for the home while the occupant is gone, the security system 340 may be armed while the occupant is gone, the lighting controller device 315 may be set to turn the lights off when the occupant is gone during the daytime, and a message may be sent to a user using a computing device 330 that is still in the house providing notice that the vehicle 175 has left the garage.

[0037] Another feature that can be added by the barrier operator feature enhancement device 120 is the ability to detect and respond to a forced entry. In one such approach, in response to receiving from a peripheral device or from the pre-installed barrier operator 100 a communication indicating an attempt at forced entry, the control circuitry 140 is configured to send a communication to another of the peripheral devices to effect a security system response. For instance, a device 165 may be placed on the door or rails that can sense when a person tries to force open the door 105 and responsively send a signal regarding this attempt to the feature enhancement device 120. This device 165 can detect the attempt to force open the door 105 by measuring sound, vibration, door motion, and/or any other detection method as known in the art. Some known barrier operators also have this ability to sense the forced entry and generate a signal that can be received by the feature enhancement device 120. In response to receiving such a signal, the feature enhancement device 120 can communicate with a security system 340 or otherwise sound an alarm such as flashing its light 180 or sounding an alarm from its sound generator 185. Other examples include sending a communication to a vehicle 175 to effect locking the vehicle 175, to effect engagement of the vehicle's security system alarm, to effect disablement of the vehicle's starting mechanism, and/or to effect flashing of the vehicle's lights. Another example includes sending a communication to a computing device 330 to effect an announcement over a local security system 340 or to effect blinking of lights 320 at an associated structure, for example, in a home. In still another example, a communication may be sent to a network enabled device 220, 240 to effect sending a communication to a mobile computing device 230 regarding the attempted or forced entry such that a homeowner can receive an alert on the homeowner's tablet or phone regarding the attempted or forced entry.

[0038] Another feature that may be enabled with the feature enhancement device 120 having a presence detector 170 includes changing parameters of a timer to close function based on the presence or absence of the vehicle 175. More specifically, the control circuitry 140 can be configured to effect a timer to close function including sending a signal to the barrier operator 100 to close the barrier 105 in response to the passage of time. The control circuitry 140 is also configured to, in response to receiving a signal from the presence

detector 170 indicating presence or absence of the vehicle 175, change the parameters of the timer to close function. For example, the timer to close function may be inhibited by the control circuitry 140 if the presence detector 170 senses the presence of a vehicle 175. Similarly, the control circuitry 140 may enable a timer to close feature in response to the detection by the presence detector 170 that there are no vehicles left in the garage.

[0039] In still another approach, the presence detector 170 can be configured to determine the presence or absence of a particular vehicle 175, such that various features can be enabled or disabled in response to the detection of particular vehicles. More specifically, and in one example, the presence detector 170 can be configured to detect presence or absence of a plurality of specific vehicles through detection of a vehicle specific identifier received from individual ones of the specific vehicles. For instance, a given vehicle may have a universal garage door operator transmitter that is configured to send an identification signal to the movable barrier operator either directly or through an intermediary device or network. The input/output module 145 or presence detector 170 of the feature enhancement device 120 may receive that signal and decode the identification signal to identify the vehicle 175 and operate in accordance with pre-programming with respect to enabling or disabling certain features or actions in response to the presence or absence of the specific vehicle 175. Other options for determining or receiving the vehicle's identification number include receiving a Bluetooth communication from the vehicle, receiving a cellular communication from the vehicle, receiving communications from a specific user's mobile device through (such as through Bluetooth, Wi-Fi, mobile network communication, or the like) or by other means known to those skilled in the art.

[0040] Turning again to FIG. 2, the feature enhancement device 120 may further include a light 180 and a sound generator 185. The control circuitry 140 is configured to effect generation of a sound by the sound generator 185 and flashing of the light 180 in coordination with sending a signal to effect closing of the barrier 105 by the pre-installed barrier operator 100. Typically in this situation where the barrier operator 100 receives the command to operate the barrier operator 100 from a device that is remote from the garage, flashing the light 180 and producing a sound from the sound generator or speaker 185 acts as a warning to those in the vicinity of the garage that the barrier 105 will be closing. In one example, the control circuitry 140 is configured to disable generation of a sound by the sound generator 185 with flashing of the light 180 in response to determining that the pre-installed barrier operator 100 includes a sound generator and light effect to provide an alert regarding closing of a barrier 105 by the pre-installed barrier operator 100. This configuration allows the feature enhancement device 120 to not unnecessarily duplicate the effect as may be provided by the pre-installed barrier operator 100.

[0041] In accord with the structures described above, and with reference to FIG. 4, a method 400 of operation of a feature enhancement device 120, which can be considered a "retro-fit" device, will be described. The method includes sending 410 communication signals from a communication module via a plurality of communication protocols to a pre-installed barrier operator. The retro-fit device receives 415 a communication indicating a response from the pre-installed barrier operator, and, in response, the retro-fit device configures 420 the communication module to operate according to

a communication protocol that effected the response from the pre-installed barrier operator. Accordingly, the retro-fit device is now in a position to communicate with the pre-installed barrier operator to provide one or more additional features that may have been missing from the pre-installed barrier operator.

[0042] For example, the retro-fit device may receive 425 information from a peripheral device and determine 430 an action or setting change for the pre-installed barrier operator based on the information from the peripheral device. After making that determination, the retro-fit device sends 430 a communication signal according to the communication protocol to the pre-installed barrier operator. That communication signal is configured to effect the action or setting change to the pre-installed barrier operator. As described above, the process of configuring the communication module to operate according to a particular communication protocol may include consideration or utilization of information from one or more peripheral devices to help make the determination of which protocol to use in communicating with the pre-installed barrier operator.

[0043] In an additional alternative embodiment, the functionality or logic described with respect to FIG. 4 and elsewhere in this disclosure may be embodied in the form of code that may be executed in a separate processor circuit. If embodied in software, each block may represent a module, segment, or portion of code that comprises program instructions to implement the specified logical function(s). The program instructions may be embodied in the form of source code that comprises human-readable statements written in a programming language or machine code that comprises numerical instructions recognizable by a suitable execution system such as a processor in a computer system or other system. The machine code may be converted from the source code, etc. If embodied in hardware, each block may represent a circuit or a number of interconnected circuits to implement the specified logical function(s). Any of these structures are known to those of skill in the art and needs no further description.

[0044] The feature enhancement device 120 described in this application may be packaged together with any of a variety of the peripheral devices described above to facilitate provision of features to pre-installed barrier operators. For example, the feature enhancement device may be sold together with obstacle detectors, a tilt sensor for mounting on the door, a remote control device, a network adapter, and the like. Such a kit can then be purchased by a user and installed as described above to provide enhanced operability to the barrier operator previously installed at the user's premises.

[0045] In one specific example, FIG. 5 illustrates one potential arrangement of the feature enhancement device 120. In this approach, the preinstalled operator 100 is connected to the feature enhancement device 120 via wire connections to the operator's command input 502 and to the operator's obstruction input 504. Feature enhancement device 120 is also connected via wires 506 to the original wall control 500 that came with the preinstalled operator 100. The handheld transmitter's 110 radio frequency signal is received by the feature enhancement device 120 to activate the preinstalled operator 100 via the feature enhancement device 120. The feature enhancement device 120 is also connected via a wire 530 to a router/modem 520, which connects the system to the Internet in well-known method. In this way, the feature enhancement device 120 can allow activation of the barrier

operator from the Internet, from the preinstalled operators wall control 500, and from the handheld transmitter 110. Not shown is the possibility of utilizing the wireless capabilities of feature enhancement device 120 to communicate directly with a portable computational device. The communication can be done by any of a number of possible communication formats including Bluetooth and Wi-Fi as examples. Due to the communications being routed through the feature enhancement device 120, the feature enhancement device 120 is able to control when and if command reaches the preinstalled operator 100.

[0046] As explained earlier, the feature enhancement device 120 can have a light 180 and a sound generator 185. The light 180 and sound generator 185 can be utilized to pre-warn before the command is sent to the preinstalled barrier operator 100. For example, if the feature enhancement device 120 received a command to move or close the barrier over the Internet, the feature enhancement device 120 can turn on or flash the light 180 and/or play a warning sound from the sound generator of a time before sending a command to the pre-installed barrier operator 100 to move or close the barrier. In this way, unattended operation of the preinstalled barrier operator can be announced prior to the motion of the barrier.

[0047] The feature enhancement device 120 can also report on the status of the preinstalled barrier operator 100. For example, the feature enhancement device 120 can monitor the door's position through communication with the sensor 160 and knowledge of the commands given to the barrier operator 120 and then notify a remote device via the Internet or through local wireless communications of the present status of the barrier 105. In the case where a handheld transmitter 190 is directly paired with the preinstalled operator 100 to move the barrier 105, the feature enhancement device 120 can still monitor the barrier 105 status through communication with the door position sensor 160.

[0048] In this example, the feature enhancement device 120 is wired to the obstacle detectors 155 via a set of wires 157. The feature enhancement device 120 can monitor the obstacle detectors 155 to ensure that they are functioning properly and feature enhancement device 120 can control the barrier operator 100 accordingly for combination of the command input 502 and the other obstruction input 504. The feature enhancement device 120 can also monitor the actions of the pre-installed operator 100 via the sensor 160 to ensure that the operator is performing the intended function. If the barrier 105 is in motion in the downward direction and the feature enhancement device 120 detects a failure of the obstacle detector 155, the feature enhancement device 120 can force the operator 100 to reverse direction by shorting the obstruction input 504. If that action is not followed, the feature enhancement device 120 can give one or more commands via the command input 502 to perform the desired function. In another example, FIG. 6 illustrates a system where the feature enhancement device 120 is completely wireless. In this situation, the feature enhancement device 120 can be a module that plugs into the wall somewhere near the garage, such as at a typical electrical outlet. In this example, the preinstalled operator 100 includes preinstalled obstacle detectors 155 that are directly connected to and monitored by the operator 100 via wires 510.

[0049] In the example of FIG. 6, the feature enhancement device 120 communicates with a Wi-Fi router/modem 610, which is connected to the Internet using methods well known

in the art. Feature enhancement device **120** also communicates to the preinstalled barrier operator **100** by sending a radio transmission to activate the operator **100**. A door position sensor **160** wirelessly communicates with the feature enhancement device **120**. A handheld transmitter **110** communicates with the feature enhancement device **120** via wireless communication. A wall button **600** communicates wirelessly with the feature enhancement device **120**, although the wall button **600** aspect can be included within the device **120**. An original transmitter **190** is paired and communicates directly with the preinstalled operator **100**. Although not shown explicitly in this figure, the feature enhancement device **120** is able to communicate directly and wirelessly with other computational devices to provide direct access for the computational device to effect activation of the preinstalled operator **100** and obtain information regarding a status of the barrier **105**. This example enables Internet activation of the barrier operator **100** and marking of the barrier position allowing long-range operation and monitoring of the pre-installed barrier operator.

[0050] Those skilled in the art will recognize that a wide variety of modifications, alterations, and combinations can be made with respect to the above described embodiments without departing from the scope of the invention. For example, although the feature enhancement device is described largely in the context of a garage in use with a garage door opener, such a feature enhancement device can be applied in other barrier operator contexts, such as gate operators and the like. Moreover, any of the retro-fit features described herein can be incorporated into a movable barrier operator. For instance, the various capabilities described with respect to sensing vehicle presence or absence, sensing forced entry, and the like can be triggered or controlled by a movable barrier operator incorporating the associated features of such a retro-fit device. Such modifications, alterations, and combinations are to be viewed as being within the ambit of the inventive concept.

1. An apparatus comprising:

a barrier operator communication module configured to be able to communicate with a plurality of barrier operator types by sending communication signals by wireless or wired communication protocols;

control circuitry configured to use the barrier operator communication module to communicate with any of the plurality of barrier operator types, the control circuitry configured to use the barrier operator communication module to communicate to at least one pre-installed barrier operator to effect at least one of:

control of operation of at least one feature of the at least one pre-installed barrier operator, or monitoring of at least one aspect of the at least one pre-installed barrier operator;

an input/output module operatively in communication with the control circuitry, the input/output module configured to receive communications from at least one peripheral device configured to provide information of at least one of regarding an operation status of the pre-installed barrier operator or to effect operation of the pre-installed barrier operator;

the control circuitry configured to, in response to receiving the communication from the at least one peripheral device, effect at least one of:

sending a communication to the pre-installed barrier operator to at least one of effect a movement of a barrier or change a setting of the pre-installed barrier operator, or

sending a communication to the at least one peripheral device regarding the status of the pre-installed barrier operator.

2. The apparatus of claim 1 wherein the control circuitry is configured to:

effect sending communication signals from the barrier operator communication module via a plurality of communication protocols to the pre-installed barrier operator;

receive a communication indicating a response from the pre-installed barrier operator; and

configure the barrier operator communication module to operate according to a communication protocol that effected the response from the pre-installed barrier operator.

3. The apparatus of claim 1 wherein the control circuitry is configured to:

analyze a signal received at the input/output module from a peripheral device comprising a handheld transmitter associated with the pre-installed barrier operator to determine a communication protocol associated with the pre-installed barrier operator; and

configure the barrier operator communication module to operate according to the communication protocol associated with the pre-installed barrier operator.

4. The apparatus of claim 1 wherein the control circuitry is configured to configure the barrier operator communication module to operate according to a communication protocol in response to receipt of an instruction signal through a user interface.

5. The apparatus of claim 1 wherein the input/output module is configured to receive communications from at least one peripheral device comprising a sending device, the communications comprising an identification signal indicating that the sending device is available for communication with the input/output module.

6. The apparatus of claim 1 wherein the input/output module is configured to receive communications from at least one peripheral device comprising a computing device.

7. The apparatus of claim 6 wherein the input/output module is configured to receive communications from at least one peripheral device comprising a computing device of one or more of the group consisting of:

- a home computer;
- a server computing device;
- a mobile computing device;
- a gateway device configured to enable communications with one or more of a home computer, server computing device, or a mobile computing device over a network; and combinations thereof.

8. The apparatus of claim 1 wherein the input/output module is configured to receive communications from at least one peripheral device comprising one or more from the group consisting of: an obstacle detector, a network adapter, a separate barrier operator, a handheld transmitter, a wall controller, a door position sensor, and combinations thereof.

9. The apparatus of claim 1 further comprising a presence detector configured to detect presence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect communica-

tion with one or more of the at least one peripheral devices in response to an initial detection of the vehicle.

10. The apparatus of claim **9**, wherein the communication with the one or more of the at least one peripheral devices in response to an initial detection of the vehicle is one or more from the group consisting of:

- a communication with a thermostat device to effect a change in temperature setting for a climate control system;
 - a communication with a lighting controller device to effect a change in a lighting configuration;
 - a communication with a computing device to effect a synchronization of data stored in the vehicle and data stored on the computing device;
 - a communication with a security system to effect a change in status of the security system;
 - a communication with a home-based computing device to effect sending a message to a user of the home-based computing device;
 - a communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device;
- and combinations thereof.

11. The apparatus of claim **10** wherein the communication with the computing device to effect synchronization of data stored in the vehicle and data stored on the computing device comprises a communication to effect synchronization of one or more of the group consisting of: media files, mapping data, navigation data, vehicle information, and combinations thereof.

12. The apparatus of claim **1** further comprising a presence detector configured to detect presence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect communication with one or more of the at least one peripheral devices in response to an initial detection of absence of the vehicle.

13. The apparatus of claim **12**, wherein the communication with the one or more of the at least one peripheral devices in response to an initial detection of absence of the vehicle is one or more from the group consisting of:

- a communication with a thermostat device to effect a change in temperature setting for a climate control system;
 - a communication with a lighting controller device to effect a change in a lighting configuration;
 - a communication with a security system to effect a change in status of the security system;
 - a communication with a home-based computing device to effect sending a message to a user of the home-based computing device;
 - a communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device;
- and combinations thereof.

14. The apparatus of claim **1** wherein the control circuitry is configured to, in response to receiving from the at least one peripheral device or from the pre-installed barrier operator a communication indicating an attempt at forced entry, send a communication to another of the at least one peripheral devices to effect a security system response.

15. The apparatus of claim **14** wherein the communication to another of the at least one peripheral devices to effect a security system response is one or more of the group consisting of:

- a communication to a vehicle to effect locking the vehicle;
 - a communication to a vehicle to effect engagement of the vehicle's security system alarm;
 - a communication to a vehicle to effect disablement of the vehicle's starting mechanism;
 - a communication to a vehicle to effect flashing of the vehicle's lights;
 - a communication to a computing device to effect an announcement over a local security system;
 - a communication to a computing device to effect blinking of lights at an associated structure;
 - a communication to a network enabled device to effect sending a communication to a mobile computing device regarding the attempt at forced entry;
- and combinations thereof.

16. The apparatus of claim **1** further comprising a presence detector configured to detect presence or absence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect a timer to close function including sending a signal to the barrier operator to close a barrier in response to passage of a time; the control circuitry being further configured to, in response to receipt of a signal from the presence detector indicating presence or absence of a vehicle, change parameters of the timer to close function.

17. The apparatus of claim **16** wherein the presence detector is configured to detect presence or absence of a plurality of specific vehicles through detection of a vehicle specific identifier received from individual ones of the plurality of specific vehicles.

18. The apparatus of claim **16** wherein the control circuitry is further configured to, in response to receipt of a signal from the presence detector indicating absence of a group of specific vehicles, enable the timer to close function.

19. The apparatus of claim **16** wherein the control circuitry is further configured to, in response to receipt of a signal from the presence detector indicating presence of a particular vehicle, disable the timer to close function.

20. The apparatus of claim **1** further comprising a sound generator and a light.

21. The apparatus of claim **20** wherein the control circuitry is configured to effect generation of a sound by the sound generator and flashing of the light in coordination with effecting sending a signal to effect closing of the barrier by the pre-installed barrier operator.

22. The apparatus of claim **20** wherein the control circuitry is configured to disable generation of a sound by the sound generator and flashing of the light in response to determining that the pre-installed barrier operator includes a sound generator and light effect to provide an alert regarding closing of a barrier by the pre-installed barrier operator.

23. The apparatus of claim **1** wherein the input/output module is configured to receive communications from at least one peripheral device comprising an obstacle detector.

24. The apparatus of claim **23** wherein the control circuitry is configured to not send a signal to effect closing a barrier by the pre-installed barrier operator in response to receiving a command to do so when detecting that the obstacle detector is unable to detect an obstacle, in response to receiving indication from the input/output module that the obstacle detector

detected an obstacle, or in response to receiving indication that the pre-installed barrier operator is opening a barrier.

25. The apparatus of claim **23** wherein the control circuitry is configured to send a signal to effect opening a barrier by the pre-installed barrier operator in response to detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication from the input/output module that the obstacle detector detected an obstacle.

26. The apparatus of claim **23** wherein in response to receiving an indication from the at least one peripheral device that the pre-installed barrier operator is closing a barrier, the control circuitry is configured to send a signal to effect opening the barrier by the pre-installed barrier operator when detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication from the input/output module that the obstacle detector detected an obstacle.

27. The apparatus of claim **1** wherein the input/output module is configured to receive communications from at least one peripheral device comprising a network adapter to effect a connection to Internet.

28. The apparatus of claim **27** wherein the input/output module is configured to send communications to and receive communications from devices over the Internet.

29. The apparatus of claim **27** wherein the input/output module is configured to receive commands to operate the pre-installed barrier operator from a device over the Internet.

30. The apparatus of claim **27** wherein the input/output module is configured to send status information regarding the pre-installed barrier operator to a device over the Internet.

31. The apparatus of claim **1** wherein the input/output module is configured to receive communications from at least one peripheral device comprising a sensor disposed to detect a location of a barrier operated by the pre-installed barrier operator.

32. The apparatus of claim **31** wherein the sensor comprises one or more of the group consisting of: a limit switch, a tilt sensor, accelerometer, gravity sensor, and combinations thereof.

33. The apparatus of claim **1** wherein the input/output module is configured to receive communications from at least one peripheral device comprising a handheld transmitter configured to send barrier commands via a radio frequency transmission to the input/output module.

34. The apparatus of claim **1** wherein the barrier operator communication module is configured to be able to communicate with a plurality of barrier operator types by sending communication signals by one or more of the group consisting of:

- wire-line relay switch activation,
- wire-line serial communications,
- wire-line encrypted serial communications,
- a first wireless transmission protocol based on a handheld transmitter frequency,
- a second wireless transmission protocol different from the first wireless transmission protocol,
- radio frequency communications based on a frequency different from handheld transmitter frequencies,
- radio frequency communications based on frequency hopping for spread spectrum,
- and combinations thereof.

35. An apparatus comprising:

a wireless communication interface configured to:

exchange communications including wireless local area network communications with peripheral devices, and

send radio frequency communications in a plurality of formats to a pre-installed barrier operator;

control circuitry configured to effect sending at least one of a plurality of communications to a particular pre-installed barrier operator from the wireless communication interface to effect a change in function of the barrier operator.

36. The apparatus of claim **35** wherein the control circuitry is configured to decide which radio frequency communication format is sent to the pre-installed barrier operator based on communications from the wireless local area network.

37. The apparatus of claim **35** wherein the wireless communication interface is further configured to receive radio frequency communications from a handheld transmitter.

38. The apparatus of claim **37** wherein the wireless communication interface is configured to exchange communications with peripheral devices using a radio frequency different from the radio frequency communications from the handheld transmitter.

39. The apparatus of claim **35** wherein the control circuitry is configured to effect sending at least two of the plurality of communications to the particular pre-installed barrier operator.

40. The apparatus of claim **35** wherein the control circuitry is configured to:

effect sending communication signals from one or both of the wireless communication interface and the wired communication interface via a plurality of communication protocols to the particular pre-installed barrier operator;

receive a communication indicating a response from the particular pre-installed barrier operator; and

configure one or both of the wireless communication interface and the wired communication interface to operate according to a communication protocol that effected the response from the particular pre-installed barrier operator.

41. The apparatus of claim **35** wherein the control circuitry is configured to:

analyze a signal received from a handheld transmitter associated with the particular pre-installed barrier operator to determine a communication protocol associated with the particular pre-installed barrier operator; and

configure one or both of the wireless communication interface and the wired communication interface to operate according to the communication protocol associated with the particular pre-installed barrier operator.

42. The apparatus of claim **35** wherein the control circuitry is configured to configure one or both of the wireless communication interface and the wired communication interface to operate according to a communication protocol in response to receipt of an instruction signal through a user interface.

43. The apparatus of claim **35** wherein the wireless communication interface is configured to receive communications from at least one peripheral device comprising a sending device, the communications comprising an identification signal indicating that the sending device is available for communication with the wireless communication interface.

44. The apparatus of claim 35 wherein the wireless communication interface is configured to receive communications from at least one peripheral device comprising a computing device.

45. The apparatus of claim 35 wherein the wireless communication interface is configured to receive communications from at least one peripheral device comprising a computing device of more of the group consisting of:

- a home computer;
- a server computing device;
- a mobile computing device;
- a gateway device configured to enable communications with one or more of a home computer, server computing device, or a mobile computing device over a network;
- and combinations thereof.

46. The apparatus of claim 35 wherein the wireless communication module is configured to receive communications from at least one peripheral device comprising one or more from the group consisting of: an obstacle detector, a network adapter, a separate barrier operator, a handheld transmitter, a wall controller, a door position sensor, and combinations thereof.

47. The apparatus of claim 35 further comprising a presence detector configured to detect presence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect communication with one or more of the at least one peripheral devices in response to an initial detection of the vehicle.

48. The apparatus of claim 47, wherein the communication with the one or more of the at least one peripheral devices in response to an initial detection of the vehicle is one or more from the group consisting of:

- a communication with a thermostat device to effect a change in temperature setting for a climate control system;
- a communication with a lighting controller device to effect a change in a lighting configuration;
- a communication with a computing device to effect a synchronization of data stored in the vehicle and data stored on the computing device;
- a communication with a security system to effect a change in status of the security system;
- a communication with a home-based computing device to effect sending a message to a user of the home-based computing device;
- a communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device;
- and combinations thereof.

49. The apparatus of claim 48 wherein the communication with the computing device to effect synchronization of data stored in the vehicle and data stored on the computing device comprises a communication to effect synchronization of one or more of the group consisting of: media files, mapping data, navigation data, vehicle information, and combinations thereof.

50. The apparatus of claim 35 further comprising a presence detector configured to detect presence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect com-

munication with one or more of the at least one peripheral devices in response to an initial detection of absence of the vehicle.

51. The apparatus of claim 50, wherein the communication with the one or more of the at least one peripheral devices in response to an initial detection of absence the vehicle is one or more from the group consisting of:

- a communication with a thermostat device to effect a change in temperature setting for a climate control system;
- a communication with a lighting controller device to effect a change in a lighting configuration;
- a communication with a security system to effect a change in status of the security system;
- a communication with a home-based computing device to effect sending a message to a user of the home-based computing device;
- a communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device;
- and combinations thereof.

52. The apparatus of claim 35 wherein the control circuitry is configured to, in response to receiving from the at least one peripheral device or from the particular pre-installed barrier operator a communication indicating an attempt at forced entry, send a communication to another of the at least one peripheral devices to effect a security system response.

53. The apparatus of claim 52 wherein the communication to another of the at least one peripheral devices to effect a security system response is one or more of the group consisting of:

- a communication to a vehicle to effect locking the vehicle;
- a communication to a vehicle to effect engagement of the vehicle's security system alarm;
- a communication to a vehicle to effect disablement of the vehicle's starting mechanism;
- a communication to a vehicle to effect flashing of the vehicle's lights;
- a communication to a computing device to effect an announcement over a local security system;
- a communication to a computing device to effect blinking of lights at an associated structure;
- a communication to a network enabled device to effect sending a communication to a mobile computing device regarding the attempt at forced entry;
- and combinations thereof.

54. The apparatus of claim 35 further comprising a presence detector configured to detect presence or absence of a vehicle, wherein the presence detector is in operable communication with the control circuitry, which is configured to effect a timer to close function including sending a signal to the barrier operator to close a barrier in response to passage of a time;

- the control circuitry being further configured to, in response to receipt of a signal from the presence detector indicating presence or absence of a vehicle, change parameters of the timer to close function.

55. The apparatus of claim 54 wherein the presence detector is configured to detect presence or absence of a plurality of specific vehicles through detection of a vehicle specific identifier received from individual ones of the plurality of specific vehicles.

56. The apparatus of claim **54** wherein the control circuitry is further configured to, in response to receipt of a signal from the presence detector indicating absence of a group of specific vehicles, enable the timer to close function.

57. The apparatus of claim **54** wherein the control circuitry is further configured to, in response to receipt of a signal from the presence detector indicating presence of a particular vehicle, disable the timer to close function.

58. The apparatus of claim **35** further comprising a sound generator and a light.

59. The apparatus of claim **58** wherein the control circuitry is configured to effect generation of a sound by the sound generator and flashing of the light in coordination with effecting sending a signal to effect closing of the barrier by the pre-installed barrier operator.

60. The apparatus of claim **58** wherein the control circuitry is configured to disable generation of a sound by the sound generator and flashing of the light in response to determining that the particular pre-installed barrier operator includes a sound generator and light effect to provide an alert regarding closing of a barrier by the particular pre-installed barrier operator.

61. The apparatus of claim **35** wherein the wireless communication interface is configured to receive communications from at least one peripheral device comprising an obstacle detector.

62. The apparatus of claim **61** wherein the control circuitry is configured to not send a signal to effect closing a barrier by the particular pre-installed barrier operator in response to receiving a command to do so when detecting that the obstacle detector is unable to detect an obstacle, in response to receiving indication that the obstacle detector detected an obstacle, or in response to receiving indication that the particular pre-installed barrier operator is opening a barrier.

63. The apparatus of claim **61** wherein the control circuitry is configured to send a signal to effect opening a barrier by the particular pre-installed barrier operator in response to detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication that the obstacle detector detected an obstacle.

64. The apparatus of claim **61** wherein in response to receiving an indication from the at least one peripheral device that the particular pre-installed barrier is closing a barrier, the control circuitry is configured to send a signal to effect opening the barrier by the particular pre-installed barrier operator in response to receiving a command to do so when detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication that the obstacle detector detected an obstacle.

65. The apparatus of claim **35** wherein the wireless communication module is configured to receive communications from at least one peripheral device comprising a network adapter to effect a connection to Internet.

66. The apparatus of claim **64** wherein the wireless communication module is configured to send communications to and receive communications from devices over the Internet.

67. The apparatus of claim **64** wherein the wireless communication module is configured to receive commands to operate the particular pre-installed barrier operator from a device over the Internet.

68. The apparatus of claim **64** wherein the wireless communication module is configured to send status information regarding the pre-installed barrier operator to a device over the Internet.

69. The apparatus of claim **35** wherein the wireless communication module is configured to receive communications from at least one peripheral device comprising a sensor disposed to detect a location of a barrier operated by the particular pre-installed barrier operator.

70. The apparatus of claim **69** wherein the sensor comprises one or more of the group consisting of: a limit switch, a tilt sensor, accelerometer, gravity sensor, and combinations thereof.

71. The apparatus of claim **35** wherein the wireless communication module is configured to receive communications from at least one peripheral device comprising a handheld transmitter configured to send move barrier commands via a radio frequency transmission to the wireless communication module.

72. The apparatus of claim **35** wherein the wireless communication interface is configured to be able to communicate with a plurality of barrier operator types by sending communication signals by one or more of the group consisting of:

a first wireless transmission protocol based on a handheld transmitter frequency,

a second wireless transmission protocol different from the first wireless transmission protocol,

radio frequency communications based on a frequency different from handheld transmitter frequencies,

radio frequency communications based on frequency hopping for spread spectrum,

and combinations thereof.

73. The apparatus of claim **35** further comprising:

a wired communication interface configured to send communication signals in a plurality of formats to a pre-installed barrier operator;

wherein the control circuitry is configured to effect sending at least one of a plurality of communications from either the wireless communication interface or the wired communication interface.

74. The apparatus of claim **73** wherein the wired communication interface is configured to be able to communicate with a plurality of barrier operator types by sending communication signals by one or more of the group consisting of:

wire-line relay switch activation,

wire-line serial communications,

wire-line encrypted serial communications,

and combinations thereof.

75. A method comprising:

sending communication signals from a communication module via a plurality of communication protocols to a pre-installed barrier operator;

receiving a communication indicating a response from the pre-installed barrier operator;

configuring the communication module to operate according to a communication protocol that effected the response from the pre-installed barrier operator;

receiving information from a peripheral device;

determining an action or setting change for the pre-installed barrier operator based on the information from the peripheral device;

sending a communication signal according to the communication protocol to the pre-installed barrier operator, the communication signal configured to effect the action or the setting change for the pre-installed barrier operator.

76. The method of claim **75** wherein the configuring the communication module to operate according to a communication protocol is preformed utilizing information from the peripheral device.

77. The method of claim **75** wherein the determining the action or setting change comprises determining to open or close a barrier controlled by the pre-installed barrier operator.

78. The method of claim **75** wherein the sending the communication signals from the communication module via the plurality of communication protocols to the pre-installed barrier operator comprises sending the communication signals using wire based and wireless based communication protocols.

79. The apparatus of claim **75** wherein the barrier operator communication module is configured to be able to communicate with a plurality of barrier operator types by sending communication signals by one or more of the group consisting of:

- wire-line relay switch activation,
- wire-line serial communications,
- wire-line encrypted serial communications,
- a first wireless transmission protocol based on a handheld transmitter frequency,
- a second wireless transmission protocol different from the first wireless transmission protocol,
- radio frequency communications based on a frequency different from handheld transmitter frequencies,
- radio frequency communications based on frequency hopping for spread spectrum,
- and combinations thereof.

80. The method of claim **75** wherein the receiving the communication indicating a response from the pre-installed barrier operator comprises receiving a signal from a door position sensor indicating movement of the door.

81. The method of claim **75** wherein the receiving the signal from the door position sensor indicating movement of the door comprises receiving the signal from one or more of the group consisting of a tilt sensor, a limit switch, and combinations thereof.

- 82.** The method of claim **75** further comprising:
- analyzing a signal received from a handheld transmitter associated with the pre-installed barrier operator to determine a communication protocol associated with the pre-installed barrier operator; and
 - configure the communication module to operate according to the communication protocol associated with the pre-installed barrier operator.

83. The method of claim **75** further comprising configuring the communication module to operate according to a communication protocol in response to receipt of an instruction signal through a user interface.

84. The method of claim **75** wherein the receiving information from a peripheral device further comprises receiving information from a sending device, the information comprising an identification signal indicating that the sending device is available for communication.

85. The method of claim **75** wherein the receiving information from a peripheral device further comprises receiving information from a computing device.

86. The method of claim **85** wherein the receiving information from a peripheral device further comprises receiving information from a computing device of one or more of the group consisting of:

- a home computer;
- a server computing device;
- a mobile computing device;
- a gateway device configured to enable communications with one or more of a home computer, server computing device, or a mobile computing device over a network;
- and combinations thereof.

87. The method of claim **75** wherein the receiving information from a peripheral device further comprises receiving information from one or more from the group consisting of: an obstacle detector, a network adapter, a separate barrier operator, a handheld transmitter, a wall controller, a door position sensor, and combinations thereof.

88. The method of claim **75** further comprising detecting presence of a vehicle with a presence detector and effecting communication with one or more peripheral devices in response to an initial detection of the vehicle.

89. The method of claim **88**, wherein the effecting communication with one or more peripheral devices in response to an initial detection of the vehicle comprises one or more from the group consisting of:

- effecting communication with a thermostat device to effect a change in temperature setting for a climate control system;
- effecting communication with a lighting controller device to effect a change in a lighting configuration;
- effecting communication with a computing device to effect a synchronization of data stored in the vehicle and data stored on the computing device;
- effecting communication with a security system to effect a change in status of the security system;
- effecting communication with a home-based computing device to effect sending a message to a user of the home-based computing device;
- effecting communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device;
- and combinations thereof.

90. The method of claim **89** wherein the effecting communication with the computing device to effect synchronization of data stored in the vehicle and data stored on the computing device comprises effecting communication to effect synchronization of one or more of the group consisting of: media files, mapping data, navigation data, vehicle information, and combinations thereof.

91. The method of claim **75** further comprising detecting presence of a vehicle with a presence detector and effecting communication with one or more peripheral devices in response to an initial detection of absence of the vehicle.

92. The method of claim **91**, wherein the effecting communication with one or more peripheral devices in response to an initial detection of absence the vehicle is one or more from the group consisting of:

- effecting communication with a thermostat device to effect a change in temperature setting for a climate control system;
- effecting communication with a lighting controller device to effect a change in a lighting configuration;
- effecting communication with a security system to effect a change in status of the security system;
- effecting communication with a home-based computing device to effect sending a message to a user of the home-based computing device;

effecting communication with a gateway communication device configured to communicate with one or more of a thermostat device, climate control system, lighting controller, computing device, security system, and home-based computing device; and combinations thereof.

93. The method of claim 75 further comprising in response to receiving from at least one peripheral device or the pre-installed barrier operator a communication indicating an attempt at forced entry, sending a communication to another peripheral device to effect a security system response.

94. The method of claim 93 wherein the sending a communication to another peripheral device to effect a security system response comprises one or more of the group consisting of:

- effecting communication to a vehicle to effect locking the vehicle;
- effecting communication to a vehicle to effect engagement of the vehicle's security system alarm;
- effecting communication to a vehicle to effect disablement of the vehicle's starting mechanism;
- effecting communication to a vehicle to effect flashing of the vehicle's lights;
- effecting communication to a computing device to effect an announcement over a local security system;
- effecting communication to a computing device to effect blinking of lights at an associated structure;
- effecting communication to a network enabled device to effect sending a communication to a mobile computing device regarding the attempt at forced entry;
- and combinations thereof.

95. The method of claim 75 further comprising: detecting presence or absence of a vehicle a presence detector; effecting a timer to close function including sending a signal to the barrier operator to close a barrier in response to passage of a time; in response to receipt of a signal from the presence detector indicating presence or absence of a vehicle, changing parameters of the timer to close function.

96. The method of claim 95 further comprising detecting a plurality of specific vehicles through detection of a vehicle specific identifier received from individual ones of the plurality of specific vehicles.

97. The method of claim 95 further comprising, in response to receipt of a signal from the presence detector indicating absence of a group of specific vehicles, enabling the timer to close function.

98. The method of claim 95 further comprising, in response to receipt of a signal from the presence detector indicating presence of a particular vehicle, disabling the timer to close function.

99. The method of claim 75 further comprising effecting generation of a sound by a sound generator and flashing of a light in coordination with sending a signal to effect closing of the barrier by the pre-installed barrier operator.

100. The method of claim 75 further comprising disabling generation of a sound by a sound generator and flashing of a

light in response to determining that the pre-installed barrier operator includes a sound generator and light effective to provide an alert regarding closing of a barrier by the pre-installed barrier operator.

101. The method of claim 75 wherein the receiving information from a peripheral device comprises receiving information from an obstacle detector.

102. The method of claim 101 further comprising not sending a signal to effect closing a barrier by the pre-installed barrier operator in response to receiving a command to do so when detecting that the obstacle detector is unable to detect an obstacle, in response to receiving indication from the input/output module that the obstacle detector detected an obstacle, or in response to receiving indication that the pre-installed barrier operator is opening a barrier.

103. The method of claim 101 further comprising sending a signal to effect opening a barrier by the pre-installed barrier operator in response to detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication from the input/output module that the obstacle detector detected an obstacle.

104. The method of claim 101 further comprising in response to receiving an indication from the peripheral device that the pre-installed barrier is closing a barrier, sending a signal to effect opening the barrier by the pre-installed barrier operator in response to receiving a command to do so when detecting that the obstacle detector is unable to detect an obstacle or in response to receiving indication from the input/output module that the obstacle detector detected an obstacle.

105. The method of claim 75 wherein the receiving information from a peripheral device further comprises receiving information from at least one peripheral device comprising a network adapter to effect a connection to Internet.

106. The method of claim 102 further comprising sending communications to and receiving communications from devices over the Internet.

107. The method of claim 106 further comprising receiving commands to operate the pre-installed barrier operator from a device over the Internet.

108. The method of claim 106 further comprising sending status information regarding the pre-installed barrier operator to a device over the Internet.

109. The method of claim 75 wherein the receiving information from a peripheral device further comprises receiving information from at least one peripheral device comprising a sensor disposed to detect a location of a barrier operated by the pre-installed barrier operator.

110. The method of claim 109 wherein the receiving information from the sensor comprises receiving information from one or more of the group consisting of: a limit switch, a tilt sensor, accelerometer, gravity sensor, and combinations thereof.

111. The method of claim 75 wherein the receiving information from a peripheral device further comprises receiving information from at least one peripheral device comprising a handheld transmitter configured to send move barrier commands via a radio frequency transmission.

* * * * *