

CONVENTION

AUSTRALIA

Patents Act

597946

APPLICATION FOR A STANDARD PATENT

I/We Digital Equipment Corporation

of 146 Main Street,
Maynard,
Massachusetts,
UNITED STATES OF AMERICA.

hereby apply for the grant of a standard patent for an invention
entitled:

ELECTRICAL CONNECTOR FOR SURFACE MOUNTING

which is described in the accompanying complete specification.

17 MAR 1987
Melbourne

Details of basic application

Number of basic application: 841,081

Convention country in which

basic application was filed: UNITED STATES OF AMERICA

Date of basic application : 18 March 1986

17 MAR 1987
Melbourne

PHILLIPS ORMONDE and FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA



Dated: 11 March 1987

PHILLIPS ORMONDE and FITZPATRICK
Attorneys for:
Digital Equipment Corporation,

By:

David B Fitzpatrick

Our Ref : 48463
POF Code: 775/1038

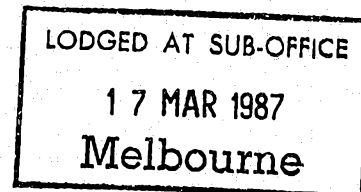

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 2. 4. 90

6012q/1

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

INSTRUCTIONS

(a) Insert "Convention" if applicable
(b) Insert FULL name(s) of applicant(s)

(c) Insert "of addition" if applicable
(d) Insert TITLE of invention

In support of the (a) Convention application made by
(b) Digital Equipment Corporation, 146 Main Street,
Maynard, Massachusetts, 01754, United States of America,

(hereinafter called "applicant(s) for a patent (c) for an
invention entitled (d)

ELECTRICAL CONNECTOR FOR SURFACE MOUNTING

(e) Insert FULL name(s) AND address(es) of declarant(s)
(See headnote*)

I/WeX(e)
Marietta M. Ethier, Assistant Secretary of
Digital Equipment Corporation of 146 Main Street, Maynard,
Massachusetts, 01754, United States of America
do solemnly and sincerely declare as follows:

XXXXXX I am/We are the applicant(s).
XXXXXX I/We are the declarant(s).

1. I am/We are authorized to make this declaration on behalf of the applicant(s).

XXXXXX I/We are the actual inventor(s).
XXXXXX I/We are the declarant(s).

James C. K. Lee, 28446 Christopher Lane, Los Altos Hills,
California, 94022; Richard Beck, 10182 Parish Place,
Cupertino, California, 95014; Chune Lee, 1836 Cabrillo Street,
San Francisco, California, 94121; and Edward Hu, 648 Kodiak
Court, #4, Sunnyvale, California, 94087, all of the United
States of America
XX/are the actual inventor(s) of the invention and the facts upon which the applicant(s)
XX/are entitled to make the application are as follows:

(f)

Applicant is the Assignee of the Inventors.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

3. The basic application(s) for patent or similar protection on which the application is based
is/are identified by country, filing date, and basic applicant(s) as follows:

(m) United States of America
18 March 1986
James C. K. Lee, Richard Beck, Chune Lee, and Edward Hu

4. The basic application(s) referred to in paragraph 3 hereof was/were the first application(s)
made in a Convention country in respect of the invention the subject of the application.

(k) Insert PLACE of signing

Declared at (k) Maynard, Massachusetts

(l) Insert DATE of signing

Dated (l) April 3, 1987

(m) Signature(s) of declarant(s)

(m) Digital Equipment Corporation

Marietta M. Ethier
Assistant Secretary

Note: No legalization or other witness required

To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-70077/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 597946

(54) Title
ELECTRICAL CONNECTOR FOR SURFACE MOUNTING

International Patent Classification(s)
(51)⁴ H05K 003/40 H01R 023/72 H05K 001/05

(21) Application No. : 70077/87 (22) Application Date : 17.03.87

(30) Priority Data

(31) Number (32) Date (33) Country
841081 18.03.86 US UNITED STATES OF AMERICA

(43) Publication Date : 24.09.87

(44) Publication Date of Accepted Application : 14.06.90

(71) Applicant(s)
DIGITAL EQUIPMENT CORPORATION

(72) Inventor(s)
JAMES C.K. LEE; RICHARD BECK; CHUNE LEE; EDWARD HU

(74) Attorney or Agent
PHILLIPS,ORMONDE & FITZPATRICK

(56) Prior Art Documents
AU 594141 71600/87 H01R 23/72 1/14
AU 69249/87 H01R 23/72 1/14
US 3982320

(57) Claim

1. A method of fabricating an anisotropic elastomeric conductor said method comprising:

A. etching a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

(11) AU-B-70077/87
(10) 597946

-2-

9. A method of fabricating an anisotropic elastomeric conductor, said method comprising:

- A. stamping a plurality of channels in a plurality metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;
- B. coating the metal sheets with a curable elastomeric resin;
- C. stacking the coated metal sheets with alternating insulating layers; and
- D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

AUSTRALIA

597946

Patents Act

COMPLETE SPECIFICATION

(ORIGINAL)

Class

Int. Class

Application Number:

Lodged:

Complete Specification Lodged:

Accepted:

Published:

Priority

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

APPLICANT'S REF.: File 83-430AU

Name(s) of Applicant(s): DIGITAL EQUIPMENT CORPORATION

Address(es) of Applicant(s): 146 Main Street
Maynard, Massachusetts,
UNITED STATES OF AMERICA

Actual Inventor(s): James C.K. LEE
Richard BECK
Chune LEE
Edward HU

Address for Service is:

PHILLIPS, ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia, 3000

Complete Specification for the invention entitled:

ELECTRICAL CONNECTOR FOR SURFACE MOUNTING

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

ELECTRICAL CONNECTOR FOR SURFACE MOUNTING

~~BACKGROUND OF THE INVENTION~~

~~This application is a continuation in part of application serial no. 757,600 filed on July 22, 1985.~~

~~1. Field of the Invention~~

The present invention relates generally to articles and methods for electrically connecting electronic devices. More particularly, the invention relates to an improved method for fabricating anisotropic electrically conductive materials which can provide an electrical interface between devices placed on either side thereof.

Over the past ten years, electrically conductive elastomers have found increasing use as interface connectors between electronic devices, serving as an alternative for traditional solder connections and socket connections. Elastomeric conductors can take a variety of forms, but generally must provide for anisotropic electrical conduction. Anisotropic conduction means that the electrical resistance measured in one direction through the material will differ from that measured in another direction. Generally, the elastomeric conductors of the prior art have been materials which provide for high resistance in at least one of the orthogonal directions of the material, while providing low resistance in the remaining one or two directions. In this way, a single piece or sheet of material can provide for multiple connections so long as the connector terminals on the devices to be connected are properly aligned.

~~2. Description of the Prior Art~~

The anisotropic elastomeric conductors of the prior art generally consist of an electrically conductive material dispersed or arranged in an electrically insulating material.



In one form, alternative sheets of conductive and non conductive materials are layered to form a block, and individual connector pieces can be cut from the block in a direction perpendicular to the interface of the layers. Connector pieces embodying such layered connectors have been sold under the trade name "Zebra" by Tecknit, Cranford, New Jersey, and the trade name "Stax" by PCK Elastomerics, Inc., Hatboro, Pennsylvania. Such connectors are discussed generally in Buchoff, "Surface Mounting of components with Elastomeric Connectors," Electri-Onics, June, 1983; Buchoff, "Elastomeric Connections for Test & Burn-In," Microelectronics Manufacturing and Testing, October, 1980; Anon., "Conductive Elastomeric Connectors Offer New Packaging Design Potential for Single Contacts or Complete Connection Systems," "Insulation/Circuits, February, 1975; and Anon., "Conductive Elastomers Make Bid to Take Over Interconnections," Product Engineering, December 1974. While useful under a number of circumstances, such layered anisotropic elastomeric conductors provide electrical conductivity in two orthogonal directions, providing insulation only in the third orthogonal direction. Thus, the layered anisotropic elastomeric conductors are unsuitable for providing surface interface connections where a two-dimensional array of detector terminals on one surface is to be connected to a similar two-dimensional array of connectors on a second surface. Such a situation requires anisotropic elastomeric conductor which provides for conductivity in one direction only.

At least two manufacturers provide anisotropic elastomeric conductors which allow for conduction in one direction only. Tecknit, Cranford, NJ, manufactures a line of connectors under the trade name "Conmet." The Conmet connectors comprise elastomeric elements having two parallel rows of electrically conductive wires embedded therein. The wires are all parallel, and electrical connections may be made by sandwiching the connector between two surfaces so that good contact is established. The Conmet connector is for connecting circuit boards together, as well as connecting chip carriers and the like to printed circuit boards. The matrix

is silicon rubber.

A second anisotropic elastomeric conductor which conducts in one direction only is manufactured by Shin-Etsu Polymer Company. Ltd., Japan, and described in U.S. Patent Nos. 4,252,391; 4,252,990; 4,210,895; and 4,199, 37. Referring in particular to U.S. Patent No. 4,252,391, a pressure-sensitive electroconductive composite sheet is prepared by dispersing a plurality of electrically conductive fibers into an elastomeric matrix, such as silicone rubber. The combination of the rubber matrix and the conductive fibers are mixed under sheer conditions which break the fibers into lengths generally between 20 to 80% of the thickness of the sheet which is to be prepared. The fibers are then aligned parallel to one another by subjecting the mixture to a sheer deformation event, such as pumping or extruding. The composite mixture is then hardened, and sheets prepared by slicing from the hardened structure. The electrically conductive fibers do not extend the entire thickness of the resulting sheets, and electrical contact is made through the sheet only by applying pressure.

Although useful, the anisotropic elastomeric conductors of the prior art are generally difficult and expensive to manufacture. Particularly in the case of the elastomeric conductors having a plurality of conductive fibers, it is difficult to control the density of fibers at a particular location in the matrix, which problem is exacerbated when the density of the conductive fibers is very high.

For these reasons, it would be desirable to provide alternate methods for fabricating anisotropic elastomeric conductors which provide for conductivity in one direction only. In particular, it would be desirable to provide a method for preparing such elastomeric conductors having individual conductive fibers present in an elastomeric matrix in a precisely controlled uniform pattern.

According to one aspect of the present invention there is provided a method of fabricating an anisotropic elastomeric conductor said method comprising:

- A. etching a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;
- B. coating the metal sheets with a curable elastomeric resin;
- C. stacking the coated metal sheets with alternating insulating layers; and
- D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

According to another aspect of the present invention there is provided an anisotropic conductor formed by the steps of:

- A. etching a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;
- B. coating the metal sheets with a curable elastomeric resin;
- C. stacking the coated metal sheets with alternating insulating layers; and
- D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

According to a further aspect of the present invention there is provided a method of fabricating an anisotropic elastomeric conductor, said method comprising:

- A. stamping a plurality of channels in a plurality metal sheets, the plurality of



channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

10

According to a still further aspect of the present invention there is provided an anisotropic conductor formed by the steps of:

A. stamping a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

20

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

30



SUMMARY OF THE INVENTION

A novel anisotropic elastomeric conductor is provided which is easy to manufacture and can be tailored to a wide range of specifications. The conductor comprised an elastomeric matrix having a plurality of parallel electrically conductive elements uniformly dispersed throughout. The conductor may be in the form of a block or a relatively thin slice, and the electrically conductive elements extend across the conductor so that they terminate on opposite faces of the conductor. In this way, the anisotropic elastomeric conductor is suited for interfacing between electronic components, particularly components having a plurality of conductor terminals arranged in two-dimensional or planar array. The anisotropic elastomeric conductor may also find use as an interface between a heat-generating device, such as an electronic circuit device, and a heat sink. When acting as either an electrically conductive interface or a thermally conductive interface, the elastomeric material has the advantage that it can conform closely to both surfaces which are being coupled.

The anisotropic elastomeric conductors of the present invention may be fabricated from first and second sheet materials, where the first sheet material includes a plurality of electrically-conductive fibers (as the elements) positioned to lie parallel to one another and electrically isolated from one another. In the first exemplary embodiment, the first sheet comprises a wire cloth having metal fibers running in one direction which are loosely woven with insulating fibers running in the transverse direction. The second sheet consists of electrically-insulating fibers loosely woven in both directions. The first and second sheets are stacked on top of one another, typically in an alternating pattern, so that the second sheets provide insulation for the electrically-conductive fibers in the adjacent first sheets. After stacking a desired number of the first and second sheets, the layered structure is perfused with a liquid,



RB

curable elastomeric resin, such as a silicon rubber resin to fill the interstices remaining in the layered structure of the loosely woven first and second sheets. Typically, pressure will be applied by well known transfer molding techniques, and the elastomer cured, typically by the application of heat. The resulting block structure will include the electrically-conductive fibers embedded in a solid matrix comprising two components, i.e., the insulating fibers and the elastomeric material.

The anisotropic elastomeric conductors of the present invention may also be fabricated from metal sheets or foil which are formed into a uniform pattern of parallel, spaced-apart conductors, typically by etching or stamping. The metal sheets are then coated with an elastomeric insulating material and stacked to form a block having the conductors electrically isolated from each other and running in a parallel direction. Usually, the coated metal sheets will be further separated by a sheet of an elastomer having a preselected thickness. In this way, the spacing or pitch between adjacent conductors can be carefully controlled in both the height and width directions of the block. After stacking a desired number of the metal sheets and optionally the elastomeric sheets, the layered structure is cured by the application of heat and pressure to form a solid block having the conductors fixed in an insulating matrix composed of the elastomeric coating and, usually, the elastomeric sheets.

For most applications, slices will be cut from the block formed by either of these methods to a thickness suitable for the desired interface application. In the case of the layered fabric structure, it will often be desirable to dissolve at least a portion of the fibrous material in the matrix in order to introduce voids in the elastomeric conductor to enhance its compressibility.

~~BRIEF DESCRIPTION OF THE DRAWINGS~~

~~Fig.1 illustrates the stacked first and second sheets of the first embodiment of the present invention prior to compression and transfer molding.~~



A preferred embodiment of the present invention will now be described with reference to the accompanying drawings wherein:-

Fig. 1 illustrates the stacked first and second sheets of the first embodiment of the present invention prior to compression and transfer molding.



2682L

Fig. 2 is a detailed view of the first sheet material of the present invention.

Fig. 3 is a detailed view of the second sheet material of the present invention.

Fig. 4 illustrates the block of anisotropic elastomeric conductor material of the first embodiment of the present invention having a single slice removed therefrom.

Fig. 5 illustrates the anisotropic elastomeric conductor material of the first embodiment of the present invention as it would be used in forming an interface between an electronic device having a planar array of connector pads and a device support substrate having a mating array of connector pads.

Fig. 6 is a detailed view showing the placement of the electrically-conductive elements in the first embodiment of the present invention.

Fig. 7 is an exploded view illustrating the stacking procedure used to form the elastomeric conductor of the second embodiment of the present invention.

Fig. 8 is a cross-sectional view illustrating the layered structure of the second embodiment of the present invention.

Fig. 9 is a detailed view illustrating the final layered structure of the second embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

According to a first embodiment of the present invention, anisotropic elastomeric conductors are fabricated from first and second sheets of loosely woven fabric material. The first sheet material are made up of both electrically-conductive and electrically insulating fibers, where the electrically-conductive fibers are oriented parallel to one another so that no two fibers contact each other at any point. The electrically insulating fibers run generally transversely to the electrically conductive fibers in order to complete the weave. In some cases, it may be desirable to include electrically insulating fibers running parallel to the



electrically-conductive fibers, either in addition to or in place of the electrically-conductive fibers, in order to adjust the density of conductive fibers in the final product. The second sheet material will be loosely woven fabric comprising only electrically insulating fibers. The second sheet material is thus able to act as an insulating layer between adjacent first layers having electrically-conductive fibers therein.

Suitable electrically-conductive fibers include virtually any fiber material having a bulk resistivity below about $50 \mu\Omega\text{-cm}$, more usually about $4 \mu\Omega\text{-cm}$. Typically, the electrically-conductive fibers will be conductive metals, such as copper, aluminum, silver, and gold, and alloys thereof. Alternatively, suitable electrically conductive fibers can be prepared by modifying electrically insulating fibers, such as by introducing a conductivity-imparting agent to a natural or synthetic polymer, i.e., introducing metal particles. The preferred electrically-conductive fibers are copper, aluminum, silver, gold, and alloys thereof, usually copper wire.

The electrically insulating fibers in both the first and second sheet materials may be formed from a wide variety of material, including natural fibers, such as cellulose, i.e., cotton, protein, i.e., wool and silk, and synthetic fibers. Suitable synthetic fibers include polyamides, polyesters, acrylics, polyolefins, nylon, rayon, acrylonitrile, and blends thereof. In general, the electrically insulating fibers will have bulk resistivities in the range from about 10^{11} to $10^{17} \Omega\text{-cm}$, usually above about $10^{15} \Omega\text{-cm}$.

The first and second sheet materials will be woven by conventional techniques from the individual fibers. The size and spacing of the fibers in the first sheet material will depend on the size and spacing of the electrical conductors required in the elastomeric conductor being produced. Typically, the electrically-conductive fibers will have a diameter in the range from about 2×10^{-2} to 2×10^{-3} cm (8 mils to 0.8 mils). The spacing between adjacent conductors will typically be in the range from about 6×10^{-3} to 3×10^{-2}

cm (2 /2 mils to 12 mils). The spacing of the insulating fibers in the first sheet material is less critical, but will typically be about the same as the spacing for the electrically conductive fibers. The fiber diameter of the electrically insulating fibers will be selected to provide a sufficiently strong weave to withstand the subsequent processing steps. In all cases, the weave will be sufficiently loose so that gaps or interstices remain between adjacent fibers so that liquid elastomeric resin may be introduced to a stack of the woven sheets, as will be described hereinafter.

Referring now to Figs. 1-3, a plurality of first sheets 10 and second sheets 12 will be stacked in an alternating pattern. The dimensions of the sheets 10 and 12 are not critical, and will depend on the desired final dimensions of the elastomeric conductor product. Generally, the individual sheets 10 and 12 will have a length L between about 1 and 100 cm, more usually between about 10 and 50 cm. The width W of the sheets 10 and 12 will usually be between 1 and 100 cm, more usually between 10 and 50 cm. The sheets 10 and 12 will be stacked to a final height in the range from about 1 to 100 cm, more usually in the range from about 1 to 5 cm, corresponding to a total number of sheets in the range from about 25 to 500, more usually from about 25 to 200.

The first sheets 10 are formed from electrically-conductive fibers 14 woven with electrically insulating fibers 16, as illustrated in detail in Fig. 2. The first sheets 10 are oriented so that the electrically-conductive fibers 14 in each of the sheets are parallel to one another. The second sheet material is comprised of a weave of electrically insulating fiber 16, as illustrated in Fig. 3. In the case of both the first sheet material and the second sheet material, interstices 18 are formed between the individual fibers of the fabric. Depending on the size of the fibers 14 and 16, as well as on the spacing between the fibers, the dimensions of the interstices 18 may vary in the range from 5×10^{-3} to 5×10^{-2} cm (2 to 20 mils).

In forming the stacks of the first and second sheet

materials, it is possible to vary the pattern illustrated in Fig. 1 within certain limits. For example, it will be possible to place two or more of the second sheets 12 between adjacent first sheets 10 without departing from the concept of the present invention. In all cases, however, it will be necessary to have at least one of the second insulating sheets 12 between adjacent first conducting sheets 10. Additionally, it is not necessary that all of the first sheets 10 employed in a single stack can be identical, and two or more sheets 10 having different constructions may be employed. Similarly, it is not necessary that the second sheets 12 all be of identical construction, and a certain amount of variation is permitted.

In fabricating the materials of the present invention, it has been found convenient to employ commercially available sieve cloths which may be obtained from commercial suppliers. The second sheets may be nylon sieve cloths having a mesh ranging from about 80 to 325 mesh. The first sheet materials may be combined wire/nylon mesh cloths having a similar mesh sizing.

After the stack has been formed, as illustrated in Fig. 1, it is necessary to mold the stack into a solid block of elastomeric material. This may be accomplished by introducing a curable elastomeric resin into the interstices 18 of the layered sheet materials 10 and 12. Suitable elastomeric resins include thermosetting resins, such as silicone rubbers, urethane rubbers, latex rubbers, and the like. Particularly preferred are silicone rubbers because of their stability over a wide temperature range, their low compression set, high electrical insulation, low dielectric constant, and durability.

Perfusion of the elastomeric resin into the layered first and second sheets may be accomplished by conventional methods, typically by conventional transfer molding techniques. The layered structure of Fig. 1 is placed in an enclosed mold, referred to as a transfer mold. Fluidized elastomeric resin is introduced to the transfer mold, under pressure so that the mold cavity is completely filled with the resin. Either a cold or a heated mold may be employed. In

the case of a cold mold, it is necessary to later apply heat to cure the resin resulting in a solidified composite block of the resin and the layered sheet materials. Such curing will take on the order of one hour. The use of heated mold reduces the curing time to the order of minutes.

Referring now to Fig. 4, the result of the transfer molding process is a solidified block 20 of the layered composite material. As illustrated, the individual conductors 14 are aligned in the axial direction in the block 20. To obtain relatively thin elastomeric conductors as will be useful in most applications, individual slices 22 may be cut from the block 20 by slicing in a direction perpendicular to the direction in which the conductors are running. This results in a thin slice of material having individual conductors uniformly dispersed throughout and extending across the thickness T of the slice 22. As desired, the slice 22 may be further divided by cutting it into smaller pieces for particular applications. The thickness T is not critical, but usually will be in the range from about 0.02 to 0.4 cm.

The resulting thin section elastomeric conductor 22 will thus comprise a two-component matrix including both the insulating fiber material 16 and the elastomeric insulating material which was introduced by the transfer molding process. In some cases, it will be desirable to remove at least a portion of the insulating fiber material 16 in order to introduce voids in the conductor 22. Such voids enhance the compressibility of the conductor, as may be beneficial under certain circumstances. The fibrous material may be dissolved by a variety of chemical means, typically employing oxidation reactions, or by dry plasma etching techniques. The particular oxidation reaction will, of course, depend on the nature of the insulating fiber. In the case of nylon and most other fibers, exposure to a relatively strong mineral acid, such as hydrochloric acid, will generally suffice. After acid oxidation, the conductor material will of course be thoroughly washed before further preparation or use.

Referring now to Figs 5 and 6, and anisotropic elastomeric conductor of the present invention will find its

greatest use in the serving as an electrical interface between a semiconductor device 30 and a semiconductor support substrate 32. The semiconductor device 30 is of the type having a two-dimensional or planar array of electrical contact pads 34 on one face thereof. The support substrate 32, which is typically a multilayer connector board, is also characterized by a plurality of contact pads 36 arranged in a planar array. In general, the pattern in which the connector pads 34 are arranged on the semiconductor device 30 will correspond to that in which the contact pads 36 are arranged on the support substrate 32. The anisotropic elastomeric conductor 22 is placed between the device 30 and the substrate 32, and the device 30 and substrate 32 brought together in proper alignment so that corresponding pads 34 and 36 are arranged on directly opposite sides of the conductor 22. By applying a certain minimal contact pressure between the device 30 and substrate 32, firm electrical contact is made between the contact pads and the intermediate conductors 12. Usually, sufficient electrically-conductive fibers are provided in the conductor 22 so that at least two fibers and preferably more than two fibers are intermediate each of the pairs of contact pads 34 and 36.

In an alternate use, the elastomeric conductors of the present invention may be used to provide for thermal coupling between a heat-generating device, typically an electronic device, and a heat sink. When employed for such a use, the conductive fibers 12 will generally have a relatively large diameter, typically on the order of 10^{-2} cm. The elastomeric conductor of the present invention is particularly suitable for such applications since it will conform to both slight as well as more pronounced variations in the surface linearity of both the electronic device and the heat sink, thus assuring low thermal resistance between the two.

Referring now to Figs. 7-9, an alternate method for fabricating the elastomeric conductors of the present invention will be described. The method utilizes a plurality of metal sheets 60 having a multiplicity of individual conductive elements 62 formed therein. The sheets 60 are

formed from a conductive metal such as copper, aluminum, gold, silver, or alloys thereof, preferably copper, having a thickness in the range from about 0.1 to 10 mils, more usually about 0.5 to 3 mils. The conductive elements 62 are defined by forming elongate channels or voids 64 in the sheet 60, which voids provide for space between adjacent elements. The widths of the elements and of the voids will vary depending on the desired spacing of the conductive elements in the elastomeric conductor. Typically, the conductive elements 12 will have a width in the range from about 0.5 to 50 mils, more usually in the range from 5 to 20 mils, and the channels 64 will have a width in the range from 0.5 to 50 mils, more usually in the range from 5 to 20 mils.

The channels 62 may be formed in the sheets 60 by any suitable methods, such as stamping or etching. Chemical etching is the preferred method for accurately forming the small dimensions described above. Conventional chemical etching techniques may be employed, typically photolithographic techniques where a photoresist mask is formed over the metal sheet and patterned by exposure to a specific wavelength of radiation.

In addition to forming channels 64 in the metal sheet 60, the etching step is used to form alignment holes 66. The alignment holes 66 are used to accurately stack the metal sheets 60, as will be described hereinafter..

Elastomeric sheets 70 are also employed in the alternative fabrication method of Figs. 7-9. The sheets 70 may be composed of any curable elastomer, such as silicon rubber, and will usually have a thickness in the range from about 0.5 to 20 mils, more usually about 1 to 5 mils. the sheets 70 will also include alignment holes 72 to facilitate fabrication of the elastomeric conductors.

An elastomeric conductor block 80 (Fig. 8) may be conveniently assembled on an assembly board 82 (Fig. 7) having alignment pegs 84 arranged in a pattern corresponding to alignment holes 66 and 72 in sheets 60 and 70 respectively. The block 80 is formed by placing the elastomeric sheets 70 and metal sheets 60 alternatively on the assembly board 82.

the metal sheets 60 are coated with a liquid elastomeric resin, typically a liquid silicone rubber, which may be cured with the elastomeric sheets 70 to form a solid block. After a desired number of metal sheets 60 have been stacked, usually from 25 to 500, more usually from 100 to 300, the layered structure is cured by exposure to heat and pressure, as required by the particular resin utilized.

The resulting structure is illustrated in Fig. 8. The conductive elements 62 of sheets 60 are held in a continuous elastomeric matrix consisting of the elastomeric sheets 70 and layers 90 comprising the cured liquid elastomer coated onto the metal sheets 60. The result is an elastomeric block 80 similar to the elastomeric block 20 of Fig. 4.

The elastomeric block 80 may also be sliced in a manner similar to that described for block 20, resulting in sheets 92, a portion of one being Fig. 9. Sheet 92 includes parallel opposed faces 94, with the conductive elements 62 running substantially perpendicularly to the faces.

The sheets 92 of the elastomeric conductor may be utilized in the same manner as sheets 22, as illustrated in Fig. 5.

Although the foregoing invention has been described in some detail by way of illustration and example for purposes of clarity of understanding, it will be obvious that certain changes and modifications may be practiced within the scope of the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of fabricating an anisotropic elastomeric conductor said method comprising:

A. etching a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

2. A method as in claim 1, wherein the elastomeric resin is a silicon resin.

3. A method as in claim 1; wherein the insulating layers are continuous elastomeric sheets.

4. A method as in claim 3, wherein the elastomeric sheets are silicon rubber.

5. A method as in claim 1, wherein the metal sheets are copper.

6. A method as in claim 1, further comprising the step of slicing the solid matrix in a direction transverse to the direction of the electrically conductive elements to yield individual slices having the elements extending thereacross.

7. An anisotropic conductor formed by the steps of:

A. etching a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;



C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

8. An anisotropic conductor as defined in claim 7, with the additional step of slicing the solid matrix in a direction transverse to the direction of the electrically conductive elements to yield individual slices having the elements extending thereacross.

9. A method of fabricating an anisotropic elastomeric conductor, said method comprising:

A. stamping a plurality of channels in a plurality metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

10. A method as in claim 9, wherein the elastomeric resin is a silicon resin.

11. A method as in claim 9, wherein the insulating layers are continuous elastomeric sheets.

12. A method as in claim 11, wherein the elastomeric sheets are silicon rubber.

13. A method as in claim 9, wherein the metal sheets are copper.

14. A method as in claim 9, further comprising the step of slicing the solid matrix in a direction transverse to the direction of the electrically conductive elements to yield individual slices



LS

having the elements extending thereacross.

15. An anisotropic conductor formed by the steps of:

A. stamping a plurality of channels in a plurality of metal sheets, the plurality of channels forming a multiplicity of electrically conductive elements in each metal sheet;

B. coating the metal sheets with a curable elastomeric resin;

C. stacking the coated metal sheets with alternating insulating layers; and

D. curing the resulting stacked structure to form a solid matrix having the electrically conductive elements electrically isolated from each other.

16. An anisotropic conductor as defined in claim 15, with the additional step of slicing the solid matrix in a direction transverse to the direction of the electrically conductive elements to yield individual slices having the elements extending thereacross.

17. A method of fabricating an anisotropic elastomeric conductor as set forth in claims 1 or 9 substantially as hereinbefore particularly described with reference to what is shown in the accompanying drawings.

18. An anisotropic conductor as set forth in claims 7 or 15 substantially as hereinbefore particularly described with reference to what is shown in the accompanying drawings.

DATED: 23 March 1990

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

DIGITAL EQUIPMENT CORPORATION

David Fitzpatrick



LS

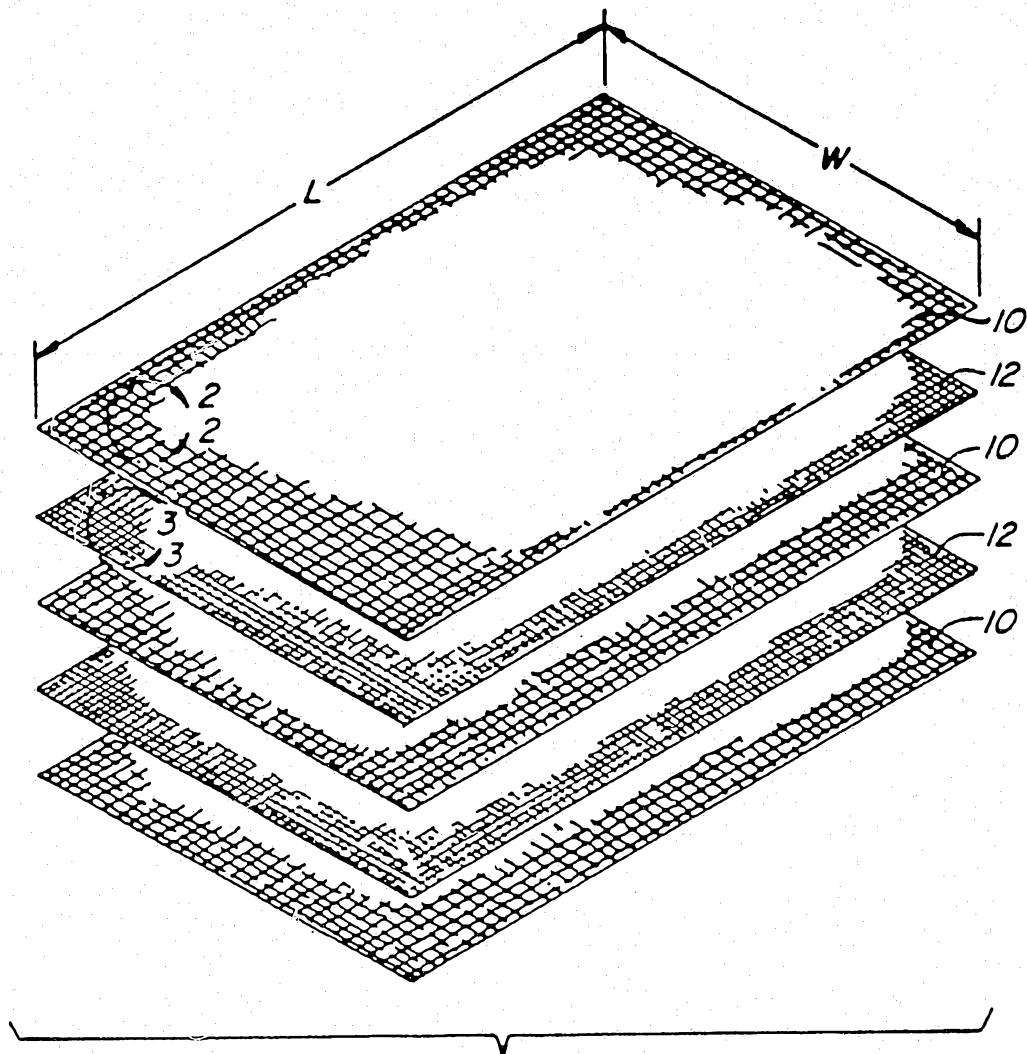


FIG. 1

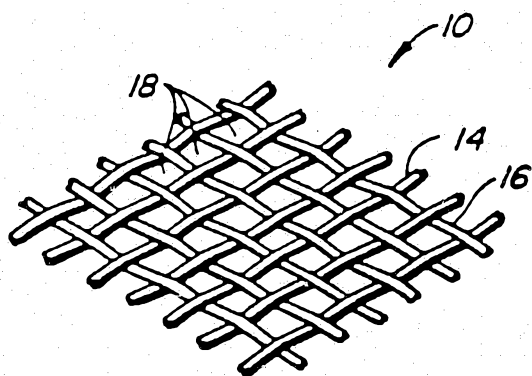


FIG. 2




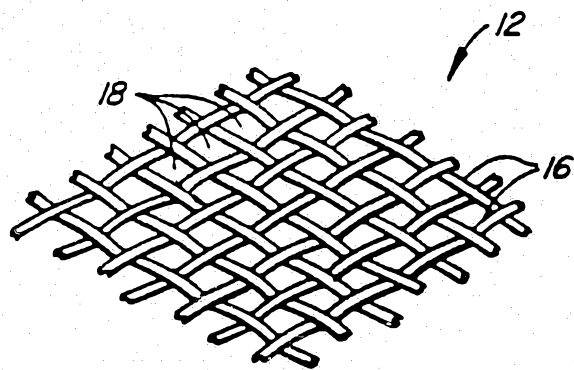


FIG. 3

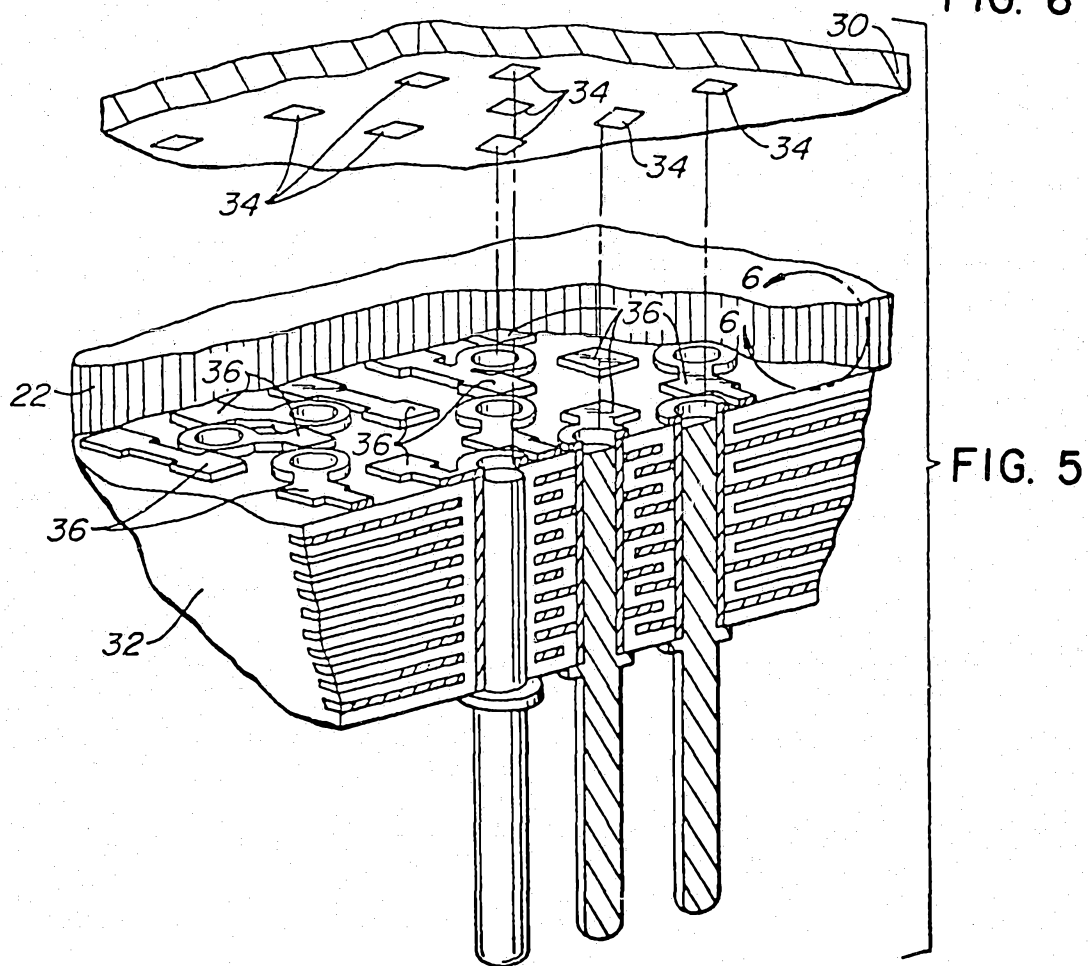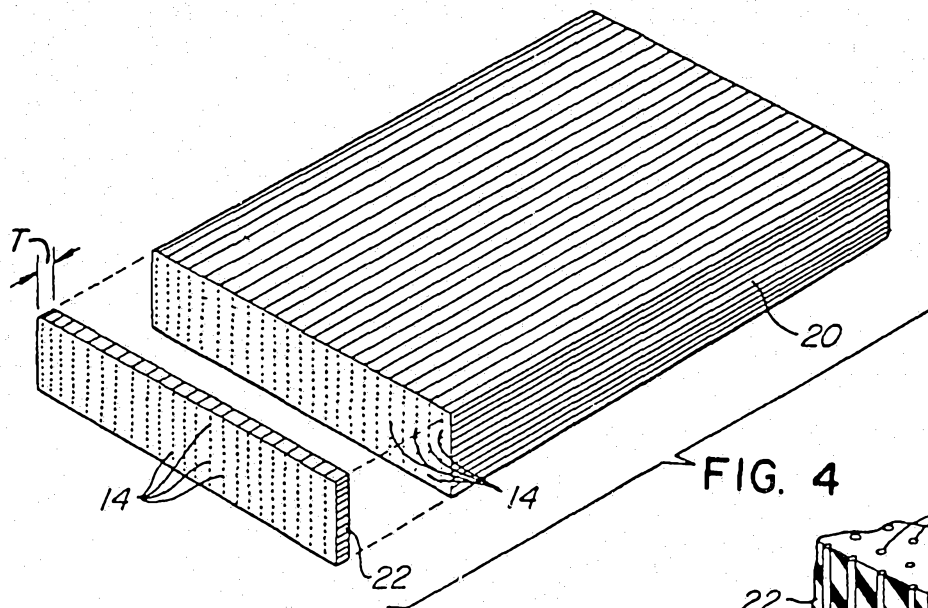

70077/87

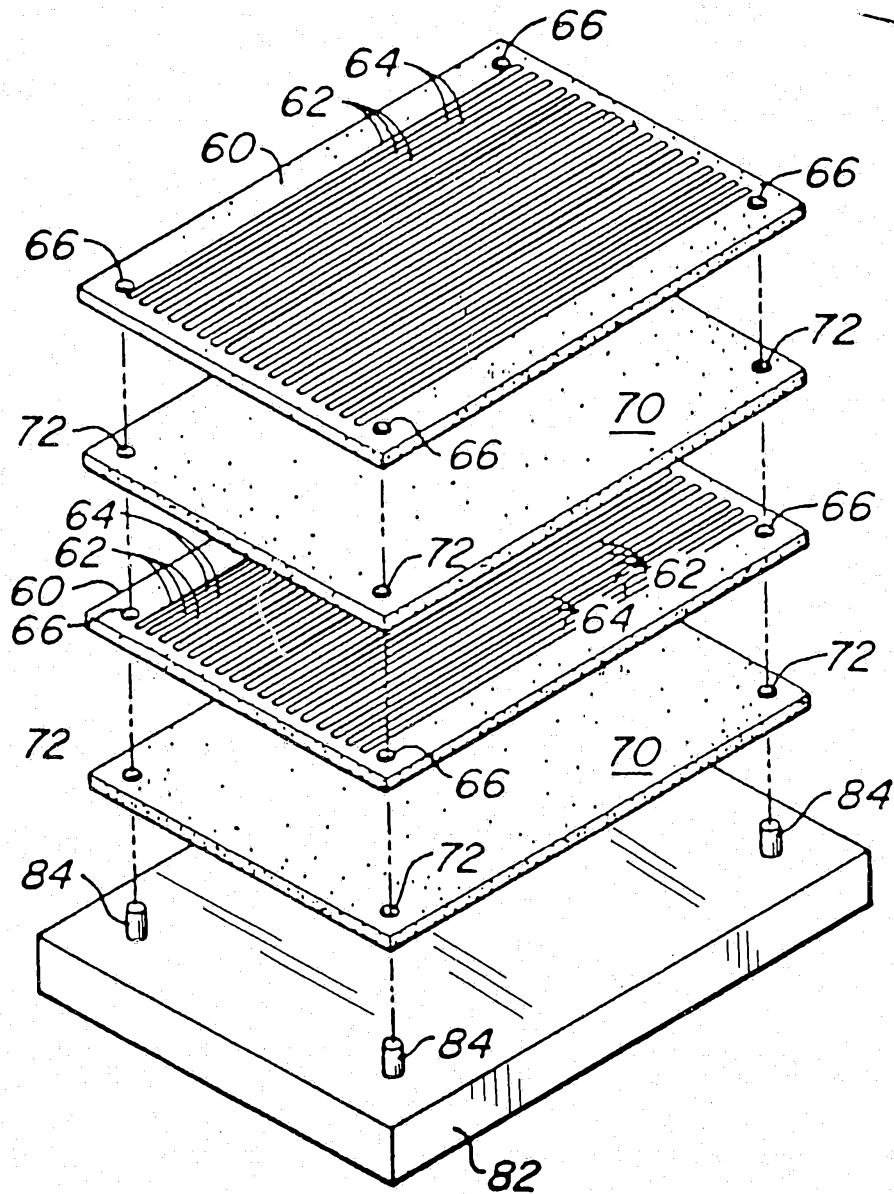


FIG. 7

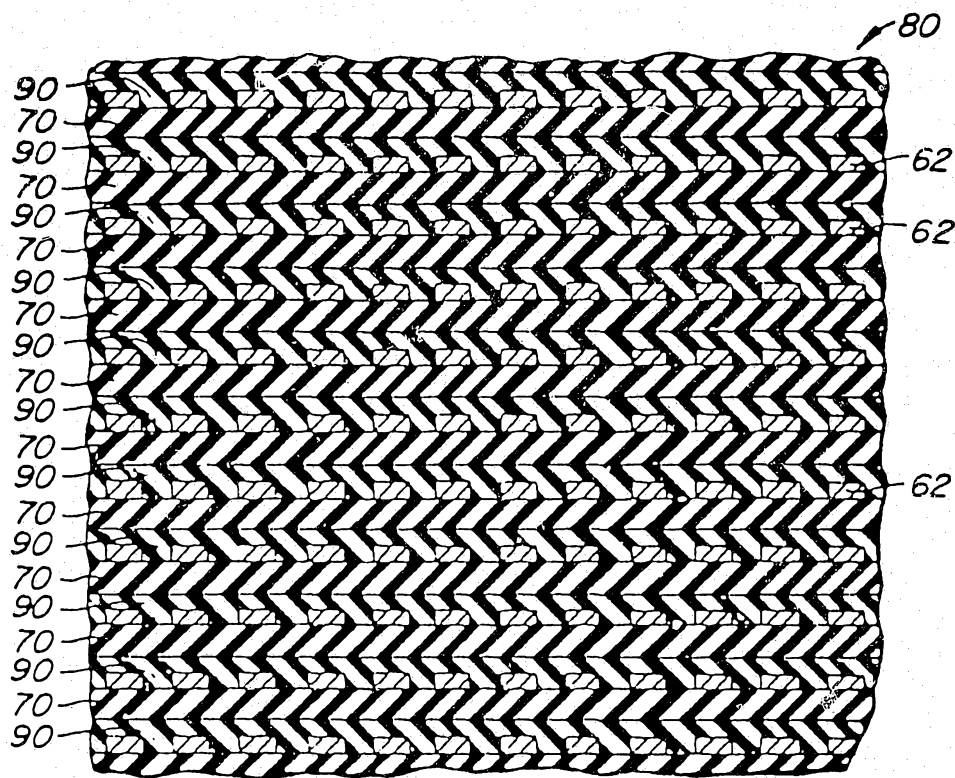


FIG. 8

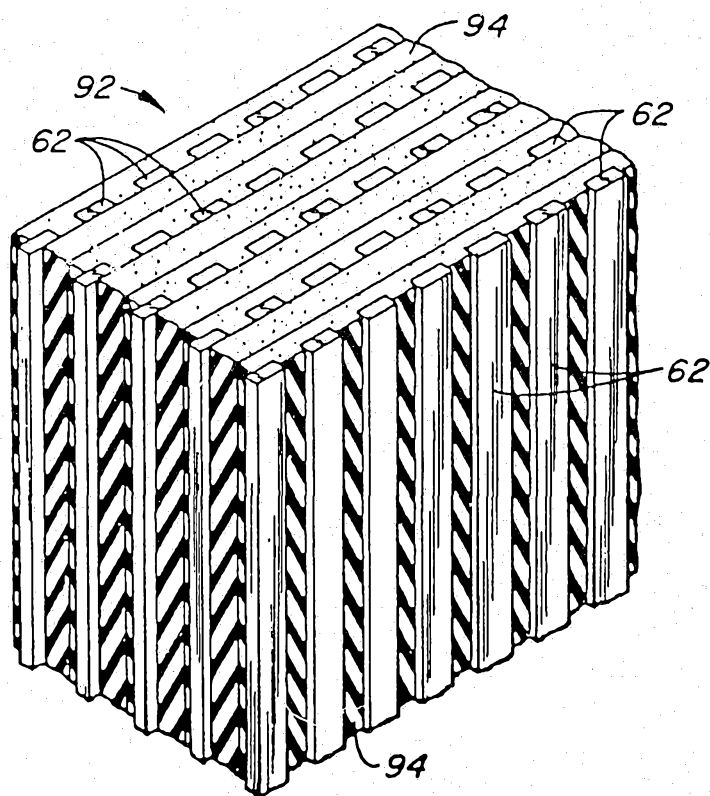


FIG. 9