




(22) **Date de dépôt/Filing Date:** 2009/12/08
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2010/06/08
 (45) **Date de délivrance/Issue Date:** 2017/05/02
 (30) **Priorité/Priority:** 2008/12/08 (US61/201,193)

(51) **Cl.Int./Int.Cl.** *H01R 13/73* (2006.01),
B60D 1/64 (2006.01), *H01R 13/506* (2006.01),
H01R 13/512 (2006.01), *H01R 13/60* (2006.01),
H01R 13/621 (2006.01)
 (72) **Inventeurs/Inventors:**
 ROTENBERG, GREGORY, US;
 CORLESS, JERRY, US
 (73) **Propriétaire/Owner:**
 CEQUENT CONSUMER PRODUCTS, US
 (74) **Agent:** OSLER, HOSKIN & HARCOURT LLP

(54) **Titre :** SUPPORT DE FIXATION POUR CONNECTEUR DE CABLAGE DE REMORQUE
 (54) **Title:** MOUNTING BRACKET FOR TRAILER WIRING CONNECTOR

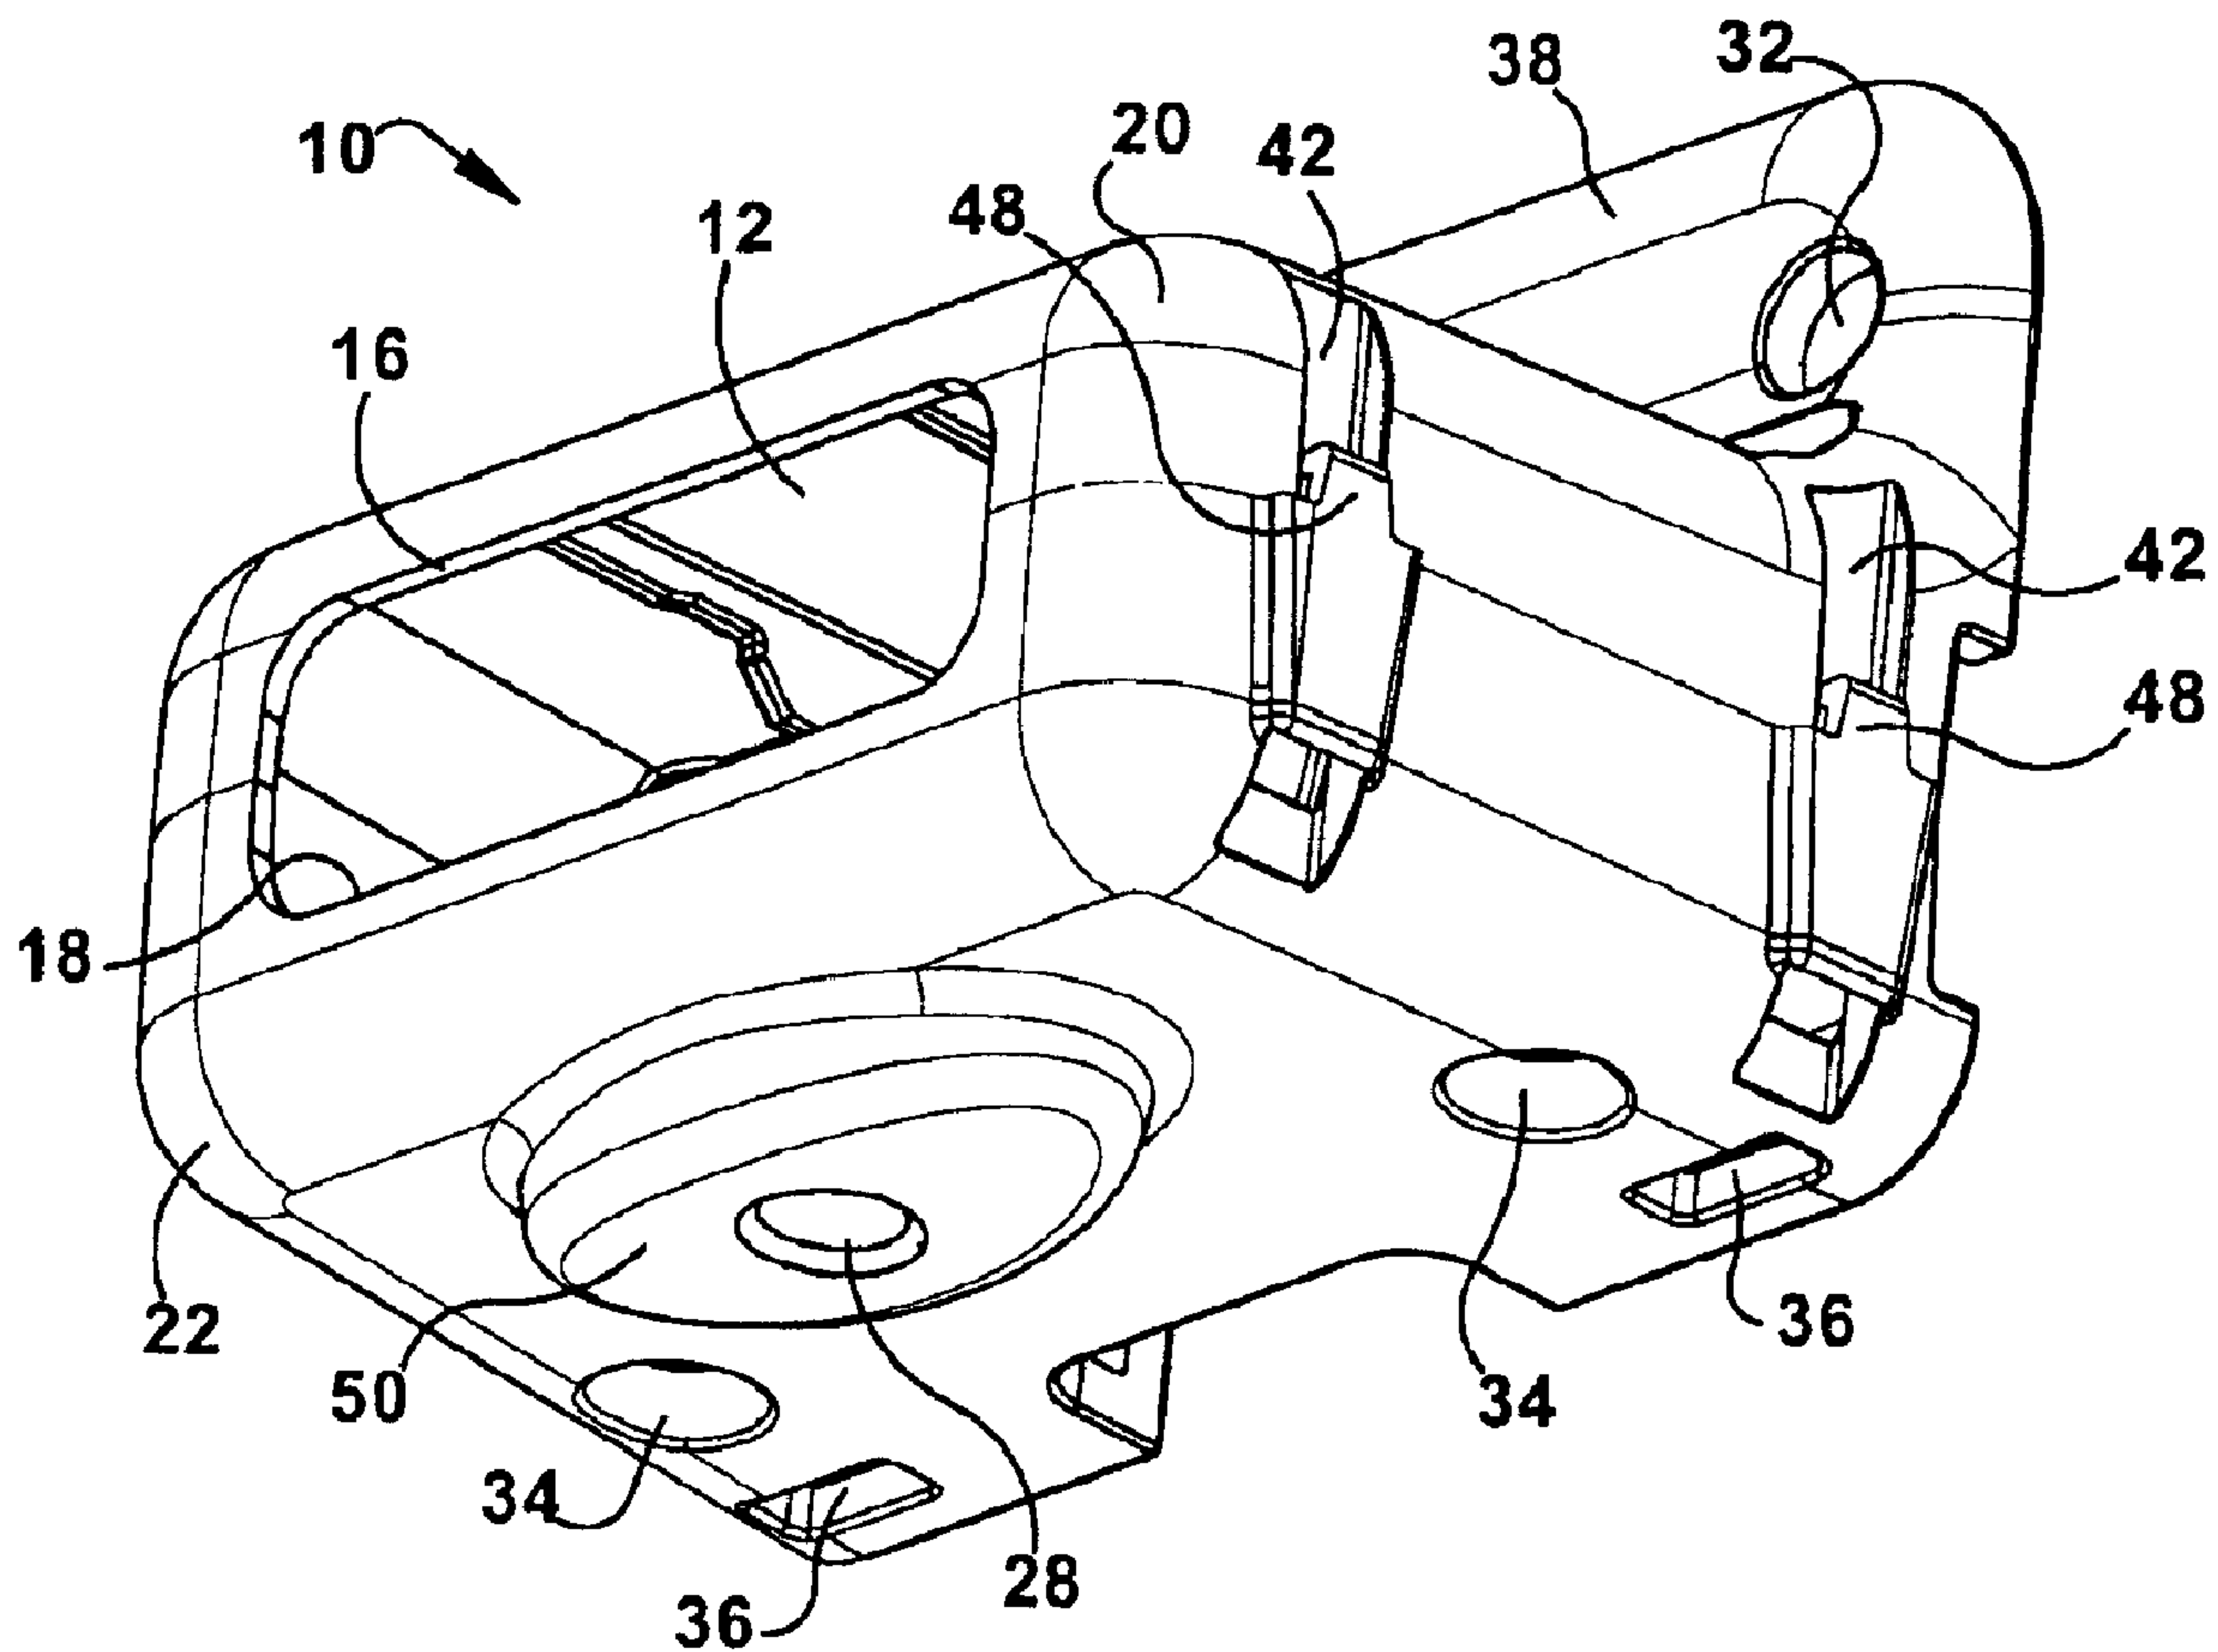

(57) **Abrégé/Abstract:**

A mounting bracket for a trailer wiring connector is described. The mounting bracket may attach the electrical connector to a cross bar of a towing vehicle. The mounting bracket may include an upper housing and a lower housing. The upper housing may include

(57) Abrégé(suite)/Abstract(continued):

a mounting aperture and a plurality of slots. The lower housing may include a threaded aperture and a plurality of tabs. The tabs may be capable of engagement with the slots to secure the upper housing to the lower housing. The lower housing may also include a clamping fastener, such as a set screw, that may be capable of engagement with a threaded aperture, wherein the set screw may be capable of clamping engagement with the electrical connector. The mounting bracket may also include a cover capable of engagement with the electrical connector.

ABSTRACT

A mounting bracket for a trailer wiring connector is described. The mounting bracket may attach the electrical connector to a cross bar of a towing vehicle. The mounting bracket may include an upper housing and a lower housing. The upper housing may include a mounting aperture and a plurality of slots. The lower housing may include a threaded aperture and a plurality of tabs. The tabs may be capable of engagement with the slots to secure the upper housing to the lower housing. The lower housing may also include a clamping fastener, such as a set screw, that may be capable of engagement with a threaded aperture, wherein the set screw may be capable of clamping engagement with the electrical connector. The mounting bracket may also include a cover capable of engagement with the electrical connector.

TITLE

MOUNTING BRACKET FOR TRAILER WIRING CONNECTOR

FIELD OF THE INVENTION

[0001] The present invention relates generally to mounting brackets and, more particularly, to mounting brackets for trailer wiring connectors.

BACKGROUND

[0002] Towed vehicles or trailers are commonly coupled to towing vehicles to facilitate the transfer of items or objects, such as vehicles, boats, cargo, and the like. When a trailer is coupled to a towing vehicle, the trailer may commonly obscure the taillights and rear turn signals of the towing vehicle such that other motorists and pedestrians cannot readily observe the taillights and turn signals of the towing vehicle. Such a situation may present dangerous driving conditions for the drivers of the towing vehicles as well as drivers of other vehicles driving near a towing vehicle.

[0003] To alleviate such a dangerous situation, trailers may commonly be equipped with taillights and turn signals that are visible to surrounding motorists and pedestrians. To ensure that the taillights and turn signals of the trailer behave in accordance with the taillights and turn signals of the towing vehicle, the electrical system of the trailer may be coupled to the electrical system of the towing vehicle. In such an arrangement, the taillights of the trailer may illuminate when the driver of the towing vehicle applies the brakes, the turn signals of the trailer illuminate when the driver of the towing vehicle engages the turn signal, etc.

[0004] To facilitate the coupling of the trailer electrical system to the towing vehicle electrical system, it is common to utilize electrical connectors. Typically, one such connector may be secured to the towing vehicle and one such connector may be coupled to the trailer. Each

electrical connector often includes multiple terminals, pins, sockets, or the like. The terminals, pins, and sockets may often be arranged to be mated so that the connector of the trailer may be coupled to the connector of the towing vehicle. Such a coupling will relay electrical signals from the towing vehicle to the lights positioned on the trailer.

[0005] When the trailer is not properly coupled to the towing vehicle, the electrical connector secured to the towing vehicle may freely hang from a rear portion of the towing vehicle. In such a condition, the terminals, pins, or sockets of the electrical connector may be exposed to a number of conditions that may cause damage or other such deterioration of the electrical connector. For example, the electrical connector may drag along the ground while the towing vehicle is driven, resulting in damage to the electrical connector due to abrasions, friction, impact with the ground, and other such wear and tear. In addition, the electrical connector may be exposed to the elements such as dust, debris, rain, snow, salt, and the like. Such exposure may lead to physical damage, corrosion, or other such deleterious effects to the electrical connector, particularly the terminals, pins, and sockets of the connector.

SUMMARY

[0006] A mounting bracket for a trailer wiring connector is described. The mounting bracket may attach the electrical connector to a cross bar of a towing vehicle. The mounting bracket may include an upper housing and a lower housing. The upper housing may include a mounting aperture and a plurality of slots. The lower housing may include a threaded aperture and a plurality of tabs. The tabs may be capable of engagement with the slots to secure the upper housing to the lower housing. The lower housing may also include a set screw that may be capable of engagement with a threaded aperture, wherein the set screw may be capable of

clamping engagement with the electrical connector. The mounting bracket may also include a cover capable of engagement with the electrical connector.

[0007] A method of securing an electrical connector to a towing vehicle is described. The method may include the steps of placing the electrical connector within an inner chamber located between an upper housing and a lower housing and snapping the upper housing and the lower housing together around the electrical connector. Next, the upper housing and the lower housing may be secured together via at least one fastener and then a clamping fastener may be tightened through a threaded aperture located in the lower housing to tighten the electrical connector within the inner chamber. The mounting bracket may then be secured to a cross bar of the towing vehicle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Objects and advantages together with the operation of the invention may be better understood by reference to the detailed description taken in connection with the following illustrations, wherein:

[0009] Figure 1 illustrates a perspective view of a mounting bracket.

[0010] Figure 2 illustrates a side view of the mounting bracket.

[0011] Figure 3 illustrates a front view of the mounting bracket.

[0012] Figure 4 illustrates a bottom view of the mounting bracket.

[0013] Figure 5 illustrates a front perspective view of a mounting bracket with an electrical connector secured within the mounting bracket.

[0014] Figure 6 illustrates rear perspective view of the mounting bracket with the electrical connector of Figure 5.

[0015] Figure 7 illustrates an exploded view of a mounting bracket and an electrical connector.

[0016] Figure 8A illustrates a perspective view of an electrical connector.

[0017] Figure 8B illustrates a perspective view of an electrical connector.

[0018] Figure 8C illustrates a perspective view of an electrical connector.

[0019] Figure 9A illustrates a front view of an upper housing for a mounting bracket.

[0020] Figure 9B illustrates a top view of the upper housing of Figure 9A.

[0021] Figure 9C illustrates a bottom view of the upper housing of Figure 9A.

[0022] Figure 9D illustrates a bottom perspective view of the upper housing of Figure 9A.

[0023] Figure 9E illustrates a top perspective view of the upper housing of Figure 9A.

[0024] Figure 10A illustrates a bottom view of a lower housing for a mounting bracket.

[0025] Figure 10B illustrates a top view of the lower housing of Figure 10A.

[0026] Figure 10C illustrates a front view of the lower housing of Figure 10A.

[0027] Figure 10D illustrates a side view of the lower housing of Figure 10A.

[0028] Figure 10E illustrates a bottom perspective view of the lower housing of Figure 10A.

[0029] Figure 10F illustrates a top perspective view of the lower housing of Figure 10A.

[0030] Figure 11 illustrates a perspective view of a cover for a mounting bracket.

[0031] Figure 12 illustrates a perspective view of a mounting bracket secured to a receiver of a towing vehicle.

[0032] Figure 13 illustrates a perspective view of a mounting bracket secured to the receiver of a towing vehicle.

[0033] Figure 14 illustrates a perspective view of a mounting bracket secured to the receiver of a towing vehicle.

[0034] Figure 15 illustrates a perspective view of a mounting bracket secured to the receiver of a towing vehicle.

[0035] Figure 16 illustrates a perspective view of a mounting bracket secured to the receiver of a towing vehicle.

DETAILED DESCRIPTION

[0036] Reference will now be made in detail to exemplary embodiments of the present invention, examples of which are illustrated in the accompanying drawings. It is to be understood that other embodiments may be utilized and structural and functional changes may be made without departing from the respective scope of the invention. As such, the following description is presented by way of illustration only and should not limit in any way the various alternatives and modifications that may be made to the illustrated embodiments and still be within the spirit and scope of the invention.

[0037] Mounting brackets for electrical connectors to be used with towing vehicles and towed vehicles may be arranged to secure the electrical connector to the towing vehicle or towed vehicle or trailer such that the electrical connector may be positioned above the ground thereby avoiding contact with the ground. The mounting bracket may also reduce or eliminate wear and tear, corrosion, and other such damage to the electrical connector. In addition, mounting brackets may be arranged to shield an electrical connector from the elements, such as dust, debris, rain, snow, salt, and the like.

[0038] A mounting bracket **10** for an electrical connector **14** is illustrated in Figures 1-4. The mounting bracket **10** may include an inner chamber **12** to accommodate at least a portion of an electrical connector **14** whereby the electrical connector **14** may be secured relative to the mounting bracket **10**. The electrical connector **14** may be partially positioned within the inner chamber **12** of the bracket **10** whereby a portion of the connector **14** may extend through an opening in a front face of the bracket **10** (Figure 5). The electrical connector **14** may be of any

appropriate shape, size or type, such as a 4-way flat connector. In addition, the electrical connector **14** may include any appropriate number, shape or type of terminals, pins, sockets or the like.

[0039] The mounting bracket **10** may be arranged as a multi-component system (Figure 7). The bracket **10** may include an upper housing **20** and a lower housing **22**. The upper housing **20** and lower housing **22** may be assembled and secured together by any appropriate means, such as by fasteners, ties or the like. The upper **20** and lower **22** housings may be of any appropriate shape or size, such as a generally square or rectangular shape. For example, the upper **20** and lower **22** housings may be of a generally corresponding shape and size. The upper **20** and lower **22** housings may be fabricated out of any appropriate material. For example, the upper **20** and lower **22** housings may be fabricated from high impact plastic. A mounting bracket **10** fabricated from high impact plastic may yield a compact design that is generally resistant to corrosion.

[0040] The upper housing **20** and lower housing **22** may each include a recessed area that mate to form the inner chamber **12** of the mounting bracket **10**. The inner chamber **12** may be of any appropriate shape or size, such as being shaped and sized to secure the electrical connector **14** there between. The electrical connector **14** may be positioned between the upper **20** and lower **22** housings prior to the housings **20**, **22** being snapped or attached together, as well as prior to any fasteners **24** being utilized to secure the housings **20**, **22** together. For example, at least a portion of the electrical connector **14** may be secured within the assembled mounting bracket **10**. The portion of the electrical connector **14** secured may be a harness. After the harness is secured within the bracket **10**, the harness may generally be protected from dust, debris, rain, snow, salt, and the like.

[0041] The inner chamber **12** of the mounting bracket **10** may be arranged so that it may accommodate a variety of shaped and sized electrical connectors **14**. The electrical connectors, such as **14A**, **14B**, **14C**, may be similar, have generally identical terminal, pin, and socket arrangements, or may have uniquely shaped harnesses or bodies (Figures 8A-8C). The harnesses of the electrical connector **14** may include different heights, widths, and lengths.

[0042] The inner chamber **12** of the mounting bracket **10** may be shaped to accommodate all types of electrical connectors **14A**, **14B**, **14C** (Figures 8A-8C), along with many more styles or designs of electrical connectors not shown. For example, the mounting bracket **10** may be arranged to accommodate a variety of four-way flat connectors. To further facilitate the accommodation of a variety of electrical connectors, the mounting bracket **10** may be arranged with a clamping fastener, such as a set screw **26** (Figure 7).

[0043] The upper housing **20** of the mounting bracket **10** is illustrated in Figures 9A-9E. The upper housing **20** may include a series of teeth **30**, a series of apertures **32**, a flange **38**, a plurality of slots **42**, and at least one projection **44**. The lower housing **22** of the mounting bracket **10** is illustrated in Figures 10A-10F. The lower housing **22** may include at least one aperture **34**, a threaded aperture **28**, an alignment wall **46**, a plurality of tabs **48**, and a series of apertures **36**.

[0044] The upper housing **20** may include a series of teeth **30** (Figures 9A and 9D). There may be any appropriate number of teeth **30**. The teeth **30** may be of any appropriate shape or size, such as of a generally triangular shape. The teeth **30** may be located at any appropriate position on the upper housing **20**. The lower housing **22** may include an alignment wall **46**. The alignment wall **46** may be of any appropriate shape or size, such as a generally rectangular shape that may extend the width of the lower housing **22**. The alignment wall **46** may be located at any

appropriate position on the lower housing **22**, such as at a location generally opposite that of the series of teeth **30** of the upper housing **20**. When the upper housing **20** and lower housing **22** are joined together, the generally pointed ends of the teeth **30** may be engaged with or may be positioned proximate to the alignment wall **46** of the lower housing **22**.

[0045] The engagement of the teeth **30** with the alignment wall **46** of the lower housing **22** may form channels there between that may separate and guide the wiring that may run from the electrical connector **14** to the towing vehicle electrical system (see Figures 3 and 6). Such separation of the wiring prevents entanglement or other potential problems that may occur with the wiring. In addition, the teeth **30** may allow the wiring of the electrical connector **14** to pass through the back of the mounting bracket **10** while physically restraining the harness of the electrical connector **14** to further secure the connector **14** within the mounting bracket **10**.

[0046] The upper housing **20** may include a flange **38**. The flange **38** may be located at any appropriate position on the upper housing **20**, such as toward the rear of the upper housing **20**. The flange **38** may be of any appropriate shape or size, such as a generally rectangular or square shape. The flange **38** may extend substantially perpendicularly and outwardly from an upper surface of the upper housing **20** (Figure 9A and 9E). The flange **38** may aid in attachment of the mounting bracket **10** to the hitch receiver **62** (Figures 12-16)

[0047] The upper **20** and lower **22** housings may be arranged such that the housings **20**, **22** may each have at least one feature designed whereby the housings **20**, **22** may attach or snap together to form the mounting bracket **10**. The upper housing **20** may include a plurality of slots **42** (Figures 9B-9E). There may be any appropriate number of slots **42**. The slots **42** may be of any appropriate shape or size, such as of a generally rectangular or square shape. The slots **42** may be

located at any appropriate position on the upper housing **20**, such as along the sides of the upper housing **20**.

[0048] The lower housing **22** may include a plurality of tabs **48** (Figures 10C-10F). The tabs **48** may be of any appropriate shape or size, such as a generally rectangular, square or hooked shape. The tabs **48** may be located at any appropriate position on the lower housing **22**, such as along the sides of the lower housing **22**. For example, the tabs **48** may be positioned at a location generally opposite that of the plurality of slots **42** of the upper housing **20**. When the upper housing **20** and lower housing **22** are placed together, the plurality of slots **42** may engage with the plurality of tabs **48** of the lower housing **22**, thereby snapping or attaching the housings **20**, **22** together.

[0049] While the housings **20**, **22** are shown as having four slots **42** and tabs **48**, it is to be understood that any appropriate number of slots **42** and tabs **48** may be utilized and should not be limited to that shown and described herein. In addition, while the mounting bracket **10** is shown as utilizing a snapping arrangement to secure the upper **20** and lower **22** housings together, it is to be understood that any other appropriate type of attachment means may be utilized and should not be limited to that shown or described herein.

[0050] The housings **20**, **22** may also be arranged so that at least one fastener **24** may be utilized to secure the housings **20**, **22** together to form the mounting bracket **10** (Figure 7). The upper **20** and lower **22** housings may be arranged so that a fastener **24**, such as a screw or bolt, may pass through an aperture in the lower housing **22** and be threadedly secured in the upper housing **22**, thereby securing the housings **20**, **22** together.

[0051] The upper housing **20** may include a plurality or series of apertures **32** that may be utilized to secure the mounting bracket **10** to the towing vehicle (Figures 9A-9E). There may be

any appropriate number of apertures **32** in the upper housing **20**. The apertures **32** may be of any appropriate shape or size, such as of a generally circular, rectangular or square shape. The apertures **32** may be located at any appropriate position on the upper housing **20**, such as to aid in attachment of the mounting bracket **10** to the hitch receiver **62** of the towing vehicle. For example, the apertures **32** may be located on the flange **38**, upper portion or sides of the upper housing **20**.

[0052] Similar to the upper housing **20**, the lower housing **22** also may include a plurality or series of apertures **36** that may be utilized to secure the mounting bracket **10** to the towing vehicle. The lower housing **22** may include any appropriate number of apertures **36**. The apertures **36** may be of any appropriate shape or size, such as of a generally circular, square or rectangular shape. The apertures **36** may be located at any appropriate position on the lower housing **22**, such as to aid in attachment of the mounting bracket **10** to the hitch receiver **62** of the towing vehicle. For example, the apertures **36** may be located on the bottom portion or sides of the lower housing **22**.

[0053] The lower housing **22** may include a threaded aperture **28** through which a clamping fasteners, such as a set screw **26**, may be inserted to further secure the electrical connector **14** within the mounting bracket **10**. The threaded aperture **28** may match the threads of the set screw **26**. The threaded aperture **28** may be of any appropriate shape or size, such as a generally circular shape. The threaded aperture **28** may be positioned at any appropriate location on the lower housing **22**, such as adjacent the front end (Figure 10A).

[0054] The lower housing **22** may also include a platform **50** (Figures 10A and 10C-10E). The platform **50** may be of any appropriate shape or size, such as a generally circular, rectangular or ovular shape. The platform **50** may be located at any appropriate position on the lower housing

22. For example, the platform 50 may be located adjacent the front end and may extend perpendicularly outward from the bottom surface of the lower housing 22. The threaded aperture 28 may be located at the approximate center of the platform 50 (Figure 10A).

[0055] Once the electrical connector 14 is placed between the housings 20, 22 and the housings 20, 22 are secured together, the set screw 26 may be threaded into the threaded aperture 28 whereby the set screw 26 may engage the harness of the electrical connector 14. Once the set screw 26 is engaged with the threaded aperture 28, the set screw 26 may be tightened to remove any slack or gap between a wall of the inner chamber 12 and the electrical connector 14, resulting in a well-fitted positioning of the electrical connector 14 within the mounting bracket 10. It is to be understood that the set screw 26 and threaded aperture 28 as described may be incorporated into the upper housing 20, or the upper housing 20 and the lower housing 22 may each include a set screw and a threaded aperture, and should not be limited to that shown or described herein.

[0056] The upper housing 20 may include at least one projection 44 (Figures 9C and 9D). The upper housing 20 may include any appropriate number of projection 44, such as two, three or four. The projection 44 may be of any appropriate shape or size, such as of a generally cylindrical, circular, square or rectangular shape. The projections 44 may be located at any appropriate position on the upper housing 20, such as on the upper portion of the upper housing 20.

[0057] The lower housing 22 may include at least one aperture 34 (Figures 10A, 10B, 10E and 10F). The lower housing 22 may include any appropriate number of apertures 34, such as two, three or four. The apertures 34 may be of any appropriate shape or size, such as of a generally cylindrical, circular, square or rectangular shape. The apertures 34 may be located at any

appropriate position on the lower housing **22**, such as on the bottom portion of the lower housing **22**. For example, the apertures **34** may be positioned at a location generally opposite that of the projections **44** of the upper housing **20**, whereby the projections **44** may abut the apertures **34** when the upper **20** and lower **22** housings are attached together. In addition, the apertures **34** may accommodate fasteners **24** that may aid in securing the upper **20** and lower **22** housings together.

[0058] The upper housing **20** may include a cutout or opening **16**. The lower housing **22** may include a cutout or opening **18**. These openings **16**, **18** may be of any appropriate shape or size, such as a generally rectangular, square or circular shape. These openings **16**, **18** may also be of a generally corresponding shape and size. When the upper **20** and lower **22** housings of the mounting bracket **10** are attached together, the openings **16**, **18** form one larger opening located near the mounting brackets **10** front face that may lead into the inner chamber **12** (Figures 1 and 5).

[0059] This larger opening of the mounting bracket **10** may allow a portion of the electrical connector **14** and the terminals, pins, or sockets of the electrical connector **14** to extend through the front face of the bracket **10** (Figure 5). In such an arrangement, the terminals, pins, or sockets may be mated with matching terminals, pins, or sockets of an electrical connector **66** that may be secured to a trailer, thereby placing the towing vehicle electrical system in electrical communication with the trailer electrical system (Figures 15 and 16). There may be another opening in the rear of the mounting bracket **10** that may allow for wiring to extend out of the back of the bracket **10** and to the towing vehicle electrical system (Figure 6).

[0060] The two-part design of the mounting bracket **10** may eliminate any need to disconnect existing wires extending from the towing vehicle electrical system when the electrical connector **14** is being secured to the towing vehicle. The harness portion of the connector **14** may be placed

into the bracket **10** while accommodating the wiring connecting the towing vehicle electrical system to the electrical connector **14**.

[0061] The mounting bracket **10** may utilize a cover **52** (Figures 11, 13 and 14). The cover **52** may protect the terminals, pins, and sockets of the electrical connector **14** from dust, moisture, salt, and other such corrosive and destructive containments. The cover **52** may include a cap portion **54**, a strap portion **56**, and a slot **58** (Figure 11). The cap portion **54** may be of any appropriate shape or size, such as a generally ovular or rectangular shape. For example, the cap portion **54** may be arranged to snugly fit over the terminals, pins, and sockets of the electrical connector **14**, whereby the terminals, pins, and sockets may be shielded from contaminants while the electrical connector **14** is secured to the towing vehicle but not yet coupled to the trailer's electrical system.

[0062] The slot **58** of the strap portion **56** may permit the wiring of the electrical connector **14** to pass through the cover **52** and to secure the cover **52** from falling from the towing vehicle. In such an arrangement, the cover **52** may remain secured to the towing vehicle regardless whether it is engaged with the terminals, pins, and sockets. The cover **52** may be fabricated from any variety of appropriate materials. For example, the cover **52** may be fabricated from an elastomeric rubber.

[0063] Various arrangements for securing the mounting bracket **10** to a towing vehicle are illustrated in Figures 12-16. The mounting bracket **10** may be secured to the towing vehicle at any appropriate location or position and by any appropriate means. For example, the mounting bracket **10** may be secured to a cross tube **60** of a hitch receiver **62** (Figure 12). The hitch receiver **62** is a common component used to secure a trailer to a towing vehicle and may typically be secured to the rear of a towing vehicle. The mounting bracket **10** may be arranged to

be selectively secured to a variety of types of hitch receivers. For example, the mounting bracket **10** may be arranged to be secured to the cross tube of a Class I, II, III, IV, or V receiver.

[0064] The mounting bracket **10** may be secured to a cross tube **60** of the hitch receiver **62** by utilizing the apertures **32**, **36** in the upper **20** and lower **22** housings of the bracket **10** (Figures 13-16). The mounting bracket **10** may be attached to the cross tube **60** of the hitch receiver **62** by any appropriate means, such as with fasteners, straps or the like. Fasteners may be passed through the apertures **32** and secured to the cross tube **60** through any number of methods. For example, straps **64** such as cable ties may be used to secure mounting bracket **10** to the cross tube **60**. In addition, the mounting bracket **10** may be secured to the cross tube **60** at any appropriate location on the cross tube **60**.

[0065] The use of cable ties **64** may eliminate the need for drilling or otherwise permanently altering the cross tube **60**. The cable ties **64** may be of any appropriate shape, length or size. The cable ties **64** may be fabricated from any variety of appropriate materials. For example, the cable ties **64** may be fabricated from a non-elastomeric polymer so that the overall length of the cable tie **64** does not change when subjected to a tensile force. In another example, the cable ties **64** may be fabricated from a polymer that is capable of withstanding the rigors of exposure to harsh weather and other such elements.

[0066] The mounting bracket **10** may be secured to a cross tube **60** by passing a cable ties **64** through apertures **32**, **36** in the upper **20** and lower **22** housings (Figures 13 and 14). For example, the cable tie **64** may be passed through an aperture **32** in the upper housing **20**, then the cable tie **64** may be positioned around the cross tube **60**, and the cable tie **64** may then be passed through an aperture **36** in the lower housing **22** to complete the attachment of the bracket **10** to the cross tube **60**.

[0067] The mounting bracket **10** may be secured to a cross tube **60** in a horizontal arrangement (Figure 13), or the mounting bracket **10** may be secured to a cross tube **60** in a vertical arrangement (Figure 14). The cover **52** may be positioned over the terminals, pins, and sockets of the electrical connector **14**, and the cover **52** may be removed from the terminals, pins, and sockets of the electrical connector **14**, but still remain secured to the towing vehicle through its engagement with the wiring of the electrical connector **14** (Figures 13 -16).

[0068] The electrical connector **14** may be secured to the towing vehicle by the mounting bracket **10**. Once secured, the electrical connector **14** may be coupled to the electrical system of the trailer (Figures 15 and 16). When the cover **52** is removed from the terminals, pins, and sockets of the electrical connector **14**, the connector **14** may be manually coupled to the electrical system of the trailer by way of a trailer electrical connector **66** (Figures 15 and 16).

[0069] Although mounting brackets **10** have been generally described and illustrated herein as attached or secured to a towing vehicle, it will be readily understood that a mounting bracket may be arranged to be attached or secured to a trailer. A mounting bracket arranged to be secured to a trailer may utilize the same or similar methods and apparatus as that described for attachment to a towing vehicle.

[0070] Although the preferred embodiment has been illustrated in the accompanying drawings and described in the foregoing detailed description, it is to be understood that the present application or claims are not to be limited to just the preferred embodiment disclosed, but that the disclosed apparatus and methods are capable of numerous rearrangements, modifications and substitutions without departing from the scope of the claims hereafter.

The embodiments of the present invention for which an exclusive property or privilege is claimed are defined as follows:

1. A mounting bracket for securing an electrical connector, said mounting bracket comprising:
 - a first housing comprising at least one mounting aperture, at least one slot, a series of teeth, and at least one projection;
 - a second housing comprising at least one tab for engagement with said at least one slot, a wall for engagement with said series of teeth, and at least one attachment aperture for engagement with said at least one projection;
 - wherein, when attached, said first housing and said second housing define an inner chamber for securing the electrical connector; and
 - wherein the engagement of said teeth with said wall provides at least one opening for separating wires of the electrical connector.
2. The mounting bracket of claim 1, wherein an attachment fastener is engageable with said attachment apertures and said projections to secure said first housing and said second housing together.
3. The mounting bracket of claim 1, wherein said second housing has a pair of attachment apertures and said wall expands between said attachment apertures.
4. The mounting bracket of claim 3, wherein said first housing has a pair of projections and said series of teeth expands between said projections.
5. The mounting bracket of claim 1, wherein said first housing includes a cutout for receiving a portion of the electrical connector.
6. The mounting bracket of claim 5, wherein said second housing includes a cutout for receiving a portion of the electrical connector.
7. The mounting bracket of claim 6 further including a cover for engagement with the electrical connector that is partially extended out of said mounting bracket via said cutouts.

8. The mounting bracket of claim 1, wherein said mounting bracket is securable to the towing vehicle via said mounting apertures of said first housing.
9. The mounting bracket of claim 1, wherein said mounting bracket is mountable vertically or horizontally.
10. The mounting bracket of claim 1, wherein said inner chamber is shaped and sized for receiving a 4-way flat connector.
11. The mounting bracket of claim 1 further including a threaded aperture located in said second housing.
12. The mounting bracket of claim 11, wherein said threaded aperture is engageable with a clamping fastener that is engageable with the electrical connector.
13. A mounting bracket for securing an electrical connector comprising:
 - an upper housing including a flange, wherein said flange includes at least one mounting aperture;
 - a plurality of slots located on said upper housing;
 - a lower housing including a threaded aperture;
 - a plurality of tabs located on said lower housing, wherein said plurality of tabs are engageable with said plurality of slots;
 - a clamping fastener for engagement with said threaded aperture, wherein said clamping fastener is adapted for clamping engagement with the electrical connector;
 - a cover for engagement with the electrical connector; and
 - wherein said mounting bracket is connected to a cross bar of a towing vehicle.
14. The mounting bracket of claim 13, wherein said threaded aperture is located in a platform on the lower housing.
15. The mounting bracket of claim 13, wherein said mounting bracket is for use on Class I, II, III, IV, or V hitch receivers.

16. The mounting bracket of claim 13, wherein said mounting bracket is mountable vertically or horizontally on the cross bar of the hitch receiver.
17. A method of securing an electrical connector to a towing vehicle, said method comprising:
placing the electrical connector within a recessed area of one of an upper housing and a lower housing, wherein said upper housing includes a plurality of teeth and said lower housing includes a wall for engagement with said plurality of said teeth;
attaching said upper housing and said lower housing together to form a mounting bracket, the electrical connector being disposed within an inner chamber of said mounting bracket and wherein the engagement of said plurality of teeth with said wall provides at least one opening for separating wires of the electrical connector;
securing said upper housing and said lower housing together via at least one fastener; and
securing said mounting bracket to a cross bar of the towing vehicle.
18. The method of claim 17, wherein said mounting bracket is secured to the cross bar by at least one cable tie.
19. The method of claim 17, wherein the step of securing the electrical connector within said inner chamber includes tightening a clamping fastener through a threaded aperture located in said lower housing.
20. The mounting bracket of claim 1, wherein said structure of a towing vehicle is a cross-bar.
21. The mounting bracket of claim 1, wherein said structure of a towing vehicle is a bumper.
22. A mounting bracket comprising:
an upper housing comprising at least one mounting aperture, at least one slot, a series of teeth, and at least one projection;
a lower housing connected to said upper housing, said lower housing comprising at least one tab for engagement with said at least one slot, a wall for engagement with said series of teeth, and at least one attachment aperture for engagement with said at least one projection;

an inner chamber defined by an interior portion of said upper housing and said lower housing;

an electrical connector positioned within said inner chamber, wherein said electrical connector includes wiring connections of a towing vehicle; and

wherein the engagement of said teeth with said wall provides at least one opening for separating wires of the electrical connector.

23. The mounting bracket of claim 22, wherein said mounting bracket is mounted to a structure of a towing vehicle.

24. The mounting bracket of claim 23, wherein said structure of a towing vehicle is a cross bar.

25. The mounting bracket of claim 22 further comprising a threaded aperture located in said lower housing.

26. The mounting bracket of claim 22, wherein said threaded aperture is engageable with a clamping fastener that is engageable with said electrical connector.

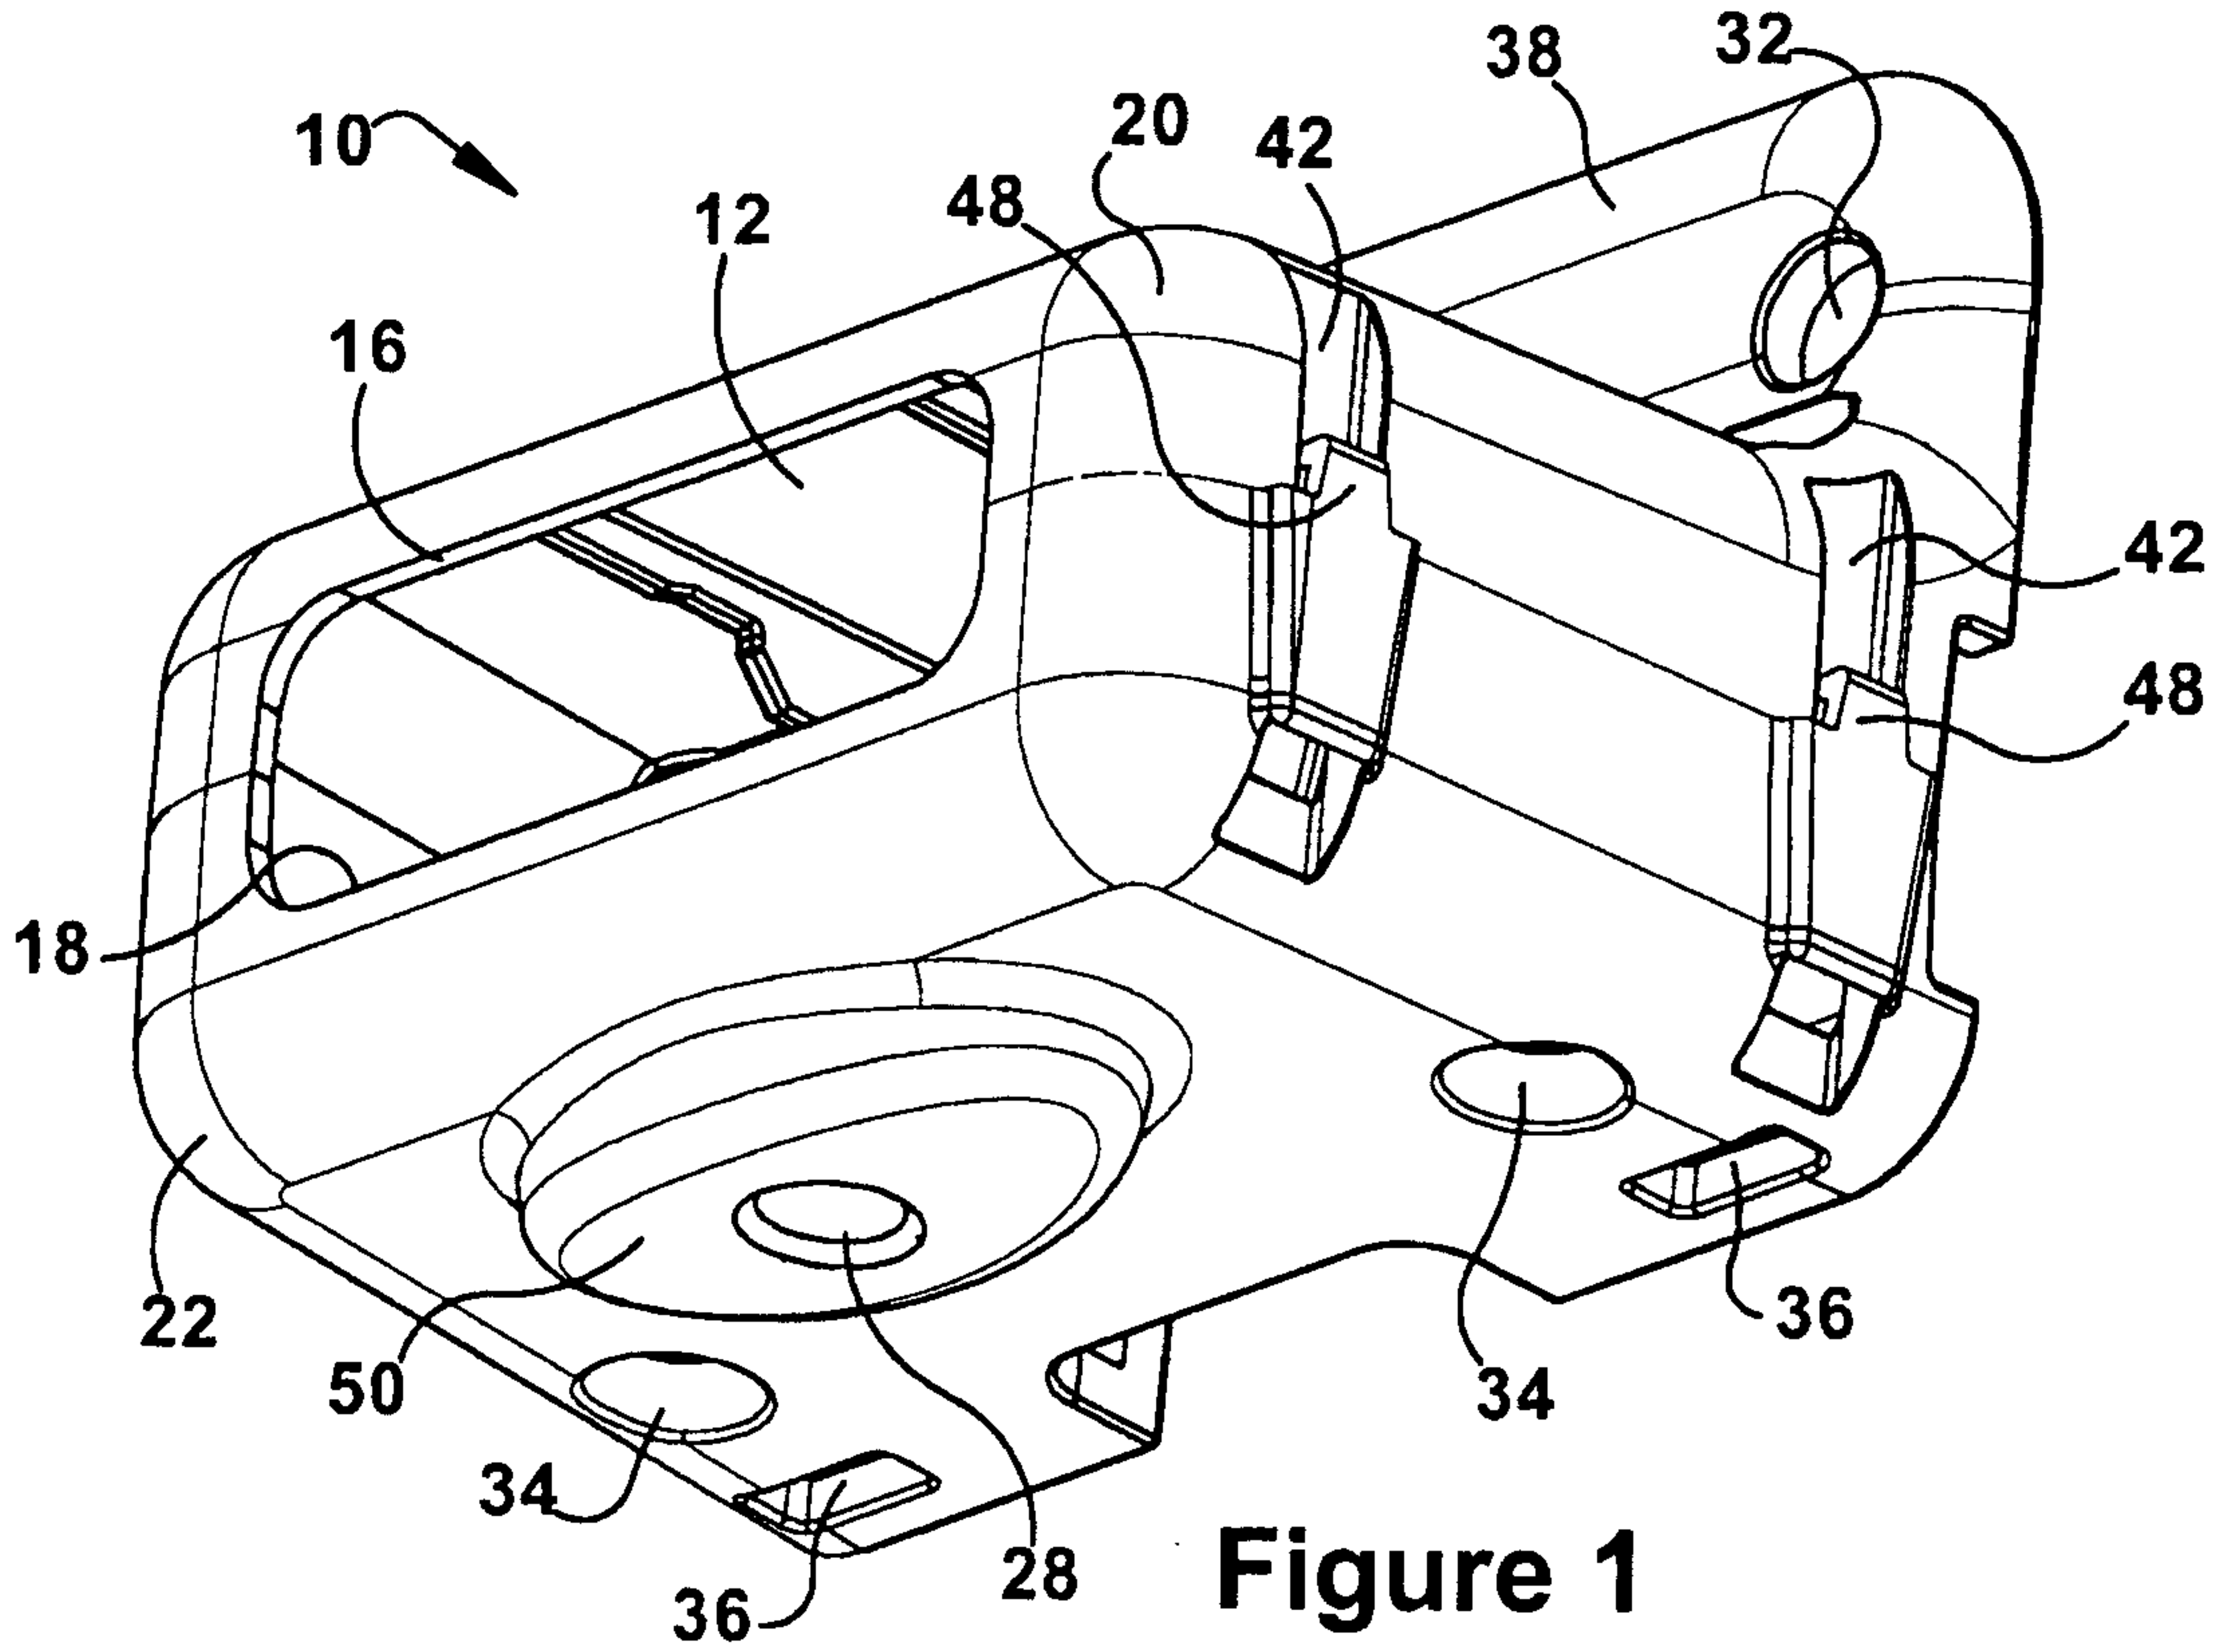


Figure 1

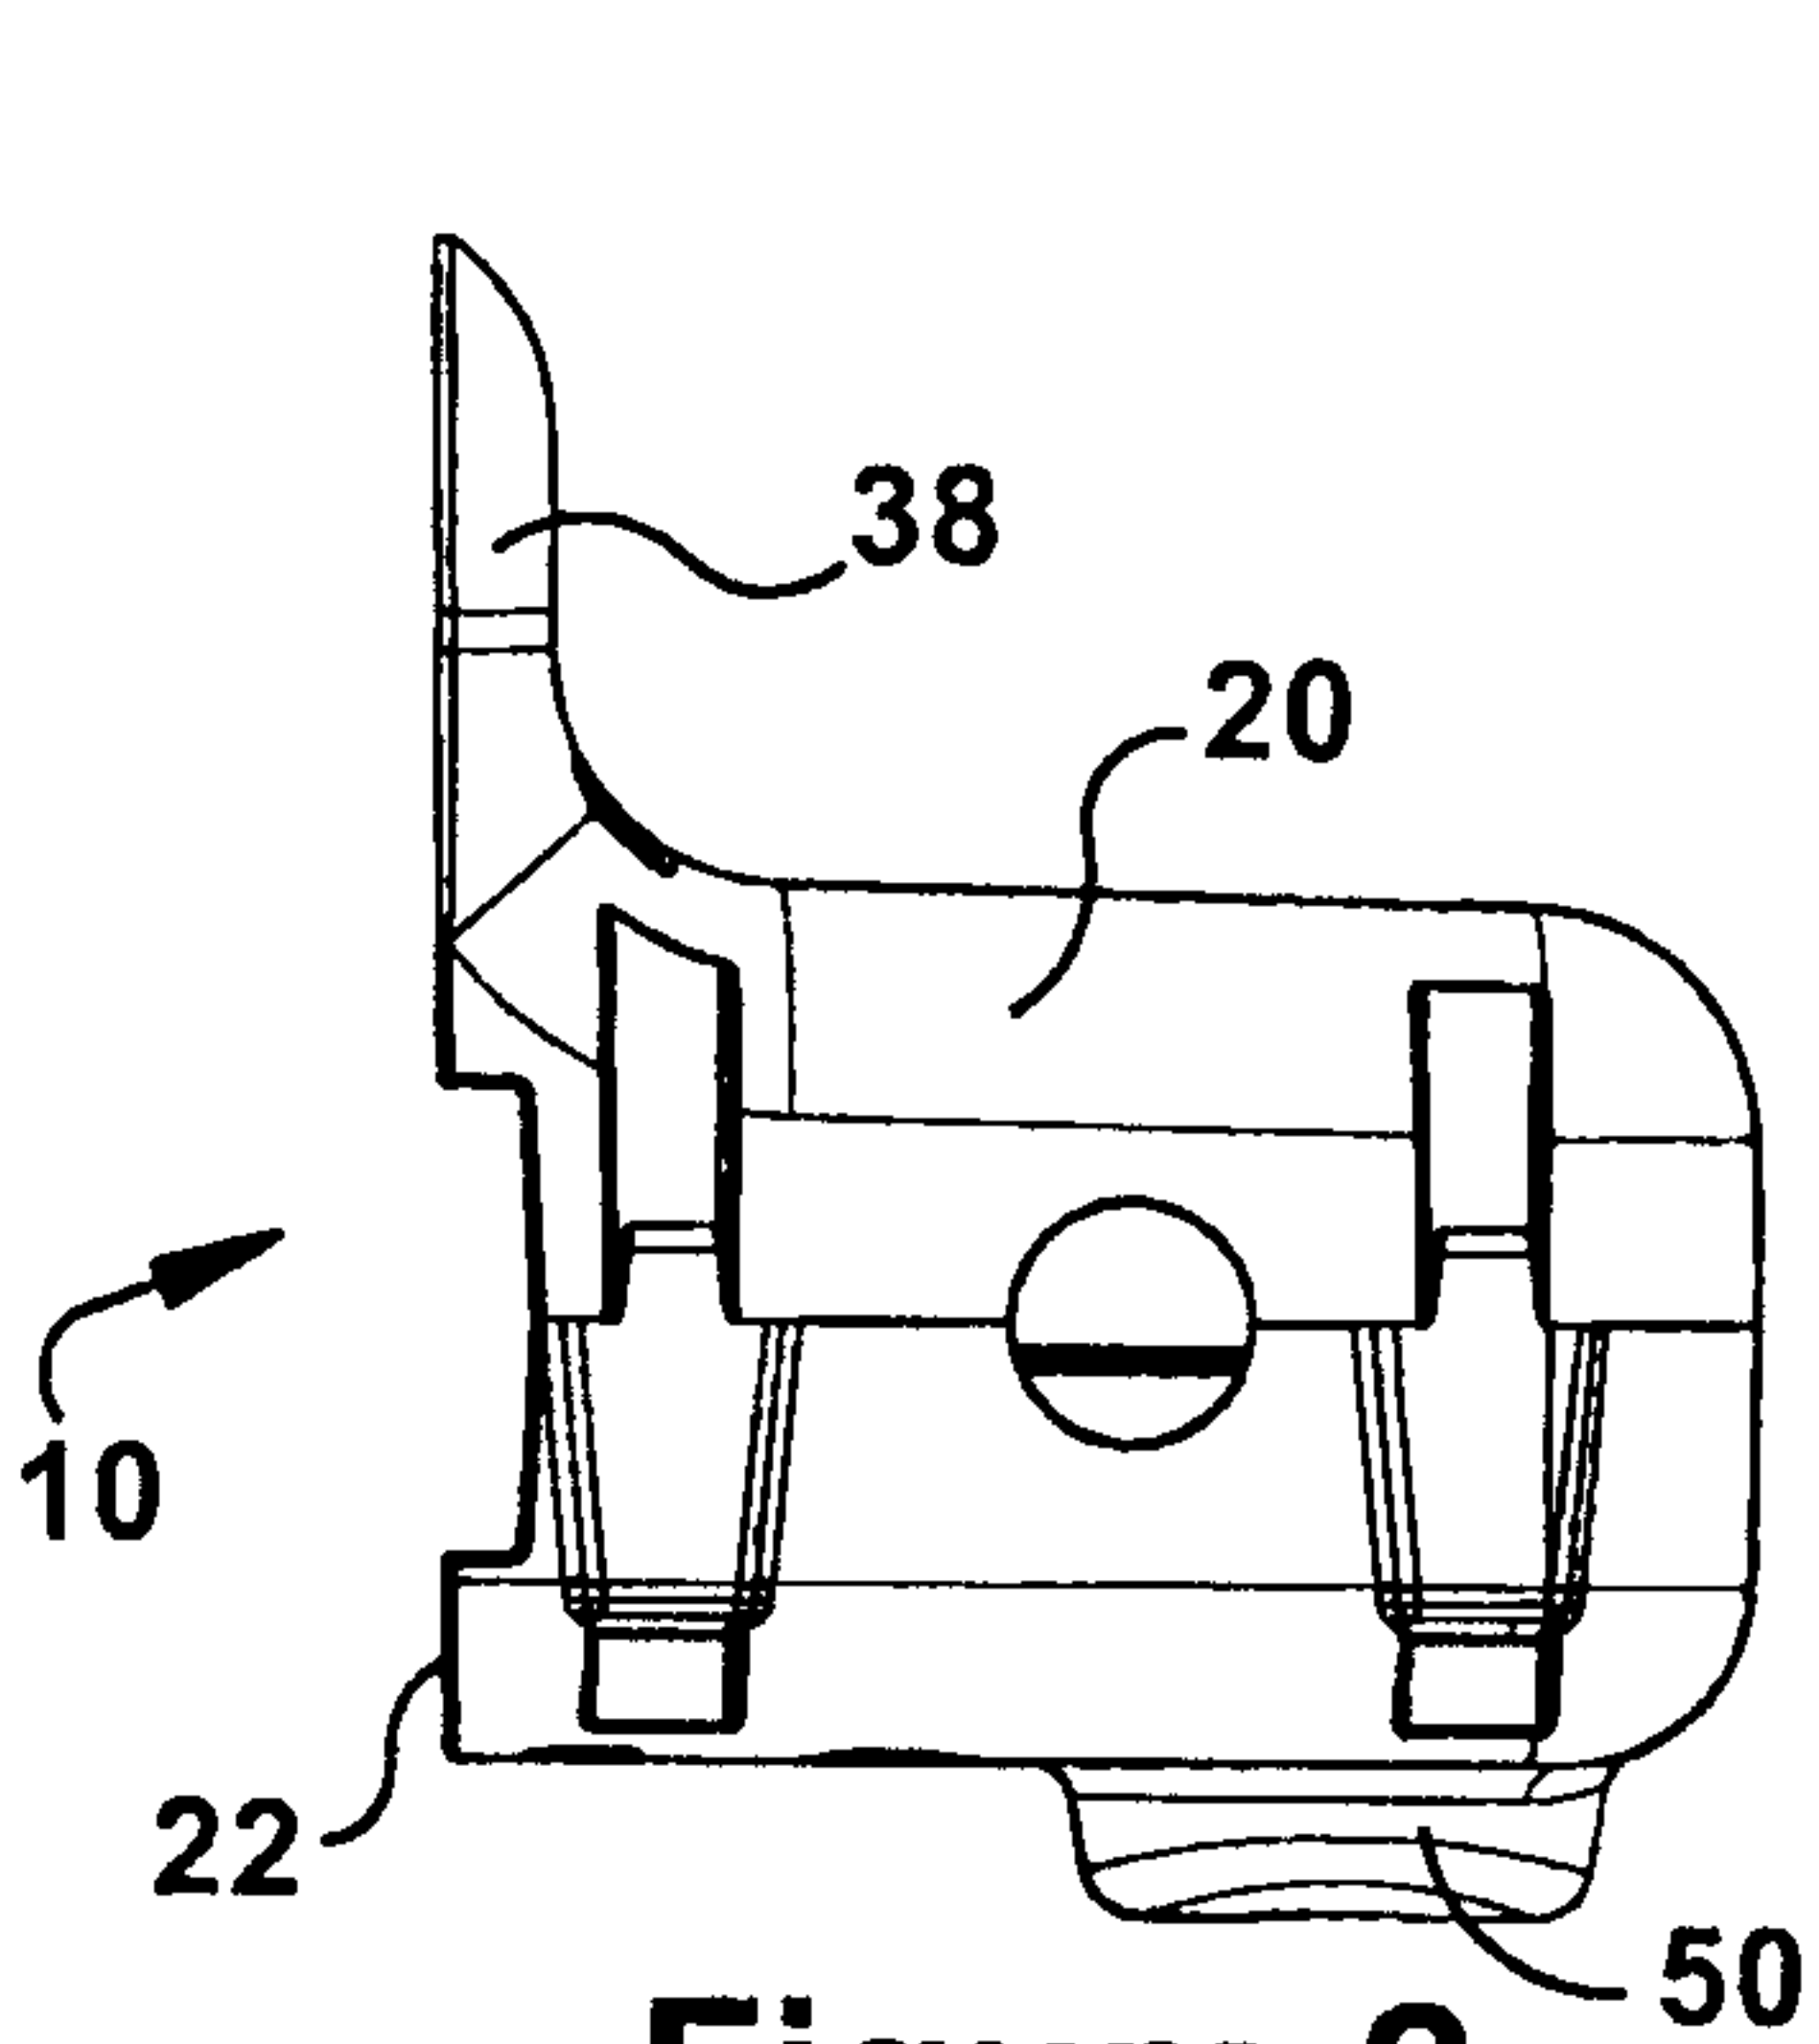


Figure 2

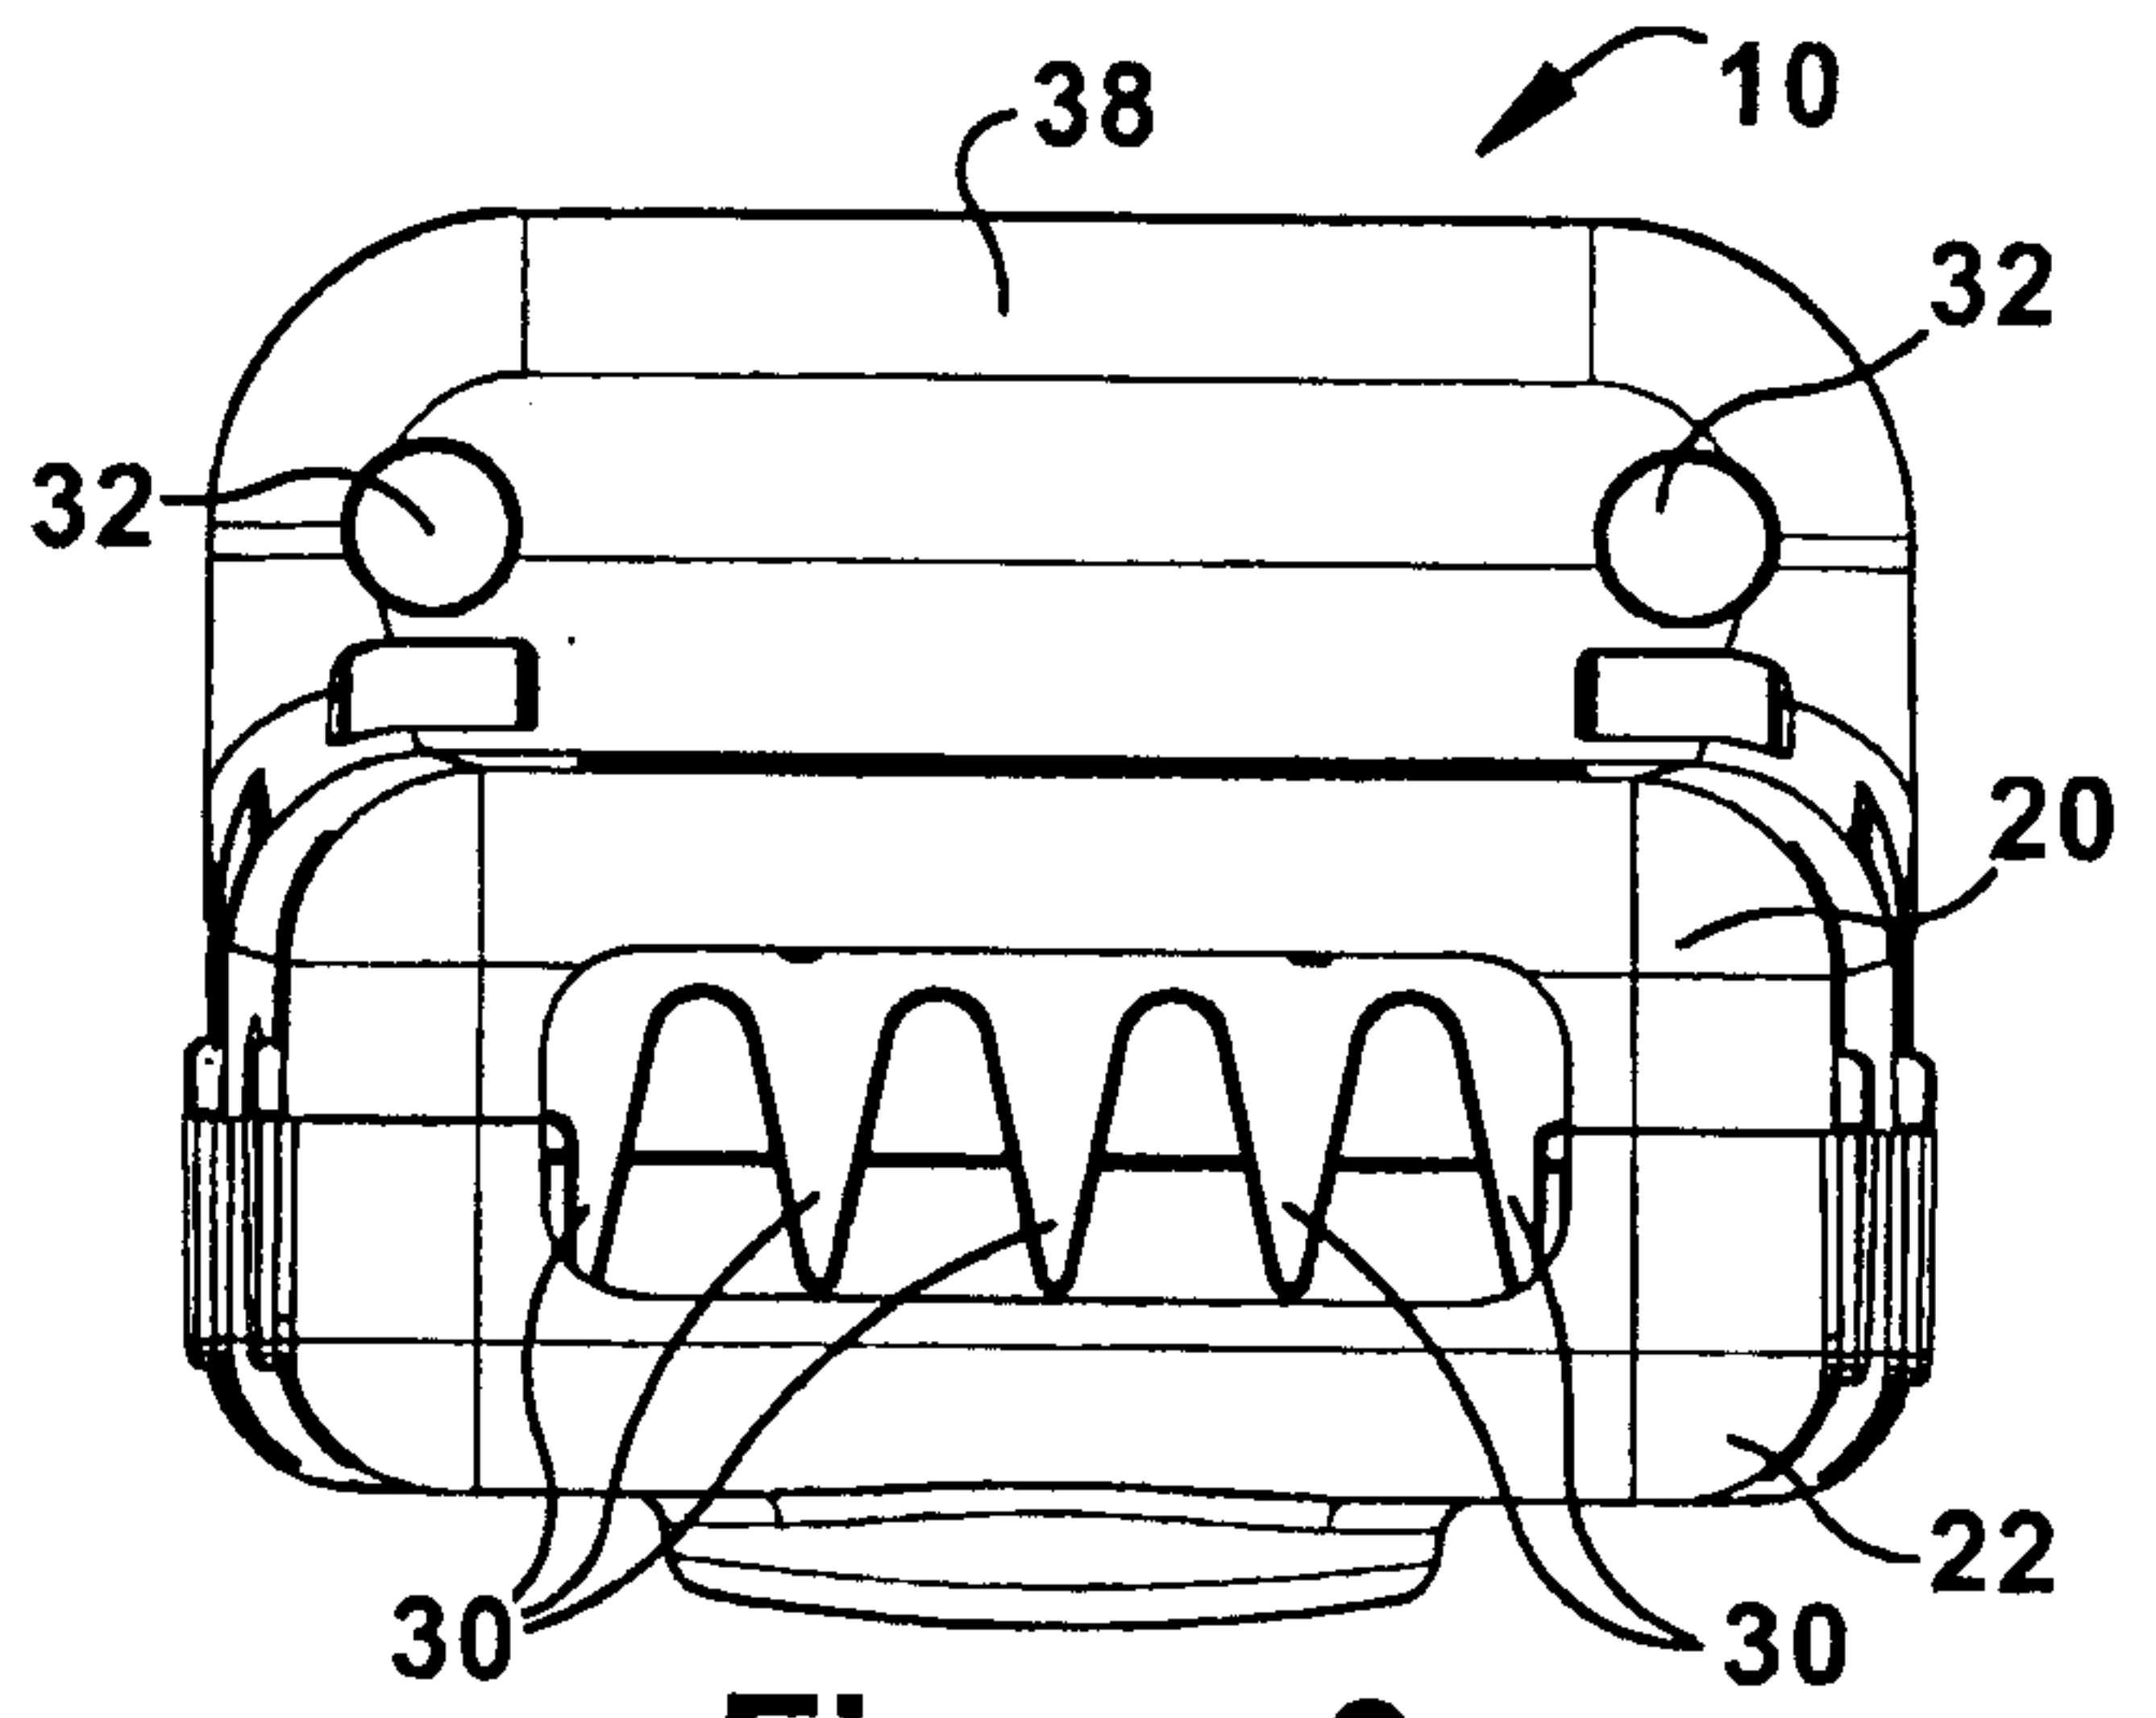


Figure 3

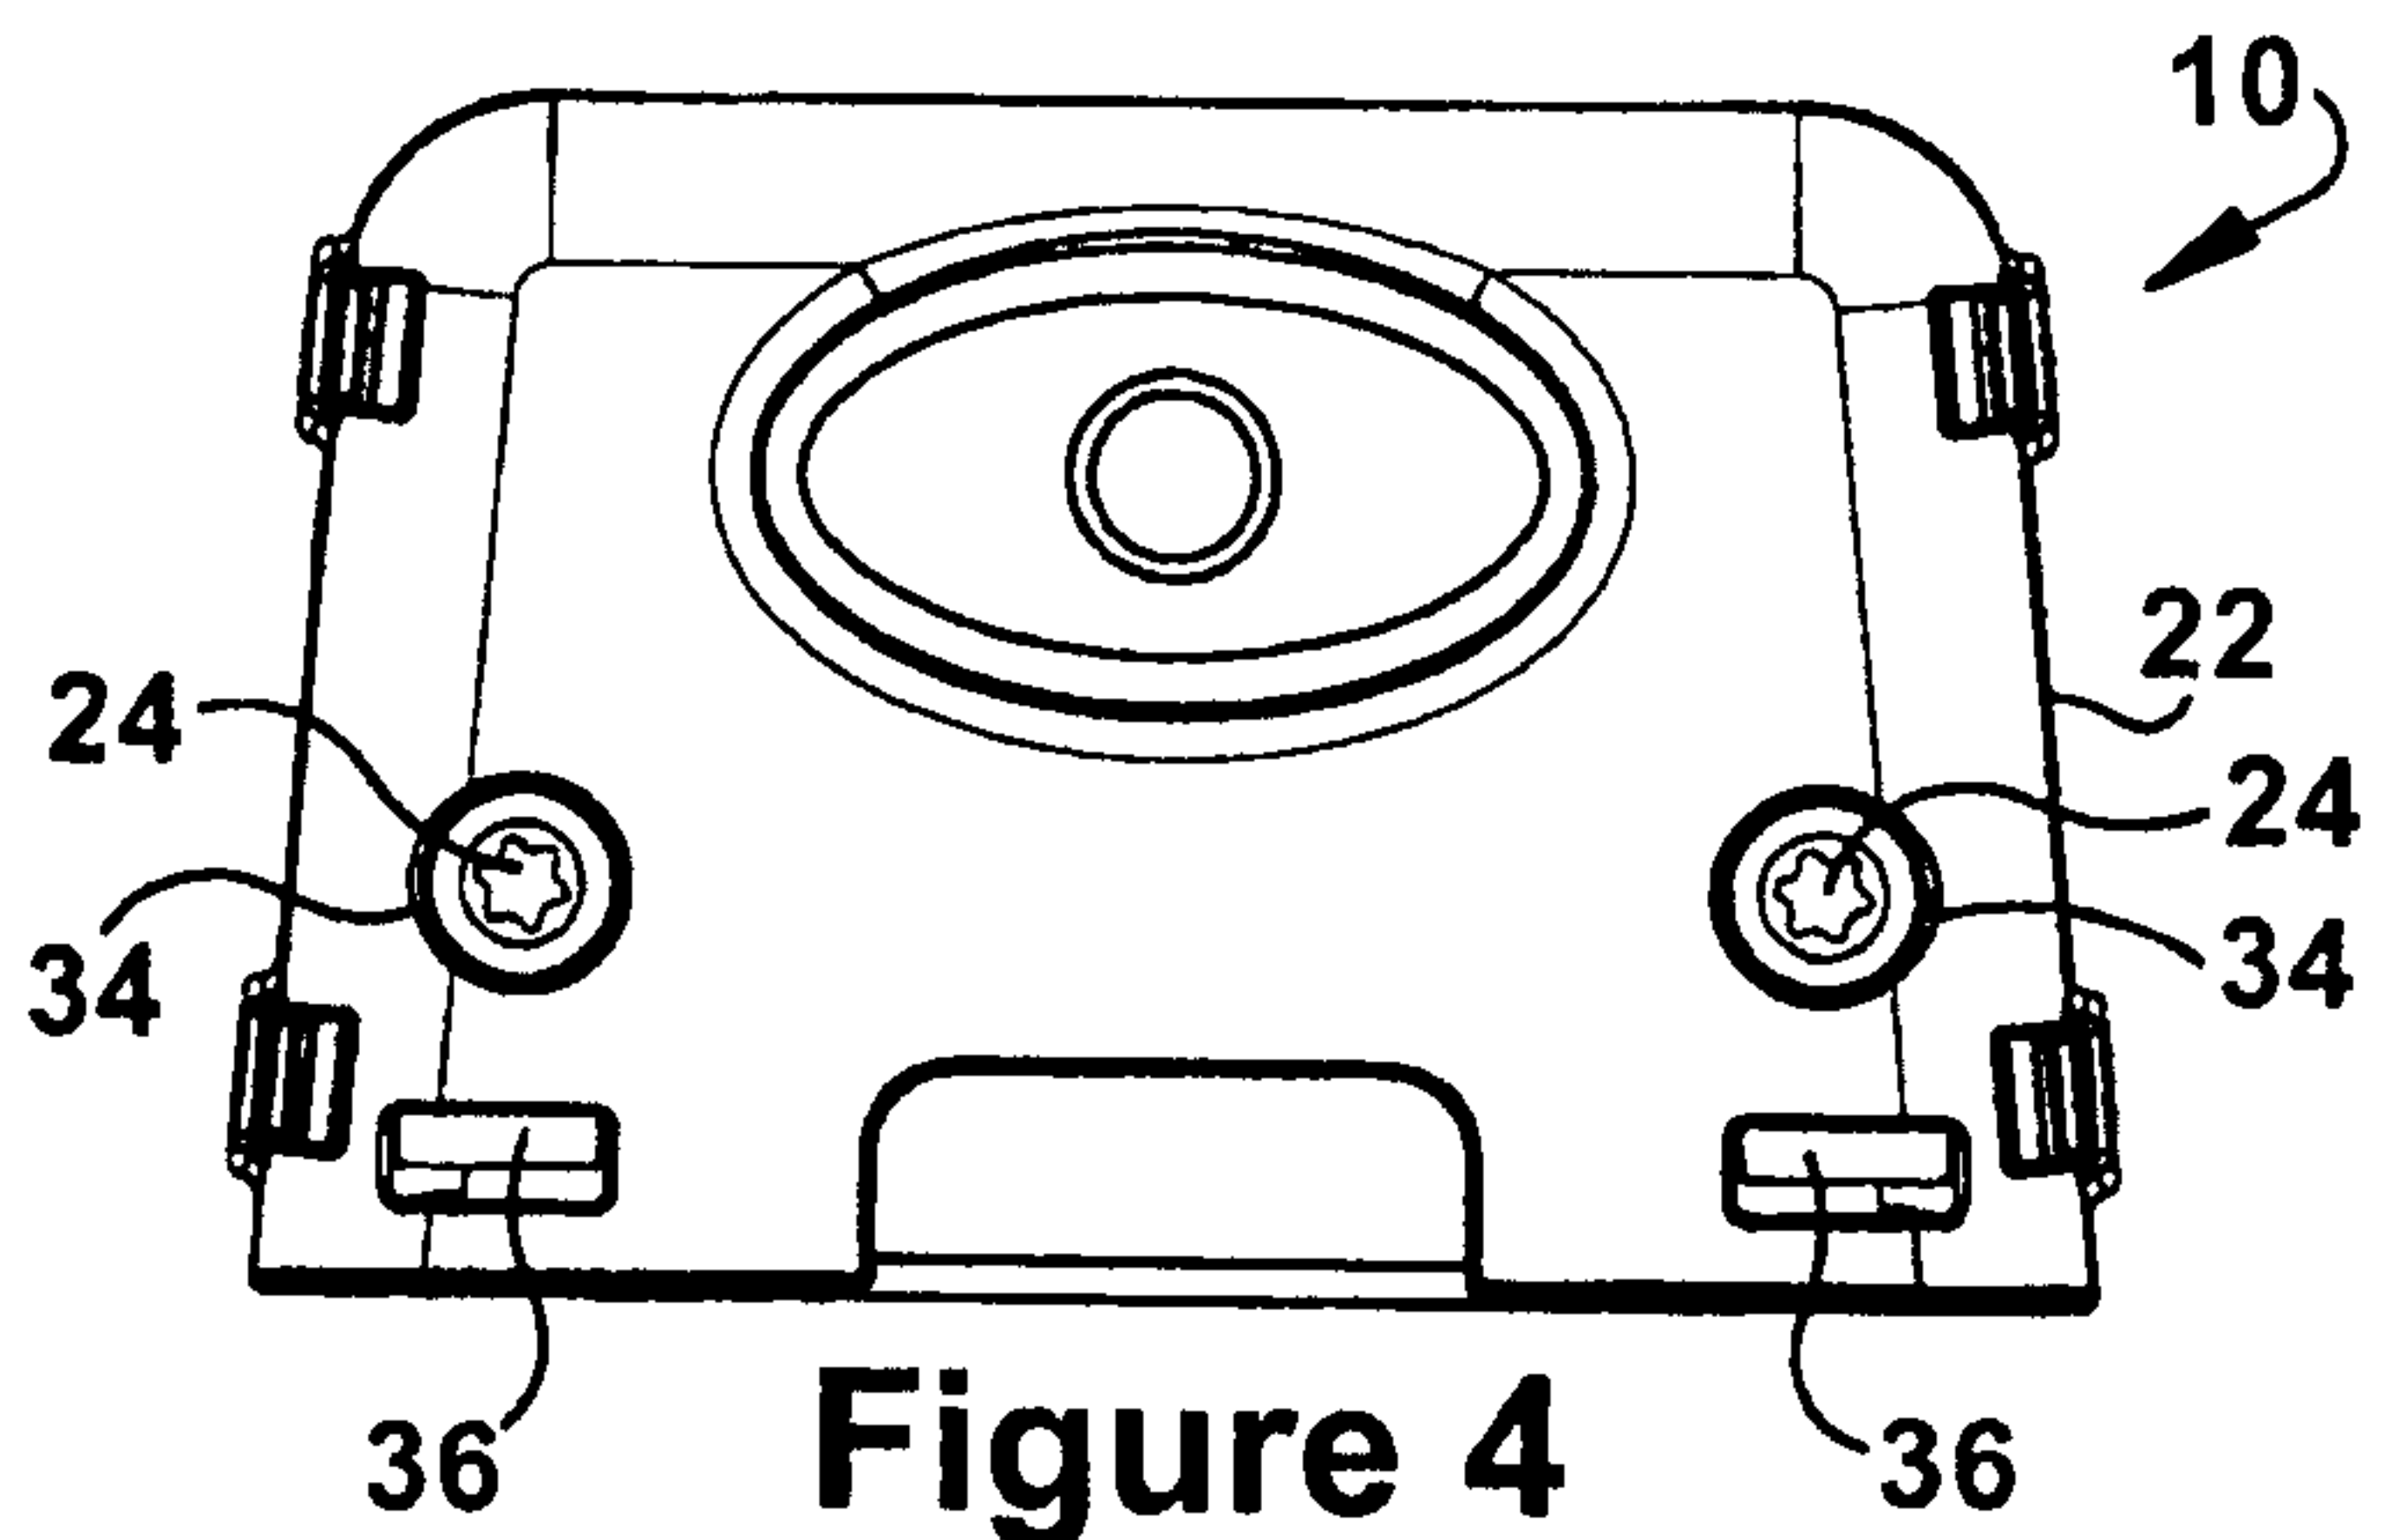


Figure 4

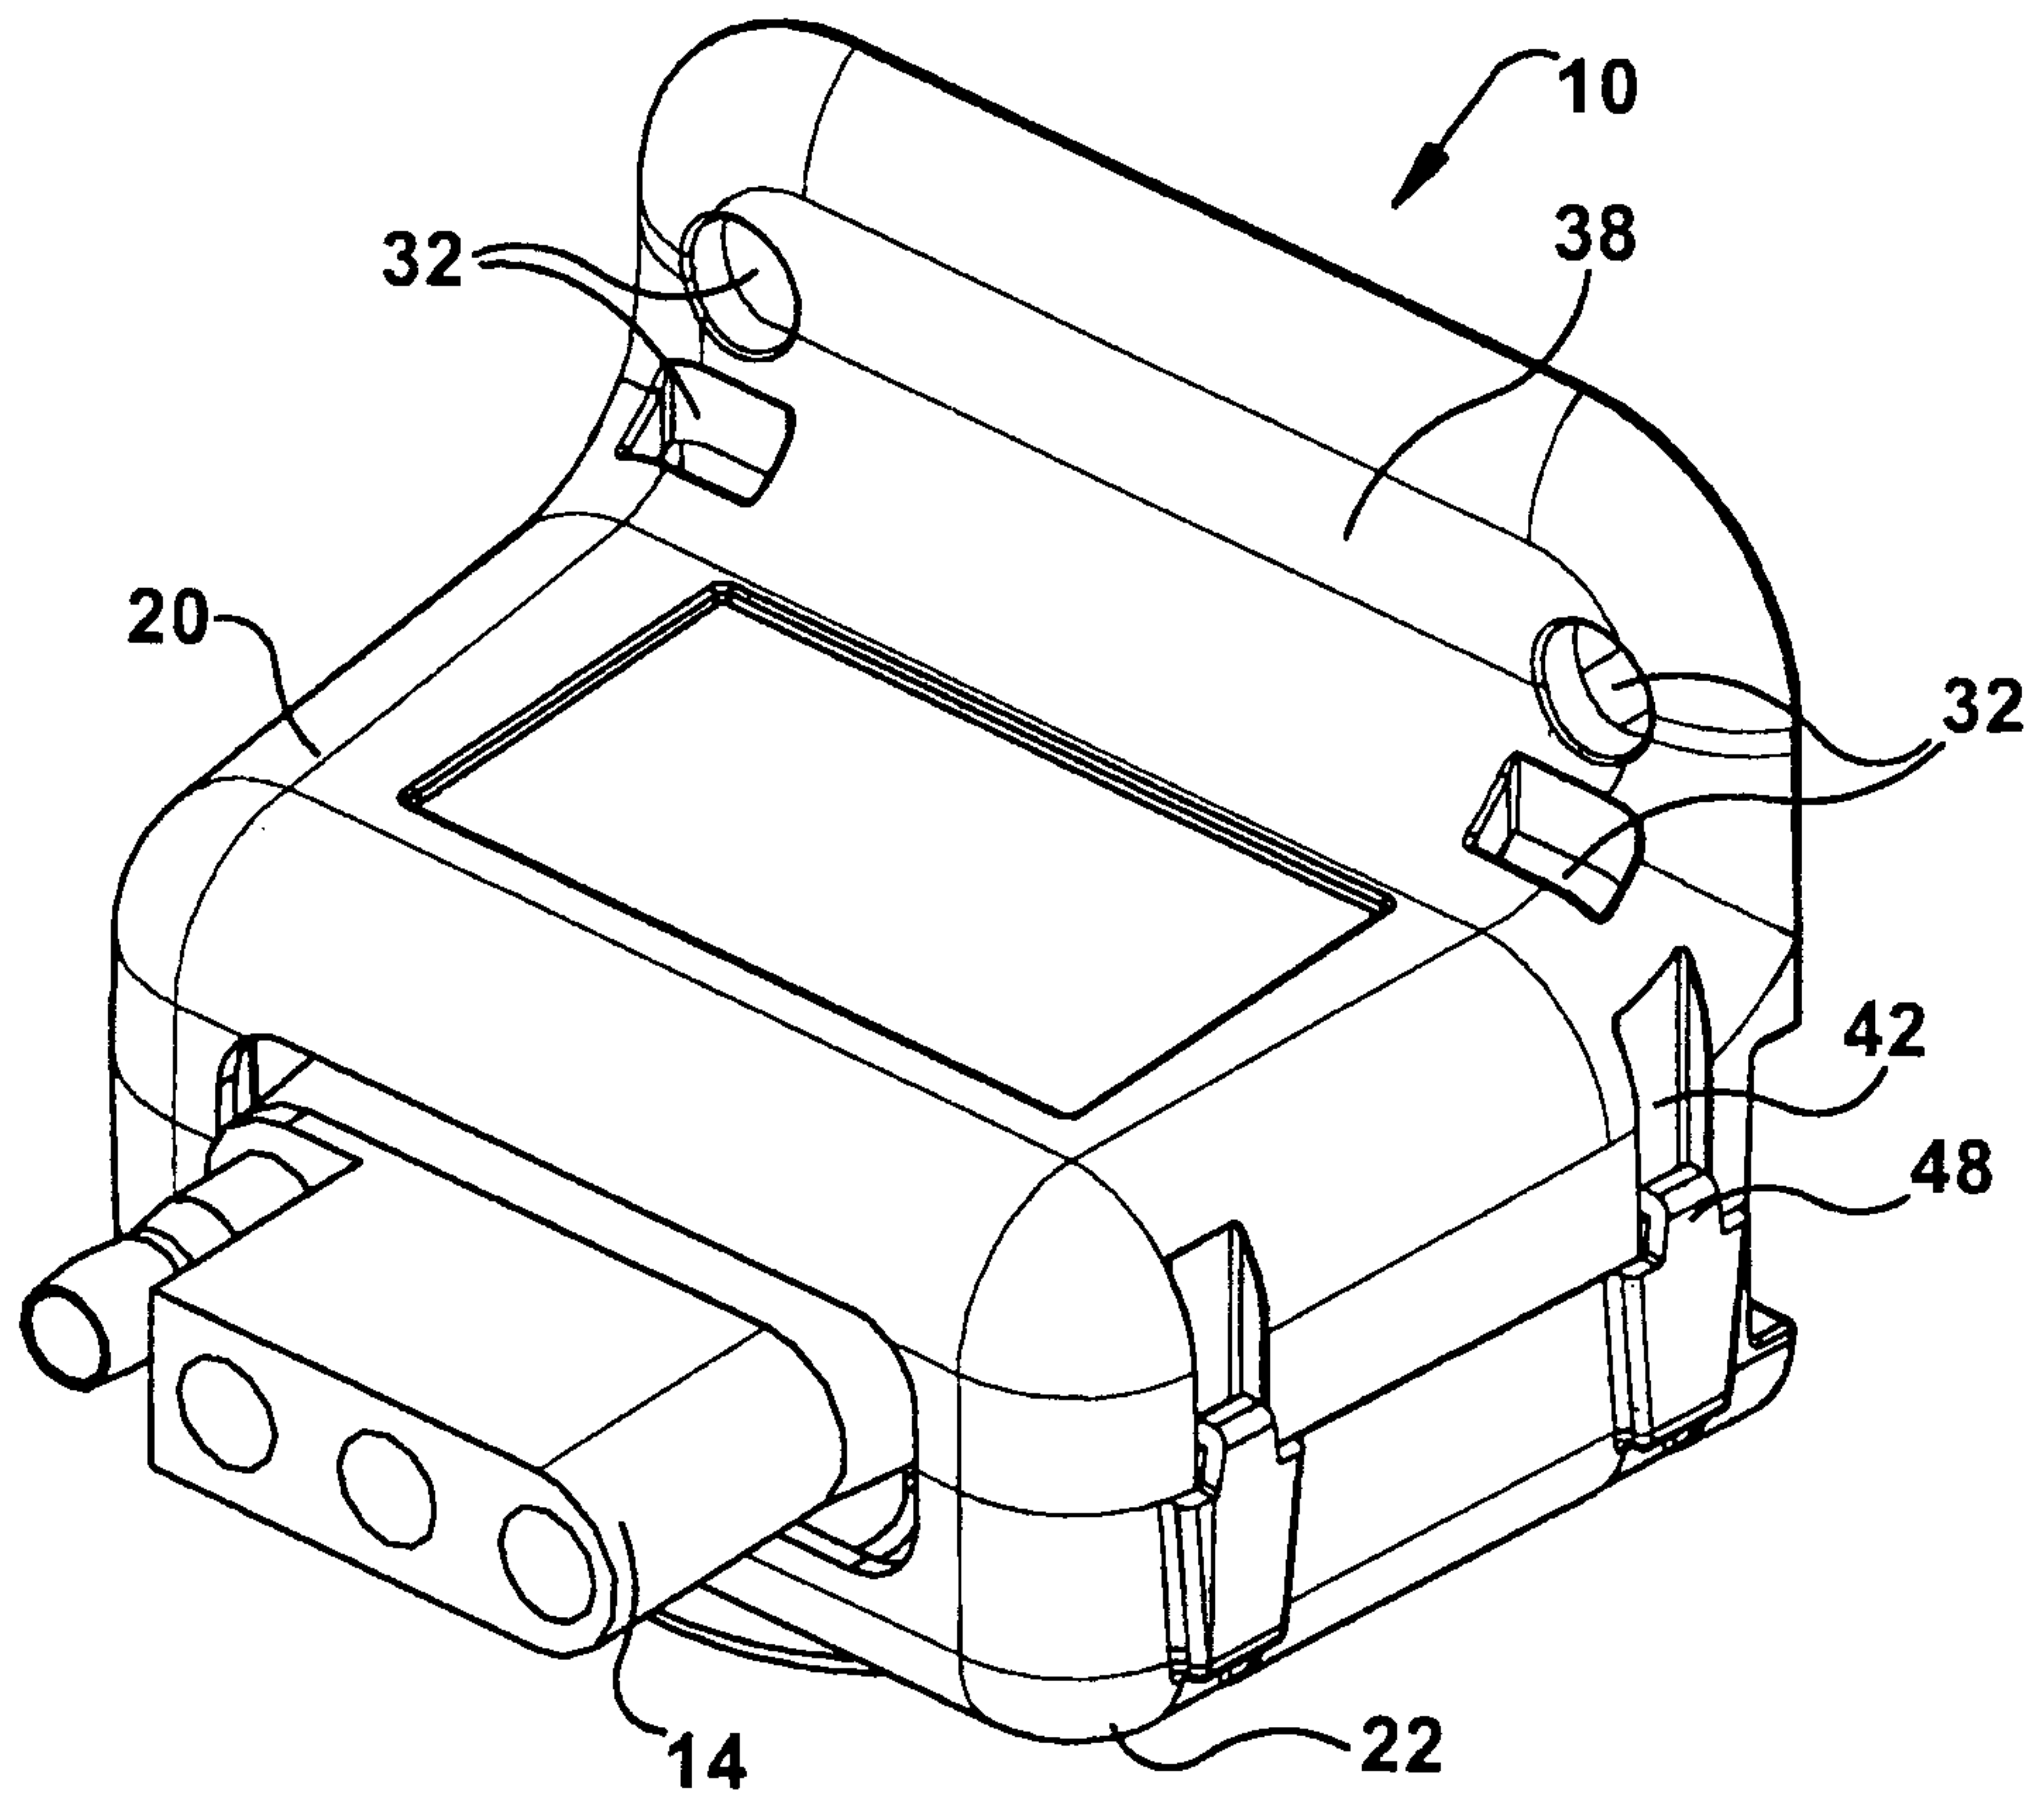


Figure 5

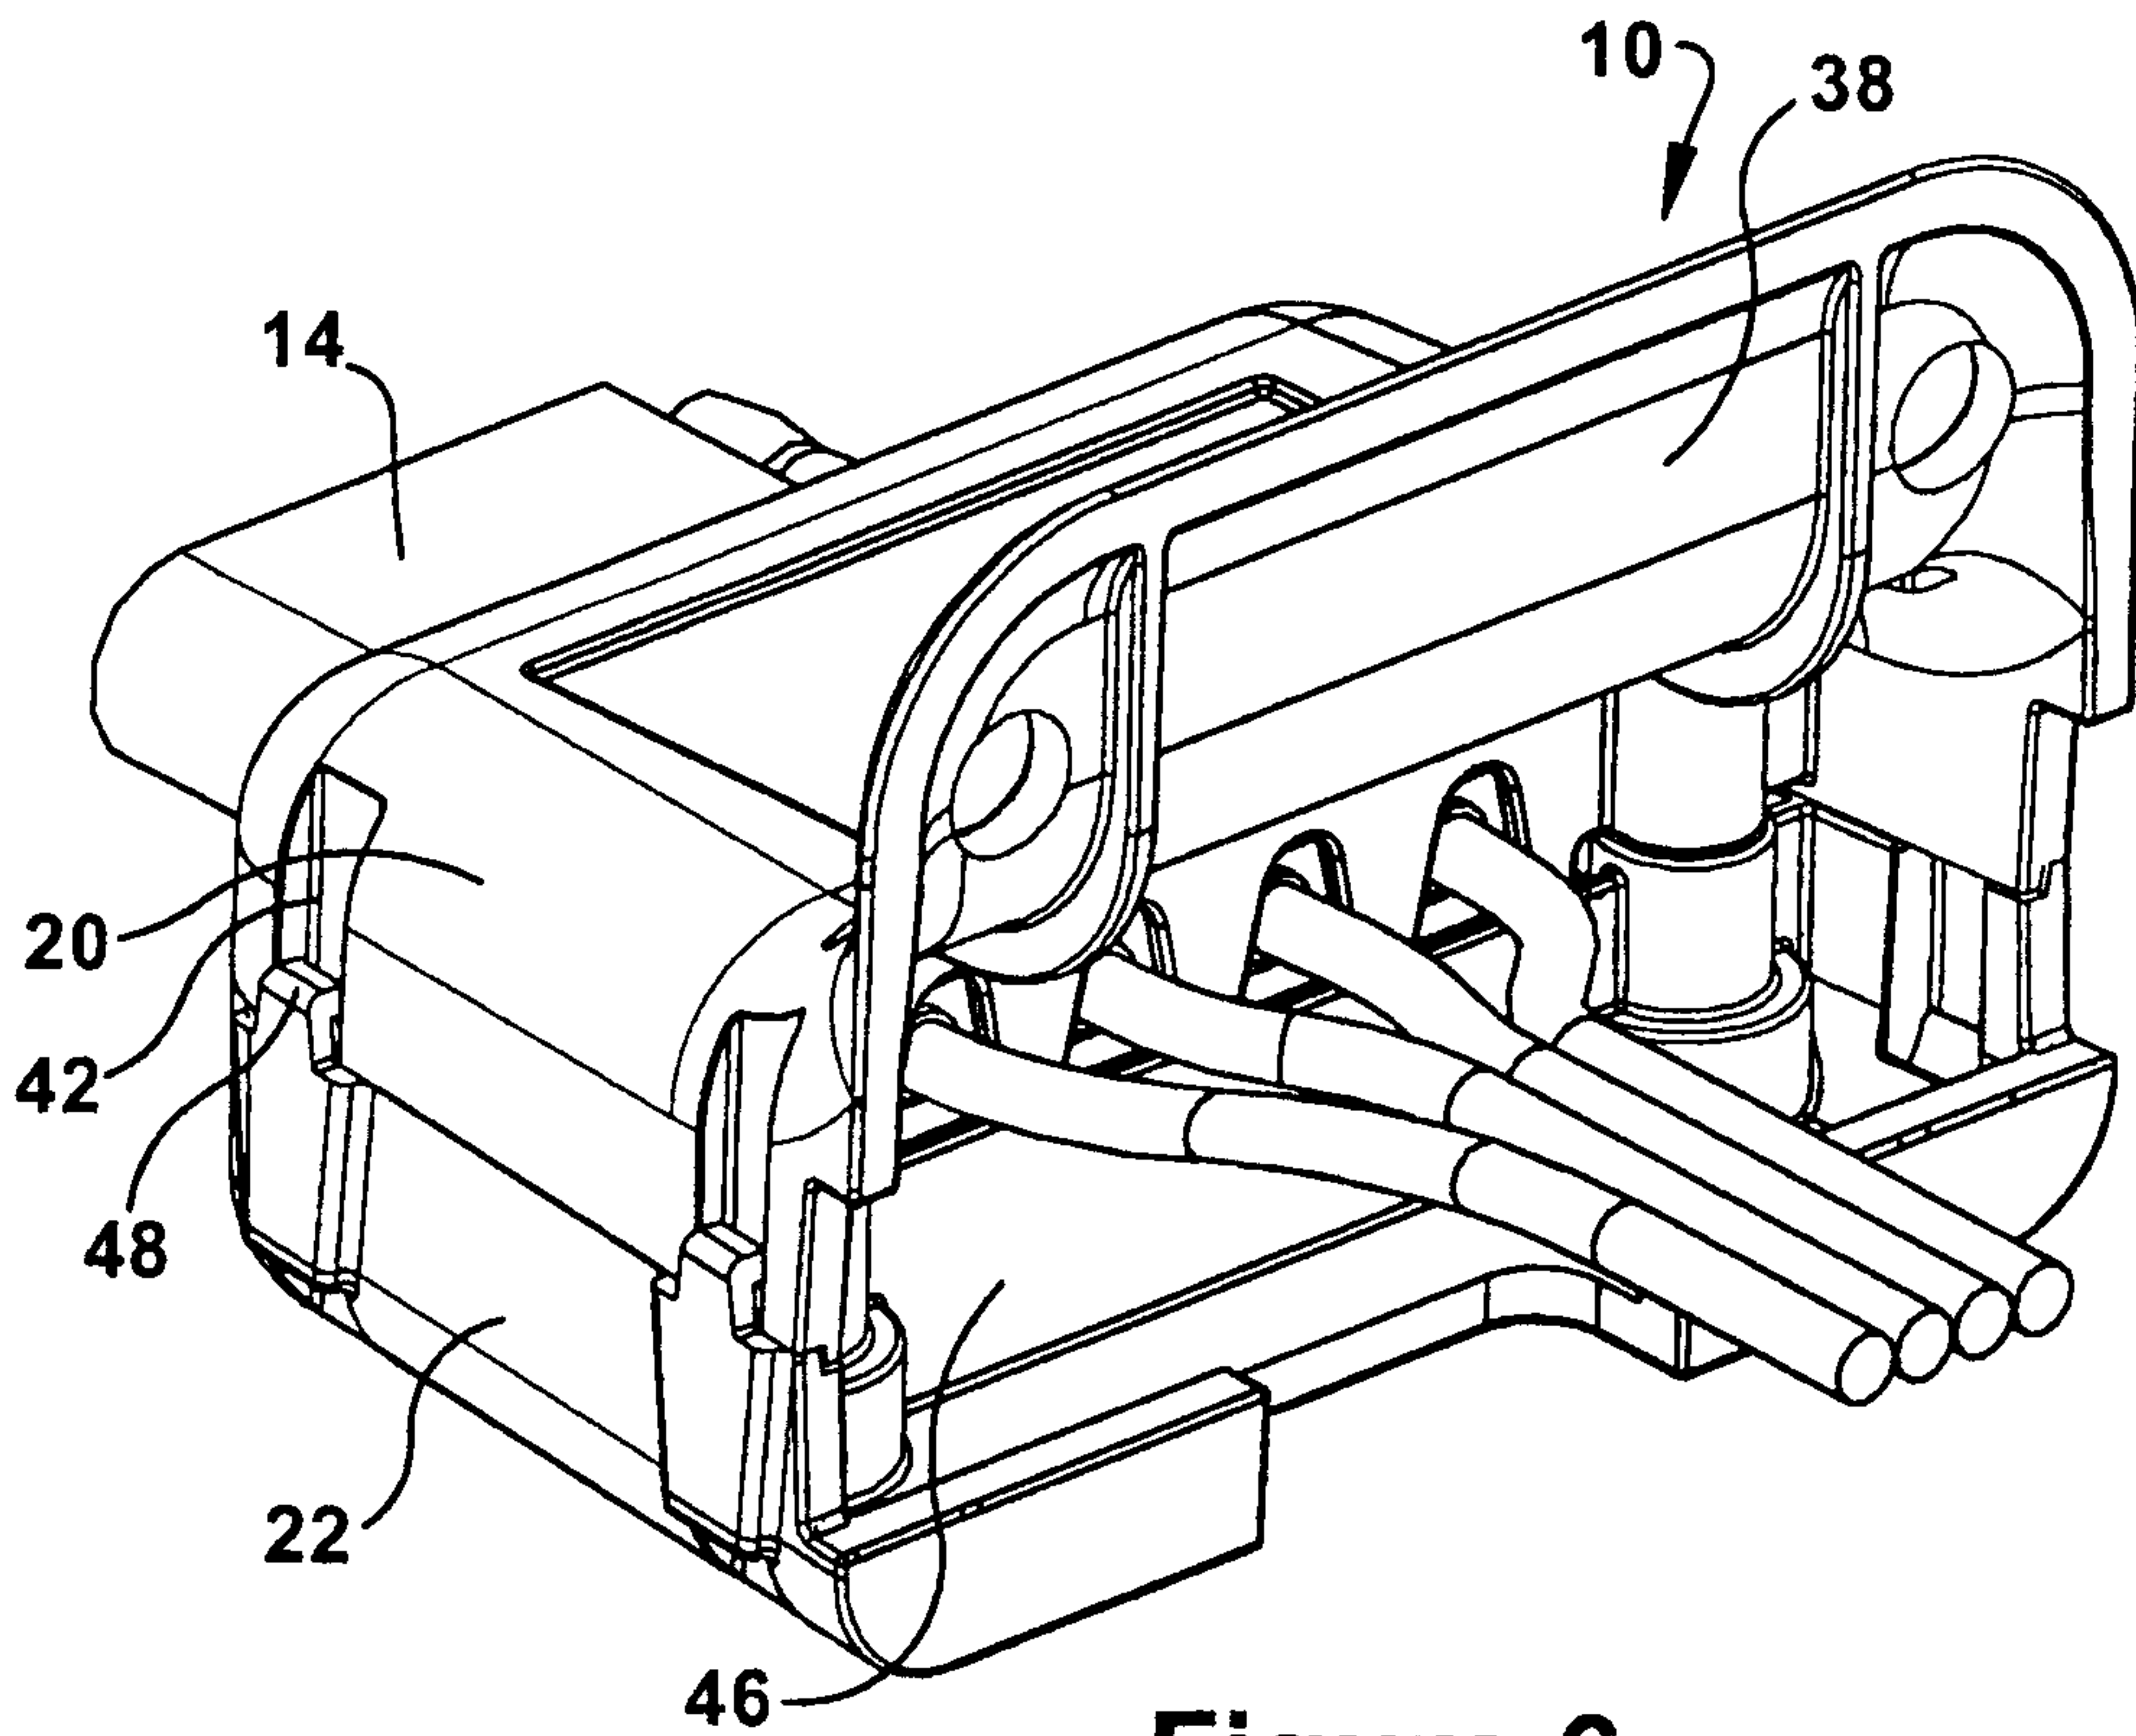


Figure 6

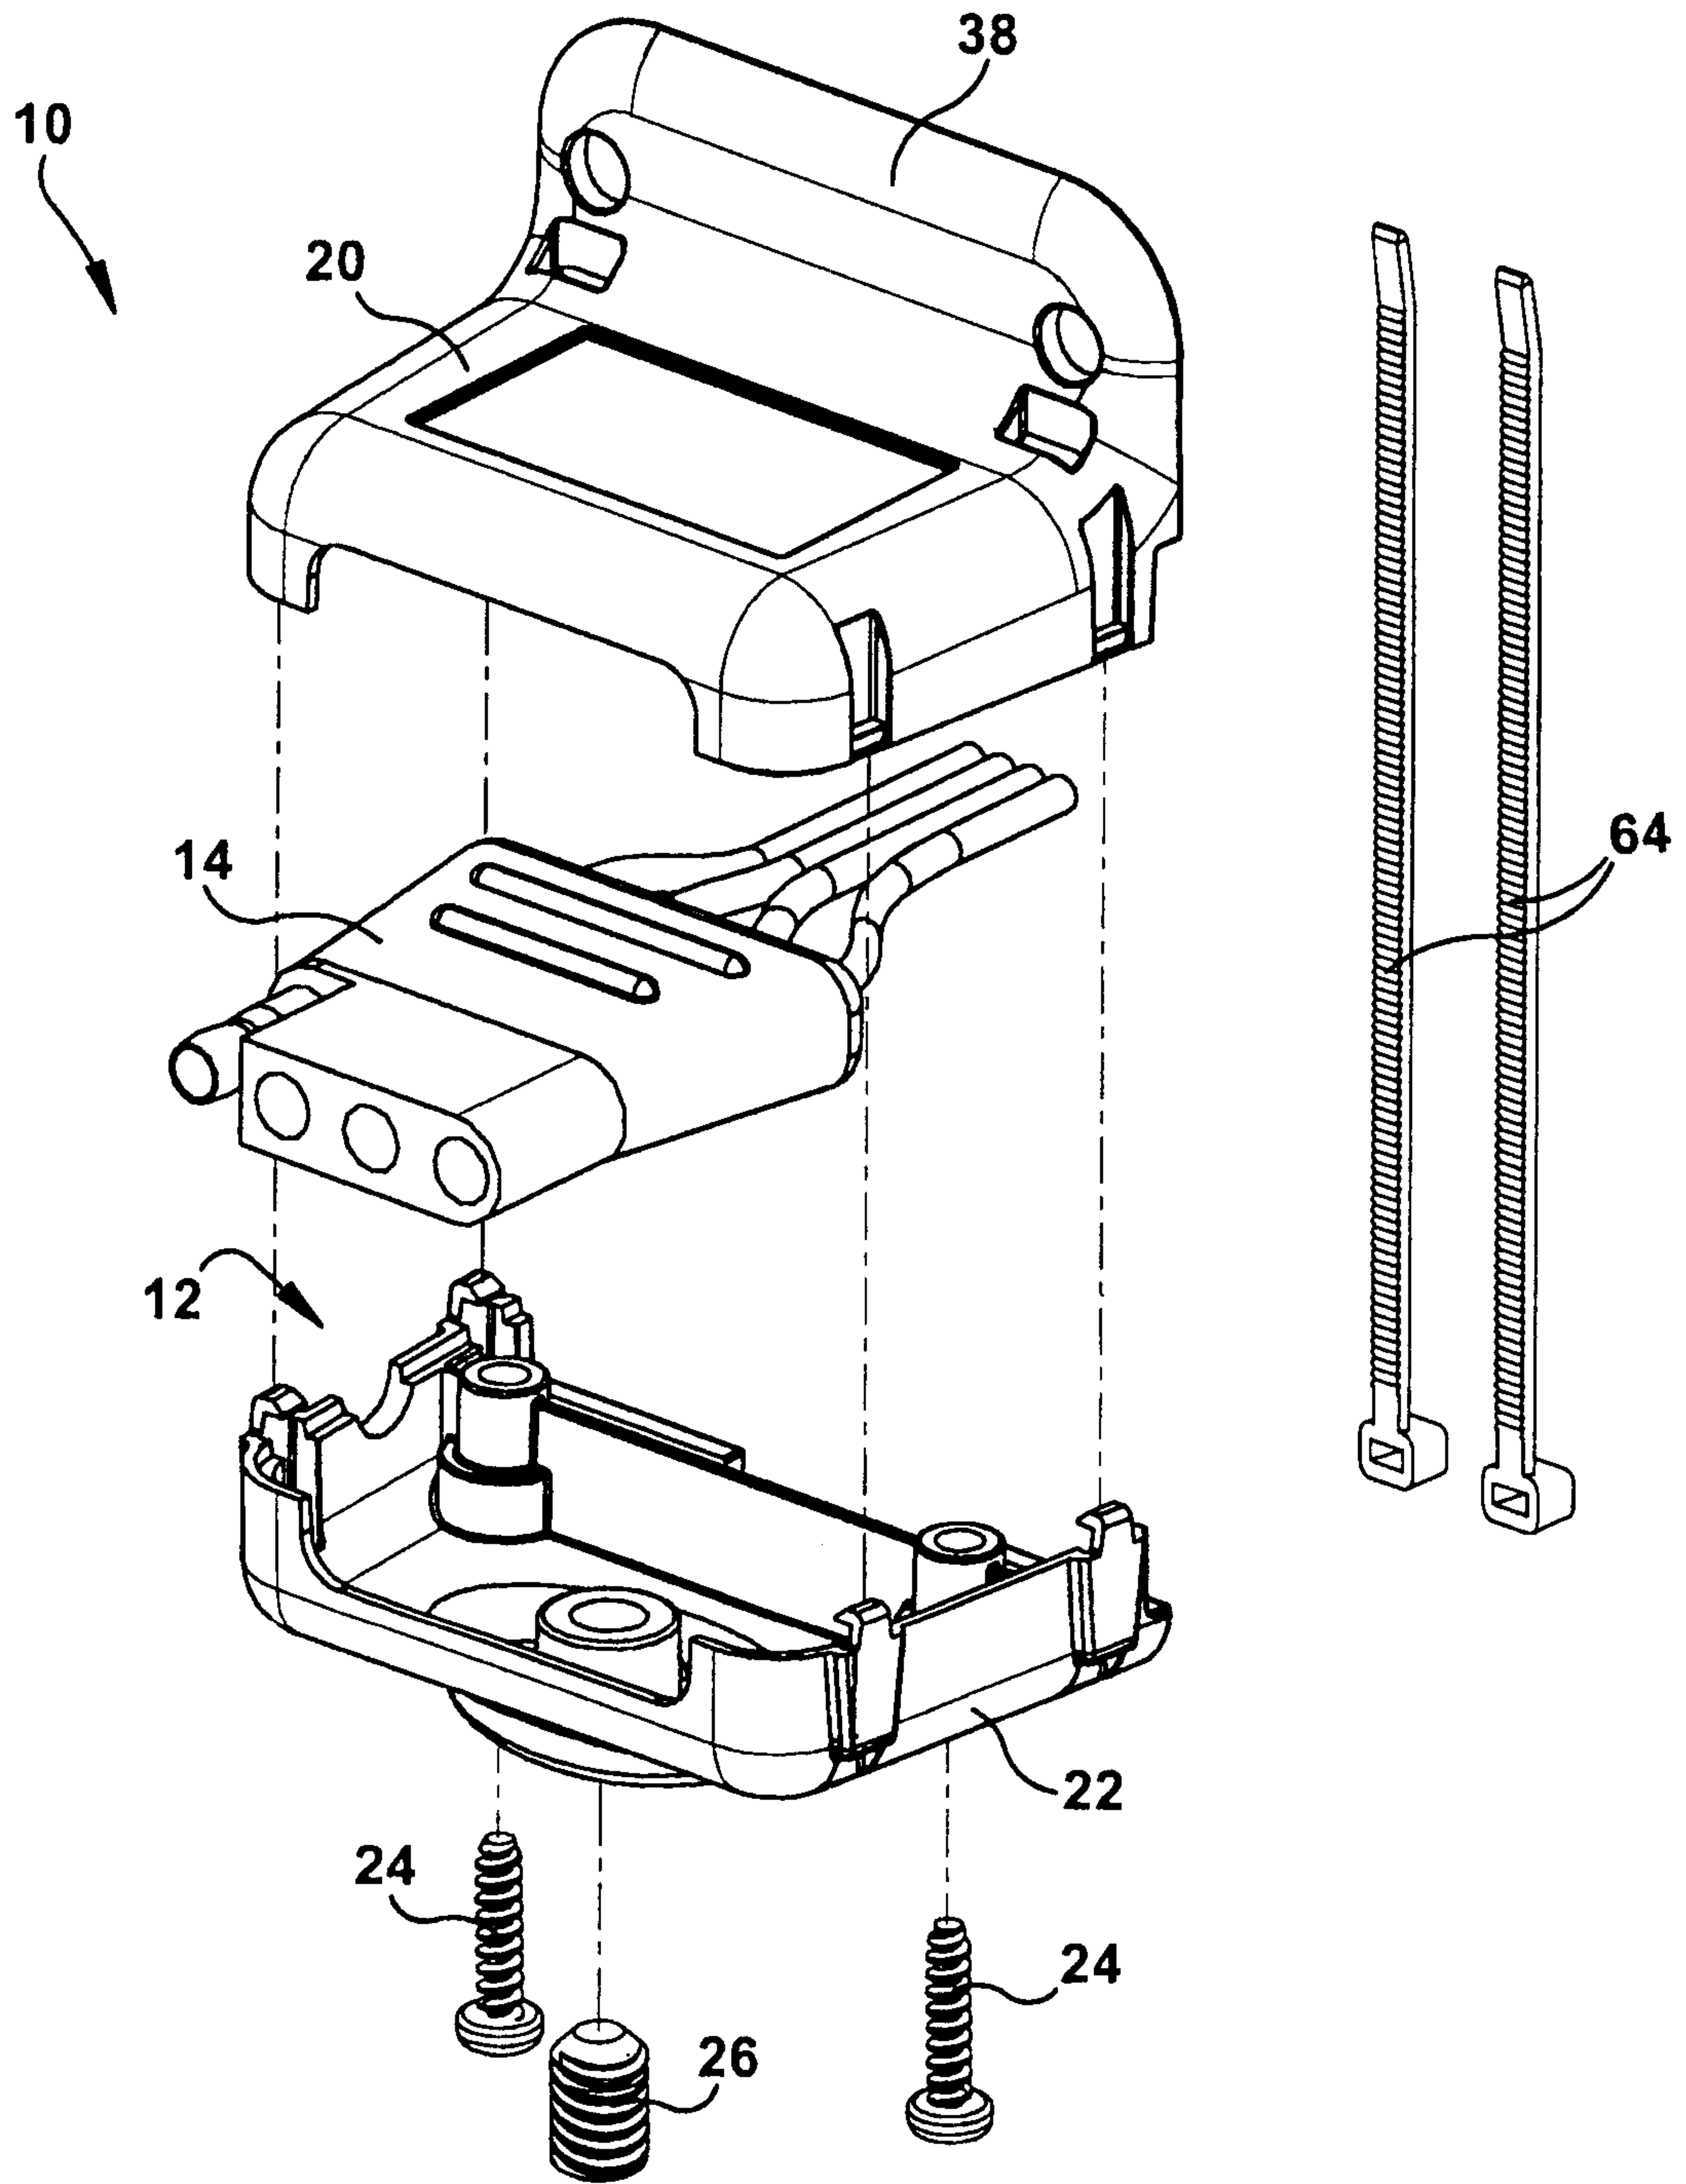


Figure 7

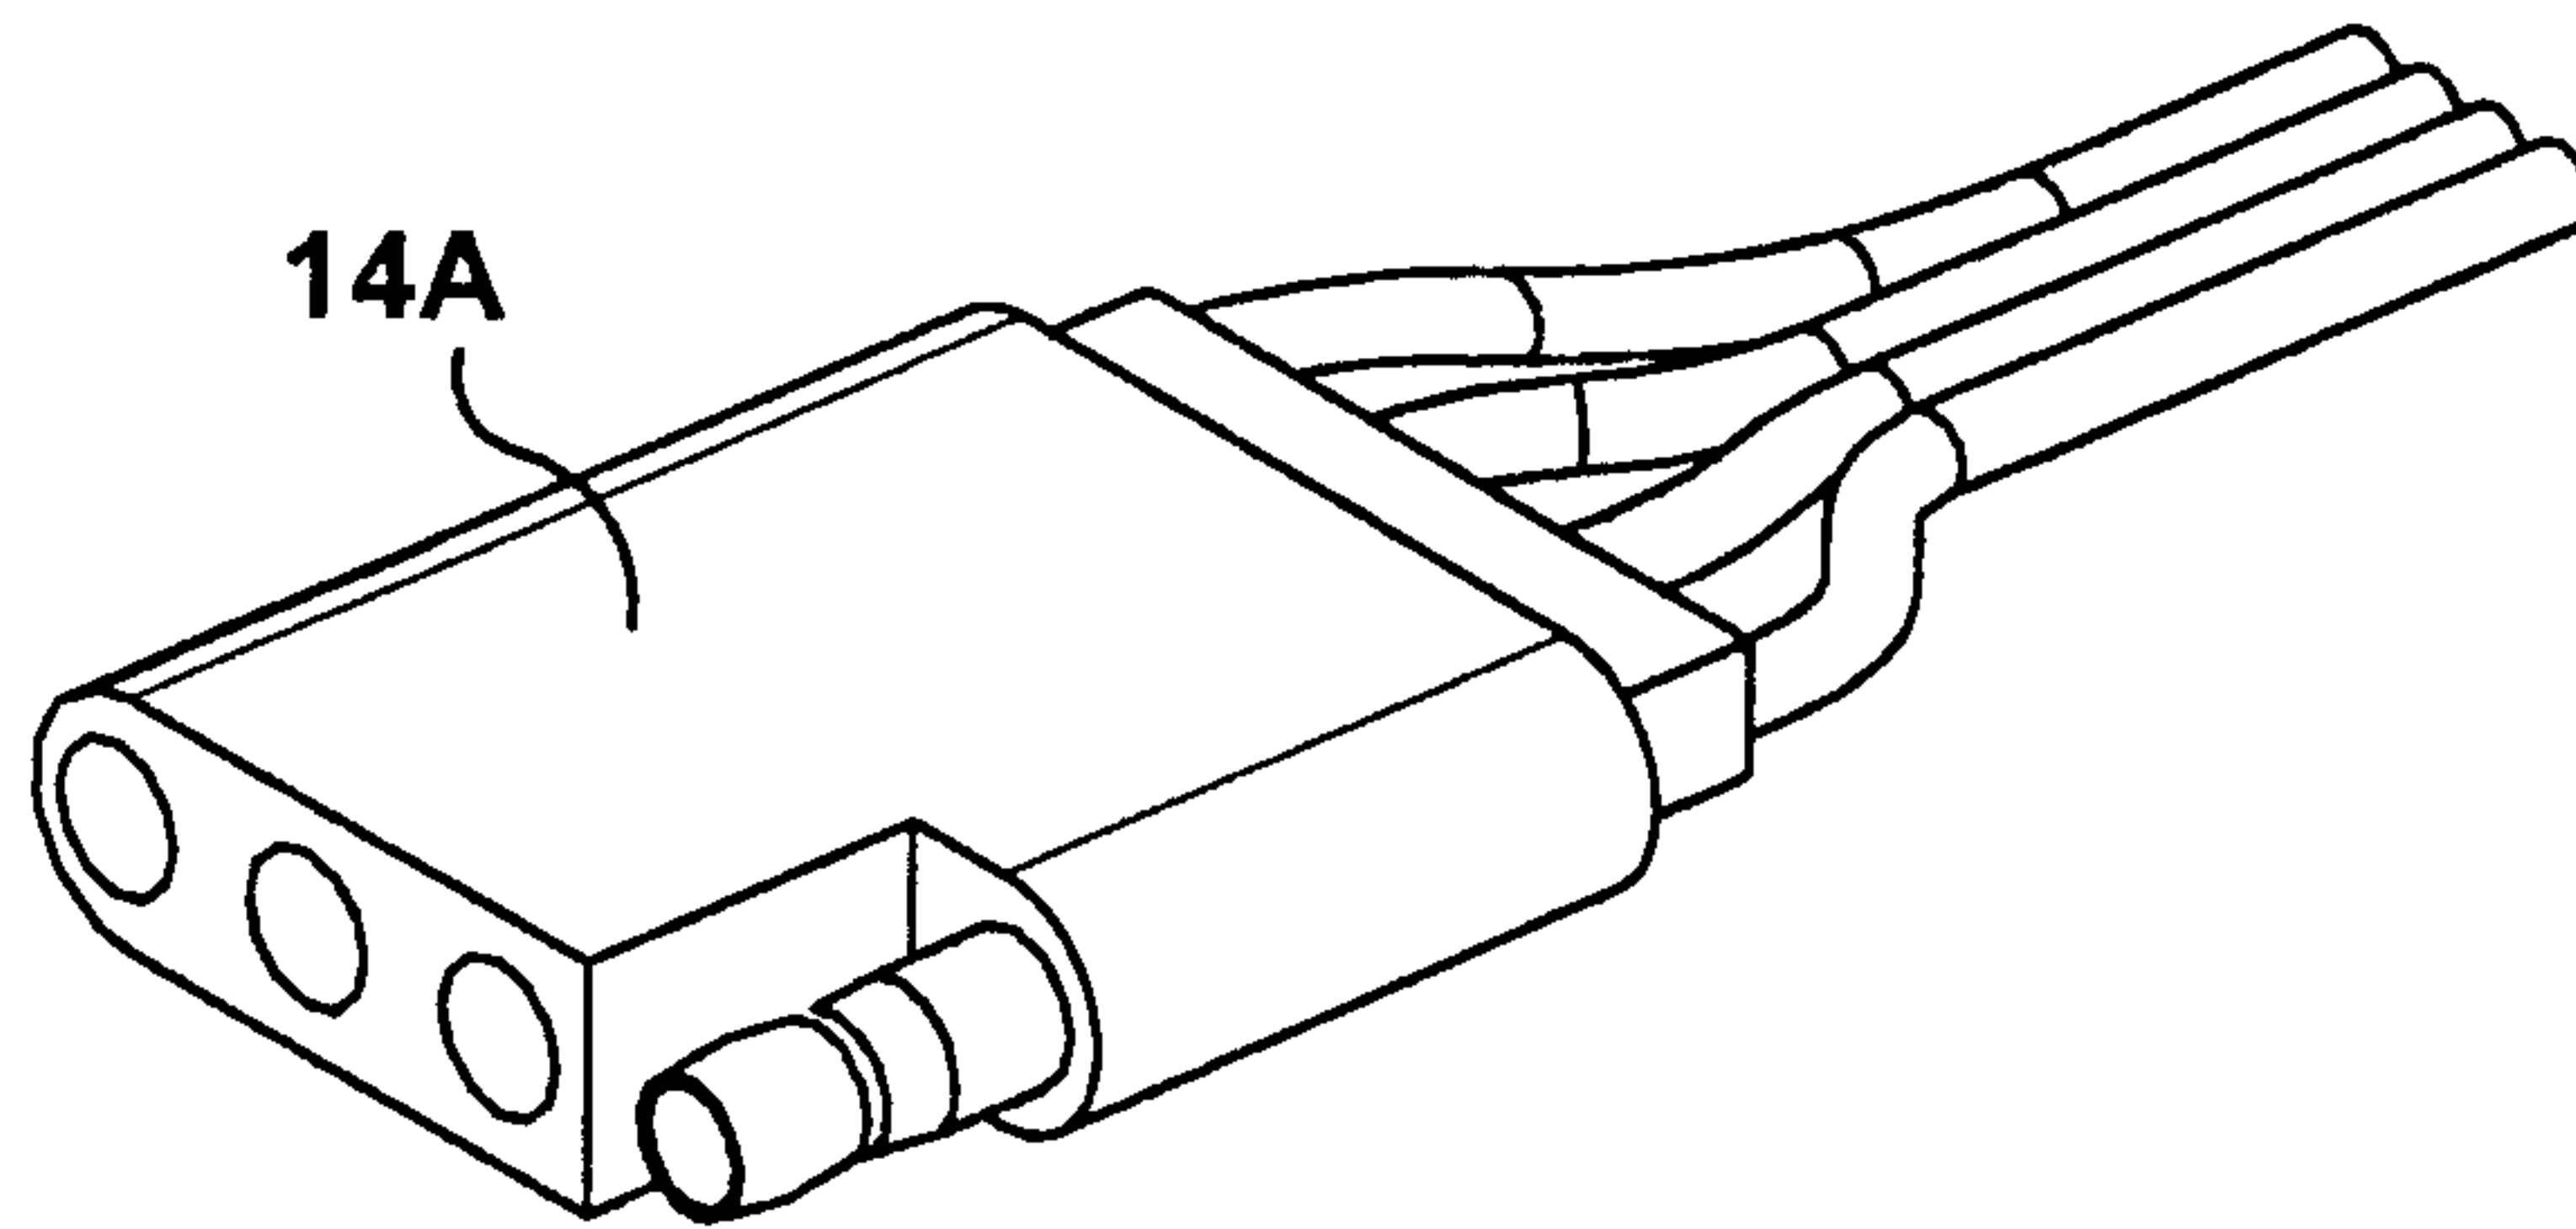


Figure 8A

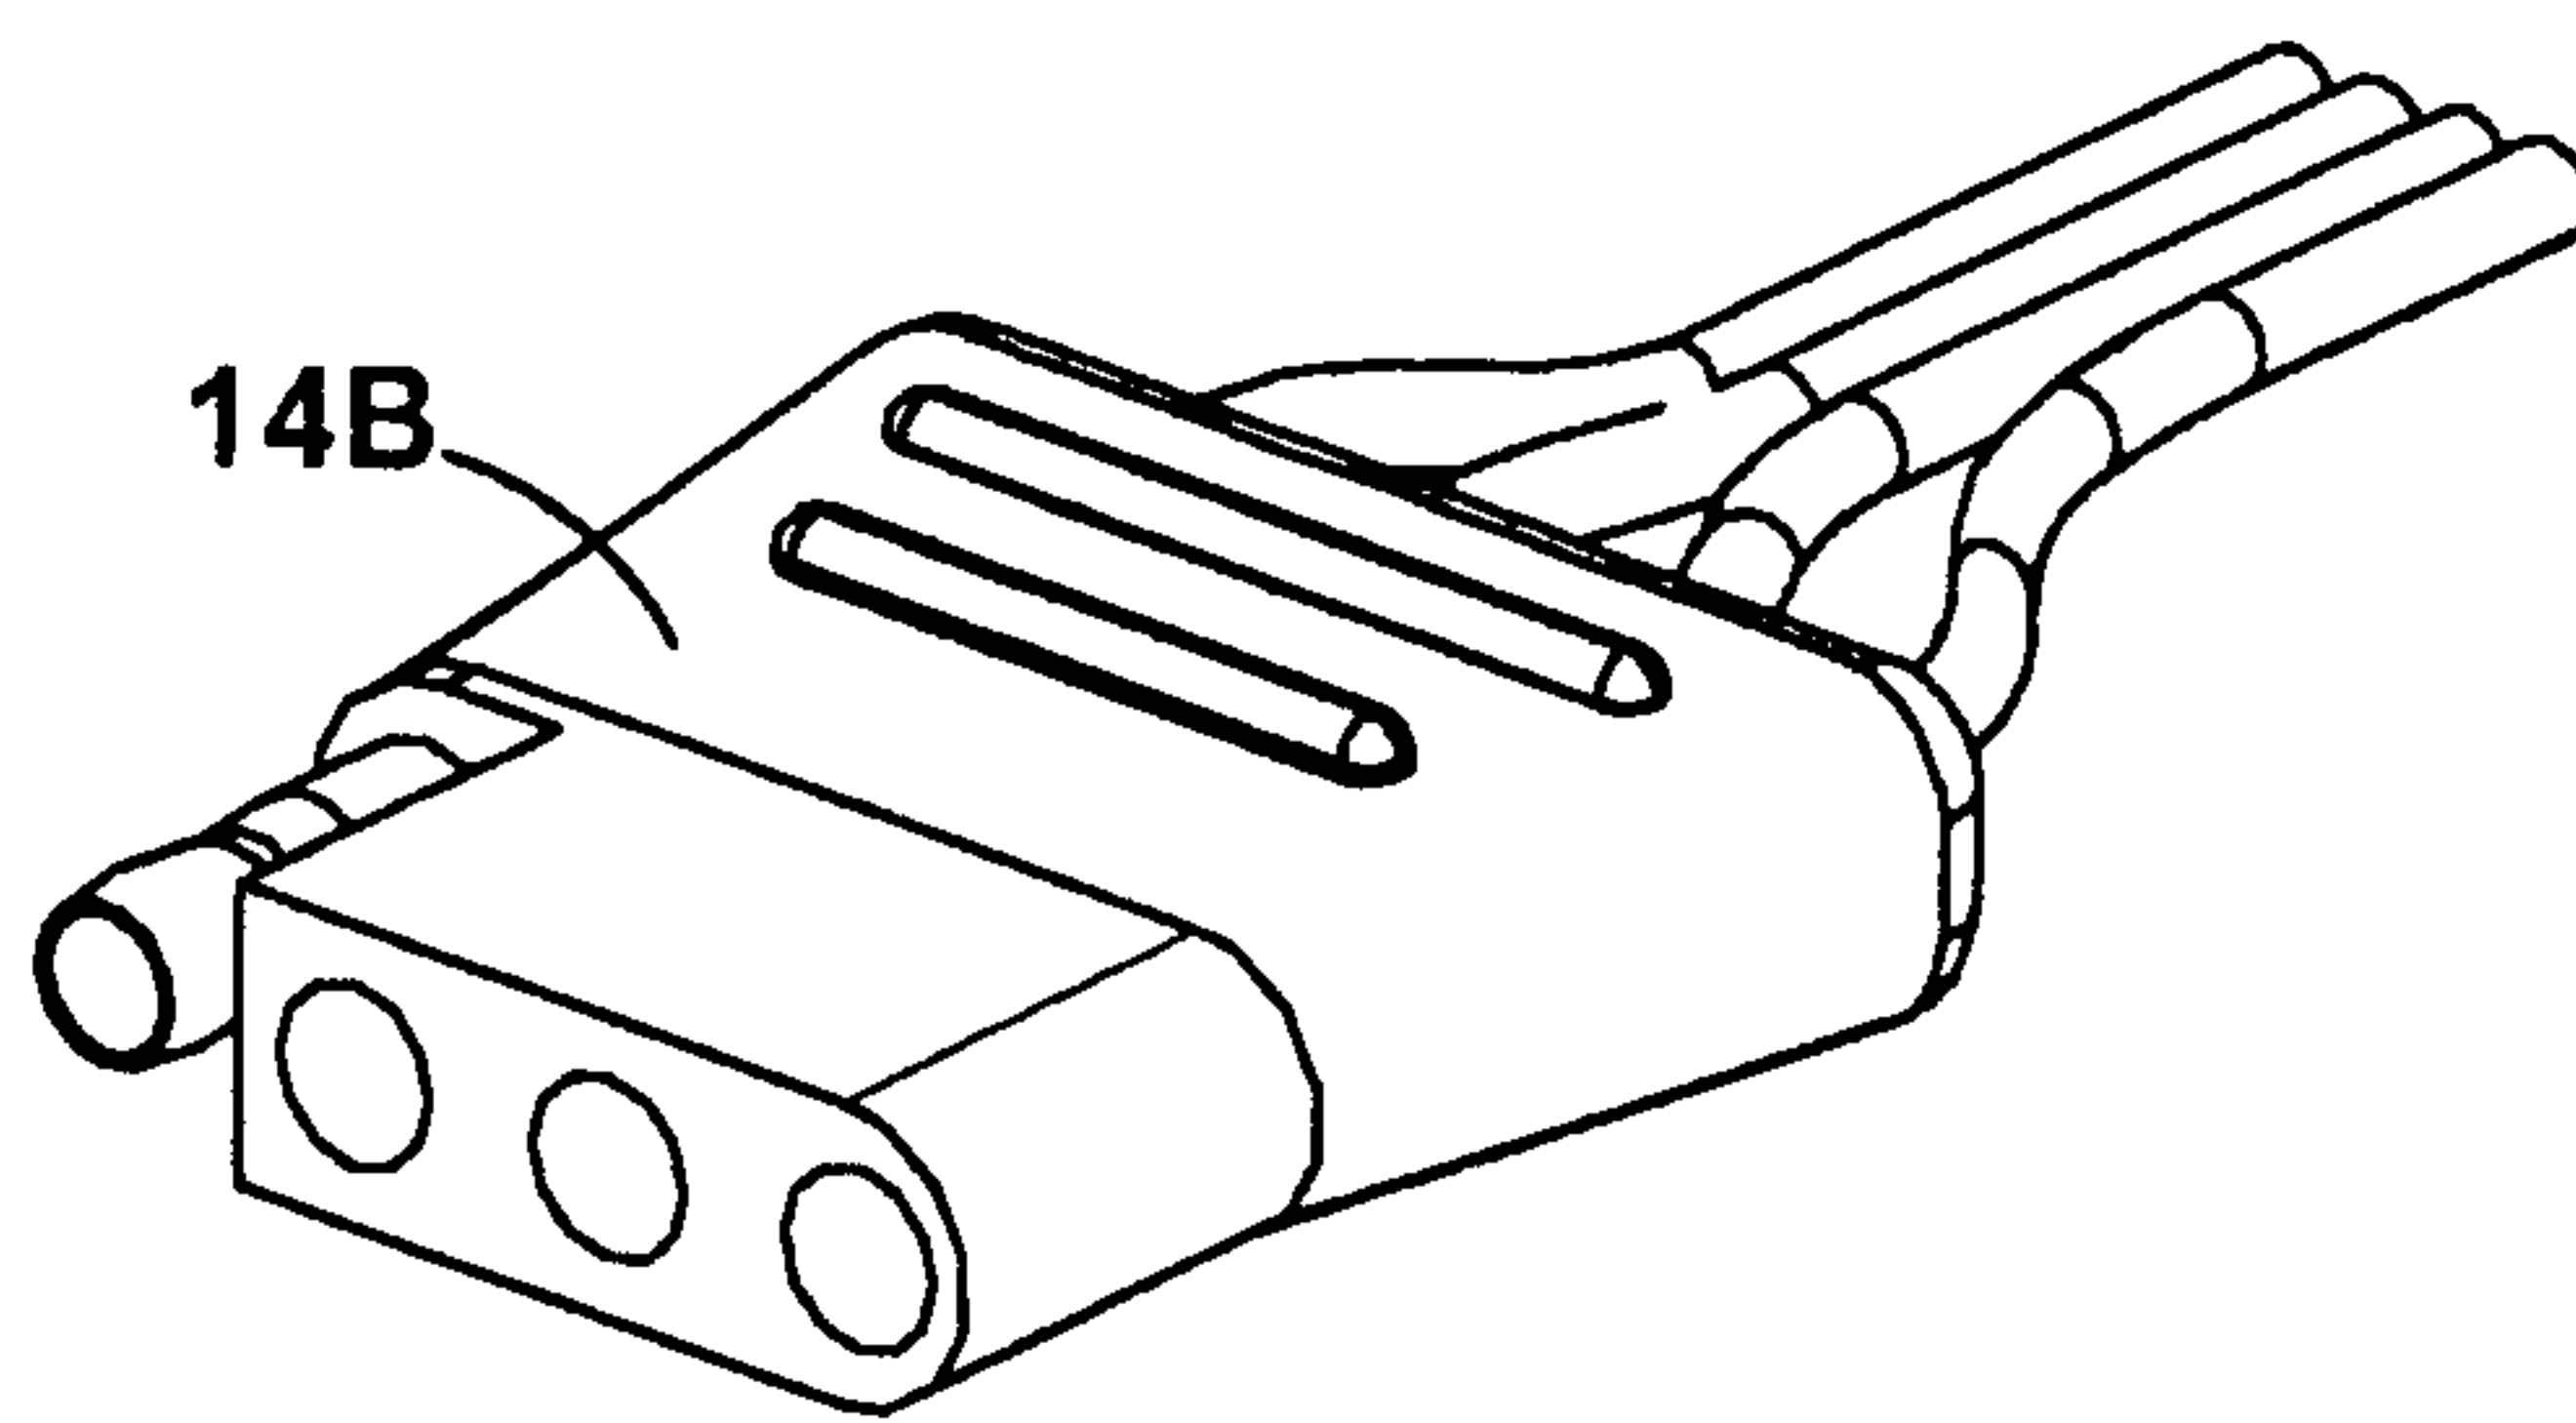


Figure 8B

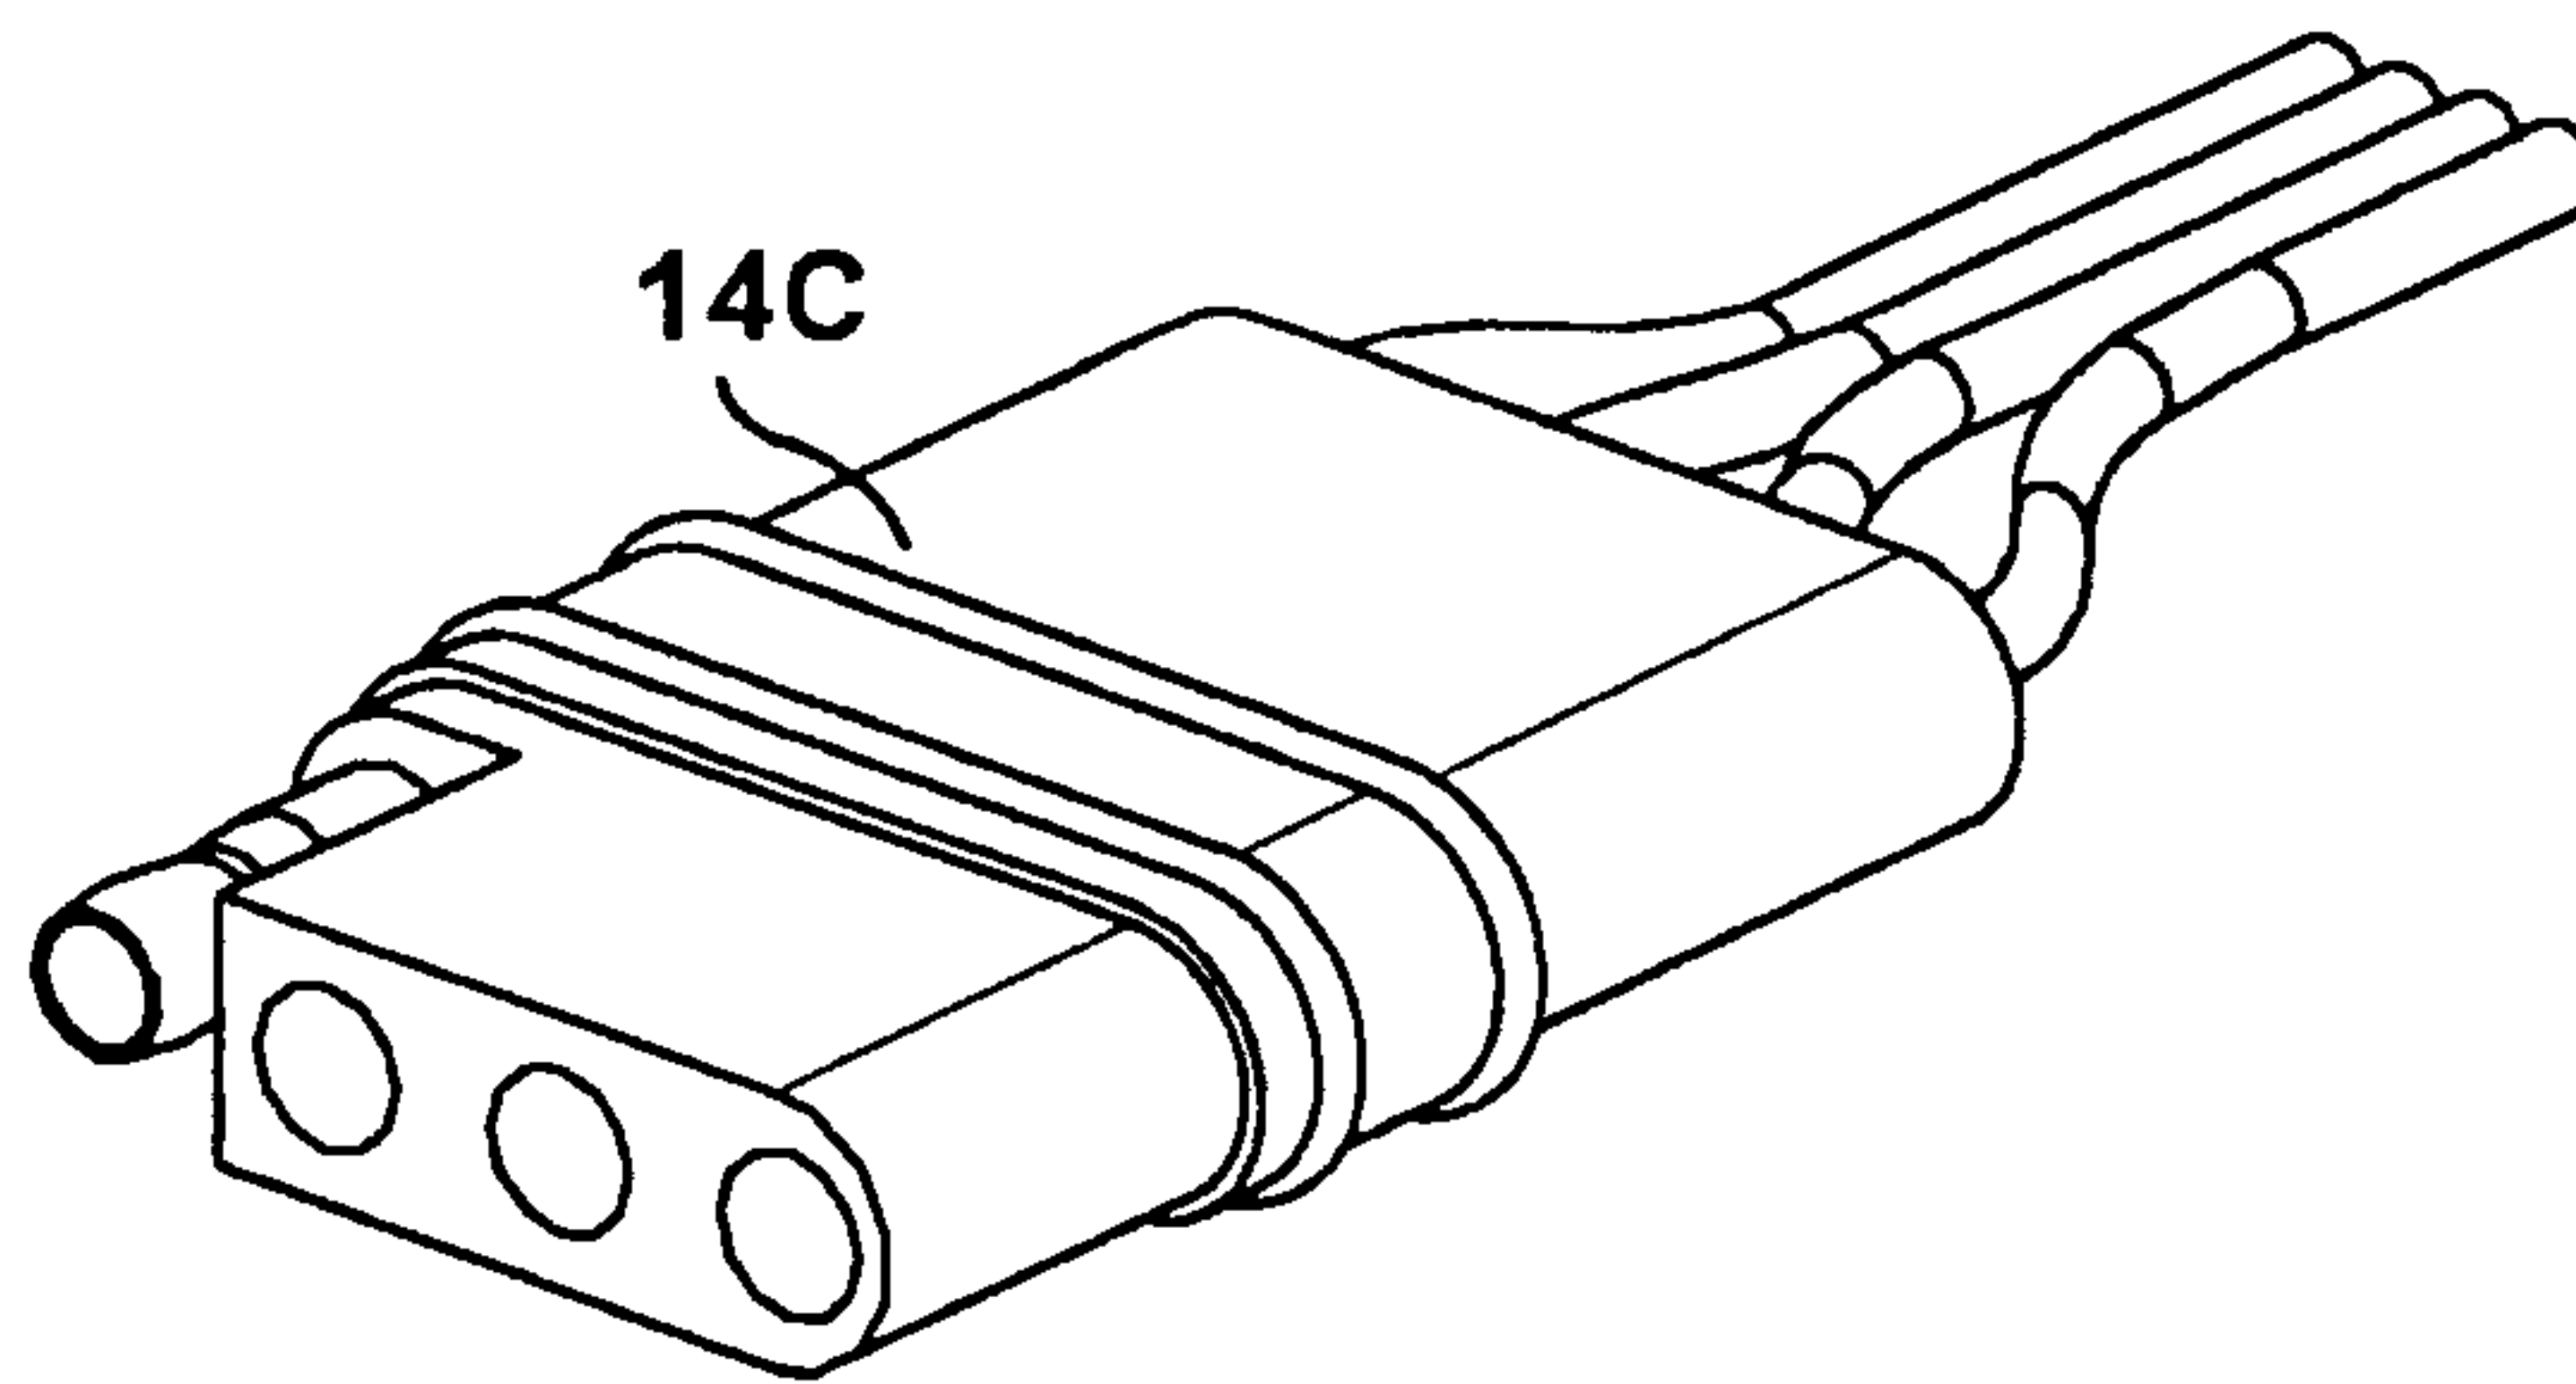


Figure 8C

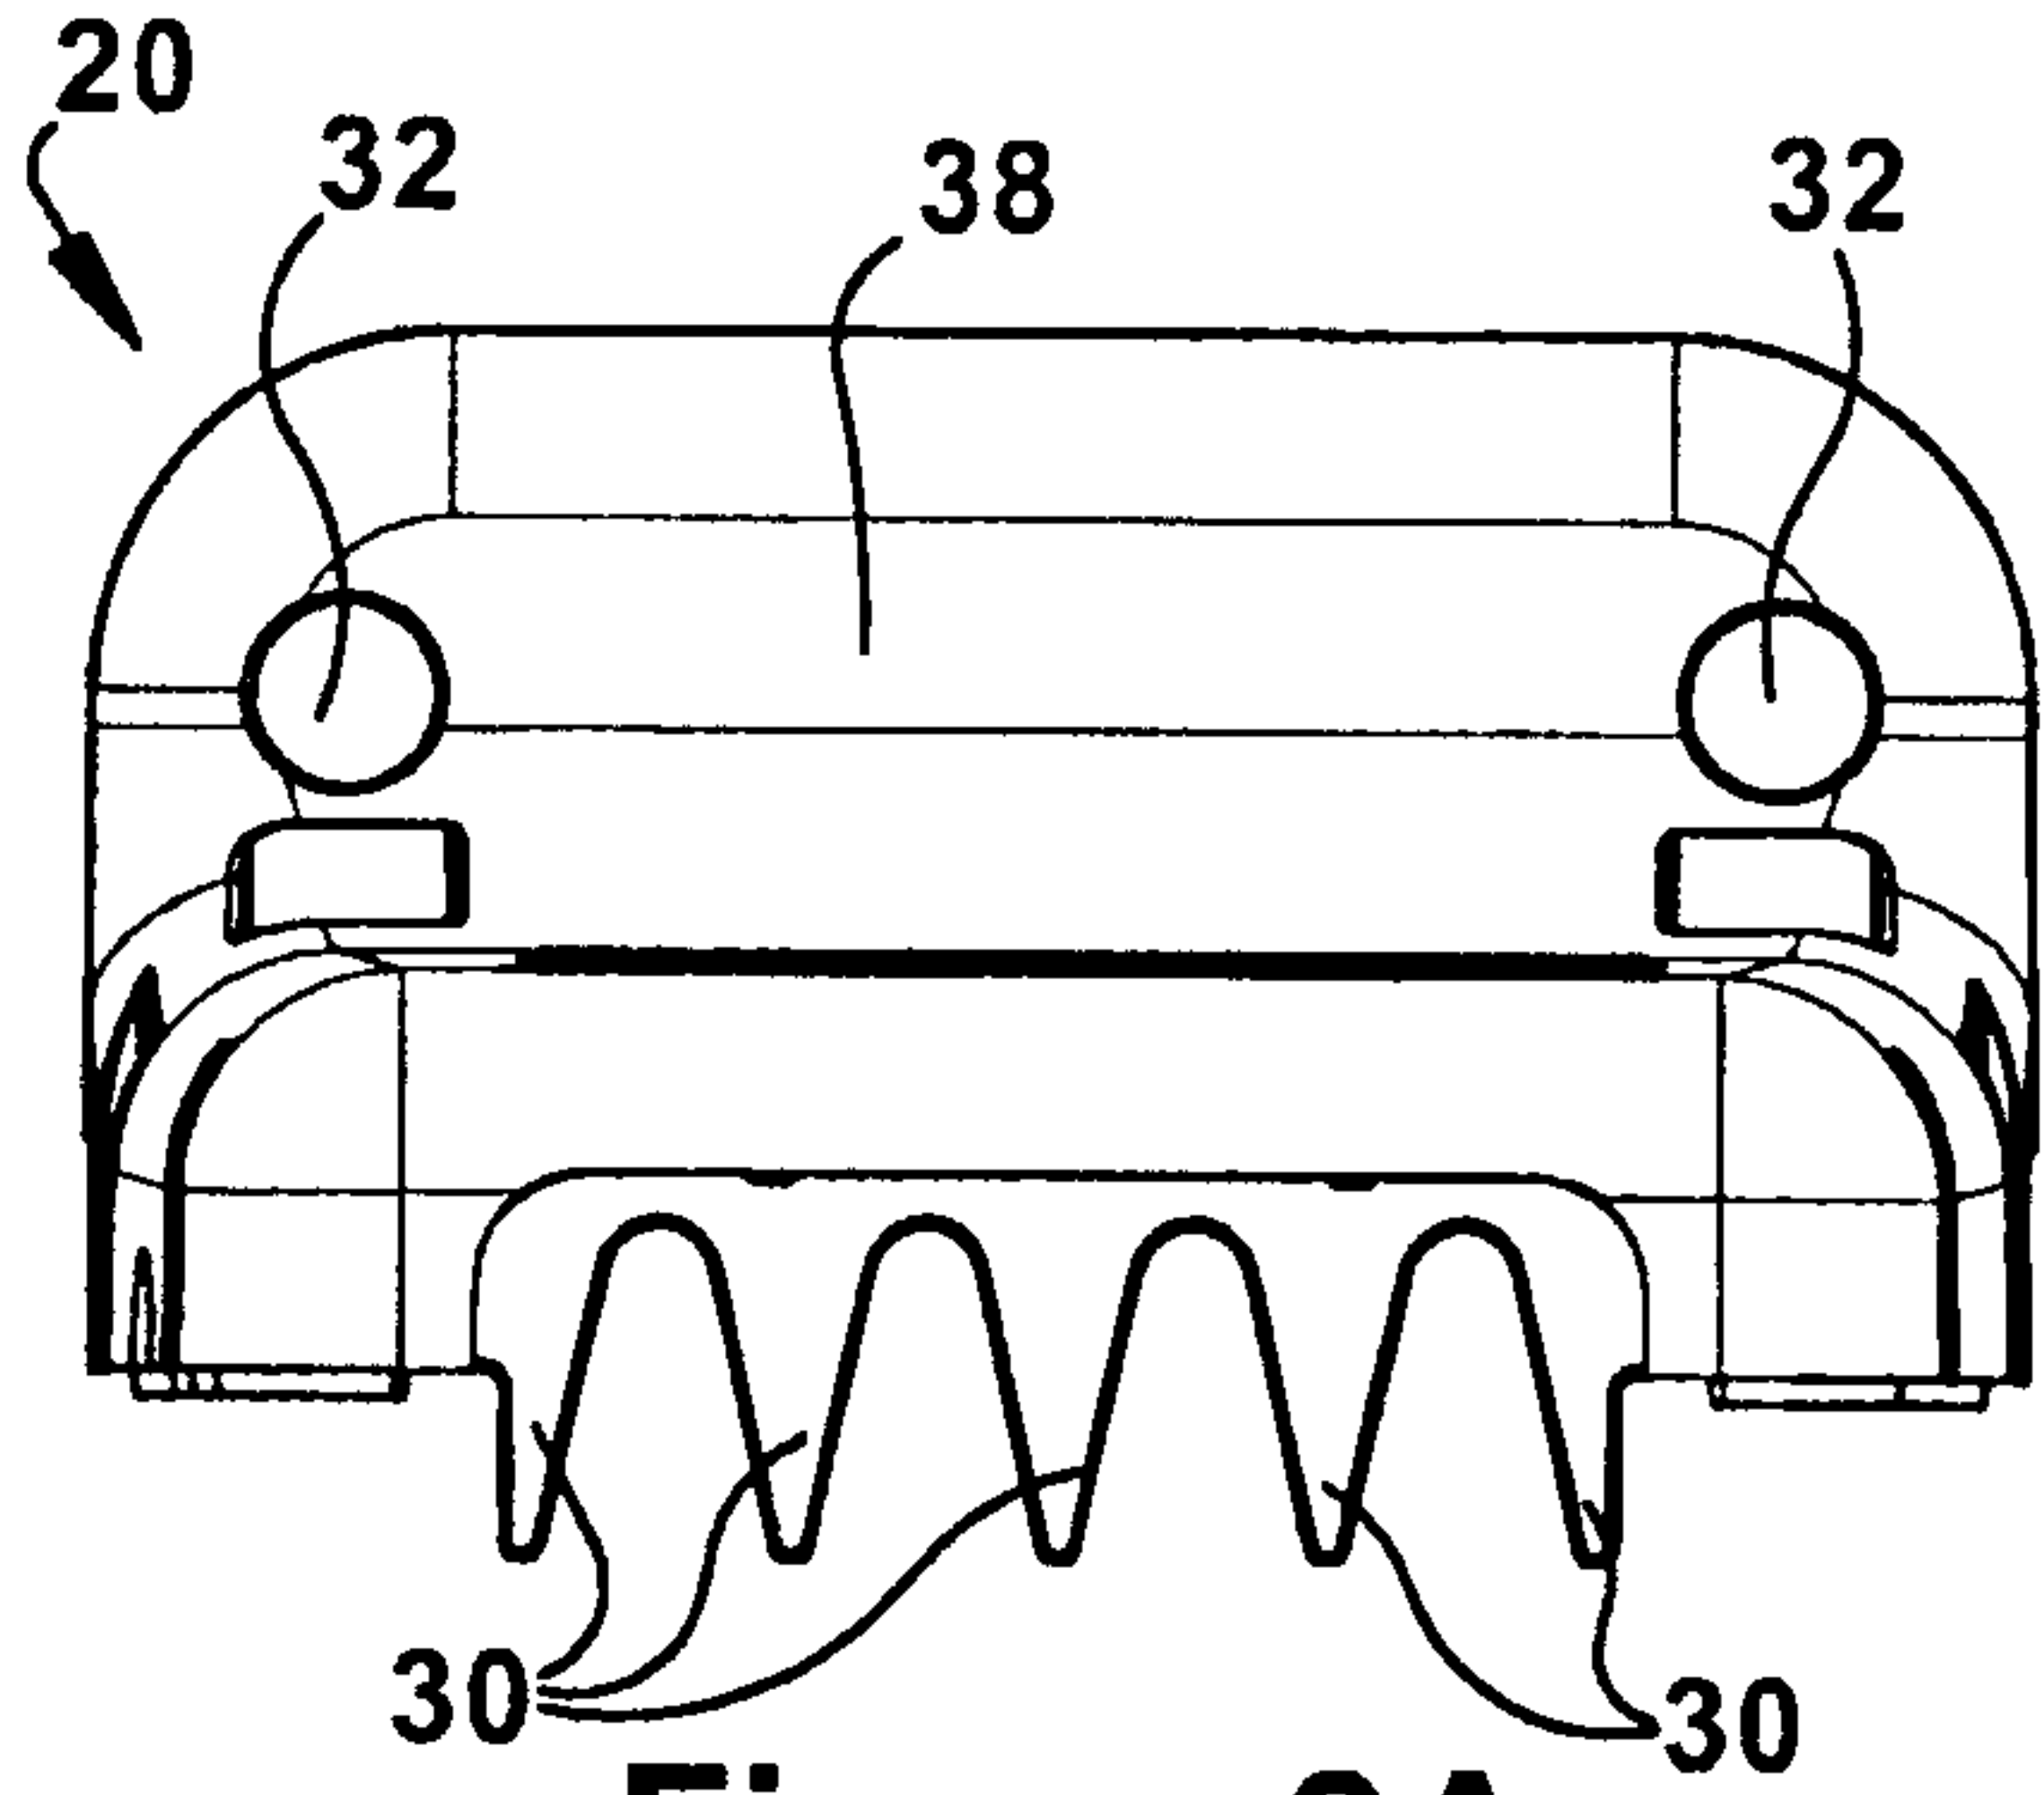


Figure 9A

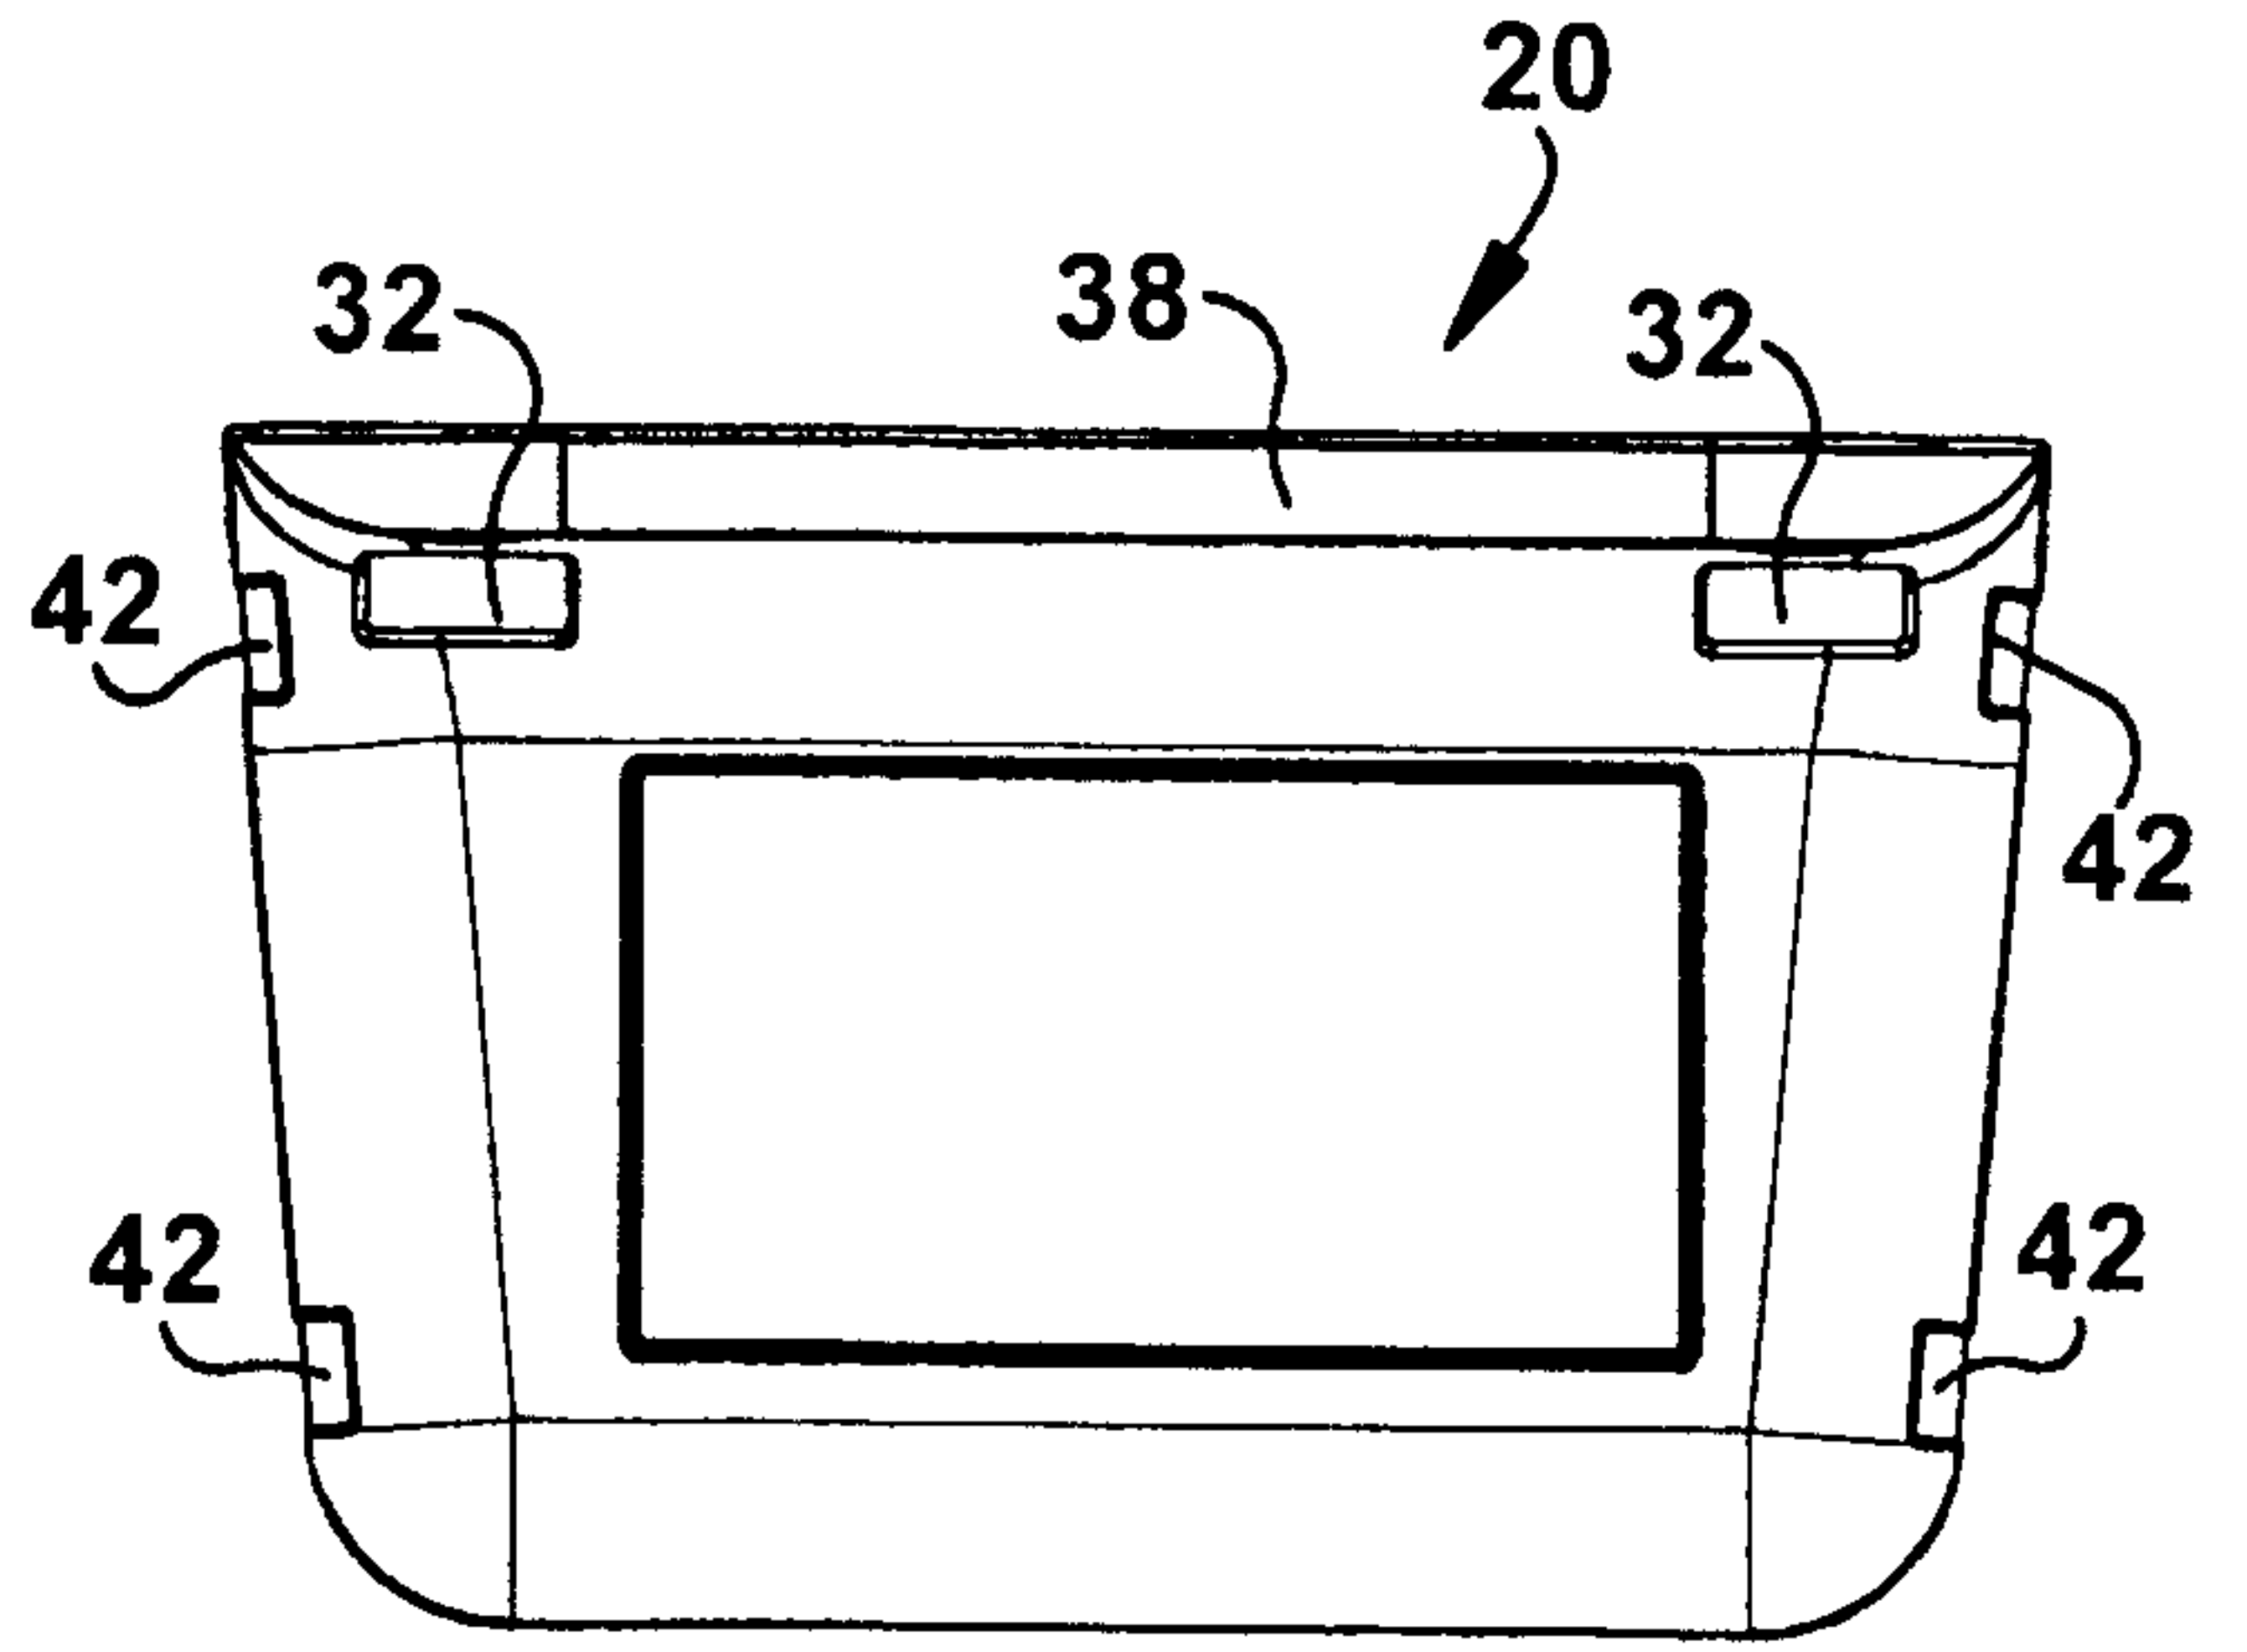


Figure 9B

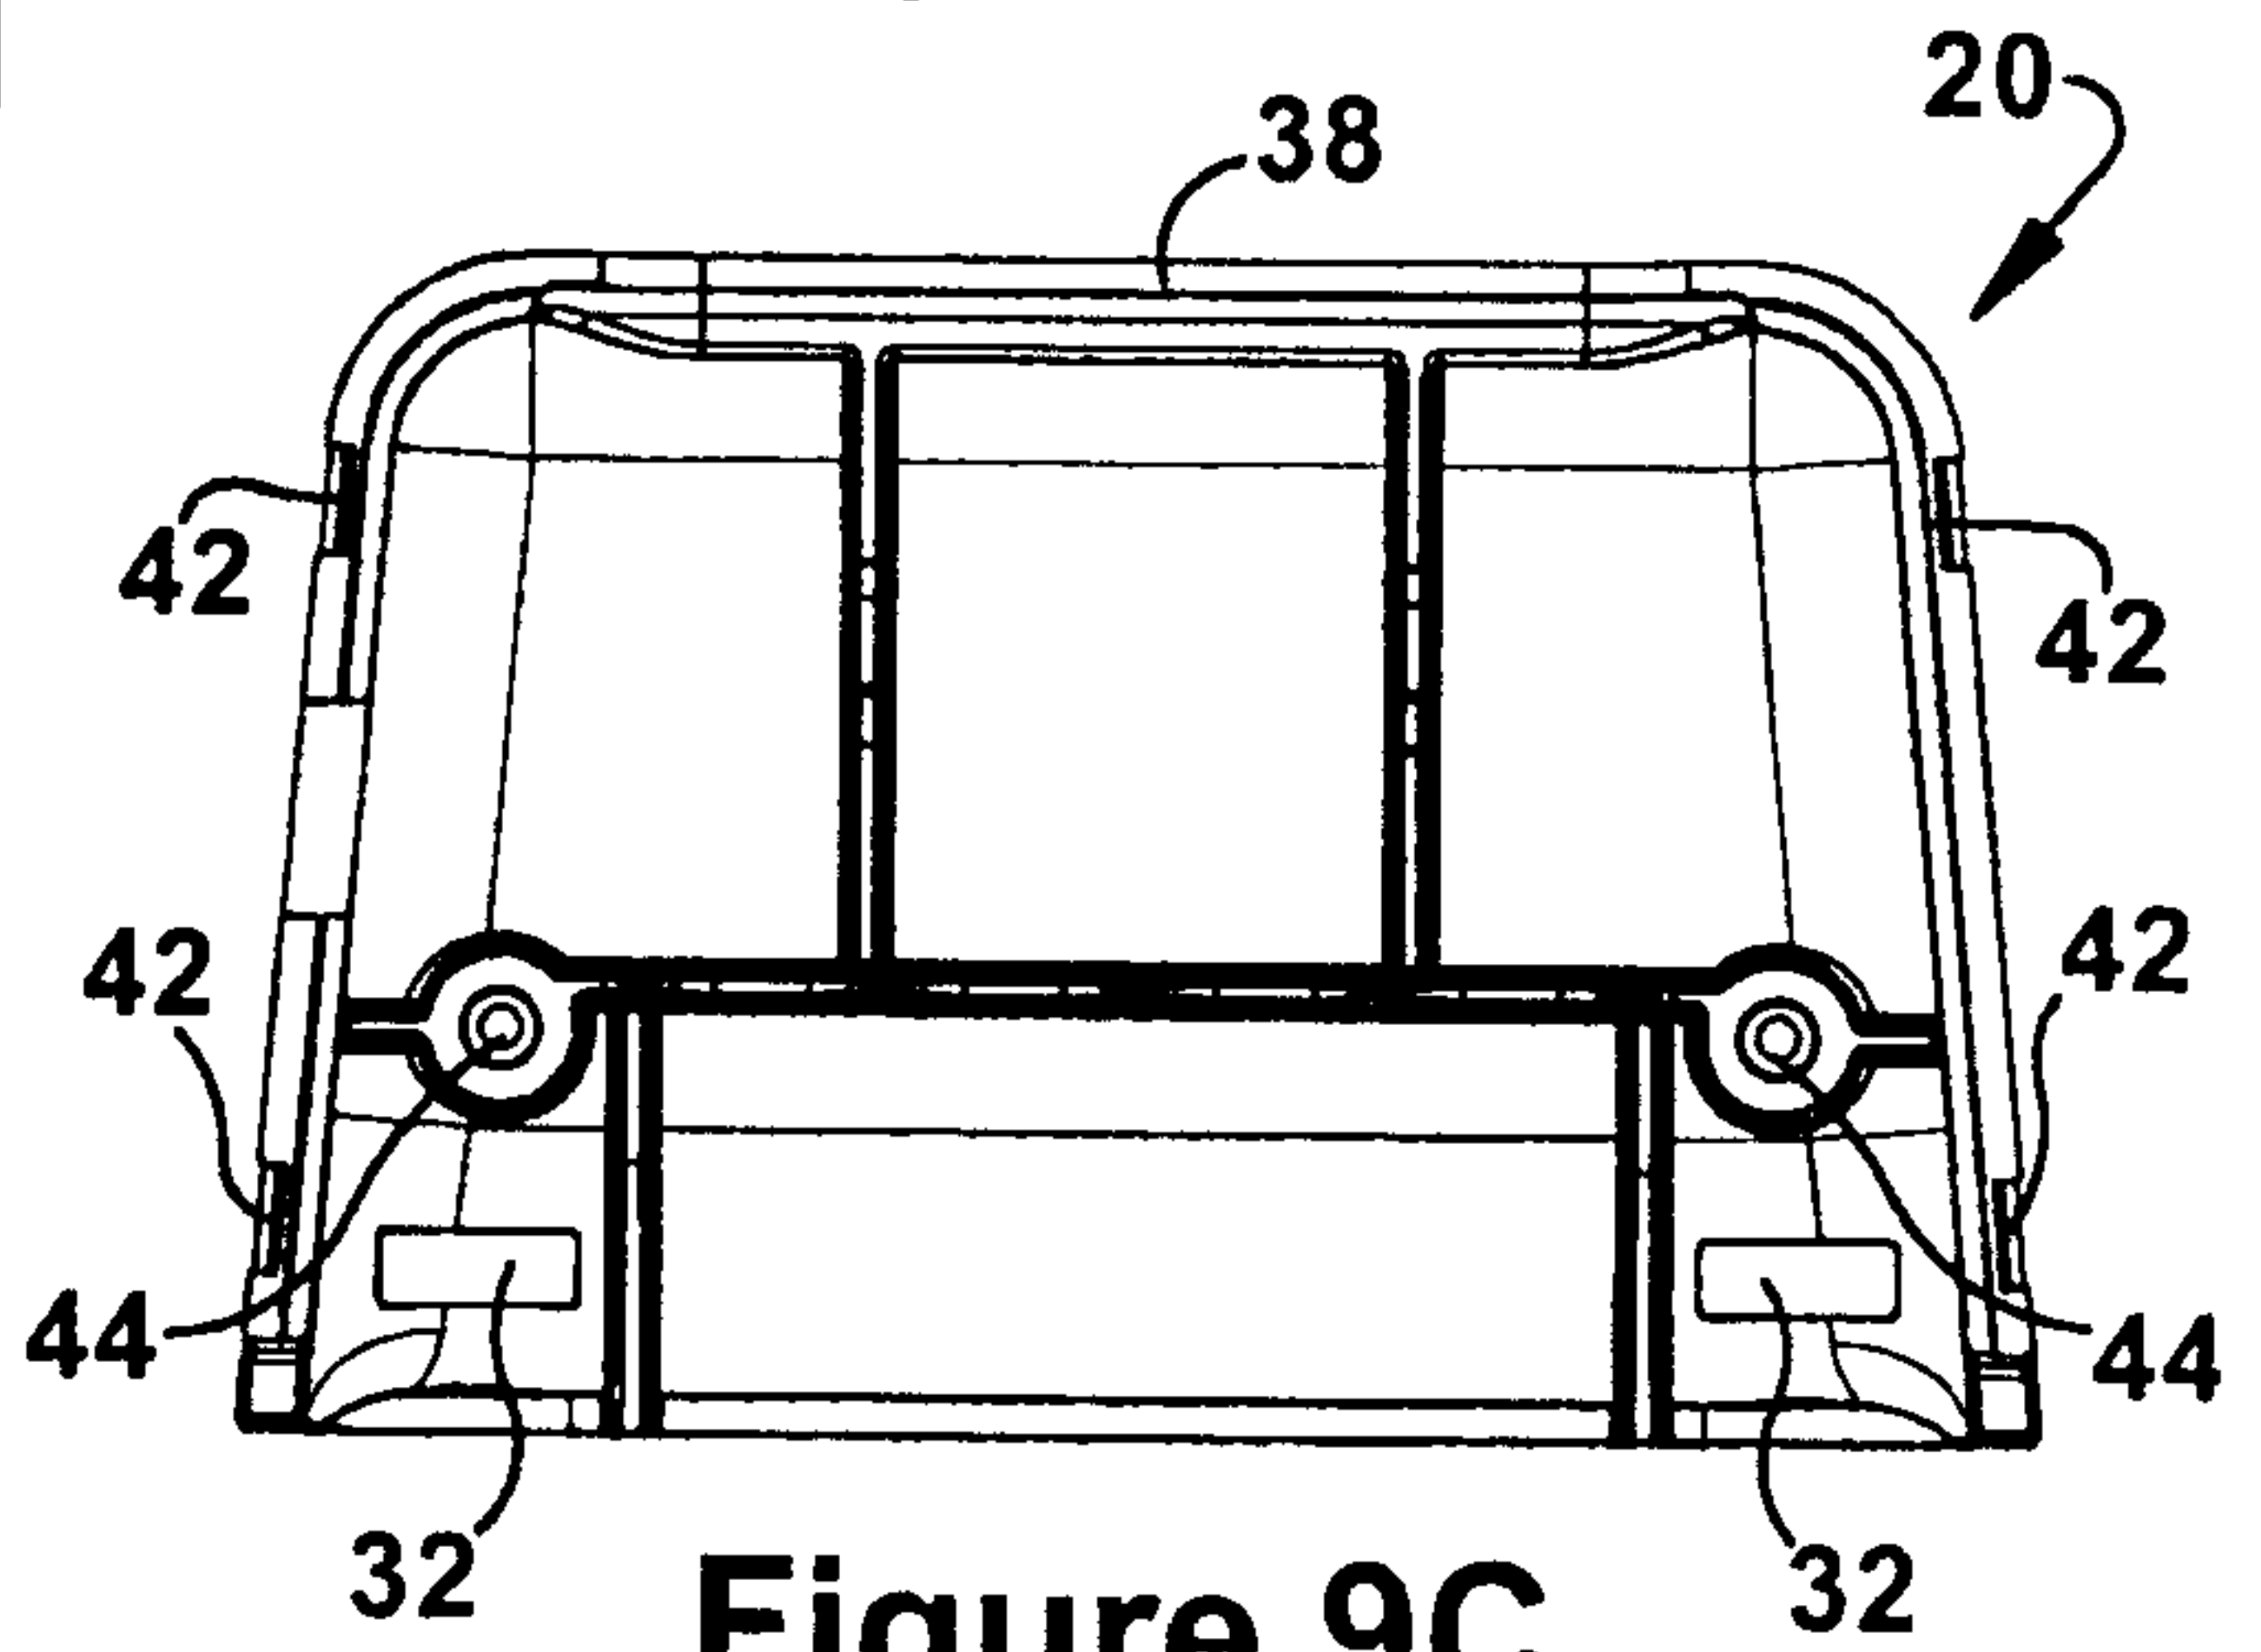


Figure 9C

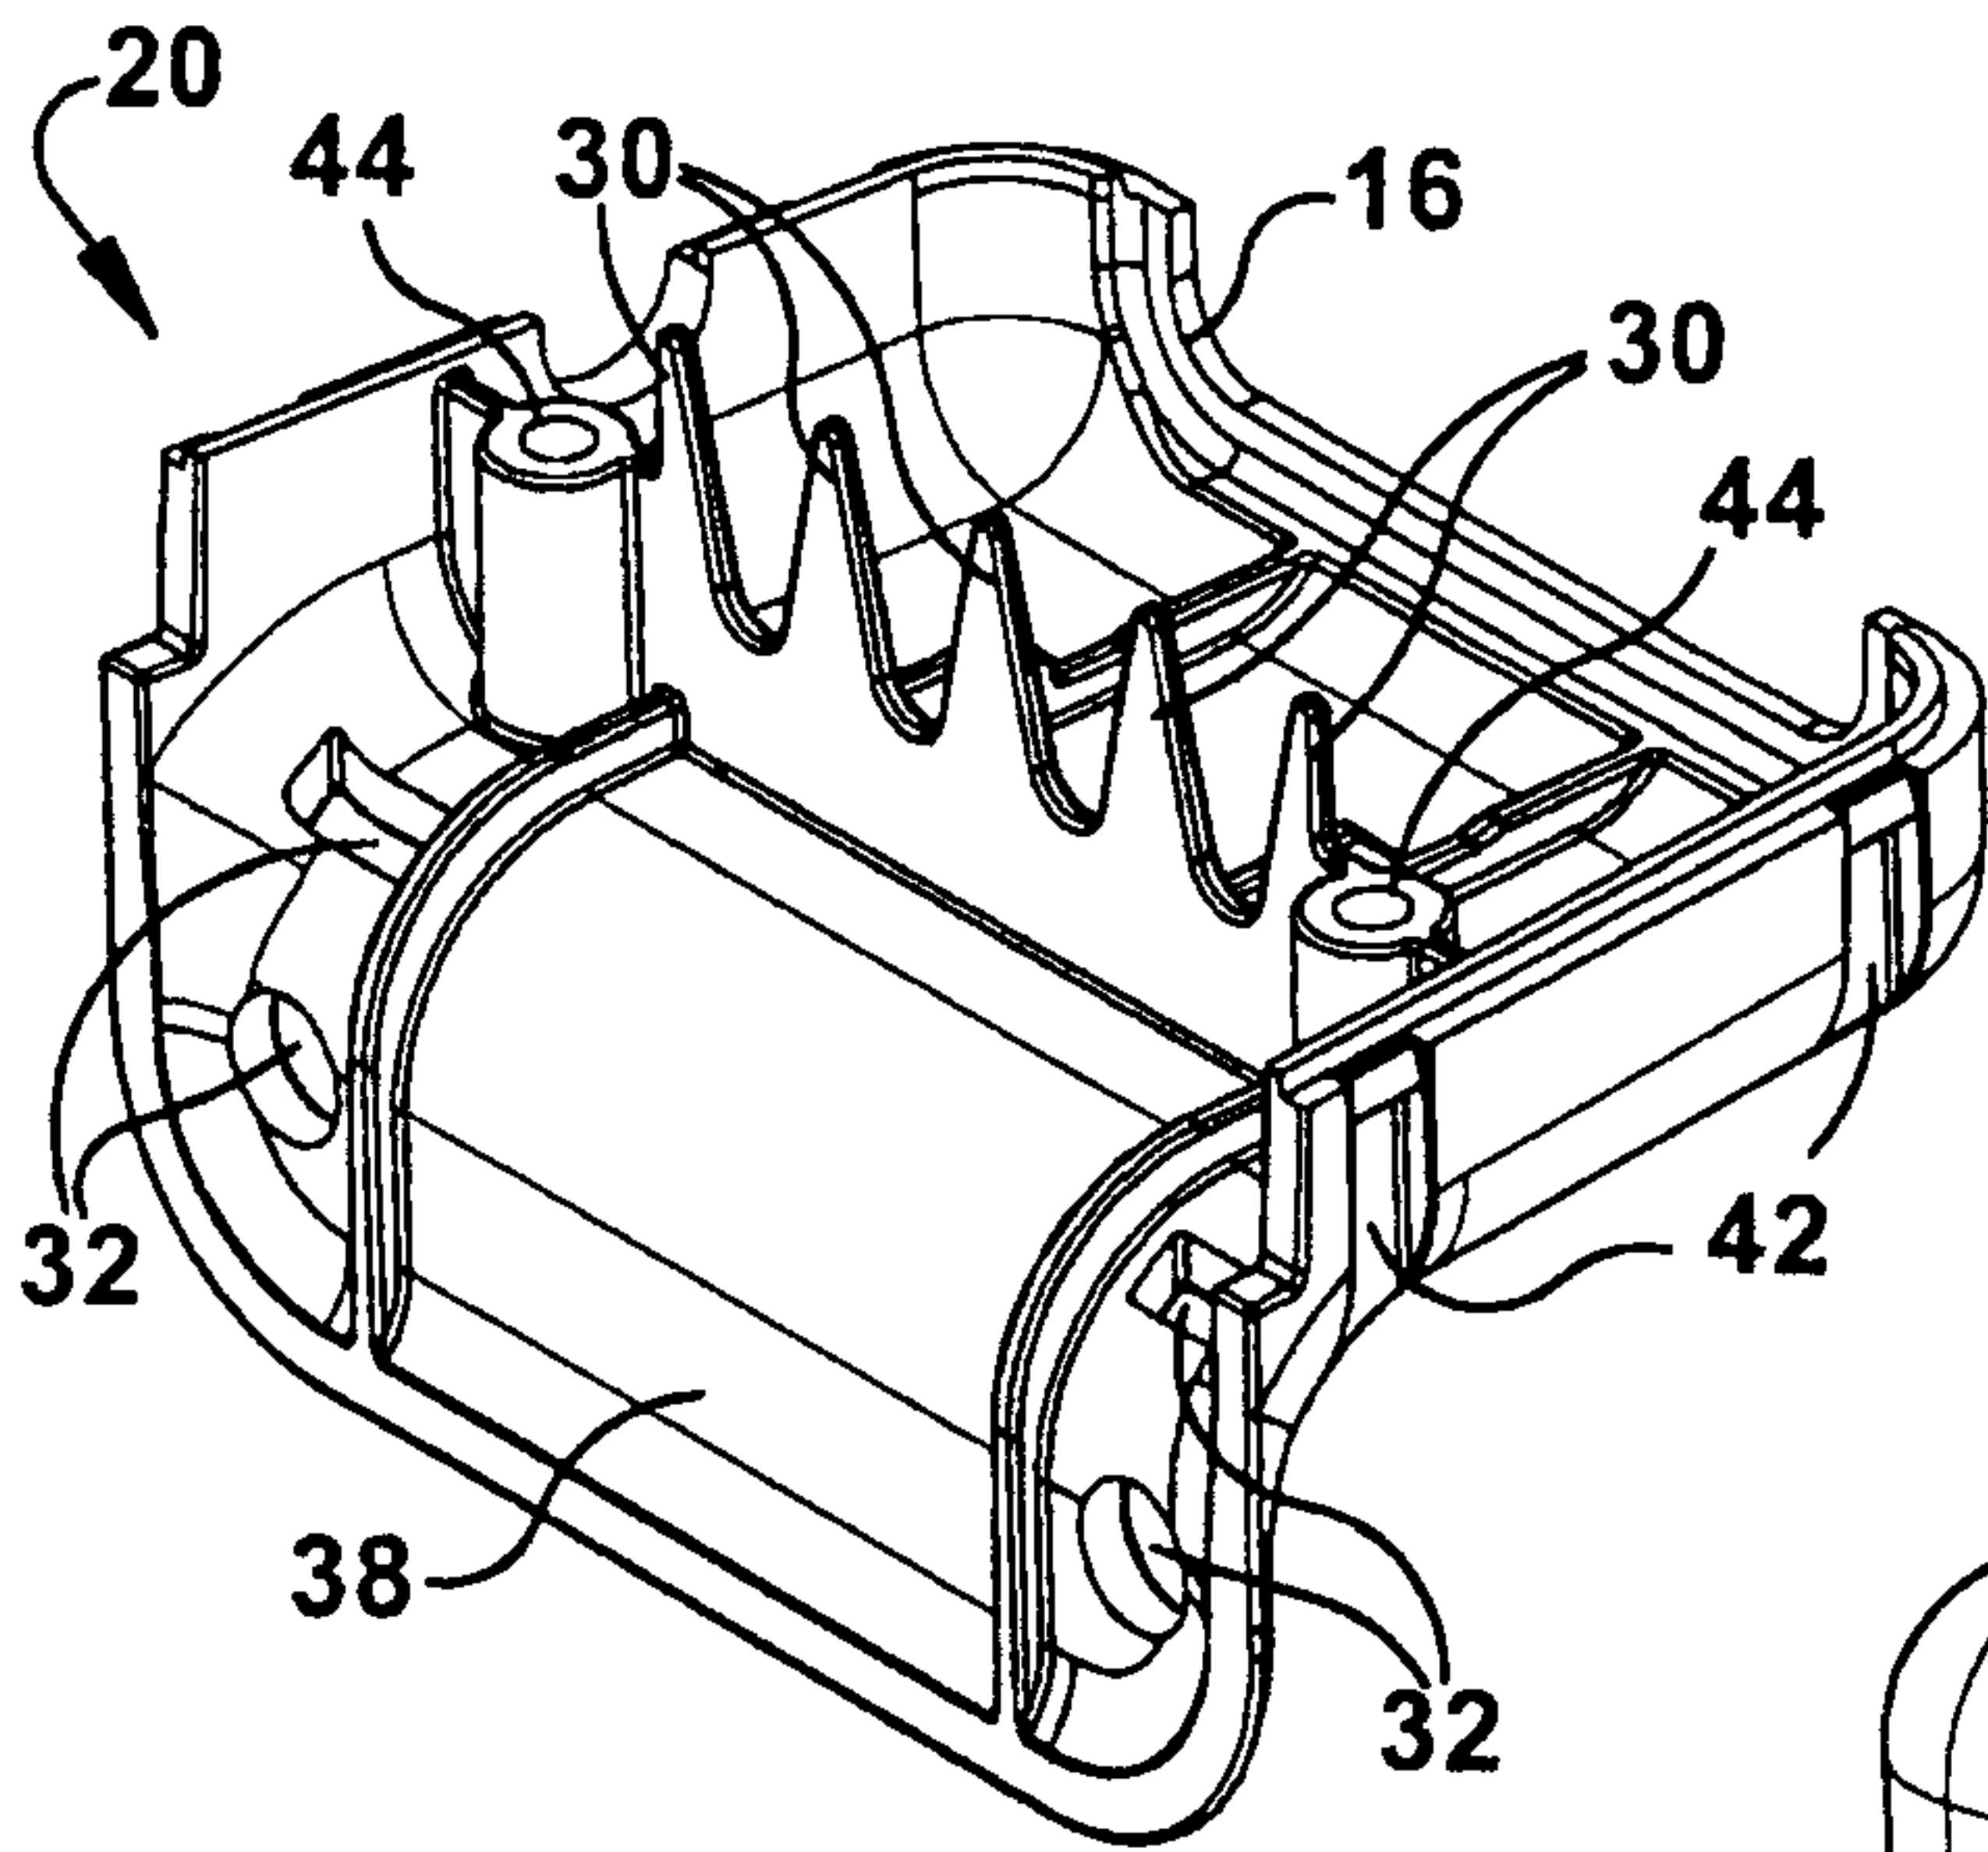


Figure 9D

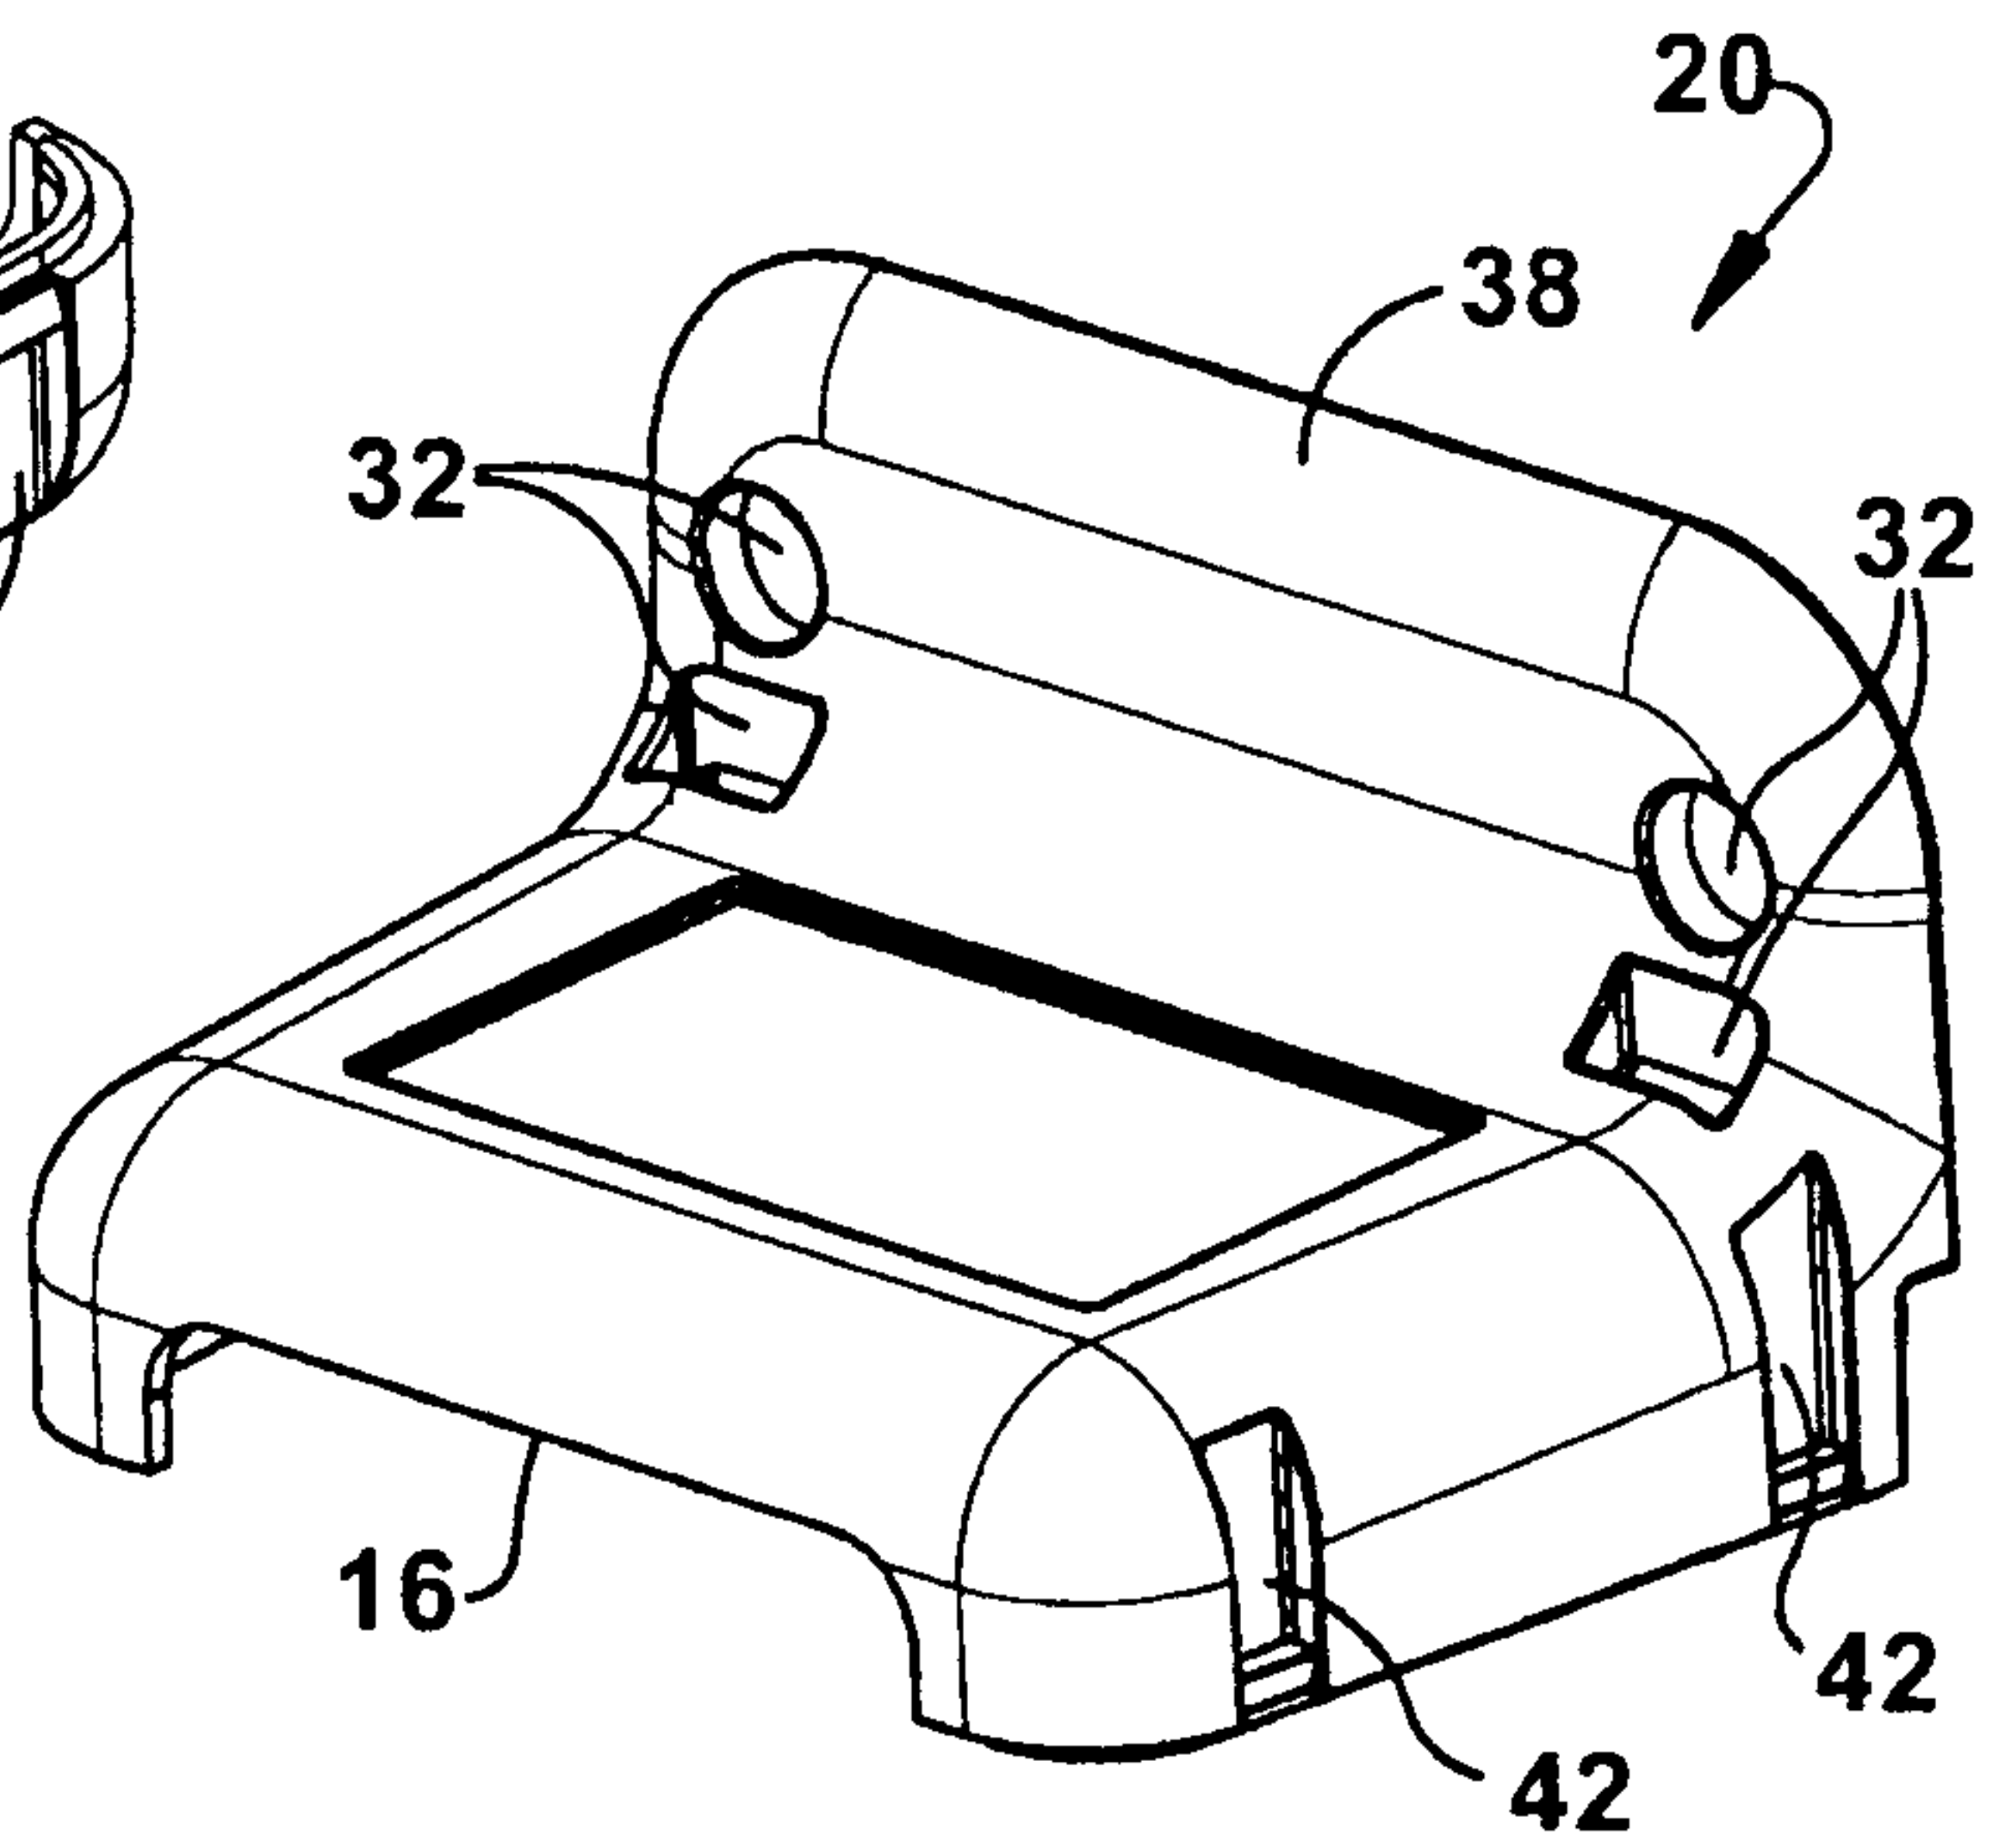


Figure 9E

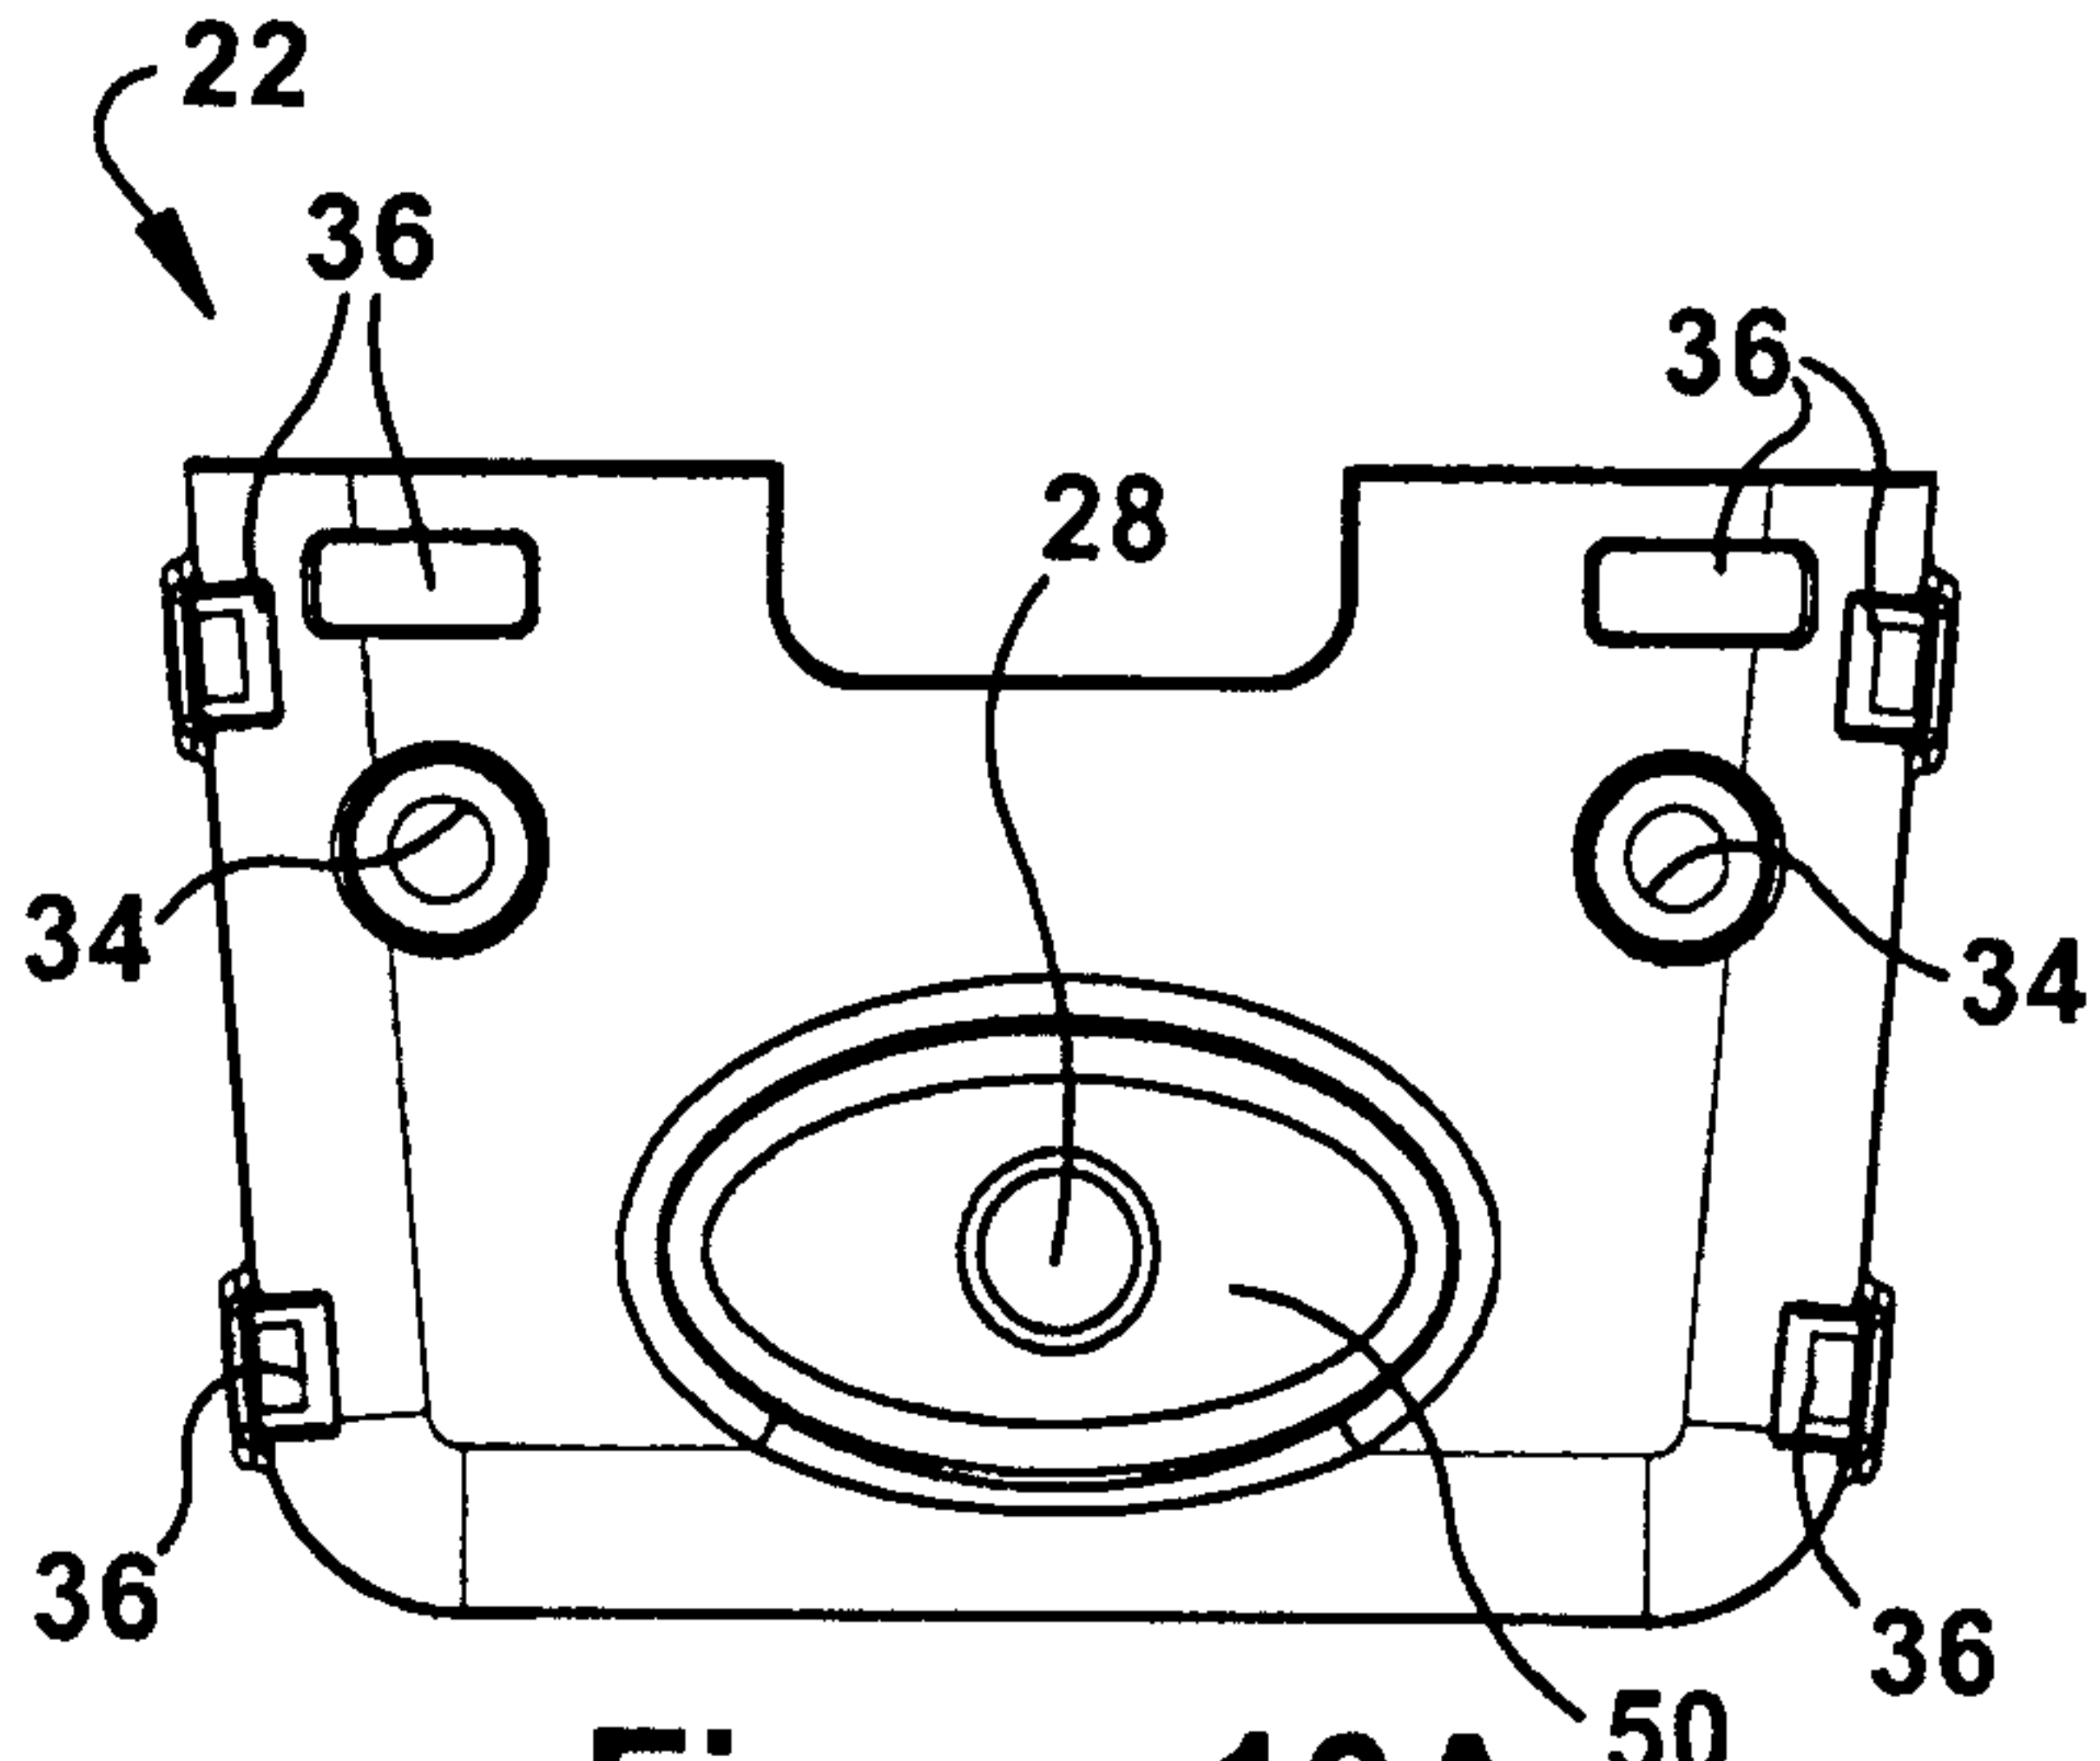


Figure 10A

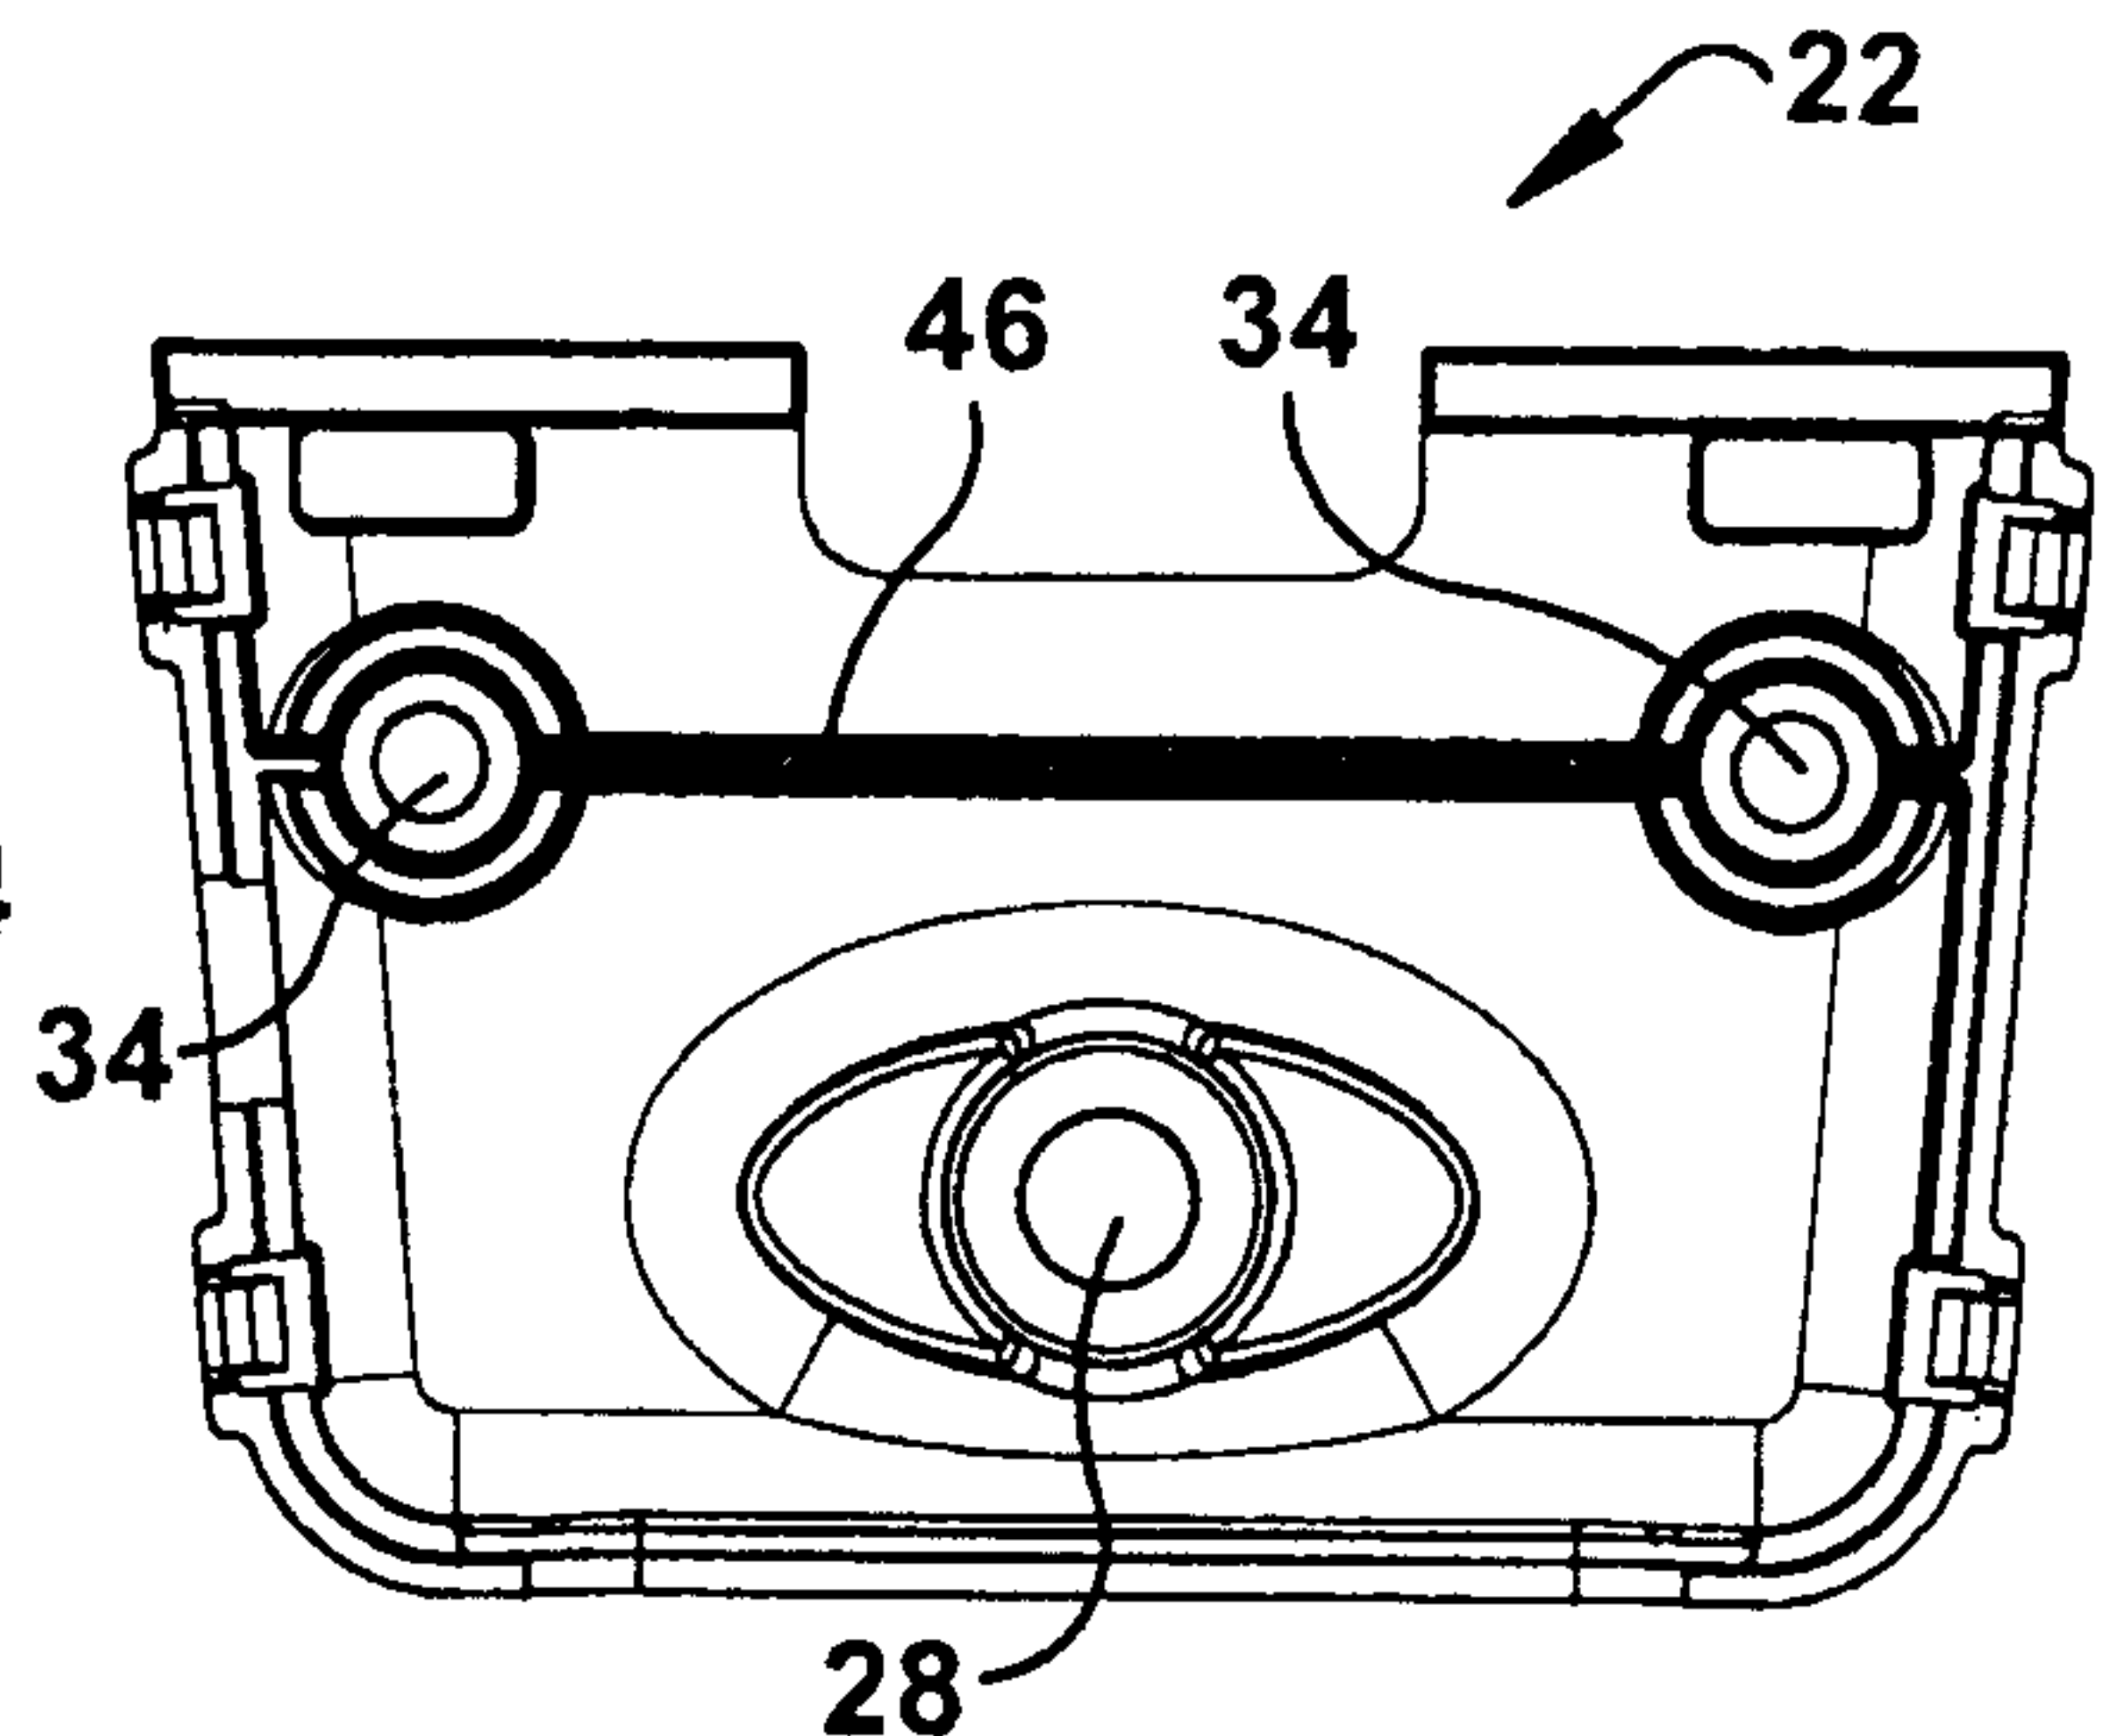


Figure 10B

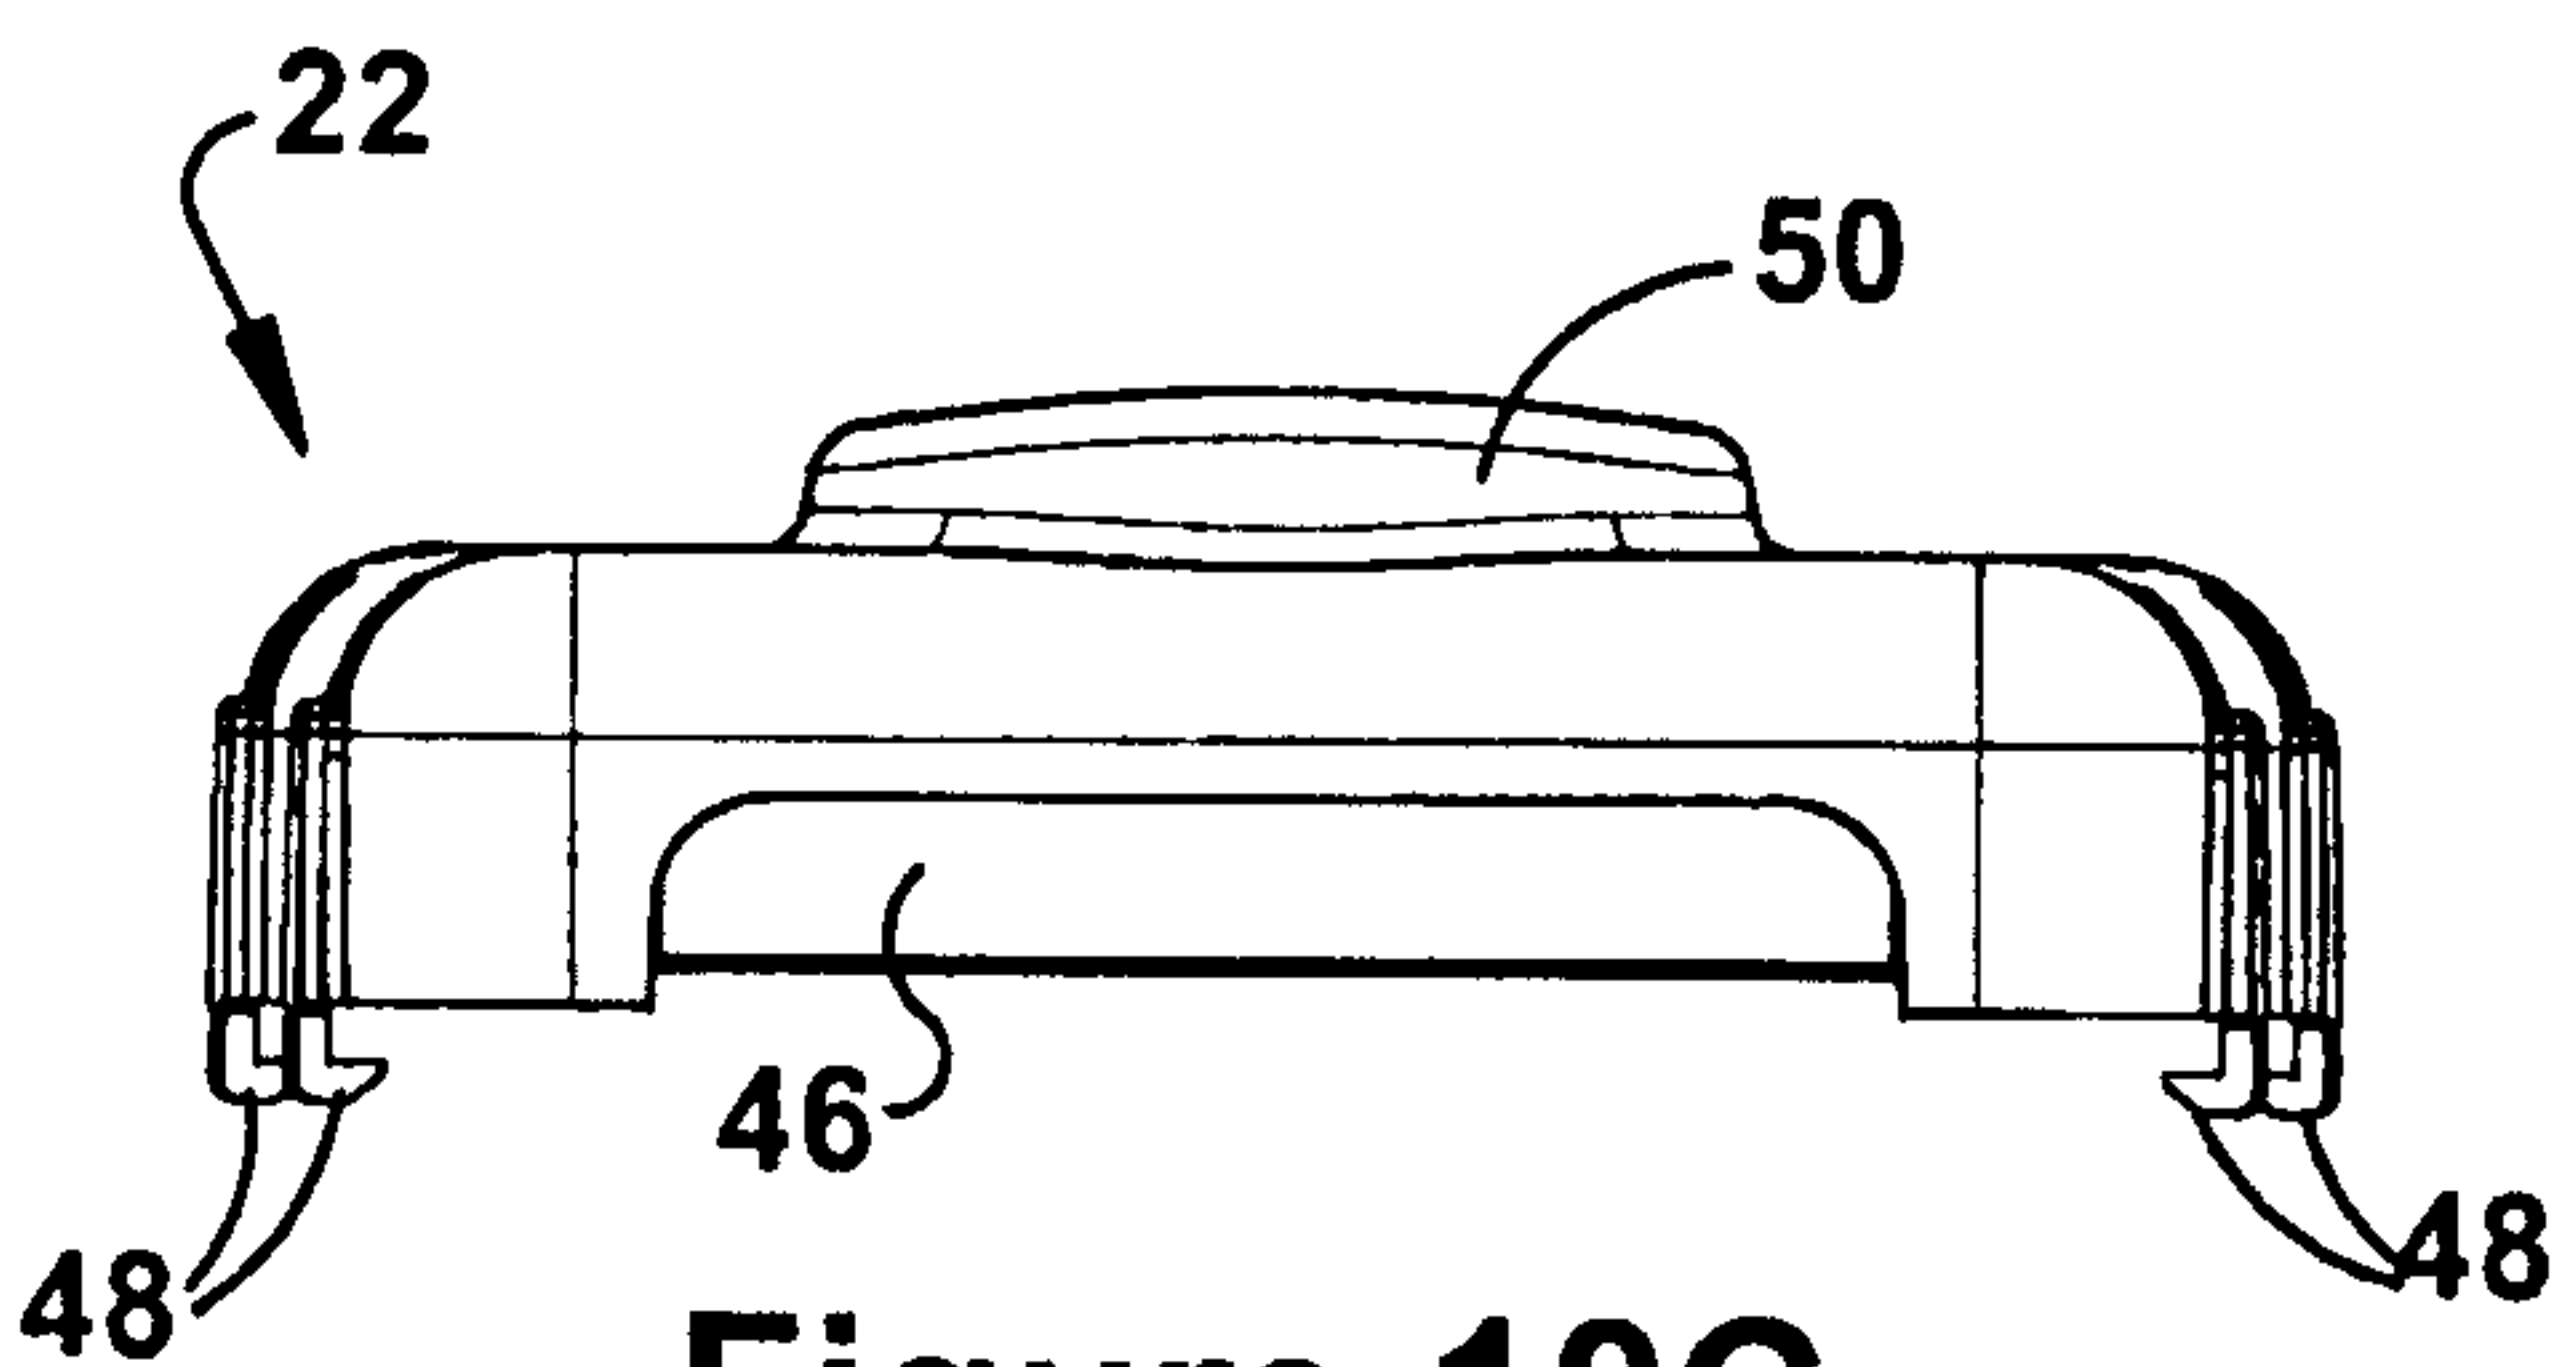


Figure 10C

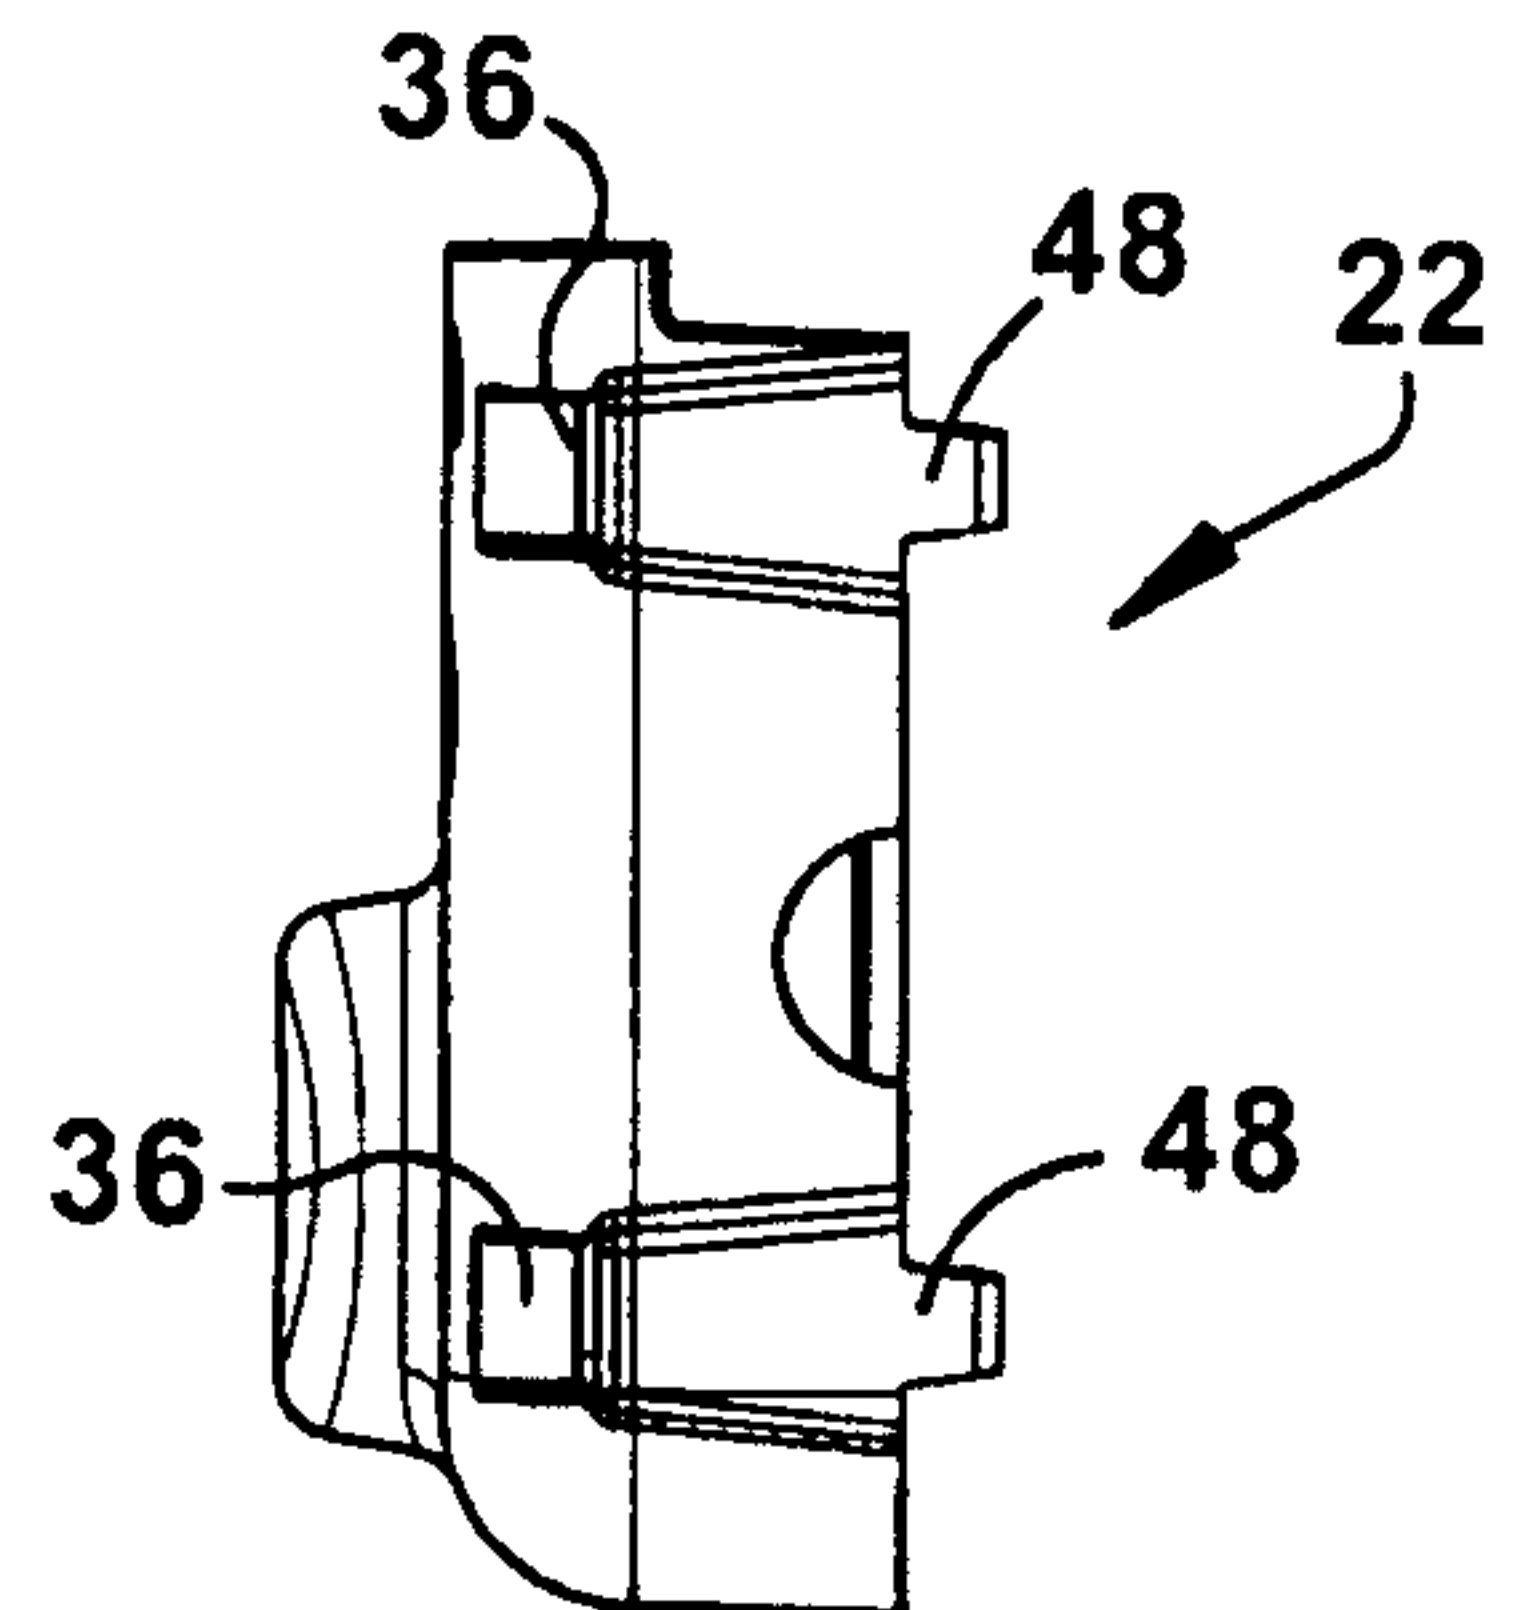


Figure 10D

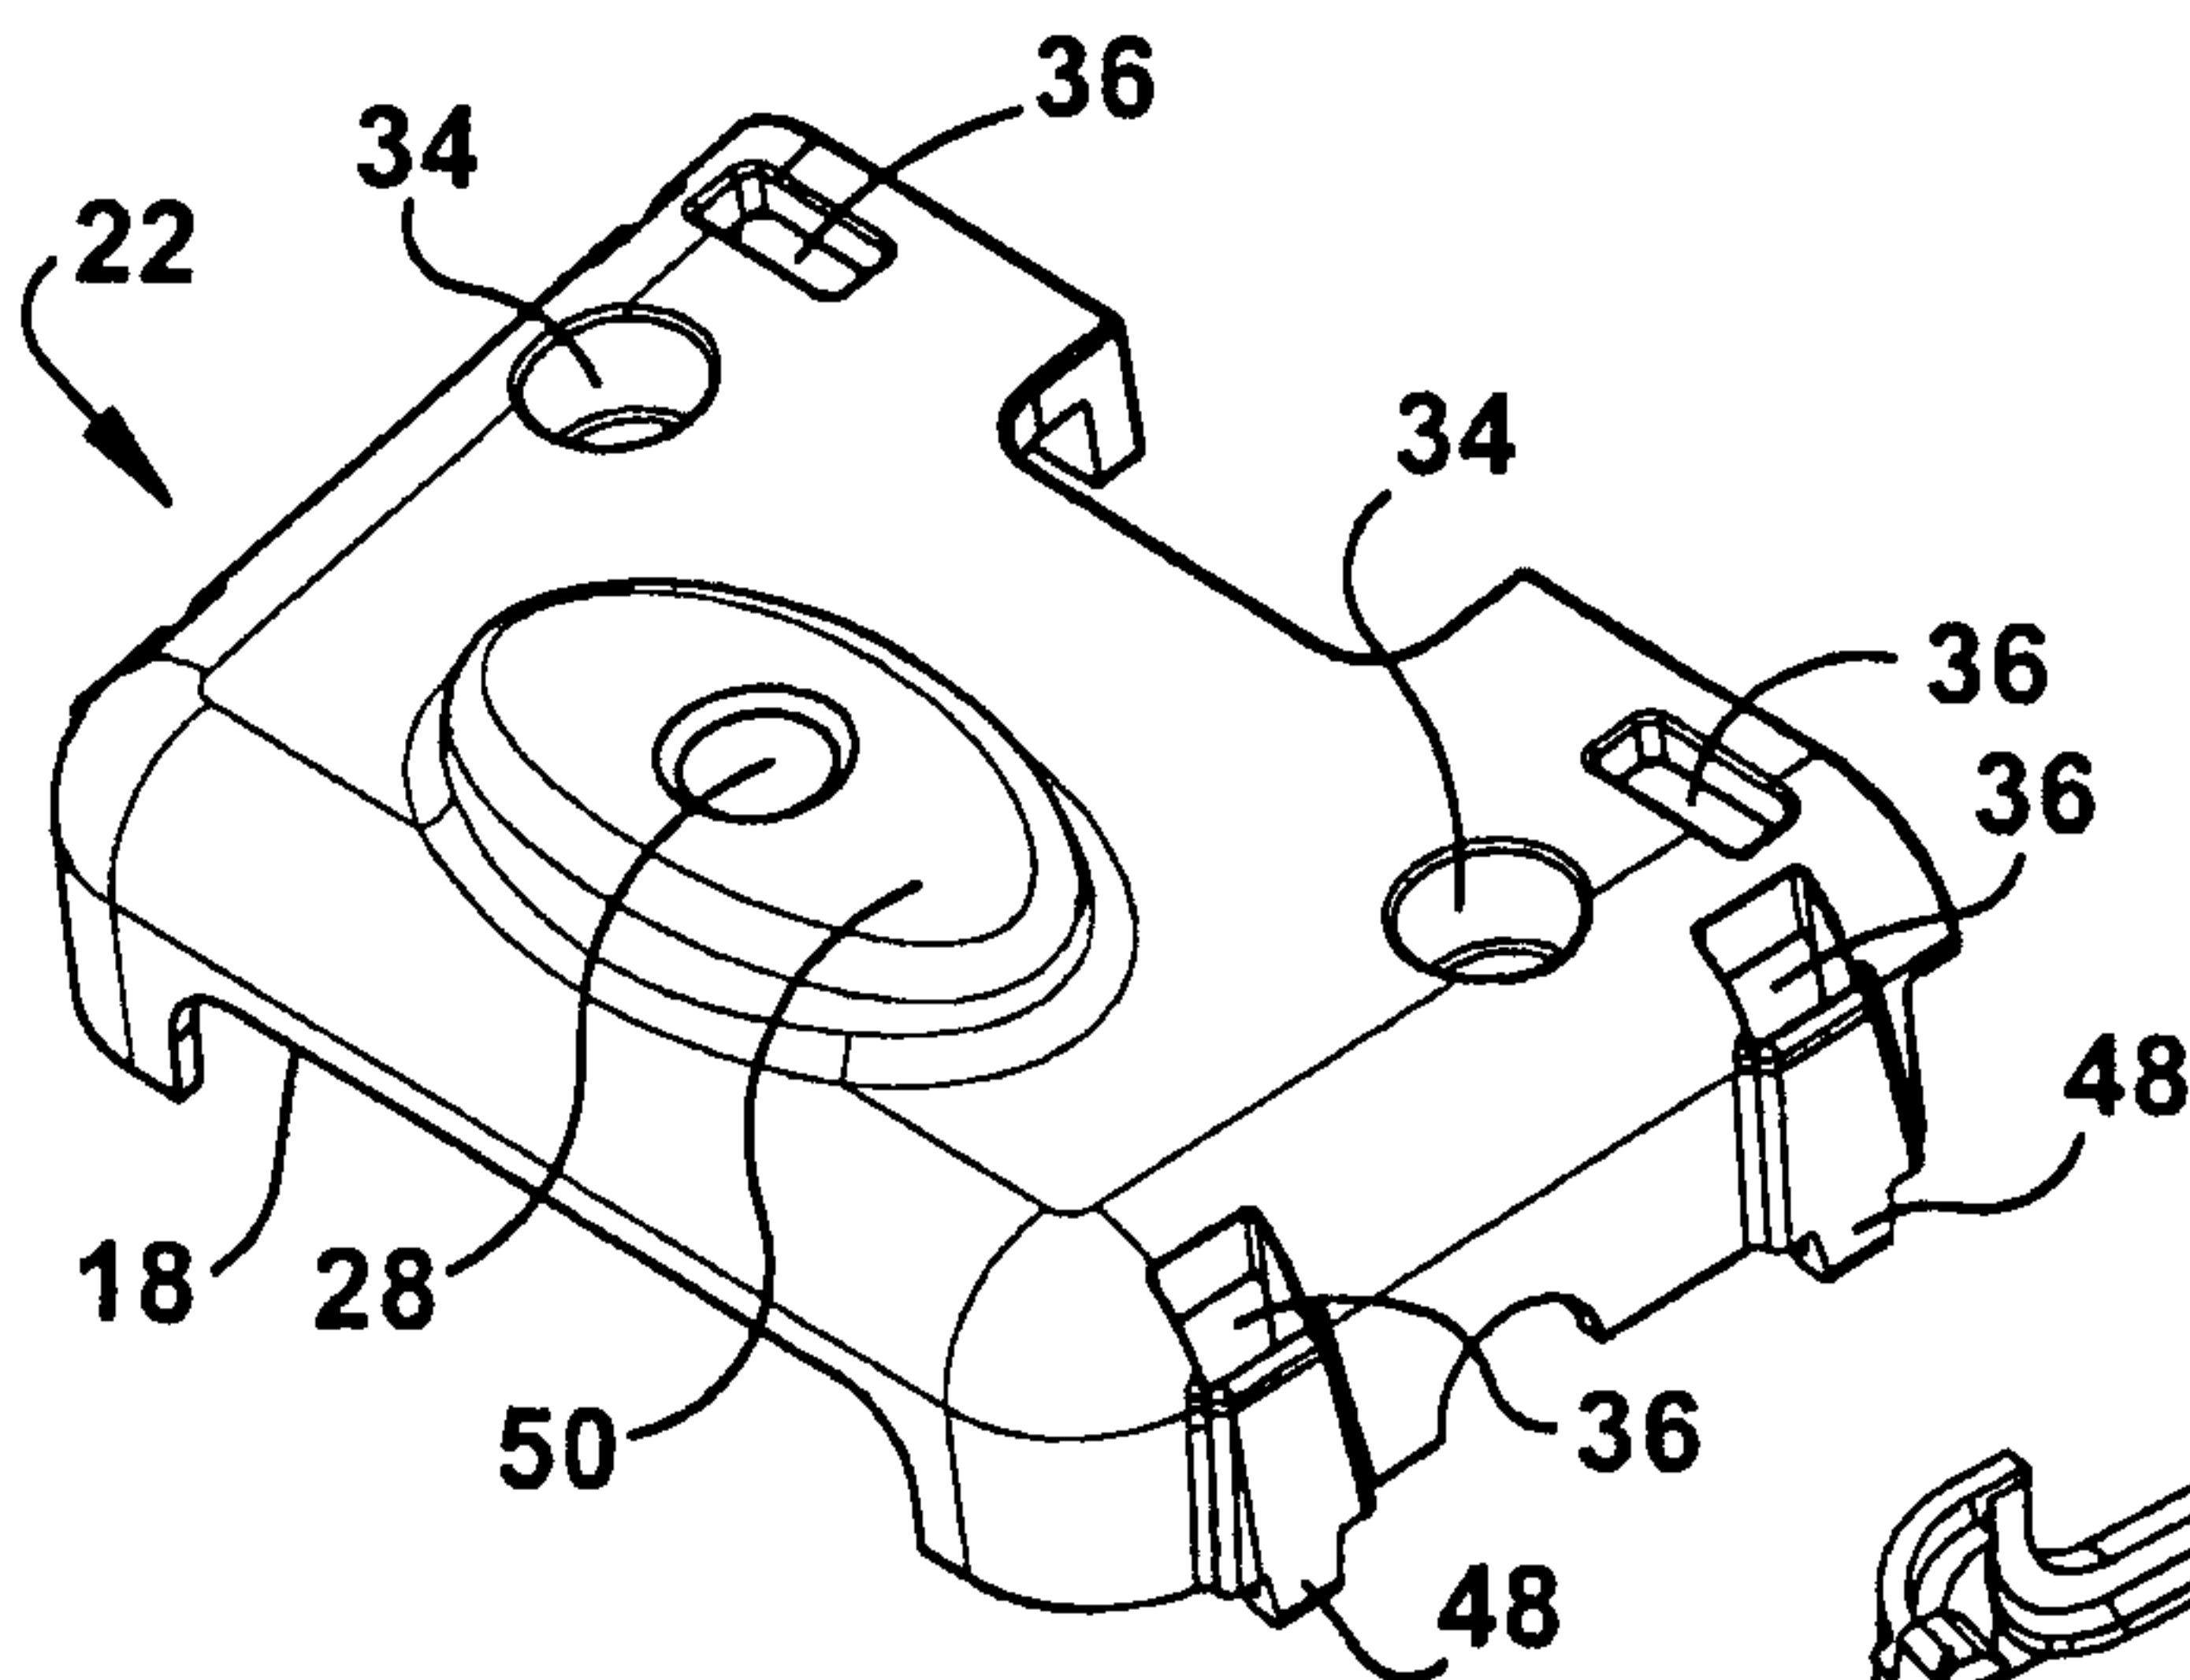


Figure 10E

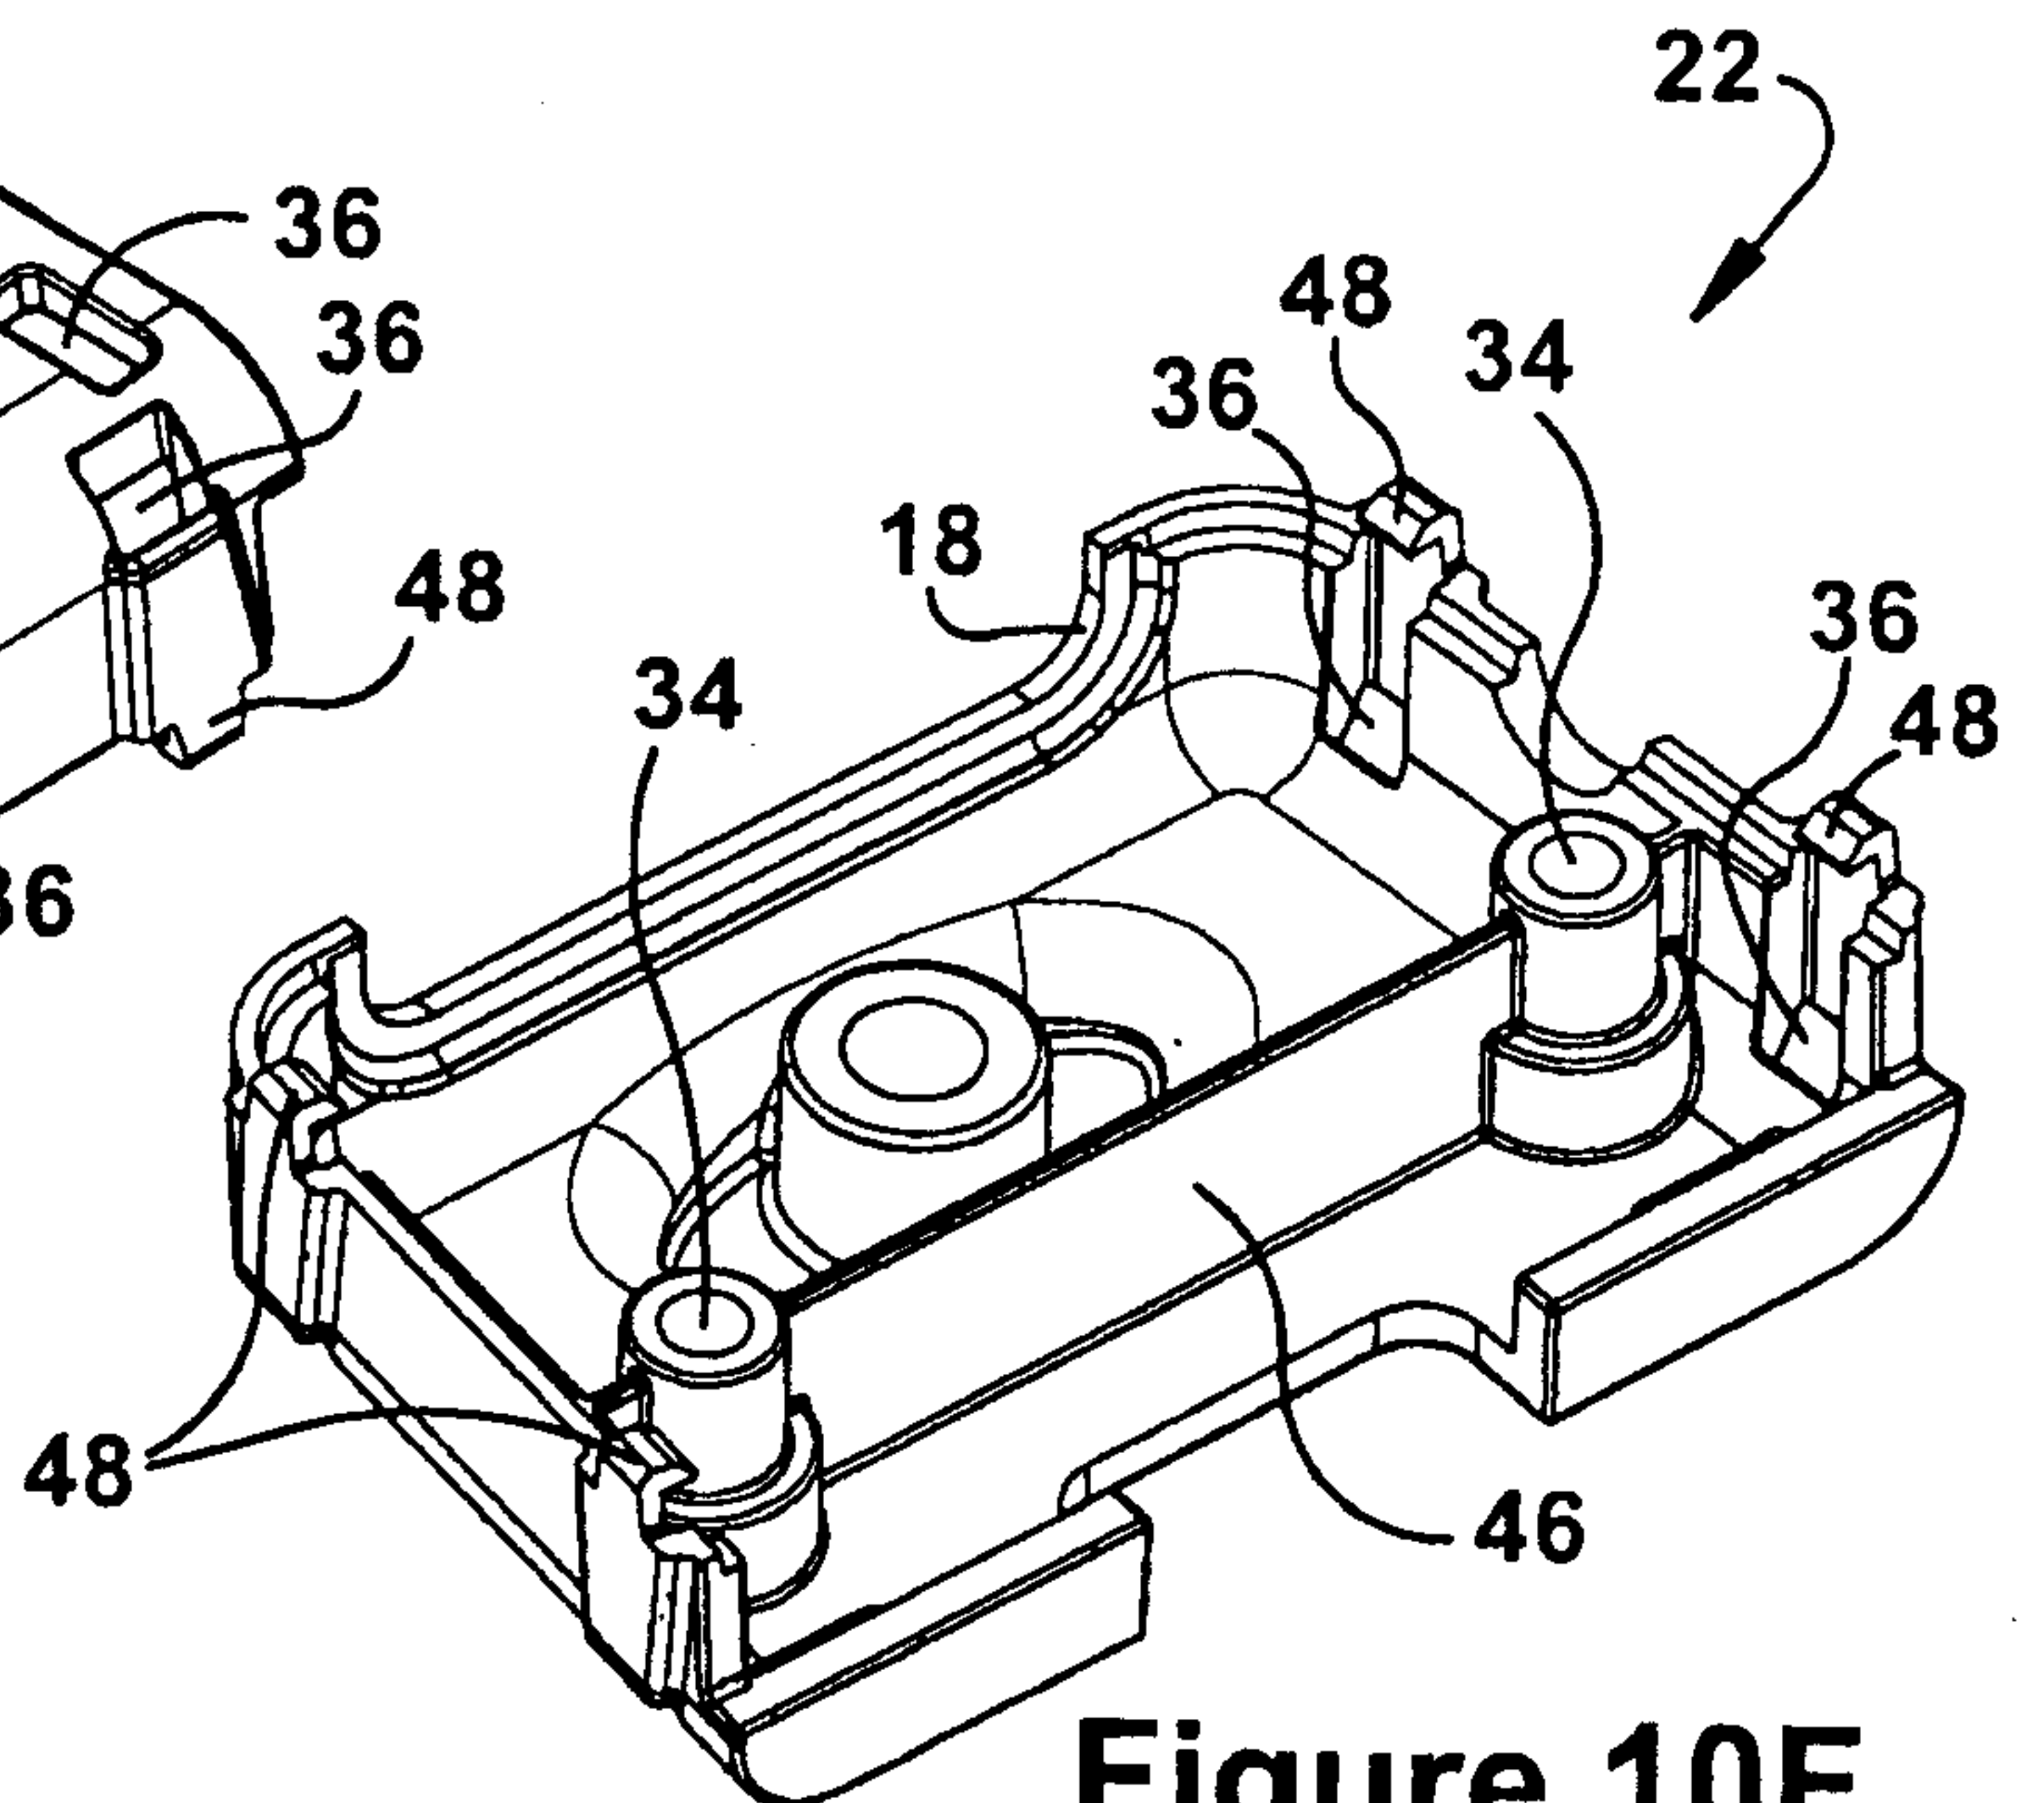


Figure 10F

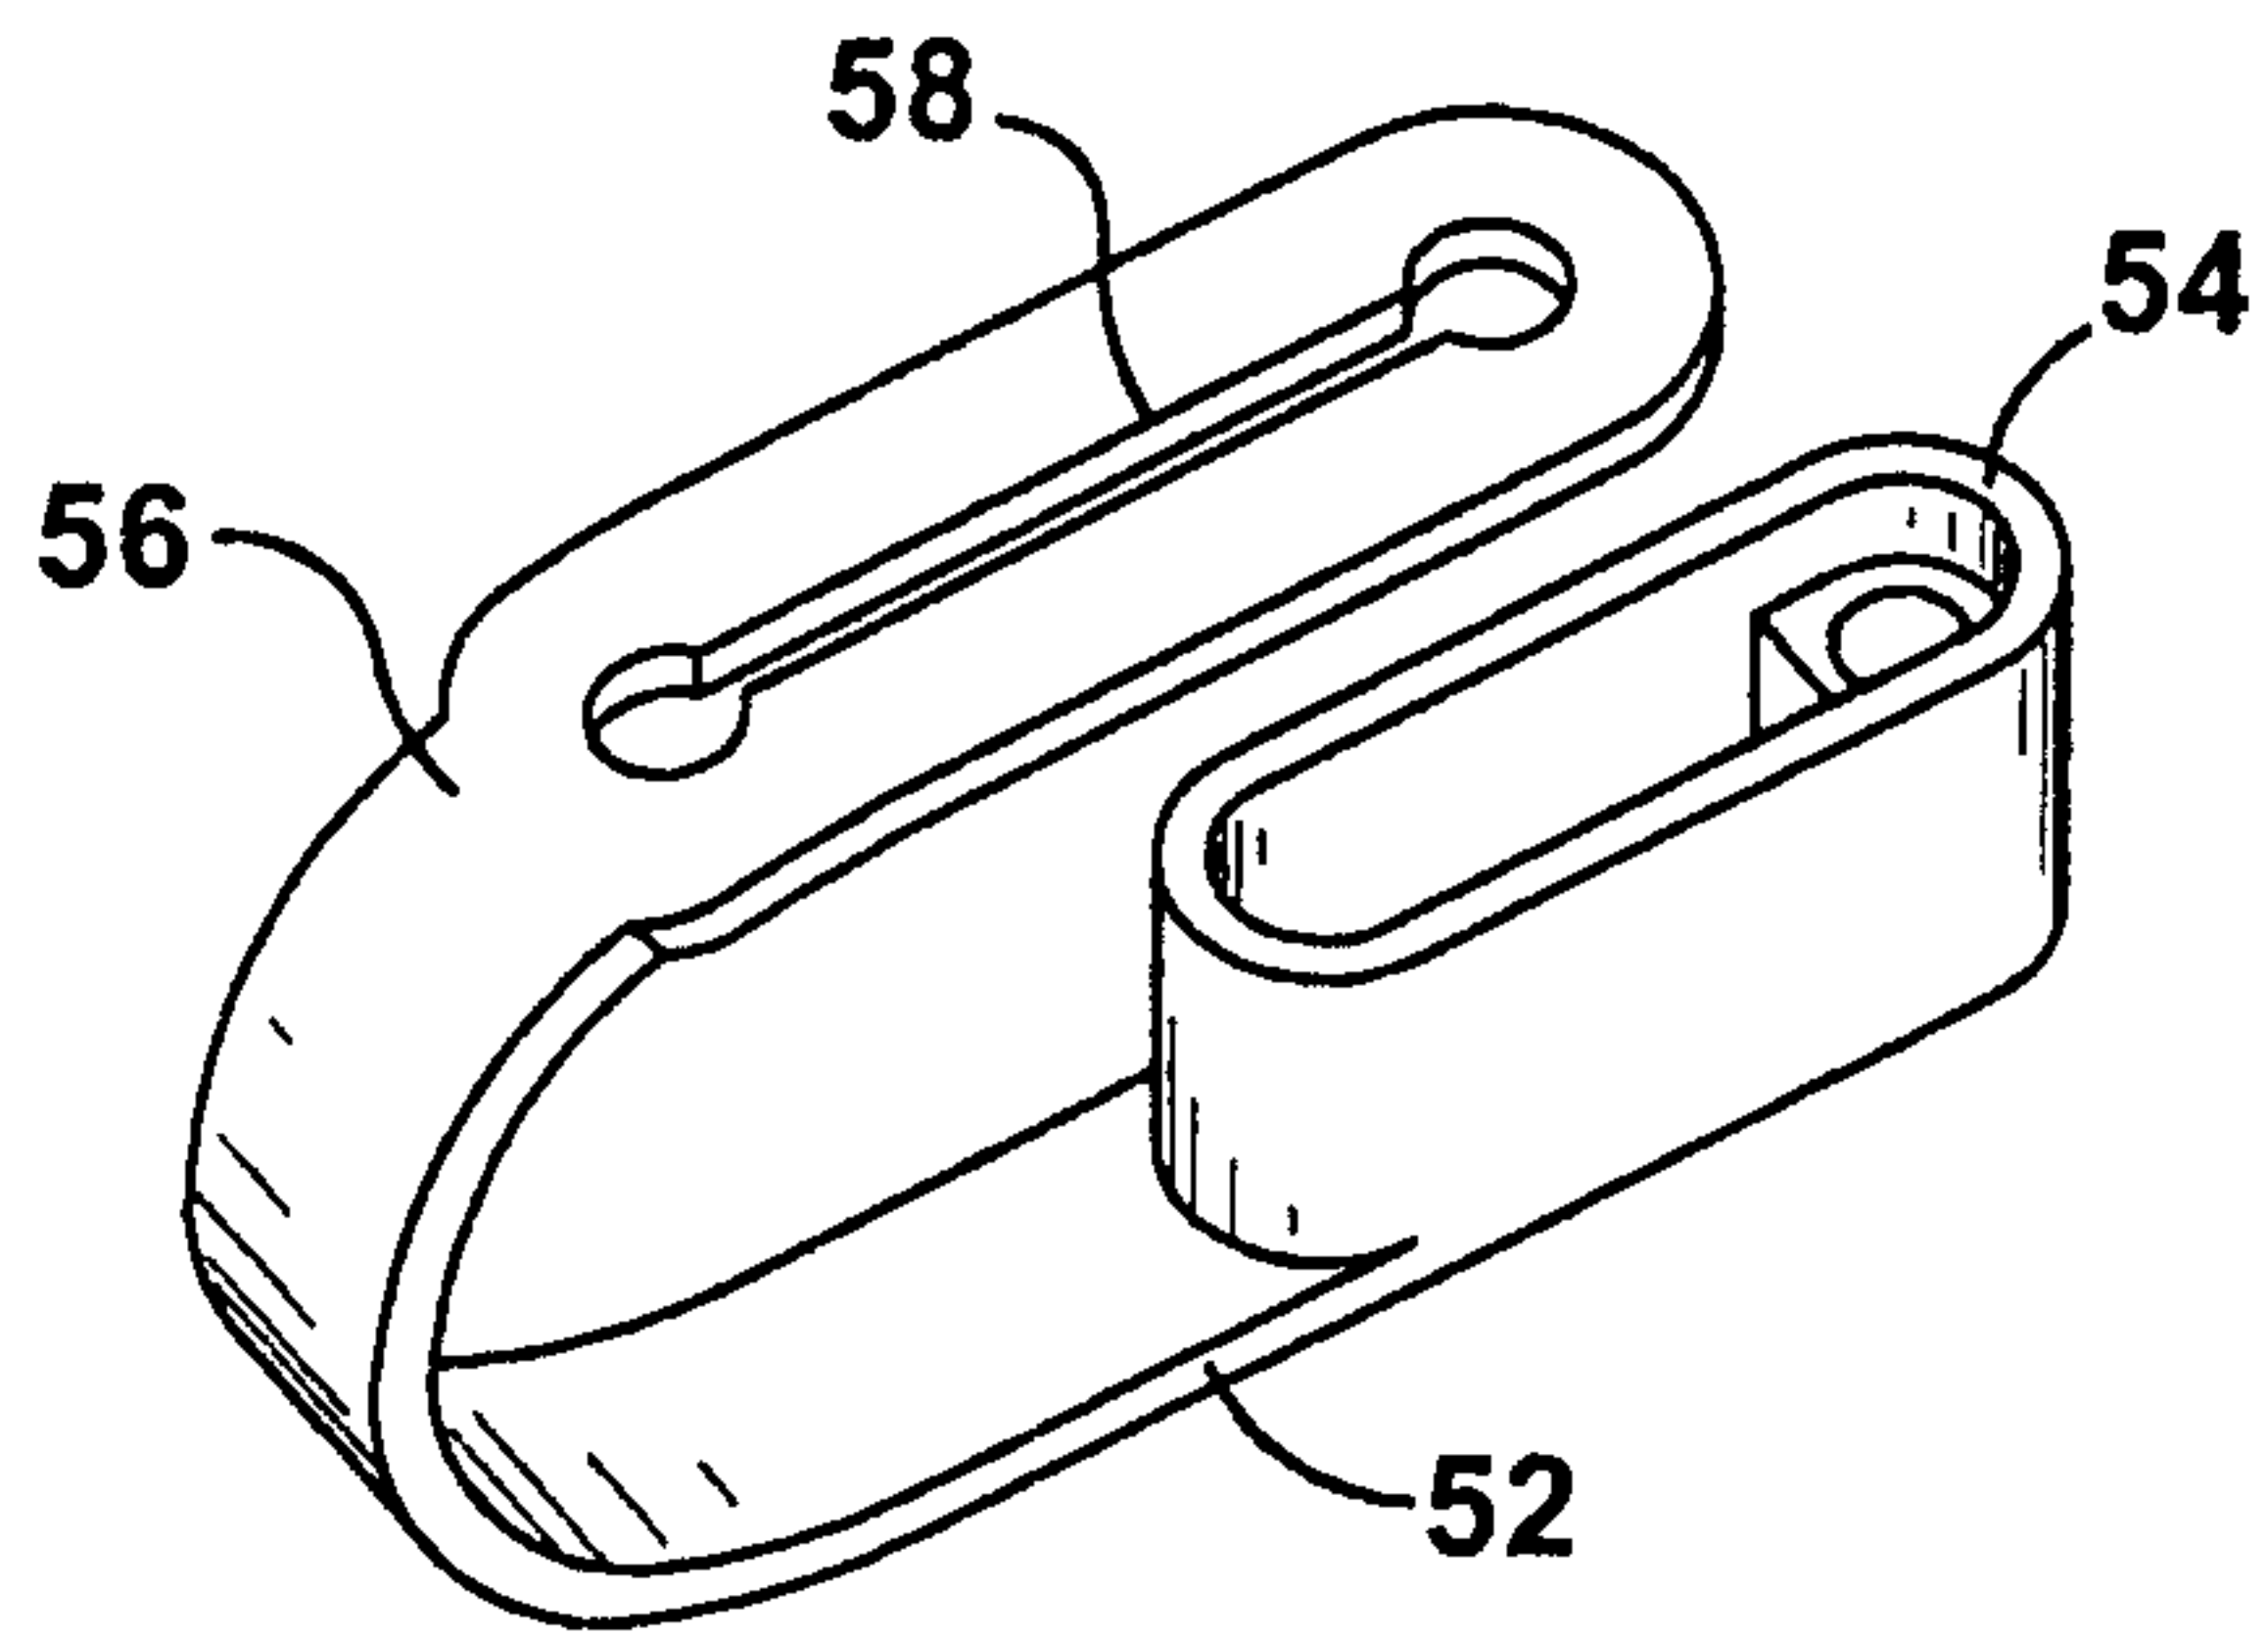


Figure 11

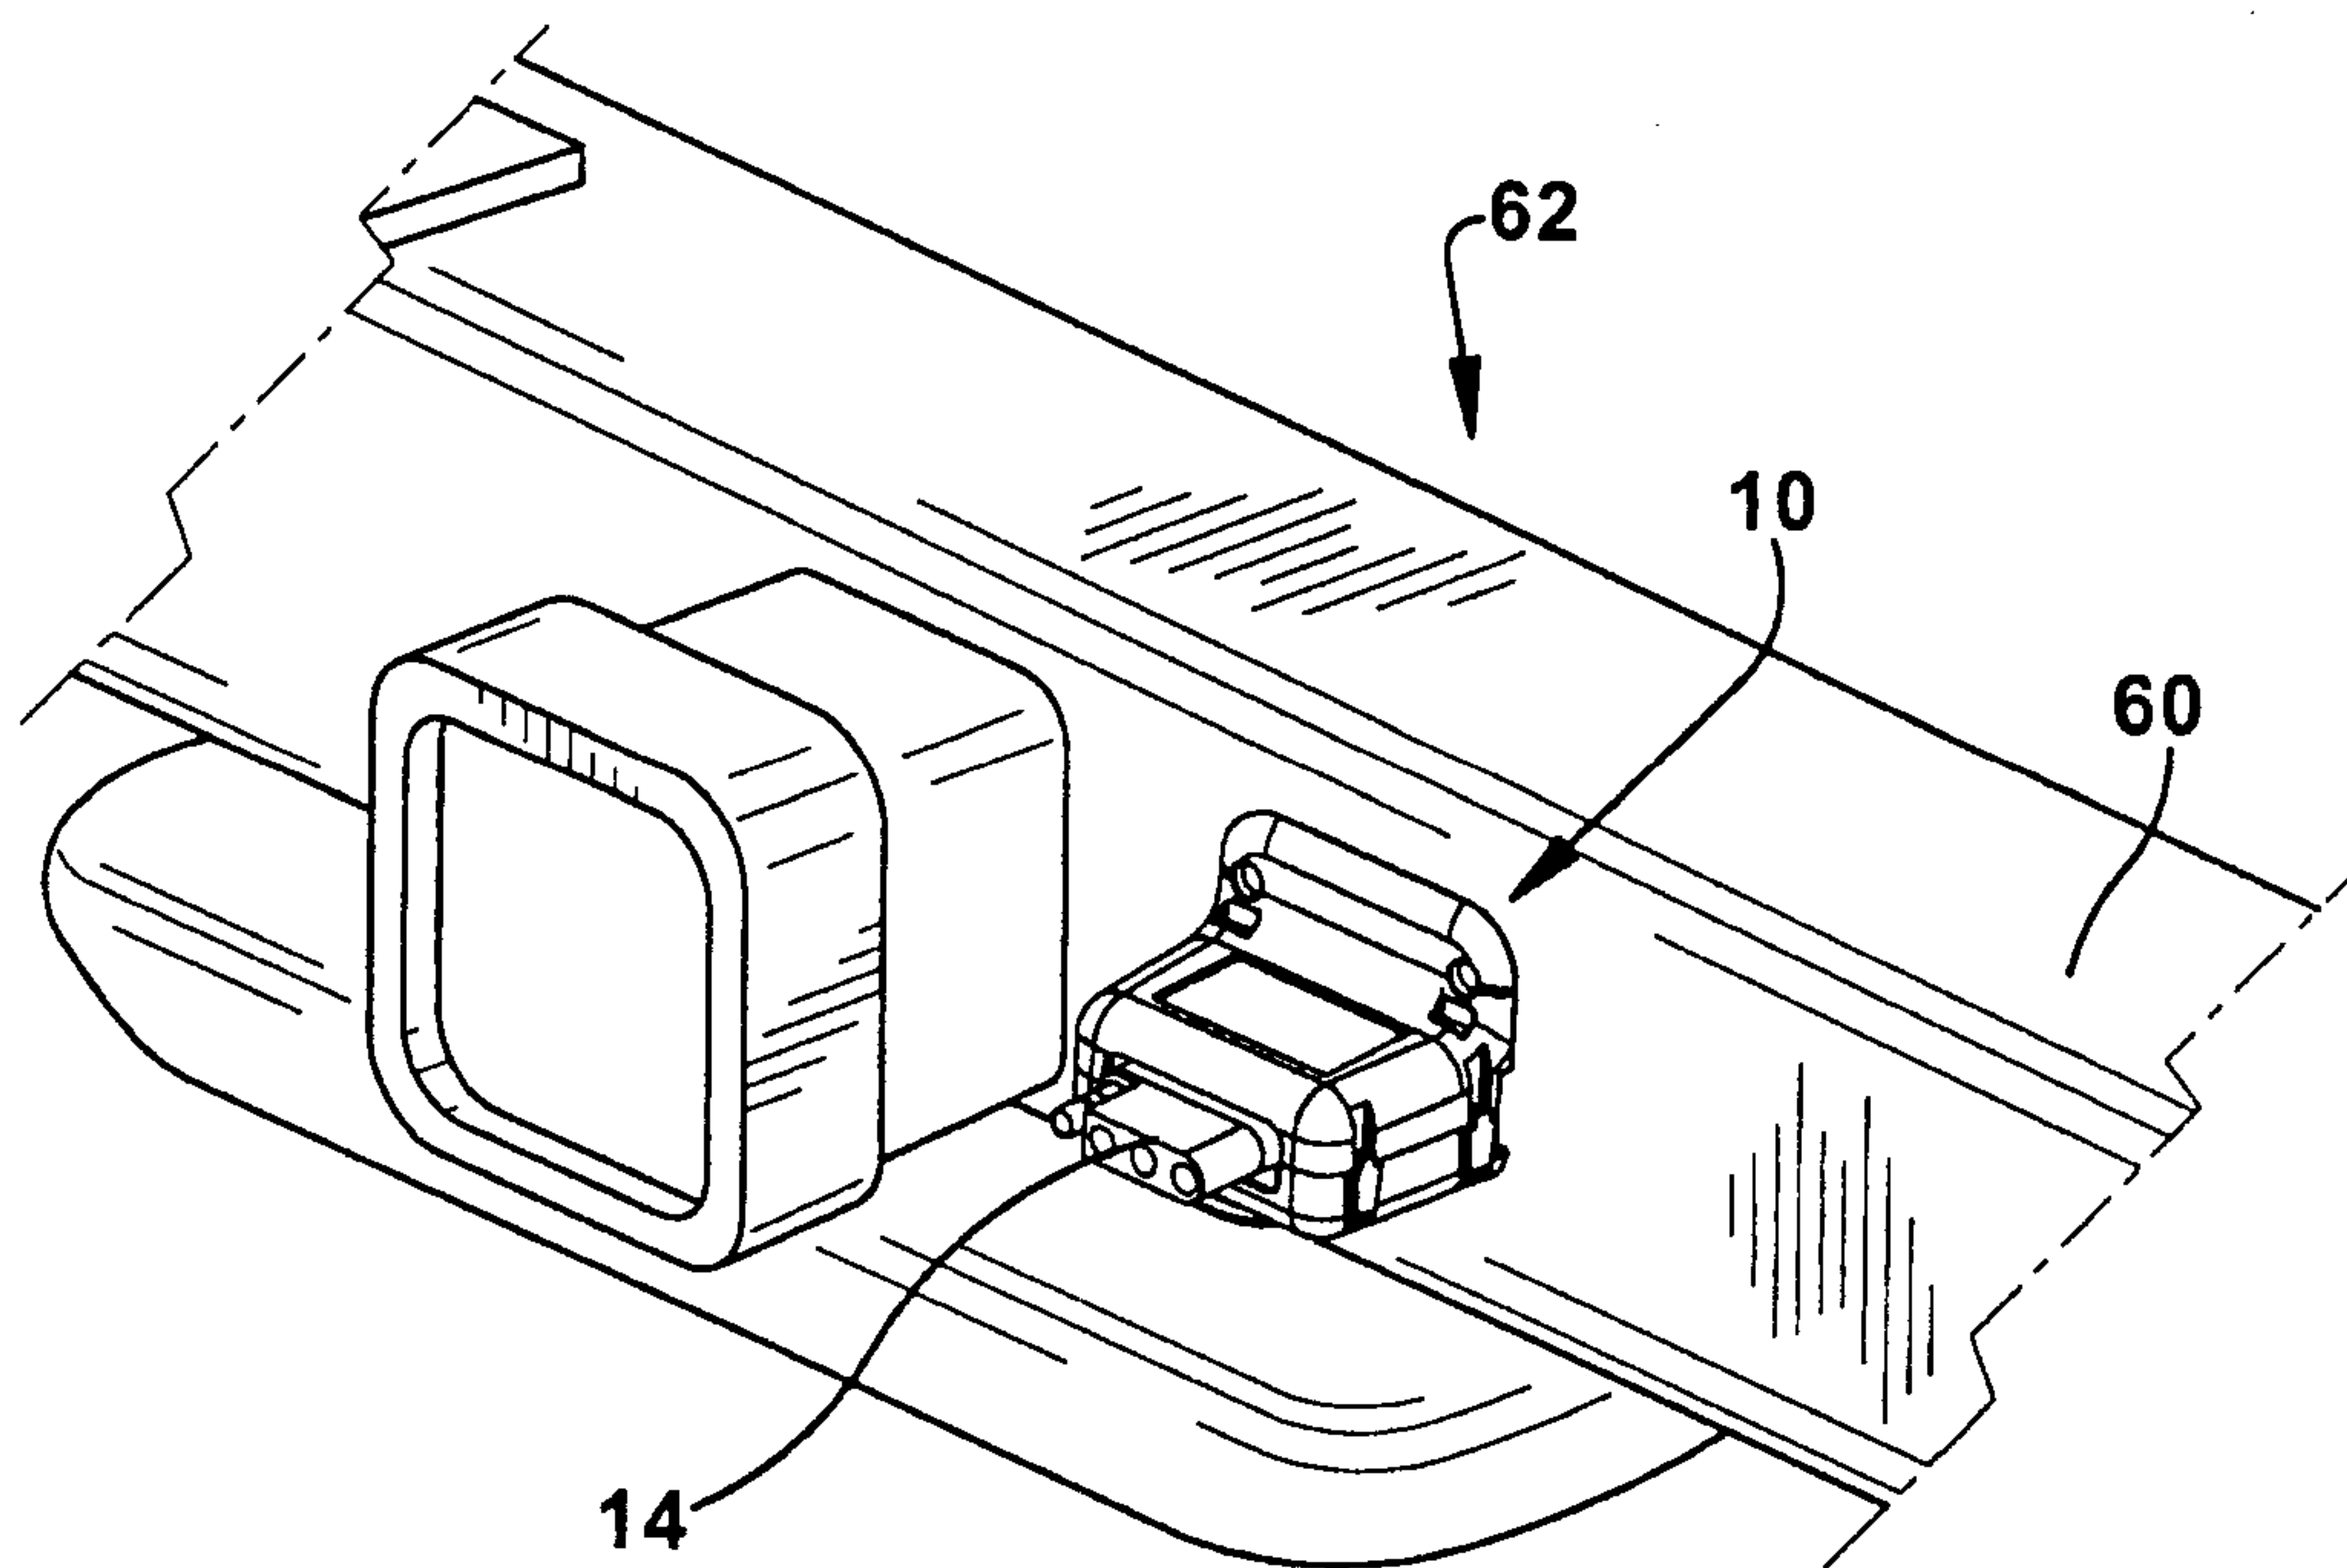


Figure 12

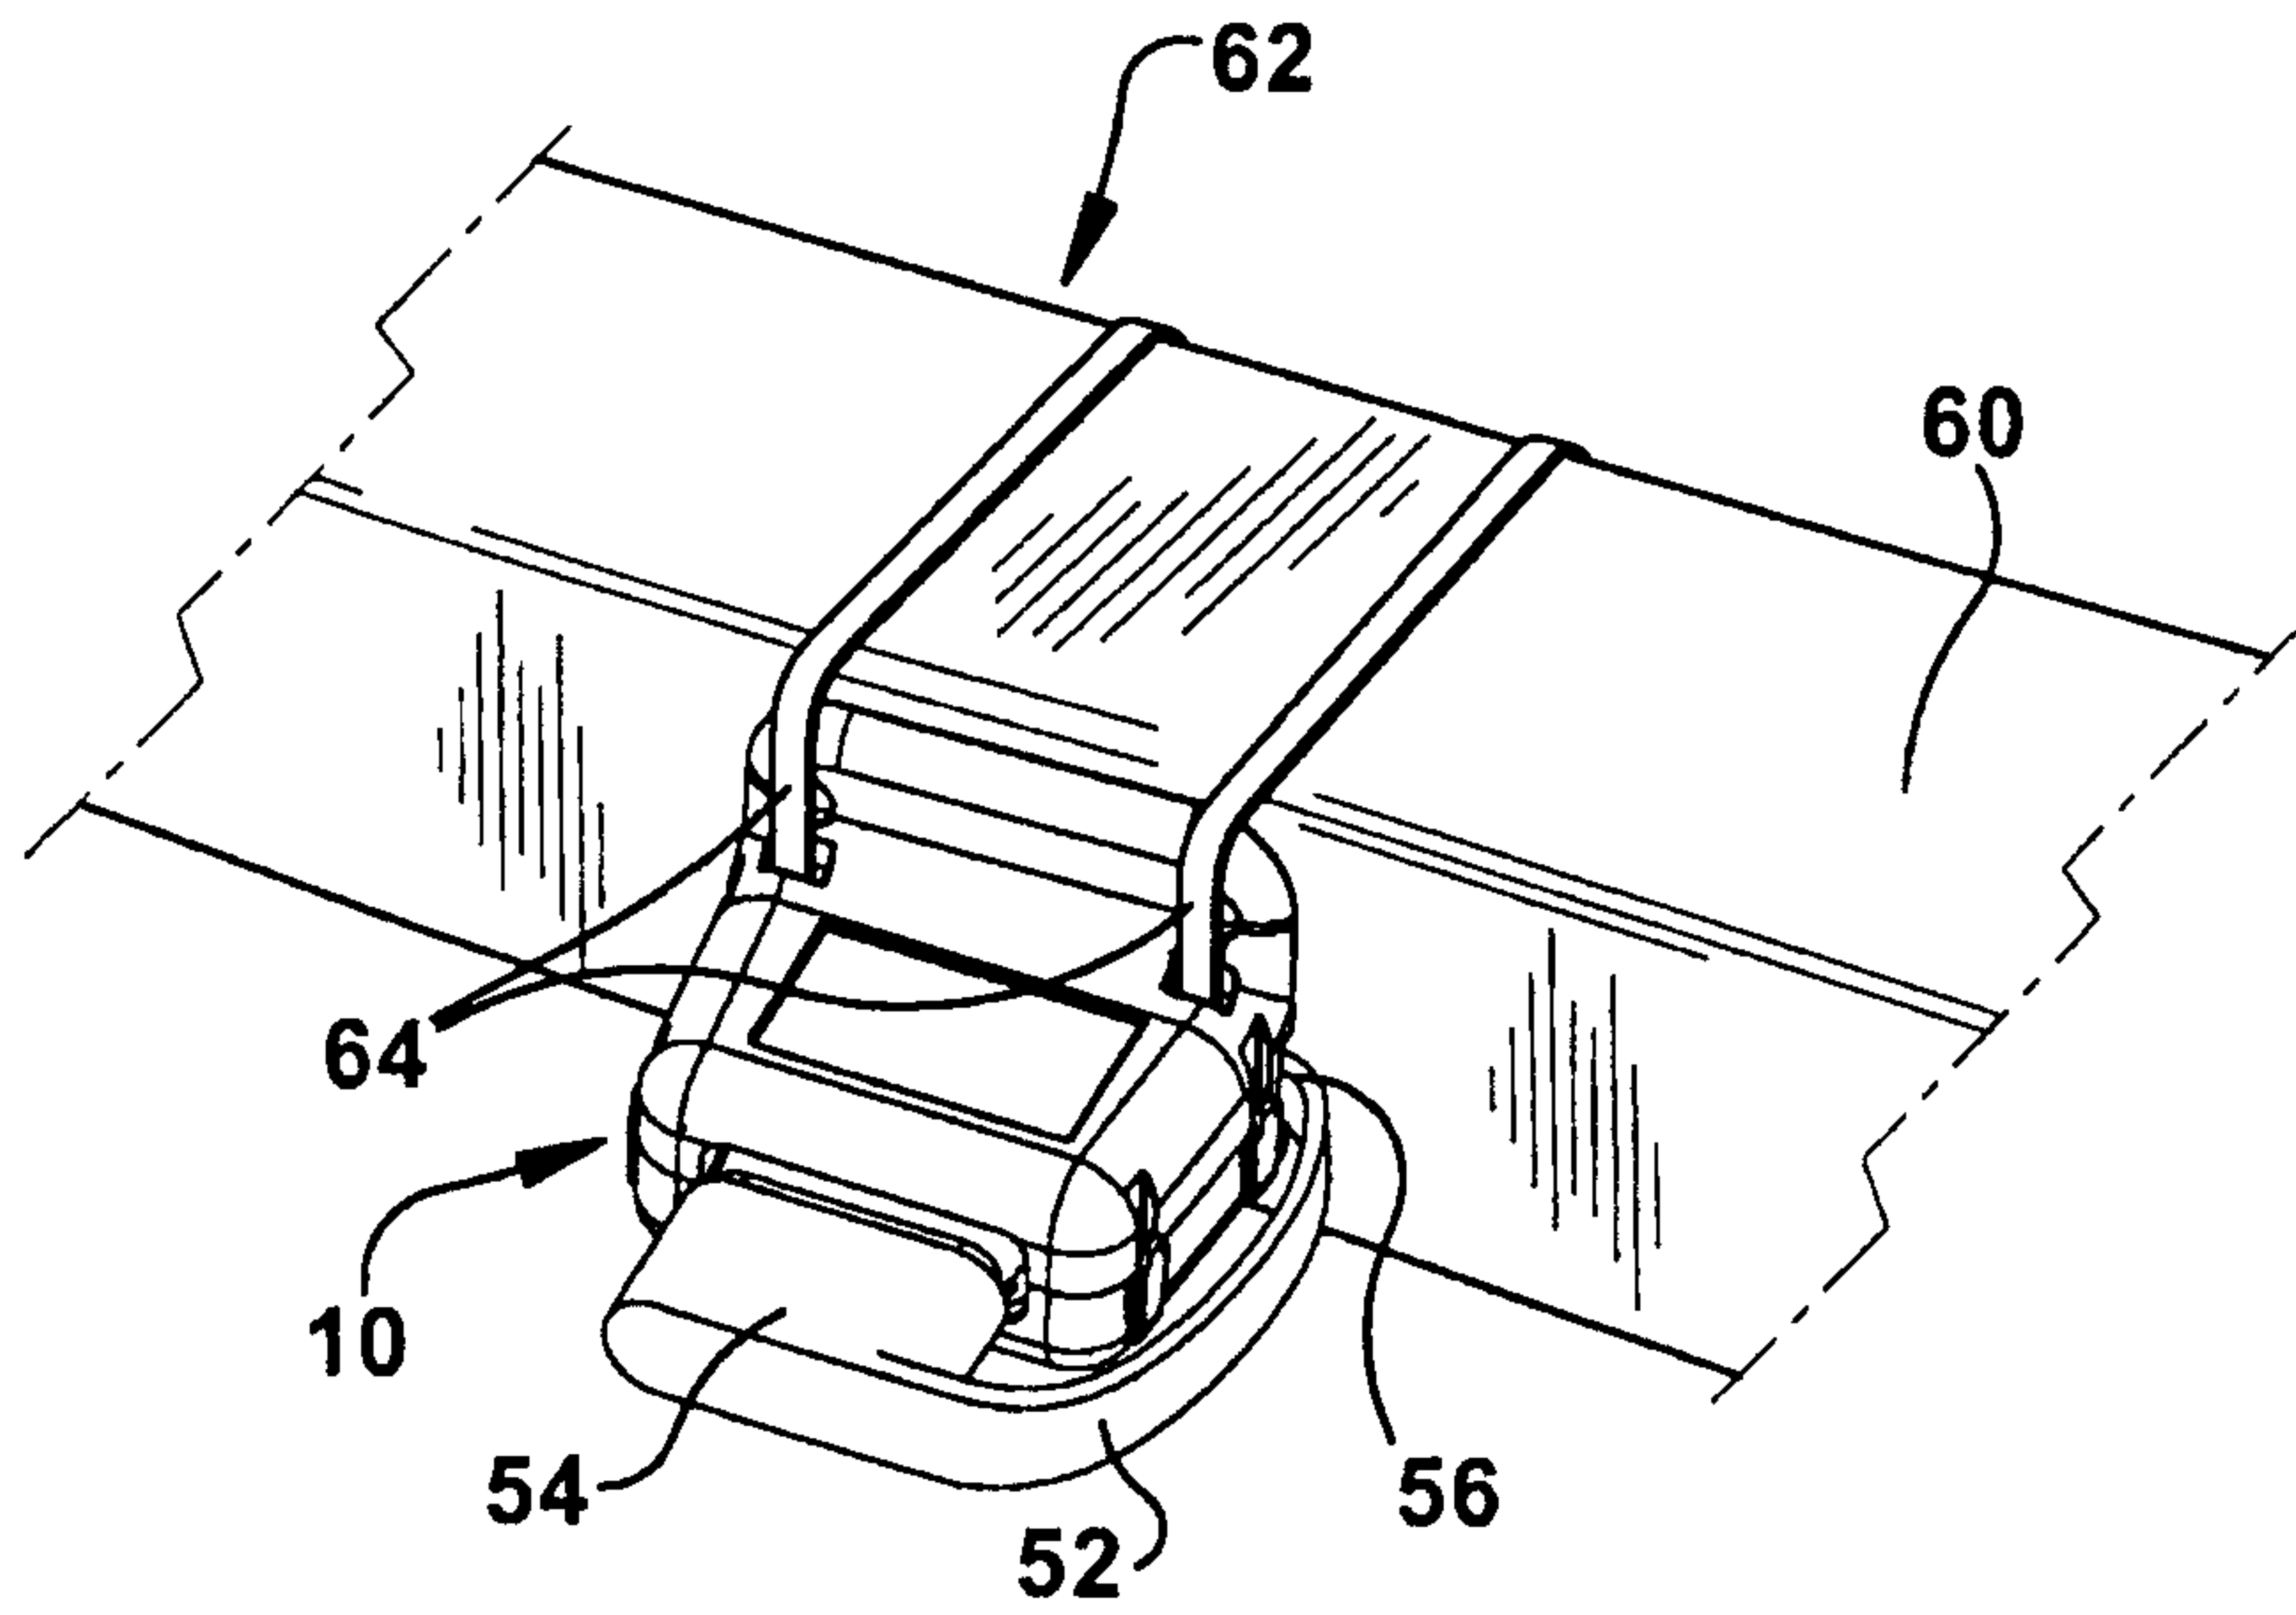


Figure 13

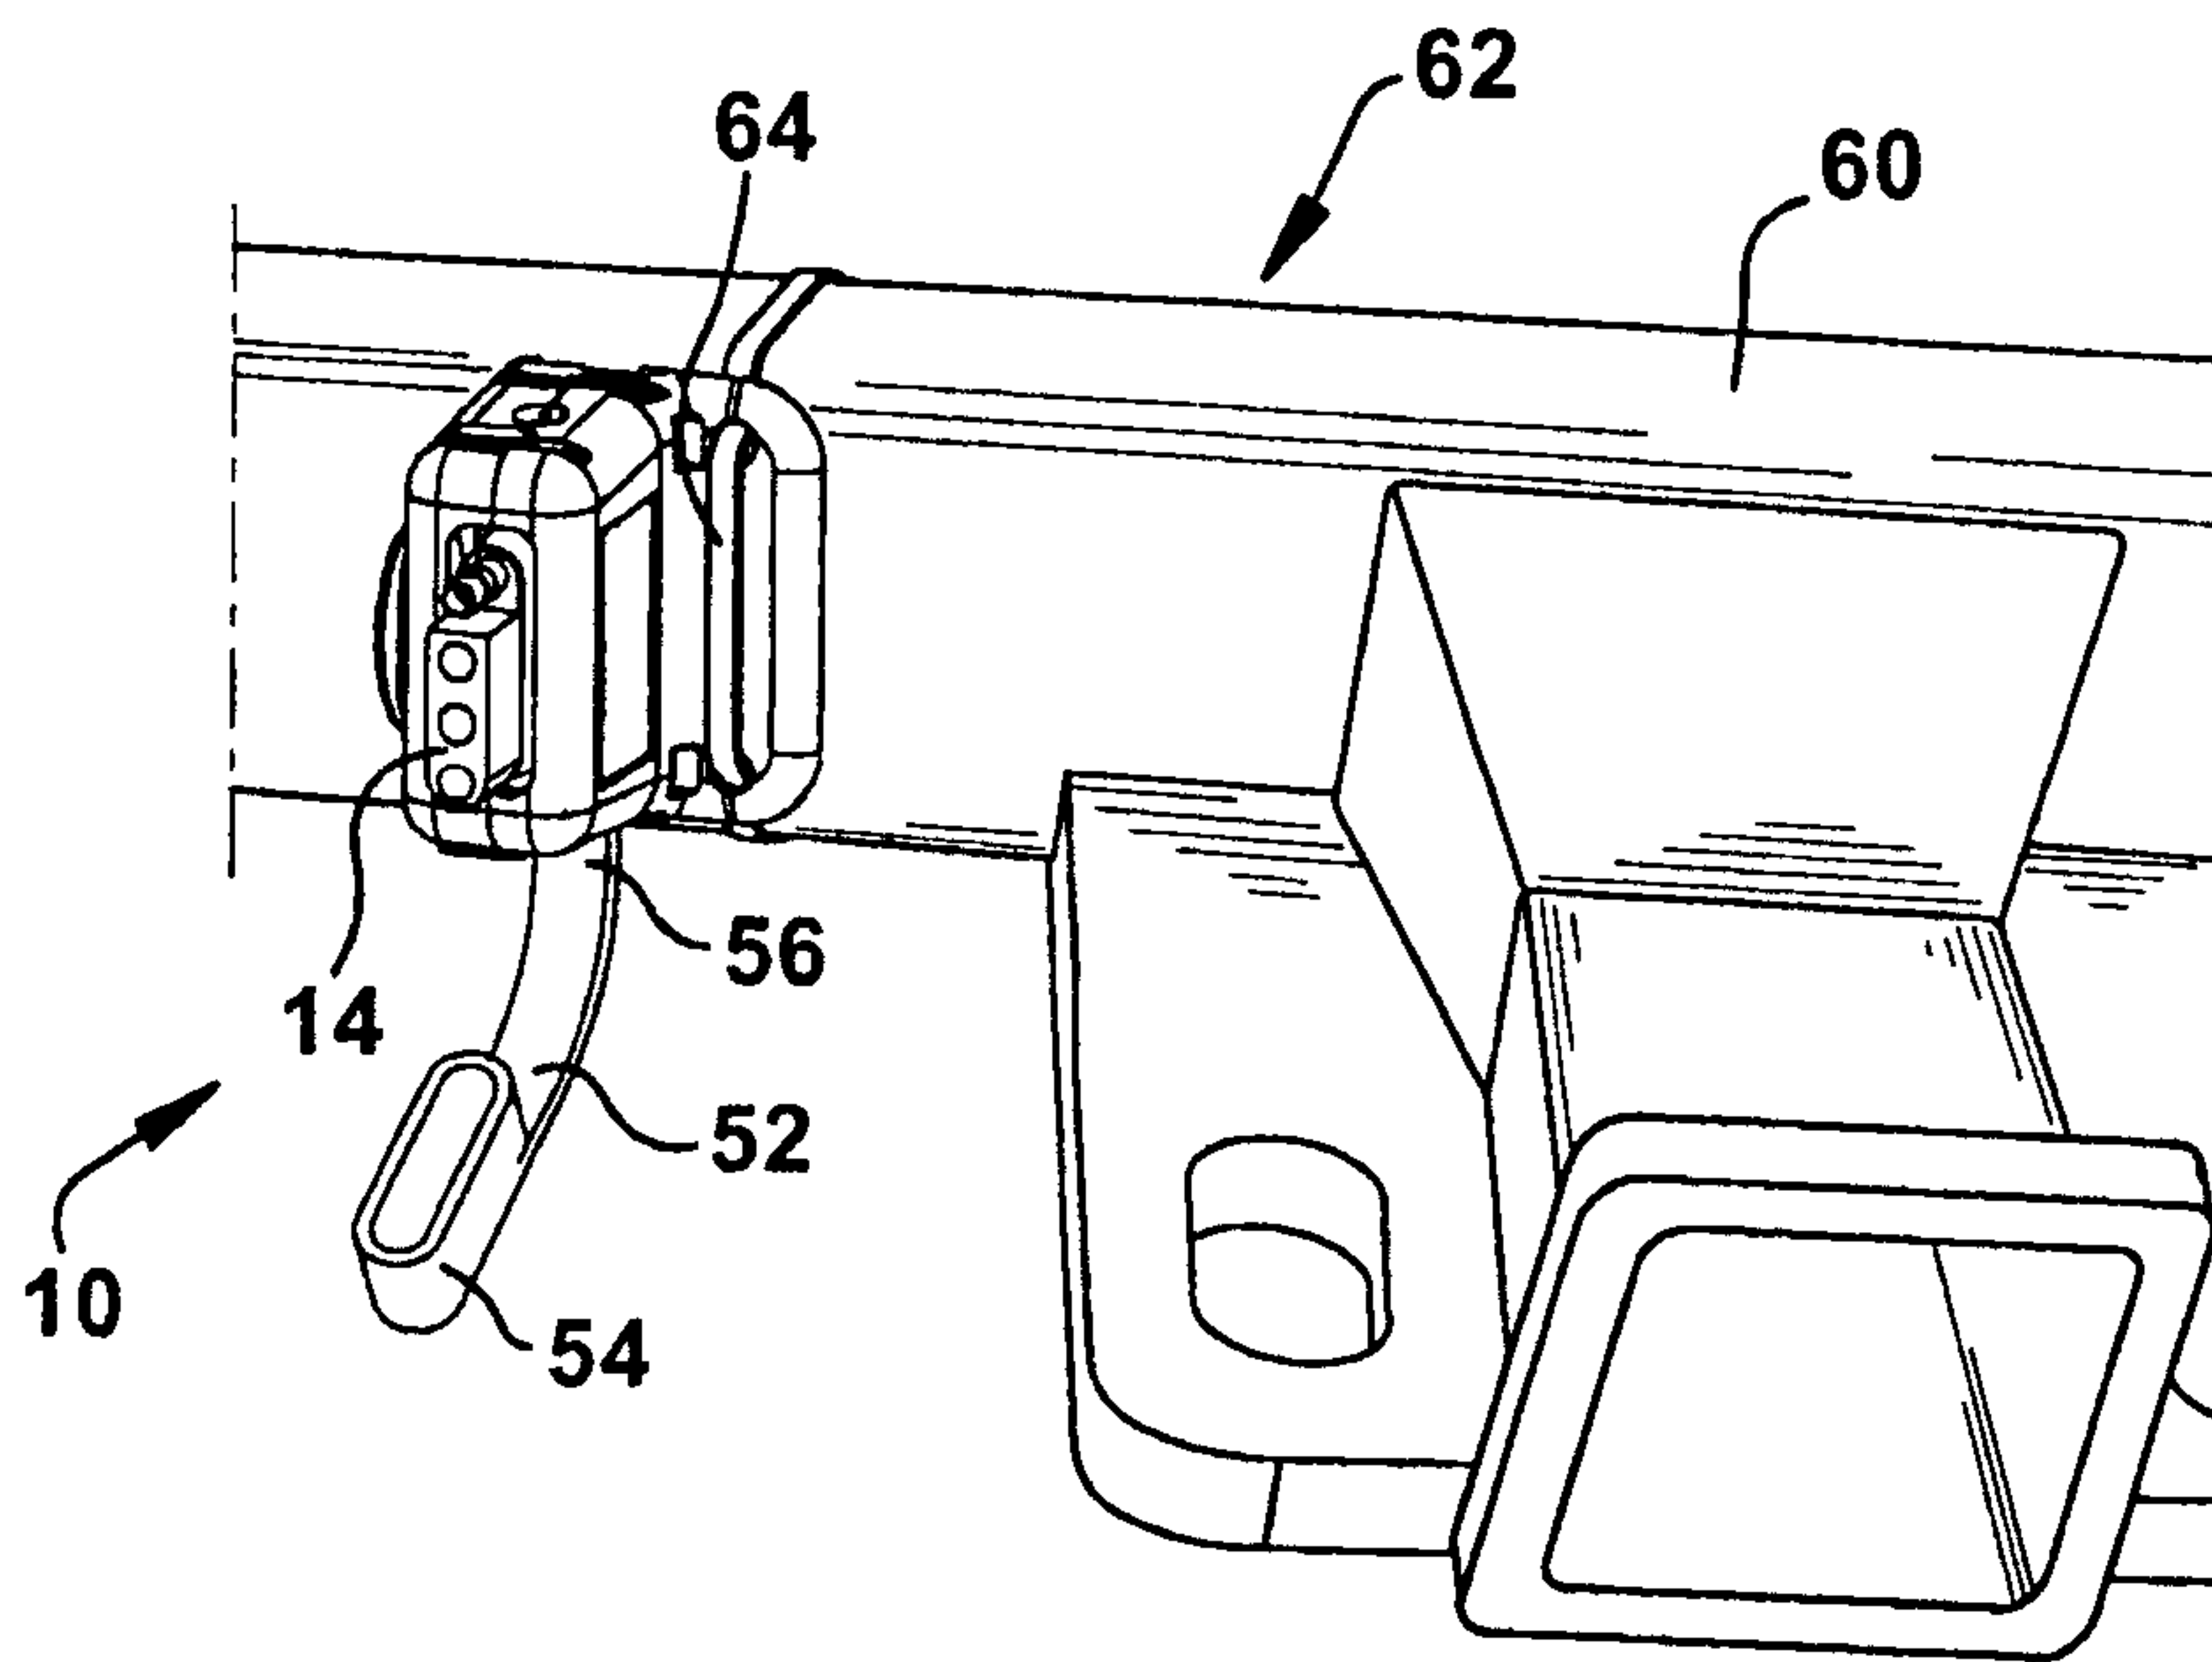


Figure 14

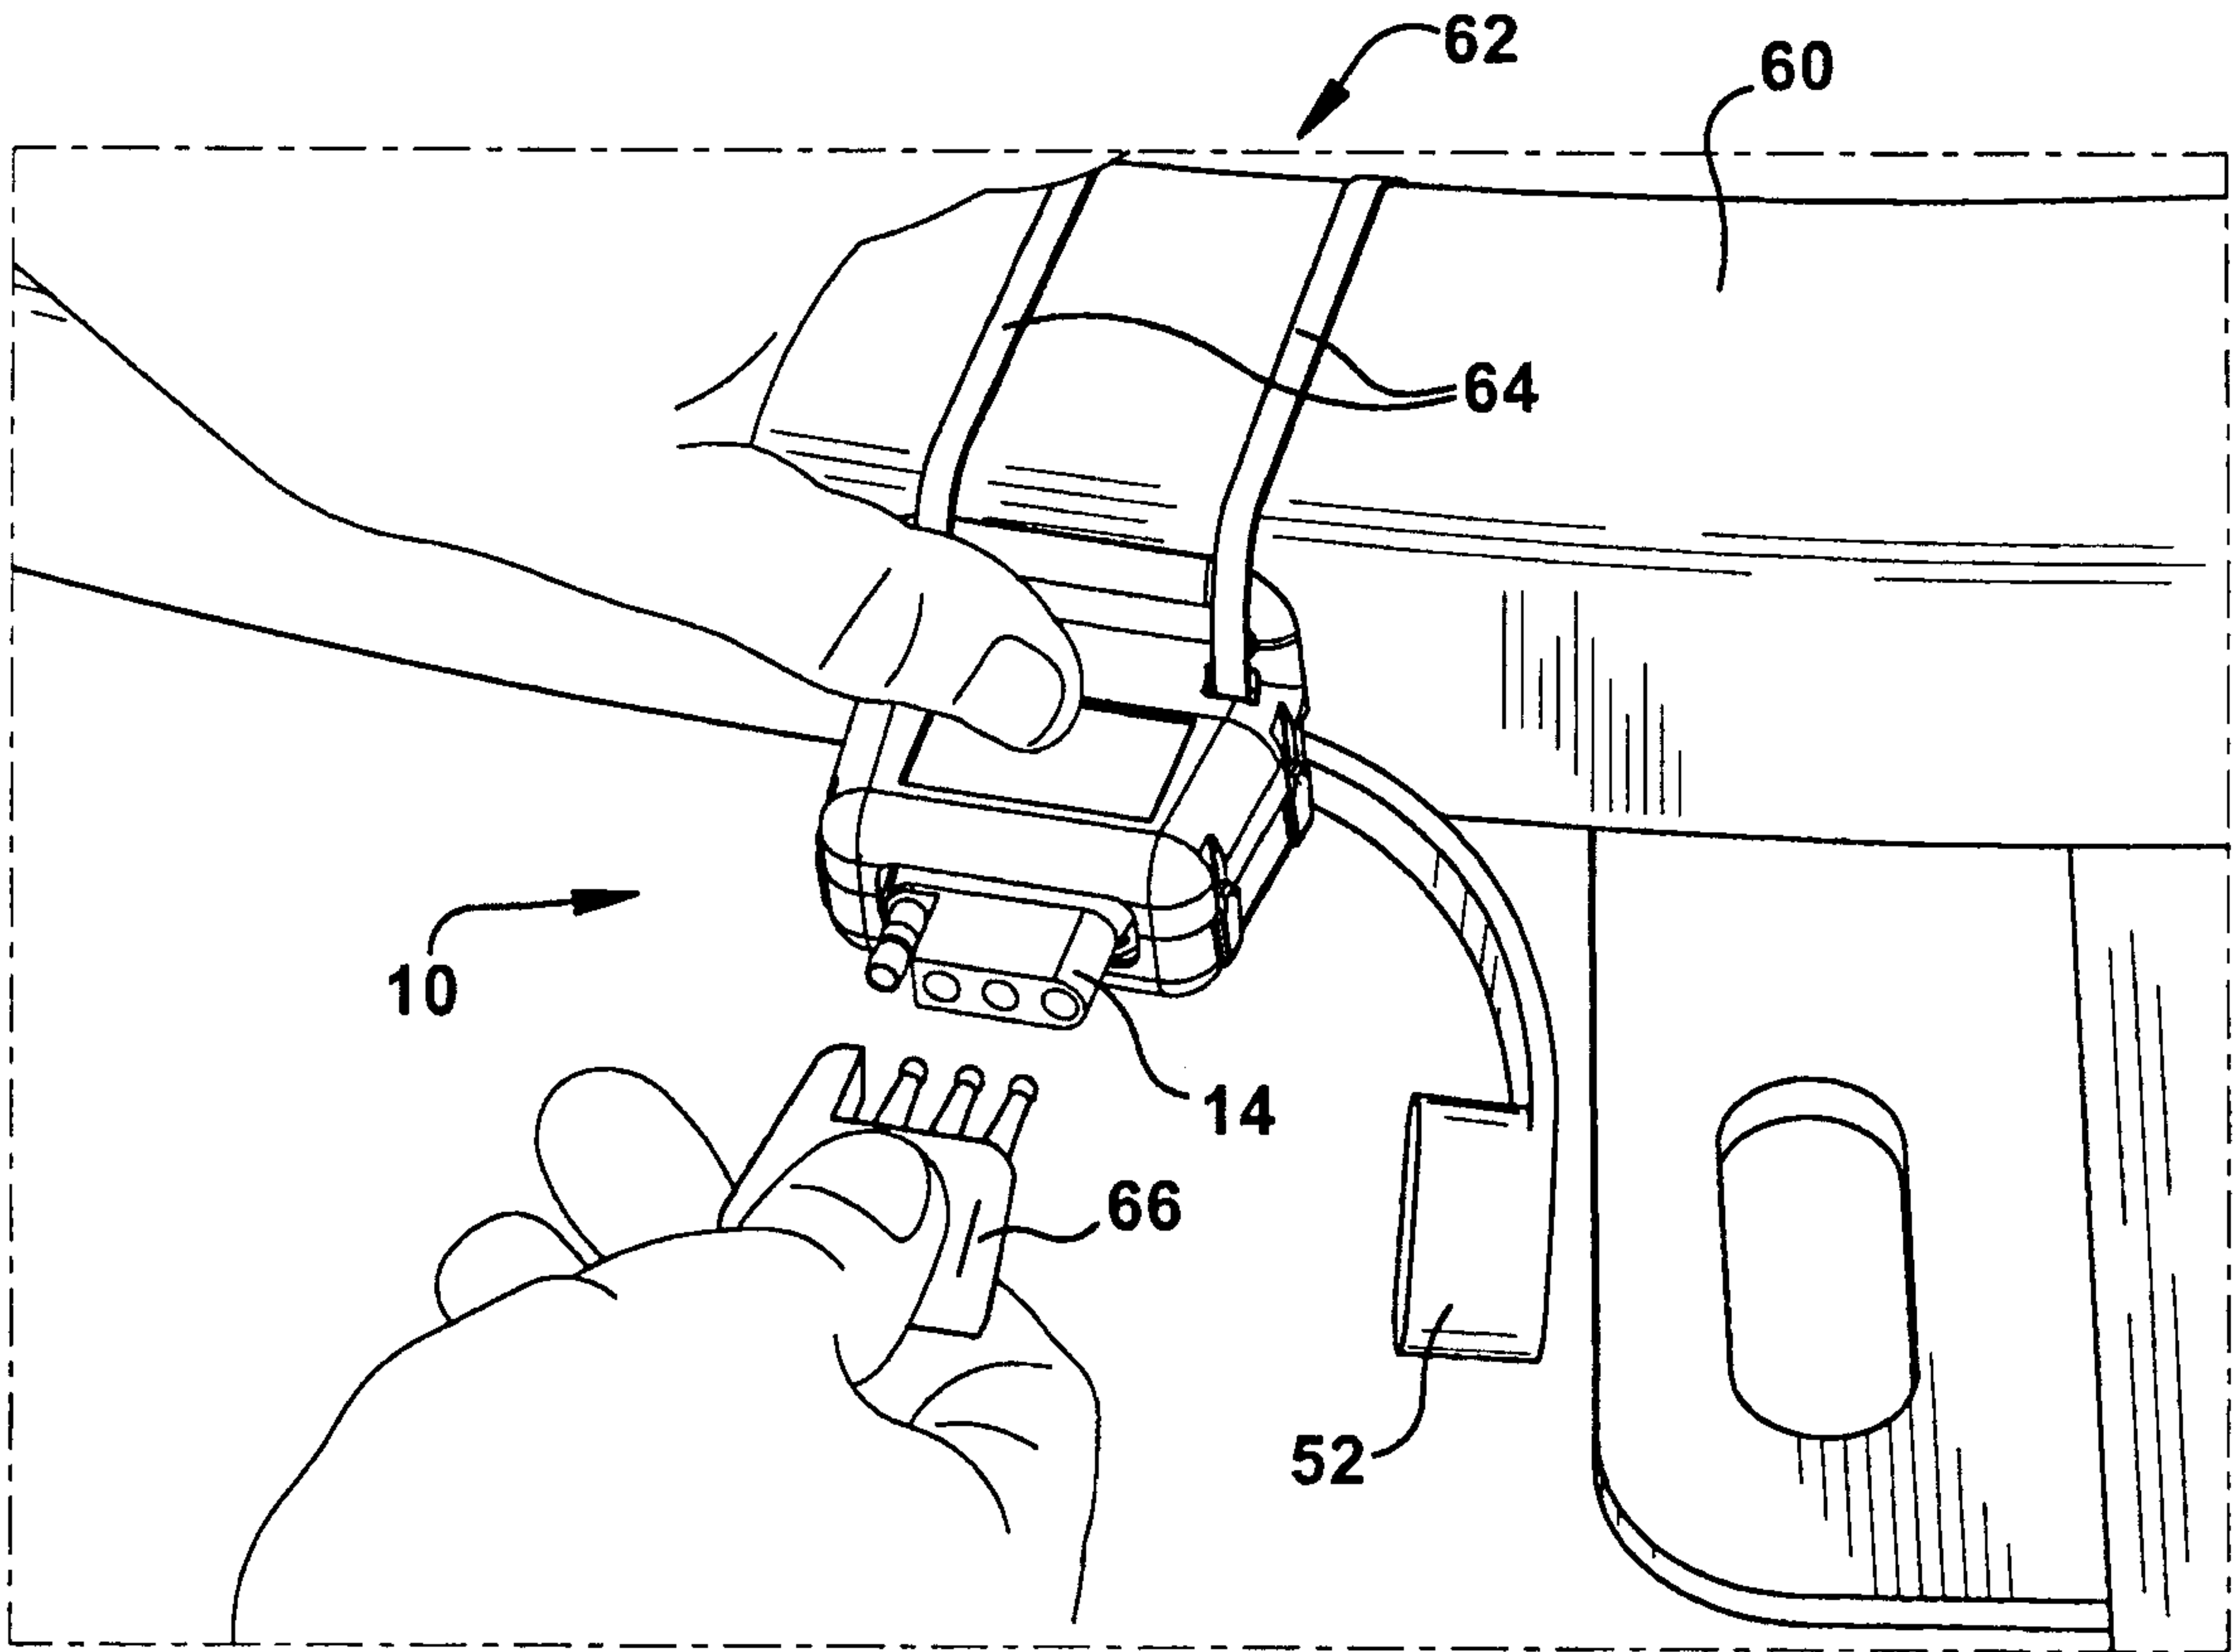


Figure 15

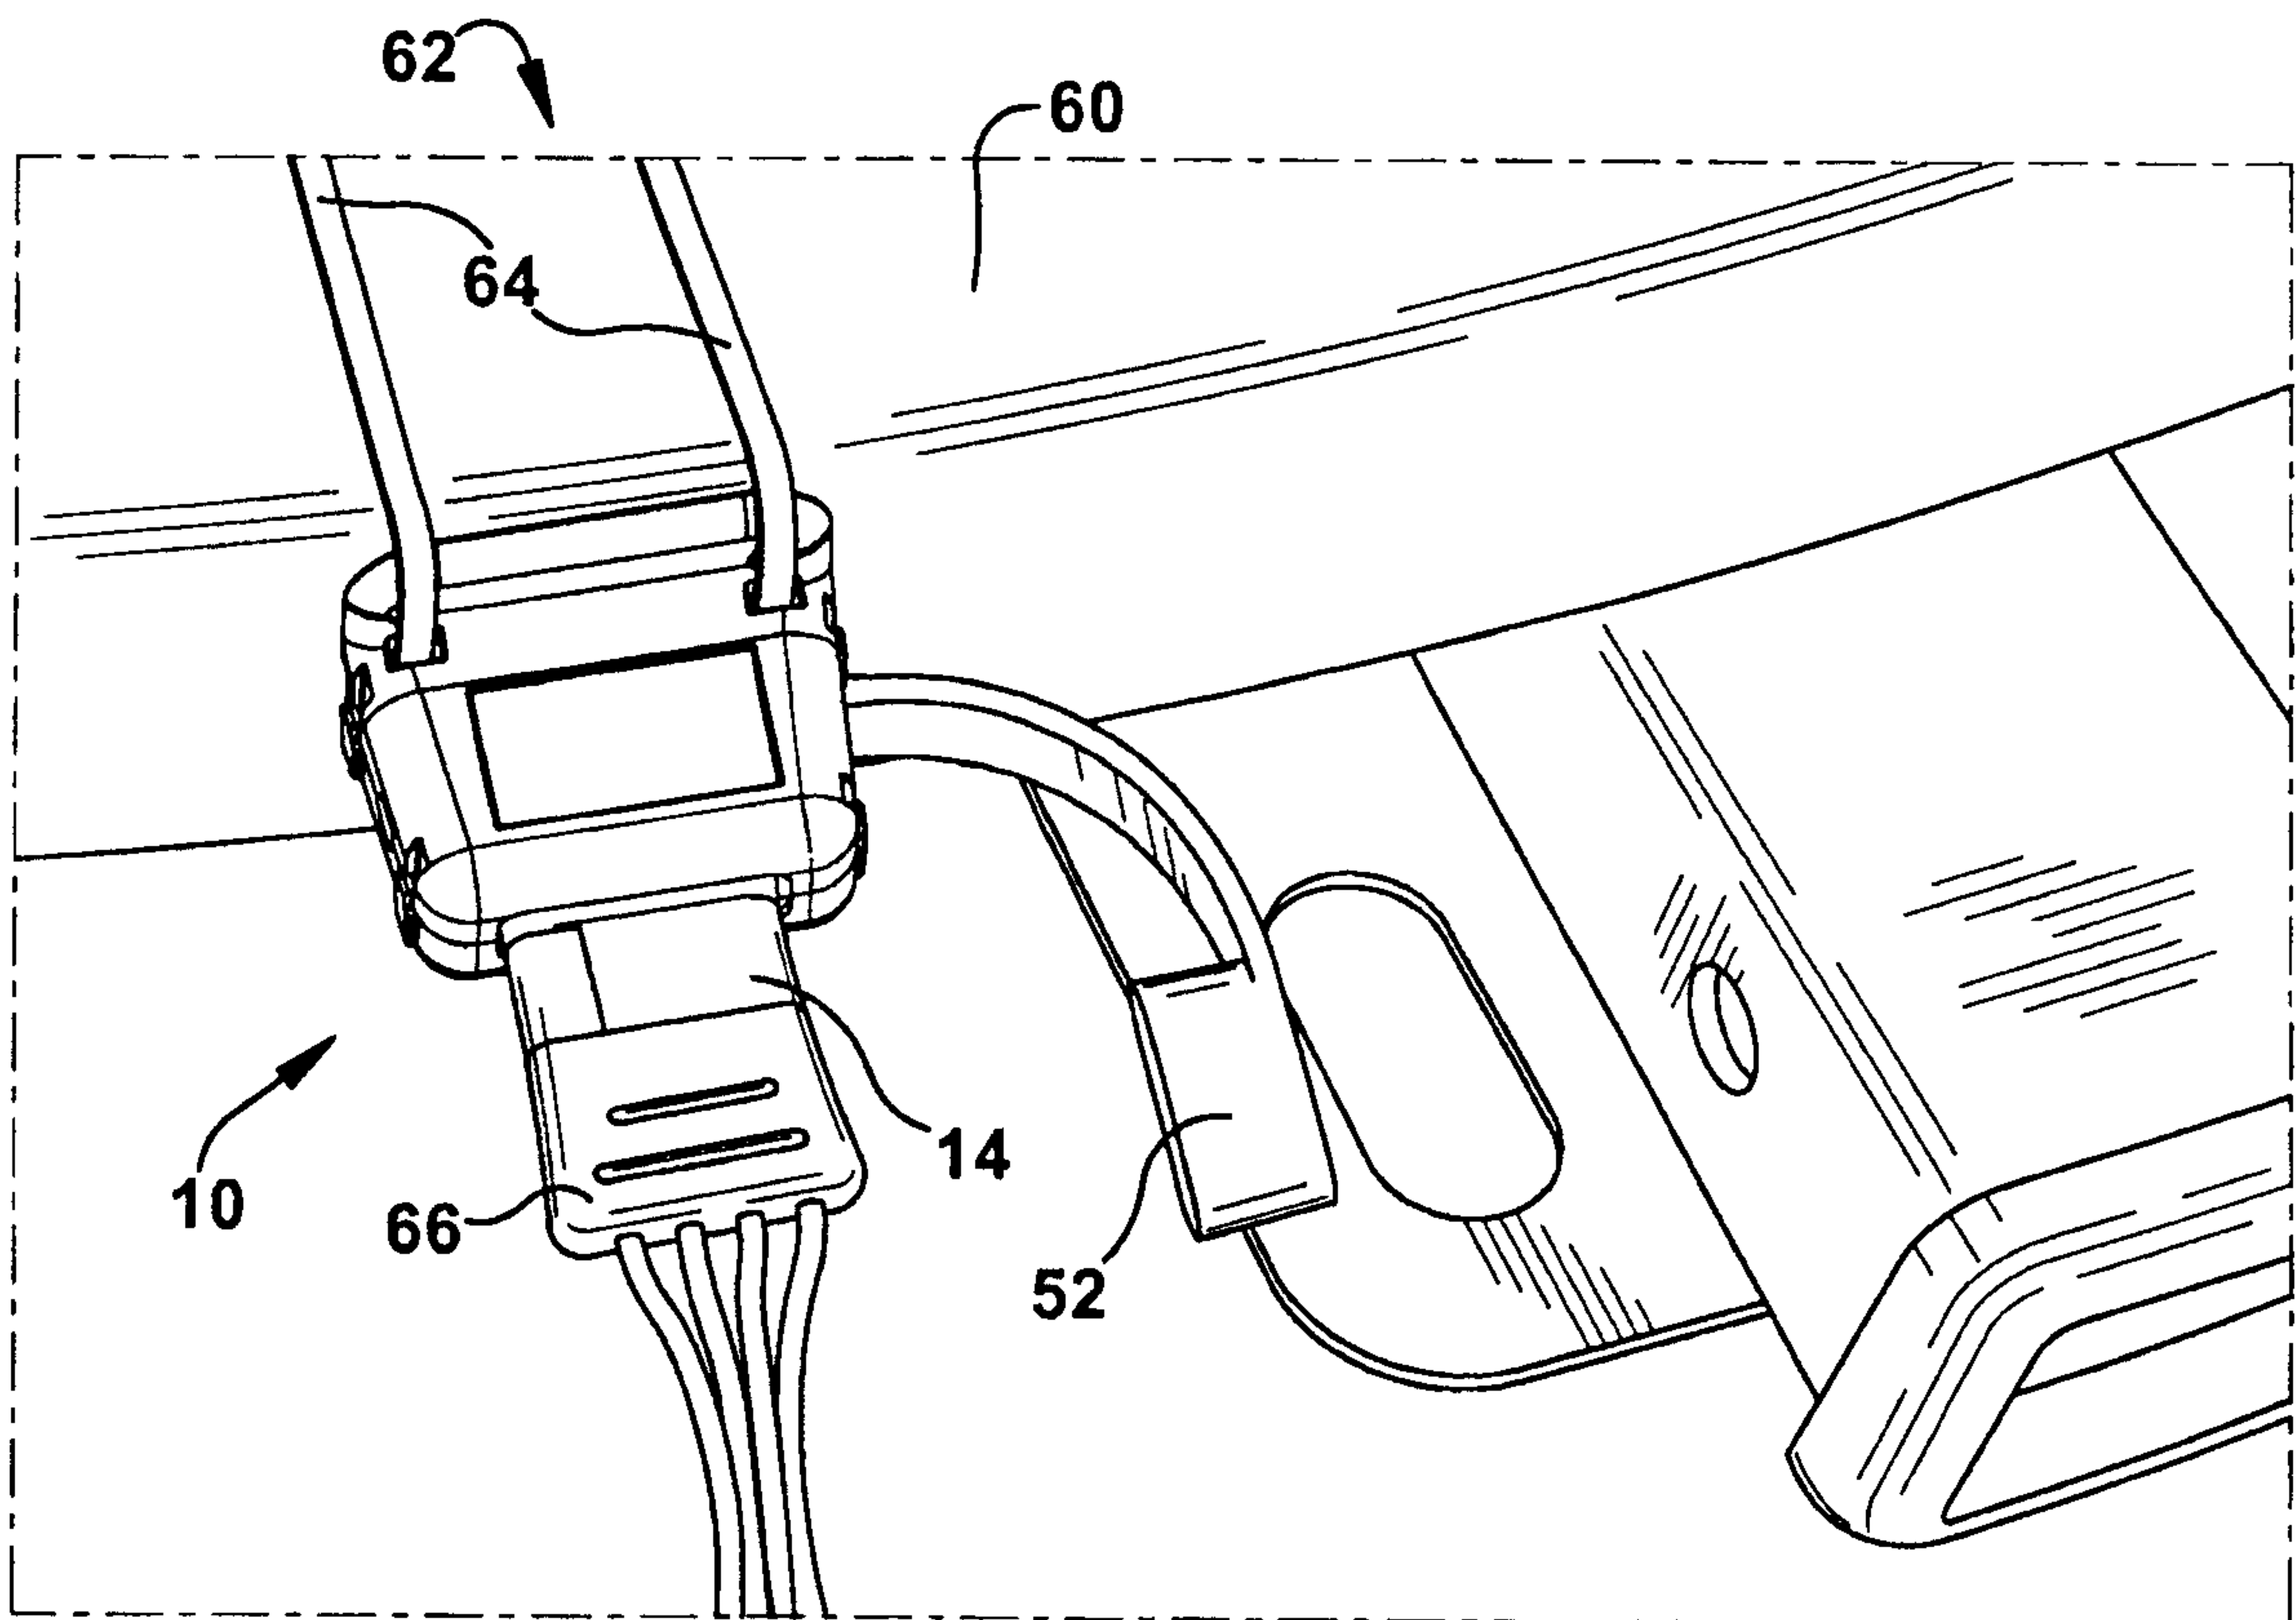


Figure 16

