



(86) **Date de dépôt PCT/PCT Filing Date:** 2014/06/26
(87) **Date publication PCT/PCT Publication Date:** 2015/01/15
(85) **Entrée phase nationale/National Entry:** 2016/01/07
(86) **N° demande PCT/PCT Application No.:** AT 2014/000133
(87) **N° publication PCT/PCT Publication No.:** 2015/003196
(30) **Priorité/Priority:** 2013/07/11 (AT A 574/2013)

(51) **Cl.Int./Int.Cl.** **B61B 12/00** (2006.01)


(71) **Demandeur/Applicant:**
INNOVA PATENT GMBH, AT

(72) **Inventeurs/Inventors:**
SUTTER, JOSEF, AT;
LINDER, STEFAN, AT;
FISCHER, HARALD, AT

(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : DISPOSITIF PERMETTANT DE REMPLACER DES BATTERIES DE GALETS**

(54) **Title: DEVICE FOR REPLACING ROLLER SETS**

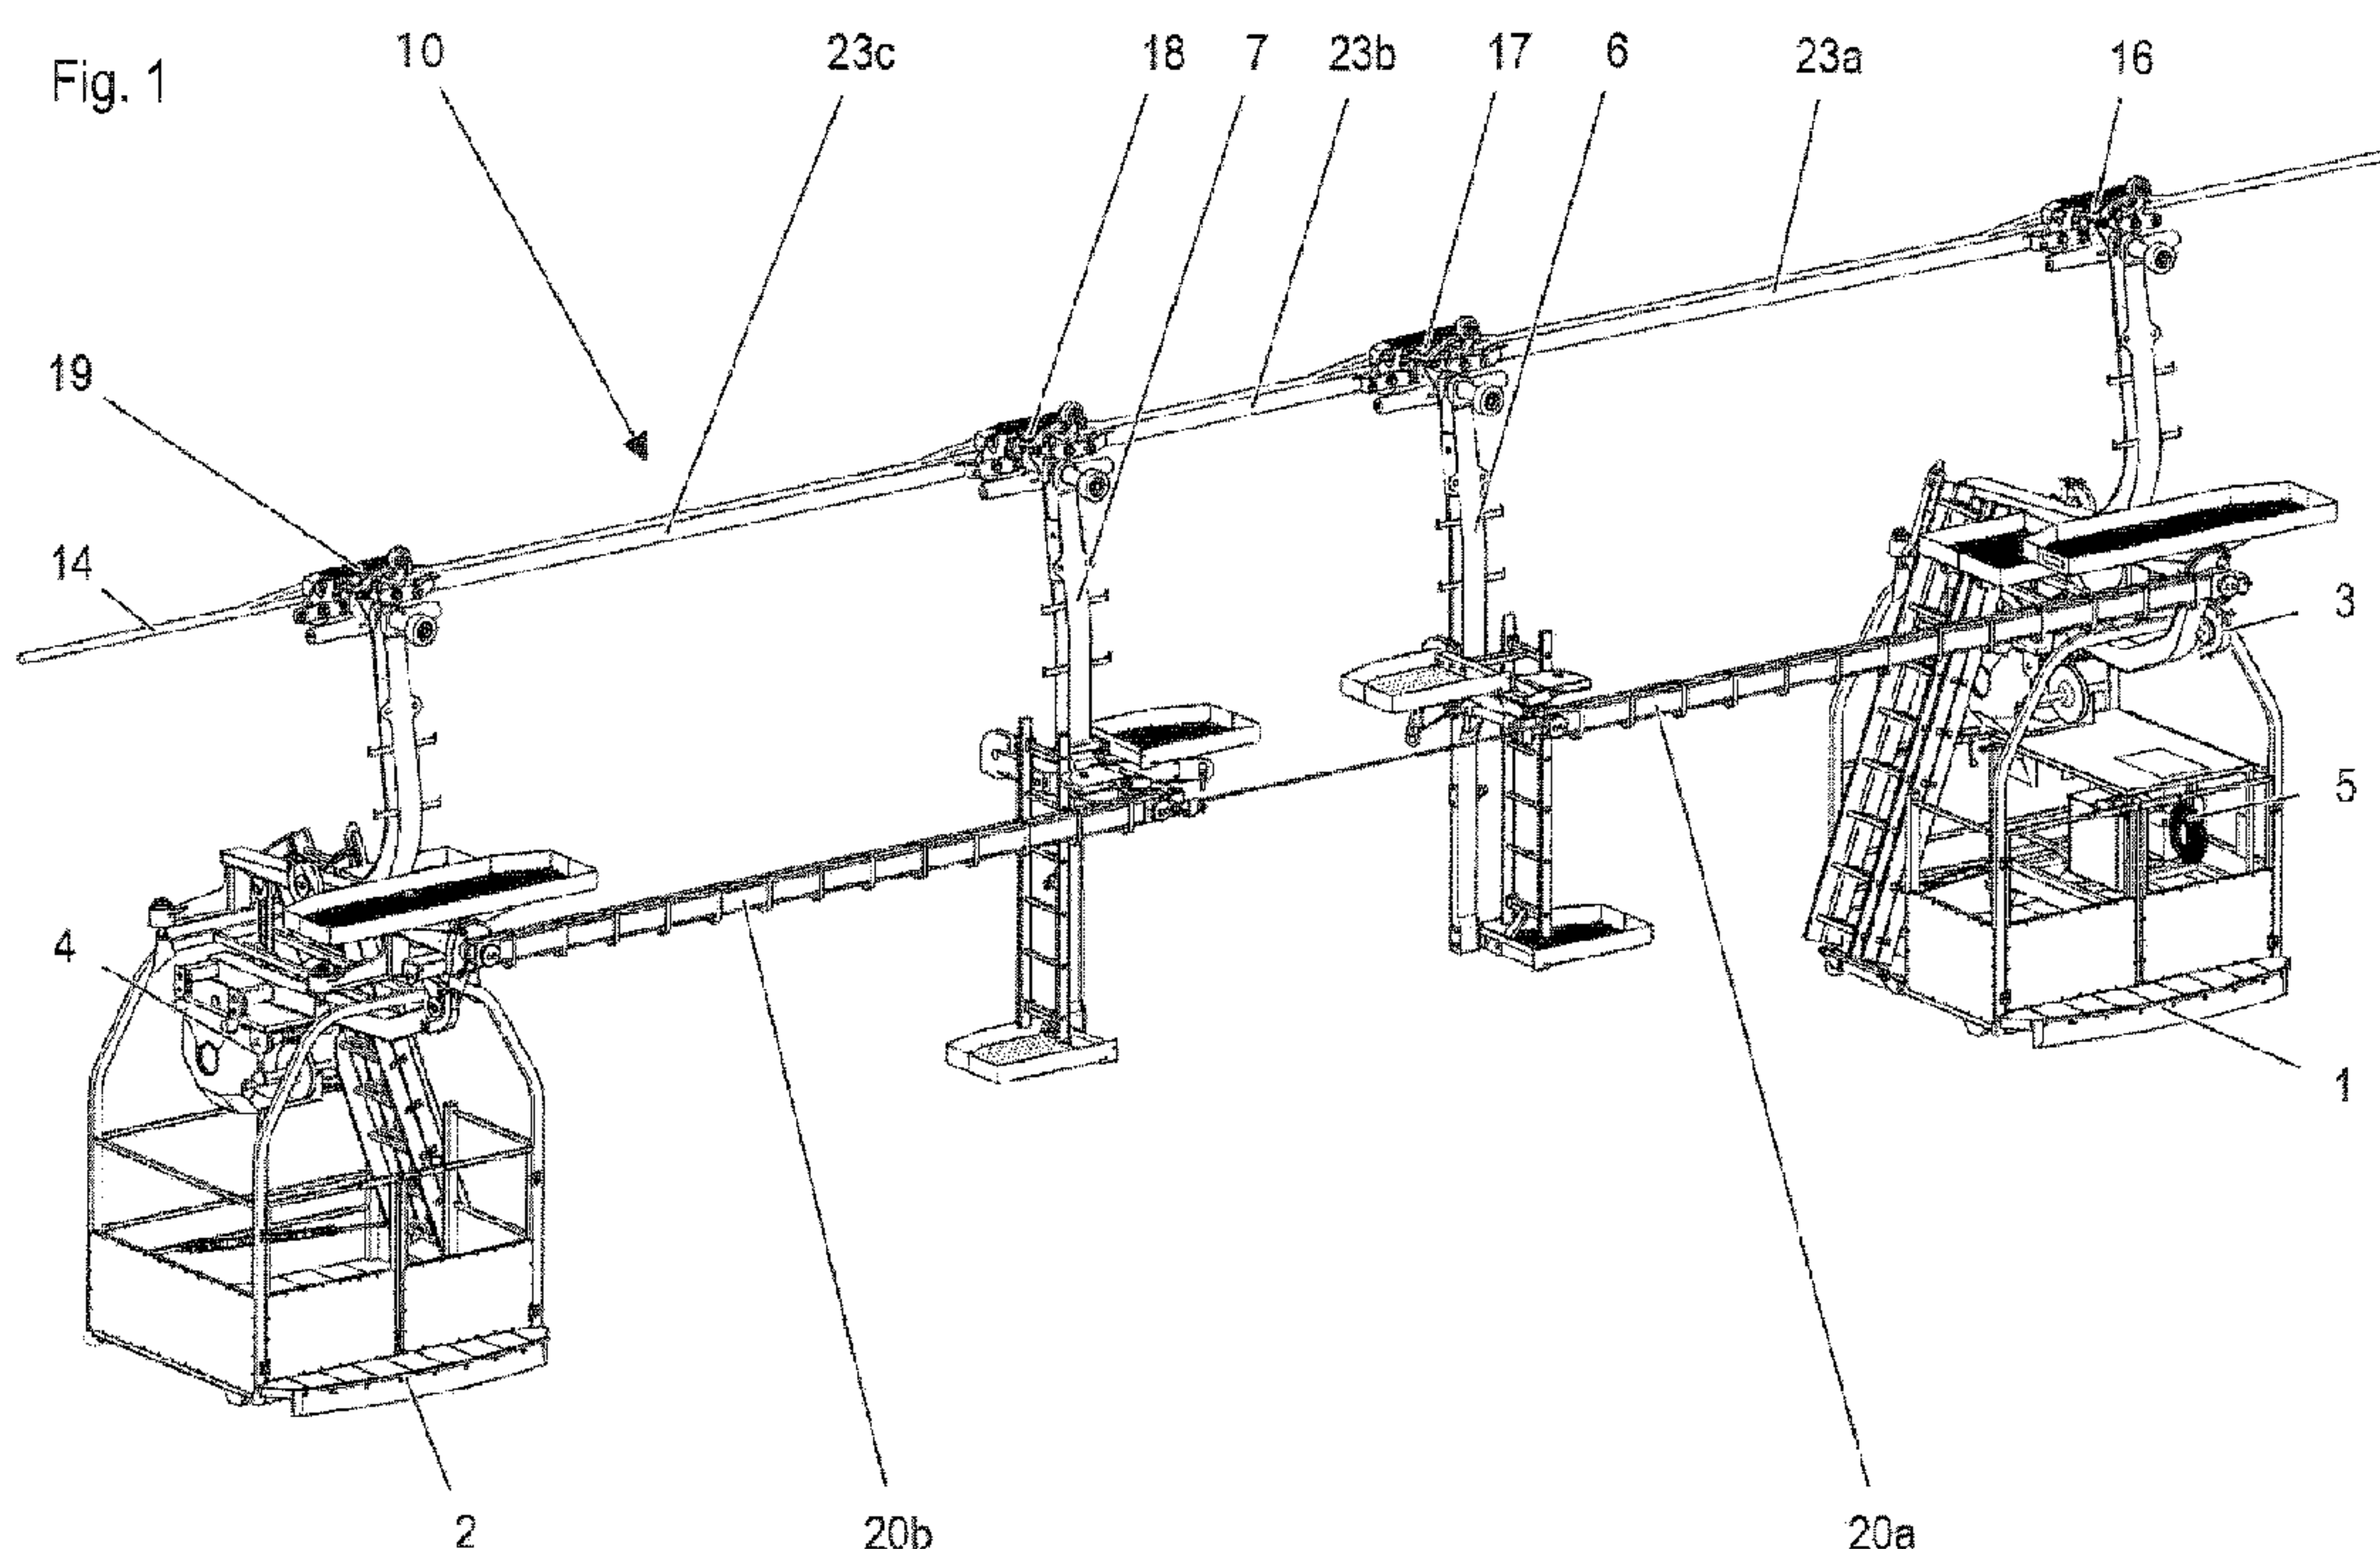

(57) **Abrégé/Abstract:**

The invention relates to a device for replacing roller sets (15) on pylons (13) of cable cars, which device comprises a replacing vehicle (10) which can be moved along the cable (14) of the cable car and at least two winches (3, 4) having cables (8, 9) by which a roller set (15) to be replaced can be lowered and a new roller set (15) can be raised. The replacing vehicle (10) comprises at least two interconnected vehicles (1, 2, 6, 7) which by way of clamps (16 to 19) are connected to the cable (14).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges

Eigentum

Internationales Büro

(43) Internationales

Veröffentlichungsdatum

15. Januar 2015 (15.01.2015)



(10) Internationale Veröffentlichungsnummer

WO 2015/003196 A1

(51) Internationale Patentklassifikation:

B61B 12/00 (2006.01)

(21) Internationales Aktenzeichen: PCT/AT2014/000133

(22) Internationales Anmeldedatum:

26. Juni 2014 (26.06.2014)

(25) Einreichungssprache:

Deutsch

(26) Veröffentlichungssprache:

Deutsch

(30) Angaben zur Priorität:

A 574/2013

11. Juli 2013 (11.07.2013)

AT

(71) Anmelder: **INNOVA PATENT GMBH** [AT/AT];

Rickenbacherstraße 8-10, A-6960 Wolfurt (AT).

(72) Erfinder: **SUTTER, Josef**; Fluh 16, AT-6900 Bregenz

(AT). **LINDER, Stefan**; Steinstr. 6b, AT-6845 Hohenems

(AT). **FISCHER, Harald**; Feldweg 4b, AT-6922 Wolfurt

(AT).

(74) Anwalt: **BEER & PARTNER PATENTANWÄLTE**

KG; Lindengasse 8, A-1070 Wien (AT).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für

jede verfügbare nationale Schutzrechtsart): AE, AG, AL,

AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für


jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

(54) Title: DEVICE FOR REPLACING ROLLER SETS

(54) Bezeichnung : VORRICHTUNG ZUM AUSWECHSELN VON ROLLENBATTERIEN

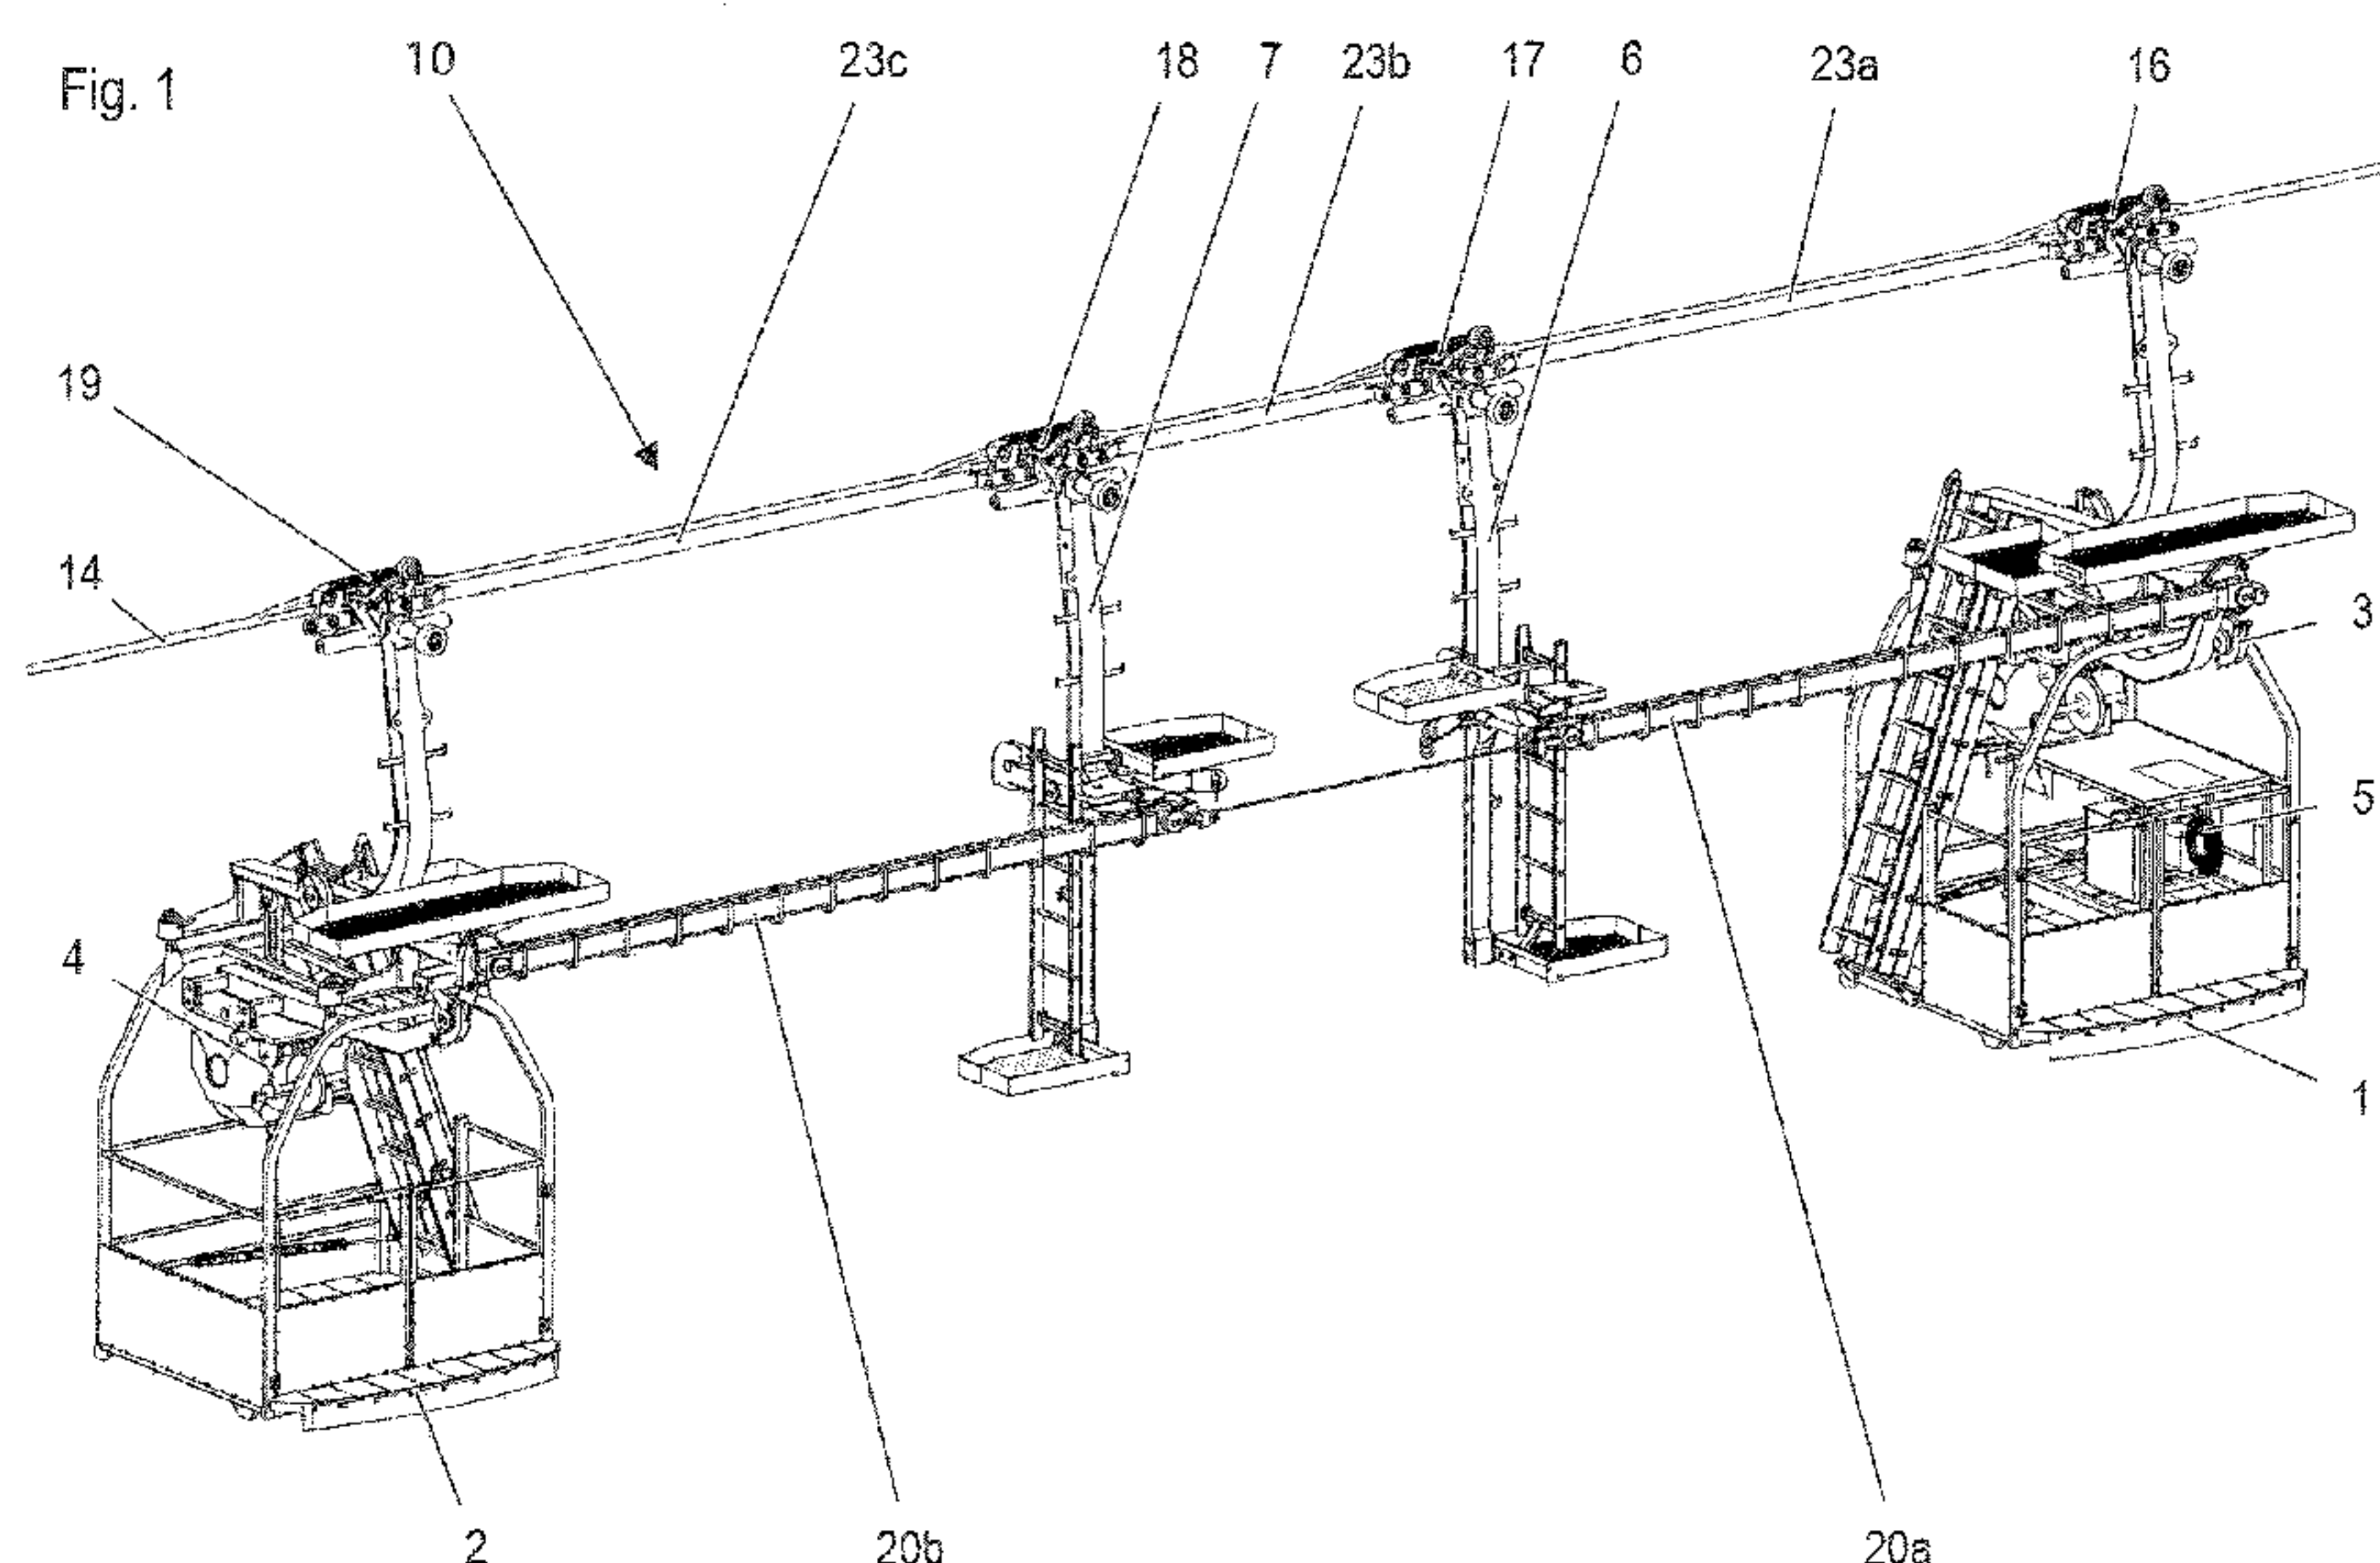

(57) Abstract: The invention relates to a device for replacing roller sets (15) on pylons (13) of cable cars, which device comprises a replacing vehicle (10) which can be moved along the cable (14) of the cable car and at least two winches (3, 4) having cables (8, 9) by which a roller set (15) to be replaced can be lowered and a new roller set (15) can be raised. The replacing vehicle (10) comprises at least two interconnected vehicles (1, 2, 6, 7) which by way of clamps (16 to 19) are connected to the cable (14).

(57) Zusammenfassung: Eine Vorrichtung zum Auswechseln von Rollenbatterien (15) an Stützen (13) von Seilbahnen weist ein Tauschfahrzeug (10) auf, das am Seil (14) der Seilbahn verfahrbar ist, und mit wenigstens

[Fortsetzung auf der nächsten Seite]

WO 2015/003196 A1

WO 2015/003196 A1

zwei Winden (3, 4) mit Seilen (8, 9), mit denen eine auszuwechselnde Rollenbatterie (15) abgesenkt und eine neue Rollenbatterie (15) aufgehoben werden kann. Das Tauschfahrzeug (10) weist wenigstens zwei miteinander verbundene Fahrzeuge (1, 2, 6, 7) auf, die über Klemmen (16 bis 19) mit dem Seil (14) verbunden sind.

WO 2015/003196

PCT/AT2014/000133

Device for replacing roller sets

The invention relates to a device for replacing roller sets on pylons of cable cars comprising a replacing
5 vehicle which can be moved along the cable of the cable car and comprising at least two winches with cables, by means of which a roller set to be replaced can be lowered and a new roller set raised.

10 The invention further relates to a method of replacing roller sets on pylons of cable car systems, in which a replacing vehicle is driven to the pylon and then a cable running on the roller set is raised from the roller set using the replacing vehicle and the roller
15 set is subsequently removed.

A device of this kind and a method of this kind are known from EP 2 301 819 A. The disadvantage of the method described there, however, is that the old and
20 new set sets have to be placed on the ground beneath the pylon, something that is not possible or is only possible with difficulty, for example, in heavily built-up urban areas, over water, on steep terrain, etc.

25

The problem addressed by the invention is therefore that of creating a device and a method in which this is not necessary.

30 This problem is solved with a device of the kind referred to above, in that the replacing vehicle comprises at least two interconnected vehicles which are connected to the cable by way of grips.

35 This problem is solved with a method of the kind referred to above, in that in the case of the roller set suspended from the replacing vehicle, an assembly roller set is mounted on the pylon and the cable is placed onto the assembly roller set, the replacing

WO 2015/003196

- 6 -

PCT/AT2014/000133

swivel carriers 32 with the assembly roller set 21 mounted thereon, e.g. by means of hydraulic cylinders, pivoted backwards. The cable winch cables 8, 9 are placed on the assembly carrier 22 via deflection
5 rollers 39, 40 and secured to the roller set 15 being replaced (Fig. 9).

The old roller set 15 being replaced can now be removed and lowered in two stages by approx. 7 m, for example,
10 by means of the cables 8, 9 and belt suspension units 41, 42. In the first stage, the roller set 15 is lowered by approx. 3.5 m with the help of the winch cables 8, 9 and secured to the assembly carrier 22 using the belt suspension units 41, 42 which each have
15 a locating ring 43, 44 with carabiner hook in the center. In the second stage, the winch cables 8, 9 are released from the roller set 15 and secured to the center locating rings 43, 44 of the belt suspension unit 41, 42. The roller set 15 is subsequently lowered
20 a further 3.5 m and then secured by the upper ends of the belt suspension unit 41, 42 to the assembly carrier 22, as shown in Fig. 11.

The assembly roller set 21 suspended from the swivel
25 carrier 23 is then pivoted between the belt suspension units 41, 42 below the cross-head 31 (Fig. 12), drawn up by means of the cables 8, 9 (Fig. 13) and mounted on the cross-head 31. The conveying cable 14 can then be lowered using the block and tackle 32 to the assembly
30 roller set 21, so that the cable car is ready for operation again.

The old roller set 15 is then drawn up into the transport position with the help of the winch cables 8,
35 9 and the belt suspension units 41, 42 in two stages. The first stage involves the winch cables 8, 9 running via the deflection rollers 39, 40 on the assembly carrier 22 and being secured to the center locating

WO 2015/003196

- 7 -

PCT/AT2014/000133

rings 43, 44 of the belt suspension units 41, 42. The roller set can therefore be drawn up by approx. 3.5 m and secured using the center carabiner hooks of the belt suspension units 41, 42 to the assembly carrier 22. The second stage involves the winch cables 8, 9 being laid within the replacing vehicle 10 and over the cable pulleys 27 of the hinged carriers 24 and the hinged carriers 24 being pivoted into the lower position. The roller set 15 is then suspended on the winch cables 8, 9 and drawn up further into the transport position (Fig. 14).

This is followed by the removal of the old roller set 15 to the lorry or storage site, as shown in Fig. 15, in that the replacing vehicle 10 travels with the old roller set 15 along the cable way above the lorry or storage site. At that point, the old roller set 15 is lowered to the ground using the cables 8, 9 and a new roller set 15 is drawn up.

20

With the normal cable car drive, the replacing vehicle 10 travels with the new roller set 15 to the pylon 13 concerned, as shown in Fig. 15. The roller set 15 hangs from the winch cables which are placed within the replacing vehicle 10 and run via the cable pulleys 27 of the hinged carriers 24. The subsequent lowering of the roller set 15 takes place in two stages as already described above by 7 m, for example, with the help of the winch cables 8, 9 and the belt suspension units 41, 42, until the roller set 15 is secured by the upper ends of the belt suspension units 41, 42 to the assembly carrier 22.

Using the block and tackle 32, which is again operated via the winch cables 8, 9, the conveying cable 14 is lifted from the assembly roller set 21 with the replacing vehicle 10, the lower block tackle 34 is connected with the retaining sheets 35 to the upper

WO 2015/003196

- 8 -

PCT/AT2014/000133

block tackle 33 and, in addition, the conveying cable 14 secured with round slings 36, 37 straight onto the rocker 38 of the mounting 29. The winch cables 8, 9 are therefore free again.

5

The hinged carriers 23 are pivoted into the vertical position and the swivel carriers 24 pivoted away. The cable winch cables 8, 9 run over the deflection rollers 39, 40 on the assembly carrier 22, so that the assembly roller set 21 can thereby be dismantled and lowered.

After the lowering, the assembly roller set 21 is transferred by means of the round sling 28 to the swivel carrier 23, which was pivoted inwards previously, so that the cable winch cables 8, 9 are free. Following this, the swivel carrier 23 is pivoted outwards again.

The raising of the new roller set 15 takes place with the help of the winch cables 8, 9 and the belt suspension units 41, 42, once again in two stages. In the first stage, the winch cables 8, 9 run over the deflection rollers 39, 40 on the assembly carrier 22 and are secured to the center locating rings 43, 44 of the belt suspension units 41, 42.

Following this, the roller set is drawn up by approx. 3.5 m and then secured to the assembly carrier 22 using the carabiner hooks of the center locating rings 43, 44 of the belt suspension units 41, 42. In the second stage, the winch cables 8, 9 are mounted straight on the roller set 15 again, the roller set 15 is raised up and mounted on the cross-head 31.

The conveying cable 14 is then lowered with the block and tackle 32 onto the newly mounted roller set 15, so that the cable car is once again ready for operation. The block and tackle 32 is then removed.

WO 2015/003196

- 9 -

PCT/AT2014/000133

In order to dismantle the assembly carrier 22, the cable winch cables 8, 9 are laid over the two deflection pulleys 11, 12 now mounted once again on the mounting 29 or else the rocker 38 thereof, so that they
5 can be used to dismantle and lower the assembly carrier 22. The assembly carrier 22 is then transferred by means of a round sling to the swivel carrier 23, so that the cable winch cables 8, 9 are free. The hinged carriers 24 are then moved into the horizontal
10 position.

The cable winch cables 8, 9 are laid within the replacing vehicle 10 and the assembly roller set 21 and the assembly carrier 22 are secured to them.

15 The replacing vehicle 10 then travels with the assembly roller set 21 and the assembly carrier 22 along the cable way above the lorry or storage site. At this point, the assembly roller set 21 and the assembly
20 carrier 22 are lowered to the ground and then the empty cable winch cables with the weights are drawn up again using the cable winches.

The replacing vehicle 10 is finally moved into the
25 straight section of the terminal. The connection rods 23a, 23b, 23c have to be dismantled there. The individual vehicles 1, 2, 6, 7 can then be garaged at the terminal.

30 A great advantage of the device according to the invention and the method according to the invention is the short system downtime, i.e. roller sets can be replaced within a few hours. The main advantage is that the roller set can be replaced "in the air".
35 Consequently, nothing need be placed on the ground beneath the pylon during assembly - something that is not possible or only possible with difficulty in

WO 2015/003196

- 10 -

PCT/AT2014/000133

densely built-up urban areas, over water, in steep terrain, etc.

This is made possible by, among other things:

5

- the running of the replacing vehicle 10 on the same cable strand 14 on which the roller set 15 is being replaced;

10

- the great distance between the winch vehicles 1, 2, so that the roller set 15 can be lowered a little therebetween;

15

- the securing points, i.e. the hinged carriers 24 and the swivel carriers 23, in the center between the winch vehicles 1, 2, which can be solved by additional suspension units 6, 7, for example, but would also be workable with a special connection structure without additional suspension units 6, 7 between the winch vehicles 1, 2;

20

- a corresponding cable run within the replacing vehicle 10, so that there is only a slight deflection of the vehicles 1, 2, 6, 7, even under load;

25

- the additional assembly roller set 21, in order to move the cable way when the roller set 15 is dismantled, wherein it would also be possible, however, for a new roller set 15 to be carried along at the same time and for this to be immediately replaced for the old one on site without intermediate transportation;

30

- the cable winch equipment can remain in the winch vehicles 1, 2, which simplifies handling and therefore reduces the assembly time;

35

- the vehicles 1, 2, 6, 7 may be equipped with the same coupling grips 16, 17, 18, 19 as the standard

WO 2015/003196

- 11 -

PCT/AT2014/000133

vehicles, so that problem-free entry into the terminal and handling in the cable car station is possible.

Claims:

- 5 1. A device for replacing roller sets (15) on pylons
(13) of cable cars comprising a replacing vehicle
(10) which can be moved along the cable (14), in
particular the conveying cable, of the cable car
and comprising at least two winches (3, 4) with
10 cables (8, 9), by means of which a roller set (15)
to be replaced can be lowered and a new roller set
(15) raised, characterized in that the replacing
vehicle (10) comprises at least two interconnected
vehicles (1, 2, 6, 7) which are connected to the
15 cable (14) by way of grips (16 to 19).
2. The device as claimed in claim 1, characterized in
that the vehicles (1, 2, 6, 7) are connected at
their grips (16 to 19) by means of connection rods
20 (23a, 23b, 23c).
3. The device as claimed in claim 1 or 2,
characterized in that cable pulleys (27) for the
cables (8, 9) are arranged on at least two
25 vehicles (6, 7).
4. The device as claimed in one of claims 1 to 3,
characterized in that through four interconnected
vehicles (1, 2, 6, 7), wherein the winches (3, 4)
30 are arranged on the two outer vehicles (1, 2) and
cable pulleys (27) for the cables (8, 9) are
arranged on the two inner vehicles (6, 7).
5. The device as claimed in one of claims 1 to 4,
35 characterized in that two adjacent vehicles (1, 6;
2, 7) are connected via connection rods (20a, 20b)
which are connected to the vehicles (1, 2, 6, 7)
spaced apart from the grips (16 to 19).

WO 2015/003196

- 13 -

PCT/AT2014/000133


6. The device as claimed in claim 5, characterized in that the two outer vehicles (1, 2) are connected to the adjacent inner vehicle (6, 7) in each case via connection rods (20a, 20b).
- 5
7. The device as claimed in one of claims 3 to 6, characterized in that the cable pulleys (27) are arranged on hinged carriers (24) mounted in pivotable fashion on the vehicle (6, 7),
10 preferably about a horizontal axis (26).
8. The device as claimed in one of claims 1 to 7, characterized in that on at least two vehicles (6, 7) pivotable swivel carriers (23) for loads that
15 can be suspended therefrom are arranged about a vertical axis (25).
9. The device as claimed in one of claims 1 to 8, characterized by an assembly carrier (22) that can
20 be secured to the pylon (13), on which two deflection rollers (39, 40) for the cables (8, 9) are mounted.
10. The device as claimed in one of claims 1 to 9,
25 characterized by a rocker (38) mounted on the pylon (13), on which deflection rollers (11, 12) for the cables (8, 9) are mounted in a removable fashion where necessary.
- 30 11. The device as claimed in claim 10, characterized in that round slings (36, 37) can be arranged on the rocker (38), at which the cable (14) is suspended in the detached state.
- 35 12. The device as claimed in one of claims 1 to 11, characterized by an assembly roller set (21) which can be temporarily mounted on the pylon (13) instead of the roller set (15).


WO 2015/003196


- 14 -


PCT/AT2014/000133

13. The device as claimed in one of claims 1 to 12, characterized by a block and tackle (32) which can be mounted on the pylon (13) for lifting the cable (14) off or lowering it onto the roller set (15) or the assembly roller set (21).
14. The device as claimed in one of claims 1 to 13, characterized in that deflection rollers are arranged at grips (16, 19) of vehicles (1, 2).
15. A method of replacing roller sets (15) on pylons (13) of cable car systems, in which a replacing vehicle (10) is driven to the pylon (13) and then a cable (14) running on the roller set (15) is raised from the roller set (15) using the replacing vehicle (10) and the roller set (15) is subsequently removed, characterized in that in the case of the roller set (15) suspended from the replacing vehicle (10), an assembly roller set (21) is mounted on the pylon (13) and the cable (14) is placed onto the assembly roller set (21), the replacing vehicle (10) is subsequently moved along the cable (14) to another position and the roller set (15) replaced with a new roller set (15), the new roller set (15) is moved with the replacing vehicle (10) to the pylon and the cable (14) running on the assembly roller set (21) is raised from the assembly roller set (21) using the replacing vehicle (10) and the assembly roller set (21) is subsequently replaced with the roller set (15).

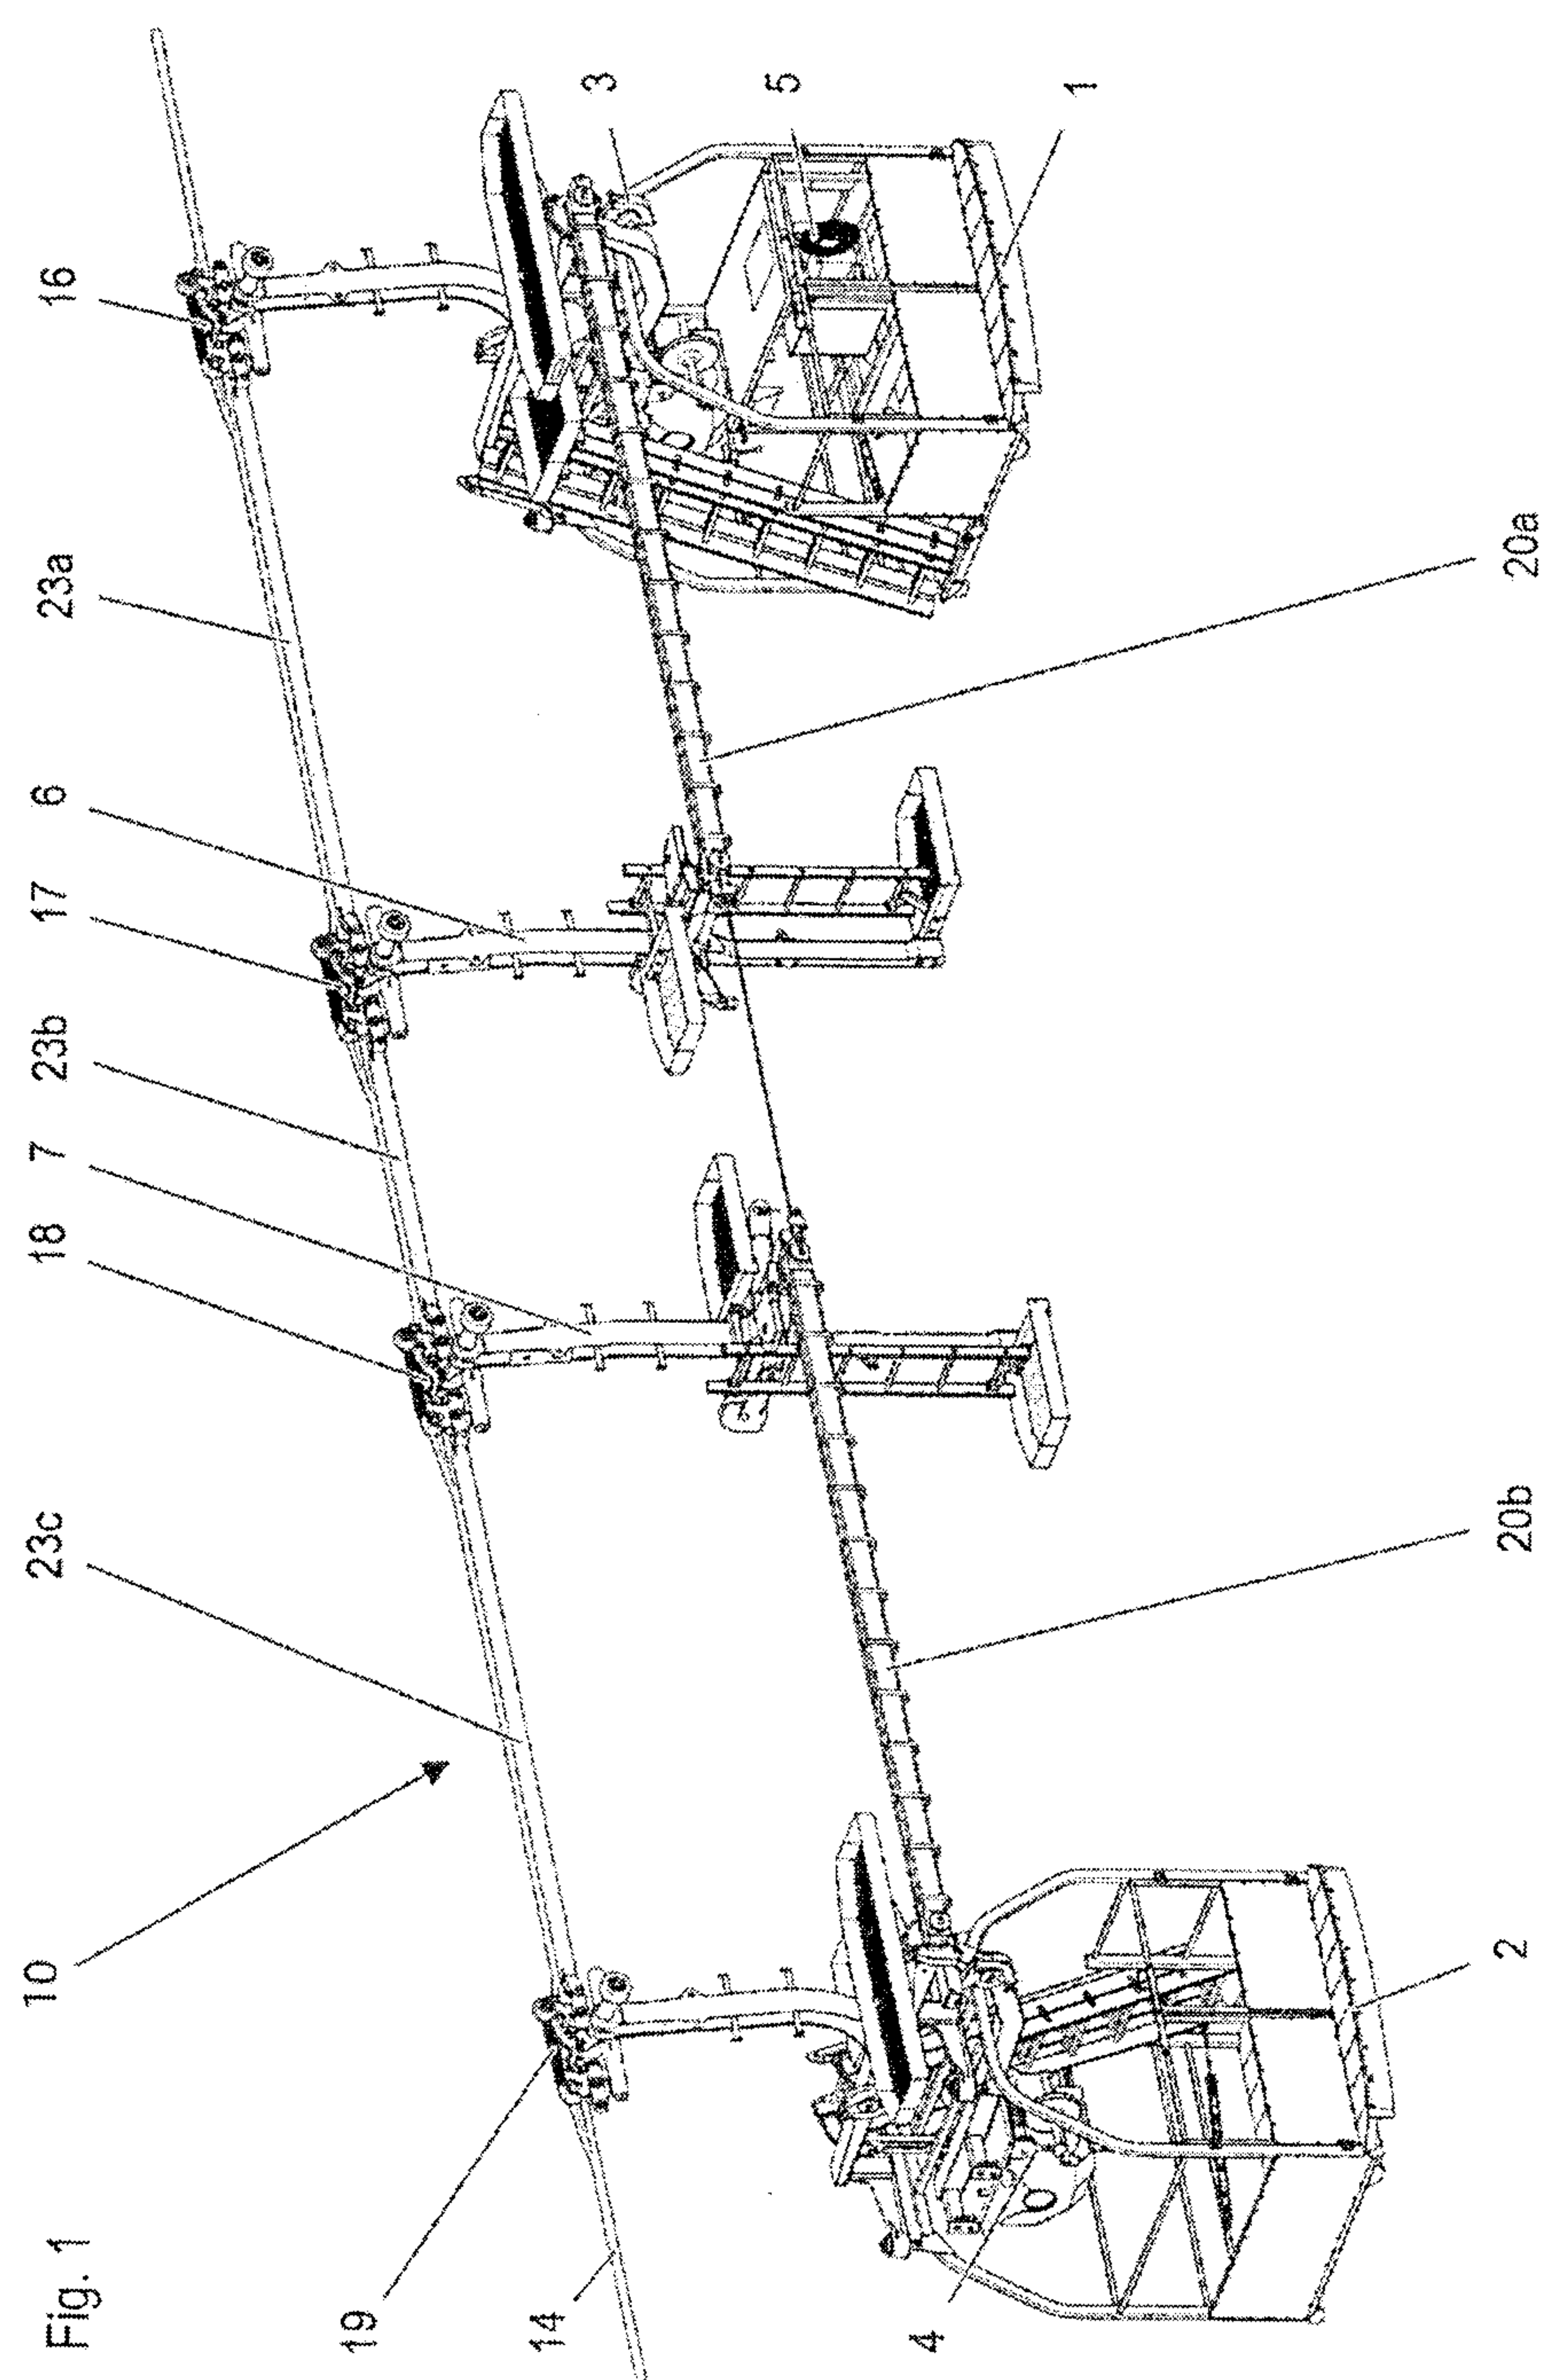

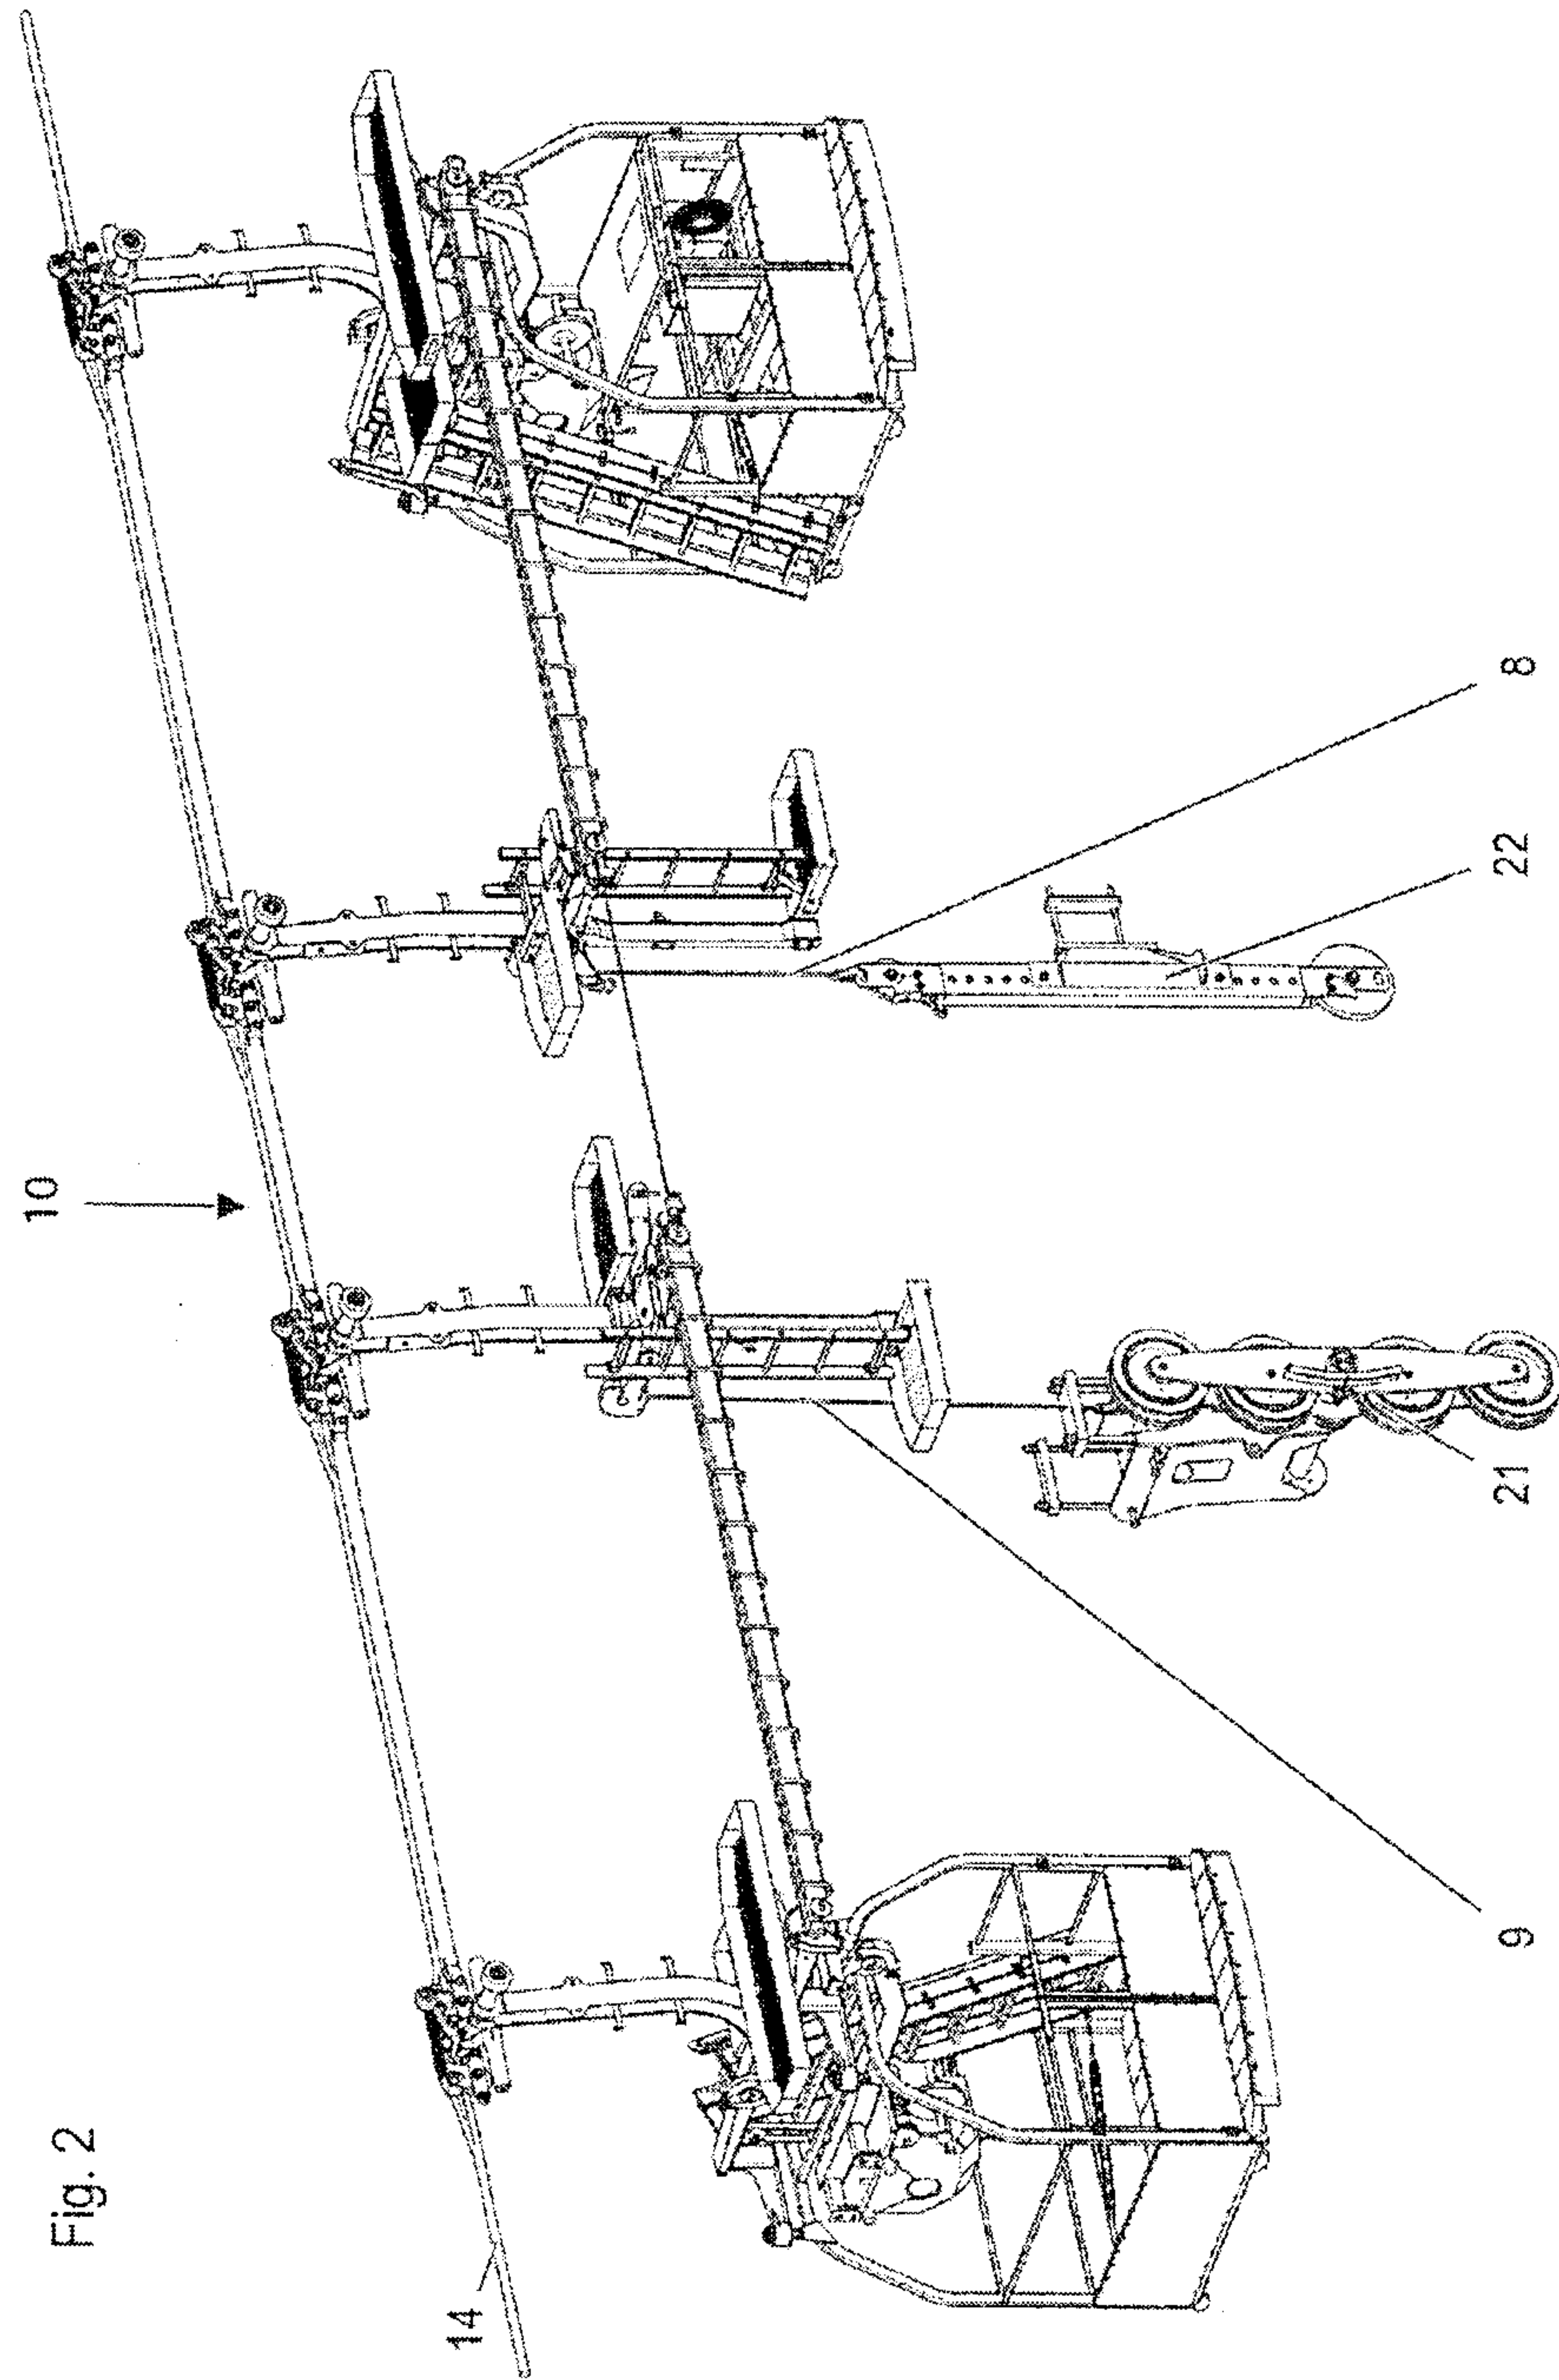

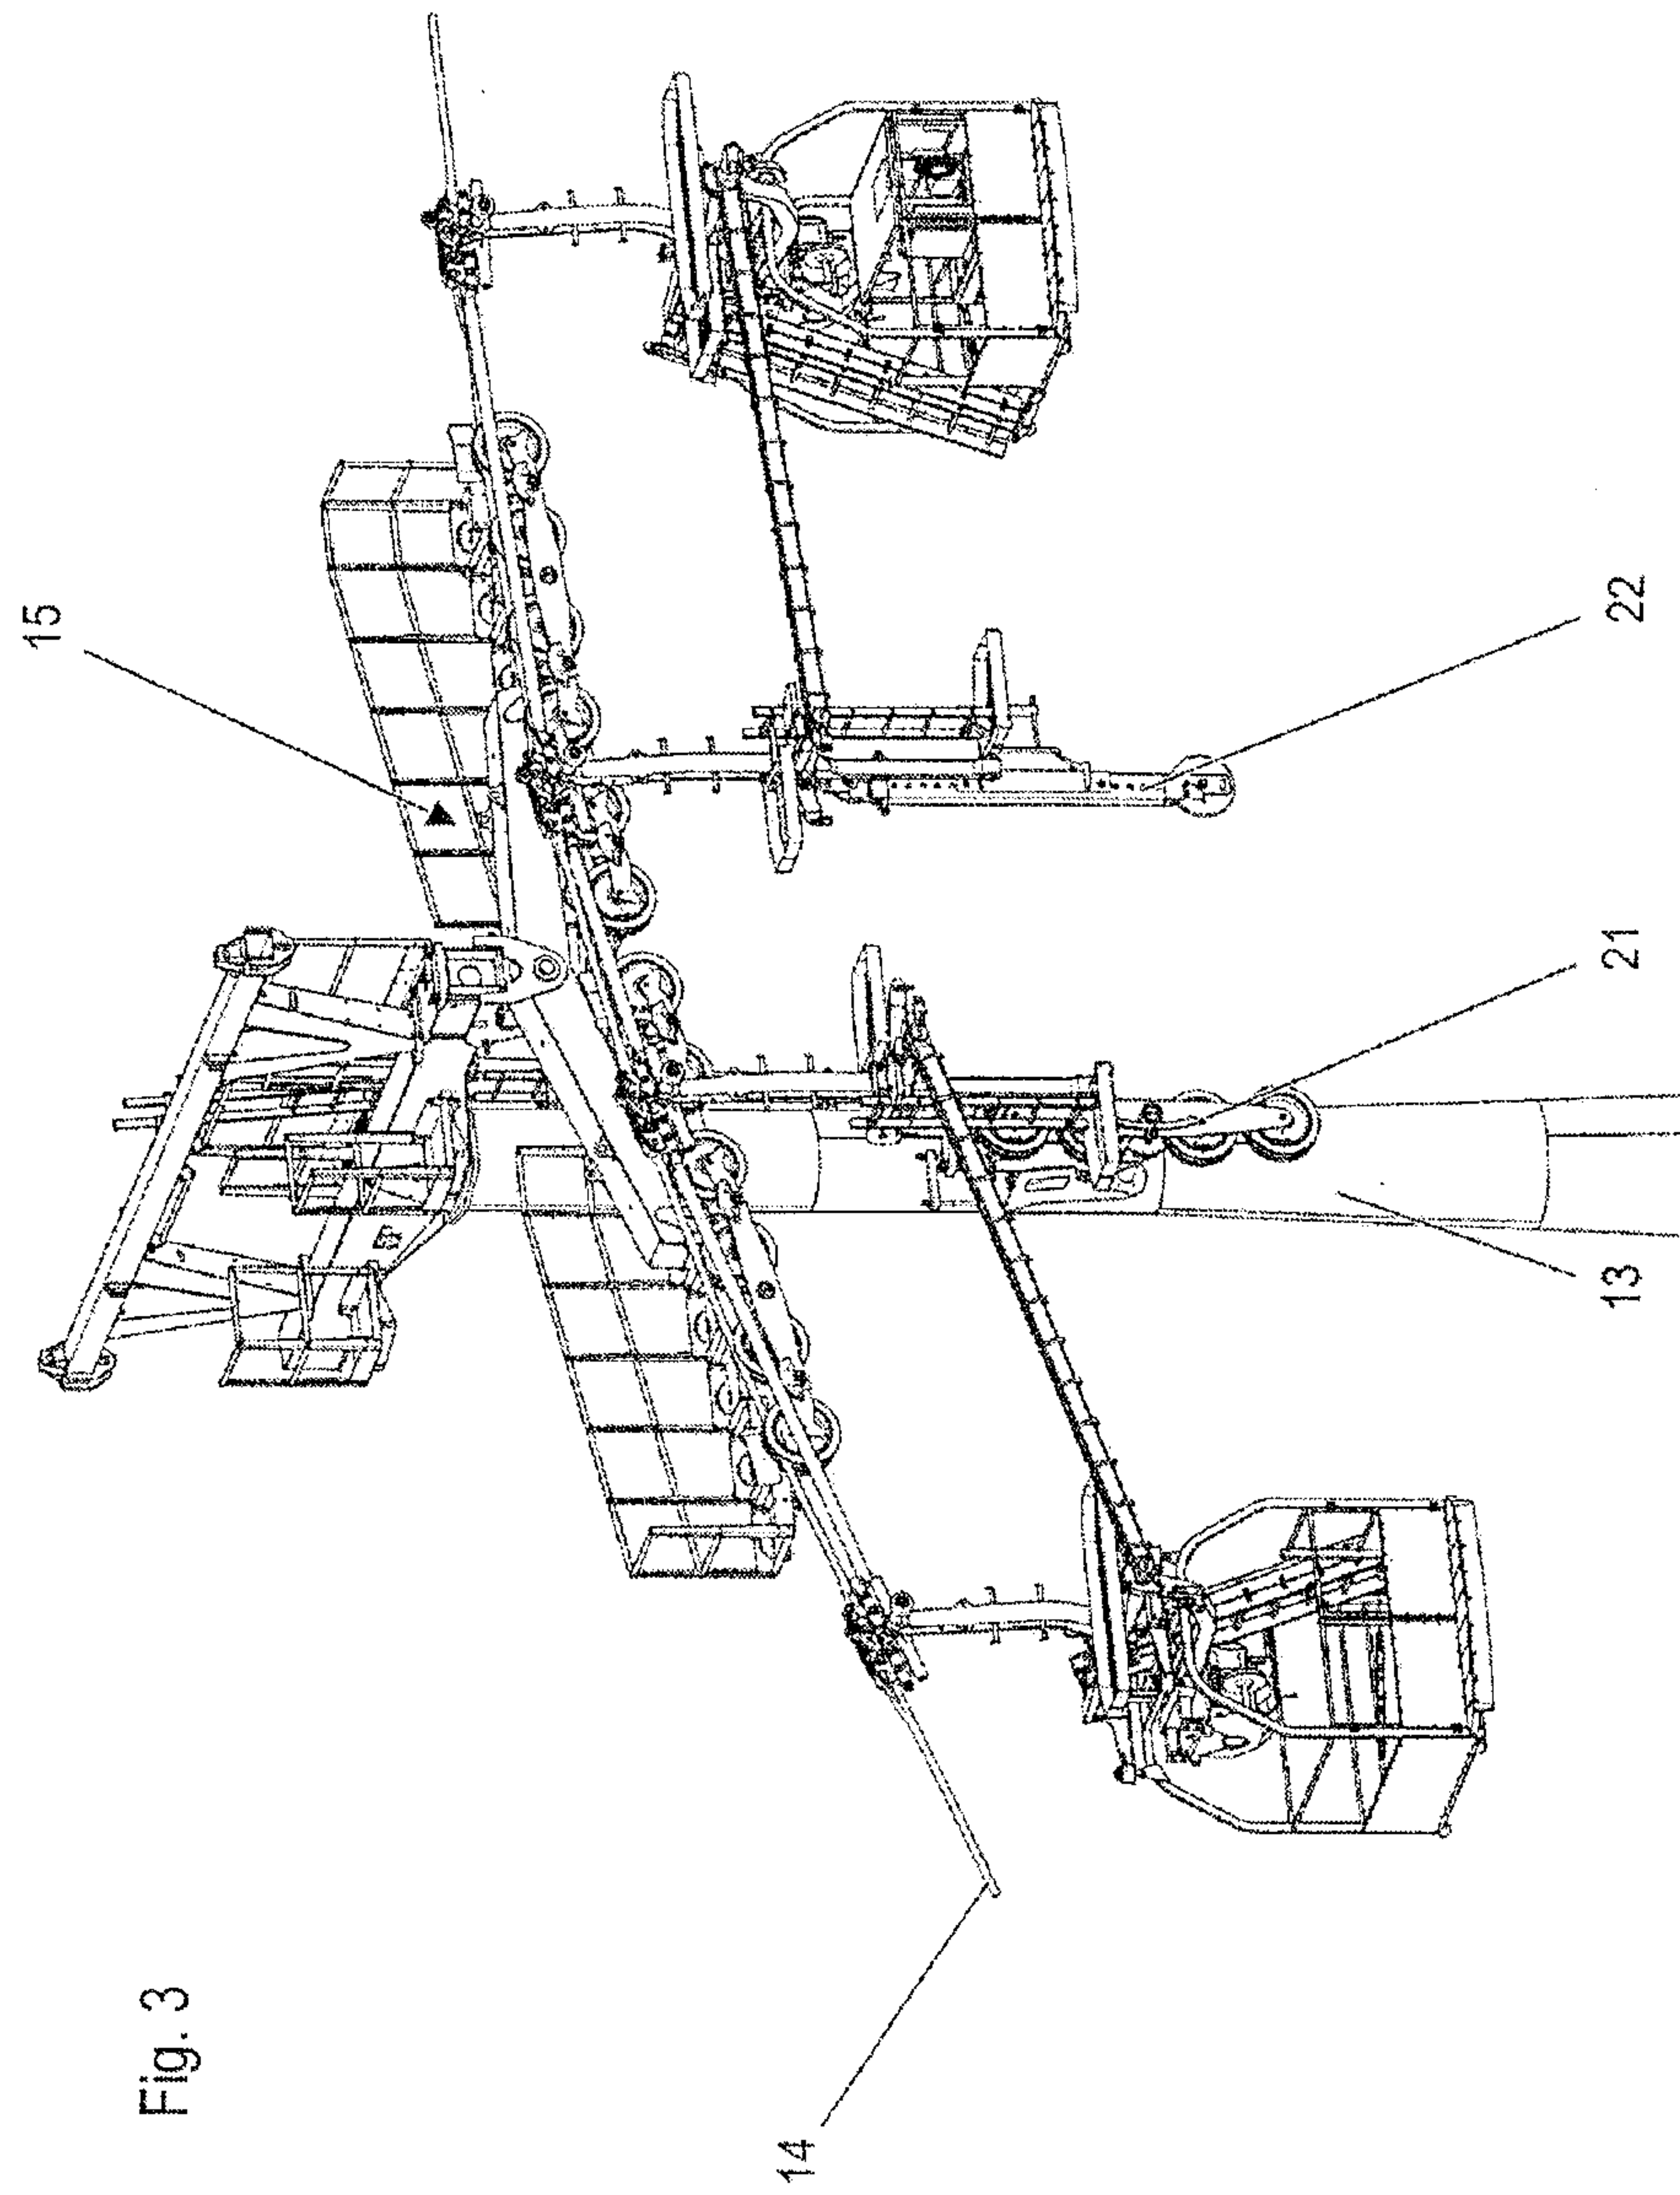

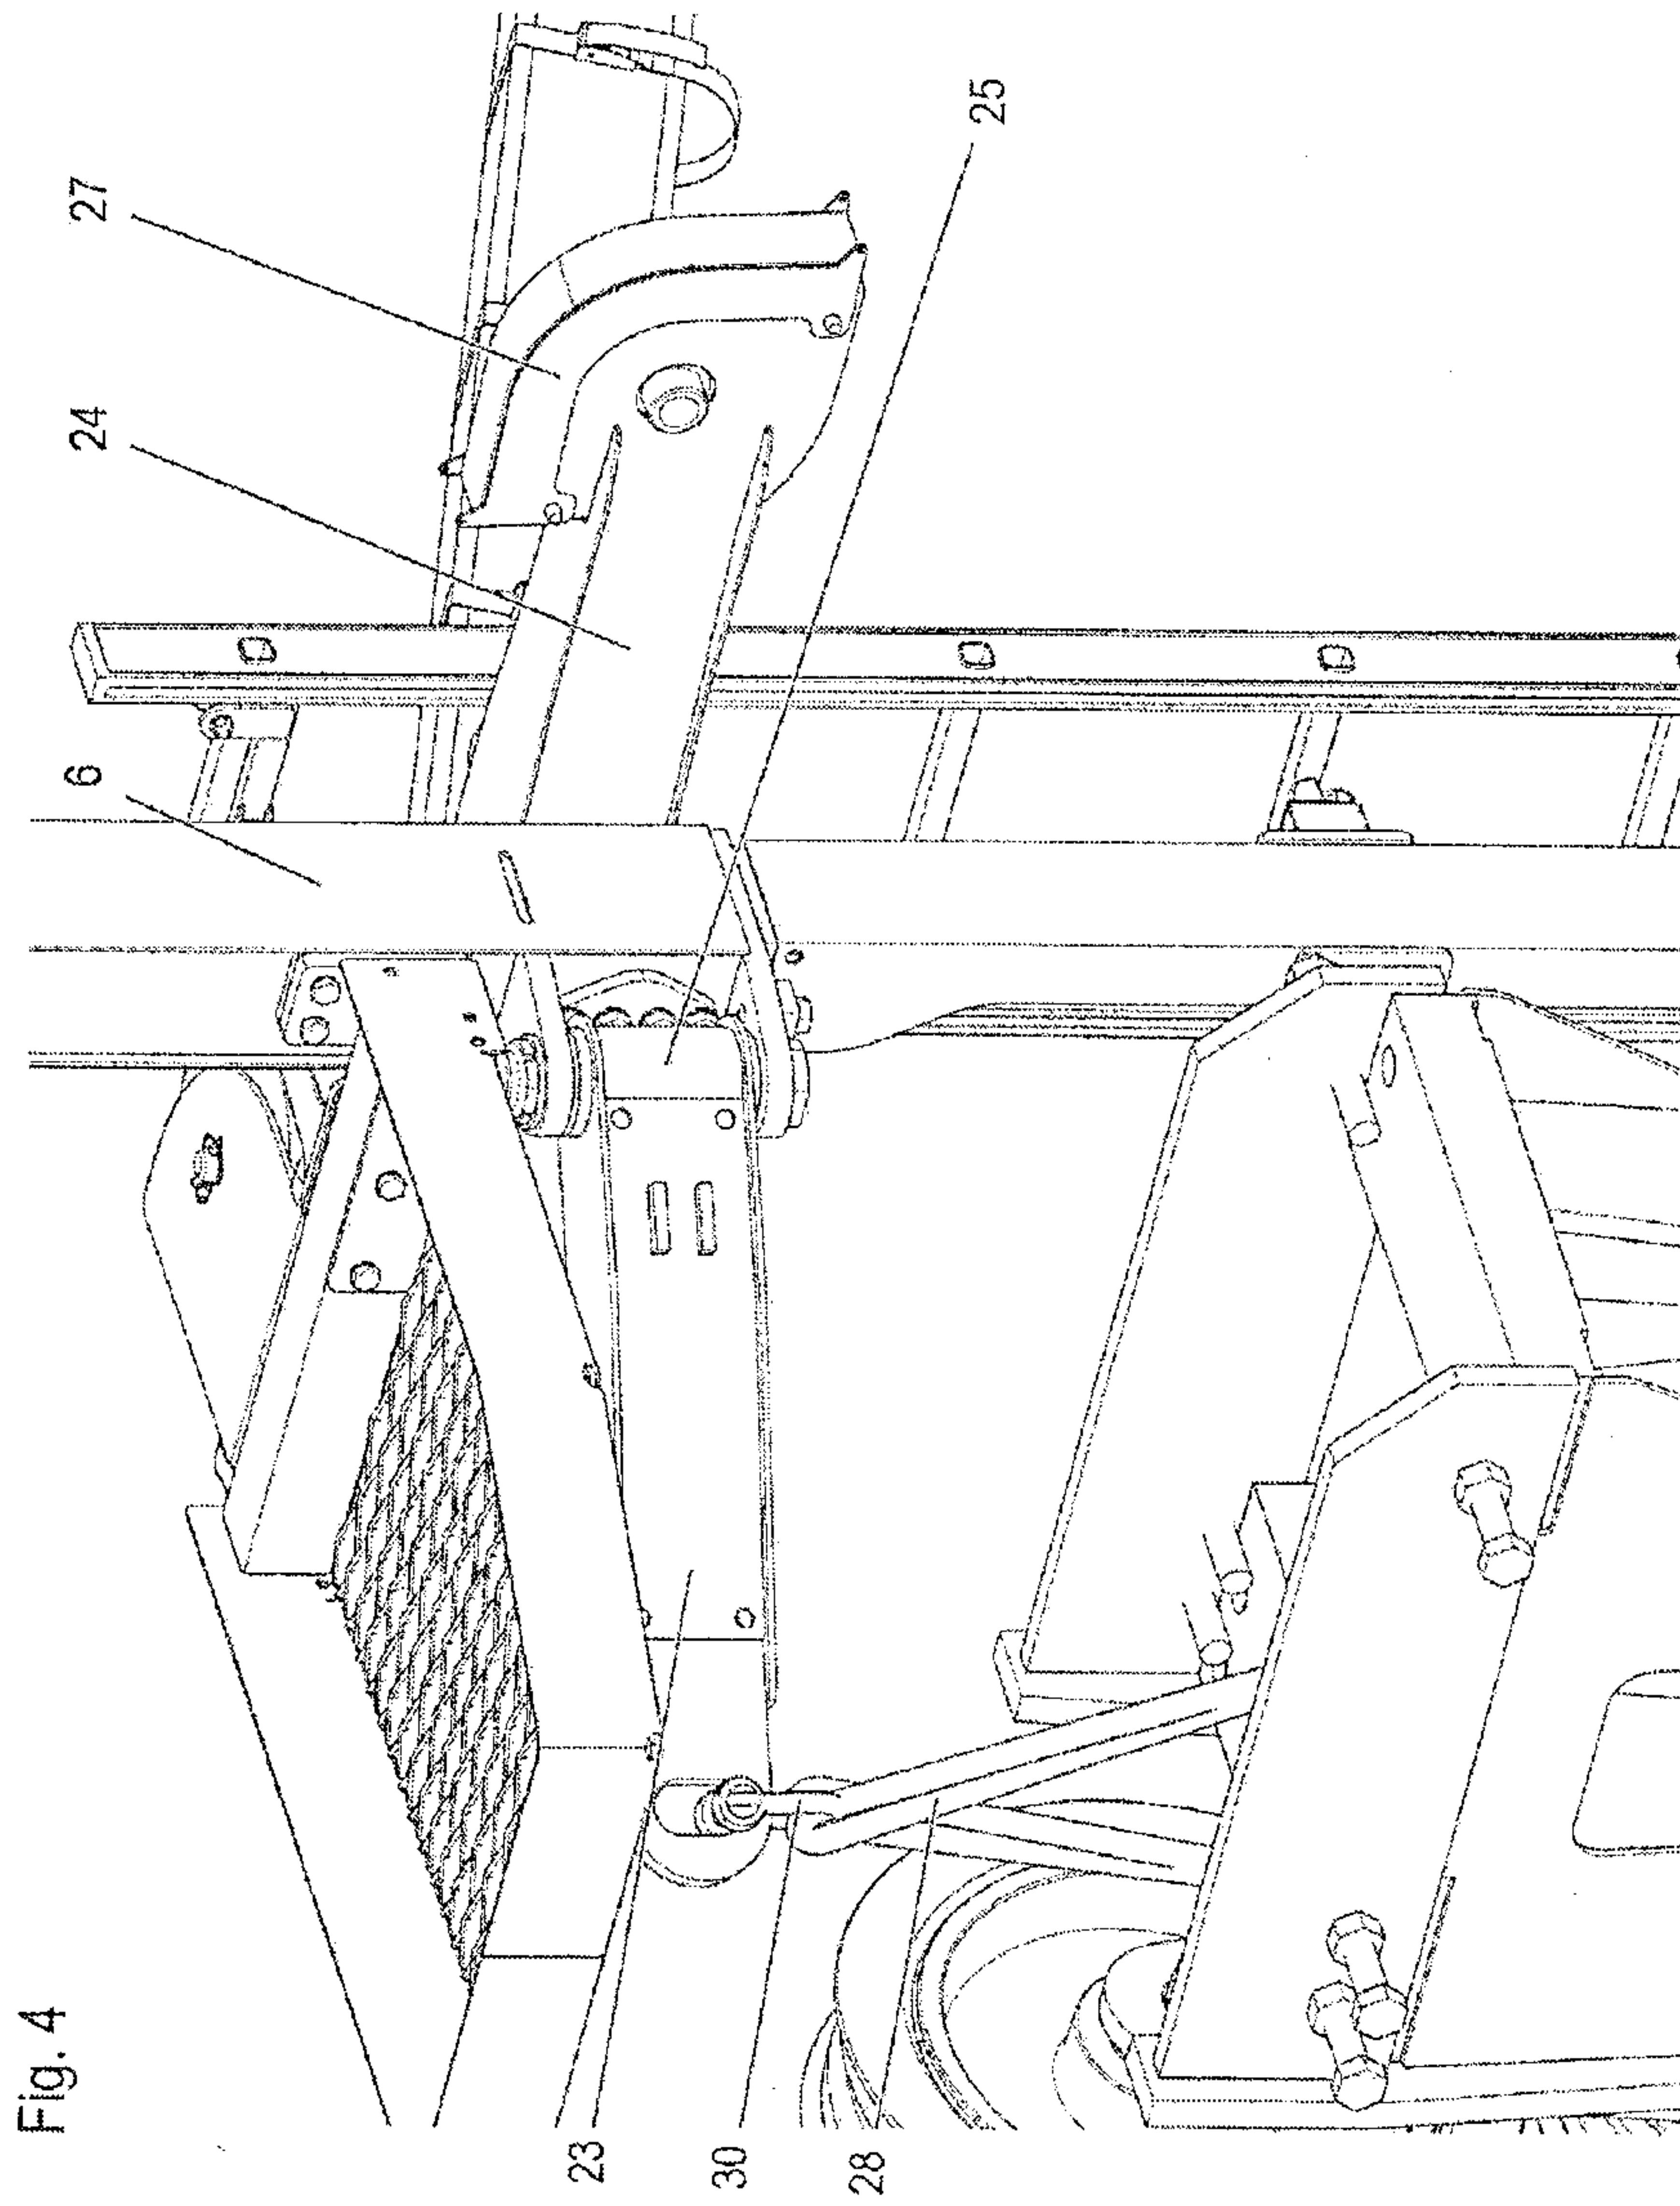

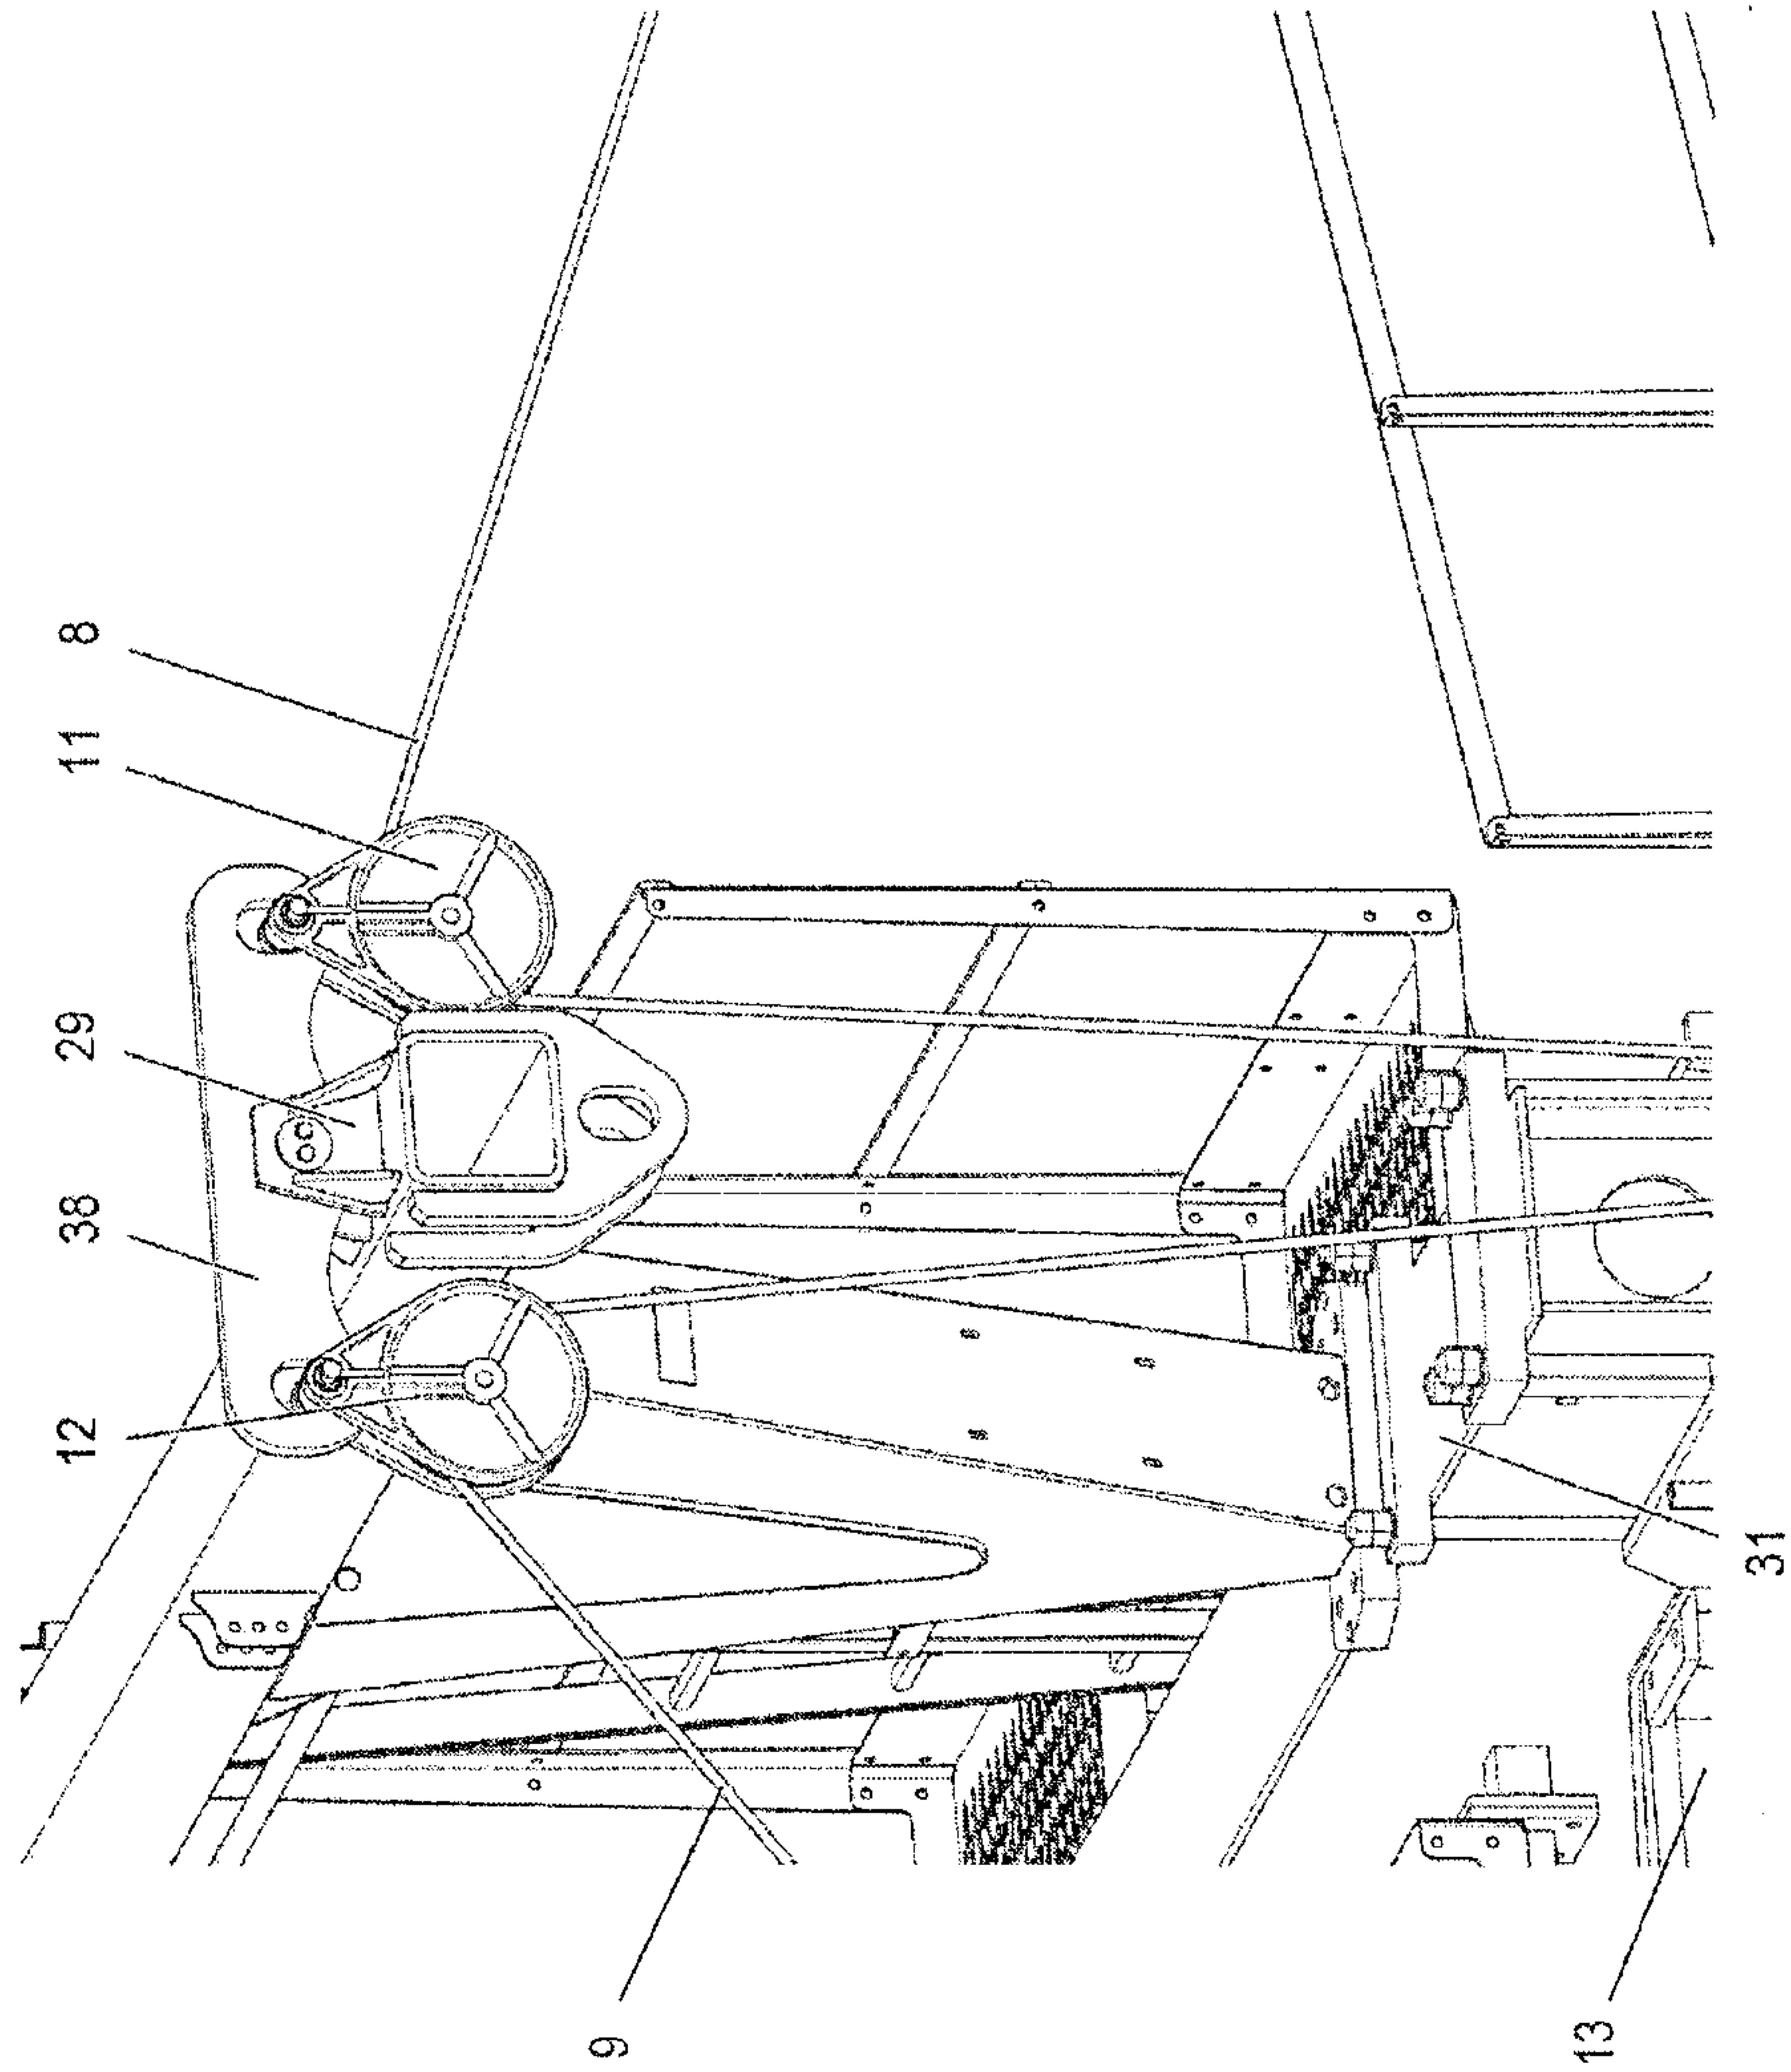


Fig. 5

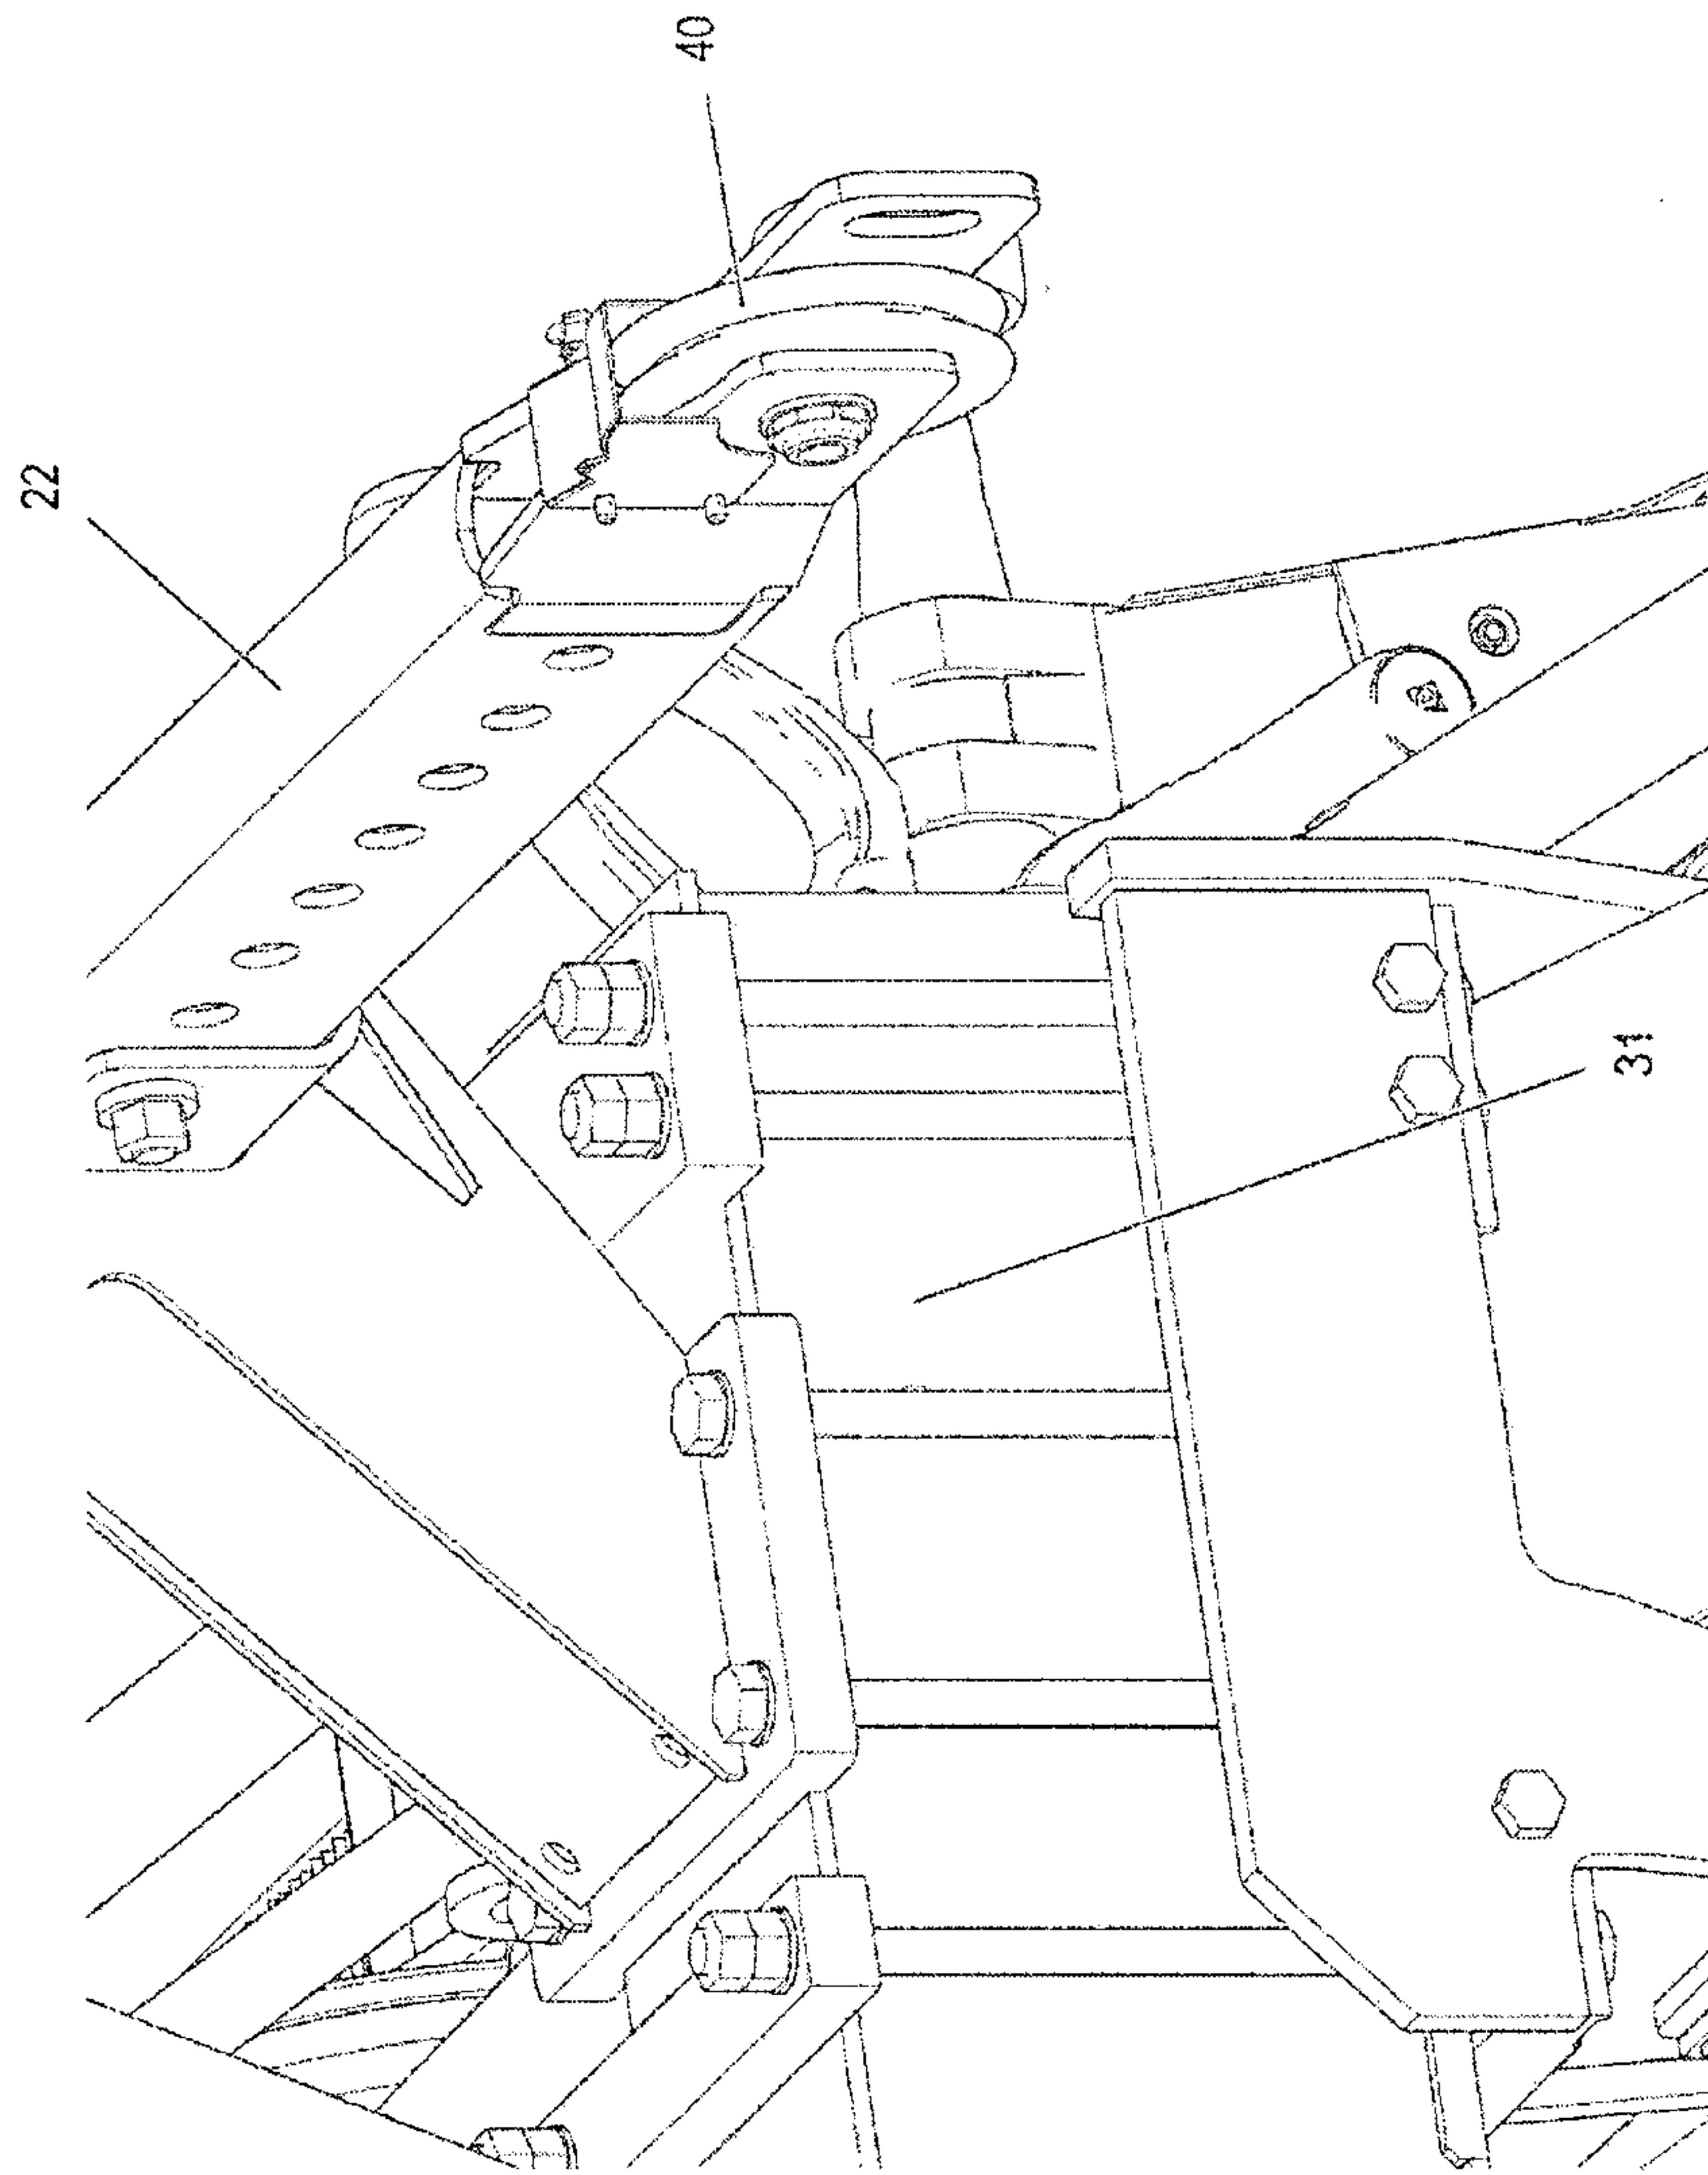


Fig. 6


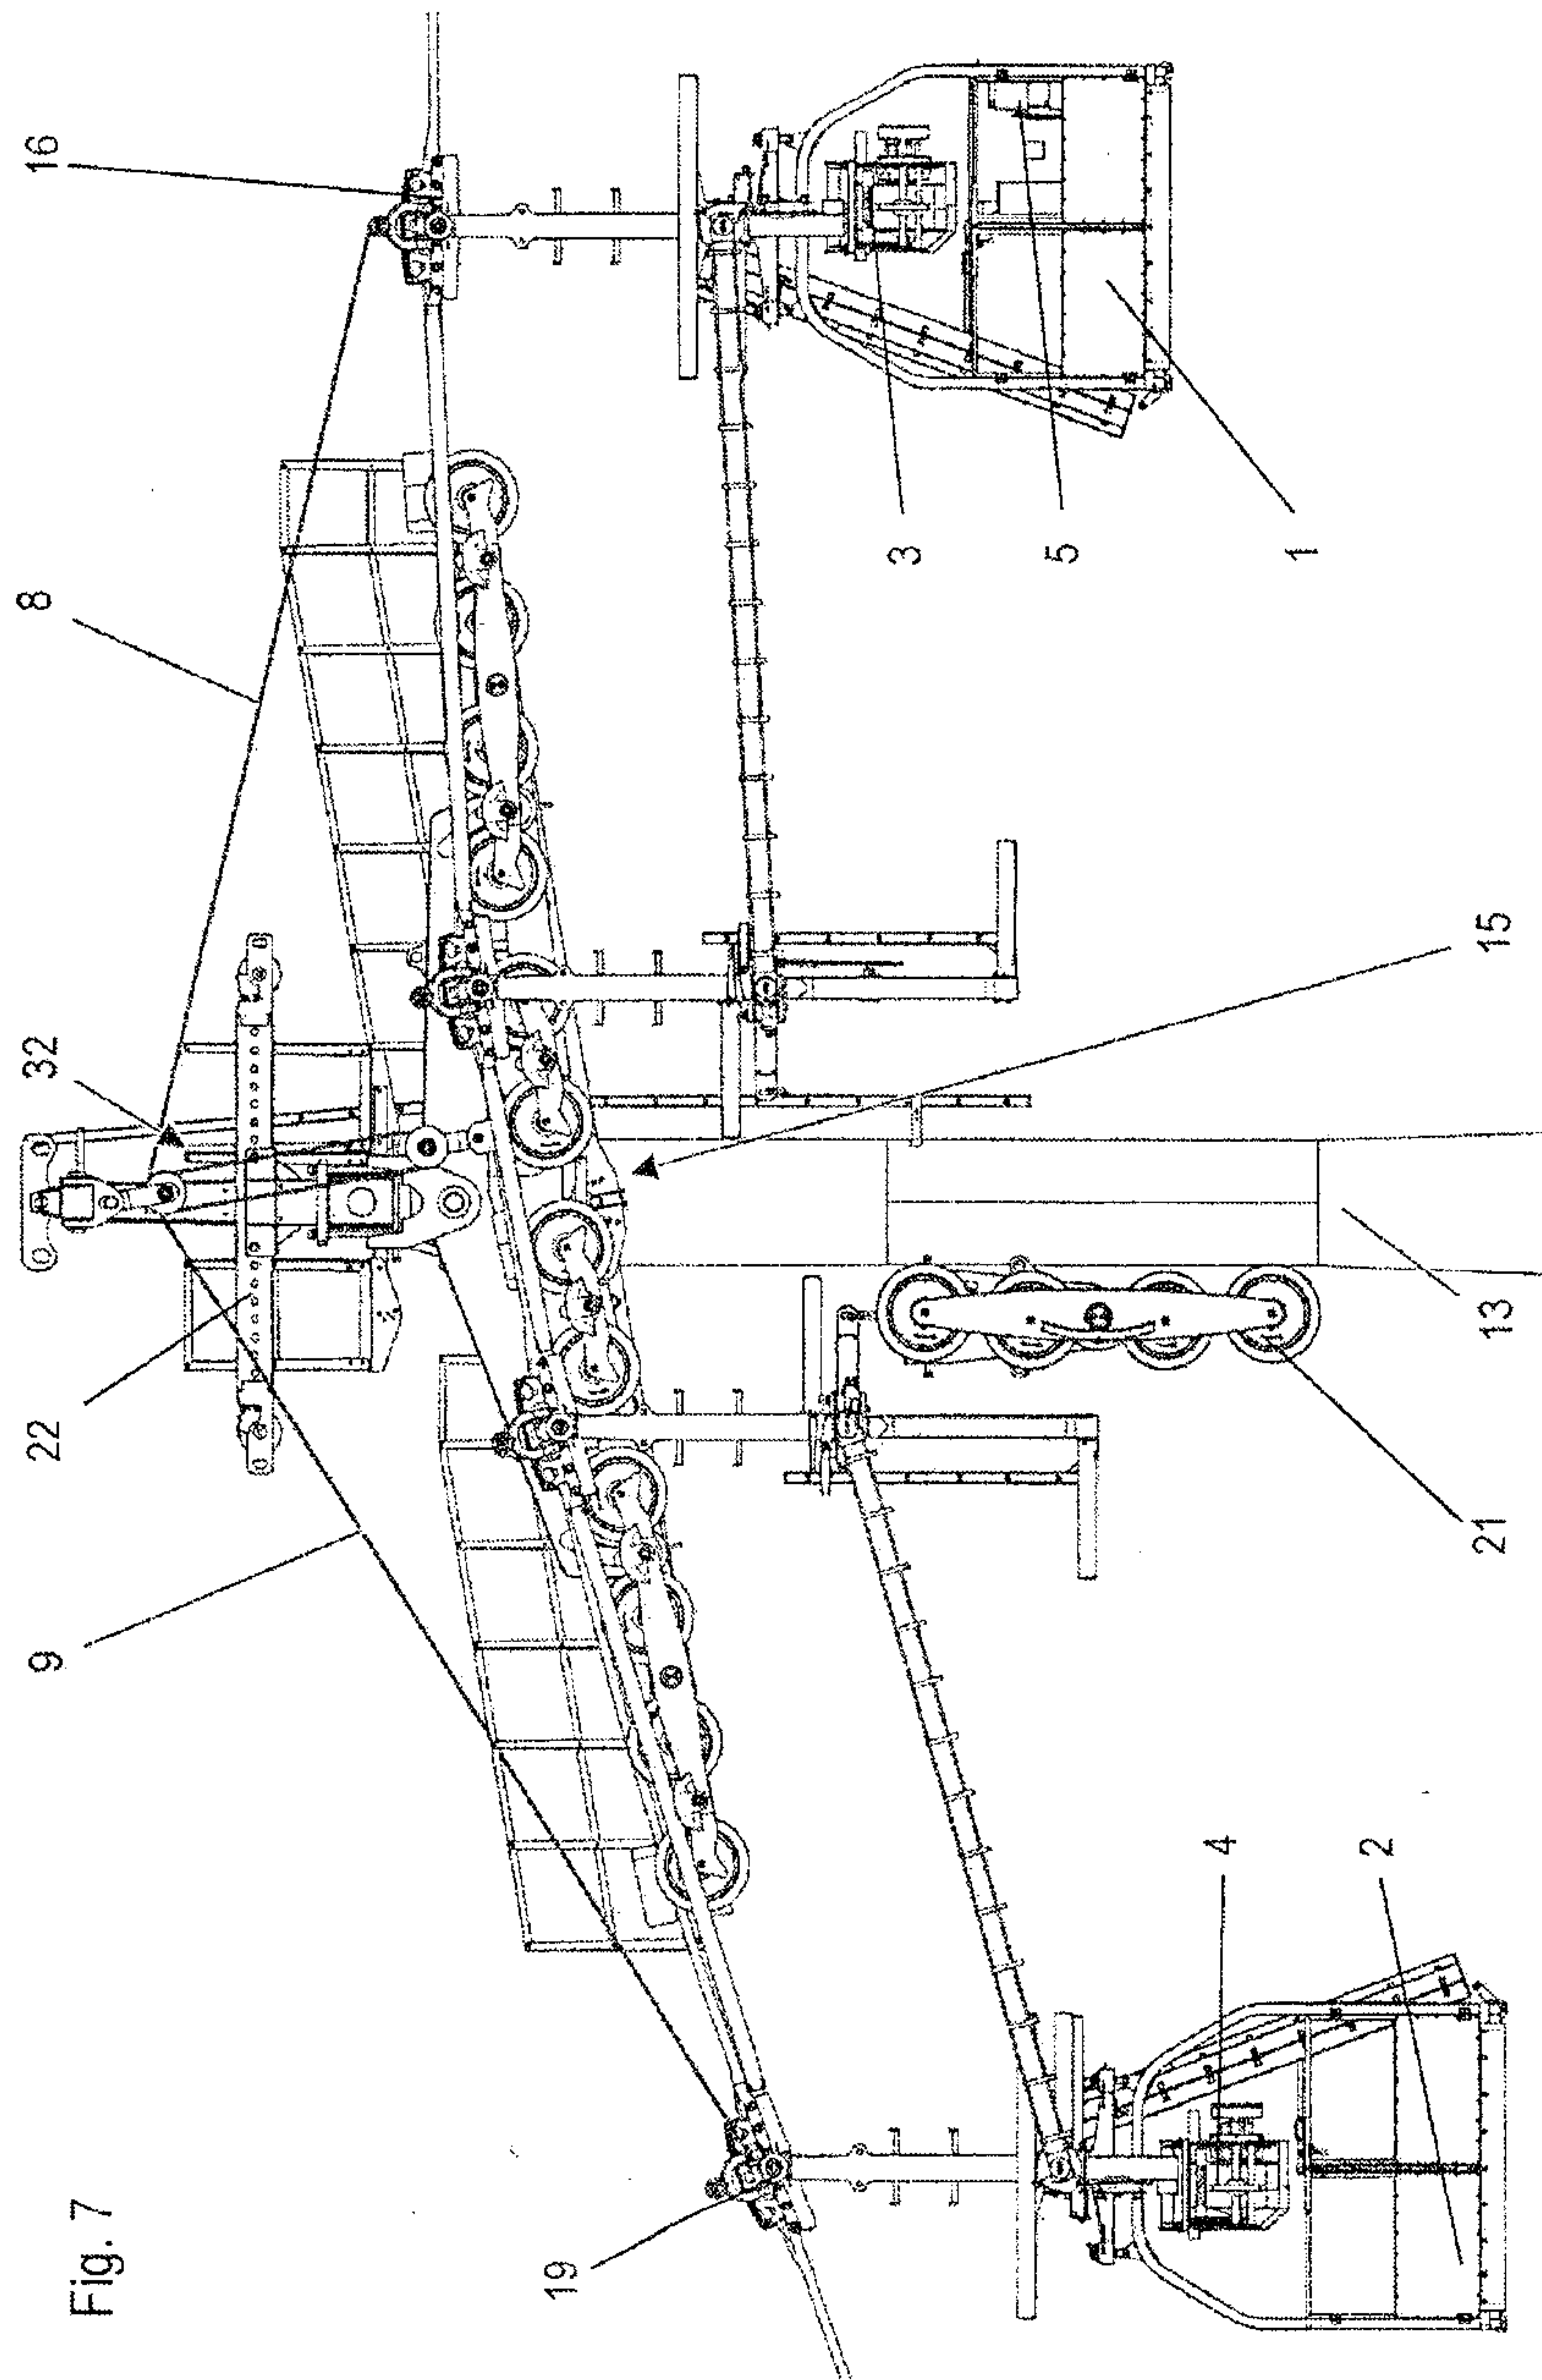


Fig. 7

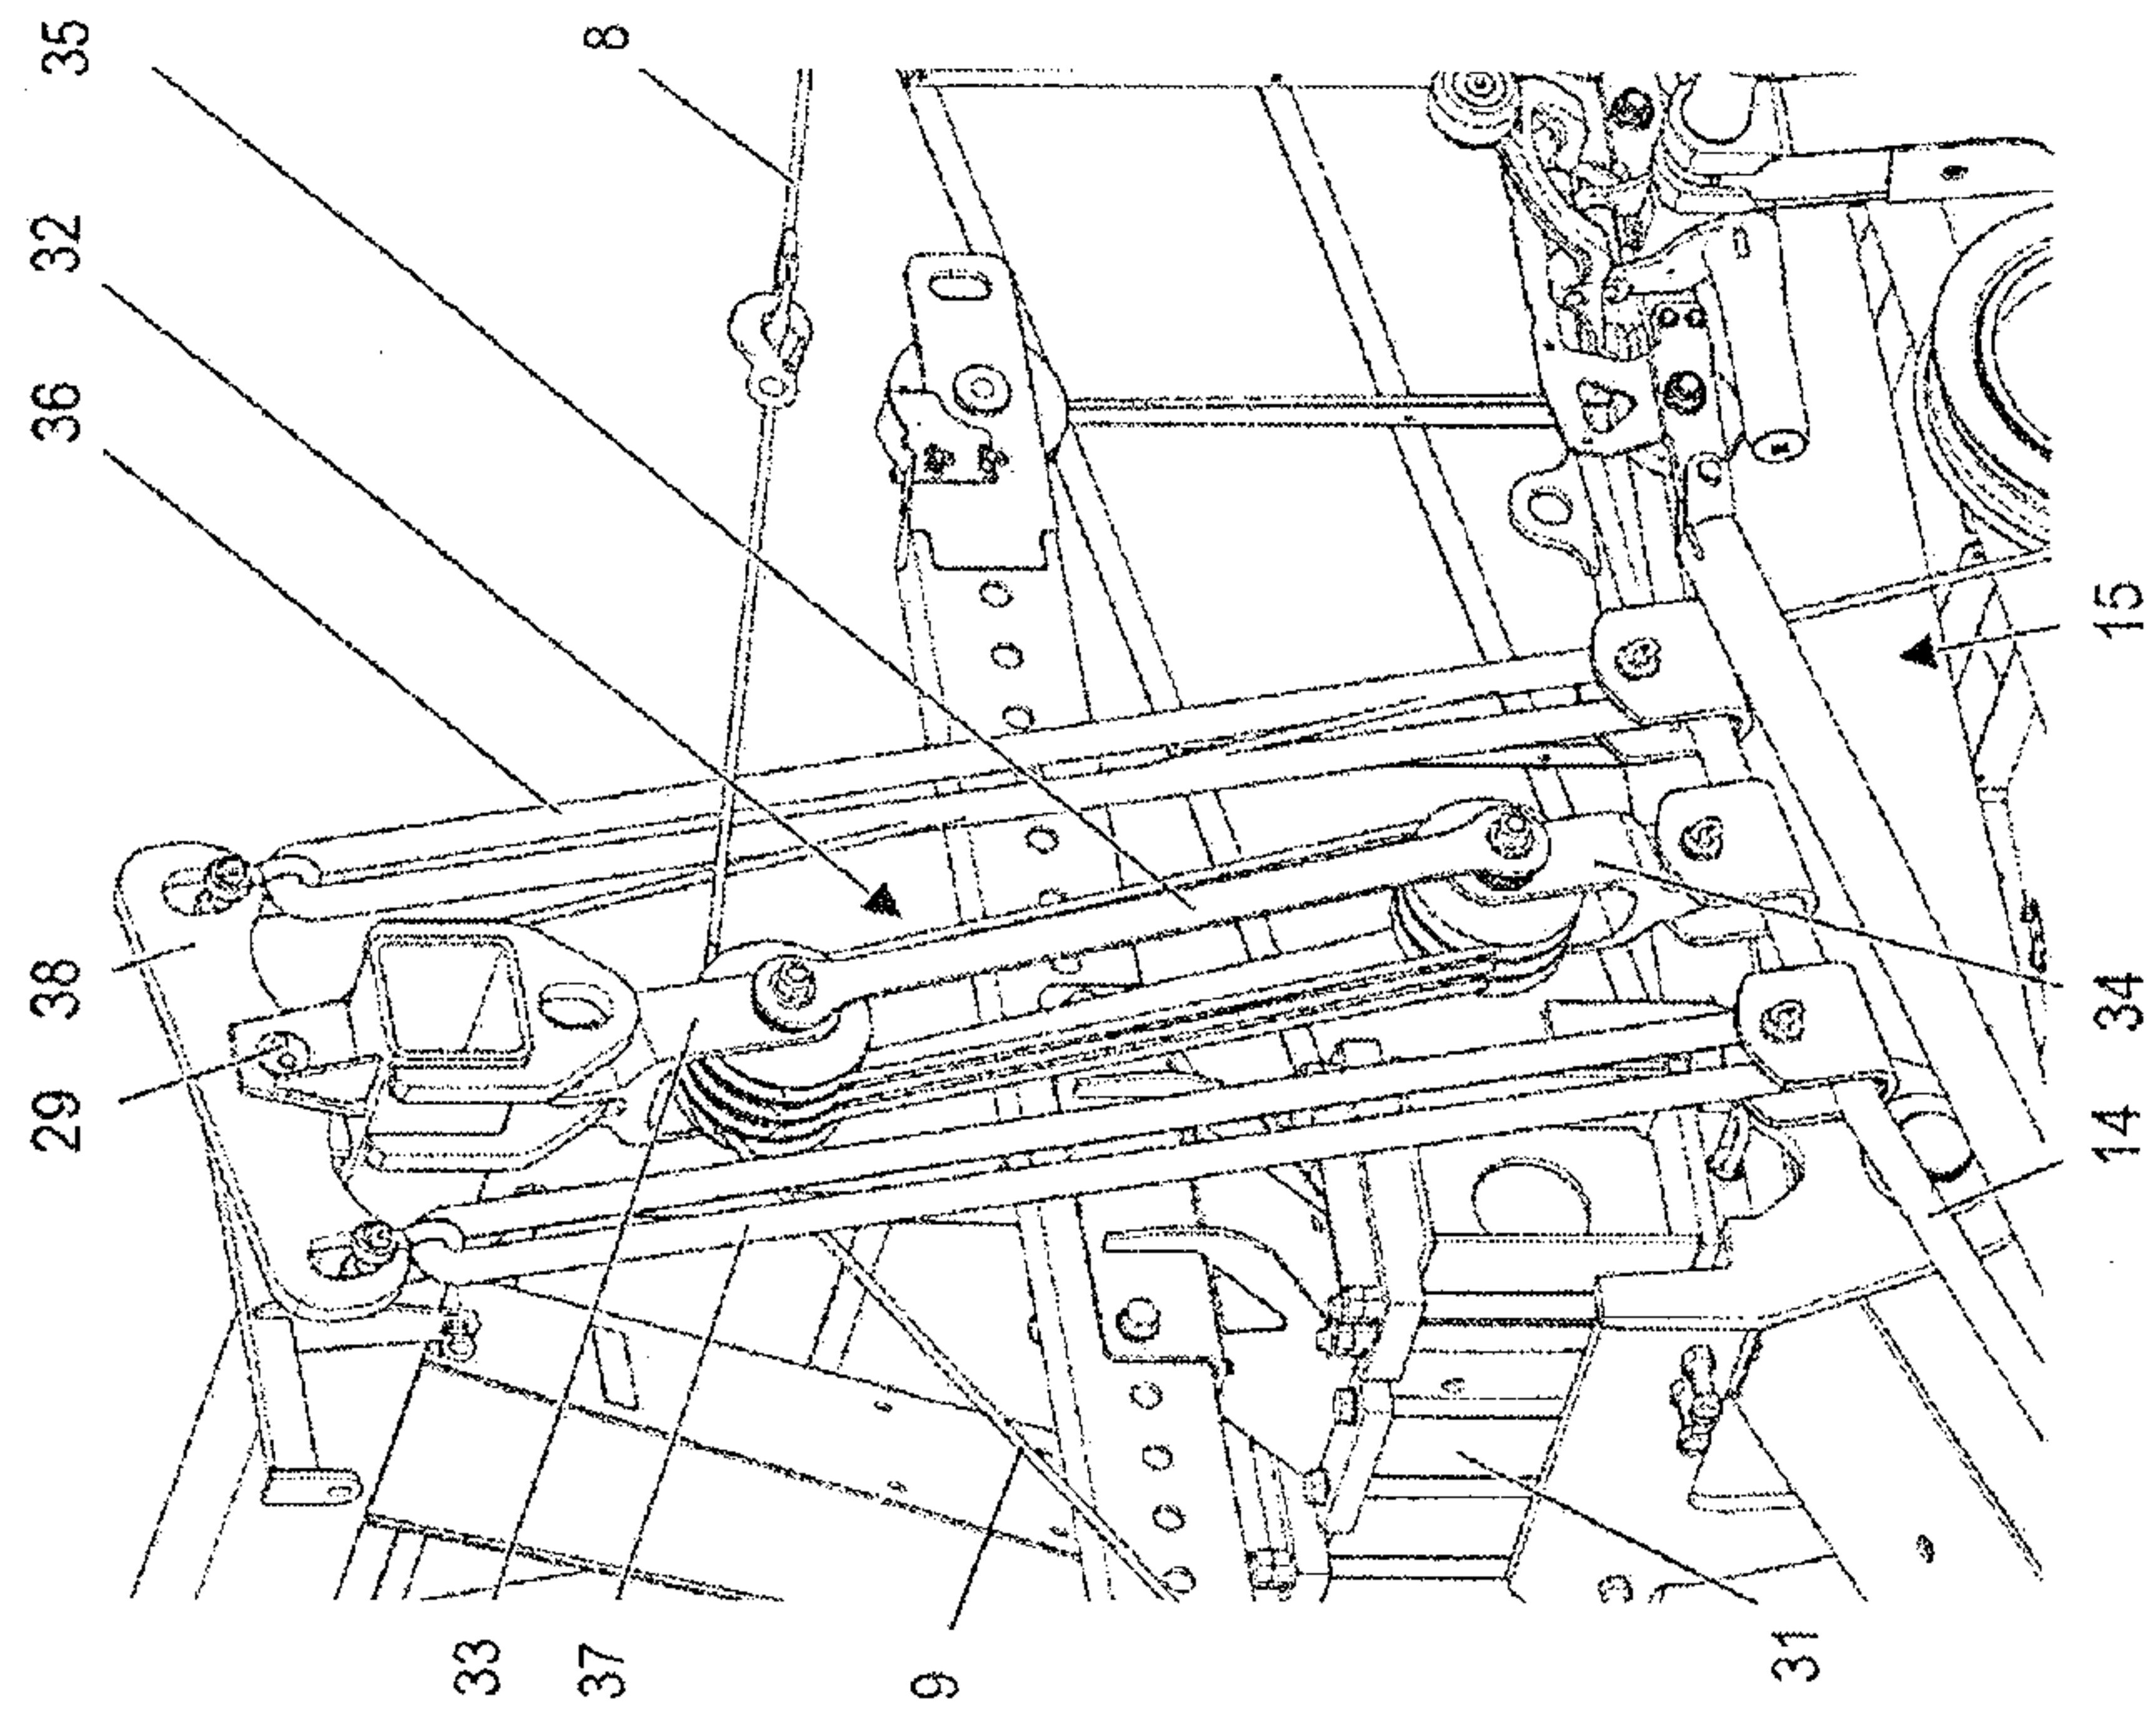

89.

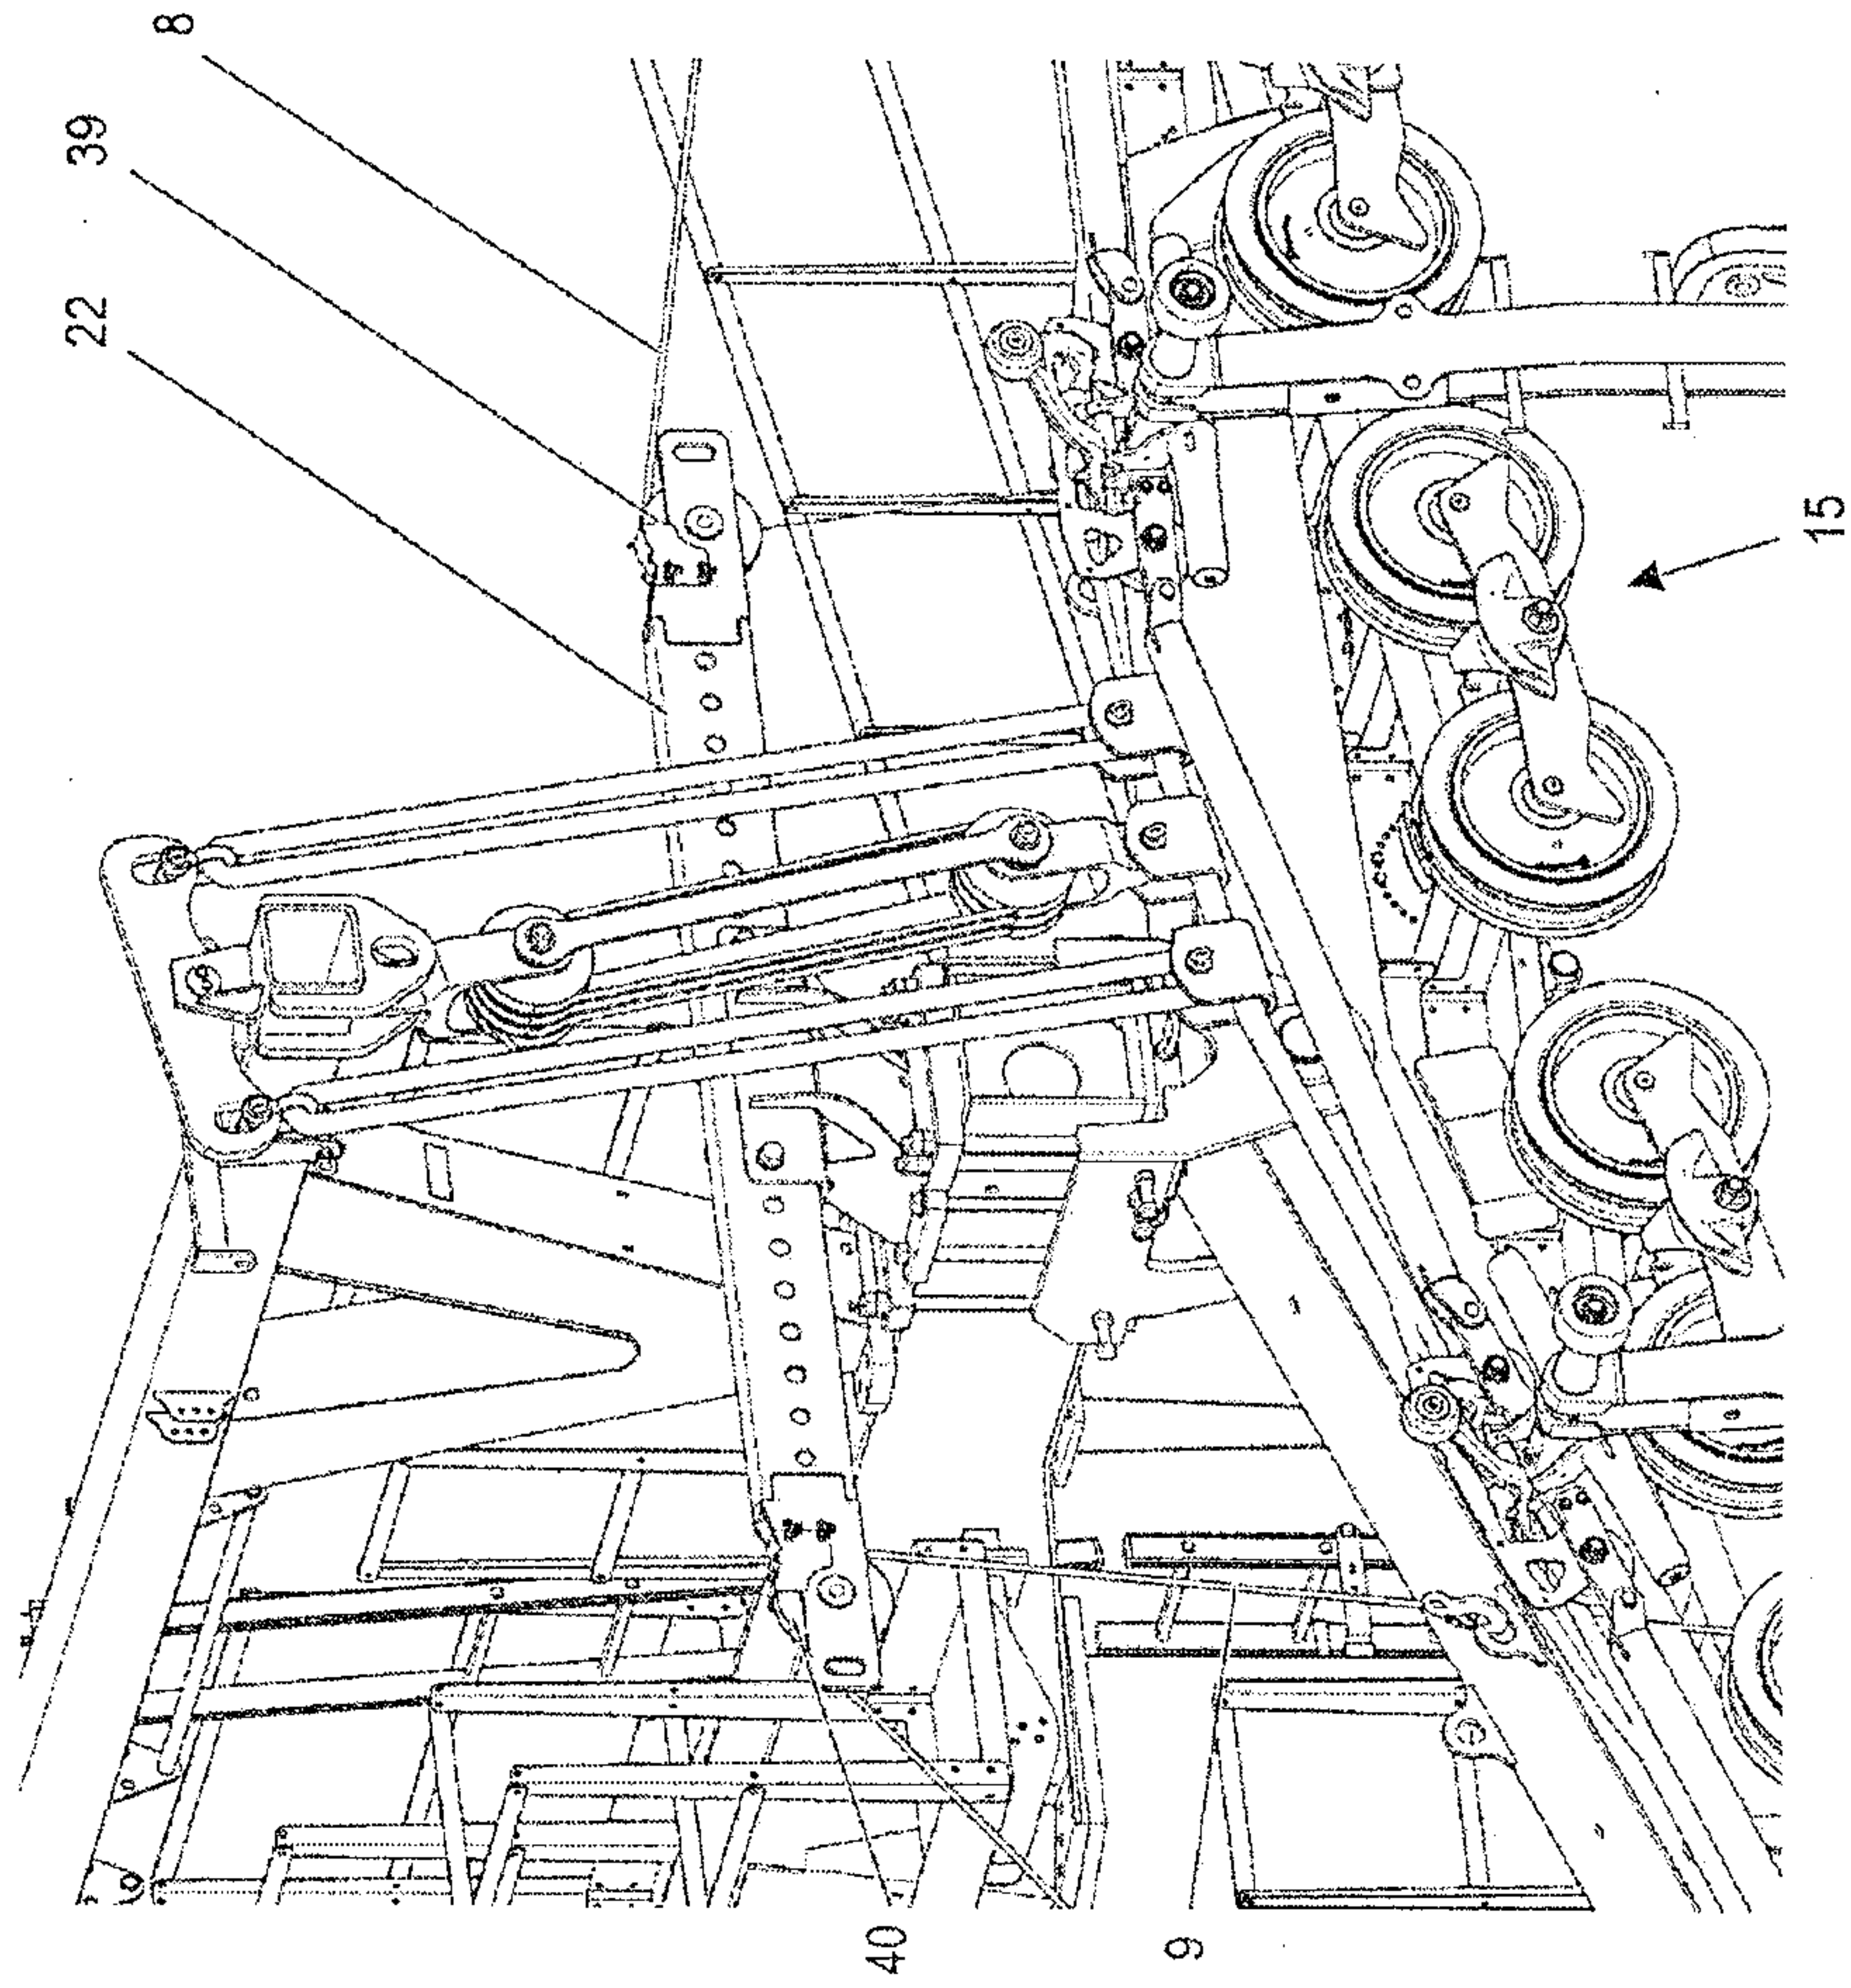
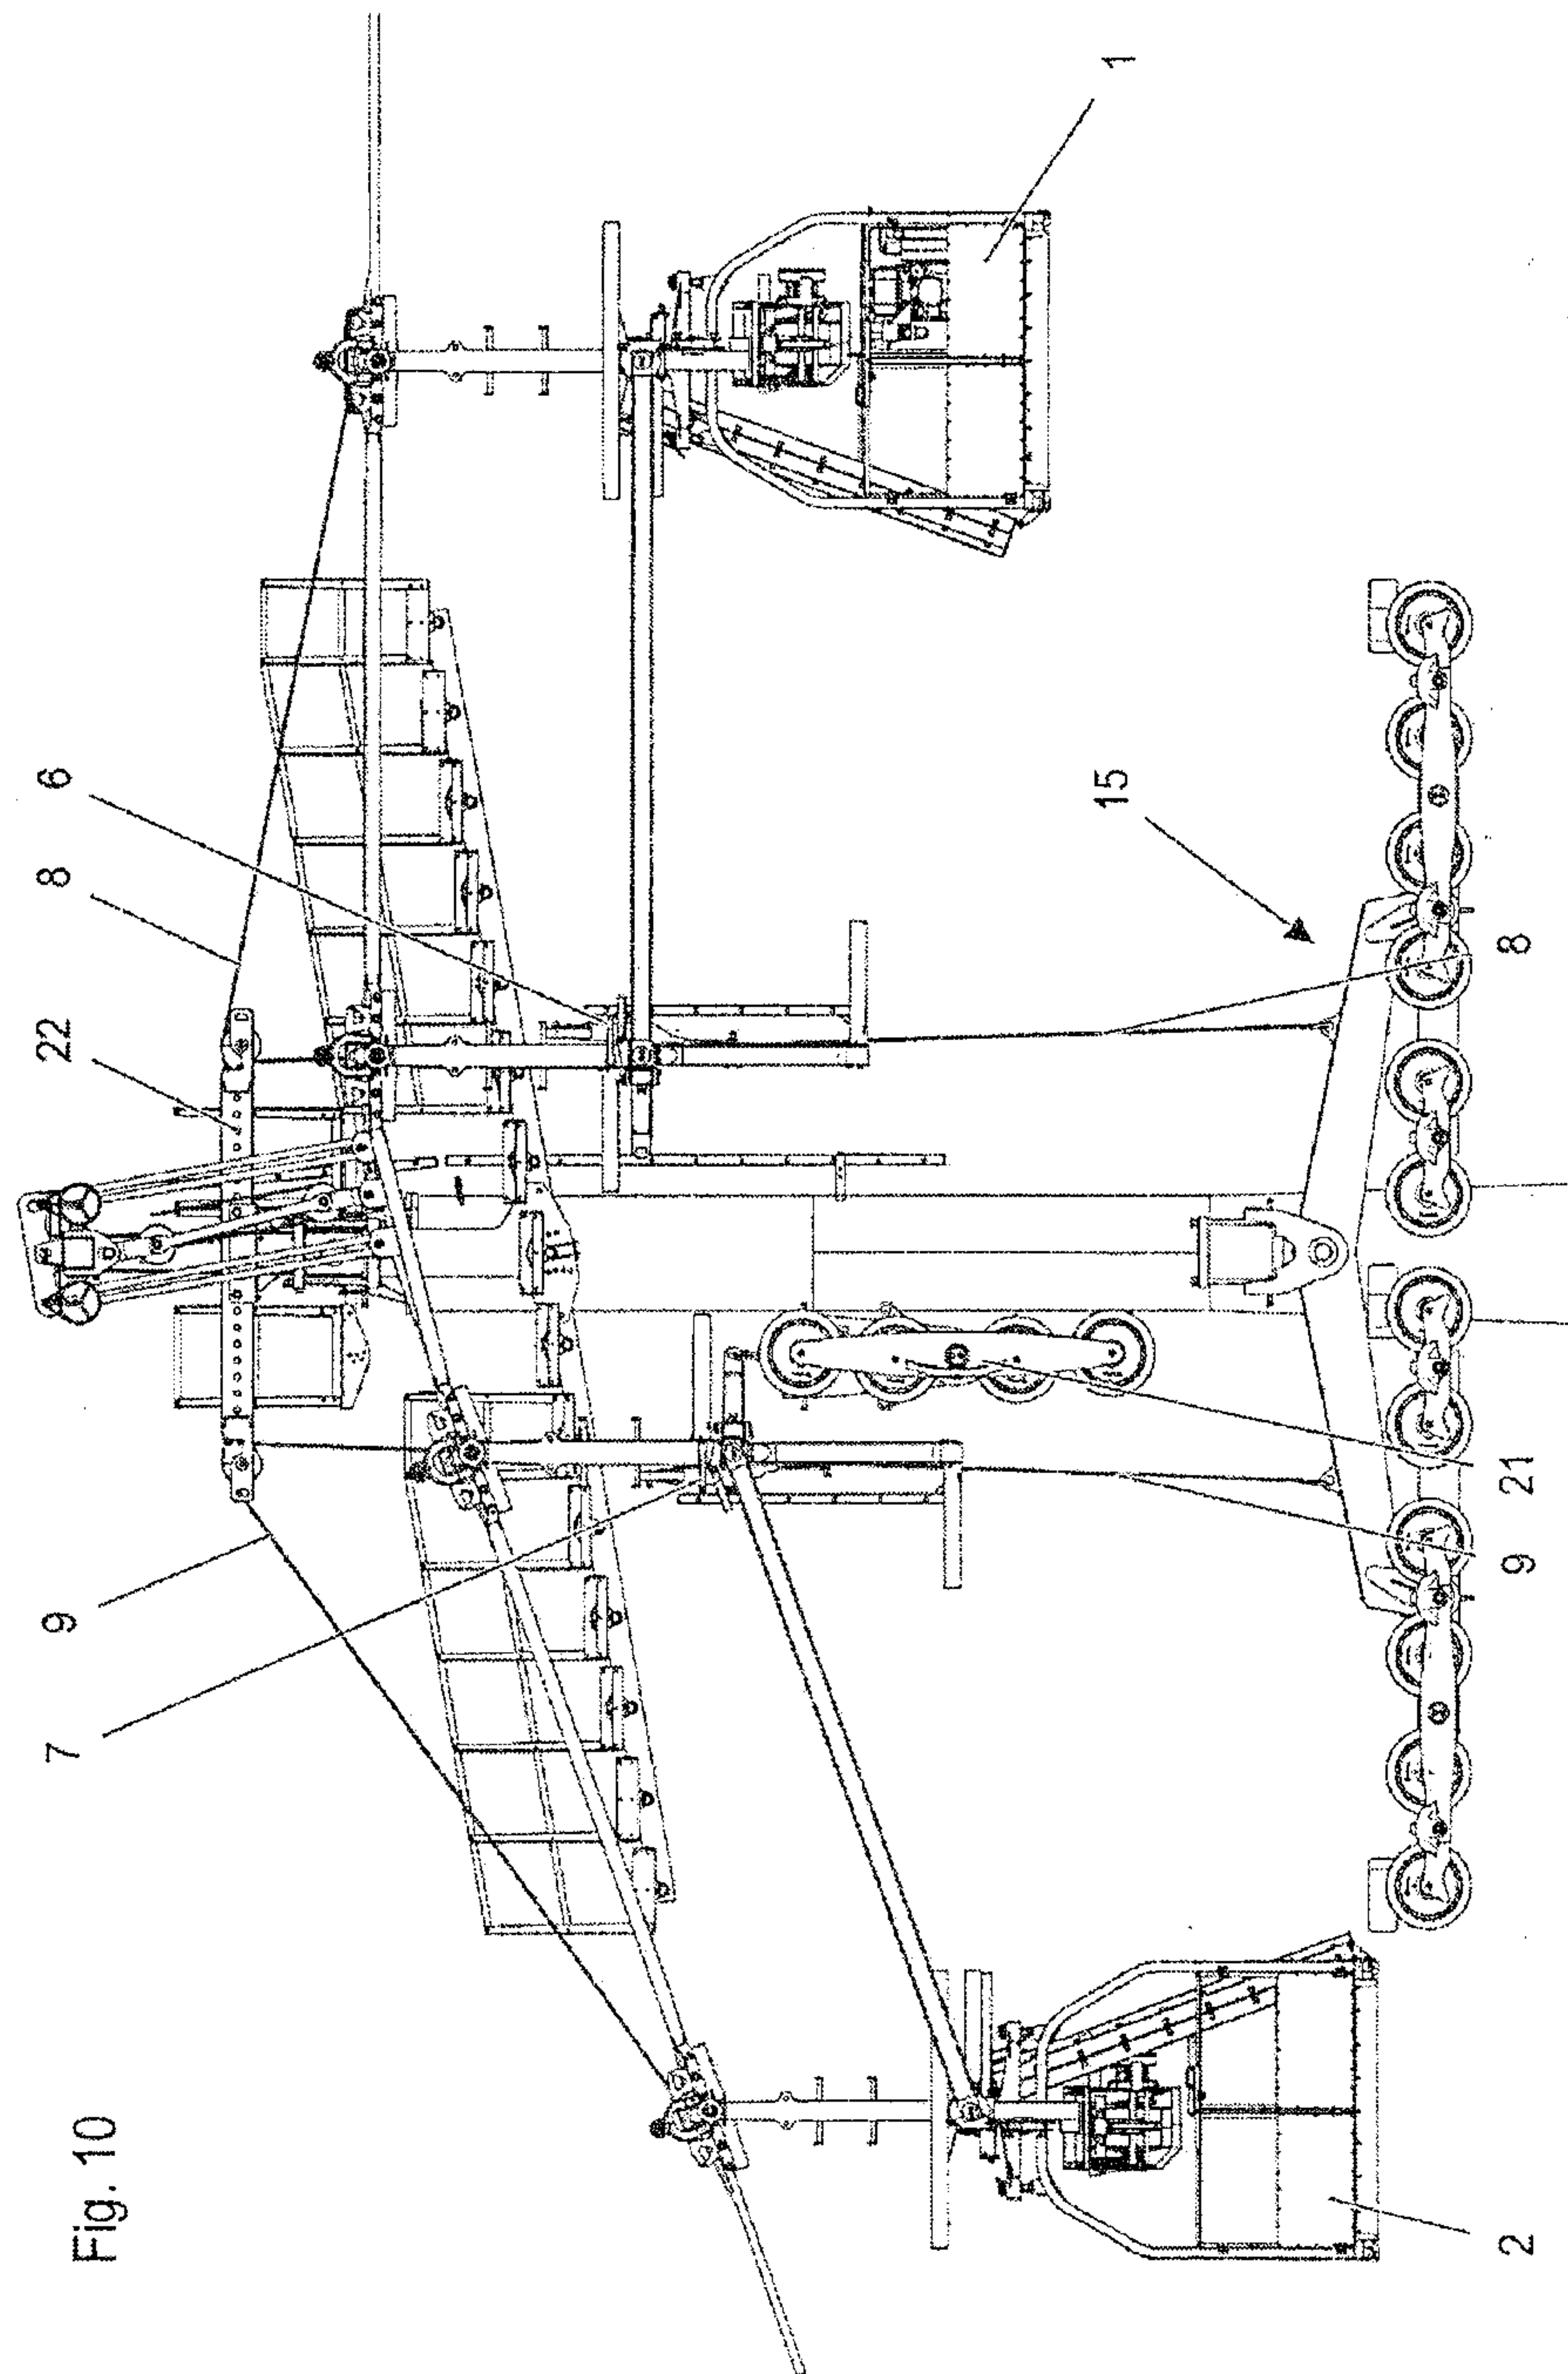


Fig. 9



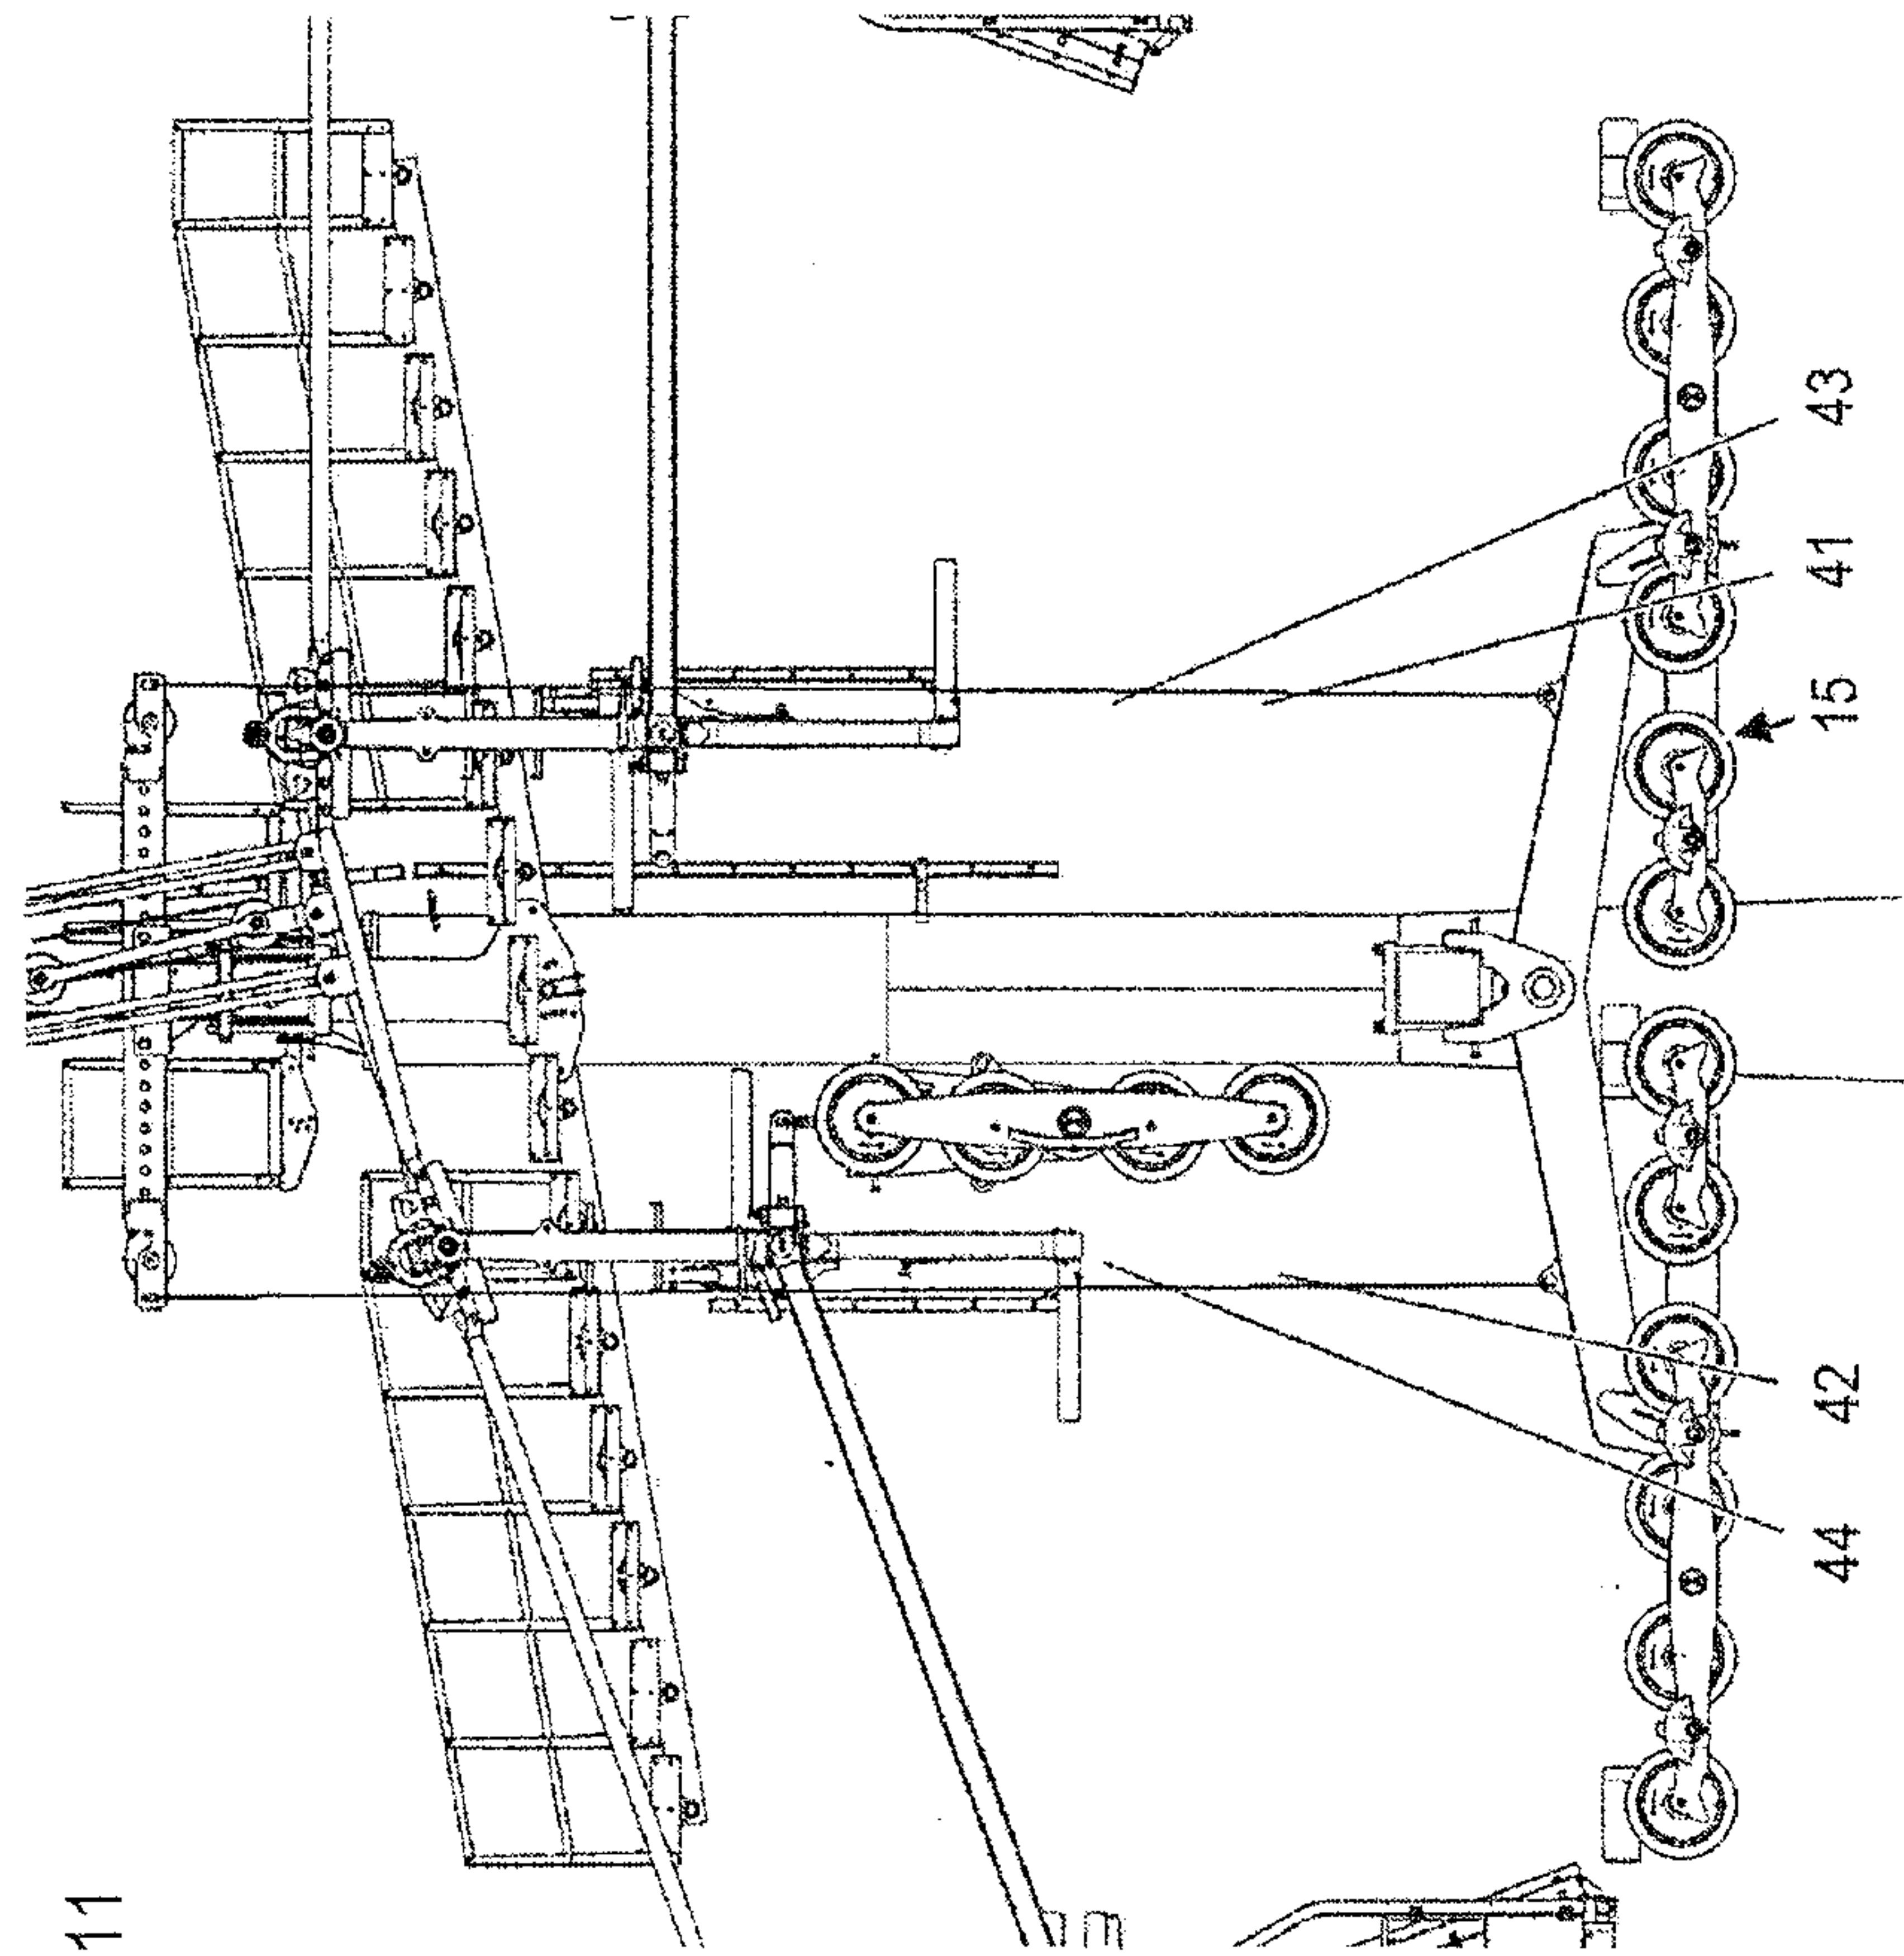


Fig. 11

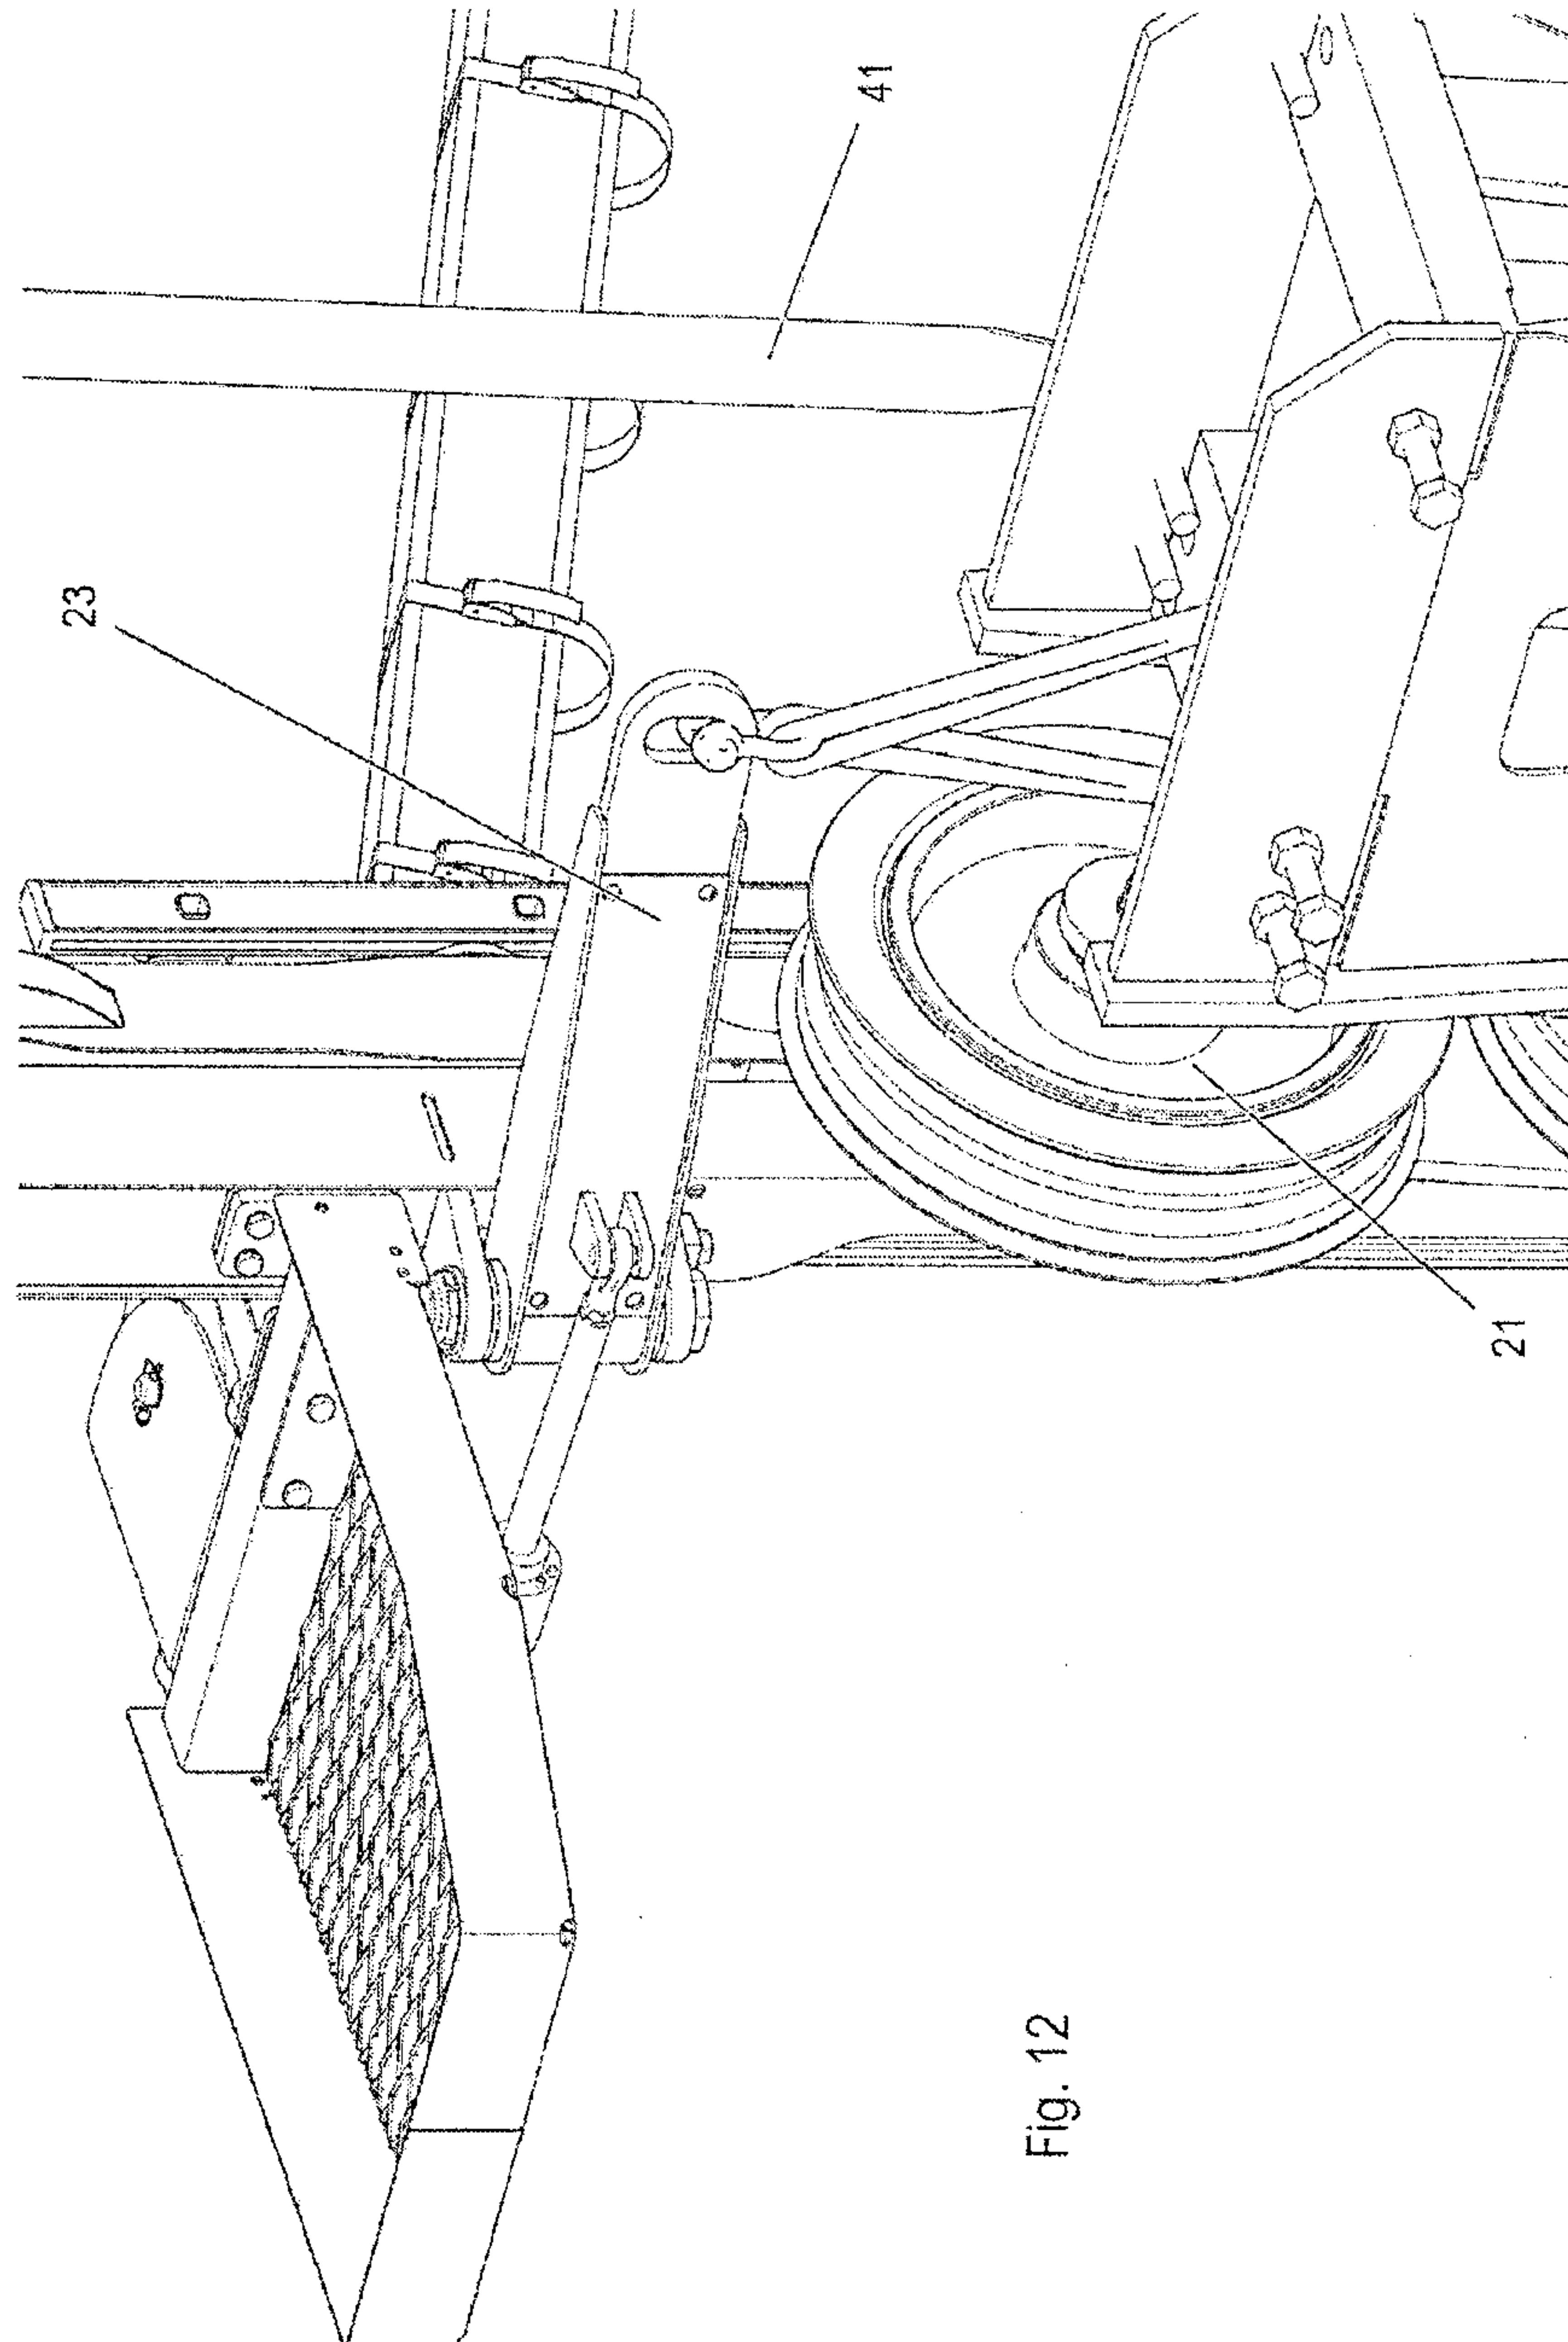


Fig. 12

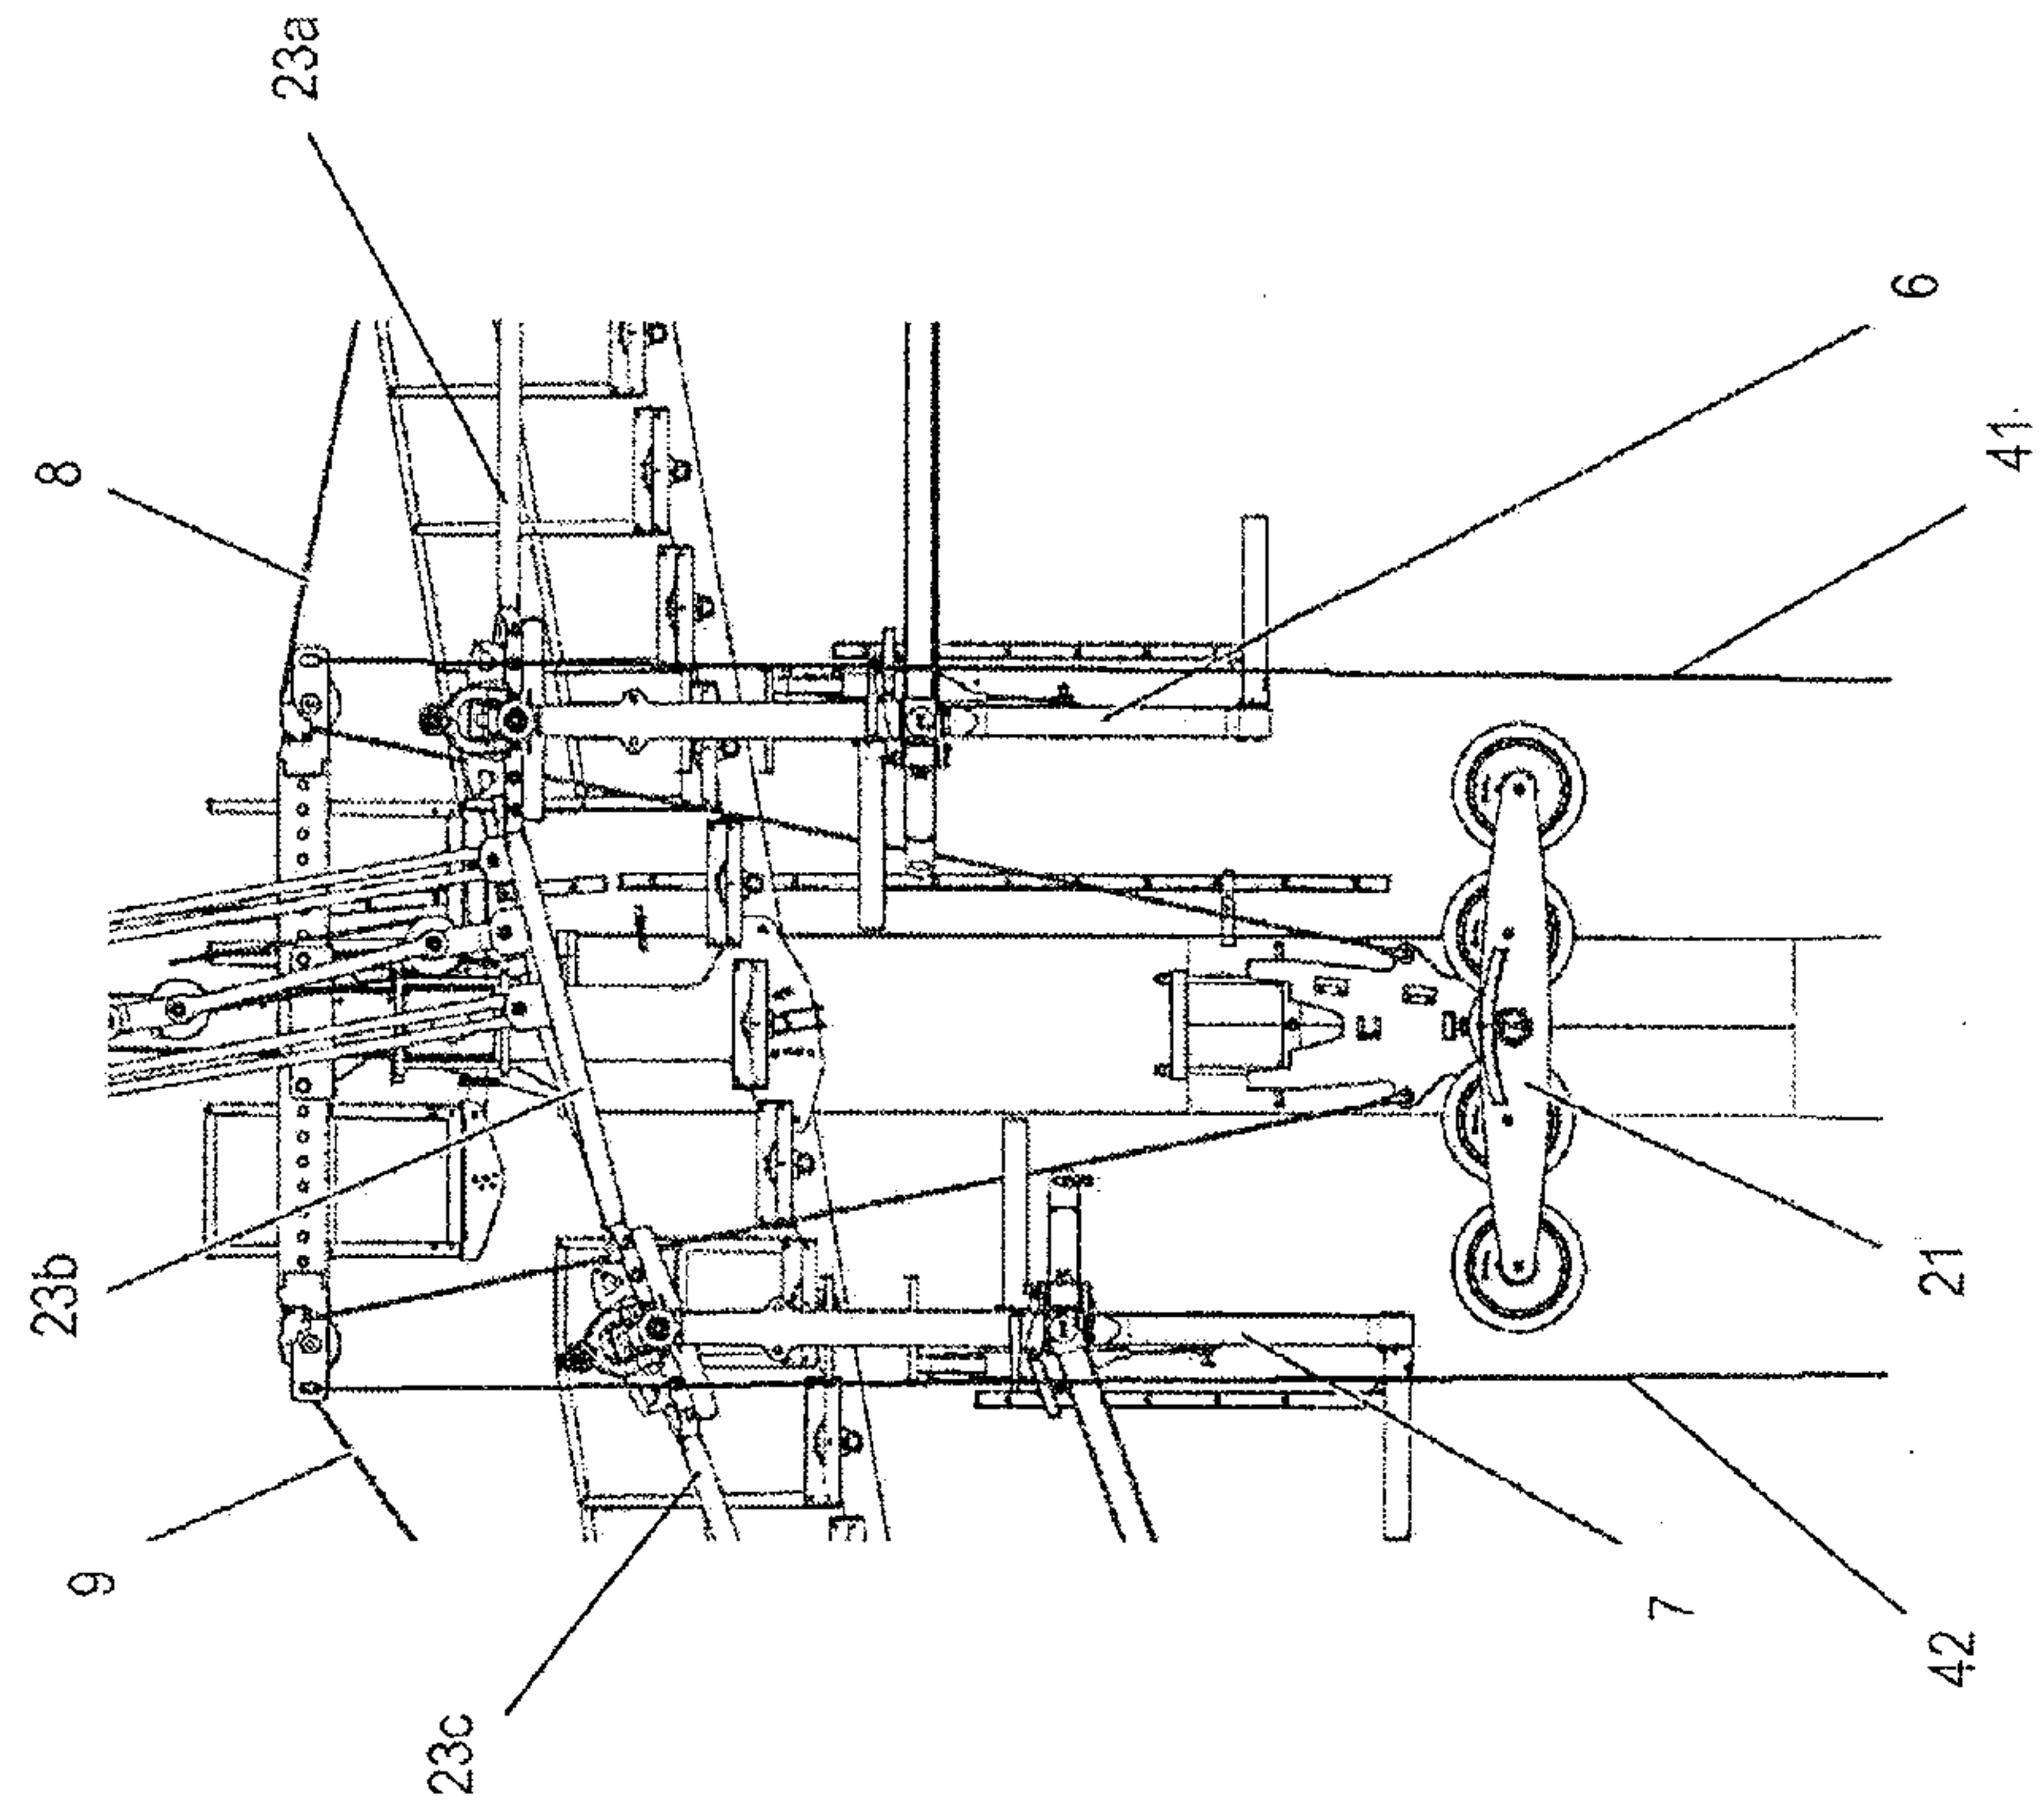
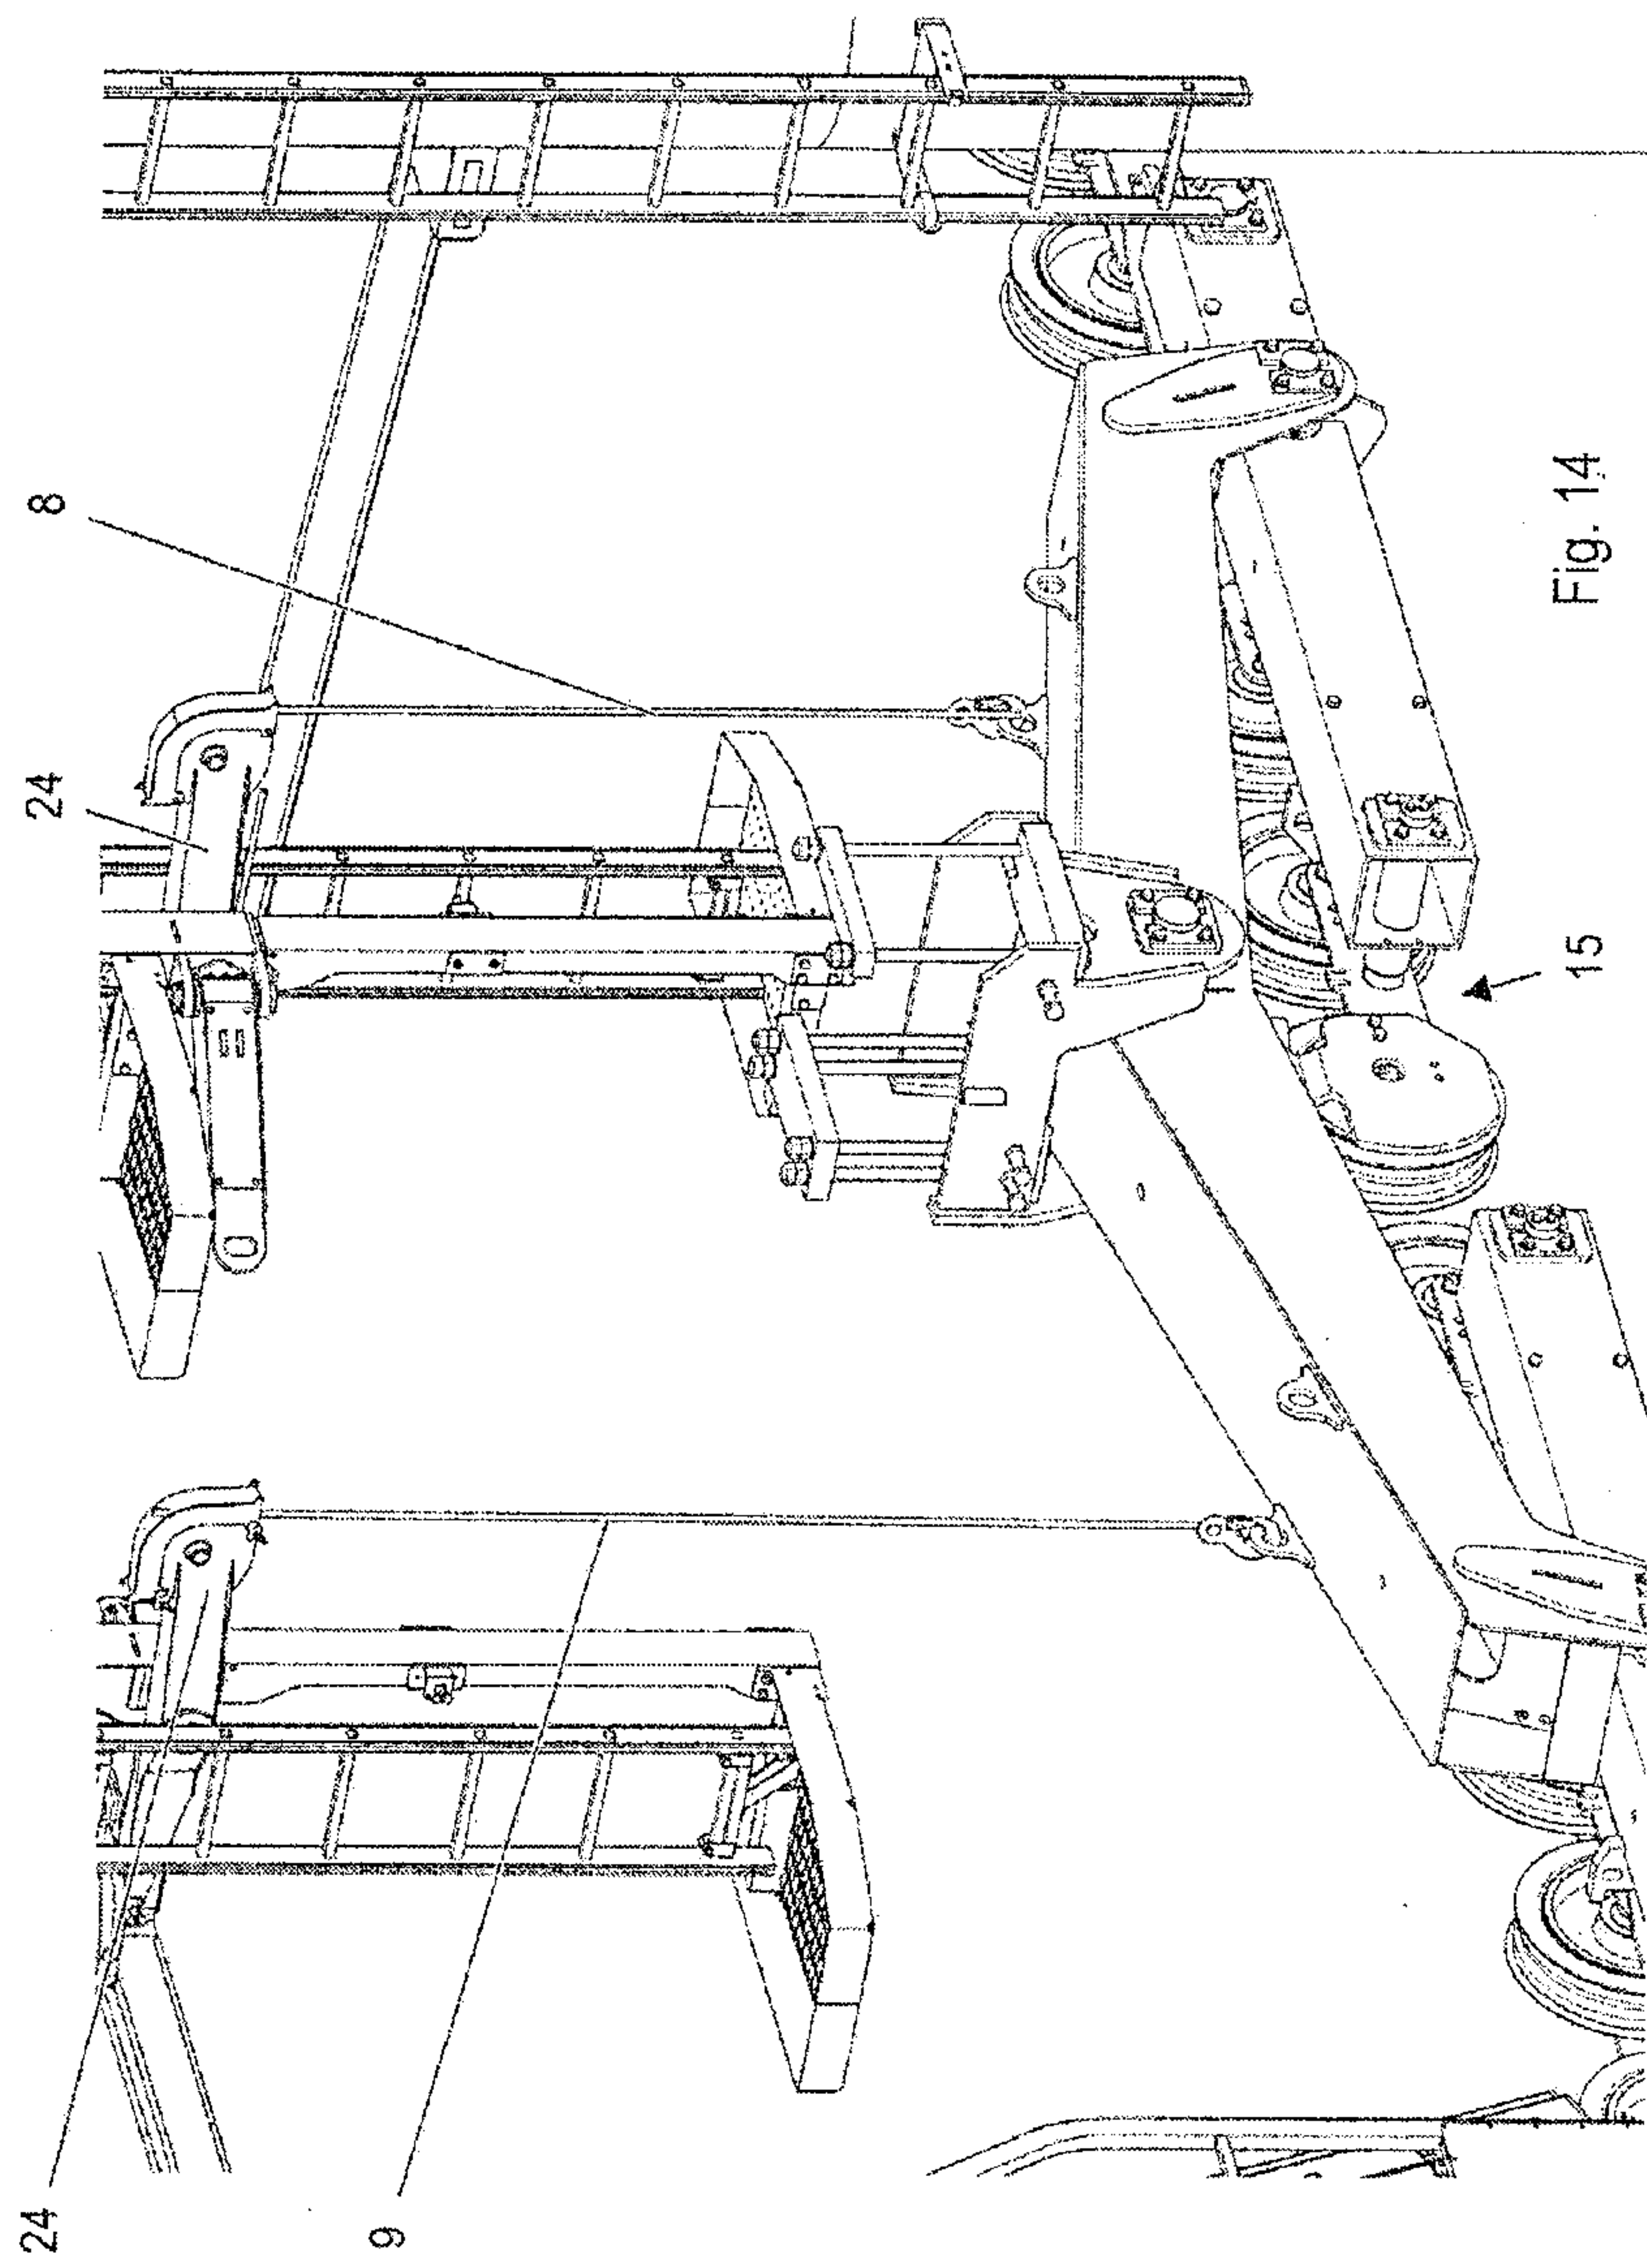


Fig. 13



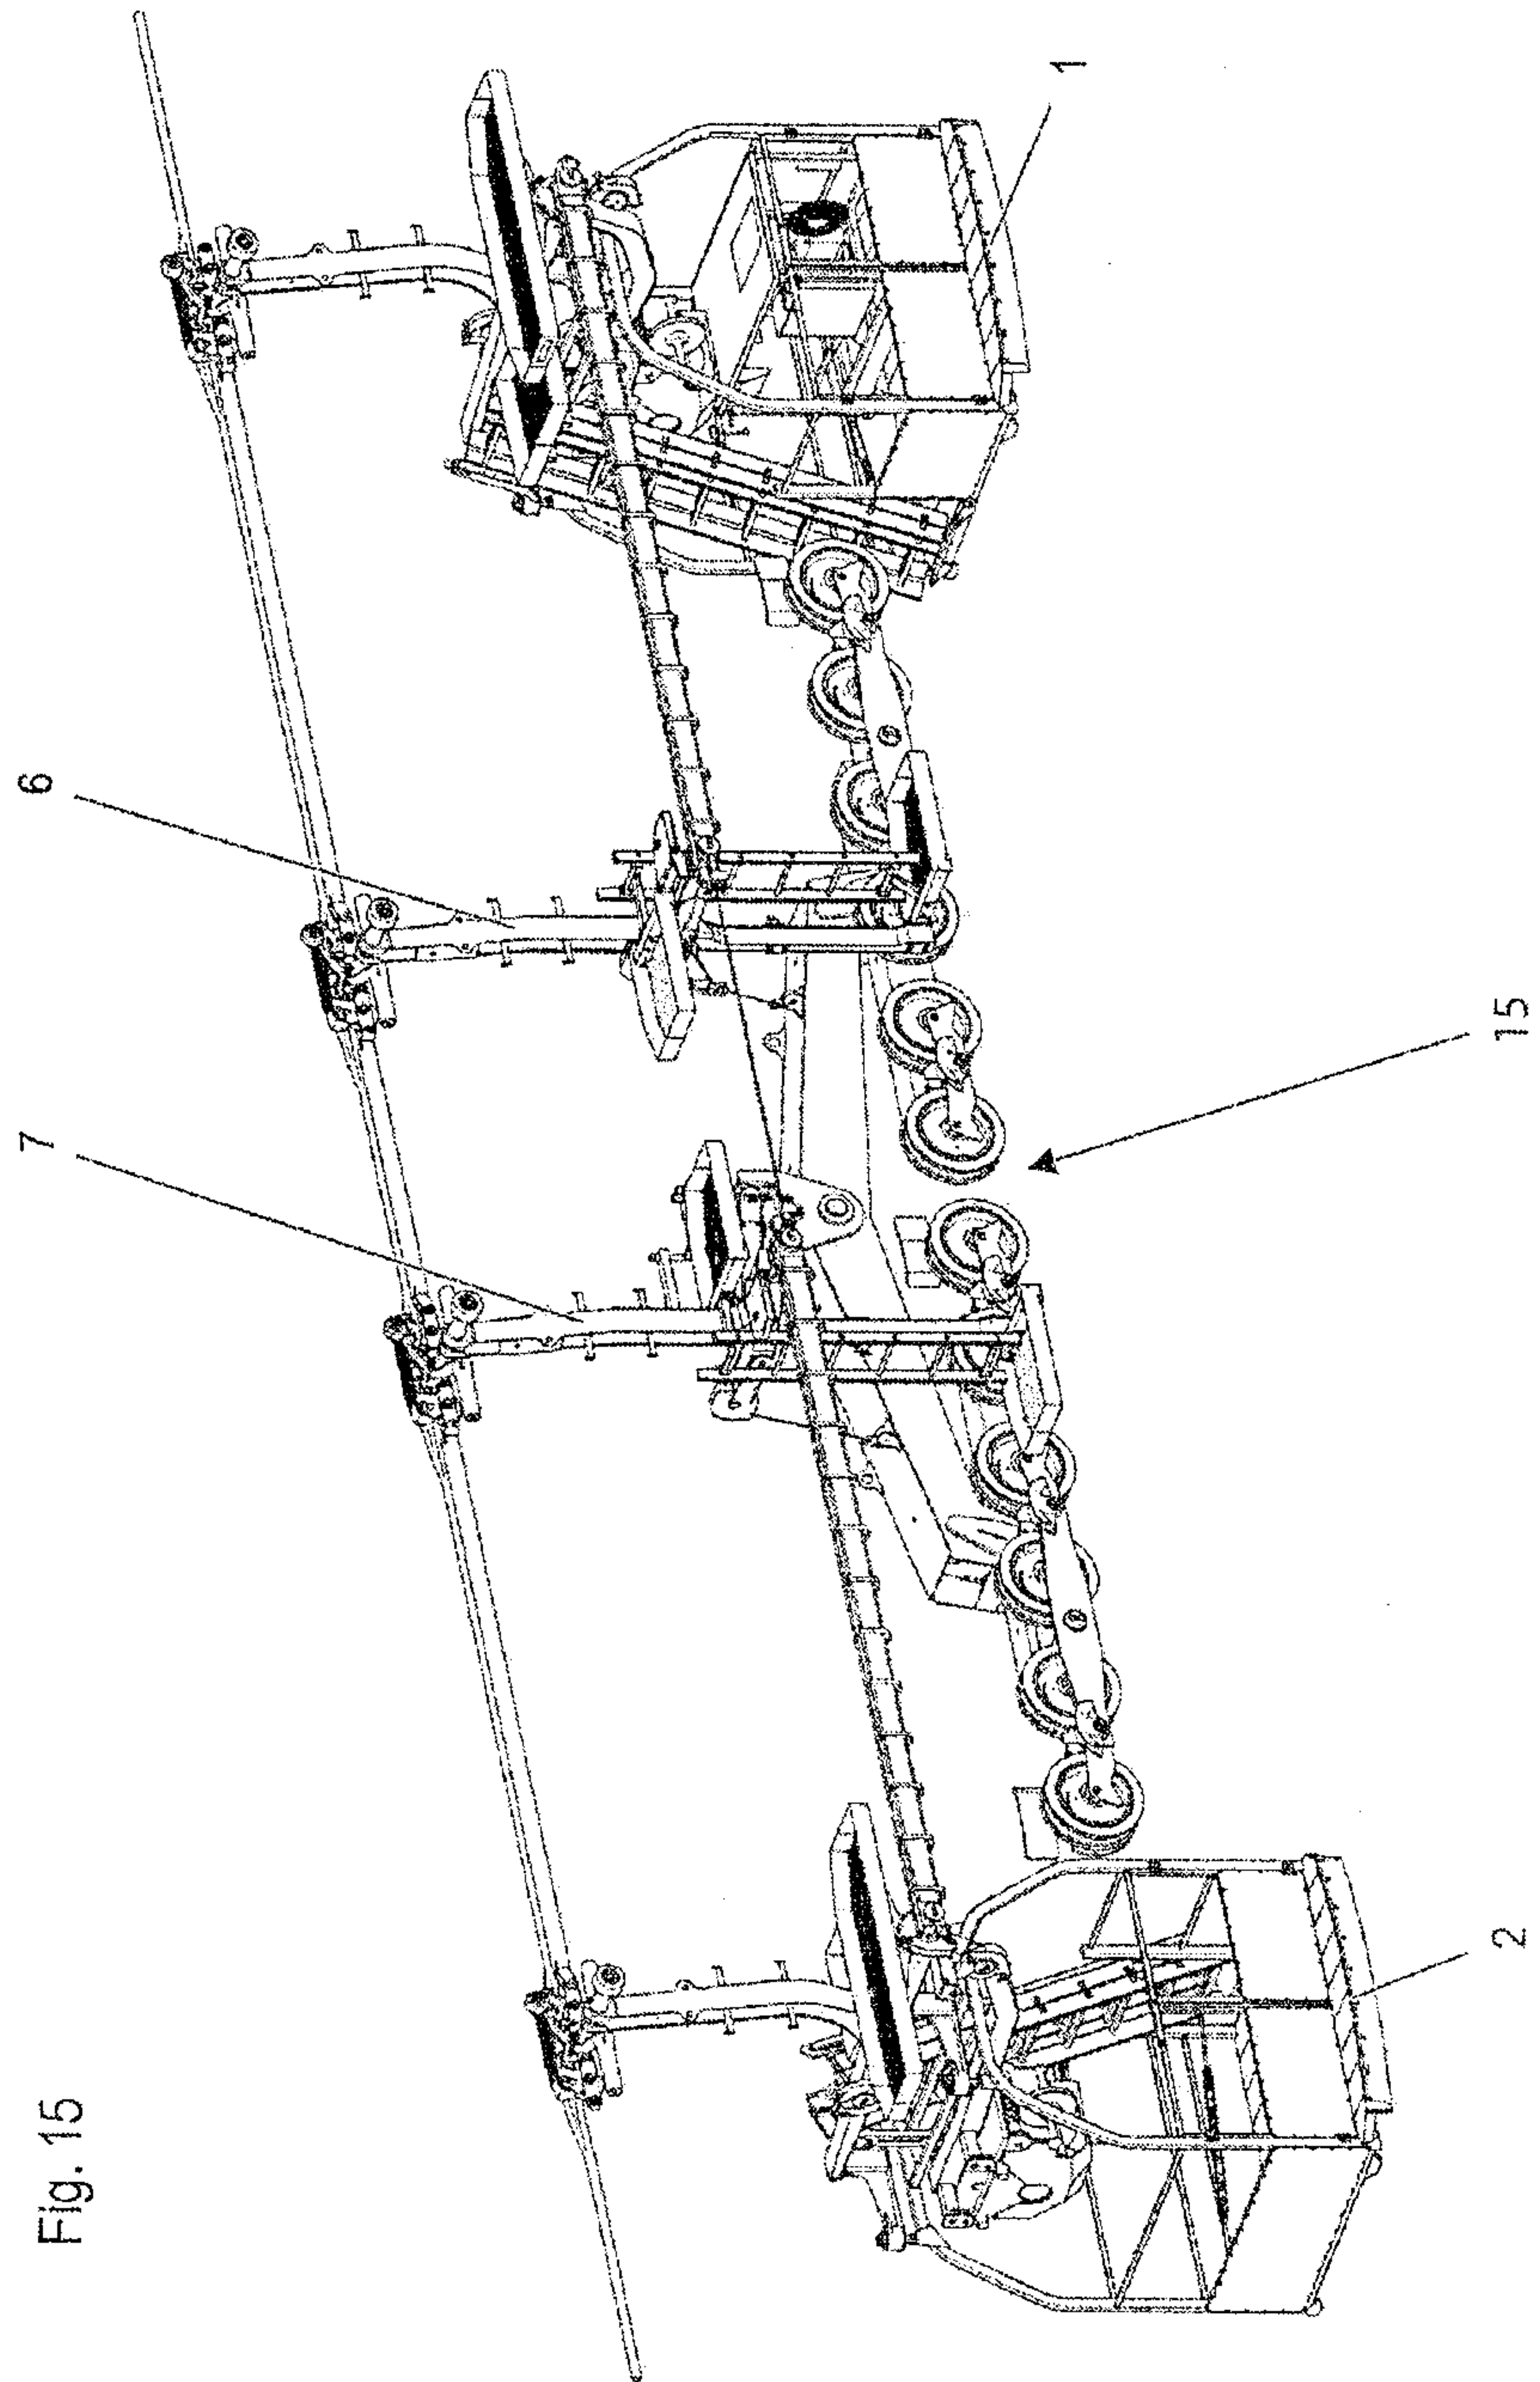
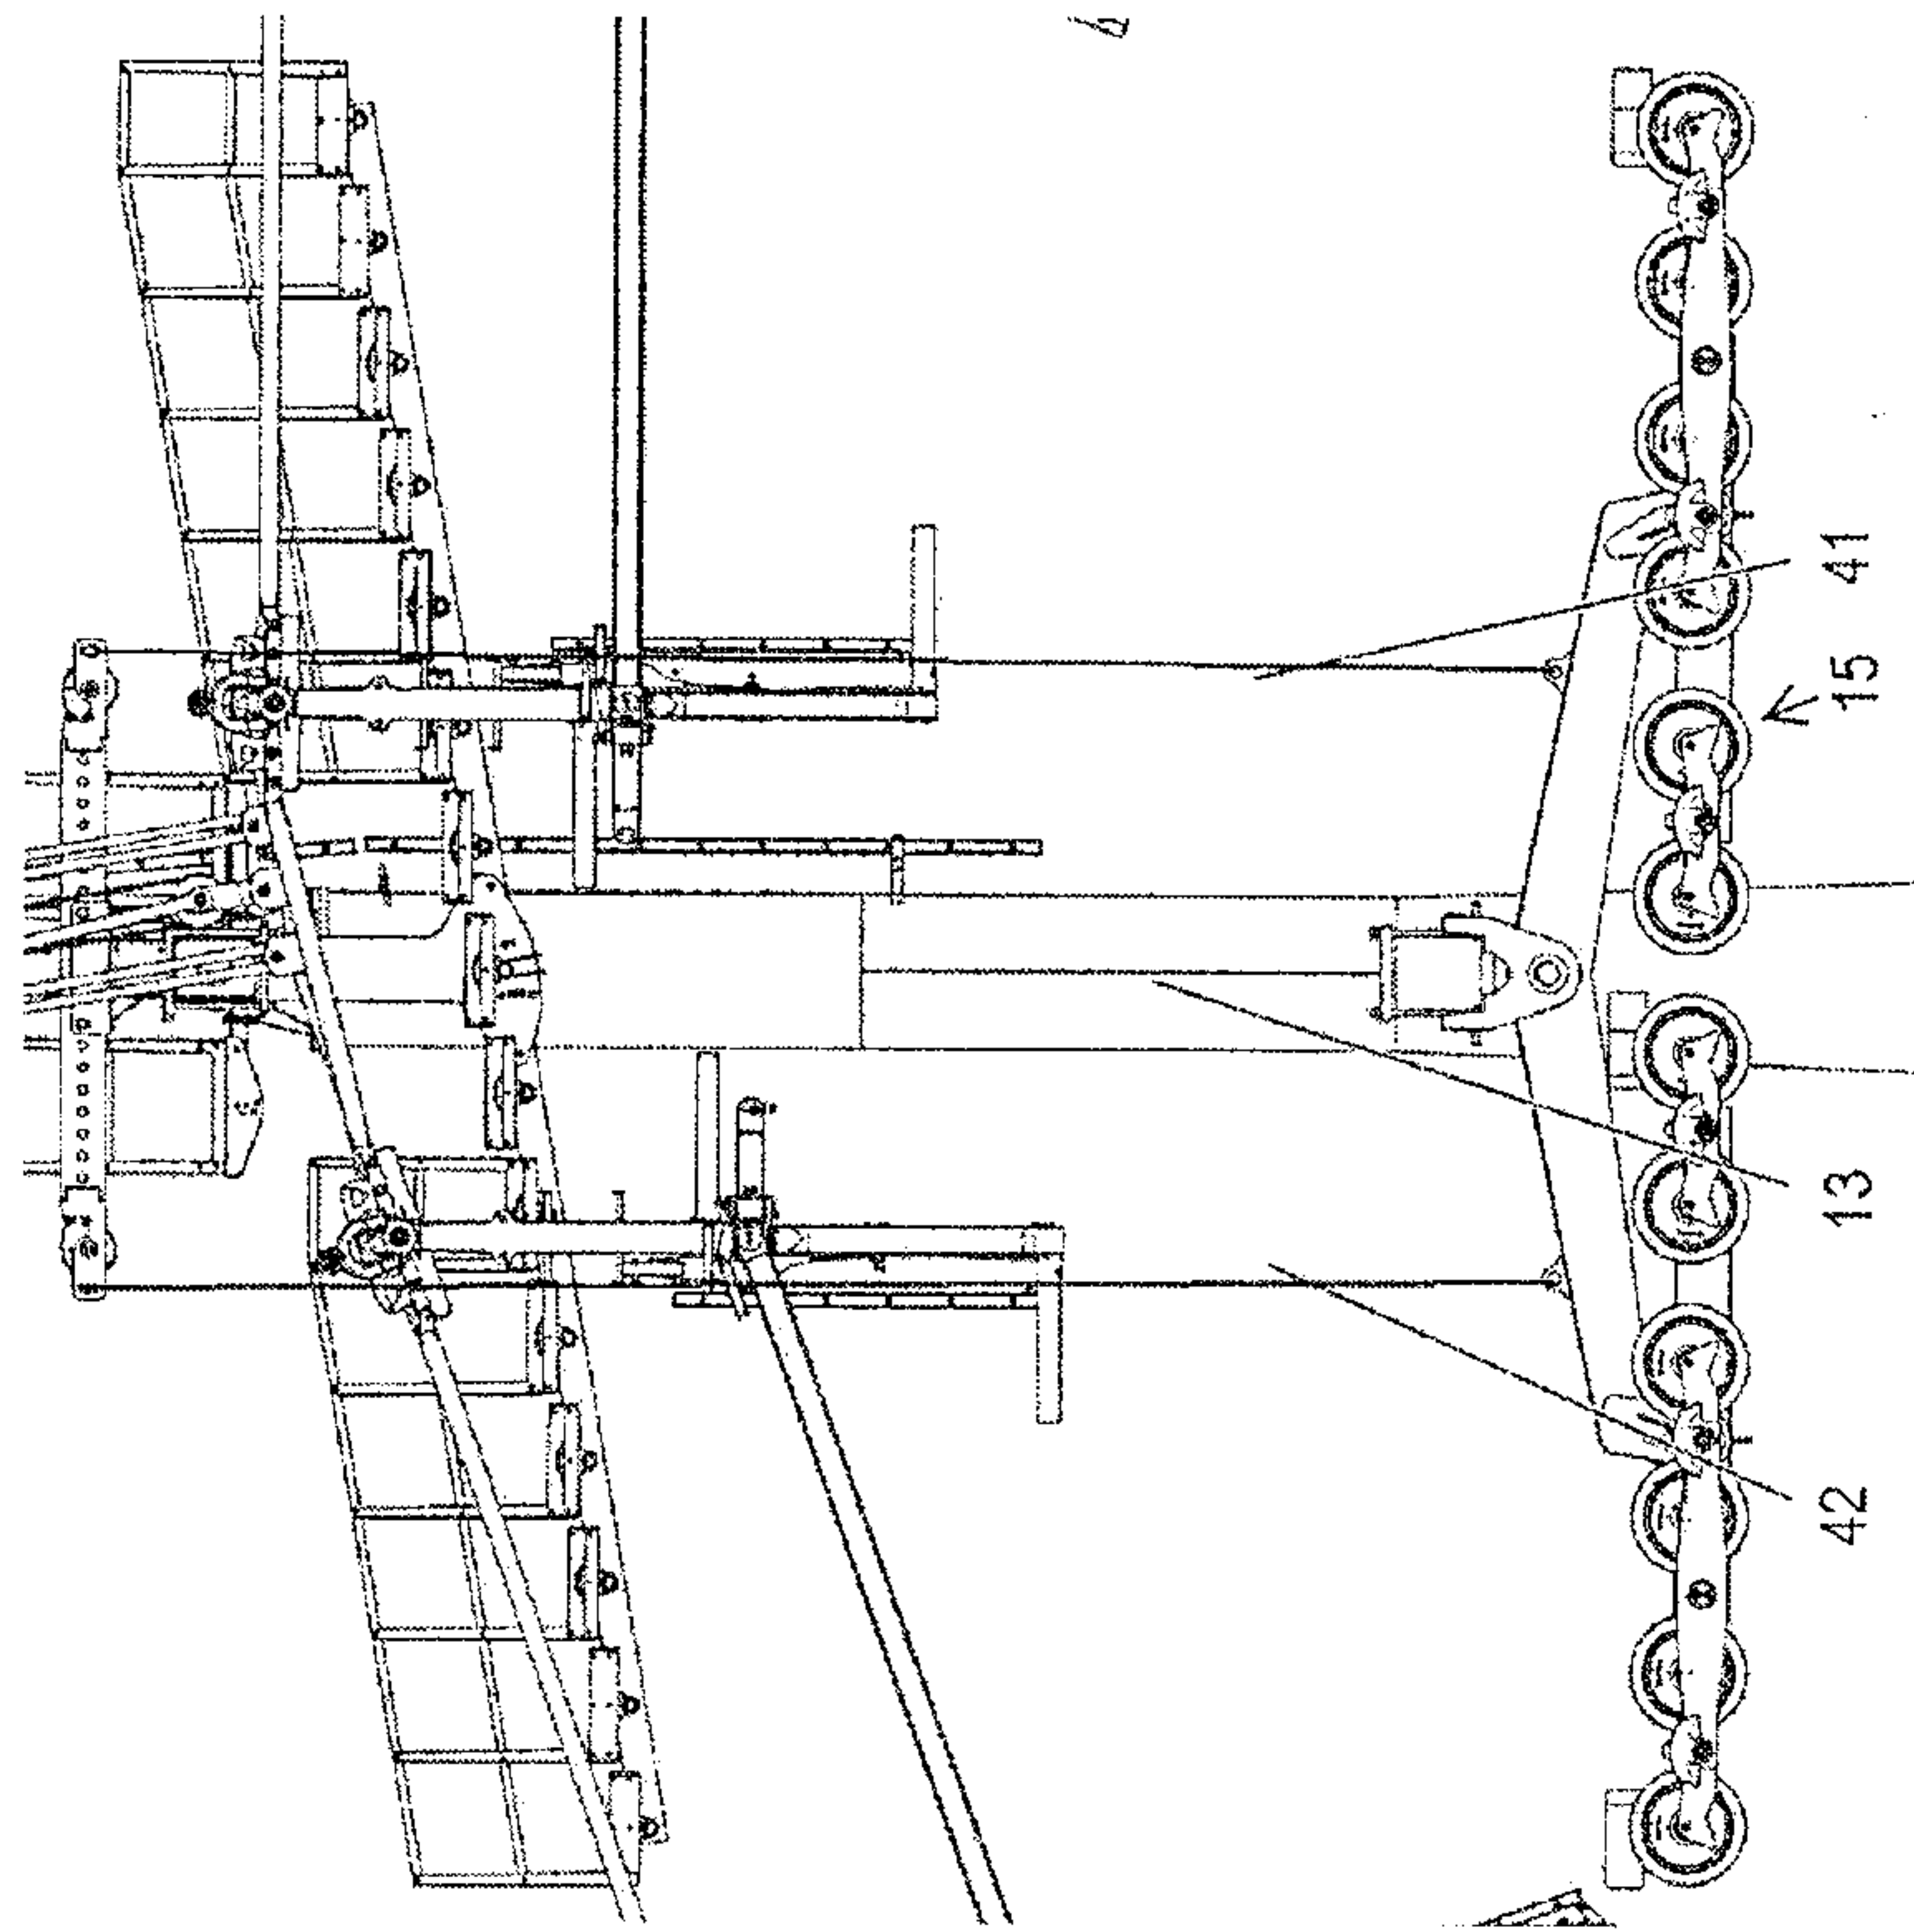


Fig. 15

Fig. 16



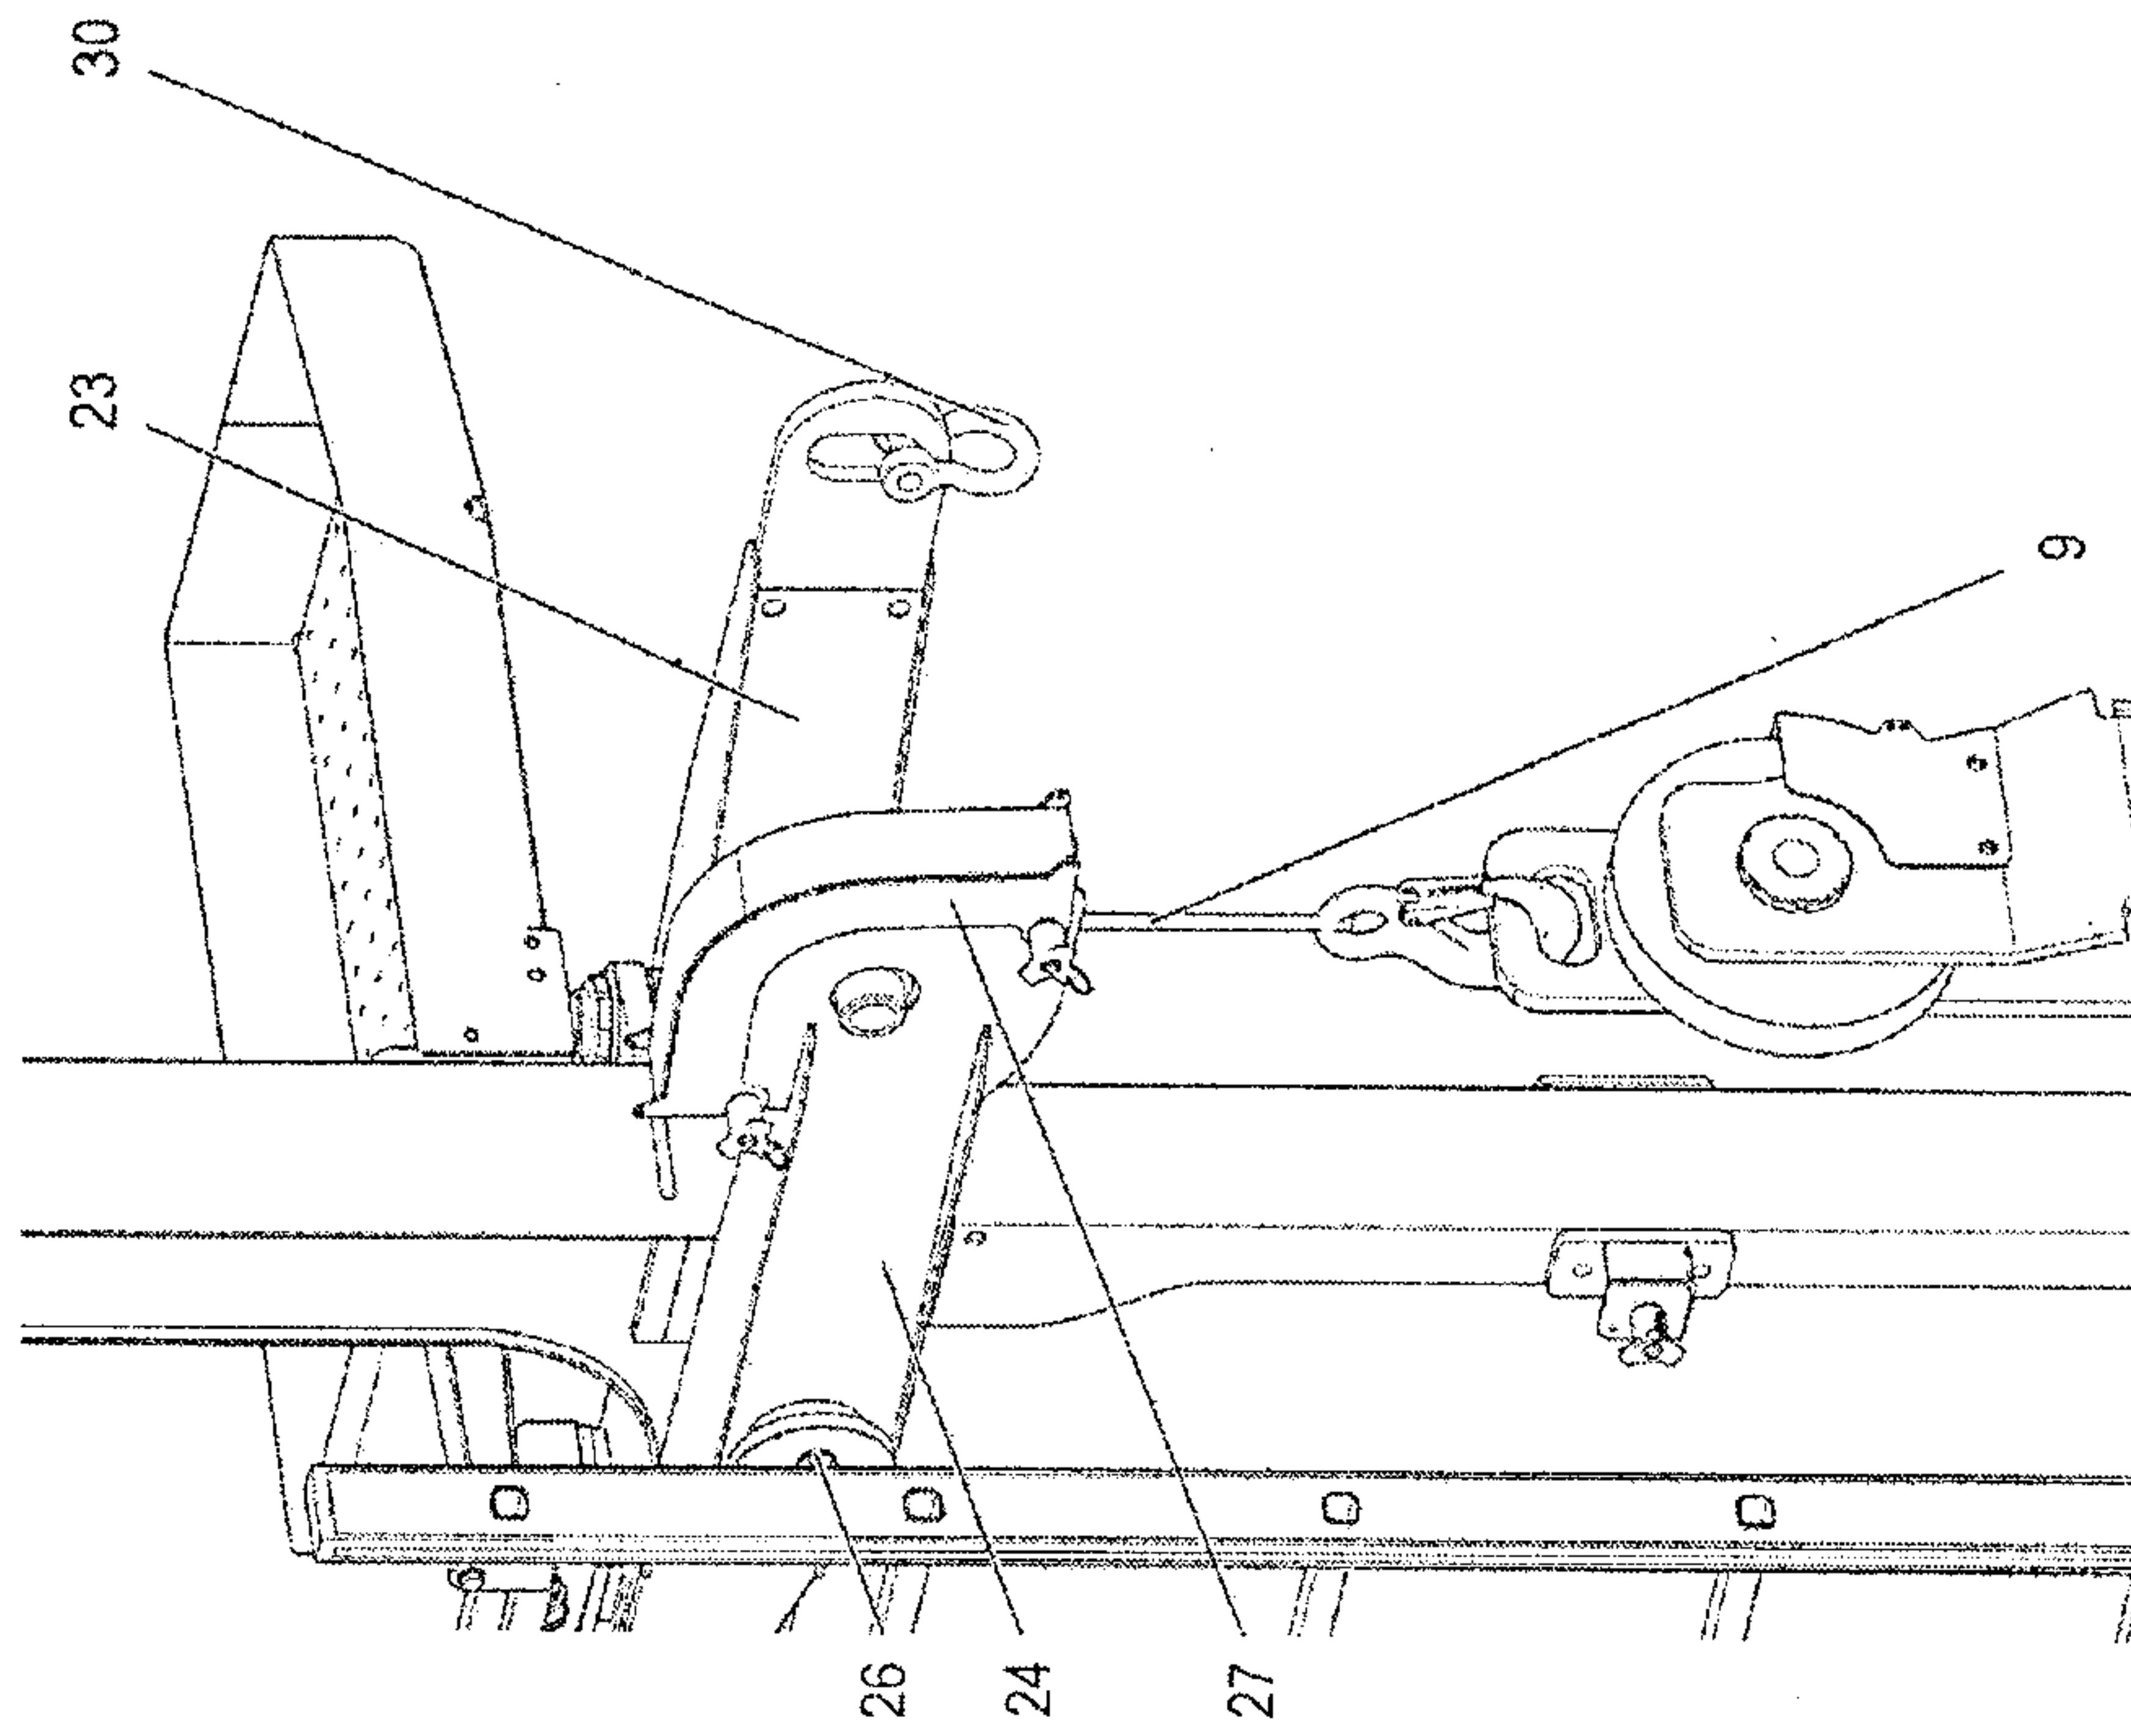


Fig. 17

