



- (51) International Patent Classification:
B44C 1/175 (2006.01)
- (21) International Application Number:
PCT/US2014/072473
- (22) International Filing Date:
29 December 2014 (29.12.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/923,947 6 January 2014 (06.01.2014) US
- (71) Applicant: AVERY DENNISON [US/US]; Retail Information Services, LLC, 8080 Norton Parkway, 22D, Mentor, OH 44060 (US).
- (72) Inventors: YI-HUNG, Chiao; 6211 Hart Ave., Temple City, CA 91780 (US). DINESCU, Liviu; 16th St. NE, Hickory, NC 29601 (US). SPENDLOVE, Andrew; Holteigvegen 14, N-6854 Kaupanger (NO). YTTRI, Johannes; Fortun, N-6877 Fortun (NO). TANRIKULI, Osman, N.; 4345 Cricket Cove Court, Denver, NC 28037 (US). O'BRIEN, Ben, T.; 1108 Quail Drive, Greensboro, NC 27408 (US).
- (74) Agents: MAIER, Michael, C. et al.; Avery Dennison Corporation, 8080 Norton Parkway, 22D, Mentor, OH 44060 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: HEAT TRANSFERS WITH MINIMAL TRANSFER MARKING ON PERFORMANCE FABRICS

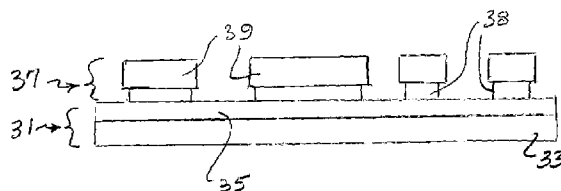


FIG. 1

(57) Abstract: Heat transfers are provided that have indicia for labeling or enhancing the appearance of performance fabric material, such as apparel including sportswear fabrics with elastomeric characteristics. The label assembly includes a support portion with a label carrier layer and a release coating, along with a transfer portion over the support portion release coating that includes an ink design and a hot melt adhesive layer. The hot melt adhesive layer securely transfers the ink design to the fabric at relatively low temperature and pressure conditions for a relatively low dwell time.



TITLE

HEAT TRANSFERS WITH MINIMAL TRANSFER MARKING ON PERFORMANCE FABRICS

Cross-Reference to Related Application(s)

[001] The present application claims priority from U.S. Provisional Application No. 61/923,947 filed January 6, 2014 which is incorporated by herein by reference in its entirety.

Background

Field of the Disclosure

[002] The present subject matter relates to heat transfers that feature anti-marking during transfer, particularly onto performance fabrics, particularly synthetic fabrics, textiles and garments, including sportswear fabrics, clothing and accessories. The present subject matter is especially suitable for transfers having an ink design layer protected by a support sheet suitable for use in heat-transfer labeling and the like.

Description of Related Art

[003] Transfer decoration, labels, patches, tags, identification placards, embellishments and the like are widely used for a variety of different applications including logos, trademarks, keyboard symbols, whether numeric, alphabetic or alphanumeric or other symbols, sports designs, logos and names, fabric and clothing design details, accents and backgrounds, artwork of various shapes and the like. At times these are referred to herein as designs, images and/or indicia. In some applications, these decorative components are in the nature of heat transfers, often referred to as labels, suitable for application on fabrics, clothing and accessories that are of the performance fabric variety exhibiting a relatively high degree of susceptibility to damage upon being subjected to heat transfer application. Such performance fabrics, clothing and accessories to be enhanced with heat transfer decorative components often concern so-called "soft goods," a term generally understood in the art. Examples include clothing, upper bodywear, lower bodywear, headwear, footwear, outerwear, underwear, garments, sportswear fabrics, other sheet goods, banners, flags, athletic or sport clothing, uniforms, and combinations thereof.

[004] Performance fabrics for soft goods or the like can include those exhibiting stretchability, soft touch tactile characteristics, and vivid color appearance, while being flexible in process manufacturing. Typical synthetic fibers suitable for inclusion in the performance fabric category include polyesters,

polyamides, nylons, and combinations of such materials with cotton and/or stretchable or resilient materials such as spandex or elastane or Lycra® and the like. Performance fabrics are a particular challenge for heat transfers, being susceptible to damage during ink design enhancement and unwanted “ghost” marking formation during the heat transfer process.

[005] Thermal transfer laminates for heat transfer labels and procedures are generally known. Examples include the following. U.S. Patent No. 7,906,189 concerns heat transfer labeling for fabric incorporating a release coating for addressing problems encountered when trying to effect a cleaner release of the label from the fabric, often in the context of cooling time shortening. U.S. Patent No. 6,228,486 concerns heat transfer laminates for ink or graphics layers adhered to the release coating. U.S. Patent No. 8,349,427 concerns heat transfer labels that can incorporate an adhesive layer, a solvent-borne ink and includes a dye migration resistant property. These do not address and solve the problem of achieving secure heat transfer of ink designs, images and/or indicia on performance fabrics while minimizing or eliminating undesirable markings during the heat transfer procedure by heat transfer bonder equipment.

Summary

[006] There are several aspects of the present subject matter which may be embodied separately or together in the devices and systems described and claimed below. These aspects may be employed alone or in combination with other aspects of the subject matter described herein, and the description of these aspects together is not intended to preclude the use of these aspects separately or the claiming of such aspects separately or in different combinations as may be set forth in the claims appended hereto.

[007] Heat transfer labeling of textile and garment fabrics typically is conducted under high heat, high pressure and long dwell time, which has been found to at times lead to various burn marks, pressure marks, bonder marks, die marks, release marks, transfer marks and the like on the fabric surface. In embodiments, the present disclosure provides a unique heat transfer label design and can combine effective chemistry features and, when desired, layer construction to address these issues, particularly for performance fabrics that can be especially susceptible to such performance issues. Layer construction can be modified with respect to release layer, printed ink and heat transfer components in solving problems associated with these types of products. For example, embodiments of this disclosure enable a very successful heat transfer of images to be carried out at lower pressure and temperature and for shorter dwell times than typically needed with previous heat transfer labels and methods, while

achieving same with no or minimal visible transfer marking while maintaining high print quality, excellent wash resistance, soft-to-the touch characteristics and stretchability, all of which can be especially important for fabrics, textiles and garments that are recognized as being in the performance category.

[008] In one aspect of this disclosure, a heat transferable label is provided that has a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design or indicia layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time.

[009] In another aspect, of this disclosure, a heat transferable label is provided that has a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The release coating is sized and shaped in substantial conformance with the size and shape of an image delineated by the ink design layer, for addressing ghost image generation by the release coating upon heat transfer application. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time.

[0010] In further aspect of this disclosure, a heat transferable label is provided that has a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The release coating is sized and shaped in substantial conformance with the size and shape of an image delineated by the ink design layer and by the hot melt adhesive layer, for addressing ghost image generation by the release coating upon heat transfer application. The hot melt adhesive layer securely adheres the heat transfer label to

the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time.

[0011] In an added aspect of this disclosure, a heat transferable label is provided that has a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time. The hot melt adhesive layer is a thermoplastic polyester polymer hot melt adhesive powder with elastomeric dispersion, combined with a thermoplastic polyurethane hot melt adhesive powder.

[0012] In a further aspect, the disclosure relates to a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time. The hot melt adhesive layer is a thermoplastic polyester polymer hot melt adhesive powder with elastomeric dispersion, combined with a thermoplastic polyurethane hot melt adhesive powder and a resin that is a solid plasticizer tackifier.

[0013] In an additional aspect, the disclosure relates to a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time. The hot melt adhesive layer is a thermoplastic polyurethane polymer hot melt adhesive powder with elastomeric dispersion, combined with a polyamide hot melt adhesive powder and a resin that is a solid plasticizer tackifier.

[0014] In another aspect, the disclosure relates to a label carrier or support portion with a release coating, as well as a transfer portion positioned over the label carrier release coating for transfer of the transfer portion from the label carrier to a performance fabric under conditions of heat and pressure for a given dwell time. The transfer portion comprises a hot melt adhesive layer with first surface for fabric contact and a second surface with an ink design layer printed onto it, the ink design layer exhibiting recoverable stretch properties. The hot melt adhesive layer securely adheres the heat transfer label to the performance fabric under conditions of relatively low temperature and pressure and short heat transfer dwell time. The hot melt adhesive layer is a thermoplastic polyurethane polymer hot melt adhesive powder, combined with a resin that is a solid plasticizer tackifier.

Brief Description of the Drawings

[0015] Fig. 1 is a schematic illustration showing multiple layers of a first embodiment according to the present disclosure;

[0016] Fig. 2 is a schematic illustration showing multiple layers of a second embodiment according to the present disclosure; and

[0017] Fig. 3 is a plot of tensile strength versus load illustrating stretch property of a soft and stretchable printing ink at three different tensile strain extensions.

Description of the Illustrated Embodiments

[0018] As required, detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the invention, which may be embodied in various forms. Therefore, specific details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the present invention in virtually any appropriate manner.

[0019] Fig. 1 is a schematic representation of a heat transfer label construction and illustrates a first embodiment that achieves secure and substantially permanent transfer of a desired image, design and/or indicia to a performance fabric under less rigorous heat transfer conditions when compared with other heat transfer label constructions not according to the present disclosure. These less rigorous heat transfer conditions include one or more of lower temperature than such other constructions, lower pressure than such other constructions, and shorter dwell time within the heat transfer equipment than required for such other constructions. In the most advantageous arrangements, all of lower temperature, lower pressure and shorter dwell time are followed without detrimentally affecting

transfer effectiveness. Each less rigorous heat transfer condition has been found to eliminate or substantially minimize visible transfer marking and to maintain high print quality of the performance fabric subjected to the heat transfer. The resultant performance fabric, textile or garment has been found to exhibit wash resistance, soft touch properties and stretchability.

[0020] A support portion, generally designated at 31, is shown in the Fig. 1 heat transfer embodiment to include a label carrier 33 and a release layer or coating 35 that takes the form of a non-transfer release, discussed in more detail herein below. The support portion 31 typically is provided which has the function of a label carrier that provides mechanical strength to the label assembly allowing handling such as being wound up in a roll for storage, stacking, and as a label feed for mechanized operations. Basically, the support portion is a sheet carrier and a release layer. Typical label carrier sheets are cellulosic or polymeric film, such as polyethylene terephthalate (PET). A typical release layer or coating 35 is a low melting temperature, thinly coated film on the sheet carrier that facilitates peeling of the transfer portion from the sheet carrier when the heat transfer is completed. An example of a support portion 31 is an "O6" liner which is thermally stabilized polyethylene terephthalate (PET) of about 5 mil thickness coated with an amide wax-based heat-induced release layer 35, commercialized by Avery Dennison (RBIS Division). Other release layers 35 include extruded polypropylene (such as same commercially available from Felix Schoeller), 3.04, 4.14, and HD release print and coatings of Avery Dennison, TGR and CGR (C-matte) polyester-based compositions from Hanse Corporation, and S-4 and S-6 release coated PET from ADC.

[0021] A first surface of the non-transfer release 35 is on the label carrier 33, while the opposite, second surface has positioned thereon a transfer portion, generally designated at 37. The transfer portion provides the heat transferred design, image and/or indicia elements that are made from the transfer or label of this embodiment and that transfer to the fabric. Included in the transfer portion of this illustrated heat transfer is a printed ink design layer 38 and a heat transfer adhesive layer or component 39. The materials of these components, especially of the heat transfer adhesive layer, are important in achieving heat transfer of the design elements onto the fabric under reduced temperature, pressure and dwell time conditions, minimizing risk of damage to the fabric and/or the design during the heat transfer process.

[0022] With further reference to the non-transfer release aspects of this embodiment, the non-transfer release 35 is of a size and footprint that substantially conforms to the size and footprint of the label carrier 33. It will be understood that, in this context, "footprint" can designate the overall shape outlined by the perimeter of the component referenced, or its covering area. With this approach, only

the transfer portion 37 (including the printed ink layer 38 in the configuration of the image to be transferred and the heat transfer adhesive layer 39) transfers to the fabric by the heat transfer action. The non-transfer release layer 35 does not transfer.

[0023] Fig. 2 is a schematic representation of another heat transfer label construction and illustrates a second embodiment that also achieves secure and substantially permanent transfer of a desired image, design and/or indicia to a performance fabric under less rigorous heat transfer conditions when compared with other heat transfer label constructions not according to the present disclosure. This embodiment also adds a feature that further minimizes the chance of “ghost” images appearing on the fabric caused by the heat transfer operation. Typically such ghost images outline the design and/or indicia that have been heat transferred and appearing as undesirable markings on the fabric at locations close to all or part of the design and/or indicia image.

[0024] A support portion, generally designated at 31, is shown in the Fig. 1 heat transfer embodiment to include a label carrier 33 and a release layer or coating 35 that takes the form of a non-transfer release, discussed in more detail herein below. A first surface of the non-transfer release 35 is on the label carrier 33, while the opposite, second surface has positioned thereon a transfer portion, generally designated at 37. The transfer portion provides the design, image and/or indicia elements of the heat transfer from the transfer or label of this embodiment to the fabric. Included in the transfer portion of this illustrated heat transfer is a printed ink design layer 38 and a heat transfer adhesive 39. The materials of these components, especially of the heat transfer adhesive layer, are important in achieving heat transfer of the design elements onto the fabric under reduced temperature, pressure and dwell time conditions, minimizing risk of damage to the fabric and/or the design during the heat transfer process.

[0025] A support portion, generally designated at 41, is shown in the Fig. 2 heat transfer embodiment to include a label carrier 43 and a release layer or coating that takes the form of a shaped release, discussed in more detail herein below. A first surface of the shaped release, generally designated at 45, is on the label carrier 43, while the opposite, second surface has positioned thereon a transfer portion, generally designated at 47. The transfer portion provides the design elements that transfer from the heat transfer or label of this embodiment to the fabric. Included in the transfer portion of this illustrated heat transfer is a printed ink design layer 48 and a heat transfer adhesive layer 49. Each such layer is illustrated to be in a plurality of design components that can be considered to follow the design, image and/or indicia to be transferred onto the fabric, including performance fabric. For example, each such component could take the form of a keyboard symbol such as a letter of the alphabet that together

form an indicia message from this plurality of design components that are arranged in a desired series or relationship according to the intent of the designer. The materials of these components, especially of the heat transfer adhesive layer, are important in achieving heat transfer of the design elements onto the fabric under reduced temperature, pressure and dwell time conditions, minimizing risk of damage to the fabric and/or the design during the heat transfer process.

[0026] Concerning the shaped release 45 illustrated in Fig. 2, this is in the form of one or more sections 52a, 52b, 52c, 52d and so forth as needed for transferring a particular design, image and/or indicia of the heat transfer product or label. Unlike the non-transfer release layer 35, each shaped release section or sections is of a size and footprint that substantially conforms to the size and footprint of each respective section of the design that is created by the printed ink layer, as generally illustrated in Fig. 2. While the shaped release section or sections 52a, 52b, 52c, 52d and so forth are on the label carrier 43 in the heat transfer assembly before it is subjected to the heat transfer to the fabric, each shaped release section can transfer with the printed ink design layer 48. Typically, each shaped release section or sections 52a, 52b, 52c, 52d and so forth has a size and footprint that substantially conforms to the heat transfer adhesive layer 49. When desired, the size of the printed ink layer footprint or footprints can be slightly less than the respective footprint or footprints of the heat transfer adhesive layer and or of the shaped release layer. Thus, either or both of the individual components of heat transfer adhesive layer and the shaped release layer can have an area size and shape that is the same as, or slightly in excess of, the printed ink layer area or areas, so that the adhesive and/or shaped release layers are respectively coincident in size and shape or slightly overlapped by the size and shape of the second barrier layer 42. When present, the width of such overhang can be no greater than about 0.5 mm, or 0.3mm, or 0.2 mm.

[0027] With the approach of Fig. 2, the likelihood of any ghost images forming upon heat transfer are significantly minimized. In effect, the tightly shaped release layer components remove, such as by cutting of a transfer release sheet, portions of the release layer that might otherwise cause or contribute to ghost image formation. This important advantage is enhanced by combining this shaped release layer structure with the chemistry of the materials of the heat transfer, particularly of the heat transfer adhesive that has been found to perform very well from an adherence perspective even under less rigorous heat application conditions and even when using lower grades of heat transfer application equipment, the combination reducing instances of undesirable marking on fabrics, including comparatively sensitive performance fabrics.

[0028] Referring to materials for the transfer portion or portions 37, 47 of the heat transfer label, the printed ink design layer 38, 48 can take the form of screen-printed pigmented ink or dye ink with recoverable stretch properties. Same can include an elastic polyurethane ink with white pigment, which can be without a cross-linker. Such an ink can be made from polyurethane dispersion that has high elongation properties (such as greater than 300%). Examples include Hauthane L-2969, SANCURE® 20041 of Lubrizol, and UROTUF® L522 of Reichold, Inc.. Typically these are combined with titanium dioxide pigments, such as Ti-Pure® R-960 from DuPont, TIONA® 595 of Crystal Pigment Ltd. and Tint-Ayd® HC 6003 of Elements Specialties. Also suitable are Avery Dennison's screen print AQ-white ink mixed with one of these high elongation polyurethane dispersions, or Icoflex Performance Opaque White ink. Elastomeric emulsions for including in the printed ink design layer include HYSTRETCH® V-29, a polyurethane-based white ink cross-linked with aziridine (P-2 ink) from Lubrizol Advanced Materials.

[0029] The heat transfer layer portion or portions 39, 49 of the transfer portion or portions 37, 47 include hot melt adhesives or compositions. They can be applied by pattern printing or by powdering. Included are resin-modified hot melt adhesives with enhanced melt flow and fabric bonding under reduced temperature, pressure and dwell time settings during heat transfer by equipment such as an INSTA® 718 bonder from Insta Graphic and a CSB-7 bonder from Avery Dennison and a CF-2003 heat transfer machine from Cheran.

[0030] Suitable hot melt adhesive components include a thermoplastic polymer powder with elastomeric polymer dispersion along with solid tackifier. Examples of thermoplastic polymers are polyesters, polyamides, polyurethanes and polyacrylates. Examples are polyester or copolyester hot melt adhesives, including polyester polymer powder such as GRILTEX® D 2132E from EMS-Griltech. Such can be combined with elastomeric polyurethane dispersion such as a polyester-based polyurethane dispersion, for example EDOLAN® GS of Tanatex Chemicals. Polyamides include GRILTEX® D 2133A polyamide or copolyamide. Polyurethanes include Schaetti Fix 6120 polyurethane from Schaetti A.G and EDOLAN® GS polyurethane of Tanatex Chemicals, polyurethane powders such as Unex 4078 of Dakota NV, and aqueous polyurethane dispersions such as DISPERCOLL U42 of Bayer Aktiengesellschaft. Polyacrylates include Joncryl® 2561 polyacrylate from BASF, an acrylic latex resin.

[0031] Also often included in the hot melt adhesive or composition of the heat transfer layer portion or portions 39, 49 can be a solid plasticizer, a tackifier resin, or combinations thereof, (at times referred to herein as "Resin"). Examples of a suitable solid plasticizers are in the toluene sulfonamide family, such as toluene sulfonamide based reactive plasticizer KETJENFLEX® 9S from Axcentive Sarl, and *o,p*-toluene sulfonamide blends, including Uniplex 171 from Unitex Chemical Corporation. Other plasticizers include

metallic stearates such as zinc stearate, acrylonitrile-butadiene copolymers, and fatty acid esters. Examples of suitable tackifier resins are useful for use in water-based adhesives, such as stabilized rosin ester emulsions having particles of microscopic sizing, including Super Ester E-720W from Arakawa Chemical Industries. When included, the plasticizer/tackifier resin enhances bonding strength especially for “L” (low) and “M” (medium) heat transfer bonding conditions described elsewhere herein. The “Resin” enhances bond strength and broadens the bonding condition range of the heat transfer adhesive layer in the transfer portion of the heat transfer assembly.

[0032] The layer of hot melt adhesive or composition can be formed by combining a thermoplastic polymer with a melt flow/hot tack enhancing resin. Examples include formulations such as the following: (a) a thermoplastic polyurethane hot melt adhesive, such as a powder and/or dispersion, combined with a polyamide hot melt adhesive and with a solid plasticizer and tackifier resin; (b) a thermoplastic polyurethane hot melt adhesive, such as a powder and/or dispersion, combined with a solid plasticizer and tackifier resin; (c) a thermoplastic polyurethane hot melt adhesive, such as a powder and/or dispersion, combined with a polyamide hot melt adhesive; (d) thermoplastic polyester polymer hot melt adhesive powder (which can be combined with an elastomeric dispersion), combined with a thermoplastic polyurethane hot melt adhesive, such as a powder and/or dispersion, and with a solid plasticizer and tackifier resin; (e) a thermoplastic polyurethane hot melt adhesive, such as a powder and/or dispersion, combined with a polyamide hot melt adhesive; and (f) combinations thereof.

[0033] Formulation (a) can include between about 50 and about 150 parts (or between about 80 and about 120 parts) polyamide, between about 10 and about 50 parts (or between about 15 and about 40 parts) polyurethane, and between about 5 and about 20 parts (or between about 8 and about 15 parts) solid plasticizer and tackifier resin, based on parts by weight of solids.

[0034] Formulation (b) can include between about 50 and about 150 parts (or between about 80 and about 120 parts) polyurethane, and between about 10 and about 50 parts (or between about 15 and about 45 parts) solid plasticizer and tackifier resin, based on parts by weight of solids.

[0035] Formulation (c) can include between about 50 and about 150 parts (or between about 80 and about 120 parts) polyurethane, and between about 10 and about 50 parts (or between about 15 and about 40 parts) polyamide, based on parts by weight of solids.

[0036] Formulation (d) can include between about 50 and about 150 parts (or between about 80 and about 120 parts) polyester, between about 15 and about 110 parts (or between about 20 and about 100 parts) polyurethane, and between about 5 and 20 parts (or between about 8 and about 15 parts) solid plasticizer and tackifier resin, based on parts by weight of solids.

[0037] Formulation (e) can include between about 50 and about 150 parts (or between about 80 and about 120 parts) polyurethane and between about 10 and about 50 parts (or between about 15 and about 40 parts) polyester, based on parts by weight of solids.

[0038] For typical heat transfer bonder equipment, the present disclosure allows settings lower than typically used. Such typical bonders include the INSTA® 718 bonder of Insta Graphic, the AVERY® CSB-7 bonder of Avery Dennison, and the CF-2003 Heat Transfer Machine of Cheran. In this context, relative low bonding temperatures are less than about 140°C, or less than about 130°C or less than about 120°C, relatively low bonding pressures are less than about 1 Bar, or less than about 0.8 Bar, or less than about 0.6 Bar, or not greater than about 0.5 Bar, or not greater than about 0.4 Bar, or not greater than about 0.3 Bar, and relatively short bonding times are less than about 15 seconds, less than about 12 seconds, less than about 10 seconds, less than about 8 seconds, or not greater than about 6 seconds.

[0039] Release force measurements were made to evaluate the release force between printed ink layers and backing layers or label carriers (PET or paper) having various release layers or coatings in engagement with the printed ink layer, measuring release force by the T-peel test at room temperature and at a peel rate of 12 inches per minute. The printed ink layers were a screen printed pigmented white ink with recoverable stretch properties combined with titanium dioxide pigments and exhibiting a high elongation of at least 300%. The ink layer was sandwiched between two release layers, one on either surface of the ink layer. The test results data are reported in Table A below:

TABLE A

Release Type	Backing	Release from PU white ink	
		Max Load (N/in)	Avg Load (N/in)
3.04	PET	0.163	0.111
O6	PET	0.606	0.349
PP	Paper	0.154	0.080
TGR	PET	0.162	0.035
4.14	PET	0.161	0.078
HD	PET	0.185	0.151
S-4	PET	0.165	0.139
S-6	PET	0.166	0.082
CGR (C-matte)	PET	0.164	0.085

[0040] The identity of the “Release Type” of the release layer of these data are specified hereinabove. The heat bonding conditions for this testing were at 266°F (130°C), for 12 seconds at 30 psi on the pressure dial of an Insta 718 Bonder of Insta Graphic, 15 inch by 15 inch platen. It was generally observed that the release force (average) was best when between 0.15 and 2.0 N/in to enable easy peeling of the carrier after application under heat transfer conditions indicated on textile surfaces while maintaining enough anchoring on the carrier to maintain the assembly before heat transfer. Surface tension of the release surface is preferably above 25 dynes/cm to ensure sufficient aqueous ink wetting out.

[0041] Release force measurements were made to evaluate the release force between heat transfer adhesive layers and PET backing layers or label carriers having two different release layers or coatings in engagement with the heat transfer adhesive layer, the adhesive layer being sandwiched between two release layers, one on either surface of the adhesive layer. In a typical heat transfer label printing process, the adhesive layer is slightly wider than the ink design, typically resulting in direct contact of the adhesive to the release, making it important to take this release force into account. This release force was measured by the T-peel test at room temperature and at a peel rate of 12 inches per minute. The heat transfer adhesive layer was a composition of thermoplastic polyester polymer hot melt adhesive with elastomeric dispersion and solid plasticizer, tackifier resin. The test results data are reported in Table B below:

TABLE B

Release Type	Backing	Release from PES HMA	
		Max Load (N/in)	Avg Load (N/in)
TGR	PET	0.356	0.268
CGR (C-matte)	PET	4.552	2.758

[0042] The identity of the Release Type of the release layer of these data are specified hereinabove, the TGR and CGR (C-matte) each being from Hanse. The heat bonding conditions for this testing were at 266°F (130°C), for 12 seconds at 30 psi on the pressure dial of an Insta 718 Bonder of Insta Graphic, 15 inch by 15 inch platen. It was generally observed that the release force (average) was best when between 0.15 and 2.0 N/in to enable easy peeling of the carrier after application under heat transfer conditions indicated on textile surfaces while maintaining enough anchoring on the carrier to maintain the assembly before heat transfer. Surface tension of the release surface is preferably above 25 dynes/cm to ensure sufficient aqueous ink wetting out.

[0043] Testing was conducted to determine the stretch characteristics of printed ink layers, namely of an aqueous-based screen printing ink with elastomeric polyurethane or acrylic polymer combined with pigments/colorants and chemically cross-linked. Included was HyStretch® V-29 from Lubrizol Advanced Materials, a polyurethane based white ink crosslinked with aziridine. Instron® stretch testing was carried out on a 1 inch width by 1 inch gauge length ink film at 6 inches/min loading and unloading speed. The sample was stretched to three different extensions, namely 100%, 150% and 200%. The plot of the resulting data of load (N) versus tensile strain (%) is shown in Fig. 3, from which it is evident this ink layer showed good stretch recovery for all three levels of tensile strains.

EXAMPLE 1

[0044] Six heat transfer adhesive layers were formulated and tested for adhesive bond strength as a function of each of the compositions. The formulations are shown in Table C:

TABLE C

Parts by Weight of Solids				
Adhesive #	PES	PU	PA	Resin
PA.2	0	25	100	10
PA.3	0	100	0	25
PA.4	0	100	25	0
PES.2	100	82.5	0	10
PES.3	100	25	0	10
PES.4	25	100	0	0

[0045] In Table C, PES designates polyester component, PU designates polyurethane component, PA designates polyamide component, and Resin designates a transfer enhancing agent, in particular a solid plasticizer, a solid tackifier or a combination component. The adhesive # designates the following heat transfer hot melt adhesive layers:

PA.2 ["formulation (a)"] - thermoplastic elastomer polyurethane, combined with a polyamide hot melt adhesive and with a solid plasticizer and tackifier resin;

PA.3 ["formulation (b)"] - thermoplastic elastomer polyurethane, combined with a solid plasticizer and tackifier resin;

PA.4 [“formulation (c)”] - thermoplastic elastomer polyurethane combined with a thermoplastic polyamide hot melt adhesive powder;

PES.2 and PES.3 [“formulation (d)”] - thermoplastic polyester polymer hot melt adhesive powder combined with thermoplastic elastomer polyurethane and with a solid plasticizer and tackifier resin; and
 PES.4 [“formulation (e)”] – thermoplastic polyester hot melt adhesive, combined with thermoplastic elastomer polyurethane.

[0046] Heat transfer bonding conditions for this heat transfer adhesive layer testing were under the settings on an Insta 718 Bonder of Insta Graphic, with 15 inch by 15 inch platen, that are specified in Table D:

TABLE D

Settings	Temp	Pressure	Dwell Time
L	115C	0.3 bar	6 seconds
M	125C	0.4 bar	9 seconds
H	135C	0.5 bar	12 seconds

[0047] The bond strengths of each tested heat transfer adhesive layer to polyester fabric were measured for each by Instron® T-peel test on fabric/adhesive/fabric layered test specimens bonded under the three types of heat transfer bonder test settings specified in Table D. These peel test data, which are set out in Table E, illustrate that combining polymer with solid plasticizer, tackifier resin component can achieve high fabric bonding strength at temperatures below 140°C, pressures below 1 Bar, and dwell times of less than 15 seconds.

TABLE E

Specimen label	Maximum Load	Average Load
	(N/in)	(N/in)
PA.2 L	2.939	2.209
PA.2 L	2.962	2.368
PA.3 L	27.054	21.741
PA.3 L	27.241	22.315
PA.4 L	3.44	2.635
PA.4 L	3.749	2.669

PA.2 M	22.919	17.129
PA.2 M	23.268	18.27
PA.3 M	44.681	40.459
PA.3 M	48.086	41.512
PA.4 M	9.234	7.106
PA.4 M	10.361	7.913

PA.2 H	59.51	48.056
PA.2 H	58.363	49.137
PA.3 H	41.57	38.424
PA.3 H	39.793	35.748
PA.4 H	23.949	17.704
PA.4 H	21.647	17.44
PES.2 L	7.924	6.194
PES.2 L	8.036	6.285
PES.3 L	6.096	4.641
PES.3 L	6.81	5.031
PES.4 L	5.594	4.314
PES.4 L	5.015	3.481
PES.2 M	32.284	19.324
PES.2 M	32.264	18.679
PES.3 M	31.32	24.138
PES.3 M	32.853	26.409
PES.4 M	11.281	7.597
PES.4 M	13.576	10.612
PES.2 H	66.865	59.856
PES.2 H	67.587	61.569
PES.3 H	42.053	37.719
PES.3 H	45.145	39.65
PES.4 H	44.707	33.703
PES.4 H	45.258	33.649

EXAMPLE 2

[0047] Screen printing evaluation testing was conducted using the Lenoir screen printing test, results being summarized in Table F. The Carrier for each sample was C-matte, a release-coated PET film from Hanse, and the Release was applicant's release print, designated as HD. Each sample incorporated the shaped release discussed herein. The Release Mesh in these data was 460 mesh, the mesh number used for the printing screen, and the Ink Mesh was 175 mesh, the mesh number used for screen printing

the white inks, while the Adhesive Mesh was 92 mesh for all of the tests, ID # 1, 2, 3 and 4. The white ink was either V4 white or Internal white, each a polyurethane-based screen print white ink.

[0048] Adhesive 2245-D was formed combining two components: (i) a polyester polymer powder with elastomeric polyester based polyurethane dispersion with (ii) a solid tackifier that was a melt flow/hot tack enhancing resin. Adhesive DK1-M was formed from a polyurethane powder and a polyurethane dispersion. These results show minimal bond mark (score 4.5 out of 5) of a visual or optical reading change on fabric surface around the transferred design after heat transfer. They also show good ink wetting, high printing resolution, and easy transfer by either hot peel or cold peel. The fabric onto which the label heat transfer testing was conducted was a fabric of polyester and spandex. The stretch test was passed in all instances, as was the hot water wash test (5 on a 1 to 5 scale) in this 60°C hot water wash with subsequent drying for five repeats standard testing.

TABLE F

ID #	Ink	Adhesive	Printing-Wetting Score (1 did not wet, 5 perfect wetting)	Printing-Registration (1 poor registration, 5 perfect registration)	Hot Peel (1-damages label or fabric, 5-very easy peel)	Cold Peel (1 damages label or fabric, 5 very easy peel)	Bond Mark	Stretch (pass/fail)	Wash Score (1-5)
1	V4 White	2245-D	5	5	5	4	4.5	Pass	5
2	V4 White	DK1-M	5	5	5	4	4.5	Pass	5
3	Internal White	2245-D	5	5	5	4	4.5	Pass	5
4	Internal White	DK1-M	5	5	5	5	4.5	Pass	5

[0049] Concerning manufacture of label or transfer assemblies generally discussed herein, it is typical for each layer to be coated, such as being printed, on top of a previous layer in order to form sandwich-type structures as shown in the drawings hereof. Generally, these layers can be printed in reverse order, top to bottom. With further reference to the printing approach that is typically used in these instances, the layers are generated by printing inks that are subsequently cured and dried. Usually these inks are based on a water vehicle or a solvent vehicle that is dispersed or dissolved in one or several components such as polymers, additives, pigments, ink additives and the like. Examples of ink additives in this regard include humectants, rheology modifiers, surface tension modifiers, leveling agents, release agents, and so forth.

[0050] Example - Chemically crosslinked elastomeric ink

Ink Code	Ink Base	Chemical Cross-linker
W-2	QL W-2 White*	None
W-2P	QL W-2 White	1.1% PZ-33*
W-2V	QL W-2 White	1.1% V-04K*

*QL W-2 White is a mixture of –COOH functioned polyurethane dispersion in water with TiO₂ pigment slurry at about 4 parts to 1 part by weight ratio.

PZ-33 is an aziridine crosslinker.

V-04K is a carbodiimide crosslinker.


[0051] The effect of chemical crosslinking on the stretch performance of the elastomeric white ink is measured by Instron tensile elongation test and the results shown below. The ink layer thickness was about 1.5 mils in this test.

[0052] As shown, the tensile elongation of the elastomeric white ink was above 100% for all, and the carbodiimide cross-linker is capable of significantly enhancing tensile elongation.

Specimen #	Specimen label	Load at Tensile Strength (N)	Tensile strain at Tensile Strength (%)
1	W-2	3.24	280.00
2	W-2	3.22	301.67
3	W-2P	6.48	168.33
4	W-2P	5.04	144.67
5	W-2V	9.85	371.33
6	W-2V	7.18	341.00

[0053]

400% (3" to 15") Elongation

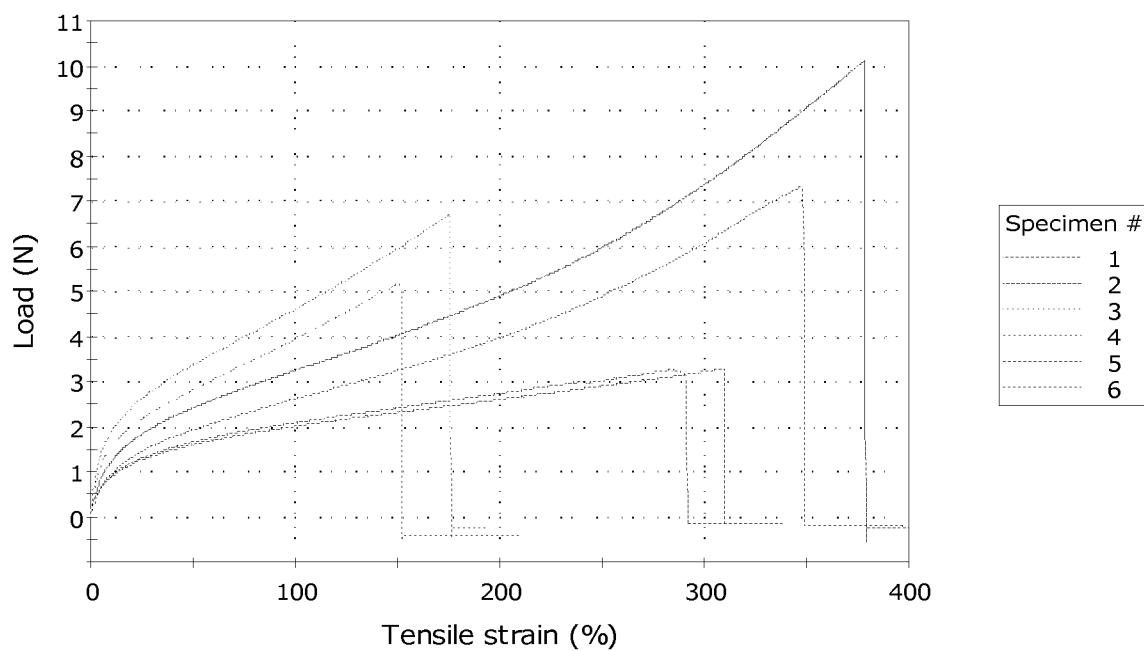

[0054]

Example- Effect of Transfer Enhancing Agent on the bonding strength of the Hot Melt Adhesive on Performance Fabric

Adhesive Code	Transfer Enhancing Agent (5.5 wt% loading)	Phase	Adhesive Base
2245-F	Ketjenflex 9S-M	Solid	2245*
2245-I	Uniplex 108	Liquid	2245
2245-J	Hercolyn D	Liquid	2245
2245-K	Staybelite Ester 3	Liquid	2245
2245-L	Foralyn 5020F	Liquid	2245
2245-M	Uniplex 214	Liquid	2245

- Adhesive 2245 Base is a mixture of PU elastomer and thermoplastic polyester at 45 parts to 55 parts by solid weight ratio.

[0055] The screen printed adhesive was heat transferred to polyspandex test fabric at 140C and tested for adhesive to fabric bonding strength using T-peel test method by Instron after 5 cycles of 60C hot water wash and 5 cycles of hot air drying. The T-peel strengths of the adhesives to the test fabric after wash are tabulated below.

[0056]

After 60C Hot Water Wash (5X Wash/5X Dry)	Maximum Load (N/in)	Average Load (N/in)
2245-F	47.618	38.903
2245-F	24.77	20.815
2245-I	24.19	19.22
2245-I	12.574	10.034
2245-J	13.149	11.021
2245-J	18.902	16.16
2245-K	13.642	10.108
2245-K	17.711	14.511
2245-L	10.043	7.802
2245-L	9.84	7.666
2245-M	12.939	10.988
2245-M	18.237	14.458

[0057] As shown, the solid state transfer enhancing agent provided higher bond strength after repeated hot water wash vs liquid phase ones.

[0058] It will be understood that the embodiments described above are illustrative of some of the applications of the principles of the present subject matter. Numerous modifications may be made by those skilled in the art without departing from the spirit and scope of the claimed subject matter, including those combinations of features that are individually disclosed or claimed herein. For these reasons, the scope hereof is not limited to the above description but is as set forth in the following claims, and it is understood that claims may be directed to the features hereof, including as combinations of features that are individually disclosed or claimed herein.

CLAIMS

1. A heat transfer label suitable for labeling performance fabrics with minimal transfer marking, comprising:
 - a. a support portion having a label carrier and a non-marking release layer;
and
 - b. a transfer portion, said transfer portion being positioned over said support portion release layer for transfer of the transfer portion from the support portion to a performance fabric under conditions of heat and pressure for a given dwell time, said transfer portion comprising:
 - i. a hot melt adhesive layer having a first surface and a second surface, the first surface being exposed to permit its direct contact with a performance fabric to be labeled, and
 - ii. an ink design, said ink design is in contact and in conformity with the second surface of the hot melt adhesive layer, said ink design exhibits recoverable stretch properties; and
 - c. said hot melt adhesive layer securely adheres the heat transfer label to performance fabrics at relatively low transfer temperature, pressure and dwell time while minimizing or substantially eliminating transfer marks on the performance fabrics.
2. The heat transfer label of claim 1, wherein the hot melt adhesive layer includes a thermoplastic or a thermoplastic elastomer based polymer, or a mixture of both, with a transfer enhancing agent.
3. The heat transfer label of claim 1, wherein the non-marking release of the label carrier is sized and shaped in substantial conformance with the size and shape of the ink design, thereby substantially eliminating ghost image generation by the release upon heat transfer application.

4. The heat transfer label of claim 1, wherein the release coating of the label carrier is sized and shaped in substantial conformance with the size and shape of the ink design and the hot melt adhesive layer, thereby substantially eliminating ghost image generation by the release coating upon heat transfer application.
5. The heat transfer label of claim 1, wherein the non-marking release is non-transferrable.
6. The heat transfer label of claim 1, wherein said release of the label carrier generally coincides with the size and shape of the label carrier.
7. The heat transfer label of claim 1, wherein said hot melt adhesive layer is selected from the group consisting of: a thermoplastic elastomer including TPU's or polyacrylates; a thermoplastic copolymer including PES, PA; and a transfer enhancing agent including solid or liquid plasticizers or tackifiers; and combinations thereof.
8. The transfer enhancing agent in claim 7 is a solid state plasticizer or tackifier, or combinations therefore
9. The heat transfer label of claim 7, wherein the thermoplastic elastomer is a TPU of between about 15 and about 85 parts; the hot melt copolymer is PA or PES of between about 0 and about 80 parts; the transfer enhancing agent is a solid state plasticizer of between about 2 and about 40 parts by weight of solids.
10. The heat transfer label of claim 1, wherein said hot melt adhesive layer securely adheres the heat transfer label to performance fabrics at a bonder application temperature of below about 140°C, bonder application pressure of below about 1 Bar and for a bonder application dwell time of less than 15 seconds.
11. The heat transfer label of claim claim 1, wherein the support portion consists of a film or paper substrate with a non-marking release on at least 1 substrate surface. The non-marking release includes the following two types- (1) a non-transferrable release, (2) a shaped hot melt or hot split release.

12. The heat transfer label of claim 11 wherein the non-transferrable release of is a printable silicone.
13. The heat transfer label of claim 11 wherein the hot melt or hot split release is a polyolefin (PE, PP) or a polyamide.
14. The heat transfer label of claim 11, wherein the support portion also has an anti-blocking release on the opposite side of the non-marking release.
15. The heat transfer label of claim 11 wherein, the carrier substrate is a heat stable plastic film (PET, PC) or paper.
16. The heat transfer label of claim 1, wherein the ink design layer comprises an ink layer having a maximum release force of between 0.1 and 2.0 N/in from the release layer.
17. The heat transfer label of claim 1, wherein the hot melt adhesive layer has a maximum release force of between 0.1 and 2.0 N/in from the release layer.
18. The heat transfer label of claim 1, wherein the ink design layer comprises an ink layer having a maximum release force of between 0.1 and 2.0 N/in from the release layer, and the hot melt adhesive layer has a maximum release force of between 0.1 and 2.0 N/in from the release layer.
19. The heat transfer label of claim 15, wherein the release layer surface has a surface tension above about 25 dynes/cm.
20. A heat transfer label suitable for labeling performance fabrics with minimal transfer marking, comprising:
 - a. a support portion having a label carrier layer and a release layer; and
 - b. a transfer portion, said transfer portion being positioned over said support portion release layer for transfer of the transfer portion from the support portion to a performance fabric under conditions of heat and pressure for a given dwell time, said transfer portion comprising:
 - i. a hot melt adhesive layer having a first surface and a second surface, the first surface being exposed to permit its direct contact with a performance fabric to

- be labeled, the hot melt adhesive layer includes a mixture of a thermoplastic polymer with a thermoplastic elastomer and a transfer enhancing agent, and
- ii. an ink design layer, said ink design layer is in contact and positioned in conformance with the second surface of the hot melt adhesive layer, said ink design layer exhibits recoverable stretch properties;
 - c. the release layer of the label carrier is sized and shaped in substantial conformance with the size and shape of an image delineated by said ink design layer, thereby substantially eliminating ghost image generation by the release coating upon heat transfer application; and
 - d. said hot melt adhesive layer securely transfers the heat transfer label to performance fabrics at relatively low transfer temperature, pressure and dwell time while minimizing or substantially eliminating transfer marks on the performance fabrics.
21. The heat transfer label of claim 20, wherein the release coating of the label carrier is sized and shaped in substantial conformance with the size and shape of said hot melt adhesive layer, thereby contributing to substantially eliminating ghost image generation by the release coating upon heat transfer application.
22. The heat transfer label of claim 20, wherein said hot melt adhesive layer is selected from the group consisting of: a thermoplastic elastomer including TPU or polyacrylate elastomers; a thermoplastic polymer including PES, PA; and a hot melt flow enhancing resin including solid or liquid plasticizers or tackifiers; and combinations thereof.
23. The heat transfer label of claim 21, wherein the ink design layer comprises an ink layer having a release force of between 0.1 and 2.0 N/in from the release coating layer, and the hot melt adhesive layer has a release force of between 0.1 and 2.0 N/in from the release coating layer.
24. A heat transfer label suitable for labeling performance fabrics with minimal transfer marking, comprising:
- a. a support portion having a label carrier layer and a release layer; and

- b. a transfer portion, said transfer portion being positioned over said support portion release coating layer for transfer of the transfer portion from the support portion to a performance fabric under conditions of heat and pressure for a given dwell time, said transfer portion comprising:
 - i. a hot melt adhesive layer having a first surface and a second surface, the first surface being exposed to permit its direct contact with a performance fabric to be labeled, the hot melt adhesive layer includes a thermoplastic elastomer, a thermoplastic polymer, and a plasticizer or tackifier resin; or combinations thereof, and
 - ii. an ink design layer, said ink design layer having been in contact and in conformance with the second surface of the hot melt adhesive layer, said ink design layer exhibits recoverable stretch properties;
- c. the release coating of the label carrier is sized and shaped in substantial conformance with the size and shape of an image delineated by said ink design layer, thereby substantially eliminating ghost image generation by the release coating upon heat transfer application; and
- d. said hot melt adhesive layer securely transfers the heat transfer label to performance fabrics at transfer temperature of below about 140°C, a pressure of below about 1 Bar, and dwell time of less than 15 seconds, while substantially eliminating transfer marks on the performance fabrics.

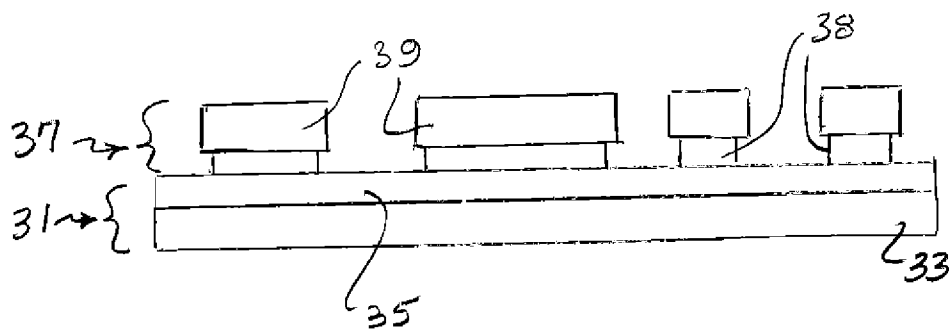


FIG. 1

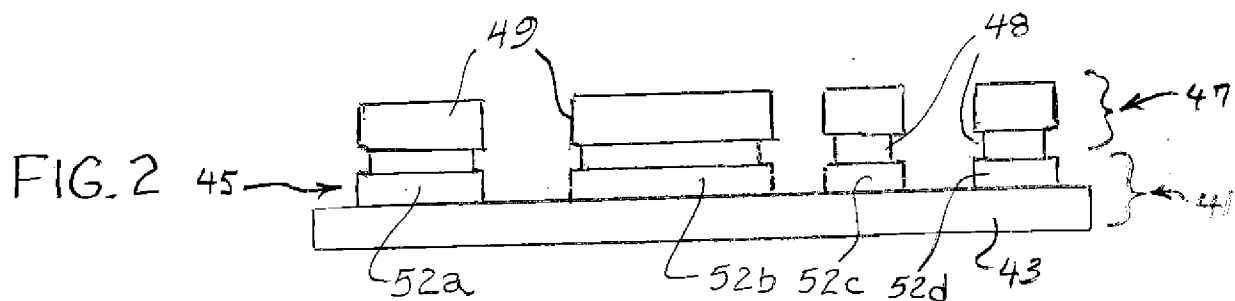


FIG. 2

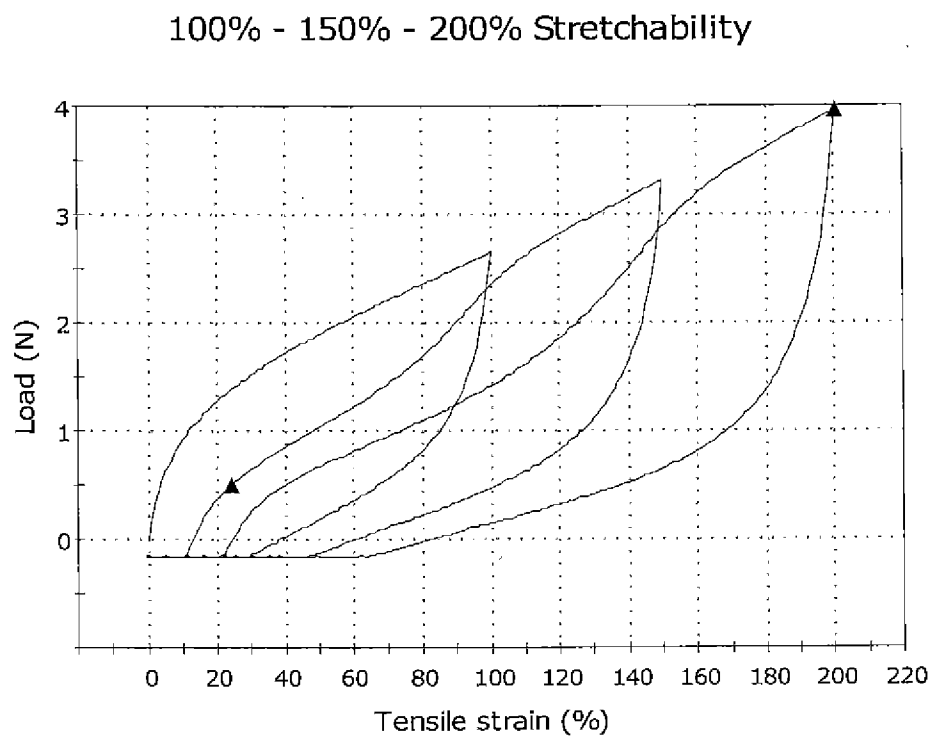


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/072473

A. CLASSIFICATION OF SUBJECT MATTER

INV. B44C1/175

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B44C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 393 992 A (TUGWELL D H) 14 May 1975 (1975-05-14) page 3, line 25 - page 5, line 55 -----	1-24
X	WO 02/098662 A1 (PERLOS OYJ [FI]; SALO HANNU [FI]; PIMIAE JUHA [FI]; NISKA ARTO [FI]) 12 December 2002 (2002-12-12) page 4, line 20 - page 8, line 2; figure 1 -----	1-24
A	US 3 684 545 A (WORRALL JAMES D) 15 August 1972 (1972-08-15) column 2, line 31 - column 4, line 70; figures 1-5 -----	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2015

Date of mailing of the international search report

14/04/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Sartor, Michele

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/072473

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1393992	A	14-05-1975	CA 1002818 A1 04-01-1977
			GB 1393992 A 14-05-1975
			US 4037008 A 19-07-1977

WO 02098662	A1	12-12-2002	CN 1543403 A 03-11-2004
			EP 1395430 A1 10-03-2004
			FI 20011147 A 02-12-2002
			US 2005000631 A1 06-01-2005
			WO 02098662 A1 12-12-2002

US 3684545	A	15-08-1972	NONE
