



US00RE47744E

(19) **United States**
 (12) **Reissued Patent**
Cho et al.

(10) **Patent Number:** **US RE47,744 E**
 (45) **Date of Reissued Patent:** **Nov. 26, 2019**

(54) **METHOD AND SYSTEM FOR
 CONTROLLING POWER IN A
 COMMUNICATION SYSTEM**

(58) **Field of Classification Search**
 USPC 455/522
 See application file for complete search history.

(71) Applicant: **SAMSUNG ELECTRONICS CO.
 LTD.**, Suwon-si, Gyeonggi-do (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(72) Inventors: **Jae-Hee Cho**, Seoul (KR); **Kwan-Hee Roh**, Hwaseong-si (KR); **Soon-Young Yoon**, Seoul (KR); **Kyung-Joo Suh**, Seoul (KR); **In-Seok Hwang**, Seoul (KR)

5,732,328 A * 3/1998 Mitra H04B 7/2628
 455/522
 5,898,740 A * 4/1999 Laakso H04W 52/24
 370/318
 6,069,883 A * 5/2000 Ejzak H04W 28/22
 370/335
 6,167,039 A * 12/2000 Karlsson H04B 7/0854
 370/320
 6,731,948 B1 * 5/2004 Lee H04W 52/221
 370/328

(73) Assignee: **Samsung Electronics Co., Ltd.**,
 Suwon-si (KR)

(Continued)

(21) Appl. No.: **13/845,846**

(22) Filed: **Mar. 18, 2013**

FOREIGN PATENT DOCUMENTS

Related U.S. Patent Documents

KR 10-2003-0069299 A 8/2003
 WO 2006/007318 A1 1/2006

Reissue of:

(64) Patent No.: **8,116,799**
 Issued: **Feb. 14, 2012**
 Appl. No.: **11/756,818**
 Filed: **Jun. 1, 2007**

Primary Examiner — Nick Corsaro

(74) *Attorney, Agent, or Firm* — Jefferson IP Law, LLP

(30) Foreign Application Priority Data

Jun. 2, 2006 (KR) 10-2006-0049799


(57) ABSTRACT

A method for controlling power in a communication system is disclosed. The power control method includes the steps of calculating a first offset according to traffic information of a mobile station and data transmission channel quality information of the mobile station, determining a second offset according to received channel quality information of the mobile station, received from the mobile station, determining a third offset according to interference information received from other base stations neighboring the base station, and transmitting, to the mobile station, power control information determined based on the first offset, the second offset and the third offset.

(51) **Int. Cl.**
H04W 52/24 (2009.01)
H04W 52/04 (2009.01)
H04W 52/26 (2009.01)

(52) **U.S. Cl.**
 CPC **H04W 52/246** (2013.01); **H04W 52/04**
 (2013.01); **H04W 52/247** (2013.01); **H04W**
52/262 (2013.01)

54 Claims, 3 Drawing Sheets

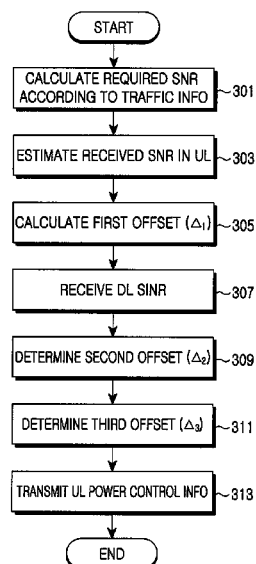

(56)	References Cited		2006/0268773 A1 *	11/2006	Ranta-aho	H04W 52/146 370/329
	U.S. PATENT DOCUMENTS		2007/0049316 A1 *	3/2007	Beming	H04L 1/0025 455/522
	6,771,934 B2 *	8/2004 Demers	2007/0066340 A1 *	3/2007	Yoon	H04W 52/12 455/522
			2007/0081449 A1 *	4/2007	Khan	H04W 16/06 370/208
	6,909,905 B2 *	6/2005 Umeda	2007/0082620 A1 *	4/2007	Zhang et al.	H04W 52/24 455/69
			2007/0207827 A1 *	9/2007	Bi	H04W 52/12 455/522
	6,940,827 B2 *	9/2005 Li	2008/0253389 A1 *	10/2008	Larsson	H04L 1/0003 370/441
			2008/0304584 A1 *	12/2008	Nishio et al.	H04L 1/0013 375/260
	7,239,619 B2 *	7/2007 Tobe	2009/0005101 A1 *	1/2009	Matsumoto et al.	H04L 1/0003 455/522
			2009/0010211 A1 *	1/2009	Sumasu et al.	H04L 1/0003 370/329
	7,408,905 B2 *	8/2008 Marinier	2009/0061767 A1 *	3/2009	Horiuchi et al.	H04B 7/155 455/18
			2009/0104908 A1 *	4/2009	Matsumoto et al.	H04L 5/0046 455/436
	7,565,150 B1 *	7/2009 Beamish et al.	2009/0170549 A1 *	7/2009	Lee et al.	H04W 52/16 455/522
			2009/0285169 A1 *	11/2009	Yang et al.	H04W 52/143 370/329
	7,593,339 B2 *	9/2009 Shoemake et al.	2009/0325627 A1 *	12/2009	Lee	H04W 52/16 455/522
			2010/0002600 A1 *	1/2010	Jiang et al.	H04W 72/1231 370/252
	8,116,799 B2 *	2/2012 Cho	2011/0085485 A1 *	4/2011	Yoon	H04W 52/12 370/311
			2013/0107740 A1 *	5/2013	Mese	H04L 1/0017 370/252
	2001/0053695 A1 *	12/2001 Wallentin				
	2003/0232622 A1 *	12/2003 Seo				
	2004/0062192 A1 *	4/2004 Liu				
	2004/0228309 A1 *	11/2004 Marinier				
	2005/0090261 A1 *	4/2005 Agin				
	2005/0286449 A1 *	12/2005 Seo				
	2006/0135080 A1 *	6/2006 Khandekar				
	2006/0209721 A1 *	9/2006 Mese				
	2006/0264180 A1 *	11/2006 Qiu				

* cited by examiner

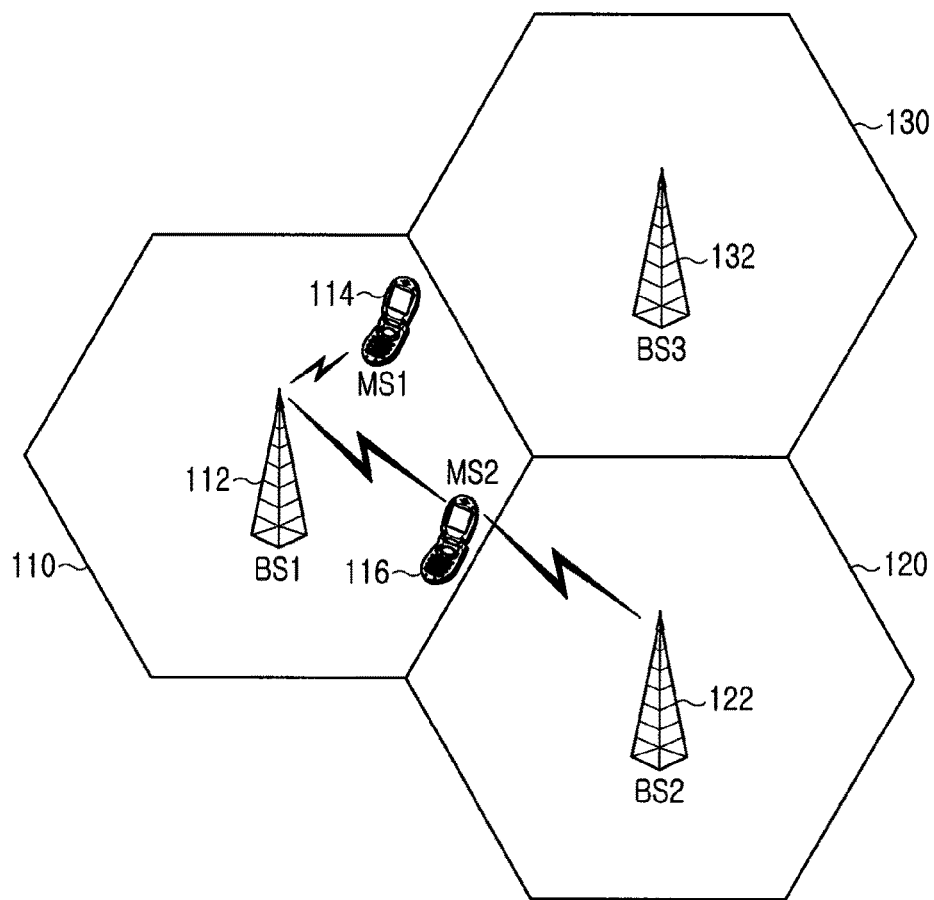


FIG.1

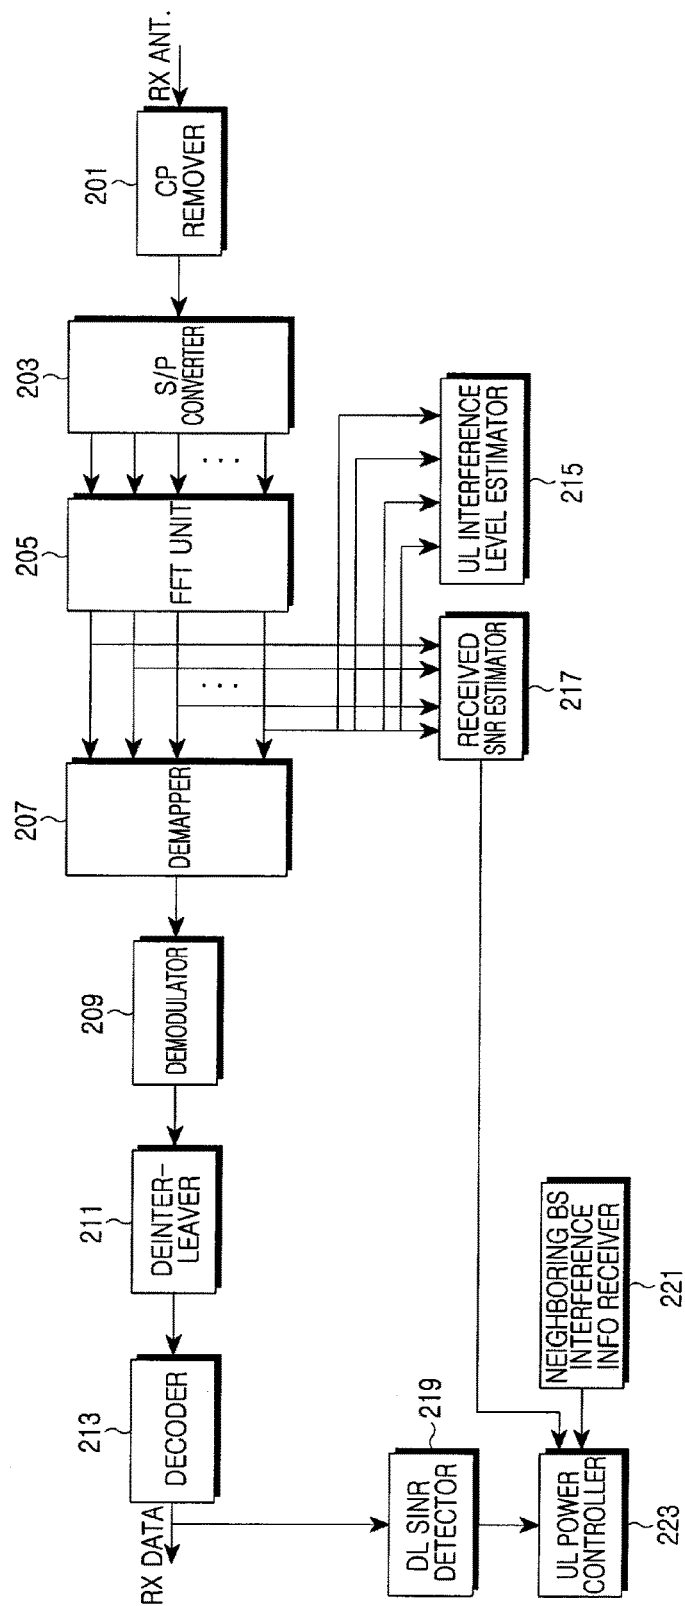


FIG.2

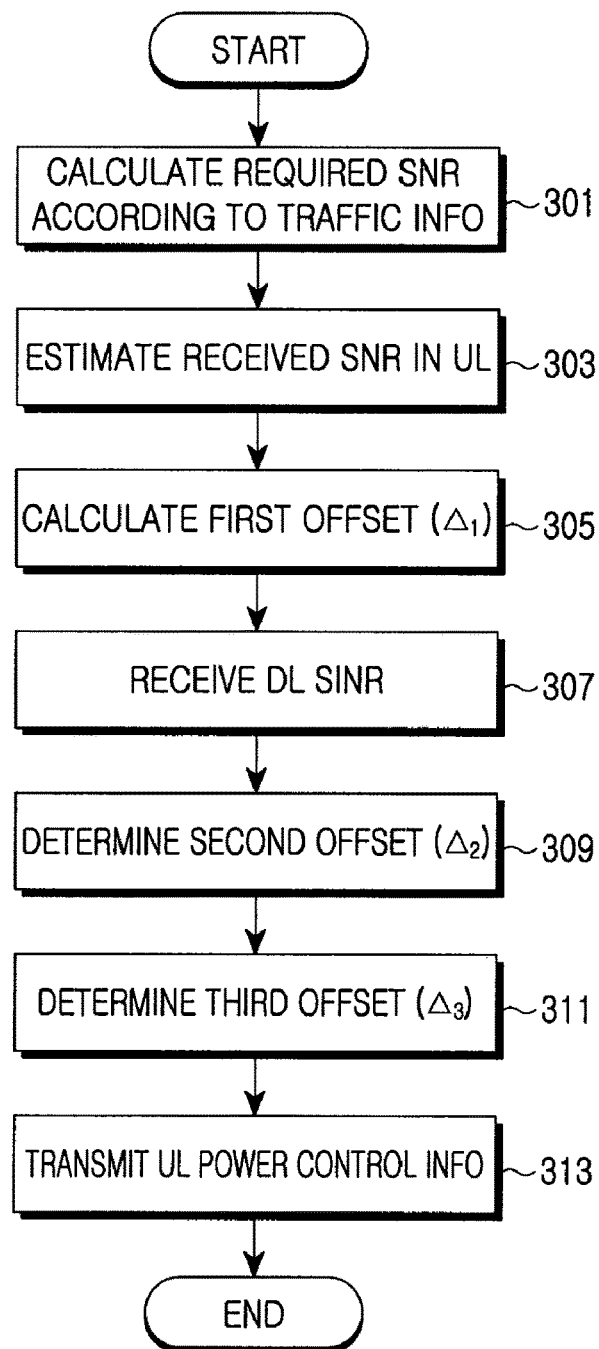


FIG.3

1

METHOD AND SYSTEM FOR CONTROLLING POWER IN A COMMUNICATION SYSTEM

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

PRIORITY

This application claims the benefit under 35 U.S.C. §119 (a) of a Korean patent application filed in the Korean Intellectual Property Office on Jun. 2, 2006 and assigned Serial No. 2006-49799, the entire disclosure of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to a communication system. More particularly, the present invention relates to a method and system for controlling transmission power in an uplink of a communication system.

2. Description of the Related Art

Extensive research on the next generation communication system is being conducted to provide users with high-speed services having various Quality of Service (QoS) levels. Particularly, to increase data transmission capacity and improve QoS, the communication system controls transmission power in a downlink and an uplink such that a Base Station (BS) or a Mobile Station (MS) can have a Signal-to-Interference Ratio (SIR) necessary for data reception while using the minimum signal strength. By controlling transmission power in this manner, the communication system allows an MS having a low SIR to have higher transmission power in a service area where it can receive a communication service from the BS, thereby stably exchanging data with the BS. By doing so, the communication system improves QoS and prevents the MS from transmitting signals with unnecessarily high power, thereby reducing QoS degradation of an MS that uses the same frequency band and receives communication service from a neighboring BS.

This power control scheme controls transmission power of a transmitter such that when a receiver receives a transmission signal transmitted by a BS or an MS, the receiver can maintain its required SIR.

In particular, a communication system employing Orthogonal Frequency Division Multiplexing (OFDM)/Orthogonal Frequency Division Multiple Access (OFDMA) increases, as described above, the transmission power of signals within the area where no interference occurs between neighboring BSs, for example, within the area where the data being exchanged between neighboring BSs and MSs that receive communication services from the neighboring BSs do not act as an interference signal, thereby improving quality, i.e., QoS, of received signals. Therefore, the communication system needs to apply different power control conditions to an MS that has a high channel quality (i.e., an MS that is located in the center area of a BS in charge of a particular cell), and another MS that has a low channel quality (i.e., an MS that is located in the boundary area of the BS).

2

For example, when an MS located in the boundary area of a BS increases transmission power of its transmission signals for data exchange with the BS in charge of the cell where it is located, the MS induces an interference signal which is higher in strength by the transmission power, to a neighboring BS in charge of a cell neighboring the cell where it is currently located. Therefore, the BS allows the receiver, or the MS, to transmit signals with the minimum transmission power needed to maintain an SIR required for data exchange. However, when an MS located in the center area of the BS increases transmission power of its transmission signals, interference signals being applied to the neighboring BS in charge of a cell neighboring the cell where it is currently located are lower in strength. Therefore, the BS allows the MS to transmit signals with higher transmission power to improve reception quality, i.e., QoS, of transmission/reception signals. Accordingly, there is a need for a scheme of controlling transmission power for data exchange in the communication system in the manner described above.

In addition, the BS can reduce a Packet Error Rate (PER) of transmission/reception data by allowing the MS located in the center area of its own cell to transmit signals with higher transmission power, thereby reducing retransmission of packets due to reception failure of data and thus preventing waste of resources. By reducing the retransmission of packets, the BS can allocate the remaining resources to the MSs having a low channel quality and increase packet retransmission to the MSs having a low channel quality over the allocated channels, thereby improving performance of the communication system. Therefore, there is a need for a scheme of controlling transmission power in the communication system in the above-described manner.

SUMMARY OF THE INVENTION

An aspect of the present invention is to address at least the above problems and/or disadvantages and to provide at least the advantages described below. Accordingly, an aspect of the present invention is to provide a method and system for controlling power in a communication system.

Another aspect of the present invention is to provide a method and system for controlling transmission power of an uplink in a communication system.

According to one aspect of the present invention, a method for controlling power in a communication system is provided. The power control method by a base station includes calculating a first offset according to traffic information of a mobile station and data transmission channel quality information of the mobile station, determining a second offset according to received channel quality information of the mobile station, received from the mobile station, determining a third offset according to interference information received from neighboring base stations, and transmitting, to the mobile station, power control information determined based on the first offset, the second offset and the third offset.

According to another aspect of the present invention, a system for controlling power in a communication system is provided. The power control system includes a base station for calculating a first offset according to traffic information of a mobile station and data transmission channel quality information of the mobile station, determining a second offset according to received channel quality information of the mobile station, received from the mobile station, determining a third offset according to interference information received from neighboring base stations, and transmitting, to

the mobile station, power control information determined based on the first offset, the second offset and the third offset.

According to further aspect of the present invention, a system for controlling power in a communication system is provided. The power control system includes a base station including a power controller for calculating a first offset according to traffic information of a mobile station and data transmission channel quality information of the mobile station, for determining a second offset according to received channel quality information of the mobile station, received from the mobile station, for determining a third offset according to interference information received from neighboring base stations, and for determining power control information according to the first offset, the second offset and the third offset, wherein the base station transmits the determined power control information to the mobile station.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects, features and advantages of the present invention will become more apparent from the following detailed description of certain exemplary embodiments when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic diagram illustrating a configuration of a communication system according to the present invention;

FIG. 2 is a block diagram illustrating a structure of a BS receiver for power control in a communication system according to the present invention; and

FIG. 3 is a flowchart illustrating a power control operation of a BS in a communication system according to the present invention.

Throughout the drawings, like reference numerals will be understood to refer to like parts, components and structures.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The following description with reference to the accompanying drawings is provided to assist in a comprehensive understanding of the exemplary embodiments of the invention as defined by the claims and their equivalents. It includes various specific details to assist in that understanding but these are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the embodiments described herein can be made without departing from the scope and spirit of the invention. Also, descriptions of well-known functions and constructions are omitted for clarity and conciseness.

The present invention provide a method and system for controlling power in a communication system, for example, an Institute of Electrical and Electronics Engineers (IEEE) 802.16 communication system, which is a Broadband Wireless Access (BWA) communication system. Although exemplary embodiments of the present invention will be described herein with reference to an IEEE 802.16e communication system employing Orthogonal Frequency Division Multiplexing (OFDM)/Orthogonal Frequency Division Multiple Access (OFDMA), by way of example, the power control method and system provided in the present invention can also be applied to other communication systems.

In addition, the present invention provide a method and system for controlling power when a communication system exchanges data between a Base Station (BS) in charge of a

particular cell and a Mobile Station (MS) that is located in the cell and receives a communication service from the BS. The exemplary embodiments of the present invention, described below, provide a method and system for controlling transmission power when a communication system employing OFDM/OFDMA performs uplink transmission, i.e., when an MS receiving a communication service from a BS in charge of a particular cell transmits data to the BS.

Further, the present invention provides a method and system for controlling power of an uplink in a communication system. The exemplary embodiments of the present invention, described herein, provide a method and system in which a BS in charge of a particular cell controls a transmission power level of an MS, using downlink channel information fed back from the MS located in its own cell, and interference information in an uplink, received from a neighboring BS in charge of a cell neighboring the particular cell in a communication system employing OFDM/OFDMA.

In exemplary embodiments of the present invention, described below, in a communication system, a BS controls transmission power of an MS according to (i) Channel Quality Information (CQI), for example, Signal-to-Interference and Noise Ratio (SINR) or Carrier-to-Interference and Noise Ratio (CINR), in an uplink, estimated based on signals received from MSs located in a particular cell, (ii) CQI, for example, SINR or CINR, in a downlink, transmitted by each of the MSs over a Channel Quality Information Channel (CQICH) allocated for transmission of channel quality information, and (iii) interference information of the uplink, transmitted via a backbone network from neighboring BSs in charge of cells neighboring the cell where the MS is currently located. Herein, as for the interference information of the uplink transmitted from the neighboring BSs via the backbone network, when the MS transmits a signal to the BS from which it receives a communication service, the signal transmitted by the MS is applied as an interference signal to the MSs that exchange data with the neighboring BSs, and information about the interference signal is referred to as interference information.

Further, in exemplary embodiments of the present invention, described below, the MS located in a particular cell can transmit signals without error even though it increases power of the transmission signals, if the MS is located far from a neighboring BS, or located close to the BS that is in charge of the particular cell and provides a communication service to the MS, i.e., located in the center area of the BS in charge of the particular cell. In this case, because an interference signal applied to the neighboring BS is lower in strength by the transmission power, the BS allows the MS to transmit signals with higher transmission power so that the power of the transmission signal may satisfy a required Packet Error Rate (PER), thereby reducing a reception error rate of packets due to a change in channel. Accordingly, exemplary embodiments of the present invention reduce a transmission error probability of packets as described above, thereby reducing retransmission for error packets and thus improving resource efficiency.

In other words, exemplary embodiments of the present invention apply different criteria for uplink power control according to channel quality determined depending on the location of MSs located in the particular cell managed by the BS, thereby improving quality of transmission signals in the uplink of the MS located in the center area of the BS and thus reducing a probability of packet reception error, which may occur due to a change in wireless channel. Meanwhile, the channels allocated for retransmission for error packets to

the MSs located in the center area of the BS are allocated to the MSs located in the boundary area of the BS, thereby increasing packet retransmission of the MSs located in the boundary area over the allocated channels and thus improving performance of the communication system.

Power control schemes used in the communication system can be classified into a downlink (forward) power control scheme and an uplink (reverse) power control scheme according to the direction of power control, and can be classified into an open-loop power control scheme and a closed-loop power control scheme according to whether a transmitter, or a BS, can receive feedback information from a receiver, or a MS.

In the downlink power control scheme, power control is performed in the BS. When the channel condition is good because the distance between the BS and the MS is short, the MS is located in the center area of the BS, or there is no shadowing due to obstacles, the BS allows the MS to transmit signals with the minimum possible transmission power, thereby reducing interference in neighboring BSs. When the channel condition is poor, the BS increases power of transmission signals within an allowable range so that the MS may normally receive the transmission signals from the BS. In the uplink power control scheme, power control is performed in the MS. The MS serves as a transmitter and the BS serves as a receiver, and they control power in the same manner as in the downlink power control scheme.

In the open-loop power control scheme, a transmitter (BS or MS) performing power control independently determines the channel quality of a receiver, and performs power control depending on the channel quality, and the open-loop power control scheme controls power based on reversibility between downlink and uplink channels. Herein, the reversibility between downlink and uplink channels' means that the MSs having the same (or similar) location against the BS will experience similar path attenuation due to the similar path attenuation based on distance between the BS and the MS, which determines the channel quality, the similar antenna gain based on antenna patterns, the similar shadowing effect caused by topology, the similar multi-path fading, etc. That is, in the open-loop power control scheme, based on the reversibility between downlink and uplink channels, the transmitter estimates the signal reception quality of the receiver, calculates required transmission power based on the estimated signal reception quality, and then transmits signals with the calculated transmission power.

In the closed-loop power control scheme, unlike in the open-loop power control scheme, the transmitter controls required transmission power based on signal reception quality of the receiver from which it has received a feedback channel, without independently determining the channel quality. The closed-loop power control scheme introduces undesirable, additional overhead for the feedback channel. However, because the transmitter can acquire information regarding the channel quality at the receiver, the closed-loop power control scheme can accurately control power of the transmission signal, compared to the open-loop power control scheme. With reference to FIG. 1, a description will now be made of a system for controlling power in a communication system according to the present invention.

FIG. 1 is a schematic diagram illustrating a configuration of a communication system according to the present invention.

Referring to FIG. 1, the communication system has a multi-cell configuration, i.e., has a cell #1 110, a cell #2 120 and a cell #3 130, and includes a BS1 112, a BS2 122 and a BS3 132 in charge of cells 110, 120 and 130, respectively,

and an MS1 114 and an MS2 116, which are located in the cell #1 110 and receive communication services from the BS1 112. Herein, the MSs, i.e., the MS1 114 and the MS2 116, may be mobile or stationary. For convenience, it will be assumed that the MS1 114 is located in the center area of the cell #1 110, or the center area of the BS1 112, i.e., is located close to the BS1 112, and the MS2 116 is located in the boundary area of the cell #1 110, or the boundary area of the BS1 112, i.e., is located far from the BS1 112. In addition, signal exchange between the BSs 112, 122 and 132, and the MSs 114 and 116 located in the cells 110, 120 and 130 is assumed to be achieved using OFDM/OFDMA.

The MS 1 114, as it is located close to the BS 1 112 as described above, suffers from low path attenuation compared to other MSs, for example, the MS2 116. Therefore, the MS1 114 and the BS1 112 exchange signals with low transmission power. The MS2 116, as it is located far from the BS1 112, suffers from high path attenuation compared to other MSs, for example, the MS1 114. Therefore, the MS2 116 and the BS 1 112 exchange signals with high transmission power. In uplink power control, the BS1 112 controls the MS1 114 and the MS2 116 to transmit signals with the minimum possible transmission power so that the received SINRs of the MS 1 114 and the MS2 116 are sufficient to maintain a target PER.

Because the MS2 116 is located close to the BS2 122 in charge of the cell #2 120, if the BS1 112 allows the MS2 116 to transmit signals with high transmission power, interference signals applied to the BS2 122 are higher in strength because of the high transmission power. In contrast, because the MS1 114 is located far from the BSs 122 and 132 of neighboring cells 120 and 130, if the BS 1 112 allows the MS1 114 to transmit signals with high transmission power, interference signals applied to the neighboring BSs 122 and 132 are lower in strength even though a high transmission power is used. Therefore, the MS1 114, which has a high path attenuation because it is located far from the neighboring BSs, causes less interference even though the MS 1 114 transmits signals with high transmission power. Therefore, as described above, the BS1 allows the MS1 114 to transmit signals with higher transmission power so that the power of the transmission signals may satisfy the required PER, thereby reducing a transmission error probability of packets due to a change in channel. The reduction in transmission error probability of packets reduces retransmission for error packets, and improves resource efficiency. With reference to FIG. 2, a description will now be made of a BS receiver for power control in a communication system according to the present invention.

FIG. 2 is a block diagram schematically illustrating a structure of a BS receiver for power control in a communication system according to the present invention.

Referring to FIG. 2, the receiver of a BS includes a reception antenna RX_Ant for receiving signals transmitted from a transmitter of an MS over a wireless channel, a Cyclic Prefix (CP) remover 201 for removing a CP included in the signal provided from the reception antenna, a Serial-to-Parallel (S/P) converter 203 for parallel-converting the signal output from the CP remover 201, a Fast Fourier Transform (FFT) unit 205 for FFT-transforming the signal output from the S/P converter 203, a demapper 207 for demapping the signal output from the FFT unit 205 into a bit stream, a demodulator 209 for demodulating the signal output from the demapper 207, a deinterleaver 211 for deinterleaving the signal output from the demodulator 209, and a decoder 213 for decoding the signal output from the deinterleaver 211 and outputting received data RX_Data.

Further, the receiver includes a received Signal-to-Noise Ratio (SNR) estimator **217** for estimating a received SNR from the output signal of the FFT unit **205**, an uplink interference level estimator **215** for estimating an interference level of the uplink from the output signal of the FFT unit **205**, a detector **219** for detecting channel information, for example, SINR or CINR, of the downlink from the received data output from the decoder **213**, an interference information receiver **221** for receiving interference information for neighboring BSs, transmitted via the backbone network, and a power controller **223** for controlling transmission power of the MS, i.e., uplink power, using the signals output from the received SNR estimator **217**, the detector **219** and the interference information receiver **221**.

When the MS transmits signals to the receiver of the BS, the uplink interference level estimator **215** estimates an interference level of an interference signal produced by the MSs that exchange data with the neighboring BSs, and then transmits interference information corresponding to the estimated interference level to the neighboring BSs via the backbone network. The received SNR estimator **217** estimates a received SNR, for example, SINR or CINR, as a CQI in the uplink, based on the signal received from the MS, i.e., the signal output from the FFT unit **205**, and outputs the CQI in the uplink to the power controller **223**. The detector **219** detects a CQI, for example, SINR or CINR, in the downlink, transmitted by the MS over a CQICH included in the received data output from the decoder **213**, and outputs the detected CQI in the downlink to the power controller **223**. The interference information receiver **221** receives interference information of the uplink, transmitted via the backbone network from the neighboring BSs in charge of cells neighboring the cell where the MS that transmits the signal the receiver has received is currently located, and then outputs the received interference information to the power controller **223**.

Then the power controller **223** controls transmission power of the MS, i.e., uplink power, according to the information received from the received SNR estimator **217**, the detector **219** and the interference information receiver **221**, i.e., the uplink CQI, the downlink CQI, and the interference information of the neighboring BSs, and then transmits the resulting power control information to the MS. The power controller **223** controls the uplink power not only according to the received information, i.e., the uplink CQI, the downlink CQI, and the interference information of the neighboring BSs, but also according to traffic information of the MSs, delivered from an upper layer, for example, Modulation and Coding Scheme (MCS) information of the transmission data, and then transmits the power control information to the MSs over a downlink frame every predetermined transmission period. With reference to FIG. 3, a description will now be made of a power control operation of a BS in a communication system according to the present invention.

FIG. 3 illustrates a power control operation of a BS in a communication system according to the present invention.

Referring to FIG. 3, in step **301**, a power controller of the BS calculates a required SNR according to traffic information, for example, MCS information, of MSs delivered from an upper layer. Thereafter, in step **303**, a received SNR estimator of the BS estimates, from an uplink, a received SNR, for example, SINR or CINR, as a CQI of the uplink using the signals received from the MSs, and then outputs the received SNR to a power controller. At this point, an interference level estimator of the BS estimates an interference level in the uplink, for example, a level of an interference signal, by detecting an interference signal except for

the desired signal from all signals received from the MSs. If a level of the estimated interference signal is less than a first threshold, the interference level estimator determines that the interference level is low, and if the level of the estimated interference signal is greater than the first threshold, the interference level estimator determines that the interference level is high. The interference level estimator transmits interference information corresponding to the determination result to the neighboring BSs via the backbone network.

In step **305**, the power controller of the BS calculates a first offset A1 using the required SNR calculated in step **301** and the received SNR received in step **303** from the received SNR estimator. The first offset A1 is the difference between the required SNR and the received SNR.

Thereafter, in step **307**, a detector of the BS detects a CQI, for example, SINR or CINR, in the downlink, transmitted by the MSs over a CQICH included in the data received from the MSs, and then outputs the detected downlink CQI to the power controller. At this time, the BS estimates quality of uplink channels of the MSs using the CQI estimated by each of the MSs and then transmitted over a CQICH, for example, using the downlink SINR. In other words, if the SINR transmitted from each of the MSs is high, it means that path attenuation with the BS that provides a communication service to the corresponding MS is low, and path attenuation with the interference BS (or neighboring BS) is high. For example, the high downlink SINR can be determined using Equation (1).

$$DLSINR = \frac{I_{s,m} S_m}{\sum_{i \neq s} L_{i,m} I_i + N_0} \quad (1)$$

In Equation (1), S_m denotes a signal that an m^{th} MS receives from a BS, I_i denotes an interference signal from an i^{th} BS, $L_{s,m}$ denotes a reciprocal of a downlink path attenuation between an s^{th} BS and an m^{th} MS, $L_{i,m}$ denotes a reciprocal of a downlink path attenuation between an i^{th} BS and an m^{th} MS, and N_0 denotes noise power. Meanwhile, an uplink SINR of an n^{th} MS located in a q^{th} neighboring BS other than the BS that provides a communication service to the corresponding MS, can be expressed as Equation (2).

$$ULSINR = \frac{L'_{q,n} S'_n}{\sum_k \sum_{i \neq n, i \neq m} (L'_{k,i} I'_i) + L'_{q,m} S'_m + N_0} \quad (2)$$

In Equation (2), $L'_{q,n}$ denotes a reciprocal of an uplink path attenuation between a q^{th} BS and an n^{th} MS, $L'_{k,i}$ denotes a reciprocal of an uplink path attenuation between a k^{th} BS and an i^{th} MS, and $L'_{q,m}$ denotes a reciprocal of an uplink path attenuation between a q^{th} BS and an m^{th} MS. Here, $L_{s,m}$ and $L'_{q,m}$ are inversely proportional to each other, because it means that if the m^{th} MS is located close to the s^{th} BS, the m^{th} MS is located far from the q^{th} BS. Therefore, it can be understood that if a downlink SINR of the m^{th} MS is high, interference by the m^{th} MS is low in an uplink SINR of a neighboring BS.

Therefore, for an MS having a high downlink SINR, path attenuation with a neighboring BS is greater than path attenuation with the BS that provides a communication service to the MS. Thus, the MS produces less interference in the neighboring BS. Since this MS produces less interference in the neighboring BS, if the BS allows the MS to

transmit signals with higher transmission power by setting a higher margin for the required PER rather than restricting transmission power of the MS to a low limit, it can reduce error probability of packets as described above.

In step 309, the power controller of the BS determines a second offset $\Delta 2$ in a predetermined look-up table according to the downlink CQI received in step 307 from the detector and the traffic information, for example, MCS information, delivered in step 301 from the upper layer. Here, the second offset $\Delta 2$ has a greater value, as an MCS level of data traffic is higher, i.e., as modulation order and coding rate are higher, and as a downlink SINR is higher, i.e., as channel quality of the downlink is higher.

Thereafter, in step 311, the power controller of the BS receives, from the interference information receiver, interference information of the uplink that the interference information receiver of the BS has received from the neighboring BSs via the backbone network, and determines a third offset $\Delta 3$ according to the received interference information of the uplink. If an uplink interference level included in the interference information of the uplink is low, the power controller increases the third offset $\Delta 3$ because interference in the neighboring BSs is low in level even though transmission power of the MS is set high. However, if the uplink interference level included in the interference information of the uplink is high, the power controller decreases the third offset $\Delta 3$ because interference in the neighboring BSs is high in level when transmission power of the MS is set high.

In step 313, the power controller of the BS determines an offset for uplink power control using the first to third offsets $\Delta 1$, $\Delta 2$ and $\Delta 3$ calculated in steps 305, 309 and 311, i.e., by summing the first to third offsets $\Delta 1$, $\Delta 2$ and $\Delta 3$, and then transmits uplink power control information with the determined offset to the MSs. In this case, the power controller transmits the offset determined using the first to third offsets $\Delta 1$, $\Delta 2$ and $\Delta 3$ to the MSs as the uplink power control information. Alternatively, the power controller compares the determined offset with a second threshold, processes 1-bit information on increment/decrement in the transmission power, and transmits the resulting information to the MSs.

Upon receipt of the uplink power control information from the BS, the MS transmits signals with the current transmission power and new transmission power obtained using the offset included in uplink power control information beginning from the frame following the frame where the uplink power control information was transmitted. If a level of the new transmission power is higher than the maximum transmission power of the MS, the MS transmits signals with the maximum transmission power. In the latter case where the BS compares the uplink power control information with the second threshold, processes 1-bit information on increment/decrement in the transmission power, and transmits the resulting information to the MSs, the MS transmits signals with the new transmission power determined by increasing or decreasing the current transmission power according to increment/decrement information included in the uplink power control information, i.e., according to a level of the increment/decrement. In this case, if the new transmission power is greater than the maximum transmission power of the MS, the MS transmits signals with the maximum transmission power. However, if the new transmission power is less than predetermined minimum transmission power, the MS transmits signals with the minimum transmission power.

As is apparent from the foregoing description, according to the present invention, the BS applies different criteria for uplink power control according to channel quality deter-

mined based on the location of MSs located in the particular cell managed by the BS, thereby improving the quality of transmission signals in the uplink of the MS located in the center area of the BS and thus reducing a probability of packet reception error, which may occur due to a change in wireless channel. In addition, the BS allocates, to the MSs located in the boundary area of the BS, the channels allocated for retransmission for error packets to the MSs located in the center area of the BS, thereby increasing packet retransmission over the allocated channels and thus improving performance of the communication system.

While the invention has been shown and described with reference to certain exemplary embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims and their equivalents.

What is claimed is:

1. A method for controlling power at a base station in a communication system, the method comprising:
 - calculating a first offset according to traffic information of a mobile station and uplink channel quality information of the mobile station;
 - determining a second offset according to downlink channel quality information of the mobile station, received from the mobile station;
 - determining a third offset according to interference information received from neighboring base stations; and
 - transmitting, to the mobile station, power control information determined based on the first offset, the second offset and the third offset.
2. The method of claim 1, wherein the traffic information of the mobile station comprises Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station.
3. The method of claim 1, wherein the uplink channel quality information of the mobile station comprises a received Signal-to-Noise Ratio (SNR) in an uplink over which the mobile station transmits data to the base station.
4. The method of claim 1, wherein the first offset comprises a difference between a required Signal-to-Noise Ratio (SNR) corresponding to traffic information of the mobile station and a received SNR in an uplink.
5. The method of claim 4, the calculation of a first offset further comprises estimating the received SNR using signals received from the mobile station.
6. The method of claim 4, wherein the required SNR is based on Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station, included in the traffic information of the mobile station.
7. The method of claim 1, wherein the downlink channel quality information of the mobile station comprises a Signal-to-Interference and Noise Ratio (SINR) calculated by the mobile station in a downlink over which the base station transmits data to the mobile station.
8. The method of claim 7, wherein the second offset is determined according to the SINR calculated by the mobile station and Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station, included in the traffic information of the mobile station, using a look-up table.
9. The method of claim 1, wherein the interference information received from the neighboring base stations comprises an interference level to the neighboring base stations by the mobile station in an uplink over which the mobile station transmits data to the base station.

11

10. The method of claim 1, wherein the power control information comprises a result value obtained by summing the first offset, the second offset and the third offset.

11. The method of claim 1, wherein the power control information comprises power increment/decrement information determined by comparing a predetermined threshold with a result value obtained by summing the first offset, the second offset and the third offset.

12. The method of claim 1, wherein the calculation of a first offset comprises estimating an interference level to the mobile station by neighboring base stations in an uplink over which the mobile station transmits data to the base station, and transmitting interference information including the estimated interference level to the neighboring base stations.

13. A system of a base station for controlling power in a communication system, the system comprising:

a [base station] processor for calculating a first offset according to traffic information of a mobile station and uplink channel quality information of the mobile station, determining a second offset according to downlink channel quality information of the mobile station, received from the mobile station, and determining a third offset according to interference information received from neighboring base stations[.]; and
a transmitter for transmitting, to the mobile station, power control information determined based on the first offset, the second offset and the third offset.

14. The system of claim 13, wherein the traffic information of the mobile station comprises Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station.

15. The system of claim 13, wherein the uplink channel quality information of the mobile station comprises a received Signal-to-Noise Ratio (SNR) in an uplink over which the mobile station transmits data to the base station.

16. The system of claim 13, wherein the first offset comprises a difference between a required Signal-to-Noise Ratio (SNR) corresponding to traffic information of the mobile station and a received SNR in an uplink.

17. The system of claim 16, wherein
[the base station] the processor estimates the received SNR using signals received from the mobile station.

18. The system of claim 16, wherein the required SNR is based on Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station, included in the traffic information of the mobile station.

19. The system of claim 13, wherein the downlink channel quality information of the mobile station comprises a Signal-to-Interference and Noise Ratio (SINR) calculated by the mobile station in a downlink over which the base station transmits data to the mobile station.

20. The system of claim 19, wherein the second offset is determined according to the SINR calculated by the mobile station and Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station, included in the traffic information of the mobile station, using a look-up table.

21. The system of claim 13, wherein the interference information received from the neighboring base stations comprises an interference level to the neighboring base stations by the mobile station in an uplink over which the mobile station transmits data to the base station.

22. The system of claim 13, wherein the power control information comprises a result value obtained by summing the first offset, the second offset and the third offset.

23. The system of claim 13, wherein the power control information comprises power increment/decrement information

12

determined by comparing a predetermined threshold with a result value obtained by summing the first offset, the second offset and the third offset.

24. The system of claim 13,

wherein the [base station] processor estimates an interference level [to the mobile station by neighboring base stations] in an uplink over which the mobile station transmits data to the base station, and

wherein the transmitter transmits interference information including the estimated interference level to the neighboring base stations.

25. A system of a base station for controlling power in a communication system, the system comprising:

[a base station including a power controller] a processor for calculating a first offset according to traffic information of a mobile station and uplink channel quality information of the mobile station, for determining a second offset according to downlink channel quality information of the mobile station, received from the mobile station, for determining a third offset according to interference information received from neighboring base stations, and for determining power control information according to the first offset, the second offset and the third offset; and

[wherein the base station transmits] a transmitter for transmitting the determined power control information to the mobile station.

26. The system of claim 25, wherein the traffic information of the mobile station comprises Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station.

[27. The system of claim 25, wherein the base station comprises an estimator for estimating the uplink channel quality information of the mobile station, wherein the estimator estimates a received Signal-to-Noise Ratio (SNR) in an uplink over which the mobile station transmits data to the base station, and then transmits to the power controller the uplink channel quality information including the estimated received SNR.]

28. The system of claim 25, wherein the [power controller] processor calculates, as the first offset, a difference between a required Signal-to-Noise Ratio (SNR) corresponding to the traffic information of the mobile station and a received SNR in an uplink.

29. The system of claim 28, wherein the [base station] processor estimates the received SNR using signals received from the mobile station.

30. The system of claim 28, wherein the required SNR is based on Modulation and Coding Scheme (MCS) information of data to be transmitted to the mobile station, included in the traffic information of the mobile station.

31. The system of claim 25, [wherein the base station includes an] further comprising:

a detector for detecting the downlink channel quality information of the mobile station, included in data received from the mobile station, wherein the detector transmits to the [power controller] processor the downlink channel quality information [calculated by the mobile station in a downlink over which the base station transmits data to the mobile station].

32. The system of claim 31, wherein the downlink channel quality information comprises a Signal-to-Interference and Noise Ratio (SINR).

33. The system of claim 32, wherein the [power controller] processor determines the second offset according to the SINR calculated by the mobile station and Modulation and Coding Scheme (MCS) information of data to be transmitted

13

to the mobile station, included in the traffic information of the mobile station, using a look-up table.

34. The system of claim 25, [wherein the base station] further [includes] comprising:

an interference information receiver for receiving interference information from the neighboring base stations.

35. The system of claim 34, wherein the interference information comprises an interference level to the neighboring base stations by the mobile station in an uplink over which the mobile station transmits data to the base station.

36. The system of claim 25, wherein the [power controller] transmitter transmits to the mobile station the power control information including a result value obtained by summing the first offset, the second offset and the third offset.

37. The system of claim 25, wherein the [power controller] transmitter transmits to the mobile station the power control information including power increment/decrement information determined by comparing a predetermined threshold with a result value obtained by summing the first offset, the second offset and the third offset.

38. The system of claim 25,

wherein the [base station includes an estimator for estimating] processor estimates an interference level [to the mobile station by the neighboring base stations] in an uplink over which the mobile station transmits data to the base station, and [for transmitting]

wherein the transmitter transmits interference information including the estimated interference level to the neighboring base stations.

39. A base station in a communication system, the base station comprising:

a receiver for receiving from a mobile station first channel quality information about a downlink transmission of the mobile station and receiving first interference information from at least one neighboring base station;

a processor for generating information on uplink power for use by the mobile station to adjust the uplink power of the mobile station based on the first interference information; and

a transmitter for transmitting the information on the uplink power to the mobile station,

wherein the first interference information is related to interference at the at least one neighboring base station due to an uplink transmission of the mobile station.

40. The base station of claim 39, wherein the first interference information includes an interference level which is applied to a cell of each of the at least one neighboring base station by the uplink transmission of the mobile station.

41. The base station of claim 40, wherein the mobile station is located in a cell of the base station.

42. The base station of claim 40, wherein the information on the uplink power includes an offset value for controlling the uplink power.

43. The base station of claim 42, wherein the offset value is determined to have an increased or decreased value according to the interference level which the first interference information represents.

44. The base station of claim 40, wherein the transmitter transmits second interference information to the at least one neighboring base station, the second interference information including an interference level which is applied to the

14

cells of each of the at least one neighboring base station by the uplink transmission of the mobile station.

45. The base station of claim 44, wherein the first interference information and the second interference information is received/transmitted via a backbone network between the base station and the at least one neighboring base station.

46. The base station of claim 39,

wherein the processor estimates second channel quality information about the uplink transmission of the mobile station, and

wherein the information on the uplink power is generated based on the first interference information, the estimated second channel quality information of the mobile station, and the received first channel quality information of the mobile station.

47. The base station of claim 46, wherein the second channel quality information of the mobile station comprises a received signal-to-noise ratio (SNR) in the uplink transmission over which the mobile station transmits data to the base station.

48. The base station of claim 46, wherein the first channel quality information of the mobile station comprises a signal-to-interference and noise ratio (SINR) calculated by the mobile station in the downlink transmission over which the base station transmits data to the mobile station.

49. A base station in a communication system, the base station comprising:

a receiver for receiving, from a mobile station, first channel quality information about a downlink transmission of the mobile station and receiving first interference information from at least one neighboring base station; and

a processor for performing a control operation, wherein the control operation is related to uplink power adjustment in the mobile station and the first interference information is related to interference at the at least one neighboring base station due to an uplink transmission of the mobile station, and

wherein the processor performs the control operation using the first interference information.

50. The base station of claim 49, wherein the first interference information includes an interference level which is applied to a cell of each of the at least one neighboring base station by the uplink transmission of a mobile station.

51. The base station of claim 49, wherein the first interference information is received/transmitted via a backbone network between the base station and the at least one neighboring base station.

52. The base station of claim 50, wherein the mobile station is located in a cell of the base station.

53. The base station of claim 49, further comprising a transmitter for transmitting second interference information to the at least one neighboring base station.

54. The base station of claim 53, wherein the second interference information includes an interference level which is applied to cells of the at least one neighboring base station by the uplink transmission of the mobile station.

55. The base station of claim 54, wherein the second interference information is received/transmitted via a backbone network between the base station and the at least one neighboring base station.

* * * * *