

689847

COMMONWEALTH OF AUSTRALIA

P/00/001
Section 29

The Patents Act 1990

PATENT REQUEST: CONVENTION PATENT

We, **THE LUBRIZOL CORPORATION**, being the person identified below as the Applicant, request the grant of a patent to the person identified below as the Nominated Person, for an invention described in the accompanying standard complete specification Full application details follow:-

Applicant: THE LUBRIZOL CORPORATION
Address: 29400 Lakeland Boulevard, Wickliffe, Ohio 44092,
United States of America
Nominated Person: THE LUBRIZOL CORPORATION
Address: 29400 Lakeland Boulevard, Wickliffe, Ohio 44092,
United States of America
Invention Title: ASHLESS, LOW PHOSPHORUS LUBRICANT
Name of actual Inventor: Ewa A. Bardasz
Address for service in Australia: CALLINAN LAWRIE, 278 High Street, Kew 3101,
Victoria, Australia
Attorney Code: CL

Convention Details


Application Number	Country	Country Code	Date of Application
217,406	United States of America	US	24 March 1994

D A T E D this 21st day of March, 1995.

THE LUBRIZOL CORPORATION

By their Patent Attorneys:

CALLINAN LAWRIE

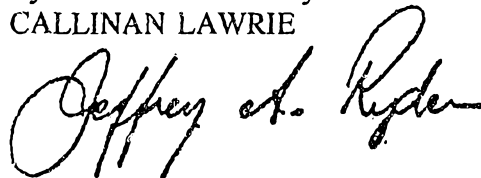

1106649 1 2 0000

2677R-AU

CALLINAN LAWRIE
278 High Street, Kew
Victoria 3101, Australia
Facsimile:
61 (3) 853.0062
61 (3) 853.0728

A U S T R A L I A

PATENT

NOTICE OF ENTITLEMENT

We, THE LUBRIZOL CORPORATION, of 29400 Lakeland Boulevard, Wickliffe, Ohio 44092, United States of America, being the applicant(s) and the person(s) nominated for grant of patent in respect of the Application for the invention entitled


ASHLESS, LOW PHOSPHORUS LUBRICANT

state the following:-

STANDARD CONVENTION FILING

The person nominated for the grant of the patent has entitlement from the actual inventor(s) who is/are the applicant(s) of the basic application(s) listed on the patent request form by virtue of an assignment of invention and of the priority right from the actual inventor(s).

The basic application(s) listed on the request form is/are the first application(s) made in a Convention country in respect of the invention.



Stephen A. Di Biase
Vice President, Research and Development

November 7, 1994

Date

aunotice.frm



AU9514993

(12) PATENT ABRIDGMENT (11) Document No. AU-B-14993/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 689847

- (54) Title
ASHLESS, LOW PHOSPHORUS LUBRICANT
- International Patent Classification(s)
(51)⁶ C10M 169/04 C10M 141/00
- (21) Application No. : 14993/95 (22) Application Date : 21.03.95
- (30) Priority Data
- (31) Number (32) Date (33) Country
217406 24.03.94 US UNITED STATES OF AMERICA
- (43) Publication Date : 05.10.95
- (44) Publication Date of Accepted Application : 09.04.98
- (71) Applicant(s)
THE LUBRIZOL CORPORATION
- (72) Inventor(s)
EWA A. BARDASZ
- (74) Attorney or Agent
CALLINAN LAWRIE , Private Bag 7, KEW VIC 3101
- (56) Prior Art Documents
GB 2152073
US 4629576
US 4111821
- (57) Claim

1. A composition comprising:


- (a) an oil of lubricating viscosity;
- (b) an antioxidant; and
- (c) an anti-nitration agent,

wherein the composition is substantially free from metals, and

wherein the amount of the antioxidant and the amount of the anti-nitration agent are sufficient to reduce the amount of varnish formation in a natural gas-fueled internal-combustion engine.

AUSTRALIA
PATENTS ACT 1990

**COMPLETE SPECIFICATION
FOR A STANDARD PATENT
ORIGINAL**



TO BE COMPLETED BY APPLICANT



Name of Applicant: THE LUBRIZOL CORPORATION



Actual Inventor(s): Ewa A. Bardasz

Address for Service: CALLINAN LAWRIE, 278 High Street, Kew, 3101, Victoria, Australia

Invention Title: "ASHLESS, LOW PHOSPHORUS LUBRICANT"

The following statement is a full description of this invention, including the best method of performing it known to me:-

2677R

TITLE

Ashless, Low Phosphorus Lubricant

BACKGROUND OF THE INVENTION

5 The present invention relates to a lubricant for engines, in particular diesel and natural gas powered internal combustion engines.

10 Lubricant compositions such as crankcase motor oils have been the subject of much research to improve their physical and chemical properties. For instance, research has been directed to providing so-called ashless lubricants, that is, those which do not contain metals which form sulfated ash under the ASTM test D-784. Ashless lubricants would have the advantage of reducing combustion chamber deposits. But to prepare such a material which
15 passes rigid performance tests has been difficult, since metal salts in the form of detergents have long been key components in engine oils. It is also desirable to minimize the amount of phosphorus in lubricants. Although phosphorus does not contribute to sulfated ash, it can lead to poisoning of catalysts in pollution control devices such as emission catalysts or traps when amounts of phosphorus make their way into the exhaust system. Nevertheless, many conventional antiwear additives contain phosphorus, so its total removal has presented a challenge. The present
20 invention, however, provides an ashless, zero phosphorus lubricant composition which is suitable for lubricating diesel and natural gas powered engines.

U.S. Patent 4,582,617, Doner et al., April 15, 1986, discloses grease compositions including a boronated epoxide
30 (d), metal or non-metal phosphates, and a metal (or amine) hydroxy-containing soap grease thickener. Antioxidants are also disclosed.

U.S. Patent 4,629,576, Small, Jr., Dec. 16, 1986, discloses engine lubricating oil containing (a) alkyl succinimide, and (d) a borated long chain 1,2 alkane diols.
35 Other additives may be present to obtain a proper balance of properties such as dispersion and oxidation. Preferably

the lubricant composition also contains neutral or over-based salts.

U. S. Patent Re.32,246, Horodysky, Sept. 9, 1986, discloses lubricants containing borated epoxides. Other materials can be present including coantioxidants. Metal salts can also be present.

U.S. Patent 4,689,162, Wirth et al., Aug. 25, 1987, discloses boron-containing compounds as additives for lubricants. Dispersants and antioxidants can also be present.

SUMMARY OF THE INVENTION

The present invention provides a composition comprising an oil of lubricating viscosity; an antioxidant; an anti-nitration agent, and preferably at least about 0.1% by weight of a borated product of an epoxide or the reactive equivalent of an epoxide; wherein the composition is substantially free from metals, and wherein the amount of the antioxidant and the amount of the anti-nitration agent are sufficient to reduce the amount of varnish formation in a natural gas-fueled internal-combustion engine. The invention further provides a process for lubricating an internal combustion engine, comprising supplying the above composition to the engine and operating the engine.

DETAILED DESCRIPTION OF THE INVENTION


The first component of the composition of the present invention is an oil of lubricating viscosity, including natural or synthetic lubricating oils and mixtures thereof. Natural oils include animal oils, vegetable oils, mineral lubricating oils of paraffinic, naphthenic, or mixed types, solvent or acid treated mineral oils, and oils derived from coal or shale. Synthetic lubricating oils include hydrocarbon oils, halo-substituted hydrocarbon oils, alkylene oxide polymers (including those made by polymerization of ethylene oxide or propylene oxide), esters of dicarboxylic acids and a variety of alcohols including some polyols, esters of monocarboxylic acids and polyols, esters of

phosphorus-containing acids, polymeric tetrahydrofurans, and silicon-based oils (including siloxane oils and silicate oils). Included are unrefined, refined, and rerefined oils. Specific examples of the oils of lubricating viscosity are described in U.S. Patent 4,326,972. The preferred oil is mineral oil.

The lubricating oil in the invention will normally comprise the major amount of the composition. Thus it will normally be at least 50% by weight of the composition, preferably 75 to 98%, and most preferably 85 to 96%. As an alternative embodiment, however, the present invention can provide an additive concentrate in which the oil is present in a concentrate-forming amount, e.g. less than 50% by weight, preferably 5 to 20%, and the amounts of the other components, described in greater detail below, are proportionately increased.


The second component of the present invention is at least one antioxidant. Oxidants comprise a wide class of well-known materials, notably including hindered phenols and aromatic amines. It is preferred that the antioxidant of the present compositions is at least one hindered phenol or at least one aromatic amine, or a mixture thereof.

Hindered phenols are generally alkyl phenols of the formula




wherein each R is independently an alkyl group containing from 1 up to about 24 carbon atoms and a is an integer of from 1 up to 5. Preferably R contains from 4 to 18 carbon atoms and most preferably from 4 to 12 carbon atoms. R may be either straight chained or branched chained; branched chained is preferred. The preferred value for a is an integer of from 1 to 4 and most preferred is from 1 to 3. An especially preferred value for a is 2.

The hindered phenolic antioxidant is preferably an alkyl phenol, however, mixtures of alkyl phenols may be employed. Preferably the phenol is a butyl substituted phenol containing 2 or 3 t-butyl groups. When a is 2, the t-butyl groups normally occupy the 2,6-position, that is, the phenol is sterically hindered:




where b is 0 to 3. When a is 3, the t-butyl groups normally occupy the 2,4,6-position. Other substituents are permitted on the aromatic ring. In one embodiment the hindered phenolic antioxidant is a bridged compound in which two or more aromatic rings are linked by a bridging group; each aromatic ring bears a phenolic OH group. Examples of phenolic antioxidants include 2,6-di-t-butyl-p-cresol (i.e., 2,6-di-t-butyl-4-methylphenol, which is preferred), and 4,4'-methylenebis(2,6-di-t-butylphenol). These and other hindered phenolic antioxidants and their methods of preparation are well known to those skilled in the art. Such antioxidants are commercially available; one example of such a material is Catalin™ Antioxidant CA01, available from Ashland Chemical.

Aromatic amine antioxidants include aromatic amines of the formula

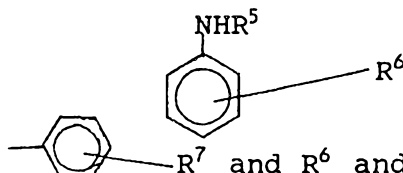

wherein R^5 is a hydrogen or an alkyl group containing from 1 up to 24 carbon atoms. Preferably R^6 and R^7 are alkyl groups containing from 4 up to about 20 carbon atoms. A particu-

larly useful amine antioxidant is an alkylated diphenylamine such as nonylated diphenylamine of the formula

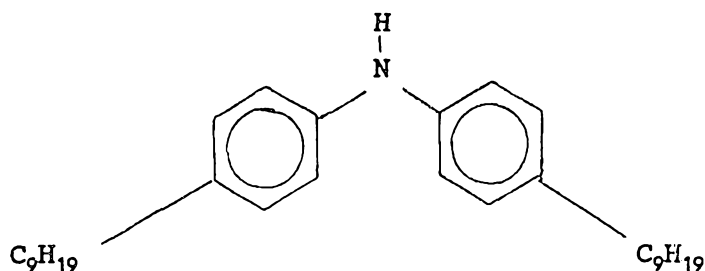

10 Aromatic amine antioxidants and their preparation are well known to those skilled in the art. These materials are commercially available and are supplied as Naugard[®] 4386 by Uniroyal Chemical.


15 Other types of antioxidants include alkylated hydroquinones, hydroxylated thiodiphenyl ethers, alkylidene bisphenols, benzyl compounds, acylaminophenols, esters or amides of β -(3,5-di(branched alkyl)-4-hydroxyphenyl)propionic acids, aliphatic or aromatic phosphites, esters of thiodipropionic acid or thiodiacetic acid, and salts of
20 dithiocarbamic or dithiophosphoric acids.

The antioxidant component used in the present invention is preferably a mixture of one or more hindered phenol antioxidants and one or more aromatic amine antioxidants, and most preferably a mixture of di-*t*-butyl-4-methylphenol and alkylated diphenylamine. The relative amounts of the
25 phenolic antioxidant and the amine antioxidant are preferably 90:10 to 10:90 by weight, respectively, preferably 80:20 to 50:50 by weight.


The total amount of antioxidant used in the present
30 compositions is significantly higher than the amounts customarily employed in ash-containing engine lubricants. Typically the amount of antioxidant in the final formulation will be at least 1.8% by weight, and preferably at least 2% by weight. The upper limit on the amount of
35 antioxidant is not particularly limited, but practically will normally not exceed 10% by weight, more typically 5%.

course, in a concentrate the amount of antioxidant will be proportionately increased.

Another component of the present composition is an anti-nitration agent. Anti-nitration agents are a diverse group of materials, somewhat akin to antioxidants, which serve to minimize the formation of nitrogen-containing organic compounds in the environment of an internal combustion engine. Anti-nitration agents can be considered to include certain phenolic antioxidants and metal passivators, but a preferred type of anti-nitration agent is a hydrocarbylamine phosphate salt, preferably an alkylamine phosphate salt, particularly where the phosphate is an ester. Thus the material is preferably an alkylamine salt of mixed mono- and di-esters of phosphoric acid. Such a material can be designated by the general formula




where each R is independently hydrogen or a hydrocarbyl or substituted hydrocarbyl group, provided that no more than one R is hydrogen, and where each R' is independently hydrogen or a hydrocarbyl group, preferably an alkyl group, provided that at least one R' is hydrocarbyl. The R' hydrocarbyl group is preferably a branched alkyl group of 12 to 14 carbon atoms, and the amine salt functionality is derived from an amine available commercially and known as PrimeneTM 81R. In a preferred embodiment, one or both of the R groups is substituted hydrocarbyl, preferably a hydrocarbyl group containing dithiophosphate functionality. Such substituted hydrocarbyl groups can be expressed by the general formula



where R^2 is an alkyl group and R^3 is an alkylene group. In a preferred embodiment R^2 is hexyl and R^3 is propylene, the structure of the R group then being

5



10

These substituted hydrocarbyl groups can be derived from the corresponding substituted hydrocarbyl alcohol, the preparation and properties of which are described in greater detail in U.S. Patent 3,107,405. The substituted hydrocarbyl alcohols can be reacted with phosphoric anhydride to form the phosphate esters, which in turn can be neutralized with the above described amines.

15

20


25

The amount of the anti-nitration agent should be sufficient to, in combination with the antioxidant, reduce the amount of varnish formation in a natural gas-fueled internal-combustion engine, compared to the amount formed in the absence of the anti-nitration agent. The actual amount will be expected to vary with the identity of the specific agent, but preferably the amount of anti-nitration agent will be 0.01 to 0.1 percent by weight of the final composition, and preferably 0.015 to 0.05 weight percent. The amounts, of course, will be proportionally increased in a concentrate.

30


A preferred component of the present invention is a borated product of an epoxide or the reactive equivalent of an epoxide, which is believed to serve as an antiwear agent. If this material is present, the antioxidant and antinitration components can be present in relatively lower concentrations than would otherwise be effective. The preferred epoxides are hydrocarbyl epoxides, which may be expressed by the general formula

35



wherein each R is independently hydrogen or a hydrocarbyl group containing about 8 to about 30 carbon atoms, at least one of which is hydrocarbyl. Preferably one R is a hydrocarbyl group of about 10 to about 18 carbon atoms and the remaining R groups are hydrogen. More preferably the hydrocarbyl group is an alkyl group. The term "alkyl group" includes aliphatic hydrocarbon radicals (e.g. hexyl, heptyl, octyl, decyl, dodecyl, tetradecyl, stearyl, hexenyl, oleyl), preferably free from acetylenic unsaturation; substituted aliphatic hydrocarbon groups including substituents such as hydroxy, nitro, carbalkoxy, alkoxy, and alkylthio, and hetero atom-containing radicals. Also included are materials in which any two of the R groups together with the atoms to which they are attached, form a cyclic group, which can be alicyclic or heterocyclic. Examples of such materials are n-butylcyclopentene oxide, n-hexylcyclohexene oxide, methylenecyclooctene oxide, and 2-methylene-3-n-hexyltetrahydrofuran oxide. Mixtures of such materials can also be used. In a preferred embodiment, one R group is tetradecyl and the others are hydrogen.

Alternatively this material can be a reactive equivalent of an epoxide. By the term "reactive equivalent of an epoxide" is meant a material which can react with a boronating agent (described below) in the same or a similar manner as can an epoxide to give the same or similar products. An example of a reactive equivalent of an epoxide is a diol, in particular, a diol of the formula



where the R groups are defined as above, for the epoxide. Other reactive equivalents include materials having vicinal dihydroxy groups which are reacted with certain blocking reagents. Another example of a reactive equivalent to

epoxides is the halohydrins. Other equivalents will be apparent to those skilled in the art.


The epoxide or reactive equivalent thereof is reacted with a boronating agent to provide a borated product.

5 Boronating agents include the various forms of boric acid (including metaboric acid, HBO_2 , orthoboric acid, H_3BO_3 , and tetraboric acid, $\text{H}_2\text{B}_4\text{O}_7$), boric oxide, boron trioxide, and alkyl borates of the formula $(\text{RO})_x\text{B}(\text{OH})_y$ wherein X is 1 to 3 and y is 0 to 2, the sum of x and y being 3, and where R is an alkyl group containing 1 to 6 carbon atoms.



10 The molar ratio of the boronating agent to the epoxide or reactive equivalent thereof is generally 4:1 to 1:4. Ratios of 1:1 to 1:3 are preferred, with 1:2 being an especially preferred ratio.

15 A preferred borated epoxide is obtained as the result of reacting boric acid with a 1,2-epoxide mixture, with the epoxide containing about 16 carbon atoms. Such a material can be prepared by reacting 1,2-epoxyhexadecane with boric acid. The mixture is heated to 80-250°C (preferably about 20 180°C). The reaction can be carried out in the presence of water and toluene and/or a diluent oil.

The exact molecular structure of the boronated products is not known with certainty. It appears that the composition may comprise principally borated condensation products of the epoxide, having a postulated structure

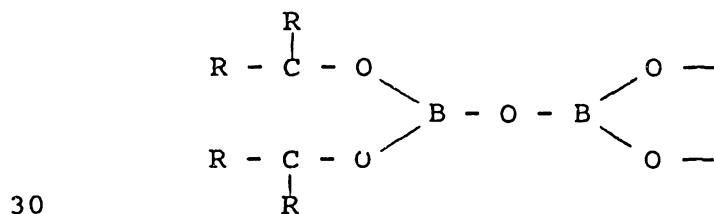


with minor amounts of compounds of one or both of the formulas

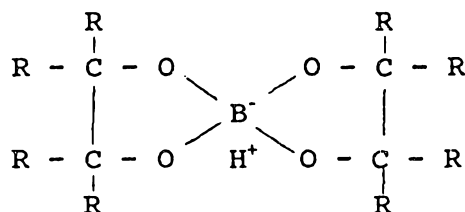

Such borated materials and their preparation are described in greater detail in U.S. Patent 4,584,115. This document further describes a preferred synthetic route which minimizes foaming and exothermic reactions. This route involves inclusion in the reaction medium of a minor amount of a heel from a previous reaction of the boronating agent and epoxide.

The amount of the borated product, if present, is preferably at least 0.1% by weight, e.g., 0.2 to 4%, and more preferably 0.3 to 1% of the final composition. In a concentrate the amounts will be proportionally higher.

Another optional, but preferred, component of the present composition is a dispersant. Dispersants are well known in the field of lubricants and include monomeric and polymeric dispersants. Typical dispersants include N-substituted long chain alkenyl succinimides, having a variety of chemical structures including typically

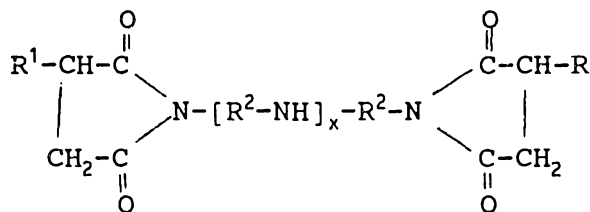


where each R^1 is independently an alkyl group, frequently a polyisobutyl group with a molecular weight of 500-5000,

and R^2 are alkenyl groups, commonly ethylenyl (C_2H_4) groups, and x is a small integer. Such molecules are commonly derived from reaction of an alkenyl acylating agent with a polyamine, and a wide variety of linkages between the two moieties is possible beside the simple imide structure shown above, including a variety of amides and quaternary ammonium salts. Succinimide dispersants are more fully described in U.S. Patent 4,234,435.


Another type of dispersant is high molecular weight esters. These materials are similar to the above-described succinimides except that they may be seen as having been prepared by reaction of a hydrocarbyl acylating agent and a polyhydric aliphatic alcohol such as glycerol, pentaerythritol, or sorbitol. Such materials are described in more detail in U.S. Patent 3,381,022.

Another type of dispersant is Mannich bases. These are materials which are formed by the condensation of a higher molecular weight, alkyl substituted phenol, an alkylene polyamine, and an aldehyde such as formaldehyde. Such materials may have the general structure

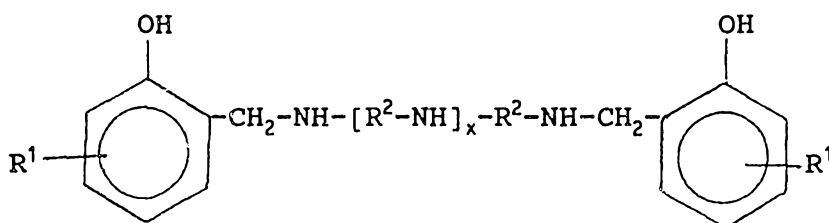


(including a variety of isomers and the like) and are described in more detail in U.S. Patent 3,634,515.

Polymeric dispersant additives are generally hydrocarbon-based polymers which contain polar functionality to impart dispersancy characteristics to the polymer. These materials can sometimes also serve as viscosity index improvers, in which case one portion of the structure is similar to that of viscosity index improvers, and another portion contains "polar" compounds to impart the dispersancy characteristics. The general formula of such a polymer might be:



where O is an oleophilic group, P is a polar group, and R is hydrogen or an alkyl group. Among the many possibilities for the polar group are -C(O)-NH₂, -C(O)-NHR, -C(O)-O-R-NR₂, -C(O)-N(-ROH)-R-NH-R-OH,



. Such materials include copolymers of methacrylates or acrylates containing polar groups such as amines, amides, imines, imides, hydroxyl, or ether; ethylene-propylene copolymers containing such polar groups; and vinyl-acetate-fumaric acid ester copolymers.

In the present application it is preferred that the dispersant be a succinimide dispersant. The amount of the dispersant is preferably 1 to 10% by weight of the final composition, more preferably 2 to 5%, and proportionally higher if a concentrate is used.

Other materials which are conventional for use in lubricants may also be included in compositions of the present invention, provided that they are consistent with the use intended for the composition. Typical additives include corrosion inhibitors, rust inhibitors, viscosity improvers, pour point depressants, extreme pressure additives, anti-foam agents, anti-stain additives, anti-foulants, and detergents. However, special attention should be paid to the desirability or undesirability of introducing ash-forming metals or phosphorus compounds, for reasons described below.

One advantage of the present compositions is that the amount of varnish in a natural gas-fueled engine is reduced, compared to the amount formed in other substantially metal-free compositions. The present compositions have also been found to be useful for reducing the amount of piston deposits in such engines, and for retaining the

basicity and controlling the viscosity increase of oils in which they are used.

One further advantage of the compositions of the present invention is that they are substantially free from metals. One alternative expression of this property is to say that the materials can be prepared as substantially ashless compositions. A low ash or a substantially ashless composition is one which contains less than 1% sulfated ash, as determined by ASTM D-874. Accordingly, the present compositions are capable of serving as satisfactory lubricants, particularly for diesel fueled or natural gas fueled engines, even when prepared so as to contain less than 1% sulfated ash, preferably less than 0.5% or 0.4% sulfated ash, and more preferably less than 0.1 % sulfated ash or even lower. In one preferred embodiment, no ash-forming metals are present, so the composition will be entirely ash-free (except for whatever incidental metal contamination may be unavoidable). In particular, it is preferred that the amount of sulfated ash of the composition be less than 0.01%. Of course, if the composition is supplied as a concentrate, these limits would be correspondingly increased. In practice this means that little or no metal-containing detergents are required or desired in the formulations.

Moreover, since the composition is capable of serving as a satisfactory lubricant at a very low phosphorus level, it is preferred that the composition be low in phosphorus, that is, contain less than 0.03% phosphorus, and more preferably less than 0.005% phosphorus (and correspondingly higher amounts in a concentrate). That is to say, normally the total amount of phosphorus present will be that amount which is contributed by the phosphorus which may be present in the anti-nitration agent. Since the amount of the anti-nitration agent in the composition is normally quite low, the amount of phosphorus contributed thereby will be correspondingly low. It is preferred that no additional

phosphorus components be present beyond the phosphorus contained in the anti-nitration agent, although amounts which do not negate the usefulness of the present invention in the application at hand can be employed.

5 As used herein, the term "hydrocarbyl substituent" or "hydrocarbyl group" is used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group having a carbon atom directly attached to the remainder of the molecule and having predominantly
10 hydrocarbon character. Such groups include hydrocarbon groups, substituted hydrocarbon groups, and hetero groups, that is, groups which, while primarily hydrocarbon in character, contain atoms other than carbon present in a chain or ring otherwise composed of carbon atoms.

15 EXAMPLES

Example 1.

A composition is prepared by blending 6.1 weight % polyisobutylene (number average molecular weight about 2000) -substituted succinic acid/polyethyleneamine amide dispersants (including about 50 % diluent oil), 2.0 weight percent 2,6-di-t-butyl-4-methylphenol, 1.1 weight percent C₉ mono- and di-p-alkylated diphenylamines (including 16 % diluent oil), 0.02 weight percent of propylene oxide-treated 2-methyl-pentanyl phosphorodithioic acid, subse-
25 quently reacted with phosphoric anhydride, the product being neutralized with t-alkyl primary amine (the anti-nitration agent), 0.55 weight percent borated polytetradecyloxirane, and 60 parts per million antifoam agent in kerosene, along with 0.28 weight percent additional diluent
30 oil, in Exxon 600 Neutral oil.

The composition is used to lubricate a natural gas-fueled 2.3 L displacement Ford VD engine. After the engine is run for 120 hours it is disassembled. The average piston deposit is rated at 4.3 on a scale of 1-10, which
35 indicates good performance, particularly for a lubricant formulated without metal-containing detergents.

Example 2.

The composition of Example 1 is used to lubricate a diesel engine, American Petroleum Institute Caterpillar 1H2 test. After the test the engine shows no observable deposits in the top ring grooves.

Example 3.

The composition of Example 1 is used in the American Petroleum Institute L-38 bearing corrosion test. After 40 hours of testing the bearing weight loss is 30.0 mg.

Examples 4 - 12.

Compositions are prepared using the components and concentrations (active chemical basis) shown in Table I. (Identities of the chemicals used are shown in Table II.) Examples 4 - 11 are prepared in mineral oil. Example 11 represents a concentrate. Example 12 is prepared in a polyol-ester oil. In some cases small amounts of conventional additives (such as an anti-foam agent) are present, although not specifically reported.

TABLE I

Ex	Antiox. #1, %	Antiox. #2, %	Antini- tration agent, %	Borated mat'l, %	Disper- sant, %
4	A	1	D 0.8	G 0.1	K 4
5	B	5	E 5	G 0.01	K 0.1
6	C	4	--- 0	G 0.04	K 1
7	A	2	F 1	G 0.02	L 0.3
8	A	2	D 1	H 0.02	M 0.4
9	A	2	D 1	J 0.02	K 0.2
10	A	2	D 1	G 0.02	K 1
11	A	27	D 13	G 0.3	K 5
12	A	2	D 1	G 0.02	K 0.3
13	A	27	D 13	G 0.04	--- 0

TABLE II -- Identities

Antioxidants

A 2,6-di-t-butyl-4-methylphenol

B 2,4,6-tri-t-butylphenol

- C 4,4'-methylenebis(2,6-di-t-butylphenol)
- D C₉ mono- and di-p-alkylated diphenylamines
- E C₁₂ monoalkylated diphenyl amine
- F diphenyl amine

5 Antinitration Agents

G t-alkyl primary amine salt of reaction product of 2-methyl-propanol dithio acid with phosphoric anhydride.

H t-alkyl primary amine salt of reaction product of 2-ethyl-propanol dithio acid with phosphoric anhydride.

10 J cyclohexylamine salt of reaction product of 2-methyl-propanol dithio acid with phosphoric anhydride.

Borated Materials

K Borated polytetradecyloxirane

L borated n-hexylcyclohexene oxide

15 M reaction product of trimethyl borate with 1,2-octadecanediol

Dispersants

N polyisobutylene-substituted succinic acid/tetra-ethylenepentamine amide of Ex. 1

20 P polyisobutylene-substituted succinic acid/N-(2-hydroxyethyl)ethylenediamine reaction product

Q Mannich product of polybutenyl (M_n 850) phenol, formaldehyde, and a polyethylene polyamine mixture containing about 3- nitrogen atoms per molecule and about 34.5% by weight nitrogen

R reaction product of polyisobutylene-substituted succinic acid with pentaerythritol

Each of the documents referred to above is incorporated herein by reference. Except in the Examples, or
 30 where otherwise explicitly indicated, all numerical quantities in this description specifying amounts of materials, reaction conditions, molecular weights, number of carbon atoms, and the like, are to be understood as modified by the word "about." Unless otherwise indicated, each chemical or composition referred to herein should be interpreted
 35 as being a commercial grade material which may contain the

isomers, by-products, derivatives, and other such materials which are normally understood to be present in the commercial grade. However, the amount of each chemical component is presented exclusive of any solvent or diluent oil which may be customarily present in the commercial material, unless otherwise indicated. As

- 5 used herein, the expression "consisting essentially of" permits the inclusion of substances which do not materially affect the basic and novel characteristics of the composition under consideration.

Where the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification, they are to be interpreted as specifying the presence
10 of the stated features, integers, steps or components referred to, but not to preclude the presence or addition of one or more other feature, integer, step, component or group thereof.



2677

The claims defining the invention are as follows:-

1. A composition comprising:

- (a) an oil of lubricating viscosity;
- (b) an antioxidant; and
- (c) an anti-nitration agent,

wherein the composition is substantially free from metals, and

wherein the amount of the antioxidant and the amount of the anti-nitration agent are sufficient to reduce the amount of varnish formation in a natural gas-fueled internal-combustion engine.

2. The composition of claim 1 wherein the antioxidant is at least one hindered phenol or at least one aromatic amine or a mixture thereof.

3. The composition of claim 1 wherein the antioxidant is present in an amount of 1.8% to 10% by weight.


4. The composition of claim 1 wherein the anti-nitration agent is a hydrocarbylamine phosphate salt.

5. The composition of claim 1 wherein the amount of the anti-nitration agent is 0.01% to 0.1% by weight.


6. The composition of claim 1 further comprising

(d) at least 0.1% by weight of a borated product of an epoxide or the reactive equivalent of an epoxide.

7. The composition of claim 6 wherein the epoxide or reactive equivalent thereof is an epoxide of the formula



or a diol of the formula



wherein each R is independently hydrogen or a hydrocarbyl group containing 8 to 30 carbon atoms, at least one of which is hydrocarbyl.



8. The composition of claim 6 or claim 7, wherein the amount of the borated product of an epoxide or the reactive equivalent of an epoxide is 0.2 to 4% by weight of the composition.
- 5 9. The composition of any one of the preceding claims further comprising a dispersant.
10. The composition of any one of the preceding claims, wherein the amount of sulfated ash of the composition is less than 0.01% and wherein the amount of phosphorus of the composition is less than 0.03%.
- 10 11. A process for lubricating an internal combustion engine, comprising supplying the composition of any one of the preceding claims to the engine and operating the engine.
12. A composition of claim 1, substantially as herein described with reference to any one of the Examples.
- 15 13. A process of claim 11 for lubricating an internal combustion which process is substantially as herein described with reference to any one of the Examples.

20

DATED this 4th day of February, 1998.

THE LUBRIZOL CORPORATION

By their Patent Attorneys:

CALLINAN LAWRIE

20

20



ABSTRACT OF THE DISCLOSURE

A composition of an oil of lubricating viscosity, an antioxidant, an anti-nitration agent, and optionally a borated product of an epoxide or the reactive equivalent of an epoxide, provides a desirable lubricant for diesel or natural gas-fueled engines. The composition is substantially free from metals and preferably substantially free from phosphorus. The amount of the antioxidant the anti-nitration agent are sufficient to reduce the amount of varnish formation in a natural gas engine.

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500