

(19)



(11)

EP 2 975 166 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.09.2019 Bulletin 2019/37

(51) Int Cl.:
D04C 7/00 (2006.01) D04D 1/02 (2006.01)

(21) Application number: **15275172.3**

(22) Date of filing: **13.07.2015**

(54) WRAPPING APPARATUS AND METHOD

UMWICKELVORRICHTUNG UND UMWICKELVERFAHREN

APPAREIL ET MÉTHODE D'ENROULEMENT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **14.07.2014 GB 201412502**
25.03.2015 GB 201505044

(43) Date of publication of application:
20.01.2016 Bulletin 2016/03

(73) Proprietor: **Fuse London Ltd.**
Askew Crescent
London
W12 9DP (GB)

(72) Inventors:
• **Morris, Oliver**
London, Greater London SW15 SDE (GB)
• **Laguatan, Roseld V**
Easton, PA 18044 (US)
• **Allen, James**
Easton, PA 18044 (US)

(74) Representative: **Corbyn, David Jonathan**
Bailey Walsh & Co LLP
1 York Place
Leeds, LS1 2DR (GB)

(56) References cited:
EP-A1- 1 388 304 JP-A- 2010 261 130
US-A- 3 667 203 US-A- 3 727 390
US-A1- 2004 074 220 US-A1- 2012 244 353

EP 2 975 166 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention to which this application relates is a threading apparatus.

[0002] Although the following description refers to a children's toy in the form of a thread-wrapping machine and a means for colouring threaded material, the person skilled in the art will appreciate that the present invention could also be used for other threading and/or winding purposes.

[0003] Children's toys enabling the user to thread and/or lace a plurality of articles together to form bracelets/anklets/ necklaces and/or the like have been known for some time. They can be provided in various forms, for example, some are provided with a single piece of thread, lace etc. on which charms and other decorative articles are threaded, creating a custom necklace, bracelet or anklet. Alternatively, a user may wish to create a customized bracelet, often termed a "friendship bracelet". This may involve intertwining a number of different threads about each other in order to create a more intricate design. Charms and other decorative articles may be added again in order to further customize the bracelet. Often, the children constructing jewellery items such as these will do so with their hands, and the process can be quite time consuming.

[0004] It is therefore an aim of the present invention to provide an apparatus for creating various threaded articles that overcomes the aforementioned problems.

[0005] It is a further aim of the present invention to provide a method of thread-wrapping to create a threaded article overcoming the problems associated with the prior art.

[0006] US patent publication US2004/074220 discloses a device for twisting decorative material from rolls comprising a shaft having two ends, an attachment means for affixing at least one roll of decorative material provided on one end of said shaft, and a crank provided on the other end of said shaft. Japanese document JP 2010261130 provides a plait braiding tool comprising a straight tubular winding rod having an engaging end for engaging a core string at one end, a roller member fit onto the winding rod at the side of the engaging end, and rotating together with the winding rod. A handle member is integrated to the winding rod at the side of the engaging end and rotatably supporting at least one of the winding rod and the roller member.

[0007] In other examples of the prior art, US2012/244353 discloses a wound textile article comprising an elongated winding portion having a first end and a second end, a first knot at the first end and a second knot at the second end, wherein the article can be supported by holding the first knot or the second knot so that the elongated winding portion is resistant to deflection under a weight of the article. Finally, EP1388304 discloses an apparatus for wrapping hair with a cord and includes a housing; a main spindle operatively coupled to the housing and defining a main spindle bore for receiving

cord and hair; a rotatable spool carrier and at least one spool. The spool carrier has a platform and a drive spindle operatively coupled to the main spindle so that rotation of the main spindle is translated into rotation of the platform. The drive spindle has guides for receiving cord and permitting the cord to be disposed through a bore extending through the drive spindle.

[0008] According to a first aspect of the invention there is provided an apparatus for forming at least one threaded member, said apparatus including: a rotatable member wherein said rotatable member is provided with an aperture located therein, wherein said aperture is located in a substantially central position on said rotatable member; two or more holding members protruding from said rotatable member; guide means having apertures associated with each of said two or more holding members; said two or more holding members having at least one spool and/or the like of a threaded material located thereon, said two or more holding members being offset from, and substantially parallel to, the axis of rotation of the rotatable member such that upon rotation of said rotatable member, said threaded material, which is fed through said apertures, is positioned to wrap around an article receivable through the aperture and connect to a first end of said article, in use; wherein the rotatable member is mounted for rotation in a housing, said housing including means to allow the powered or manual movement of the rotatable member, and characterised in that said apparatus is provided with a base portion (15), wherein said housing (7) is movable on said base portion relative to a support portion (17) located on said base portion (15).

[0009] Typically, said support portion is fixed relative to said base portion.

[0010] In one embodiment, said housing is provided integral with said base portion and movable thereon with respect to the support portion.

[0011] In one embodiment, said housing is detachably attached to a base portion.

[0012] Typically, said aperture is sized to receive said article.

[0013] In one embodiment, said article, located on said support portion, is received through said aperture upon movement of said housing along said base portion and towards said support portion.

[0014] In one embodiment, rotation of said rotatable member is actuated by activation means. Typically, said activation means are in the form of switch means.

[0015] In one embodiment, rotation of said rotatable member rotates said holding members about said article.

[0016] In one embodiment, three or more holding members are provided on said rotatable member.

[0017] In one embodiment, said article is provided as a tubular member, having first and second ends. Typically, a first end of said article is detachably attached to a support portion.

[0018] In one embodiment, said two or more holding members, each having at least one spool and/or the like of a threaded material located thereon are located radi-

ally outward of a centrally located aperture on said rotatable member. Typically, a first end of said threaded material is attached to a first end of said article. Further typically, a first end of threaded material of each spool and/or the like of threaded material on each holding member is attached to a first end of said article.

[0019] In one embodiment, said rotatable member rotates said two or more holding members and, hence said spools and/or the like of threaded material about said article, causing two or more strands of threaded material to simultaneously wrap about said article.

[0020] In one embodiment, rotation of said rotatable member continues until said article is wrapped in threaded material to an extent selected by the user.

[0021] In one embodiment, cover means are provided on said apparatus. Typically, said cover means acts as a protective guard against rotatable components of the apparatus. Further typically, said cover means includes an aperture located substantially opposite an aperture on said rotatable member. Yet further typically, said article is sized to be received through each of said apertures.

[0022] In one embodiment, wrapping of said threaded material about said article occurs within said cover means.

[0023] In one embodiment, said cover means is provided as a substantially transparent casing.

[0024] In one embodiment, two or more guide means are provided on said rotatable member, associated with said two or more holding members. Typically, said guide means are provided with an aperture located therein. Further typically, said threaded material associated with each of said two or more holding members is received through the aperture located on the associated guide means.

[0025] In one embodiment, said article is located on a support portion. Typically, said support portion is separate from said apparatus.

[0026] In one embodiment, said support portion includes a first face and a second, opposing face.

[0027] In one embodiment, there is located a plate member on said first face of said support portion. Typically said plate member is rotatable with respect to the support portion. Further typically, said plate member is detachably attachable to said two or more holding members. Yet further typically, rotation of said plate member is actuated by rotation of said rotatable member.

[0028] In one embodiment, said plate member includes an aperture located thereon. Typically, said aperture is located centrally of said plate member. Further typically, said aperture is sized to receive threaded material.

[0029] In one embodiment, said support portion includes an aperture located thereon. Typically, said aperture is located substantially in line with the aperture located on said plate member. Further typically, said aperture is sized to receive threaded material.

[0030] In one embodiment, said article is located on

said second face of said support portion. Typically, said article is detachably attached to said second face.

[0031] In one embodiment, said article is rotatable with respect to said support portion. Typically, rotation of said article is actuated by rotation of said rotatable member. Further typically, said article rotates at a slower angular velocity than that of said rotatable member.

[0032] In one embodiment, guide means are located on said second face of said support portion. Typically, said guide means are provided with an aperture located therein.

[0033] In one embodiment, a first end of two or more spools of threaded material, located on said two or more holding members, are fed, in series, through associated guide means, through apertures located on said plate member and said support portion, through guide means located on said second face of said support portion, and attached to a first end of said article.

[0034] In one embodiment, rotation of said rotatable member causes the threaded material of the two or more spools to intertwine. Typically, said threaded material is subsequently wrapped about said article. Further typically, said threaded material, wrapped about said article, comprises two or more individual strands of threaded material, creating a composite thread. Yet further typically, said composite thread is removable from said article.

[0035] In one embodiment, means for changing the colour of the thread may be included with said apparatus. Typically, said means is provided to alter the pigment of one or more strands of said threaded material. Further typically, said means is provided to dye said one or more strands of threaded material prior to wrapping said thread material about said article.

[0036] In another example, there is provided an apparatus for forming at least one threaded member about an article, said apparatus including: a rotatable member; two or more holding members protruding from said rotatable member; said two or more holding members each having at least one spool and/or the like of a threaded material located thereon, wherein upon rotation of said rotatable member, two or more strands of threaded material associated with the two or more holding members simultaneously wrap around said article.

[0037] In one embodiment, said article, having said two or more strands of threaded material wrapped therearound, forms at least a part of an item of jewellery, children's jewellery and/or the like.

[0038] In yet another example there is provided an apparatus for forming at least one threaded member, said apparatus including: a rotatable member; two or more holding members protruding from said rotatable member; said two or more holding members each having at least one spool and/or the like of a threaded material located thereon, wherein upon rotation of said rotatable member, two or more strands of threaded material associated with the two or more holding members simultaneously wrap about each other and subsequently around said article.

[0039] In one embodiment, said threaded member is

a composite of two or more strands of threaded material. Typically, said threaded member can be removed from said article to form an item of jewellery, children's jewellery and/or the like.

[0040] In one embodiment, two or more guide means are provided on said rotatable member, associated with said two or more holding members. Typically, said guide means are provided with an aperture located therein. Further typically, said threaded material associated with each of said two or more holding members is received through the aperture located on the associated guide means.

[0041] In a further aspect of the present invention there is provided a method of forming at least one threaded member, said method including the steps of: providing an apparatus including a rotatable member provided with an aperture located in a substantially central position on said rotatable member; two or more holding members protruding from said rotatable member, said two or more holding members offset from, and substantially parallel to, the axis of rotation of said rotatable member, said two or more holding members each having at least one spool and/or the like of a threaded material located thereon, guide means associated with each of said two or more holding members; feeding ends of two or more strands of threaded material associated with the two or more holding members through apertures located on said guide means and connecting the same to a first end of an article, said article being received through the aperture, causing rotation of said rotatable member, wherein upon rotation of said rotatable member, said strands of threaded material associated with the two or more holding members simultaneously wrap about said article wherein the rotatable member is mounted for rotation in a housing, said housing including means to allow the powered or manual movement of the rotatable member, and characterised in that said apparatus is provided with a base portion, and said housing is movable on said base portion relative to a support portion located on said base portion.

[0042] In yet a further example there is provided a method of forming at least one threaded member, said method including the steps of: providing an apparatus including a rotatable member; two or more holding members protruding from said rotatable member, said two or more holding members each having at least one spool and/or the like of a threaded material located thereon, guide means associated with each of said two or more holding members; feeding ends of two or more strands of threaded material associated with the two or more holding members through apertures located on said guide means and connecting the same to a first end of an article, said article located on a support portion attachable to said apparatus; attaching said support portion to said apparatus, and wherein upon rotation of said rotatable member, said strands of threaded material associated with the two or more holding members simultaneously wrap about each other and subsequently around

said article, forming a threaded member that is a composite of two or more strands of threaded material.

[0043] In another example there is provided an apparatus for colouring threaded material, said apparatus including: a drive member configured to rotate at least one spool; a primary thread guide comprising a passage configured to guide a threaded material as the threaded material is wound onto the at least one spool; the primary thread guide further comprising a receptacle adapted to receive a marking device, and wherein the receptacle is configured to dispose a colorant-delivering portion of the marking device against the threaded material.

[0044] In one embodiment, said at least one spool is in the form of at least one take-up spool.

[0045] In one embodiment, the primary thread guide is movably mounted on a primary guide support member. Typically, said primary thread guide is movable between a location nearer a first end of the take-up spool and a location nearer a second end of the take-up spool.

[0046] In one embodiment, the apparatus includes a pay-out support member, said pay-out support member rotatably supporting at least one pay-out spool.

[0047] In one embodiment, the apparatus further includes a pay-out thread guide, which guides the thread material toward the primary thread guide as the thread material is unwound from the pay-out spool.

[0048] In one embodiment, the apparatus further comprises a housing having a face. Typically, the drive member, the primary guide support member, the pay-out support member, and the pay-out thread guide protrude from the face of the housing. Further typically, the face is removable from the housing.

[0049] In one embodiment, cover means are affixed to the housing. Typically, the cover means at least partially encases the drive member, the primary guide support member, the primary thread guide, the pay-out support member and the pay-out thread guide. Further typically, the cover means is positioned as a protective guard against rotatable components of the apparatus. Yet further typically, said cover means is at least partially transparent.

[0050] In one embodiment, a portion of the cover means forms an aperture positioned such that the aperture accepts the marking device when the marking device is inserted into the receptacle of the primary thread guide. Typically, the aperture is sized to permit movement of the marking device with respect to the primary guide support member when the primary thread guide moves longitudinally with respect to the take-up spool.

[0051] In one embodiment, at least a portion of the primary thread guide extends beyond the cover means. Typically, said portion comprises a notch, catch and/or the like that engages an edge of the cover means.

[0052] In one embodiment, the receptacle adapted to receive a marking device forms at least part of a colouring assembly.

[0053] In one embodiment, the colouring assembly includes a colorant applicator holding portion. Typically,

said colorant applicator holding portion receives a colorant applicator. In one embodiment, the colouring assembly further includes a passage configured to receive a thread and to dispose the thread against the colorant applicator as the thread is wound onto the at least one take-up spool. Typically, the colouring assembly is positioned to direct thread drawn through the passage towards a portion of the at least one take-up spool.

[0054] In one embodiment, a support member is provided to movably support the colouring assembly, such that movement of the colouring assembly changes the portion of the take-up spool toward which the thread is directed.

[0055] In another example, there is provided an apparatus for colouring threaded material, said apparatus including: a pay-out support member configured to support a pay-out spool; a drive member configured to rotate a take-up spool; and a colouring assembly, said colouring assembly comprising a colorant applicator holding portion configured to receive a colorant applicator, and a passage configured to receive a thread and to dispose the thread against the colorant applicator as the thread is wound onto the take-up spool, wherein the colouring assembly is positioned to direct the thread drawn through the passage toward a portion of the take-up spool.

[0056] In another example, there is provided a method for colouring a thread material, said method including the steps of: positioning a take-up spool on a holding member that protrudes from a rotatable member that is mounted in a housing; positioning a pay-out spool comprising the thread material on a pay-out support member; feeding the thread material around a payout thread guide and through a passage in a primary thread guide, wherein the payout thread guide is configured to guide the thread material toward the primary thread guide as the thread material is unwound from the payout spool, and wherein the primary thread guide is positioned to direct the thread material toward a portion of the take-up spool as the thread material is unwound from the payout spool and wound onto the take-up spool, wherein the primary thread guide comprises a receptacle adapted to receive a marking device, and wherein the passage in the primary thread guide is configured to dispose the thread material against a colorant delivering portion of the marking device; attaching the thread material to the take-up spool; positioning the marking device in the receptacle; rotating the rotatable member, wherein the thread material is drawn through the passage in the primary thread guide and wound onto the take-up spool, wherein the thread material is coloured by the colorant delivering portion of the marking device as the thread material is drawn through the passage.

[0057] In one embodiment, the method further includes moving the primary thread guide along an axis of a primary guide support member that movably supports the primary thread guide, wherein the movement of the primary thread guide changes the portion of the take-up spool toward which the thread material is directed.

[0058] In one embodiment, the method further includes affixing a cover to the housing, the cover at least partially encasing the holding member, the primary guide support member, the primary thread guide, the pay-out support member, and the pay-out thread guide, and wherein the cover is positioned as a protective guard between a user and one or more moving components of the apparatus.

[0059] Embodiments of the present invention will now be described with reference to the accompanying figures, wherein:

Figure 1 illustrates an apparatus in accordance with an embodiment of the present invention.

Figure 2 illustrates an apparatus with spools of threaded material affixed thereto, in accordance with another embodiment of the present invention.

Figure 3 illustrates an apparatus with spools of threaded material and an article affixed thereto, in accordance with another embodiment of the present invention.

Figure 4 illustrates an apparatus having a cover means in accordance with an embodiment of the present invention.

Figure 5 illustrates an apparatus and support portion in accordance with an embodiment of the present invention.

Figure 6 illustrates an apparatus and support portion with threaded material fed therethrough, in accordance with an embodiment of the present invention.

Figure 7 illustrates a close-up view of an apparatus in accordance with an embodiment of the present invention.

Figure 8 illustrates a close-up view of a support portion of an apparatus in accordance with an embodiment of the present invention.

Figure 9 illustrates an apparatus and support portion connected and in use, in accordance with an embodiment of the present invention.

Figure 10 illustrates an exemplary apparatus for colouring a threaded material in accordance with an embodiment of the invention.

Figure 11 illustrates an enlarged portion of an exemplary apparatus for colouring a threaded material in accordance with an embodiment of the invention.

Figure 12 illustrates an enlarged cross sectional view of exemplary thread guide in accordance with an embodiment of the invention.

Figure 13 illustrates an exemplary apparatus for colouring a threaded material in accordance with an embodiment of the invention.

Figure 14 illustrates an exemplary apparatus for colouring a threaded material in accordance with an embodiment of the invention.

[0060] Referring firstly to Figures 1-3, there is provided an apparatus in the form of a thread-wrapping machine (1) provided to enable thread from a number of spools (3) to be simultaneously wrapped about an article (5). The thread-wrapping machine (1) includes a housing (7) in which there is located a rotating member in the form of a disc (9). In this embodiment the disc (9) has a number of holding members in the form of spool holding bars (11) protruding outwardly therefrom, on which the spools (3) may be placed. Although the present example illustrates three holding bars (11) on the disc (9), the skilled person will appreciate that this number may vary depending on the specifications of the thread wrapping machine. Rotation of the disc (9) is activated by switch (13) located on the housing (7) of the apparatus (1). The housing (7) of the apparatus (1) is located on a base (15) and is movable therealong relative to a supporting portion (17), located at an end (19) of the base (15), which is fixed in position on the base (15). A support bar (21) is provided on the supporting portion (17), protruding outwardly therefrom toward the housing (7). A central hole (23) is formed in the rotating disc (9) and extends through the housing (7) of the apparatus (1). The hole (23) is located substantially in line with the support bar (21).

[0061] A first end (25) of the article (5) about which thread is to be wrapped is attached to the support bar (21). The article (5) has a maximum radius sized to fit through the hole (23) in the housing (7) and once located on the support bar (21), a second end (27) of the article (5) extends through the hole (23), allowing the housing (7) to move back and forth along the base (15) with the article (5) sliding through the hole (23). With the spools (3) located on their respective holding bars (11), the ends of each strand of thread are taken and attached to the first end (25) of the article (5), with the housing (7) located in close proximity to the supporting portion (17) initially. Once the thread ends are attached to the article (5), the switch (13) is activated, causing the disc (9), and consequently the holding bars (11) and spools (3), to rotate about the article (5). During rotation, thread is unwound from the spools (3) forming a layer of multiple strands of thread simultaneously wrapped about the article (5). As the article (5) is wrapped with thread, the housing (7) is moved gradually away from the supporting portion (17) along the base, thereby exposing more of the article (5) to be wrapped. The spools (3) of thread may be provided in various colours, resulting in a varying range of colours and/or patterns of thread wrapped about the article (5). Once the article (5) has been wrapped / covered in thread to a sufficient degree or to a user's satisfaction, rotation

of the disc (9) is ceased via the switch (13), the housing (7) moved to a distal end (29) of the base away from the supporting portion (17), thereby allowing the article (5), now wrapped in multiple strands of thread, to be removed from the support bar (21).

[0062] The article (5) may subsequently be used as an item of novelty / children's jewellery, or as an accessory / attachment to an item of children's jewellery.

[0063] While the housing (7) of the thread-wrapping machine (1) is movable along the base portion (15) with respect to the supporting portion (17), it may also be detachably attached thereto, allowing a user to remove the housing (7) for maintenance, repair, or even use without the need for the base or supporting portions (15, 17).

[0064] Figure 4 illustrates an alternative embodiment of the thread-wrapping machine (401), which includes a protective cover (431) located thereon. The cover (431) encases the holding bars (411) and, hence, the spools (403) thereby preventing any fast-moving parts from becoming detached from the apparatus while moving and causing injury to a user. In order for an article to be wrapped when the apparatus (401) is presented in this form, the cover (431) includes a hole (433) located in its face opposite the central hole (423) of the housing (407). In this embodiment, a user holds the article (not shown) as it passes through the holes (433, 423) and is wrapped in thread. The cover (431) is also provided as a transparent body, enabling the user to view the progress of the thread-wrapping action.

[0065] Referring now to Figures 5-9, there is provided the housing (7) of the thread-wrapping machine (1) depicted in Figures 1-3. However, in this particular embodiment, the main body has been detached from the base portion (15). Guide means (535) are affixed to the rotating disc (9), each of which is associated with a corresponding holding bar (11), and located radially between each holding bar (11) and the central hole (23). Each guide means (535) has a guide hole (537) through which thread from each pool (3) is fed. Such a feature allows the individual thread strands to be combined and, upon rotation of the disc (9), intertwined, thereby creating a composite thread made from two, three or potentially more individual strands of thread.

[0066] An alternative supporting portion (517) is provided, which includes two faces. On the first face (539) there is located a plate (541), which is rotatable with respect to the supporting portion (517). The plate (541) can be attached to the holding bars (11) of the housing (7) or spools (3) located thereon. Such an attachment provides a connection between the supporting portion (517) and the housing (7) of the apparatus (1), such that upon rotation of the disc (9), the plate (541) is caused to rotate at the same angular velocity. The plate (541) includes a hole (543) located centrally thereon and in line with the hole (23) of the rotating disc (9) and a further hole (545) located on the supporting portion (517) extending through its first face to a second, opposing face (547). The holes (543, 545) are sized to allow strands of thread

to pass therethrough. An alternative article (505) is located on the second face (547) of the supporting portion (517). The article (505) may be detachably attached to the supporting portion and, while attached, is rotatable with respect to the sporting portion (517). Rotation of the article (505) is actuated by rotation of the disc (9) and, consequently, the plate (541). However, the article (505) is arranged to rotate at a slower angular velocity than that of the disc (9) and the plate (541). Additional guide means (549) is provided on the second face (547) of the supporting portion (517) having a guide hole (551) located therein. The guide means (549) allows thread, which has been fed through guide holes (537) and subsequently holes (543, 545) in the plate (541) and supporting portion (517), to be fed through its guide hole (551) and finally attached to a first end (525) of the article (505). As the switch (13) is activated and the disc (9) rotates, the strands of thread from each spool (3) begin to intertwine with one another and are slowly fed onto and wrap around the article (505), creating a composite thread formed from multiple individual strands of thread. In theory, if several lengths of composite thread are formed, these can be put through the same process as the spools (3) of individual thread, thereby creating a secondary composite thread, and so on. Once wrapping of the thread about the article (505) is complete, the composite thread may be removed and used as an item of children's jewellery, such as a necklace, bracelet, friendship bracelet, anklet and/or the like.

[0067] Additionally, dying apparatus such as a marker (not shown) may be affixed to the apparatus and arranged so as to colour and/or recolour one or more of the strands of thread as they unwind from their respective spools. This feature may be added to alter the colour of a particular thread prior to it being intertwined with other thread strands and/or being wrapped about the article. For example, a user may affix a spool of white thread and wish to colour it prior to wrapping. This can be achieved by the provision of an appropriately coloured marker located in position on the apparatus. Several locations for markers may be provided so a user can, if they choose, colour each spool of thread that is placed on the holding bars of the thread-wrapping machine.

[0068] Referring now to Figure 10, an exemplary apparatus for colouring a threaded material is depicted, and is generally referred to as apparatus 1000. Apparatus 1000 is but one example of a suitable apparatus, and is not intended to suggest any limitation as to the scope of use or functionality of embodiments of the invention. Neither should apparatus 1000 be interpreted as having any dependency or requirement relating to any single component or combination of components illustrated therein.

[0069] In one embodiment, apparatus 1000 includes a housing 1010 that includes or encloses a rotatable member (not shown), and which includes a drive (not shown) that rotates the rotatable member. The drive may be powered, such as by electricity, a windup mechanism, and so forth, or may be manually driven such as by a knob,

crank, or lever, among others. Apparatus 1000 also includes a holding member 1012 that protrudes from the rotatable member, which is configured to receive a take-up spool 1014. In an embodiment, holding member 1012 includes a longitudinal shaft having a cross section that matches a cross section of a hole in the centre of take-up spool 1014, such that the spool rotates with holding member 1012. In another embodiment, holding member 1012 utilizes a gripping portion (not shown) that removably engages an end of take-up spool 1014. Non-limiting examples of the gripping portion include a circular recess, prongs, jaws, magnetic couplings, and so forth.

[0070] Apparatus 1000 also includes a primary thread guide 1016 that includes a passage 1018 through which the threaded material (not shown) is drawn as the threaded material is wound onto take-up spool 1014, and which directs the threaded material toward take-up spool 1014, according to one embodiment of the invention. Primary thread guide 1016 also includes a receptacle 1020 that is configured to receive and hold a colorant applicator or marker, such as a felt-tipped marker. Passage 1018 is positioned such that the threaded material is held against the marking portion (e.g., the tip) of the inserted marker as the threaded material is drawn through passage 1018. In the exemplary embodiment of Figure 10, primary thread guide 1016 is mounted on a primary guide support member 1022. In an embodiment, primary guide support member 1022 includes a shaft 1038 on which primary thread guide 1016 is movably mounted, such that primary thread guide 1016 is slidable back and forth along the shaft 1038 of primary guide support member 1022. The movement of primary thread guide 1016 causes the threaded material to be directed to different portions along take-up spool 1014. For example, moving primary thread guide 1016 back and forth causes the threaded material to be wound more evenly on take-up spool 1014. Primary thread guide 1016 may also be affixed to a movable member of primary guide support member 1022, such that the movable member enables primary thread guide 1016 to be moved.

[0071] Apparatus 1000 also includes a pay-out support member 1024 configured to rotatably support a pay-out spool (not shown) that holds the threaded material to be coloured. In an embodiment, pay-out support member 1024 includes a fixed shaft on which the pay-out spool rotates freely. In another embodiment, the shaft of pay-out support member 1024 may be rotatable, such that the shaft and pay-out spool rotate together. In another embodiment, pay-out support member 1024 utilizes a rotatable gripping portion that removably engages an end of the pay-out spool. Examples of a gripping portion include, but are not limited to, a circular recess, prongs, jaws, magnetic couplings, and so forth. Apparatus 1000 also includes a pay-out thread guide 1026 configured to guide the threaded material toward primary thread guide 1016 as the threaded material is unwound from the pay-out spool.

[0072] Apparatus 1000 also includes a cover 1028 at-

tached to the housing, which at least partially encases or covers holding member 1012, primary guide support member 1022, primary thread guide 1016, pay-out support member 1024, and/or pay-out thread guide 1026. Cover 1028 is generally positioned between a user and the moving components of apparatus 1000 and serves as a protective shield. Cover 1028 may be at least partially transparent. A portion of cover 1028 forms an aperture 1030 positioned above primary thread guide 1016 such that a marker (not shown) may pass through aperture 1030 when inserted into receptacle 1020 of primary thread guide 1016. In an embodiment, the dimensions of aperture 1030 are such that the perimeter of aperture 1030 does not interfere with movement of the marker, which moves with primary thread guide 1016. In an embodiment, the dimensions of aperture 1030 are such that the perimeter of aperture 1030 limits movement of the marker and primary thread guide 1016 within a range that corresponds to the central winding portion of take-up spool 1014. This ensures that primary thread guide 1016 cannot be moved far enough in either direction to guide the threaded material off the end of take-up spool 1014. In an embodiment, movement of primary thread guide 1016 corresponds to manual movement of the marker by the user holding the marker, including moving the marker back and forth as the thread is wound onto take-up spool 1014. In an embodiment, the movement of primary thread guide 1016 is automatic. In another embodiment, a portion 1032 of primary thread guide 1016 extends beyond cover 1028 and may be used as a handle by the user to move primary thread guide 1016 with respect to primary guide support member 1022. As depicted in FIG. 10, portion 1032 of primary thread guide 1016 extends beneath a lower edge 1034 of cover 1028 and includes a notch 1036 that engages the lower edge 1034 of cover 1028.

[0073] Referring now to Figure 11, an enlarged portion of an embodiment of apparatus 1000 is depicted and is generally referred to as apparatus portion 1100. Apparatus portion 1100 is but one example of a suitable portion of apparatus 1000, and is not intended to suggest any limitation as to the scope of use or functionality of embodiments of the invention. Neither should apparatus portion 1100 be interpreted as having any dependency or requirement relating to any single component or combination of components illustrated therein.

[0074] Apparatus portion 1100 includes holding member 1012, take-up spool 1014, primary thread guide 1016, primary guide support member 1022, pay-out support member 1024, and pay-out thread guide 1026, which are described above with regard to Figure 10. Also depicted is a pay-out spool 1110 rotatably supported by pay-out support member 1024. Pay-out spool 1110 is wound with a thread 1120 to be coloured. Thread 1120 passes around pay-out thread guide 1026, passes through passage 1018 in primary thread guide 1016, and is wound onto take-up spool 1014, according to one embodiment.

[0075] As depicted, a marker 1130 is inserted into re-

ceptacle 1020 of primary thread guide 1016. As described above with regard to Figure 10, passage 1018 is positioned such that thread 1120 is held against the marking portion (e.g., the tip and/or nib) of marker 1130. In an embodiment, as take-up spool 1014 rotates in a clockwise direction with respect to a central axis of the holding member 1012, thread 1120 is unwound from pay-out spool 1110 in a clockwise direction with respect to a central axis of pay-out support member 1024, is drawn through passage 1018 in primary thread guide 1016, and is wound onto take-up spool 1014. Additionally, based on positioning of a marker 1130 within the receptacle 1020, thread 1120 is drawn through passage 1018 and colorant from the marking portion of marker 1130 is deposited onto the thread. For example, a saturated nib of the marker 1130 may contact and/or engage at least a portion of the thread 1120 passing through passage 1018, to provide a coloured thread 1122.

[0076] In an embodiment, apparatus portion 1100 does not include housing 1010 described above with regard to Figure 10. Instead, the components of apparatus portion 1100 may be coupled to at least a portion of housing 7 that is usable with an embodiment of the thread wrapping machine as illustrated in Figures. 1-9 and discussed in detail in the Applicant's co-pending British patent application no. 1412502.5. In an embodiment, disc 9 and the attached fixtures are removable from housing 7, and apparatus portion 1100 is configured to be removably affixed to housing 7 in place of disc 9. The rotatable member (described above with regard to Figure 10) and/or holding member 1012 may then be rotated directly or indirectly by a drive within housing 7. In an embodiment, a portion of housing 7 adjacent to disc 9 is removable, such that the portion of housing 7 and disc 9 are removed together, and the partial housing affixed to apparatus portion 1100 is configured to removably attach to housing 7 in place of the removed portion of housing 7.

[0077] Referring now to Figure 12, a cross-sectional view of an embodiment of primary thread guide 1016 is depicted, and is generally referred to as cross-sectional view 1200. Primary thread guide 1016 is but one example of a suitable primary thread guide, and is not intended to suggest any limitation as to the scope of use or functionality of embodiments of the invention. Neither should primary thread guide 1016 be interpreted as having any dependency or requirement relating to any single component or combination of components illustrated therein.

[0078] As described above with regard to Figure 10, in an embodiment primary thread guide 1016 is mounted on a primary guide support member 1022 which includes a shaft 1038 on which primary thread guide 1016 is movably mounted, such that primary thread guide 1016 is slidable back and forth along a longitudinal axis of the shaft 1038 of primary guide support member 1022. In an embodiment, the shaft 1038 of primary guide support member 1022 has a cross-sectional shape that matches a cross-sectional shape of an opening 1124 in primary thread guide 1016, such that primary thread guide 1016

is maintained in an upright position, or in a non-rotating position, as primary thread guide 1016 slides along an axis of primary guide support member 1022. In an embodiment, the cross section of primary guide support member 1022 approximates a "plus sign" as depicted in Figure 12. As such, the external surface of the primary support guide 1022 may correspond to an internal surface of the opening 1124 in the primary thread guide 1016, which restricts rotation of the primary thread guide 1016 and maintains alignment between the thread 1120 and the receptacle 1020. The cross-section of primary guide support member 1022 may also have other shapes corresponding to an internal surface of the opening 1124.

[0079] Cross-sectional view 1200 also depicts marker 1130 that is inserted into receptacle 1020, contacting at least a portion of thread 1120 to provide coloured thread 1122. As depicted, thread 1024 passes through passage 1018 and is disposed against a marking portion 1210 of marker 1130. Marker 1130 and/or marking portion 1210 may be any portion of a marking device configured to deliver a colouring solution and/or apply a colour to the thread 1120, such as a broad line Crayola® marker from Easton, PA. In one aspect, a colouring solution within a marker reservoir is directed onto the thread 1120 based on contacting the marker nib 1210. Examples of a colouring solution include a fabric marker solution, a permanent marker solution, ink, dye, and so forth. As thread 1024 is drawn through passage 1018 it is coloured by marking portion 1210 to provide coloured thread 1122.

[0080] Referring now to Figure 13, an exemplary embodiment of apparatus 1000 is depicted with pay-out spool 1110, thread 1120, and marker 1130. The depicted embodiment is but one example of a suitable apparatus, and is not intended to suggest any limitation as to the scope of use or functionality of embodiments of the invention. Neither should the depicted embodiment be interpreted as having any dependency or requirement relating to any single component or combination of components illustrated therein.

[0081] As depicted, primary thread guide 1016 is located near the distal end of primary guide support member 1022. As take-up spool 1014 rotates, thread 1120 is unwound from pay-out spool 1110, passes around pay-out thread guide 1026, and is drawn through passage 1018 in primary thread guide 1016, where it is coloured by marker 1130. The resultant coloured thread 1122 is wound onto the distal end of take-up spool 1014, corresponding to the position of primary thread guide 1016 along the central axis of the primary guide support member 1022.

[0082] Referring now to Figure 14, an embodiment of apparatus 1000 is depicted with pay-out spool 1110, thread 1120, and marker 1130. As described above, thread 1120 is coloured by marker 1130 as it is drawn through passage 1018 in primary thread guide 1016. Figure 14 depicts primary thread guide 1016 as moved to the proximal end of primary guide support member 1022 during the winding of coloured thread 1122 onto take-up

spool 1014. Accordingly, the movement of primary thread guide 1016 causes coloured thread 1122 to be wound evenly along take-up spool 1014. In an embodiment, primary thread guide 1016 is moved manually, while take-up spool 1014 is mechanically or automatically rotated during colouring.

Claims

1. Apparatus (1) for forming at least one thread-wrapped member, said apparatus including:

a rotatable member (9), wherein said rotatable member is provided with an aperture (23) located therein, wherein said aperture is located in a substantially central position on said rotatable member (9);

two or more holding members (11) protruding from said rotatable member;

guide means (535), having apertures (537), associated with each of said two or more holding members (11);

said two or more holding members (11) having at least one spool (3) and/or the like of a threaded material located thereon;

said two or more holding members (11) being offset from, and substantially parallel to, the axis of rotation of the rotatable member (9) such that upon rotation of said rotatable member, said threaded material, which is fed through said apertures (537), is positioned to wrap around an article (5) receivable through the aperture (23) and connect to a first end of said article (5), in use;

wherein the rotatable member (9) is mounted for rotation in a housing (7), said housing including means to allow the powered or manual movement of the rotatable member (9), and **characterised in that** said apparatus is provided with a base portion (15), wherein said housing (7) is movable on said base portion relative to a support portion (17) located on said base portion (15).

2. Apparatus according to claim 1, wherein said support portion (17) includes a support bar (21), protruding outwardly therefrom toward the housing, adapted to receive said article (5) thereon, in use.

3. Apparatus according to claim 1, wherein said rotatable member (9) is arranged to rotate said two or more holding members (11) about said article (5), in use.

4. Apparatus according to claim 1, wherein said two or more holding members (11), each having at least one spool (3) and/or the like of a threaded material

located thereon are located radially outward of the centrally located aperture (23) on said rotatable member (9).

5. Method of forming at least one thread-wrapped member, said method including the steps of:

providing an apparatus (1) including a rotatable member (9) provided with an aperture (23) located in a substantially central position on said rotatable member, two or more holding members (11) protruding from said rotatable member, said two or more holding members offset from, and substantially parallel to, the axis of rotation of said rotatable member (9), said two or more holding members each having at least one spool (3) and/or the like of a threaded material located thereon, and guide means (535) associated with each of said two or more holding members (11);

feeding ends of two or more strands of threaded material associated with the two or more holding members (11) through apertures (537) located on said guide means (535) and connecting the same to a first end of an article (5), said article (5) being received through the aperture (23);

causing rotation of said rotatable member (9), wherein upon rotation of said rotatable member, said strands of threaded material associated with the two or more holding members simultaneously wrap about said article (5),

wherein the rotatable member (9) is mounted for rotation in a housing (7), said housing including means to allow the powered or manual movement of the rotatable member (9), and **characterised in that** said apparatus is provided with a base portion (15), and said housing (7) is movable on said base portion relative to a support portion (17) located on said base portion (15).

6. Method according to claim 5, wherein a cover (431) is affixed to said apparatus housing (7), wherein said cover is positioned as a protective guard against rotating components of said apparatus (1).
7. Method according to claim 6, wherein said cover (431) includes an aperture (433) opposite the central aperture (23) on said rotatable member (9).
8. Method according to claim 6, further comprising a user holding said article (5) as it passes through said aperture (433) in said cover (431) and through said central aperture (23) on said rotatable member (9), wherein said strands of threaded material wrap about said article as it passes through said apertures.

9. Method according to claim 6, wherein said cover (431) is at least partially transparent.

Patentansprüche

1. Vorrichtung (1) zum Bilden mindestens eines garn-umwickelten Elements, wobei die Vorrichtung Folgendes umfasst:

ein drehbares Element (9), wobei das drehbare Element mit einem darin befindlichen Loch (23) versehen ist, wobei sich das Loch in einer im Wesentlichen mittigen Lage in dem drehbaren Element (9) befindet;

zwei oder mehr Halteelemente (11), die von dem drehbaren Element vorstehen;

Führungsmittel (535) mit Löchern (537), die mit jedem der zwei oder mehr Halteelemente (11) assoziiert sind;

wobei die zwei oder mehr Halteelemente (11) mindestens eine darauf befindliche Spule (3) und/oder dergleichen eines Garnmaterials aufweisen;

wobei die zwei oder mehr Halteelemente (11) gegenüber der Drehachse des drehbaren Elements (9) versetzt und im Wesentlichen parallel dazu sind, sodass bei Drehung des drehbaren Elements das Garnmaterial, das durch die Löcher (537) zugeführt wird, dazu positioniert ist, sich im Einsatz um einen durch das Loch (23) aufnehmbaren Artikel (5) zu wickeln und mit einem ersten Ende des Artikels (5) verbunden zu werden;

wobei das drehbare Element (9) zu Drehung in einem Gehäuse (7) montiert ist, wobei das Gehäuse Mittel umfasst, um die motorisch angetriebene oder manuelle Bewegung des drehbaren Elements (9) zu ermöglichen, und

dadurch gekennzeichnet, dass die Vorrichtung mit einem Basisabschnitt (15) versehen ist, wobei das Gehäuse (7) auf dem Basisabschnitt relativ zu einem auf dem Basisabschnitt (15) befindlichen Stützabschnitt (15) bewegbar ist.

2. Vorrichtung nach Anspruch 1, wobei der Stützabschnitt (17) eine Stützstange (21) umfasst, die davon nach außen in Richtung des Gehäuses vorsteht und dazu angepasst ist, im Einsatz den Artikel (5) darauf aufzunehmen.

3. Vorrichtung nach Anspruch 1, wobei das drehbare Element (9) dazu angeordnet ist, im Einsatz die zwei oder mehr Halteelemente (11) um den Artikel (5) zu drehen.

4. Vorrichtung nach Anspruch 1, wobei die zwei oder mehr Halteelemente (11), die jeweils mindestens ei-

ne darauf befindliche Spule (3) und/oder dergleichen eines Garnmaterials aufweisen, sich radial außerhalb des mittig befindlichen Lochs (23) in dem drehbaren Element (9) befinden.

5. Verfahren zum Bilden mindestens eines garnumwickelten Elements, wobei das Verfahren folgende Schritte umfasst:

Bereitstellen einer Vorrichtung (1), umfassend ein drehbares Element (9), das mit einem in einer im Wesentlichen mittigen Lage in dem drehbaren Element befindlichen Loch (23) versehen ist, zwei oder mehr Halteelemente (11), die von dem drehbaren Element vorstehen, wobei die zwei oder mehr Halteelemente gegenüber der Drehachse des drehbaren Elements (9) versetzt und im Wesentlichen parallel dazu sind, wobei die zwei oder mehr Halteelemente jeweils mindestens eine darauf befindliche Spule (3) und/oder dergleichen eines Garnmaterials aufweisen, und Führungsmittel (535), die mit jedem der zwei oder mehr Halteelemente (11) assoziiert sind;

Zuführen von Enden von zwei oder mehr mit den zwei oder mehr Halteelementen (11) assoziierten Fäden aus Garnmaterial durch in den Führungsmitteln (535) befindliche Löcher (537) und Verbinden derselben mit einem ersten Ende eines Artikels (5), wobei der Artikel (5) durch das Loch (23) aufgenommen wird;

Bewirken der Drehung des drehbaren Elements (9), wobei sich bei Drehung des drehbaren Elements die mit den zwei oder mehr Halteelementen assoziierten Fäden aus Garnmaterial gleichzeitig um den Artikel (5) wickeln, wobei das drehbare Element (9) zur Drehung in einem Gehäuse (7) montiert ist, wobei das Gehäuse Mittel umfasst, um die motorisch angetriebene oder manuelle Bewegung des drehbaren Elements (9) zu ermöglichen, und **dadurch gekennzeichnet, dass** die Vorrichtung mit einem Basisabschnitt (15) versehen ist und das Gehäuse (7) auf dem Basisabschnitt relativ zu einem auf dem Basisabschnitt (15) befindlichen Stützabschnitt (17) bewegbar ist.

6. Verfahren nach Anspruch 5, wobei eine Abdeckung (431) an dem Vorrichtungsgehäuse (7) angebracht ist, wobei die Abdeckung als Schutzabsperrung gegen drehende Bestandteile der Vorrichtung (1) positioniert ist.
7. Verfahren nach Anspruch 6, wobei die Abdeckung (431) ein Loch (433) gegenüber des mittigen Lochs (23) in dem drehbaren Element (9) umfasst.
8. Verfahren nach Anspruch 6, weiter umfassend, dass

ein Benutzer den Artikel (5) hält, während er durch das Loch (433) in der Abdeckung (431) und durch das mittige Loch (23) in dem drehbaren Element (9) gelangt, wobei sich die Fäden aus Garnmaterial um den Artikel wickeln, während er durch die Löcher gelangt.

9. Verfahren nach Anspruch 6, wobei die Abdeckung (431) mindestens teilweise durchsichtig ist.

Revendications

1. Appareil (1) pour former au moins un élément entouré de fil, ledit appareil incluant :

un élément rotatif (9), ledit élément rotatif étant pourvu d'une ouverture (23) localisée dans celui-ci, ladite ouverture étant localisée dans une position substantiellement centrale sur ledit élément rotatif (9) ;

deux ou plusieurs éléments de retenue (11) faisant saillie à partir dudit élément rotatif ;

des moyens de guidage (535), ayant des ouvertures (537), associés à chacun desdits deux ou plusieurs éléments de retenue (11) ;

lesdits deux ou plusieurs éléments de retenue (11) ayant au moins une bobine (3) et/ou similaire d'une matière à fils localisée sur celle-ci ;

lesdits deux ou plusieurs éléments de retenue (11) étant décalés par rapport à, et substantiellement parallèles à l'axe de rotation de l'élément rotatif (9) de telle sorte que lors de la rotation dudit élément rotatif, ladite matière à fils, qui est alimentée à travers lesdites ouvertures (537), soit positionnée de façon à s'enrouler autour d'un article (5) apte à être reçu à travers l'ouverture (23) et se raccorder à une première extrémité dudit article (5), en utilisation ;

dans lequel l'élément rotatif (9) est monté en vue d'une rotation dans un logement (7), ledit logement incluant des moyens pour permettre le mouvement motorisé ou manuel de l'élément rotatif (9), et

caractérisé en ce que ledit appareil est pourvu d'une partie base (15), ledit logement (7) étant mobile sur ladite partie base relativement à une partie support (17) localisée sur ladite partie base (15).

2. Appareil selon la revendication 1, dans lequel ladite partie support (17) inclut une barre de support (21) faisant saillie vers l'extérieur à partir de celle-ci vers le logement, conçue pour recevoir ledit article (5) sur celle-ci, en utilisation.
3. Appareil selon la revendication 1, dans lequel ledit élément rotatif (9) est agencé de façon à faire tourner

lesdits deux ou plusieurs éléments de retenue (11) autour dudit article (5), en utilisation.

4. Appareil selon la revendication 1, dans lequel lesdits deux ou plusieurs éléments de retenue (11), chacun ayant au moins une bobine (3) et/ou similaire d'une matière à fils localisée sur celle-ci, sont localisés radialement vers l'extérieur de l'ouverture localisée centralement (23) sur ledit élément rotatif (9).

5. Procédé de formage d'au moins un élément entouré de fil, ledit procédé incluant les étapes consistant à :

mettre à disposition un appareil (1) incluant un élément rotatif (9) pourvu d'une ouverture (23) localisée dans une position substantiellement centrale sur ledit élément rotatif, deux ou plusieurs éléments de retenue (11) faisant saillie à partir dudit élément rotatif, lesdits deux ou plusieurs éléments de retenue étant décalés par rapport à, et substantiellement parallèles à l'axe de rotation dudit élément rotatif (9), lesdits deux ou plusieurs éléments de retenue ayant chacun au moins une bobine (3) et/ou similaire d'une matière à fils localisée sur celle-ci, et des moyens de guidage (535) associés à chacun desdits deux ou plusieurs éléments de retenue (11) ;

alimenter des extrémités de deux ou plusieurs brins de matière à fils associés aux deux ou plusieurs éléments de retenue (11) à travers des ouvertures (537) localisées sur lesdits moyens de guidage (535) et raccorder celles-ci à une première extrémité d'un article (5), ledit article (5) étant reçu à travers l'ouverture (23) ;

provoquer la rotation dudit élément rotatif (9), où lors de la rotation dudit élément rotatif (9), lesdits brins de matière à fils associés aux deux ou plusieurs éléments de retenue s'enroulent simultanément autour dudit article (5),

dans lequel l'élément rotatif (9) est monté en vue d'une rotation dans un logement (7), ledit logement incluant des moyens pour permettre le mouvement motorisé ou manuel de l'élément rotatif (9), et

caractérisé en ce que ledit appareil est pourvu d'une partie base (15), et ledit logement (7) étant mobile sur ladite partie base relativement à une partie support (17) localisée sur ladite partie base (15).


6. Procédé selon la revendication 5, dans lequel un capot (431) est fixé sur ledit logement d'appareil (7), ledit capot étant positionné en tant que garant de protection contre des composants en rotation dudit appareil (1).

7. Procédé selon la revendication 6, dans lequel ledit

capot (431) inclut une ouverture (433) en face de l'ouverture centrale (23) sur ledit élément rotatif (9).

8. Procédé selon la revendication 6, comprenant en outre un utilisateur qui maintient ledit article (5) à mesure qu'il passe à travers ladite ouverture (433) dans ledit capot (431) et à travers ladite ouverture centrale (23) sur ledit élément rotatif (9), dans lequel lesdits brins de matière à fils s'enroulent autour dudit article à mesure qu'il passe à travers lesdites ouvertures.

9. Procédé selon la revendication 6, dans lequel ledit capot (431) est au moins partiellement transparent.

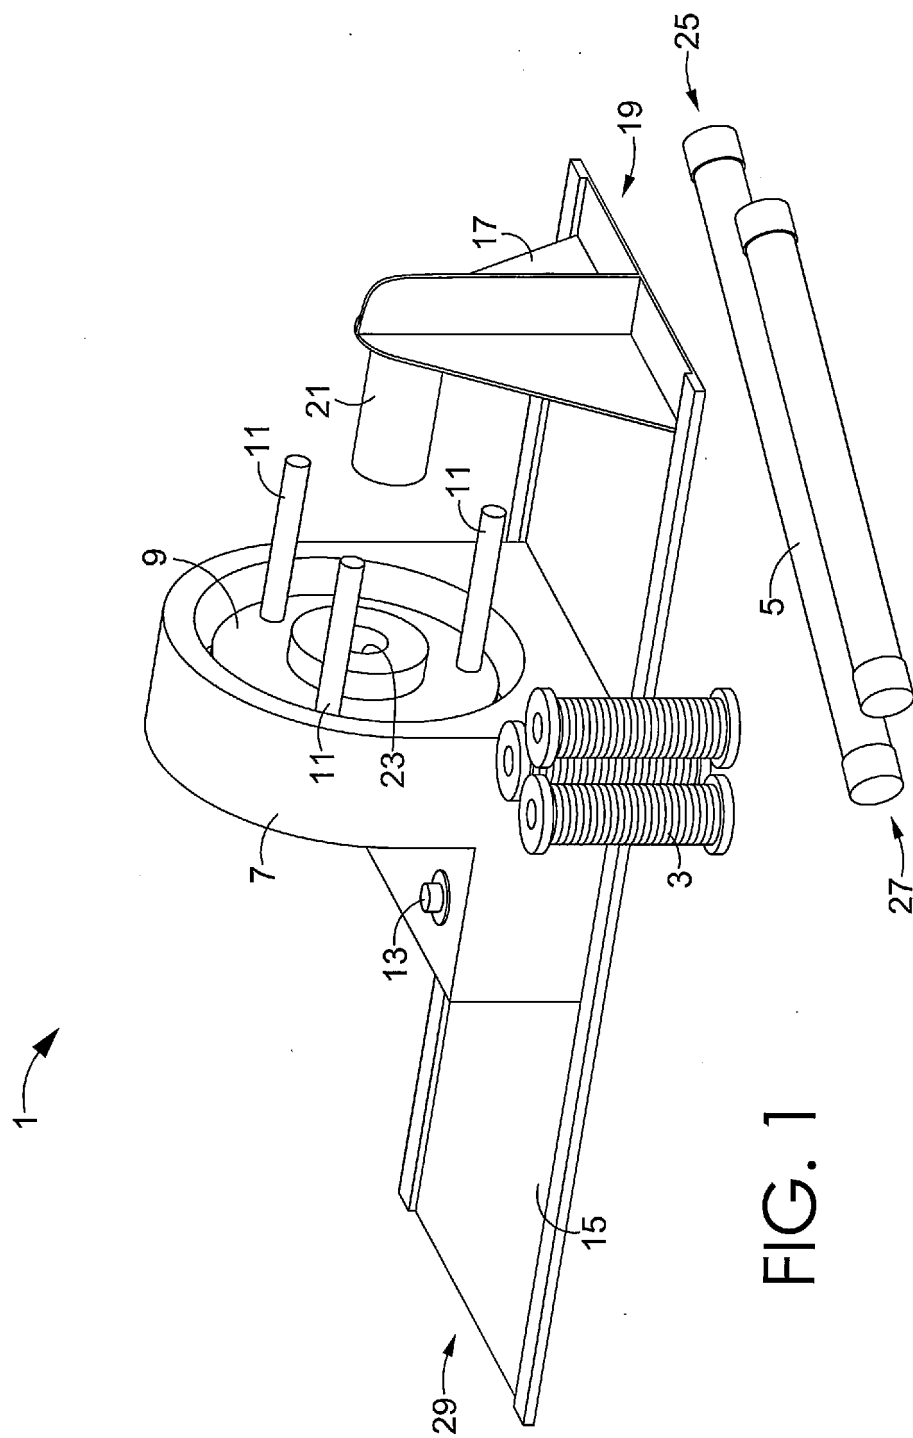

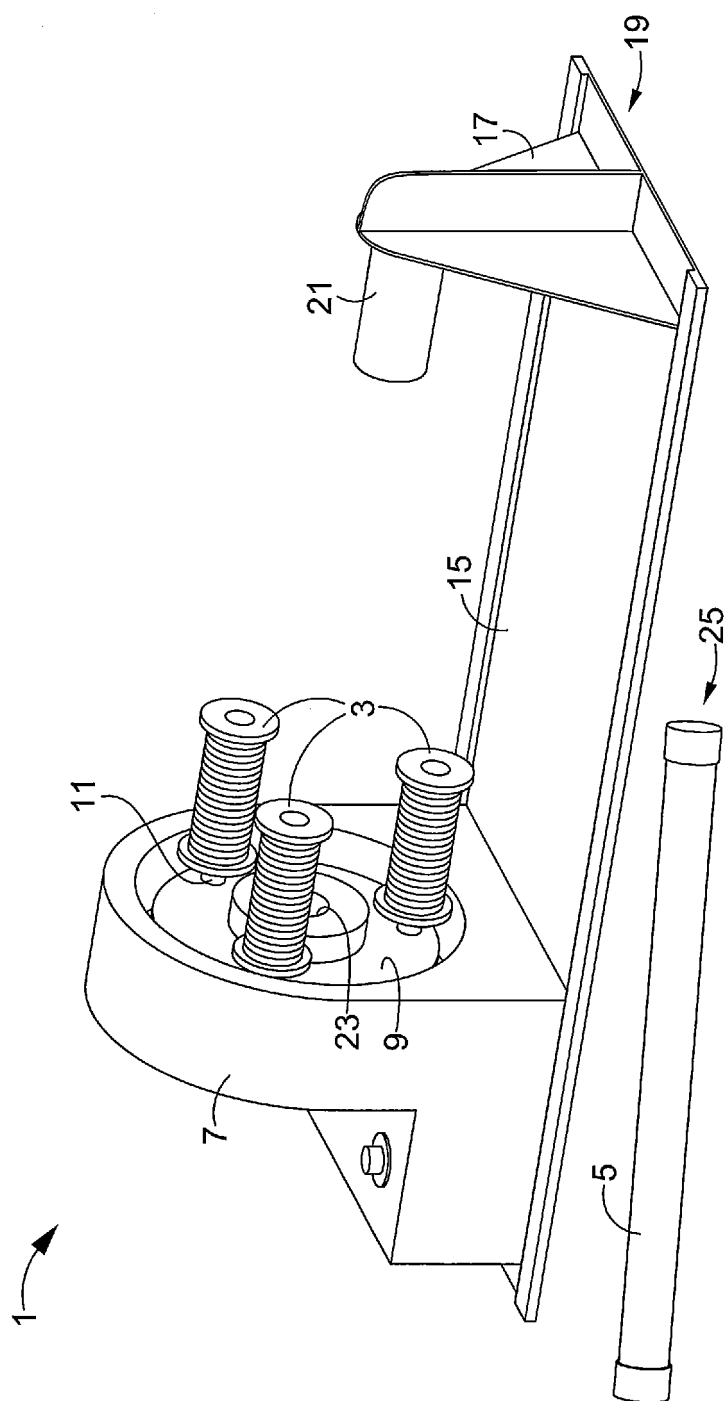


FIG. 2

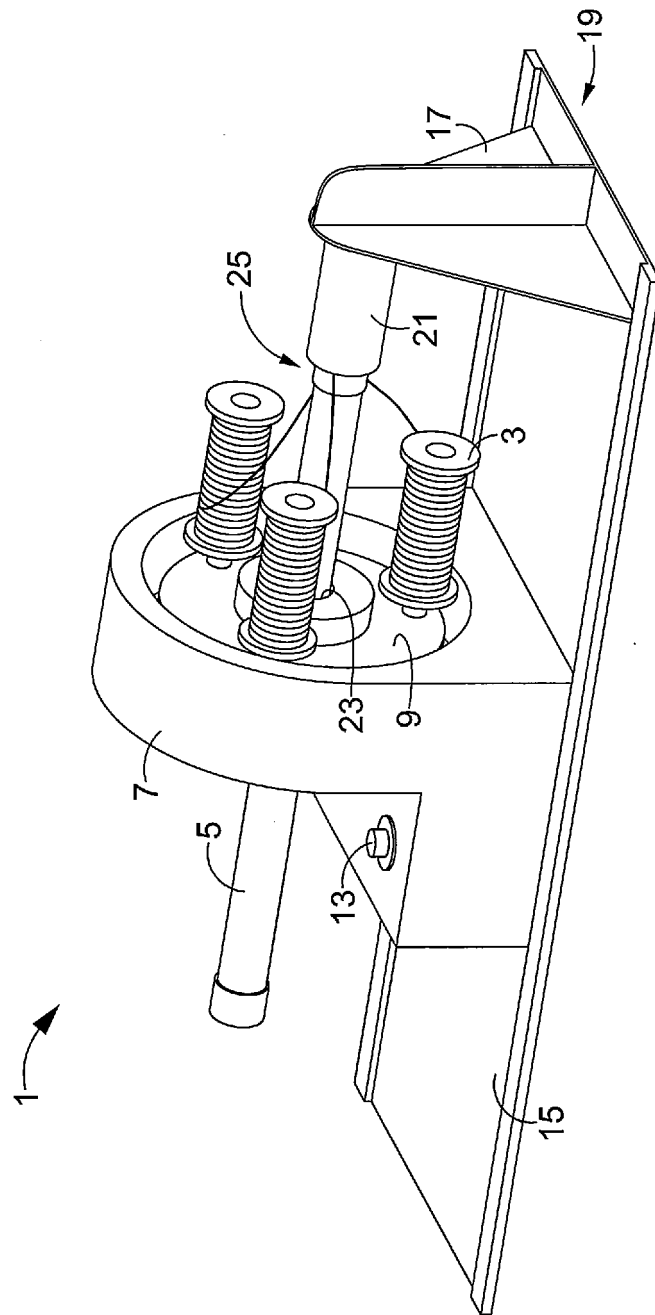


FIG. 3

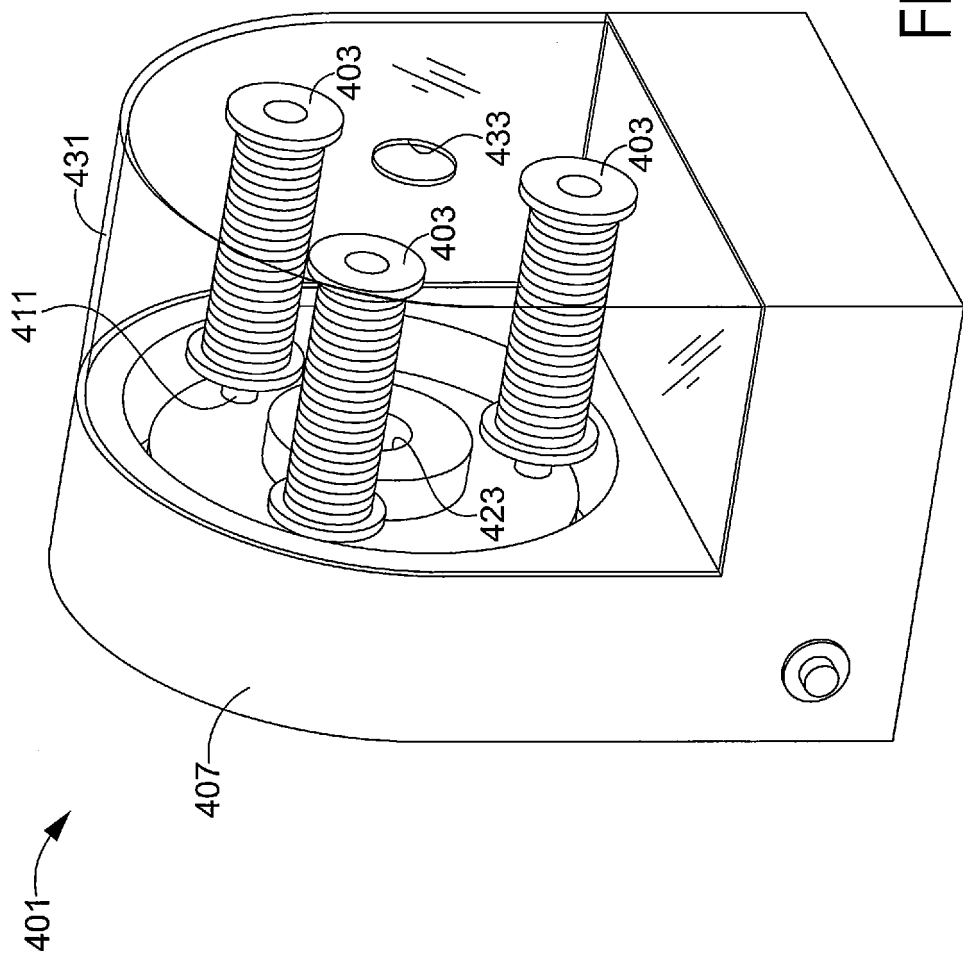


FIG. 4

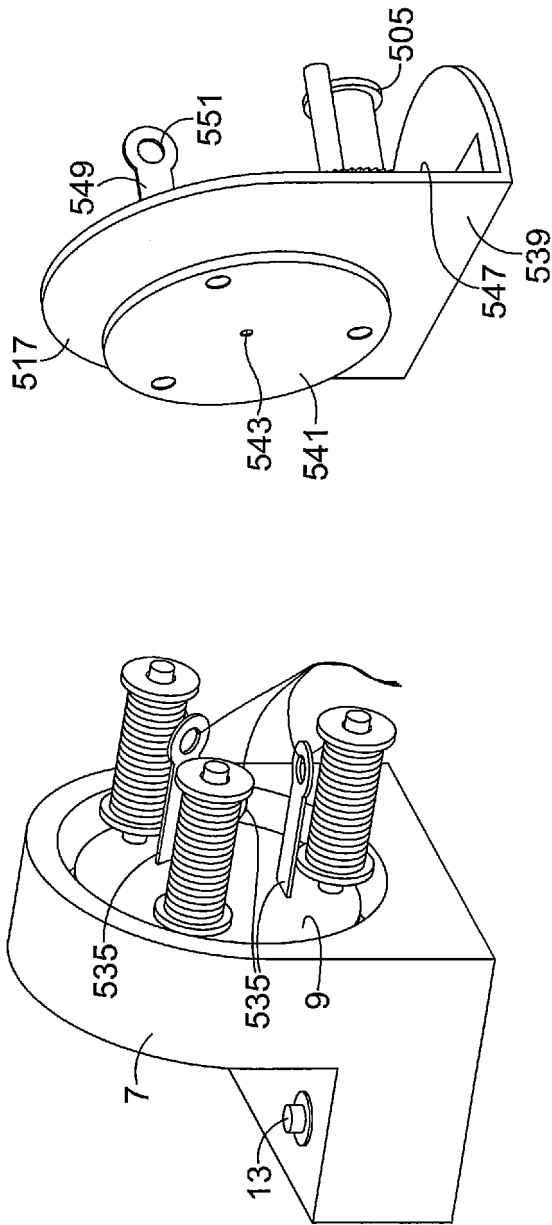


FIG. 5

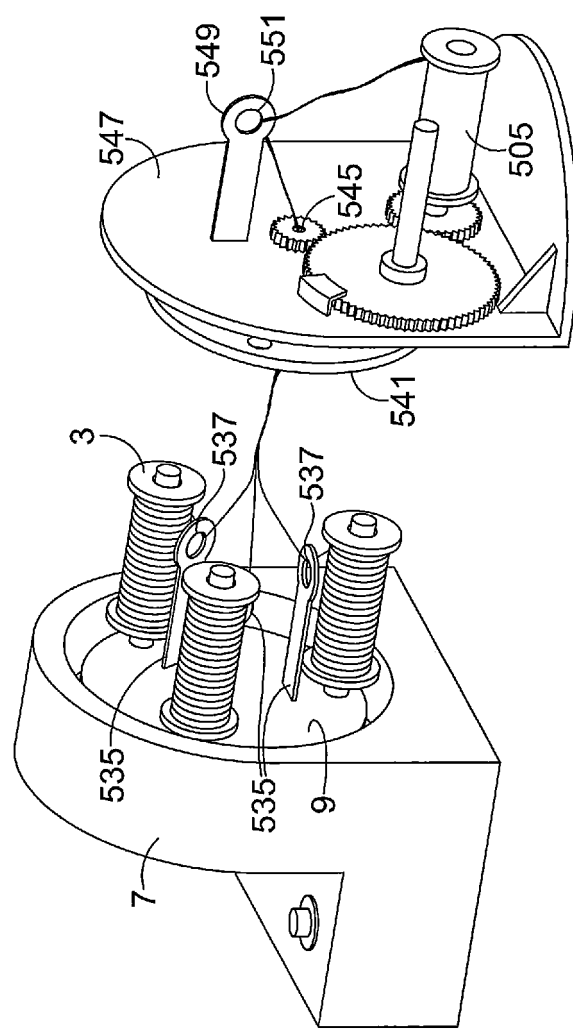


FIG. 6

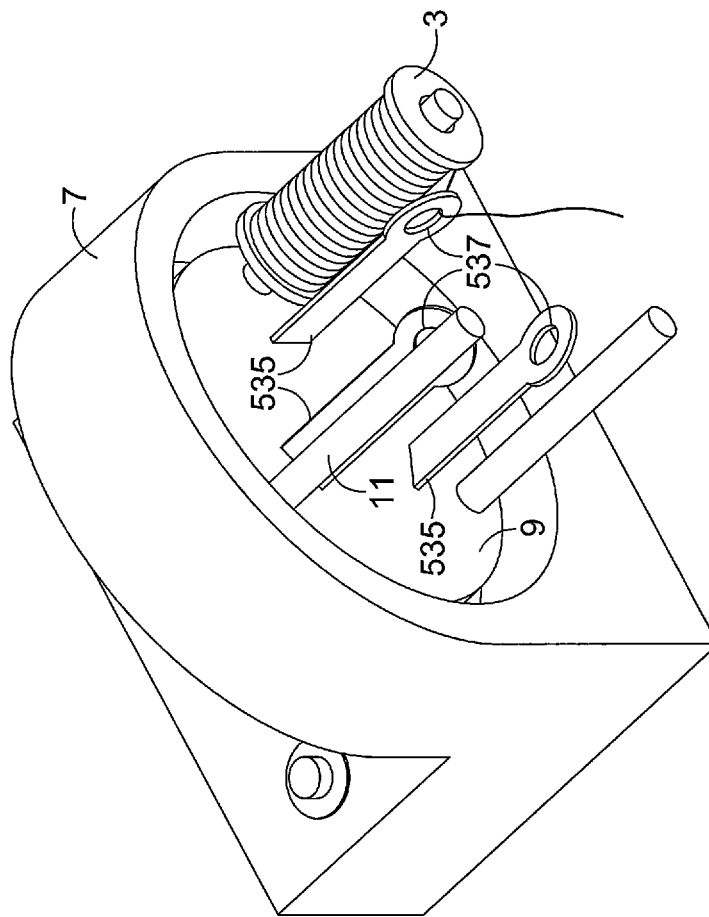


FIG. 7

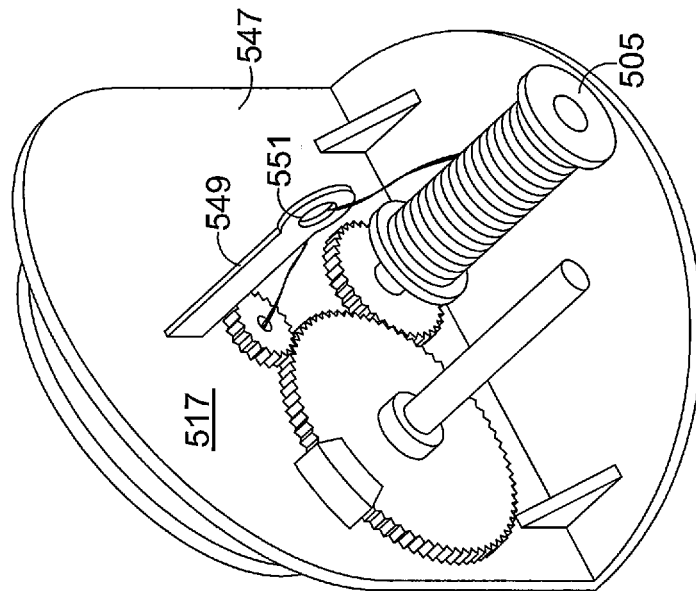


FIG. 8

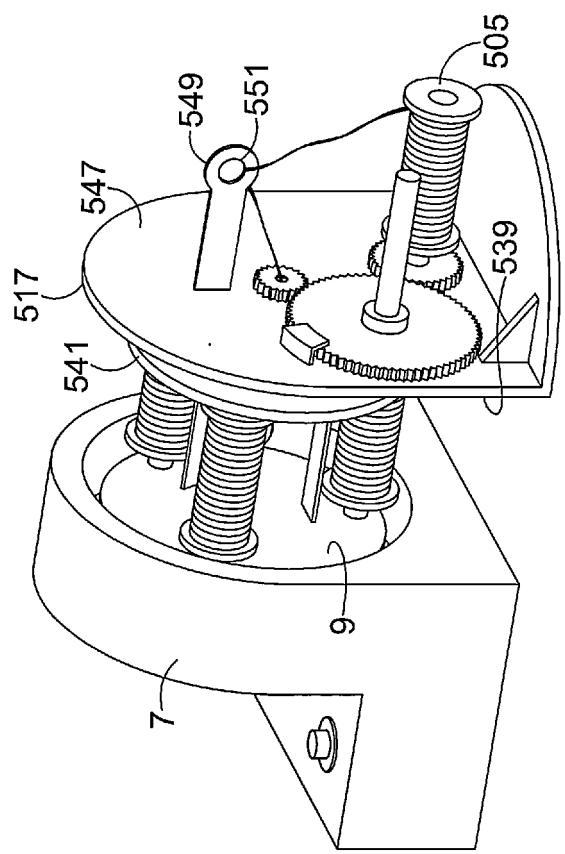


FIG. 9

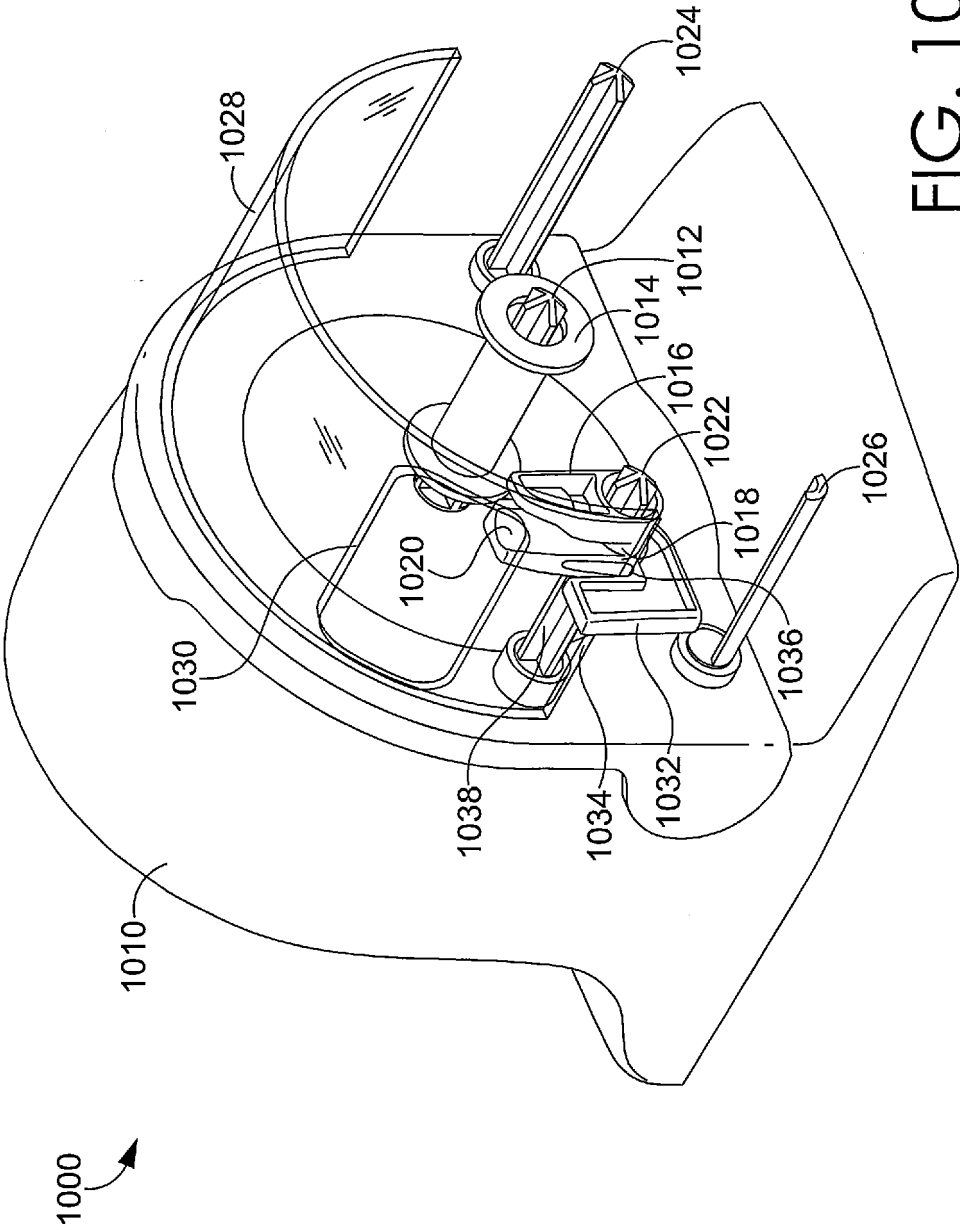


FIG. 10

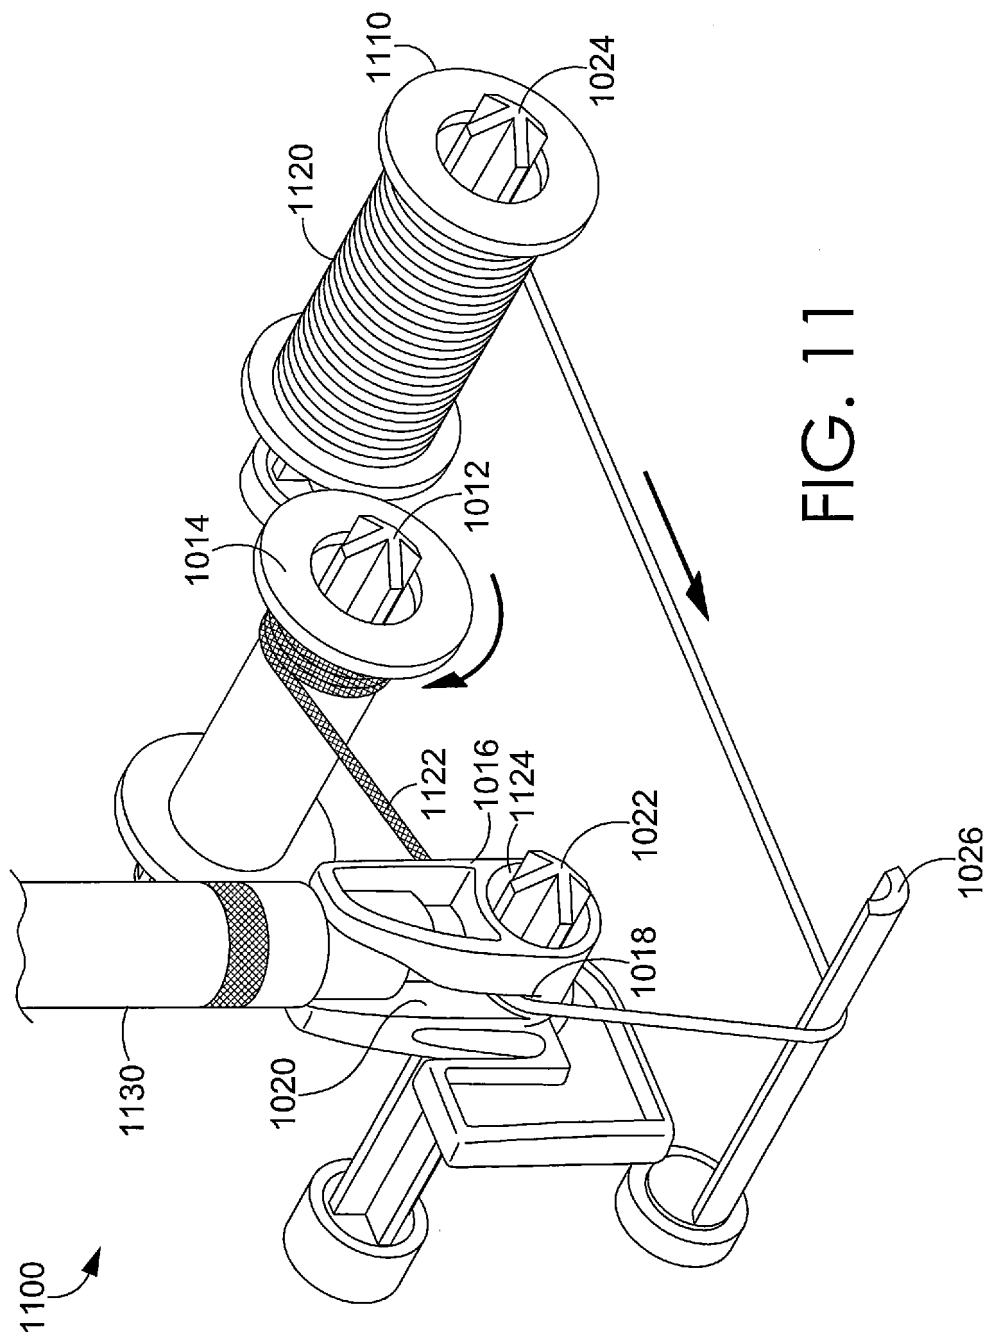


FIG. 11

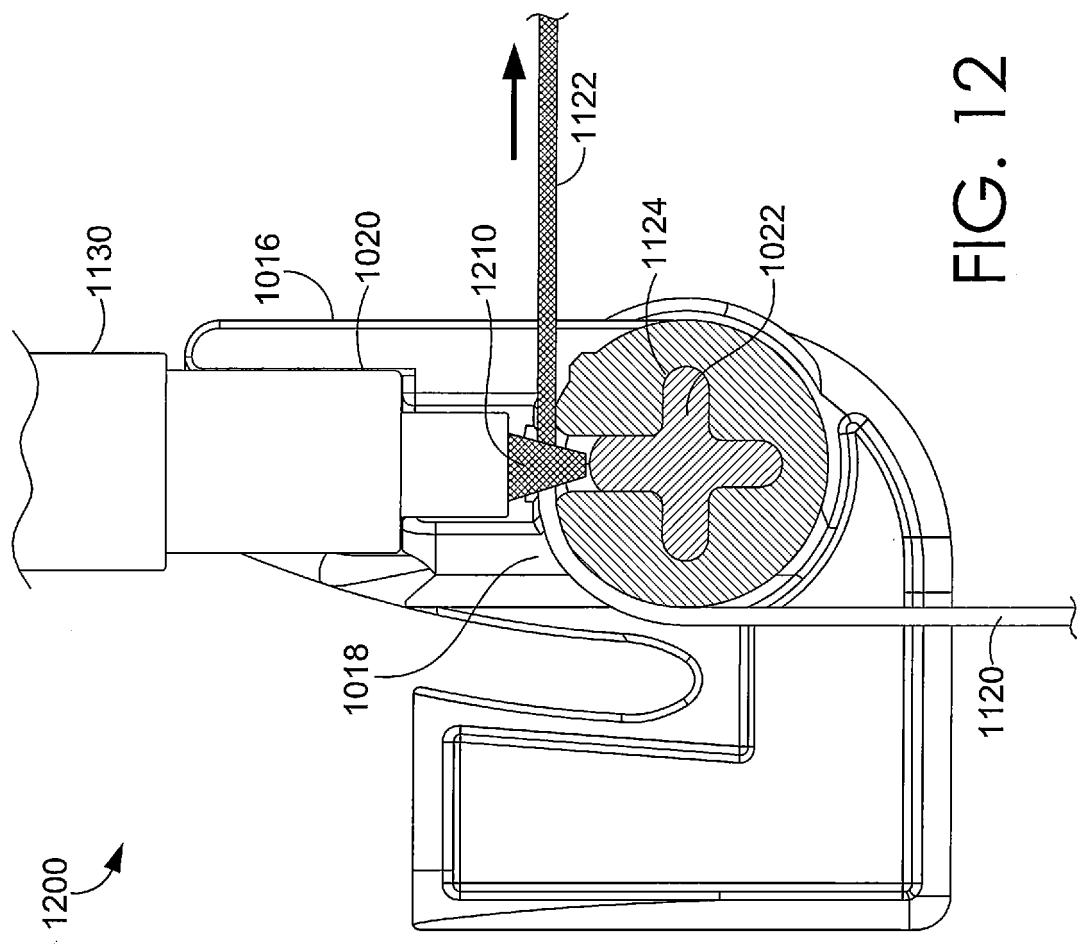


FIG. 12

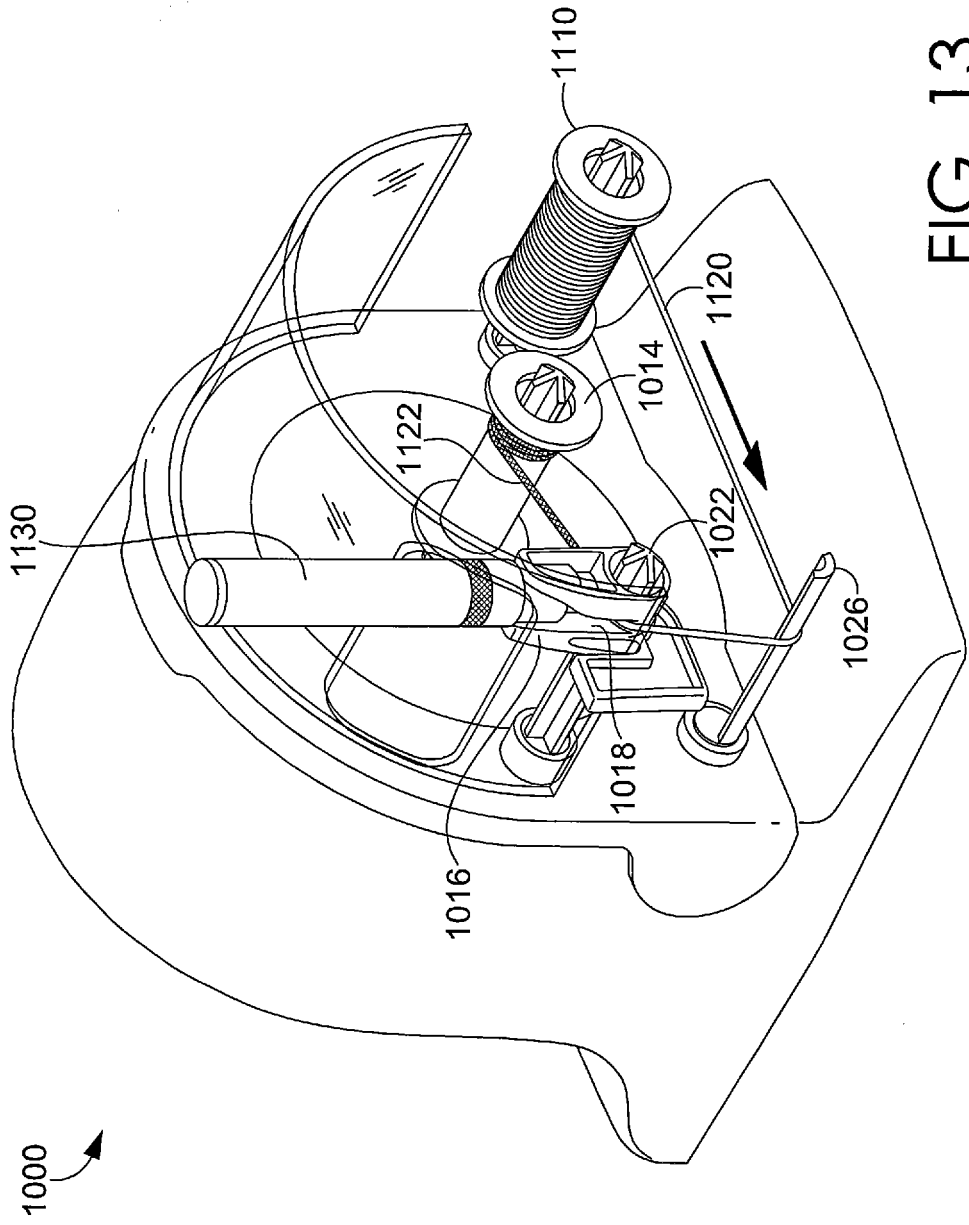


FIG. 13

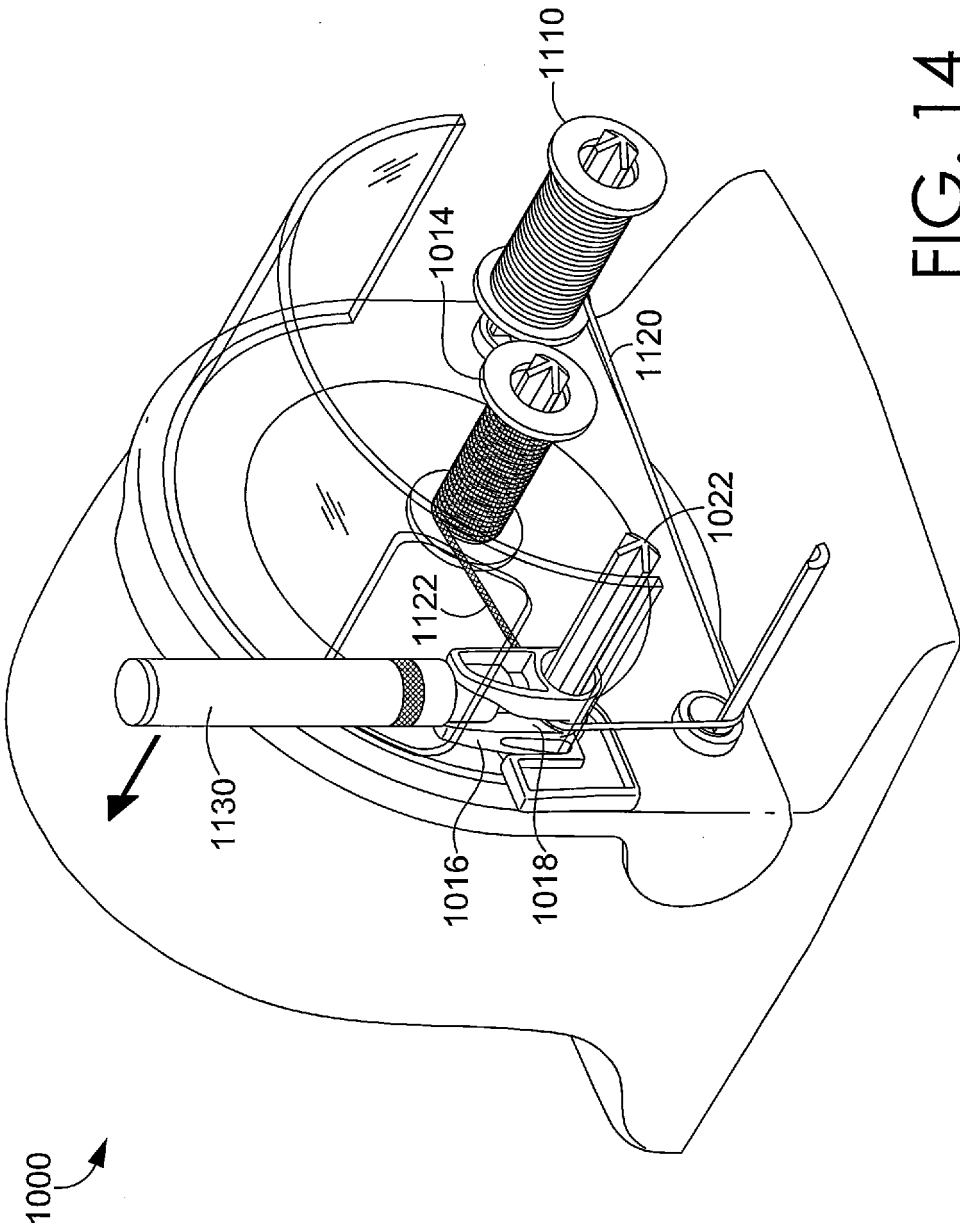


FIG. 14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2004074220 A [0006]
- JP 2010261130 B [0006]
- US 2012244353 A [0007]
- EP 1388304 A [0007]
- GB 1412502 A [0076]