

(11) (21) (C) **2,035,006**
(22) 1991/01/25
(43) 1991/07/27
(45) 2000/09/05

(72) Tedeschi, Giovanni, IT


(73) SUNPROJECT S.R.L., IT

(51) Int.Cl.⁵ A47H 5/02

(30) 1990/01/26 (4713B/90) IT

(54) **COMMANDE DE MANOEUVRE POUR STORE DE TISSU**

(54) **DEVICE FOR CONTROLLING THE OPERATION OF A
ROLL-UP CLOTH CURTAIN**

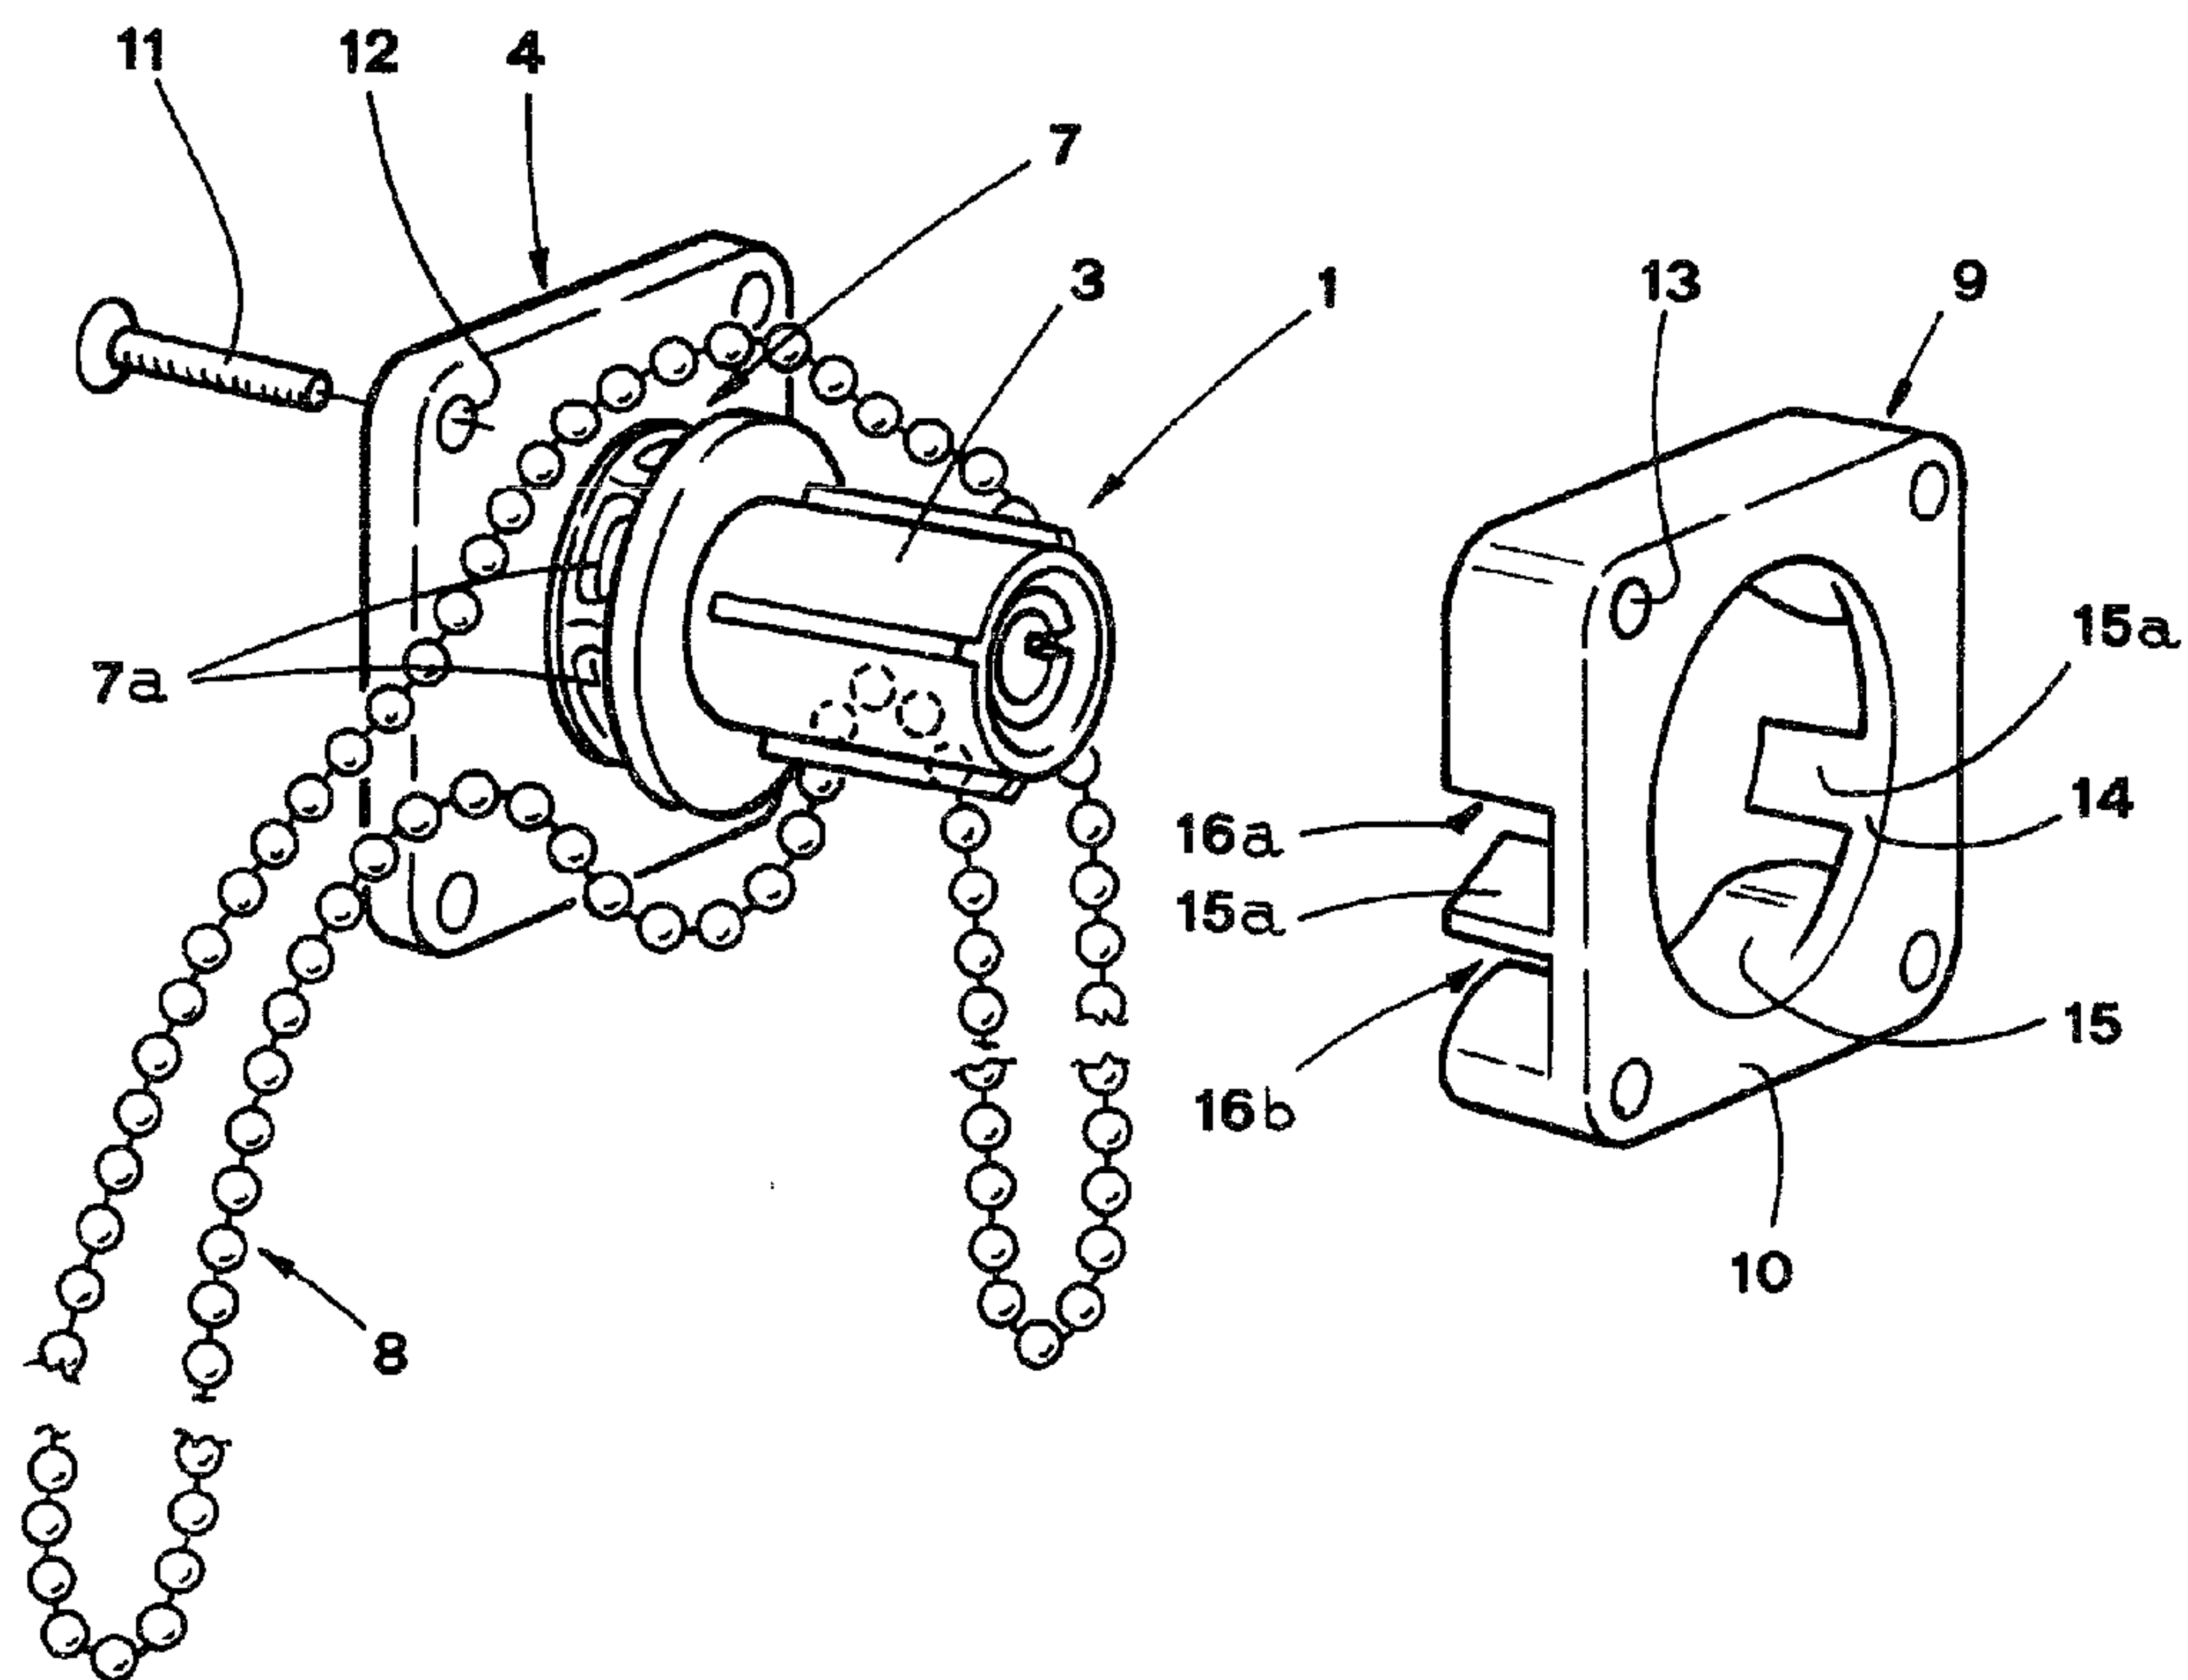

(57) The device comprises a pulley linked to a cloth winding roller and that features a race forming a lock slot for a driving rope, while a plate is suited to cantilever-support the pulley and to be fastened to an end of a box where the cloth winding roller is housed. For guiding the rope there is a body that features a center hole, crossed by a grooved cylinder of the pulley; the body is suited to be mounted on the pulley along the race and to be associated with the plate in an intermediate position between the plate and the box. The body is provided, on opposite sides, with a first and a second pair of slits through which the rope comes out towards the outside and the inside of the room to a window of which the cloth curtain is fitted, while a rim of the hole features a curved wall, designed to enclose, in mounting position, the race of the pulley.



DEVICE FOR CONTROLLING THE OPERATION OF A ROLL-UP CLOTH CURTAIN.

ABSTRACT OF THE DISCLOSURE

The device comprises a pulley linked to a cloth winding roller and that features a race forming a lock slot for a driving rope, while a plate is suited to cantilever-support the pulley and to be fastened to an end of a box where the cloth winding roller is housed.

For guiding the rope there is a body that features a center hole, crossed by a grooved cylinder of the pulley; the body is suited to be mounted on the pulley along the race and to be associated with the plate in an intermediate position between the plate and the box. The body is provided, on opposite sides, with a first and a second pair of slits through which the rope comes out towards the outside and the inside of the room to a window of which the cloth curtain is fitted, while a rim of the hole features a curved wall, designed to enclose, in mounting position, the race of the pulley.

- 1 -

DEVICE FOR CONTROLLING THE OPERATION OF A ROLL-UP CLOTH CURTAIN**BACKGROUND OF THE INVENTION**

This invention relates to the technical field concerning the operation of roll-up cloth curtains, mosquito-nets and the like.

DESCRIPTION OF THE PRIOR ART

It is known that roll-up cloth curtains require a control device by which it is possible to operate the winding of the cloth curtain on a roller which supports the curtain.

A known device of this kind is provided with a pulley which is suited to be fastened to an end of a cloth winding roller and features a lock slot for a driving rope. The pulley is cantilever-supported by a head which is fastened to a corresponding end of a box in which is located the cloth winding roller.

The driving rope comes out of the control device through a special slit, generally made in the side of the box that is inside the room in mounting position.

This turns out to be disadvantageous, when it is desired to operate the roll-up cloth curtain also from outside the room, e.g. in the case that the roll-up cloth curtain is fitted to windows opening onto

- 2 -

terraces, gardens and the like.

Furthermore, since the slit is made in one side of the box, i.e the side that remains inside the room, it results to be univocally determined the assembly side of the control device with respect to the winding roller, and this may not be suited to the installation requirements of the roll-up cloth curtain.

SUMMARY OF THE INVENTION

The objects of this invention is to provide a device for operating a roll-up cloth curtain of universal use, particularly allowing the operation from outside and/or from inside the room to the window of which the curtain is fitted.

A further object of this invention is to provide a device for controlling the operation of a roll-up cloth curtain, made through a technical solution which turns out to be simple, functional, reliable as well as cheap.

The aforesaid objects are accomplished by means of a device for controlling the operation of a roll-up cloth curtain from outside and/or inside the room to the window of which the curtain is fitted, of the type comprising a pulley which is suited to draw into rotation a cloth winding roller and featuring a race forming a lock slot for a driving rope, and a plate which is suited to cantilever-support said pulley and to be fastened to a corresponding end of a box where said cloth winding roller is housed, characterized in that it

- 3 -

comprises a means for guiding said rope which is suited to be mounted on said pulley along said race and to be associated with said plate in an intermediate position between the same plate and said box; said guide means is symmetrically provided, on opposite sides, with a first and a second pair of slits through which the rope comes out, respectively turned towards the outside and the inside of the room to the window of which the curtain is fitted.

BRIEF DESCRIPTION OF THE DRAWINGS

The features of this invention will be described further, by way of example, with reference to the accompanying drawings, wherein:

- Figure 1 is an exploded perspective view of the device for operating a roll-up cloth curtain being the object of this invention;
- Figure 2 is a perspective view of the device with control on both sides, i.e. from outside and from inside.
- Figure 3 is a sectional view of the device in the embodiment with control from inside;
- Figure 4 is a sectional view of the device in the embodiment with control from outside;
- Figure 5 is a further advantageous embodiment of the present device.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Like reference numerals are employed to designate like parts throughout the various figures of the drawings.

Referring to the above-mentioned figures, the numeral 1 generally designates a pulley for controlling the operation of a roll-up cloth curtain 2. The pulley causes in a known way, e.g. by the interposition of friction means (not illustrated) the rotation of a grooved cylinder 3 designed to engage an end of a cloth 2 winding roller, not illustrated in the drawings. The pulley 1 is suited to be cantilever-supported by a plate 4, of square shape; the plate 4 is designed to be fastened to a corresponding end of a box 5, where is located the cloth winding roller. On the sides of the box 5 the cloth curtain slideways 6 extend downwards.

The pulley 1 features, close to the plate 4, a race 7 provided with lock slots 7a for a rope 8 driving the device. In the embodiment illustrated, said rope 8 is made up of a series of ball elements assembled along a line closed like a ring.

According to this invention, the control device comprises a guide means, generally designated by the numeral 9. The guide means 9 consists of a body 10 which is suited to be assembled onto the pulley 1, close to the race 7; the body 10 has a profile similar to that of the plate 4. The body 10 is associated with the plate 4 in an intermediate position between this and the box 5, by means of screws 11 crossing holes 12,13 respectively made on the same plate 4 and body 10.

For that purpose the body 10 features a center

hole 14, which is crossed, in mounting position, by the grooved cylinder 3 pulled by the pulley 1. The rim of hole 14 is surrounded by a curved wall 15, designed to enclose, in mounting position, the race 7 of the pulley 1.

The body 10 features symmetrically, on opposite sides, a first and a second pair of slits 16a, 16b allowing the rope 8 to come out. More precisely, said slits 16a, 16b cross the wall 15 of the body 10 according to axes slightly diverging towards the inside of the same body, and defined by a separating element 15a; therefore the slits 16a, 16b tend to be linked up by a line tangent to the rope 8 guide channel 17, defined between the pulley race 7 and the wall 15 of the guide means 9.

The slits 16a, 16b provided on each side of the control device form respective outlets for the rope 8.

In particular, it is provided that through said slits 16a, 16b come out respective lengths of the rope, for the sake of clarity designated by 8a and 8b in fig.2. The lengths 8a and 8b of the rope come down from opposite sides with respect to the roll-up cloth curtain 2, so allowing it to be operated both from outside and from inside. As a matter of fact, the operation of one of such rope lengths brings about the rotation of the pulley 1, while the other length follows the circular motion induced by the same pulley.

The engagement of the rope 8 in the seatings 7a of the race 7, provided by the closing of the channel 17, prevents the traction exerted on a length of rope from altering the opposite length.

It is also possible to have only a single rope

length coming out of the device, both through the inward slits (fig.3) and the outward slits (fig. 4), as well as through the downward slits (fig.5).

For such purpose, it is sufficient to provide for the winding of the rope onto the race 7 for the whole circular portion which leads to the outlet slits used.

Thanks to the symmetrical shape, the control device may further be mounted indifferently on the right or on the left side with respect to the winding roller.

Thus the control device being the object of this invention turns out to be of universal use, since it allows to comply conveniently with all the different requirements arising upon the installation of roll-up cloth curtains. Furthermore, it is of simple and inexpensive construction; in particular, the guide means is preferably obtained from a single piece of plastic material by molding.

It is understood that the above has been described by way of example and it is not restrictive, therefore any other possible embodiment is to be considered as covered by the patent hereby applied for, as described above and as claimed here below.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

- 1) A device for controlling the operation of a roll-up cloth curtain from outside and/or inside the room to a window of which said curtain is fitted, said device comprising:
 - a pulley which is suited to rotate a cloth winding roller and featuring a race forming a lock slot for a driving rope;
 - a plate suited to cantilever-support said pulley and fastened to an end of a box where said cloth winding roller is housed;
 - guide means mounted on said pulley along said race for guiding said rope, said means being associated with said plate in an intermediate position between said plate and said box;
 - a first and a second pair of slits made on opposite sides of said guide means, with said rope coming out through said slits towards the outside and the inside respectively of said room to a window of which said cloth curtain is fitted.
- 2) A device according to Claim 1, wherein said guide means comprises a body featuring a center hole, crossed by a grooved cylinder integral with said pulley.
- 3) A device according to Claim 2, wherein a rim of said hole features a curved wall, designed to enclose the

race of said pulley.

- 4) A device according to Claims 3, wherein said slits cross said wall of the guide means, according to axes slightly diverging towards the inside of said guide means, defined by a separating element.
- 5) A device according to Claim 4, wherein said slits tend to join together along a line tangent to a channel for guiding said rope, defined between said race of said pulley and said wall of said guide means.
- 6) A device according to Claim 1, wherein said guide means has a profile similar to the profile of said plate and it is associated with said plate by means of screws crossing holes respectively made on said plate and guide means.

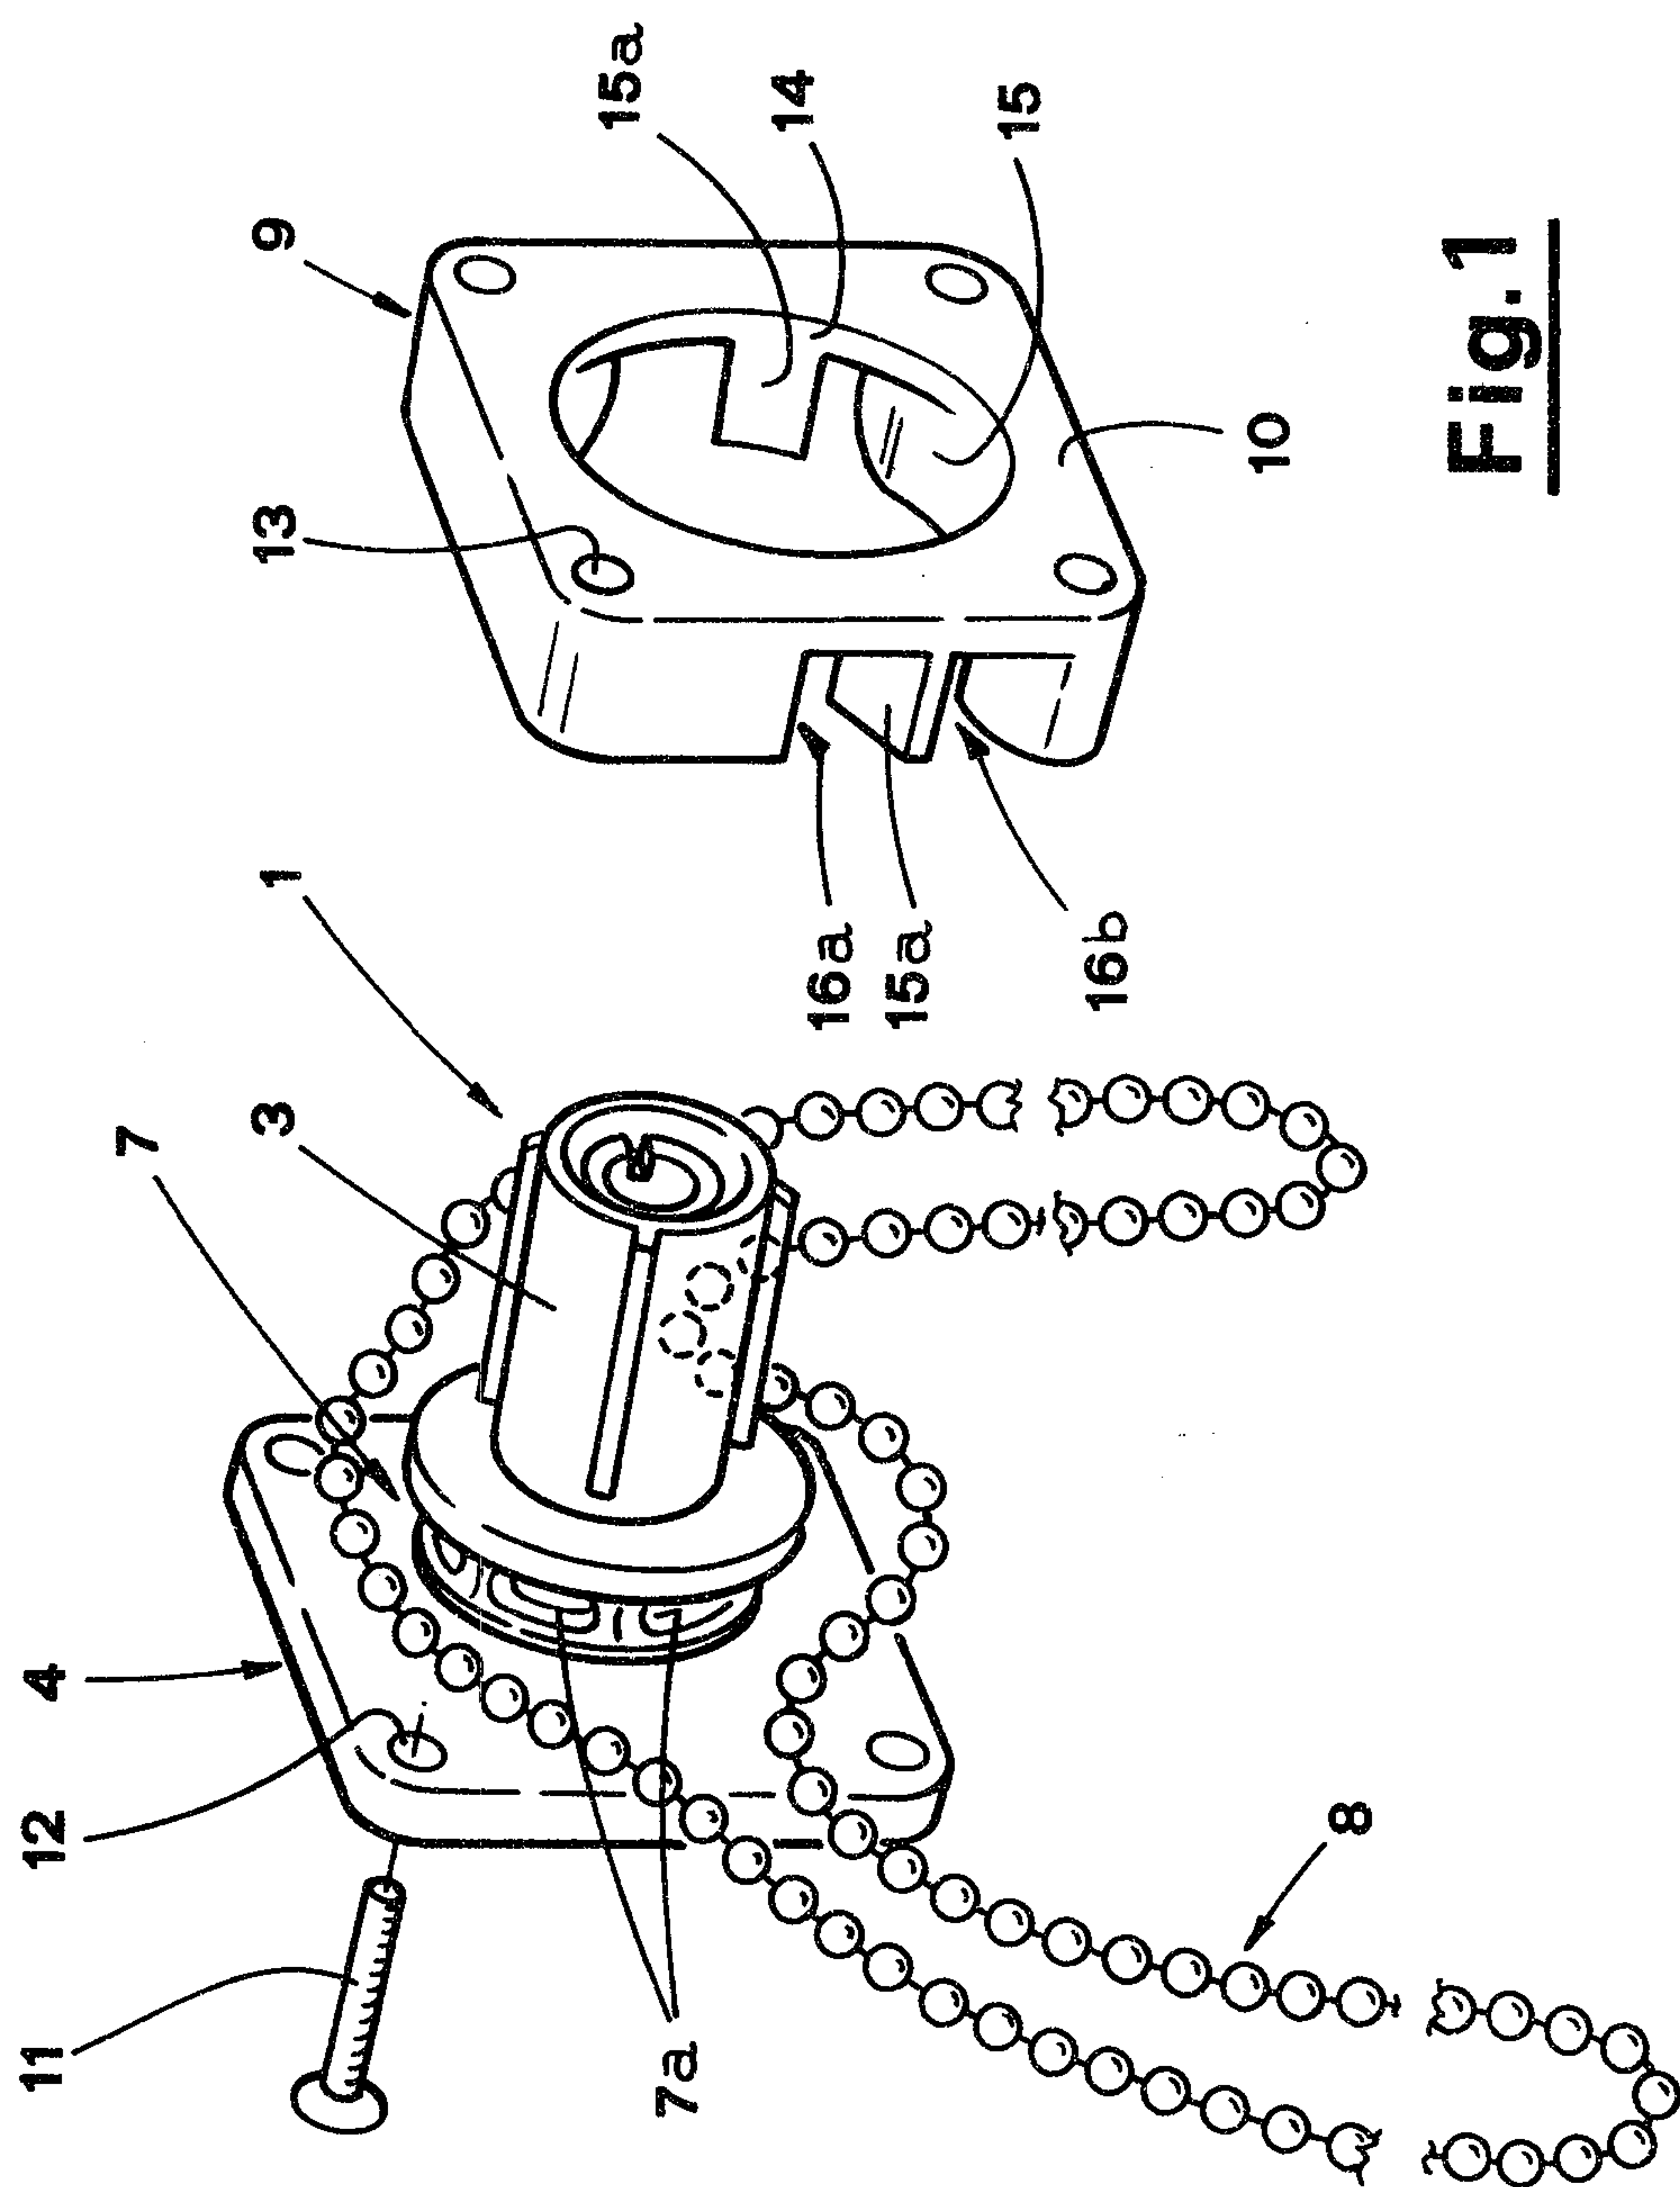


Fig.1

Heads & Co.

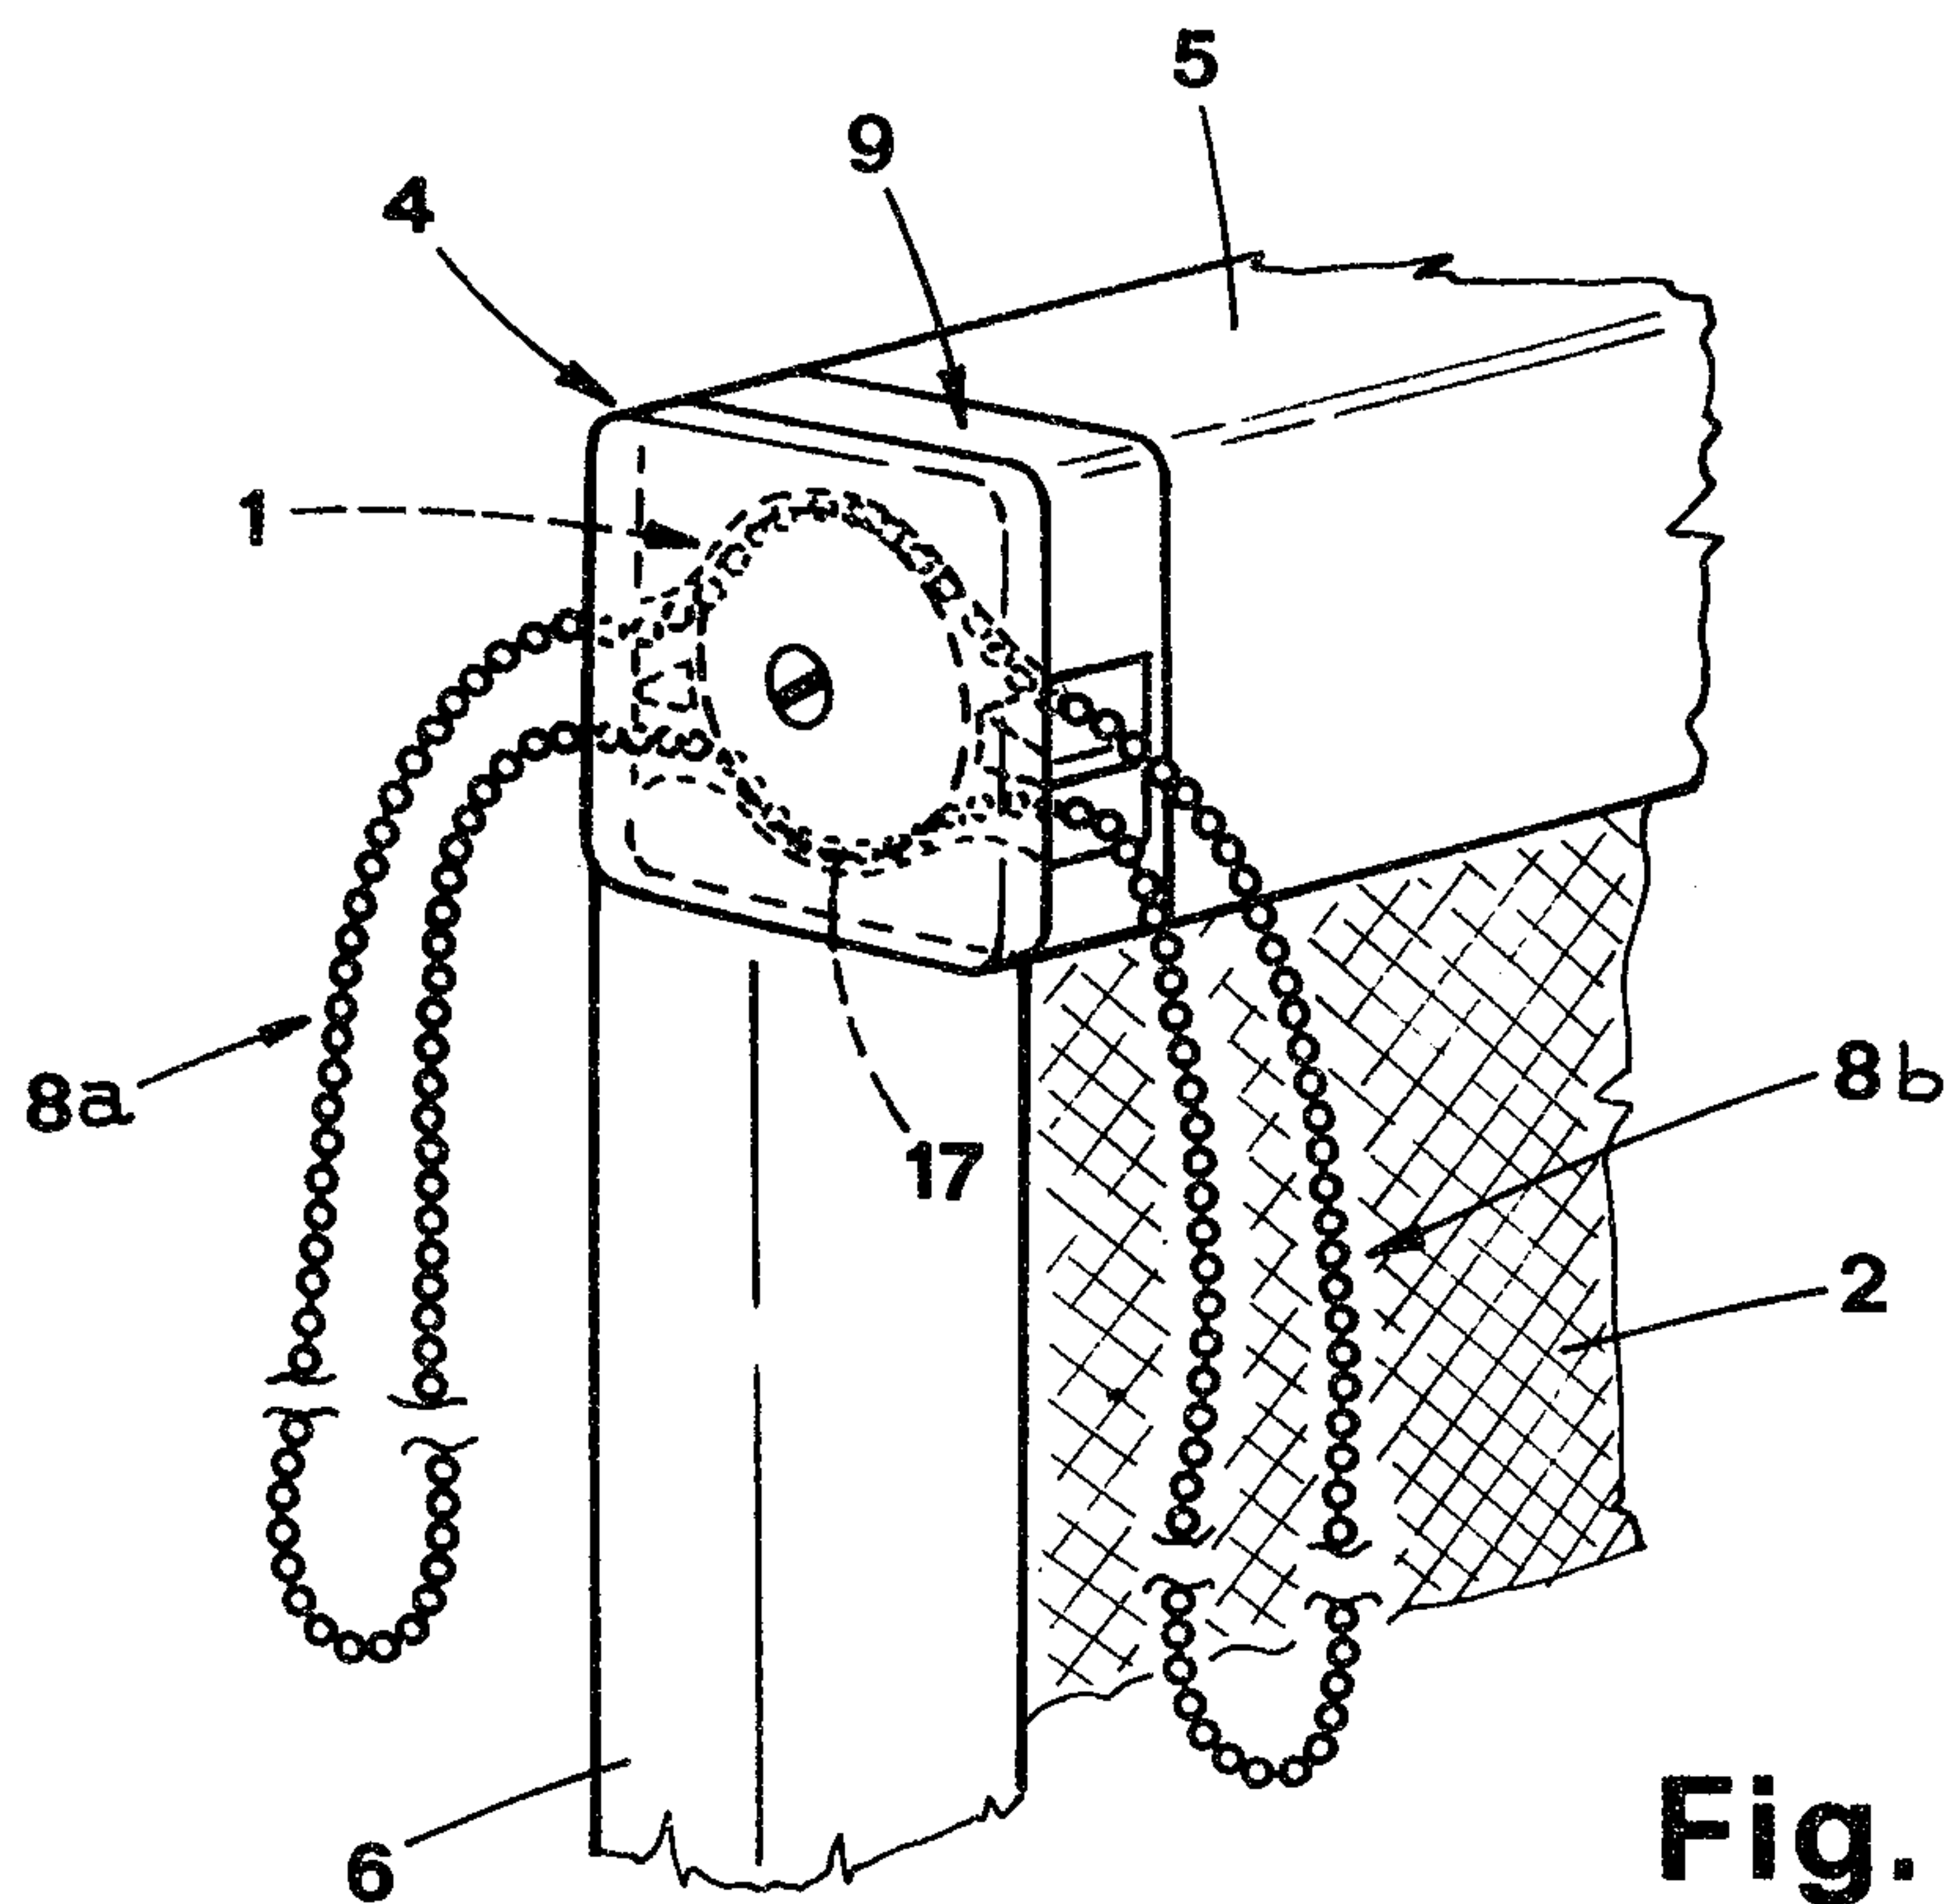


Fig. 2

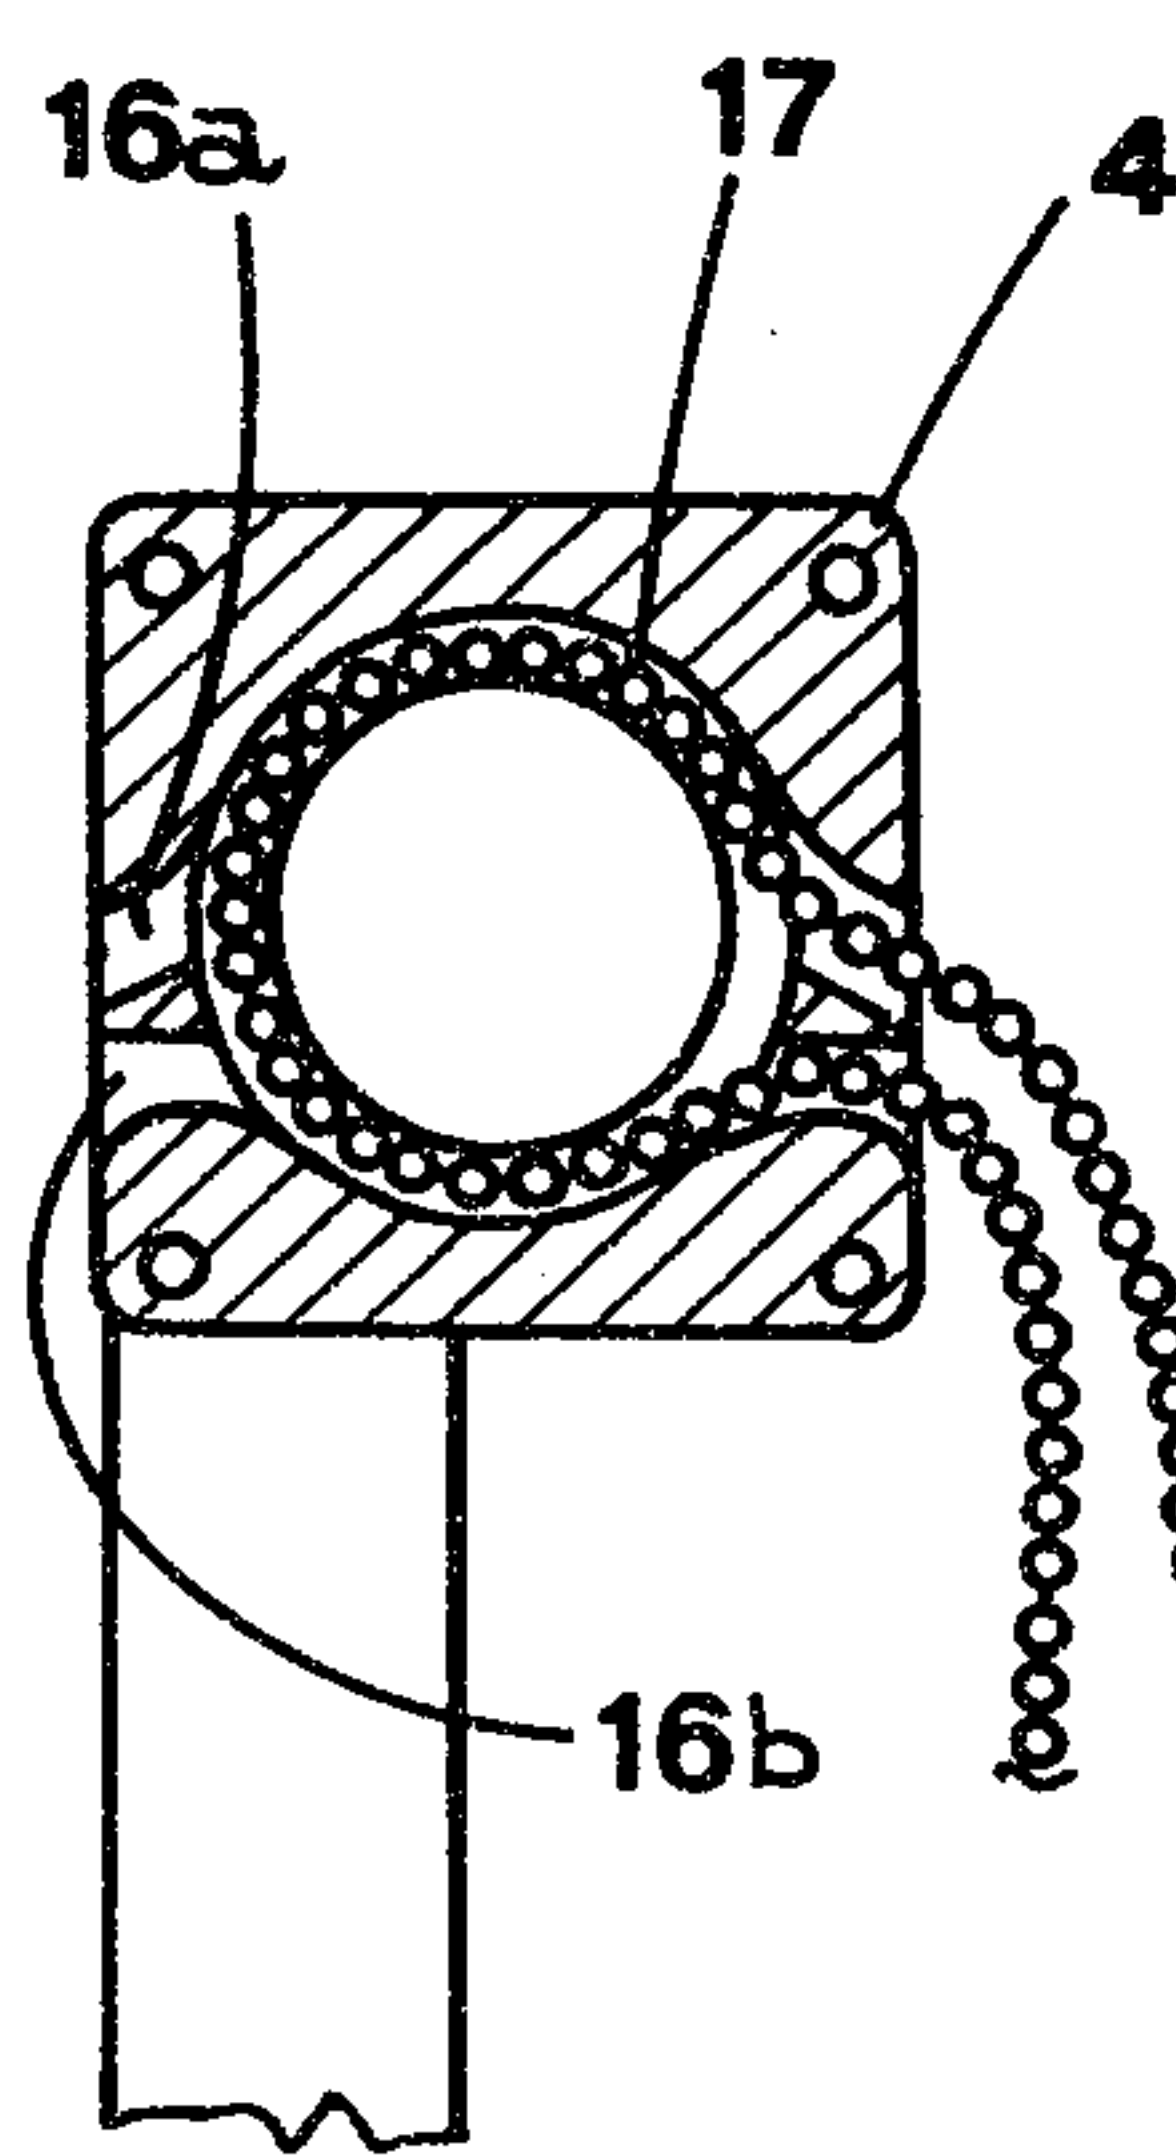


Fig. 3

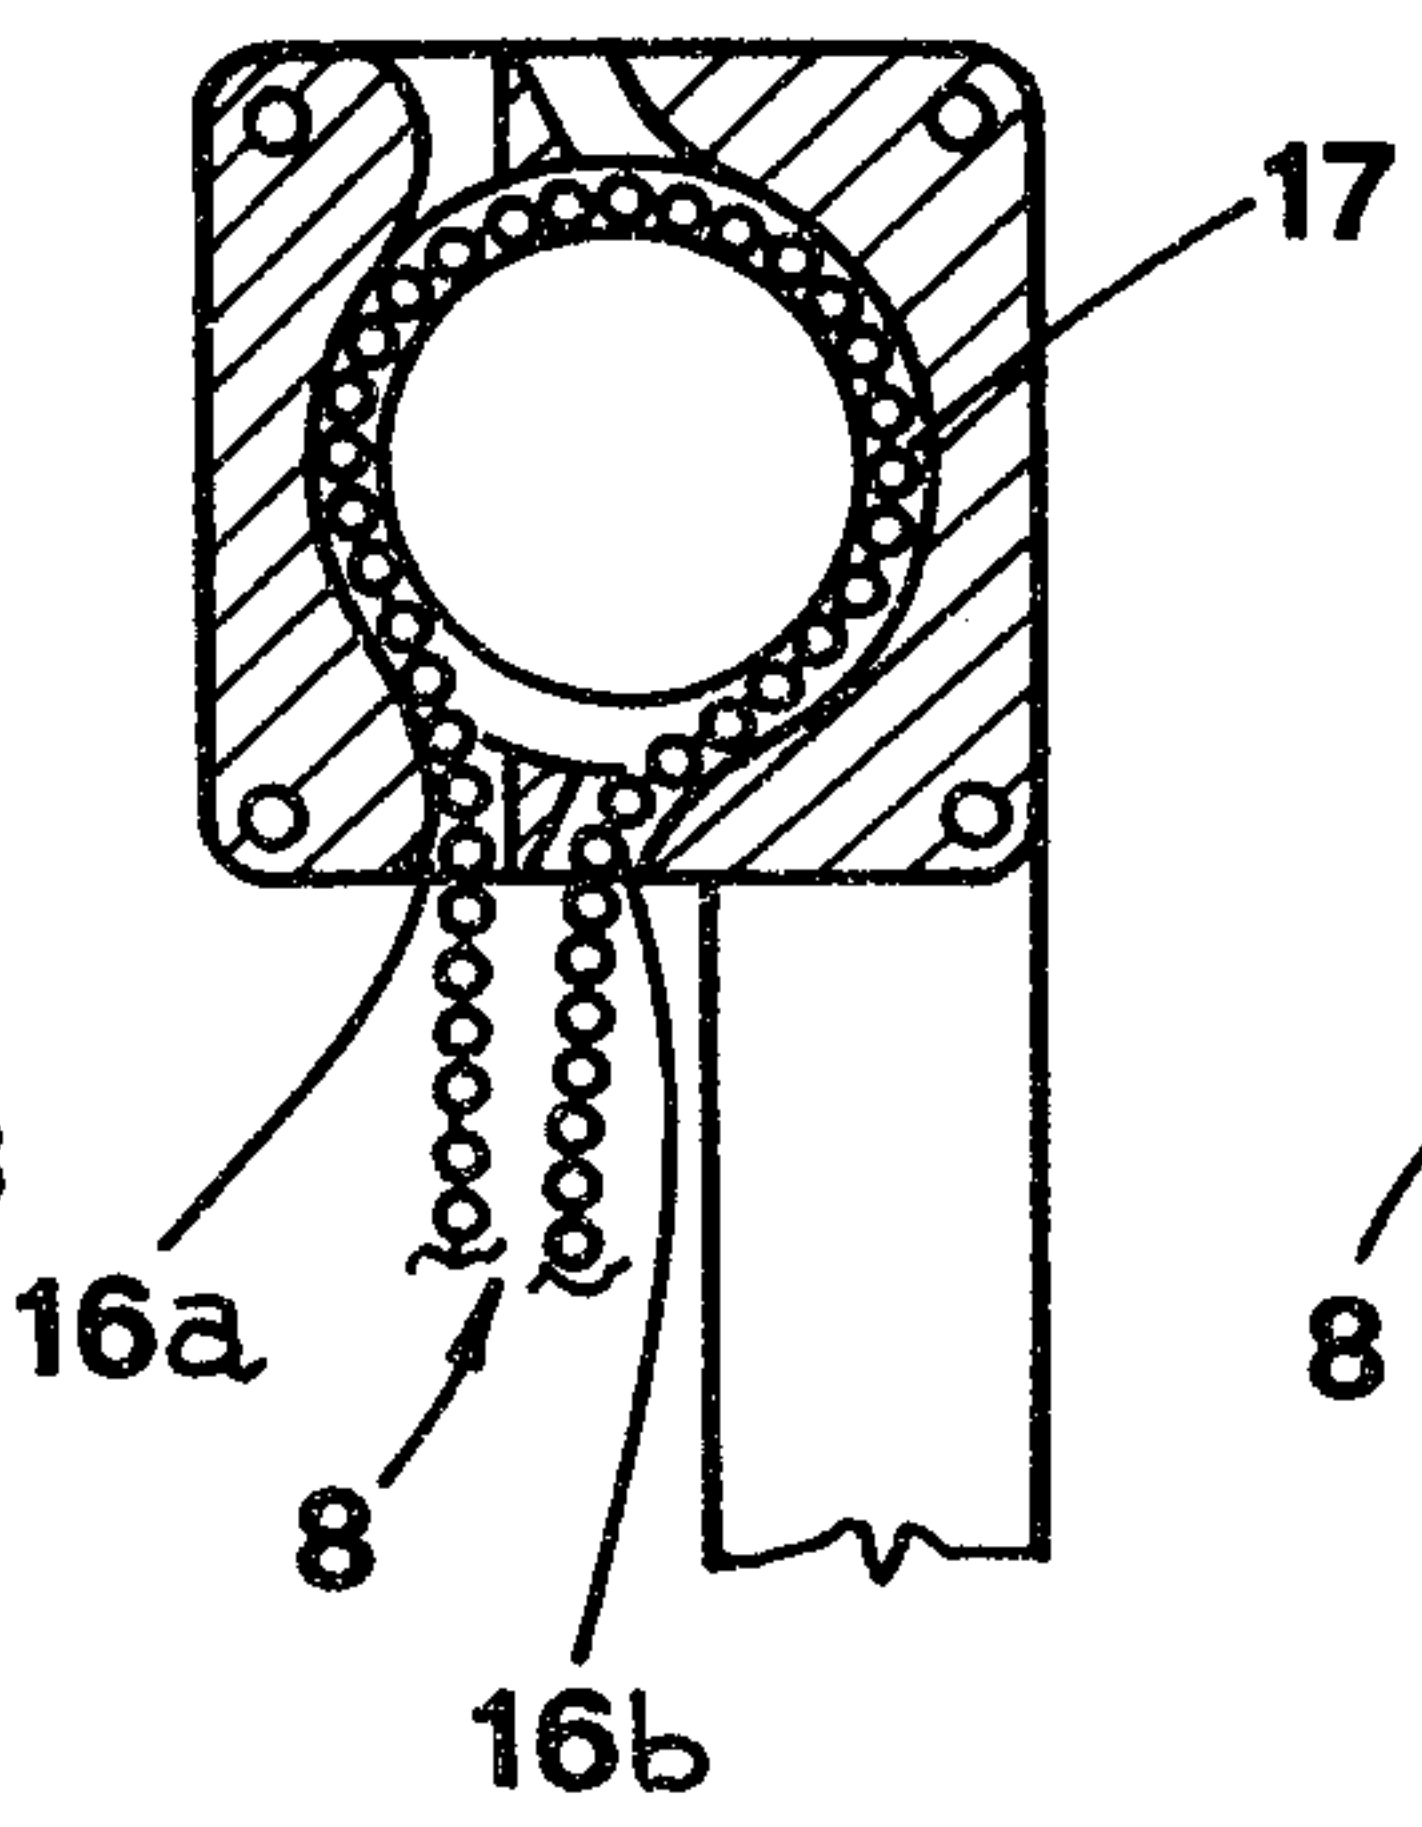


Fig. 5

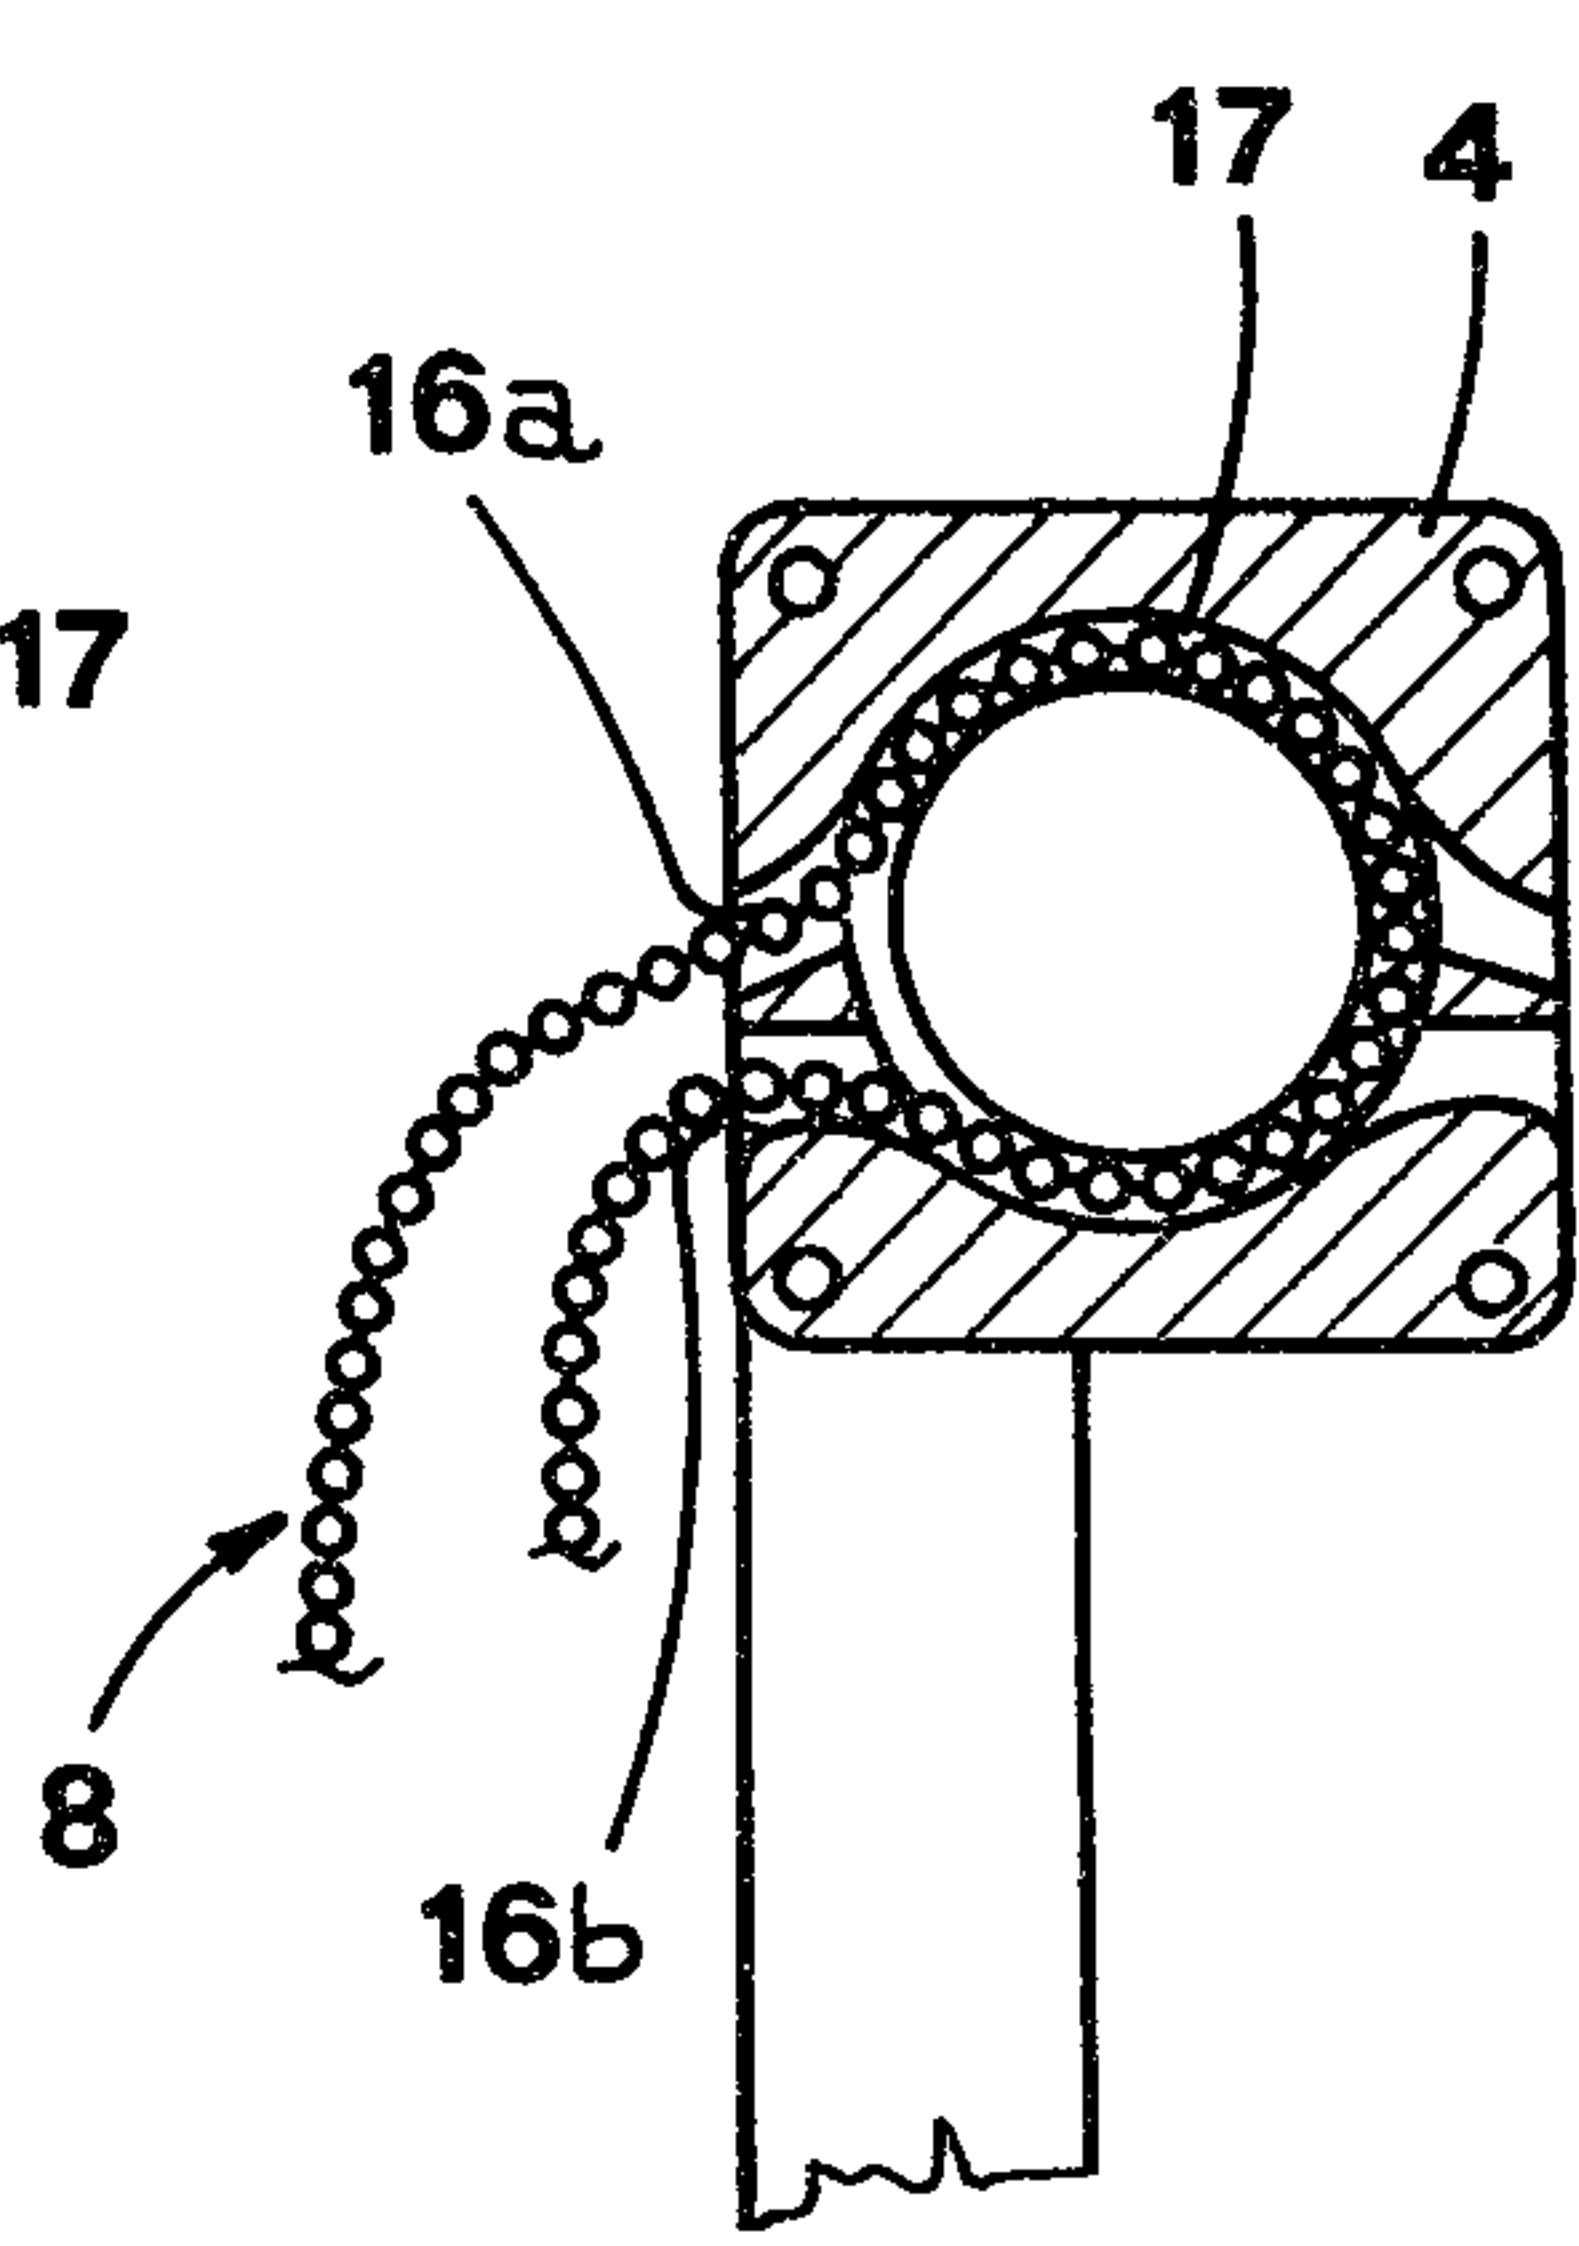


Fig. 4

Heute a Ocht

