

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 February 2009 (19.02.2009)

PCT

(10) International Publication Number
WO 2009/021891 A1

(51) International Patent Classification:
H04L 12/56 (2006.01)

(74) Common Representative: **NOKIA SIEMENS NETWORKS OY**; COO RTP IPR / Patent Administration, 80240 Munich (DE).

(21) International Application Number:
PCT/EP2008/060349

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 6 August 2008 (06.08.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07016011.4 14 August 2007 (14.08.2007) EP

(71) Applicant (for all designated States except US): **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FIN-02610 Espoo (FI).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOF, Axel** [DE/DE]; Sonnenstr.7c, 81240 Olching (DE). **RIEDL, Johannes** [DE/DE]; Bajuwarenstr. 17, 84030 Ergolding (DE).

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR RESERVING A COMMUNICATION RESOURCE AND COMMUNICATION SYSTEM COMPRISING SUCH DEVICE

FIG 1

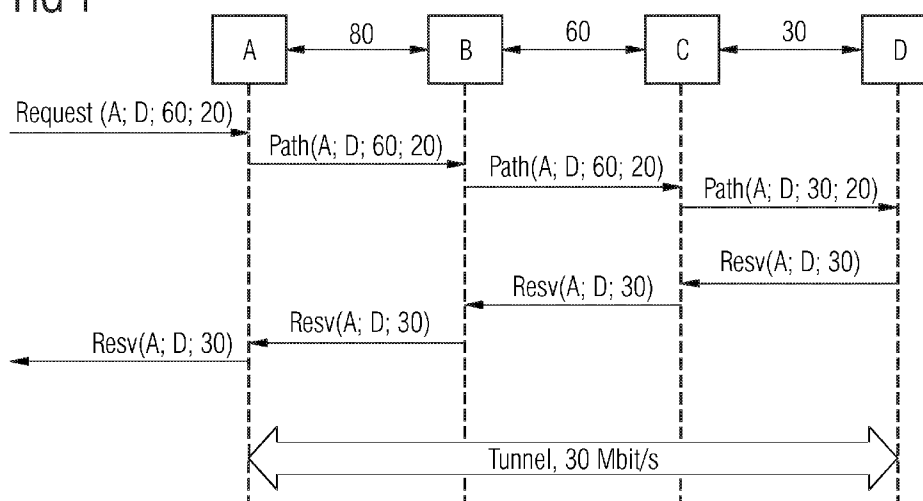

(57) Abstract: A method and a device for reserving a communication resource are provided, said method comprising the steps of (i) a first network element requests a first resource for a connection to a second network element; (ii) if the first resource requested is available, the first network element allocates the first resource; and (iii) if the first resource requested is not available, the first network element allocates a resource of a reduced size.



Published:

— *with international search report*

DescriptionMethod and device for reserving a communication resource and communication system comprising such device

5

The invention relates to a method and to a device for reserving a communication resource and a communication system comprising such a device.

10 In a communication network paths are set up allocating a pre-defined bandwidth. In particular, such paths are utilized for connection-oriented data communication, e.g. via tunnels like VPN (Virtual Private Network).

15 A new path throughout the communication network is initialized to allow a data transfer from an origin or source to an addressee or destination. Furthermore, a bandwidth allocated for a particular path may have to be changed according to varying demands or traffic.

20

A Resource ReSerVation Protocol (RSVP) is defined according to RFC 2205. It is a network layer protocol designed to reserve resources across a network for an integrated services Internet. RFC 2205 states that RSVP does not transport application data but is rather an Internet control protocol, like
25 ICMP, IGMP, or routing protocols.

RSVP provides receiver-initiated setup of resource reservations for multicast or unicast data flows with scaling and
30 robustness.

RSVP can be used by either hosts or routers to request or deliver specific levels of quality of service (QoS) for application data streams or flows. RSVP defines how applications
35 place reservations and how they can relinquish the reserved resources once they are no longer required.

RSVP operation will generally result in resources being reserved in each node along a path.

Establishment of a path via signaling can be conducted as follows: An initial request is sent to an originating node A requesting an establishment of a communication path to an addressee node B allocating a predetermined bandwidth X. Then, a CSPF (Constraint Shortest Path First) algorithm is run to determine whether a path from A to B exists allowing data transfer at a bandwidth X. In the affirmative, the path is set up. If no such path can be set up, e.g., because only a reduced bandwidth smaller than X is available, a failure message is returned to the originator of the initial request. The information relating to the bandwidth across each link via network elements is provided throughout the network by a traffic-engineering extension of the Interior Gateway Protocol (IGP).

Hence it is disadvantageously that only a subset of paths can be successfully established, whereas a significant number of paths requiring said bandwidth X will not be set up. Basically, the first request (via RSVP) allocating bandwidth between two network elements wins (first come - first serve). This significantly limits the utilization of the overall bandwidth of paths throughout the network.

The **problem** to be solved is to overcome the disadvantages as set forth above and to provide an approach that allows a more efficient reservation of resources of a communication environment.

This problem is solved according to the features of the independent claims. Further embodiments result from the depending claims.

In order to overcome this problem, a method for reserving a communication resource is provided, said method comprising the steps:

- a first network element requests a first resource for a connection to a second network element;
- if the first resource requested is available, the first network element allocates the first resource;
- 5 - if the first resource requested is not available, the first network element allocates a resource of a reduced size.

10 Hence, this concept allows to reserve the communication resource even if a first resource, e.g., a certain amount of bandwidth, is not available. In such case, a resource of a reduced sized, e.g., of a reduced amount of bandwidth, may be allocated.

15 It is to be noted that reserving of the communication resource may comprise and/or imply utilizing such resource reserved, in particular for data communication, e.g., via a data connection, tunnel or the like.

20 The resource to be reserved as mentioned may be in particular related to or be associated with a certain amount of a resource means or metric. In particular, the resource may comprise an amount of at least one of the following:

- a bandwidth;
- 25 - a number of slots, in particular time slots and/or frequency slots;
- a number of lines;
- an available communication capacity over a predetermined period of time.

30

Combinations of such (amounts of) resources may be utilized according to the concept presented herewith.

In an embodiment, the method comprises the step:

- 35 - If the first resource requested is not available
- the first network element allocates a resource of a reduced size if this resource of a reduced size is larger than and/or equals a second resource,

- otherwise, the first network element does not allocate any resource for a connection to the second network element.

5 Hence, a second resource, e.g., a threshold value for a minimum size of a resource to be allocated, is utilized. If this second resource cannot be met, the first network element may not allocate any resource. In other words, the first network element wants to allocate a first resource, but could get by
10 with a second resource (e.g., a resource of a reduced size compared to the first resource). If there is less resource than the second resource requested, the allocation from the first network element's perspective cannot be successfully completed with this second network element, because there is
15 not enough amount of whatever resource required available.

It is to be noted that the first resource and the second resource could be associated with different types. As an example, the first network element may request a certain amount
20 of bandwidth as the first resource, but as this amount cannot be allocated, could alternatively go with a predetermined communication capacity over a given period of time.

The second resource, as well as the first resource, may be or
25 comprise at least one of the amounts of various types as stated before.

In another embodiment, the request from the first network element to the second network element comprises values for
30 the first resource and the second resource.

Such request may in particular comprise at least one value for the first resource and/or at least one value for the second resource. Several such valued may in particular be utilized
35 for different types of resources.

In a further embodiment, the first network element and/or the second network element are of the following type:

- a server;
- a switch;
- a router;
- a gateway.

5

In a next embodiment, the first network element conveys a message to the second network element, said message comprising:

- an originating address;
- 10 - a destination address;
- a first resource requested;
- a second resource that corresponds to a resource required.

- 15 Hence, the message may comprise in particular the first resource and the second resource, e.g., an amount of bandwidth requested and an amount of bandwidth required.

- 20 It is also an embodiment that a communication channel is established in particular from the first network element via the second network element and/or at least one additional (intermediate) network element to a third network element utilizing the method as described herein.

- 25 Thus, the communication channel can be set up from the first network element via the second network element to a third network element. From each network element towards the next network element, a mechanism according to the approach described herein can be realized, i.e. a first resource can be
30 requested, preferably together with an information relating to a second resource (minimum amount necessary for setting up a channel) as described. Each next network element can forward the resource values requested and required (e.g., the first resource and the second resource as described).

35

Pursuant to another embodiment, the third network element returns a third resource to the first network thereby indicat-

ing the resource (that has been successfully) reserved along the communication channel.

5 The third resource may be an amount of resource as described above. It may further correspond to a particular value of resource.

10 The resource reserved may be utilized for communication purposes, e.g., a bandwidth amount reserved can be used for communicating data at said bandwidth.

15 According to an embodiment, the method described is used for setting up a communication channel between the first network element and the third network element, wherein said communication channel is in particular a tunnel. Such tunnel can further be realized as a Virtual Private Network (VPN) tunnel.

20 The problem stated above is also solved by a device for reserving a communication resource comprising a processor unit that is arranged and/or equipped such that the method according to any of the preceding claims is executable on said processor unit.

25 According to an embodiment, the device is a communication device, in particular a network element.

In yet another embodiment, the device comprises at least one of the following:

- 30
- a server;
 - a switch;
 - a router;
 - a gateway.

35 The problem stated supra is also solved by a communication system comprising a device as described herein.

Embodiments of the invention are shown and illustrated in the following figures:

- Fig.1 shows a flow chart and communication channels between network elements A, B, C and D, wherein requests sent from one network element to the subsequent network element establish a communication channel at a predetermined bandwidth;
- Fig.2 shows steps to be processed at a network element in order to set up a communication channel at a predetermined bandwidth.

The approach presented herein allows a network element to adjust a resource that has to be reserved for a communication channel. The resource to be adjusted can be of various kind: It can comprise, e.g., an amount of

- a bandwidth;
- a number of slots, in particular time slots and/or frequency slots;
- a number of lines;
- an available communication capacity over a predetermined period of time.

Fig.1 shows a communication channel from a network element A to a network element D via network elements B and C. The following bandwidths (resources) are available between the respective network elements:

- A ↔ B: 80 MBit/s
- B ↔ C: 60 MBit/s
- C ↔ D: 30 MBit/s

The network element A receives a request

Request (A; D; 60; 20)

comprising the parameters:

- originating address: network element A;

- destination address: network element D;
- bandwidth requested: 60 MBit/s;
- bandwidth required: at least 20 MBit/s.

5 The request is processed at the network element A. As the connection between the network element A and the network element B can be allocated with up to 80 MBit/s, the network element A allocates 60 MBit/s as required and forwards the request to the subsequent network element B.

10

The network element B allocates a bandwidth amounting to 60 MBit/s and forwards the request to its subsequent network element C (along the path to the destination network element D).

15

The connection between the network element C and the network element D is only capable of 30 MBit/s, whereas the initial request asked for 60 MBit/s. However, the fallback bandwidth that is still deemed acceptable according to this initial request amounts to 20 MBit/s. Hence, the network element C allocates the remaining and/or available bandwidth amounting to 30 MBit/s and changes the request's parameter "bandwidth requested" to 30 MBit/s (because that is the highest bandwidth available for the communication channel between the network element A and the network element D).

25

The network element D receives said request. As the network element D is the addressee in this example of Fig.1, it confirms that a communication channel between A and D is set up utilizing a continuous bandwidth of 30 MBit/s by sending an acknowledge message

30

Resv(A; D; 30)

35 to its predecessor network element C. This network element C forwards this acknowledge message to the network element B thereby de-allocating 30 MBit/s (because the connection between the network elements B and C has to provide 30 MBit/s

at most). The acknowledge message is forwarded to the network element A thereby de-allocating 30 MBit/s on the connection between network elements A and B. The acknowledge message is further forwarded to its origin indicating that a tunnel between A and D has successfully been set up and is able to carry traffic at a maximum data rate of 30 MBit/s.

The example according to Fig.1 shows that a channel or tunnel between the network element A and the network element D can be set up successfully. However, if the initial request is

Request (A; D; 60; 40)

the intermediate network element C will not be able to allocate a bandwidth amounting to at least 40 MBit/s, because the connection to the subsequent network element D can only provide a bandwidth of 30 MBit/s. Hence, the network element C may return a failure message to the originator of the request indicating that a communication channel with the parameters required cannot be set up from the network element A to the network element D via the network elements B and C.

Such a failure message can be provided utilizing the Resource ReSerVation Protocol (RSVP).

According to the example shown in Fig.1 (i.e. the successful creation of the 30 MBit/s-tunnel), the Resource ReSerVation Protocol (RSVP) may be extended by providing a

RSVP_Resize

message enabling resource reservation for an already established communication channel. Preferably, additional bandwidth for such a reserved communication channel can be allocated utilizing the mechanism as described herein without the requirement of releasing the existing communication channel first.

Increasing a bandwidth of an already existing communication channel may in particular be achieved in a dynamic way, i.e., without any additional interference from an operator.

5 **Fig.2** shows a flow chart comprising steps that can be run on a network element (NE). This network element NE can be a first network element, a second network element or a third network element (addressee) of a communication channel. The steps shown may in particular be executed to obtain a re-
10 source, in particular a bandwidth of a predefined size. As described supra, the request

Request (A; D; 60; 20)

15 is received at the Network Element NE. The parameters shown in said request are examples for an originating address for a tunnel, a destination address for said tunnel, a requested bandwidth (60 MBit/s) and a required bandwidth (20 MBit/s). These exemplary values are utilized in Fig.2. However, any
20 kind of values for addresses and/or resources are applicable in a scenario as described.

The actual Network Element NE identifies in a step 201 whether it is the addressee (here: network element "D"). If
25 this is the case, a message

Resv(A; D; 60)

is returned to its predecessor network element (according to
30 Fig.1, the network element C) thereby indicating that a channel of 60 MBit/s bandwidth has been installed successfully.

If the actual Network Element NE is not the addressee network element D, it is checked in a step 202 whether a bandwidth
35 amounting to 60 MBit/s is available on the next hop, i.e. the connection to the next network element. If this is the case, said bandwidth of 60 MBit/s is allocated and a request is forwarded to the subsequent network element.

If this is not the case, i.e. if there is less than the requested bandwidth of 60 MBit/s available towards the next network element, a step 203 checks whether the minimum bandwidth required (20 MBit/s) is available towards the next network element. In the affirmative, the remaining amount of bandwidth (60 MBit/s - x MBit/s) is allocated and a request

Request (A; D; 60-x; 20)

is sent to the subsequent network element.

If the bandwidth available in the step 203 is less than 20 MBit/s, a failure message is returned to the originator of the initial request thereby indicating that the communication channel with a bandwidth of at least 20 MBit/s cannot be set up between the network elements A and D.

It is to be noted that the steps according to Fig.2 may be implemented in a network element, in particular inside a switch, a router, a server, a gateway or the like. Furthermore, it may be realized as software, as hardware, as firmware or as combinations thereof. It is also possible to implement distributed software mechanisms on at least one processor unit that execute at least a portion of the steps as described herein.

An advantage of this concept is the significant reduction of number of requests for resource reservation thereby reducing the overall load throughout the network.


Another advantage is the possibility to set up a minimum bandwidth between two network elements. That may be useful from a traffic-engineering perspective, because at the time a connection is set up a useful amount of bandwidth between network elements may be unknown. The approach allows a simplified dynamic resizing of the bandwidth (during runtime of the network elements) at a later stage.

Claims:


1. A method for reserving a communication resource comprising the following steps:
 - 5 - a first network element requests a first resource for a connection to a second network element;
 - if the first resource requested is available, the first network element allocates the first resource;
 - if the first resource requested is not available, the
10 first network element allocates a resource of a reduced size.
2. The method according to claim 1, wherein the resource
15 comprises in particular an amount of at least one of the following:
 - a bandwidth;
 - a number of slots, in particular time slots and/or frequency slots;
 - a number of lines;
 - 20 - an available communication capacity over a predetermined period of time.
3. The method according to any of the preceding claims, comprising the steps:
 - 25 - if the first resource requested is not available
 - the first network element allocates a resource of a reduced size if this resource of a reduced size is larger than and/or equals a second resource,
 - otherwise, the first network element does not allo-
30 cate any resource for a connection to the second network element.
4. The method according to claim 3, wherein the request
35 from the first network element to the second network element comprises values for the first resource and the second resource.

5. The method according to any of the preceding claims,
wherein the first network element and/or the second network element are of the following type:
- a server;
 - 5 - a switch;
 - a router;
 - a gateway.
6. The method according to any of the preceding claims,
10 wherein the first network element conveys a message to the second network element comprising:
- an originating address;
 - a destination address;
 - a first resource requested;
 - 15 - a second resource that corresponds to a resource required.
7. A method for establishing a communication channel from the first network element via the second network element
20 and/or at least one additional intermediate network element to a third network element utilizing the method according to any of the preceding claims.
8. The method according to claim 7, wherein the third network element returns a third resource to the first network element, the third resource corresponding to the resource reserved.
- 25 9. The method according to any of claims 7 or 8, wherein the method is used to set up a communication channel between the first network element and the third network element, said communication channel being in particular a tunnel.
- 30 10. The method according to any of claims 7 to 9, wherein said tunnel relates to or is associated with a Virtual Private Network tunnel.
- 35

11. A device for reserving a communication resource comprising a processor unit that is arranged such that the method according to any of the preceding claims is executable on said processor unit.
- 5
12. The device according to claim 11, wherein said device is a communication device, in particular a network element.
13. The device according to any of claims 11 or 12, wherein
- 10 said device comprises at least one of the following:
- a server;
 - a switch;
 - a router;
 - a gateway.
- 15
14. Communication system comprising the device according to any of claims 11 to 13.

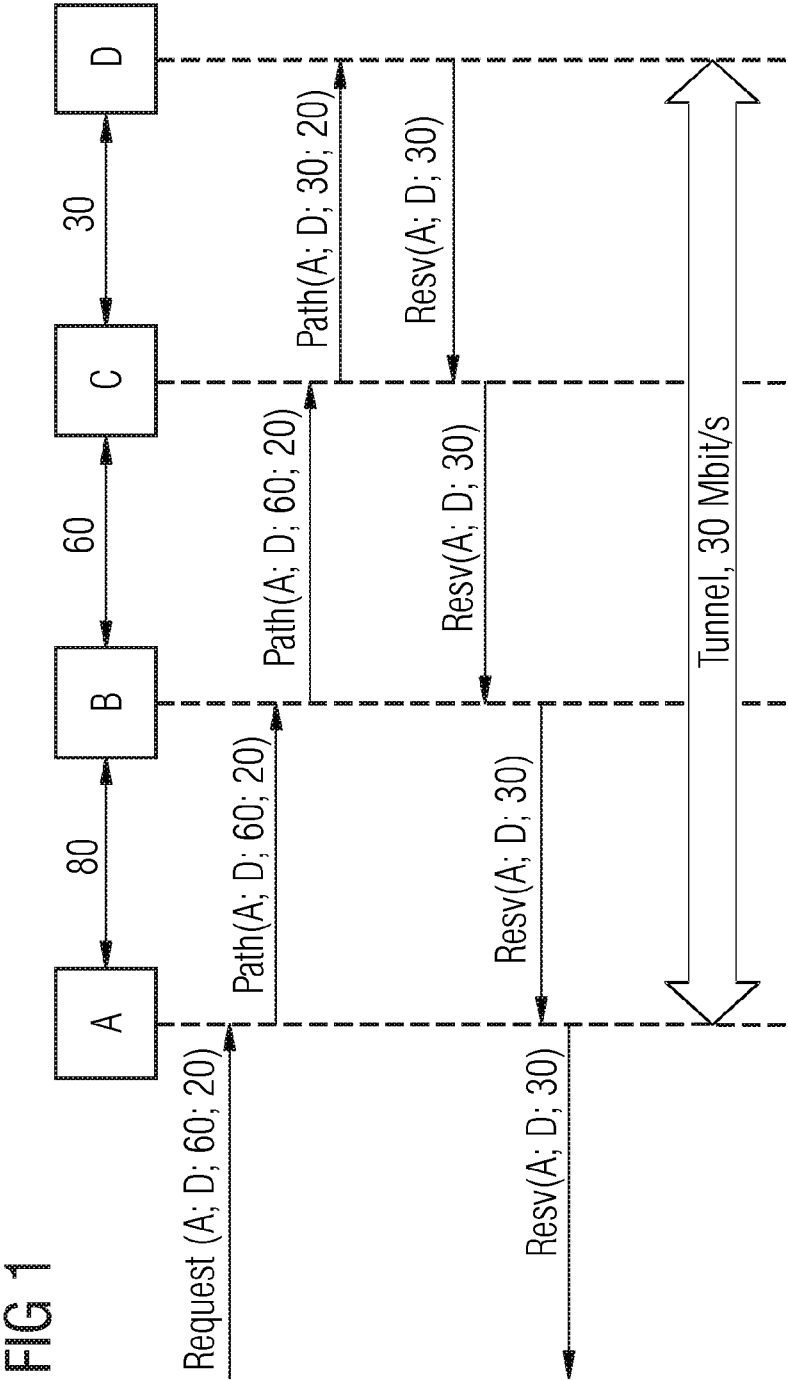

2/2

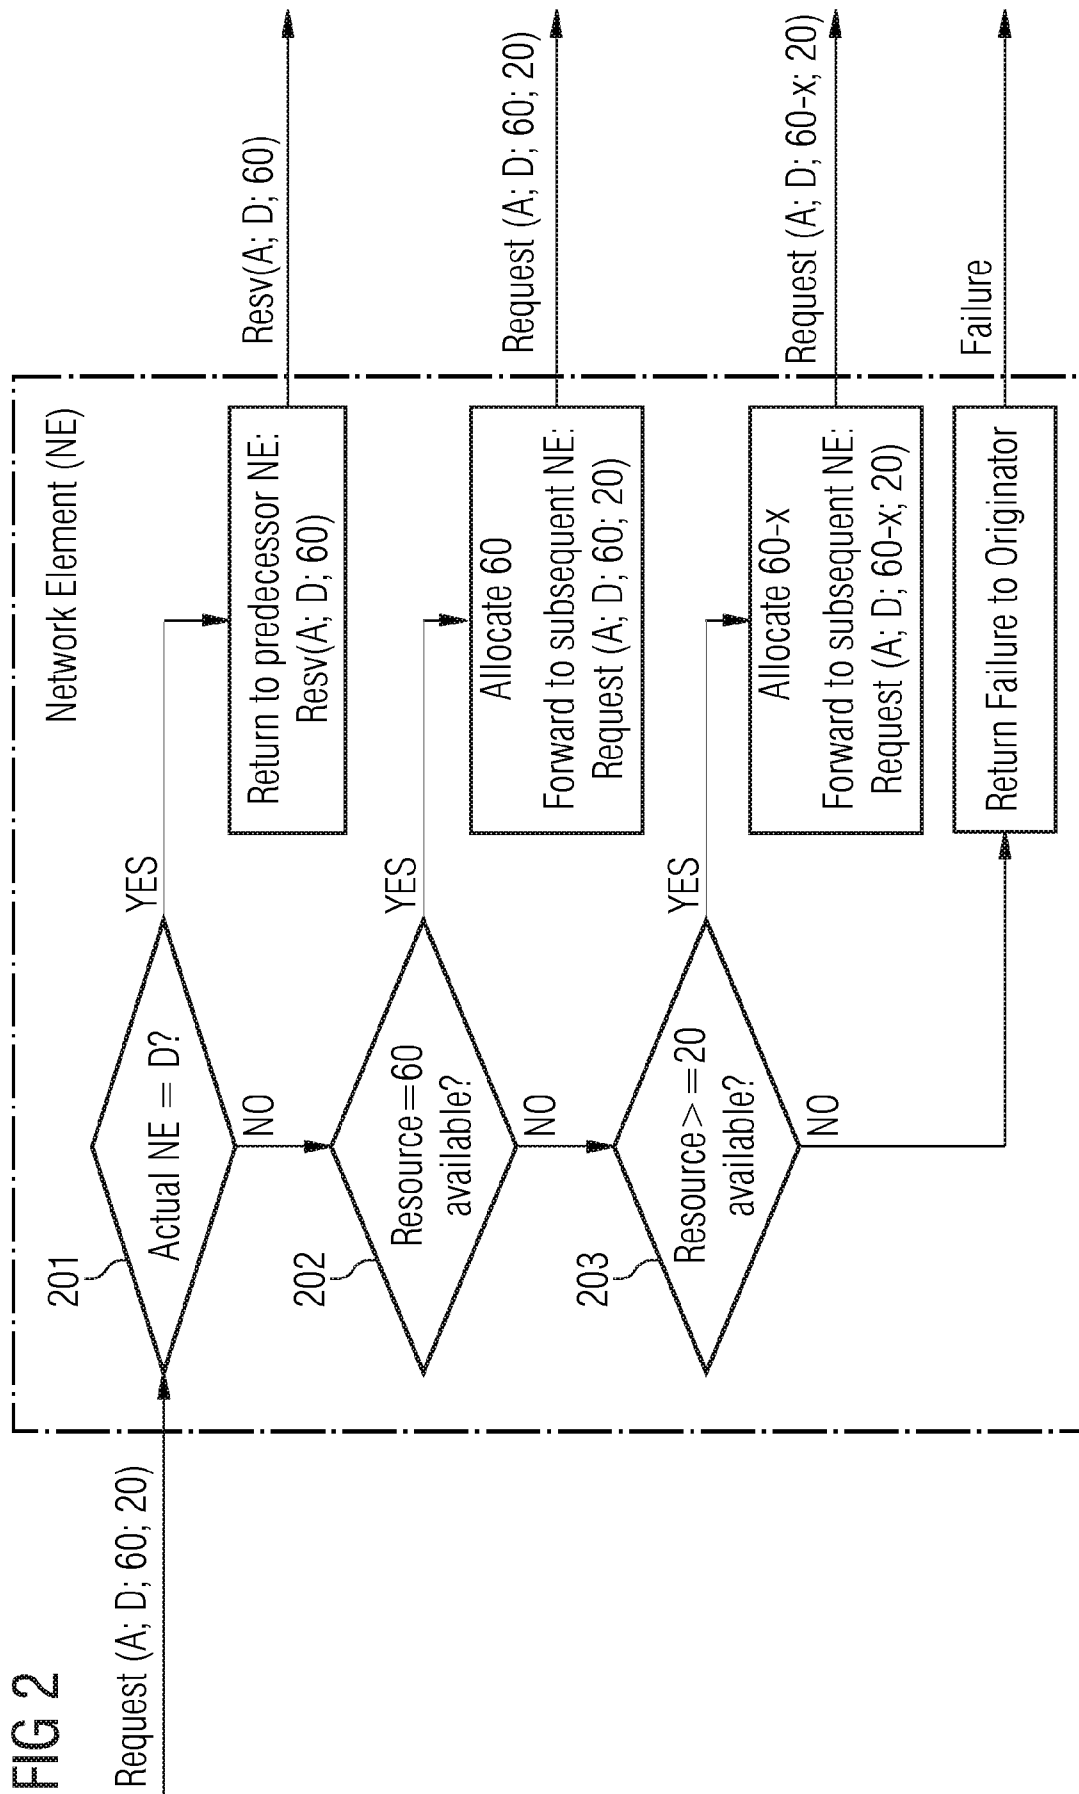

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/060349

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 324 628 A (SONY INT EUROP GMBH [DE]) 2 July 2003 (2003-07-02) abstract page 2, paragraph 1-3 page 2, paragraph 8 - page 3, paragraph 9 page 4, paragraph 15 - paragraph 21 page 5, paragraph 26 - page 6, paragraph 29 page 8, paragraph 41 - page 10, paragraph 51 page 11, paragraph 60-64 page 12, paragraph 71 - page 13, paragraph 73 page 14, paragraph 81 page 18, paragraph 100 claims 1,3-5 figures 2-8,12,13,20,21,24 ----- -/--	1-14

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 September 2008

Date of mailing of the international search report

19/09/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schrembs, Gerd

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/060349

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 876 668 B1 (CHAWLA HAMESH [US] ET AL) 5 April 2005 (2005-04-05) abstract column 2, line 31 - column 3, line 32 column 3, line 35 - column 9, line 57 column 10, line 41 - column 11, line 19 claims 1,14,27-29 figures 1,2,4,5,7	1-14
A	US 2005/180426 A1 (SAKATA YOSHIFUMI [JP] ET AL) 18 August 2005 (2005-08-18) abstract page 1, paragraph 2 page 1, paragraphs 5,8 page 1, paragraph 11 - page 2, paragraph 26 page 4, paragraph 72 - paragraph 74 page 5, paragraph 94 page 6, paragraph 98 - page 7, paragraph 109 claims 1-9 figures 1-5,9-13(f),19	1-14
A	US 2006/168337 A1 (STAHL THOMAS A [US] ET AL) 27 July 2006 (2006-07-27) abstract page 1, paragraph 2 page 1, paragraph 5-7 page 2, paragraphs 14,15,17 page 2, paragraph 19 - page 4, paragraph 28 claims 1-10,13 figures 1-3	1-14
A	CHITTARANJAN HOTA ET AL: "Distributed dynamic resource management in IPVNs to guarantee quality of service" NETWORKS, 2004. (ICON 2004). PROCEEDINGS. 12TH IEEE INTERNATIONAL CONFERENCE ON SINGAPORE 16-19 NOV. 2004, PISCATAWAY, NJ, USA, IEEE, US, 16 November 2004 (2004-11-16), pages 414-419, XP010777528 ISBN: 0-7803-8783-X abstract page 414, paragraph 1. - page 415, paragraph 1. figures 1-4 page 418, paragraph 6. - page 419, paragraph 6.	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/060349

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1324628	A	02-07-2003	CN	1426263 A	25-06-2003
			US	2003112766 A1	19-06-2003
US 6876668	B1	05-04-2005	US	2005128951 A1	16-06-2005
US 2005180426	A1	18-08-2005	CN	1658615 A	24-08-2005
US 2006168337	A1	27-07-2006	NONE		