



US 20030055485A1

(19) **United States**

(12) **Patent Application Publication**

Lee et al.

(10) **Pub. No.: US 2003/0055485 A1**

(43) **Pub. Date: Mar. 20, 2003**

(54) **STENT WITH OFFSET CELL GEOMETRY**

(22) **Filed: Sep. 17, 2001**

(75) **Inventors: Nathan T. Lee, Golden Valley, MN (US); Paul J. Thompson, New Hope, MN (US)**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup> ..... A61F 2/06**

(52) **U.S. Cl. .... 623/1.15**

Correspondence Address:

**MERCHANT & GOULD PC**

**P.O. BOX 2903**


**MINNEAPOLIS, MN 55402-0903 (US)**

(57) **ABSTRACT**

A stent defining a longitudinal axis is disclosed. A plurality of circumferential support structures are spaced-apart along the longitudinal axis. At least some of the circumferential support structures are interconnected by connection members that extend generally in a circumferential direction.

(73) **Assignee: Intra Therapeutics, Inc.**

(21) **Appl. No.: 09/955,351**

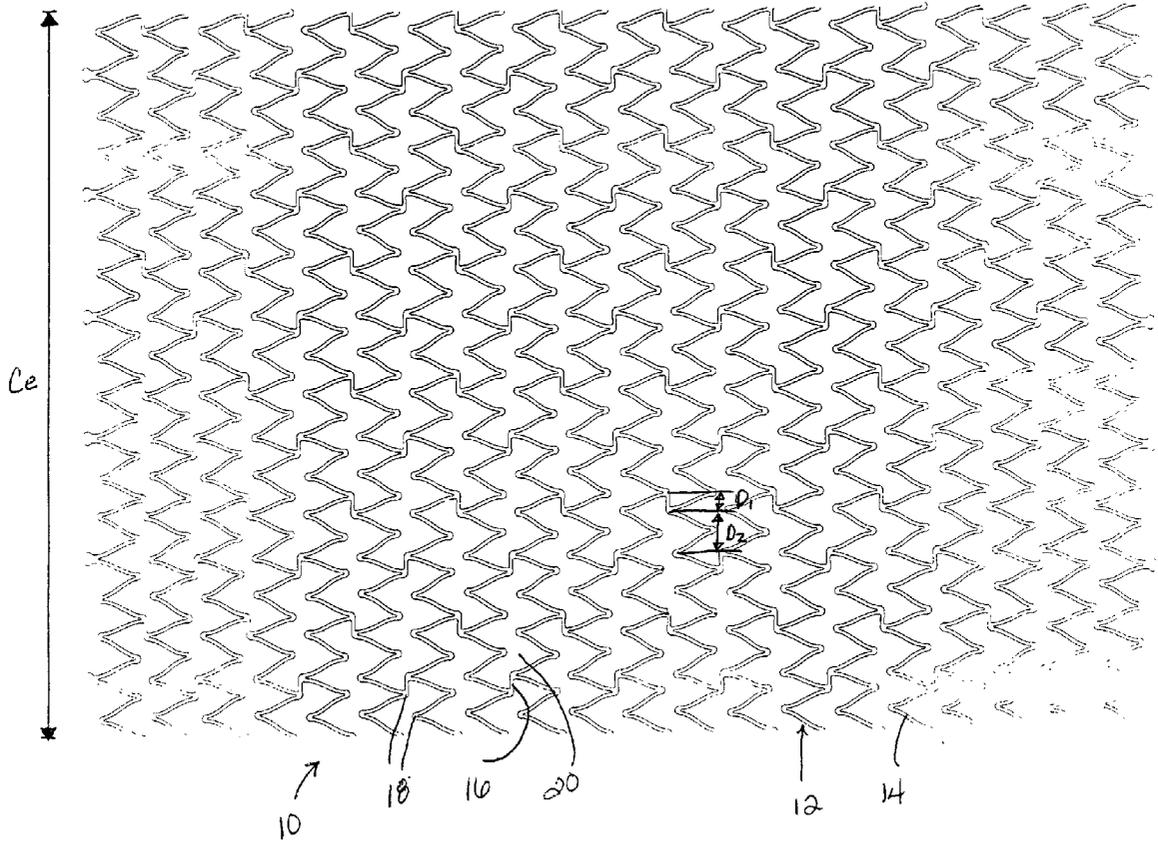

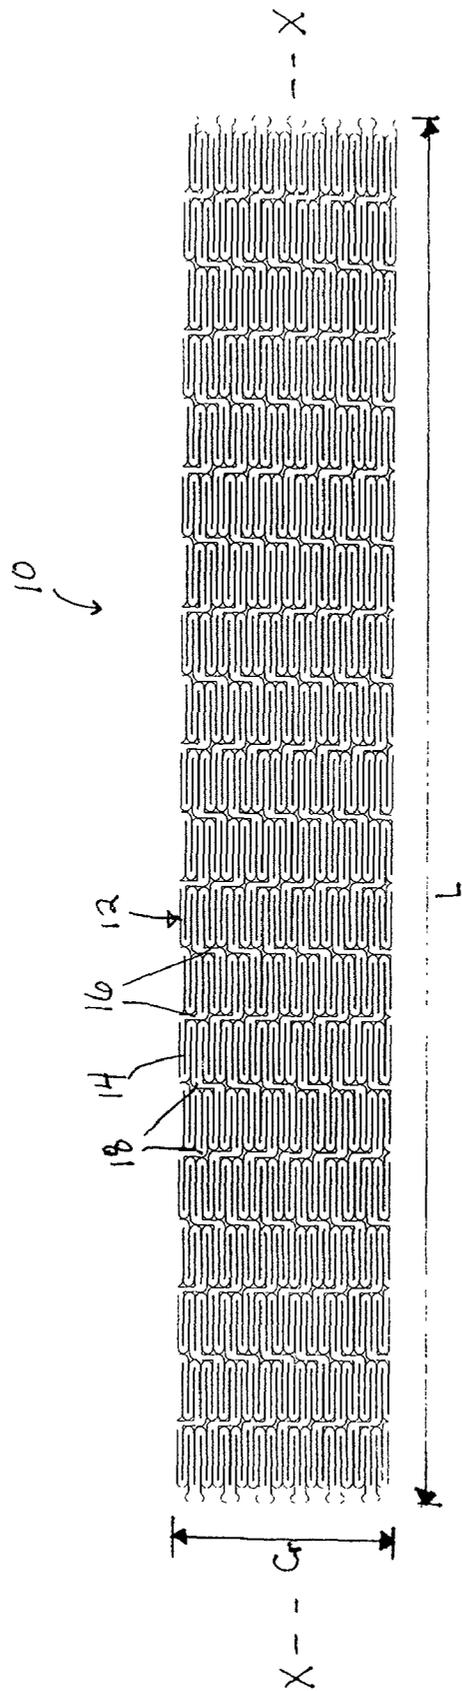


Fig. 1

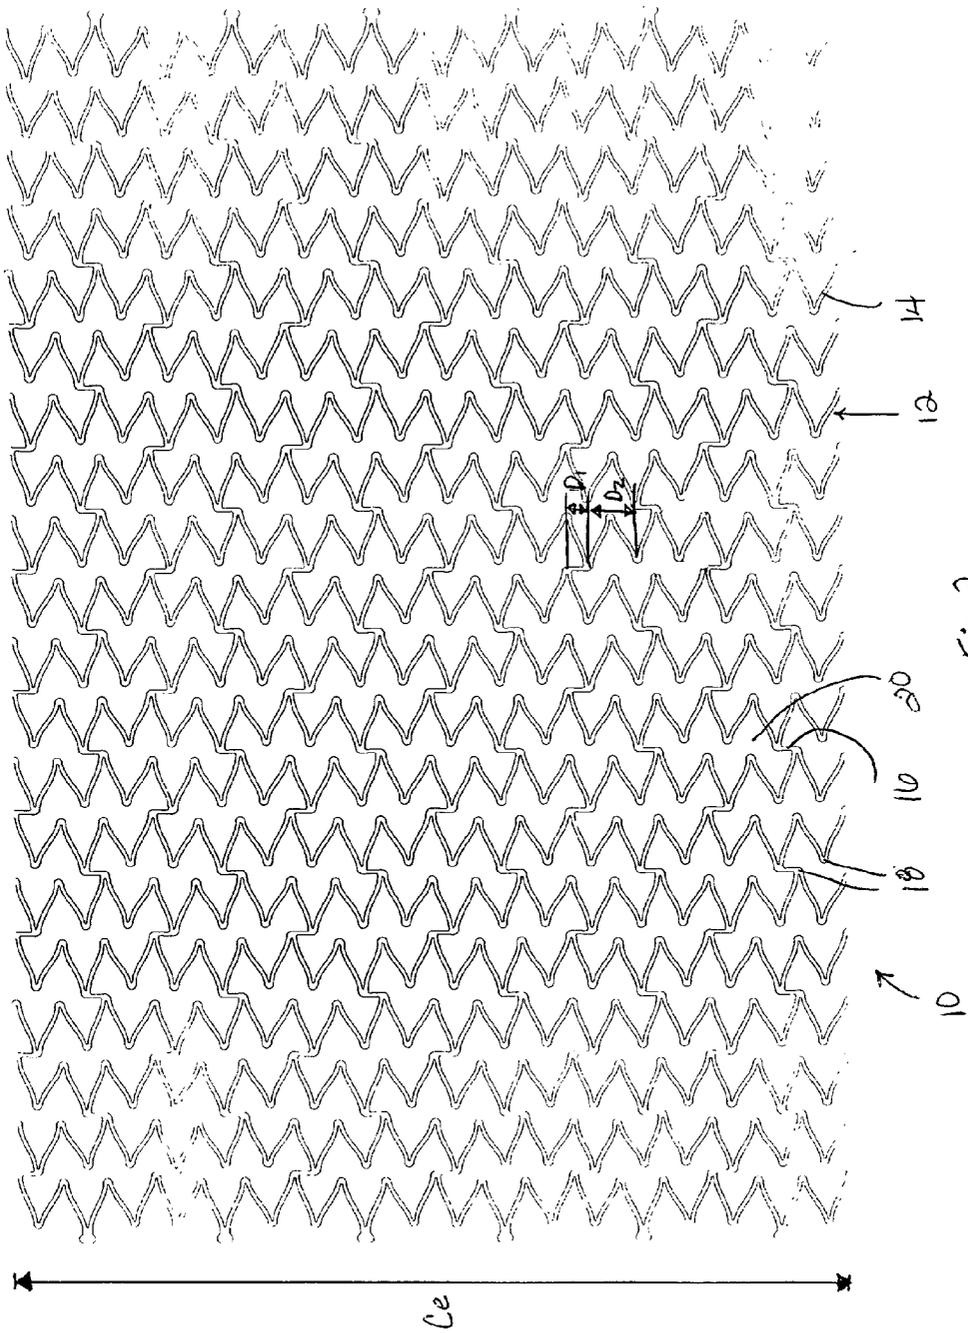


Fig. 2

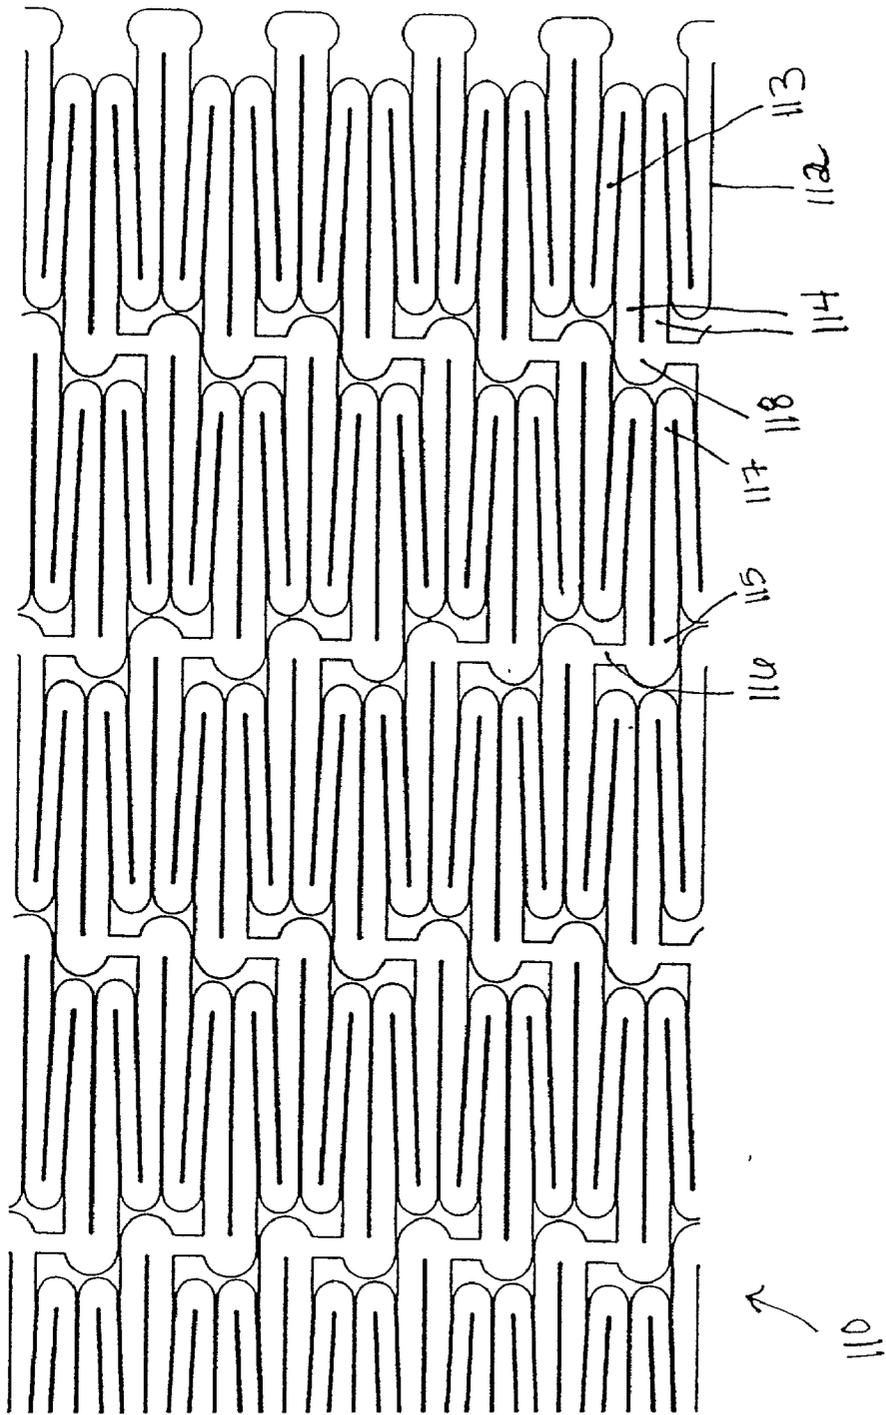


Fig. 3

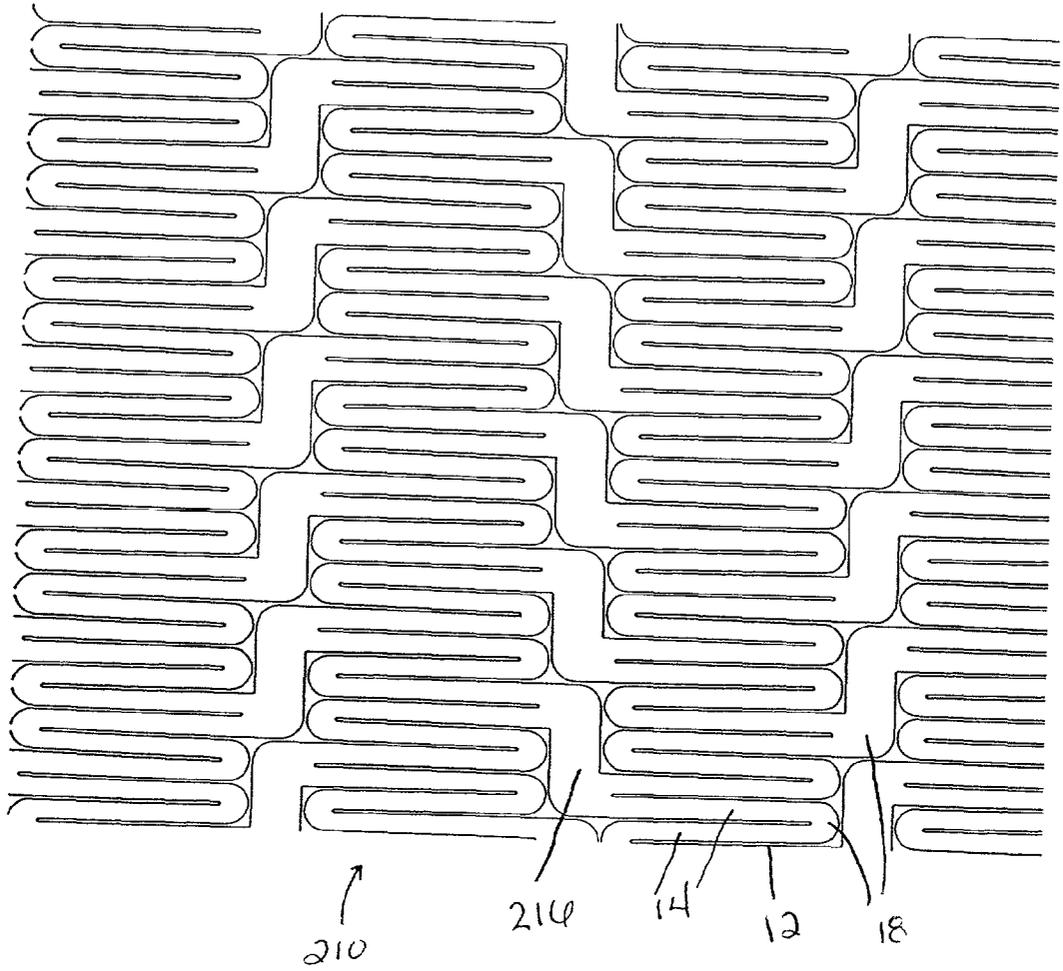
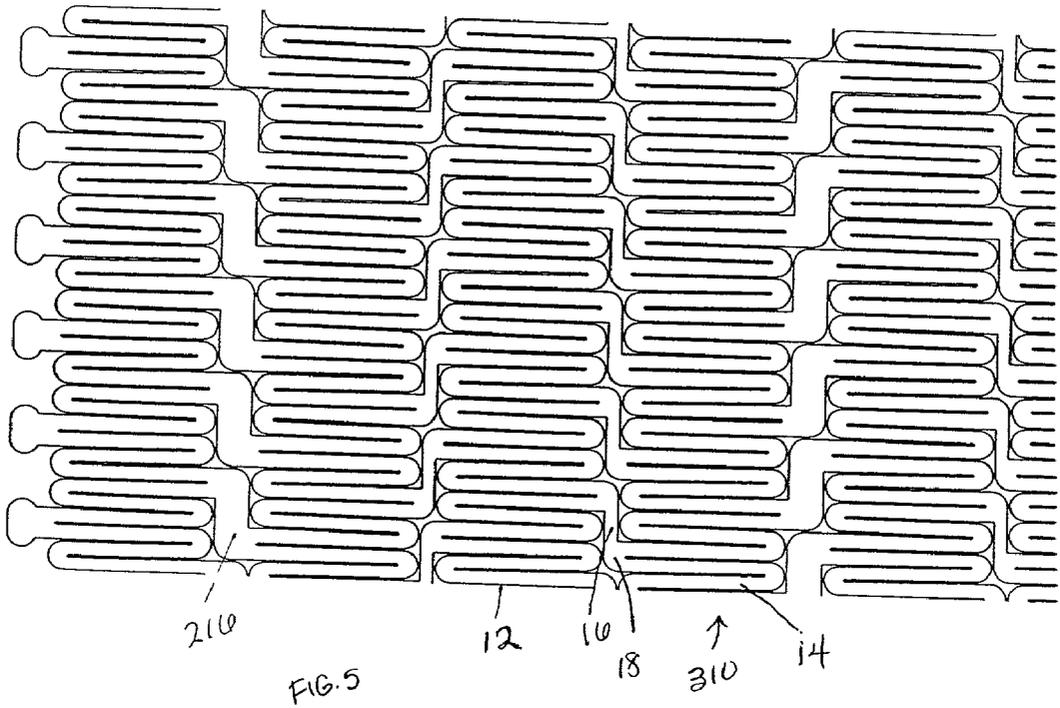
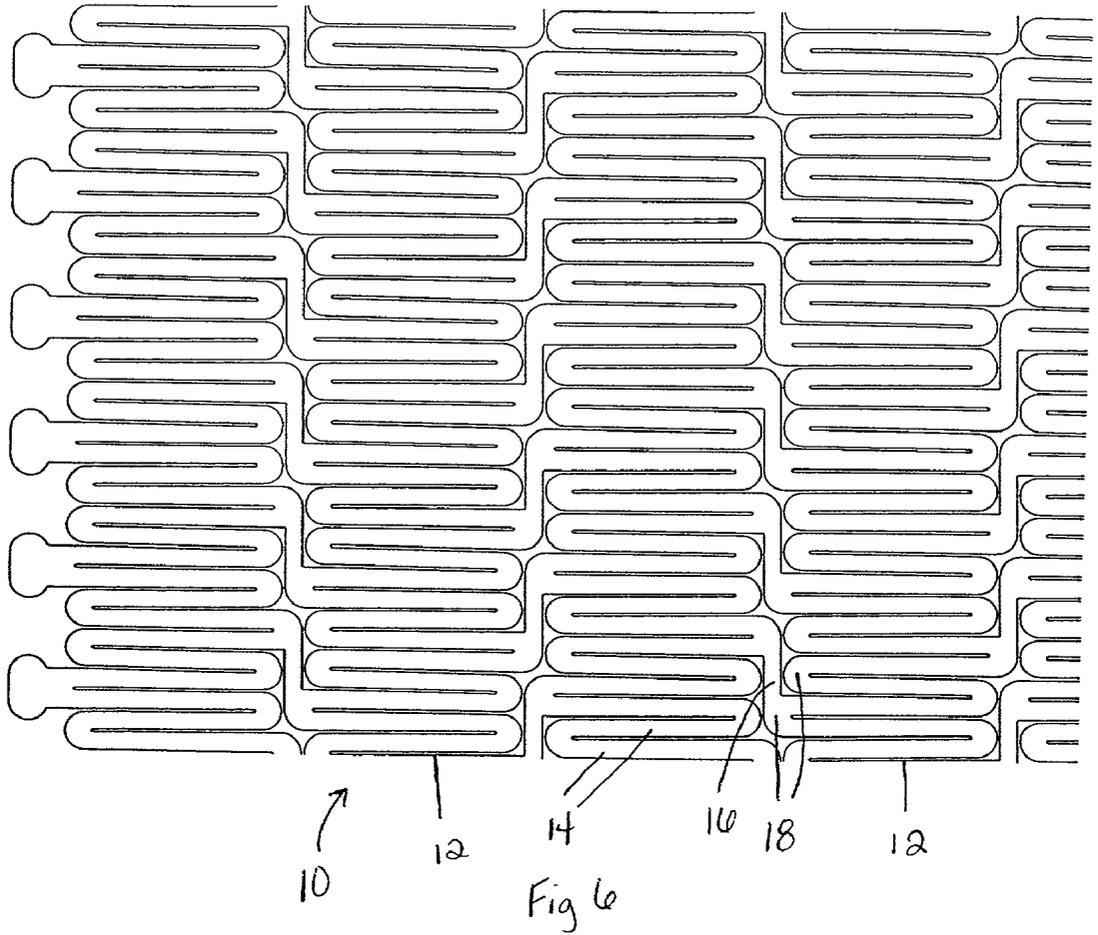


FIG. 4







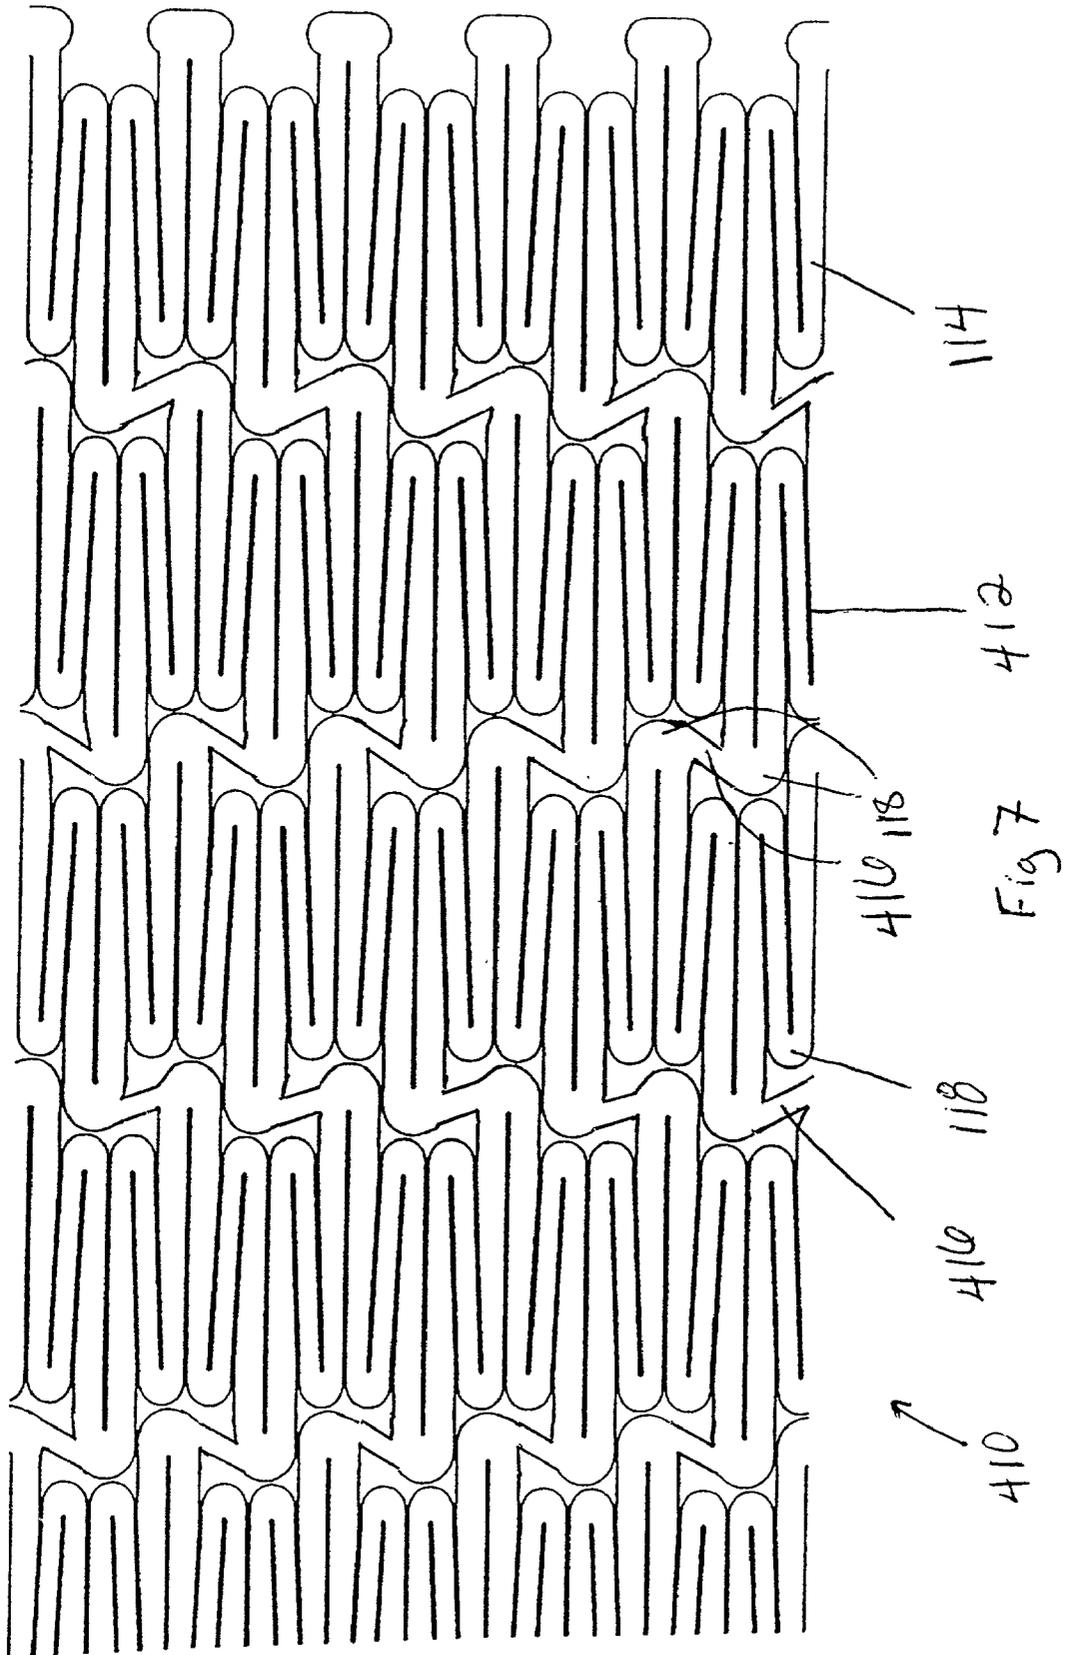


FIG. 8

510

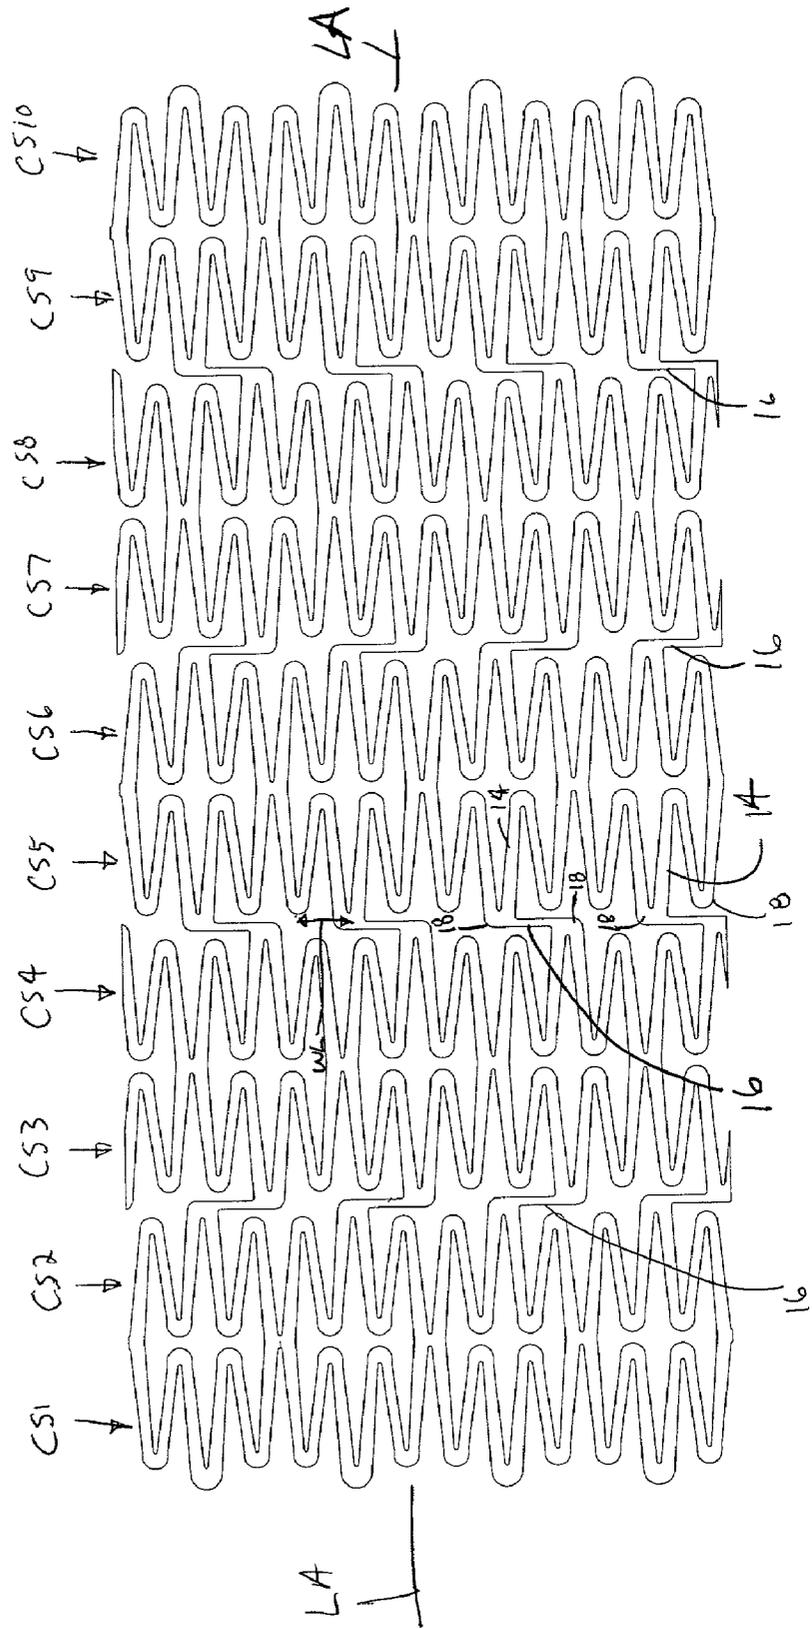

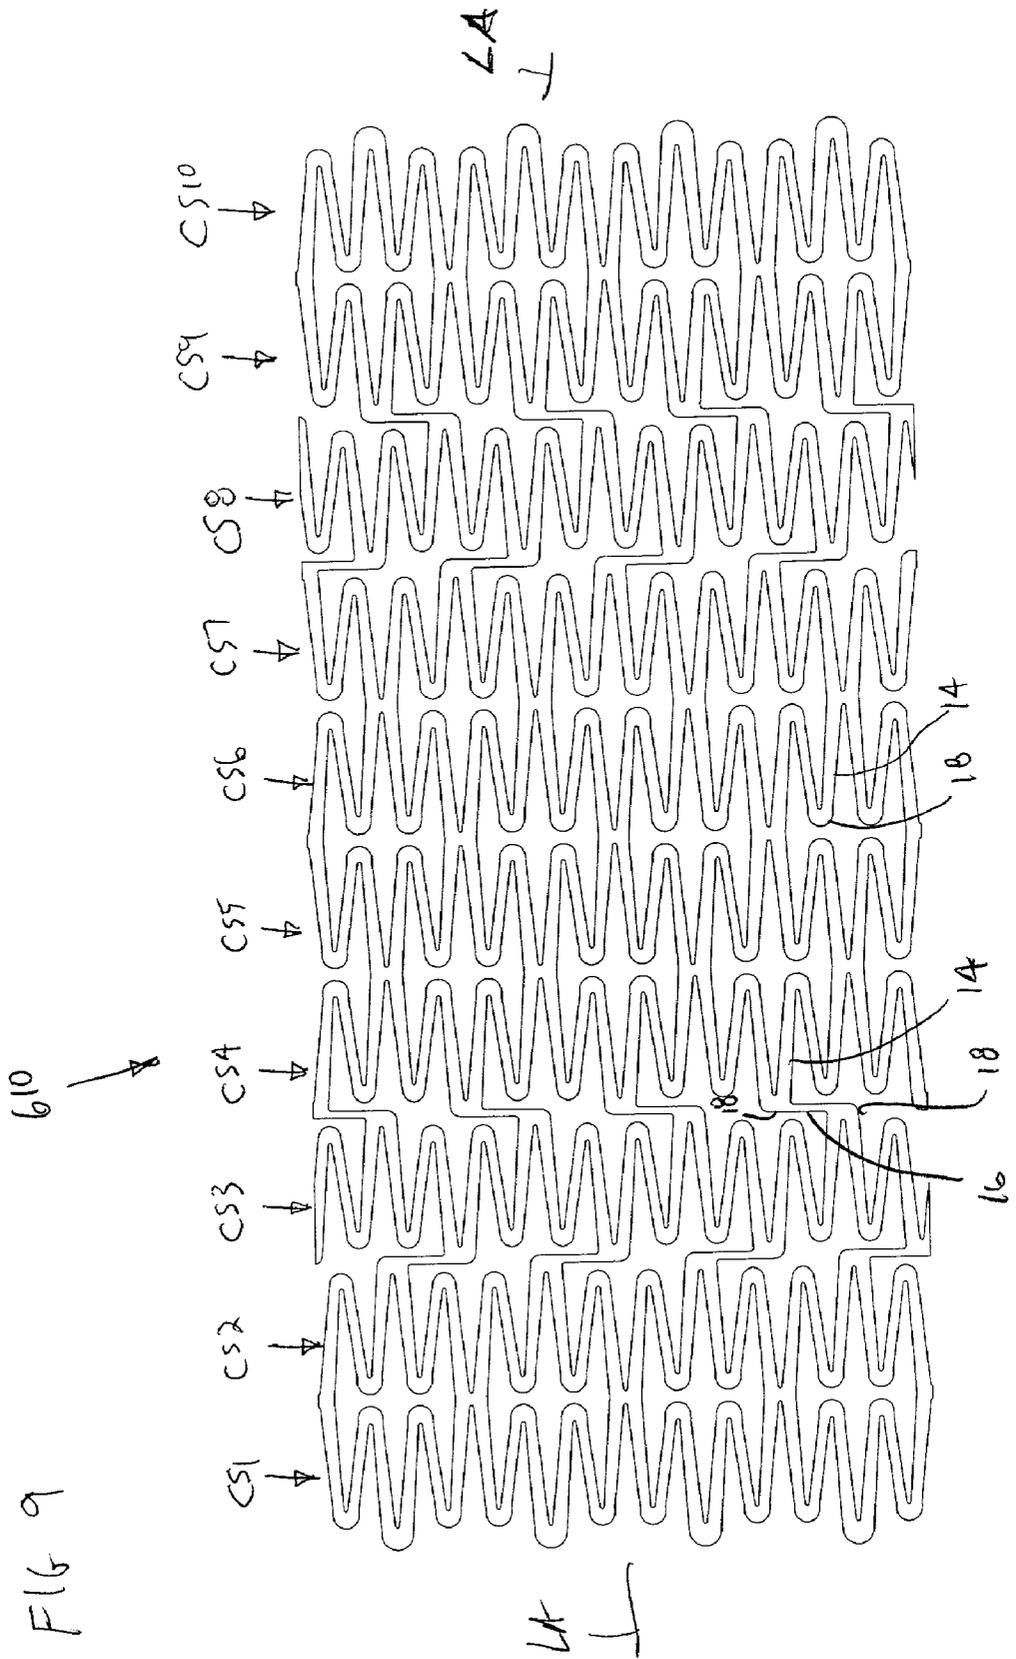

## STENT WITH OFFSET CELL GEOMETRY

### BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention pertains to implants for use in intraluminal applications. More particularly, this invention pertains to stents for use in vascular applications.

[0003] 2. Description of the Prior Art

[0004] Stents are widely used for supporting a lumen structure in a patient's body. For example, stents may be used to maintain patency of a coronary artery, other blood vessel or other body lumen.

[0005] Commonly, stents are metal, tubular structures. Stents are passed through the body lumen in a collapsed state. At the point of an obstruction or other deployment site in a body lumen, the stent is expanded to an expanded diameter to support the lumen at the deployment site.

[0006] In certain designs, stents are open-celled tubes that are expanded by inflatable balloons at the deployment site. This type of stent is often referred to as a "balloon expandable" stent and is often made of a plastically deformable material such as stainless steel. Other stents are so-called "self-expanding" stents. Self-expanding stents do not use balloons to cause the expansion of the stent. An example of a self-expanding stent is a tube (e.g., a coil tube or an open-cell tube) made of an elastically deformable material. Elastically deformable self-expanding stents are typically secured to a stent delivery device under tension in a collapsed state. At the deployment site, the stent is released so that internal tension within the stent causes the stent to self-expand to its enlarged diameter. This type of stent is often made of a "super-elastic" material such as nitinol. Other self-expanding stents are made of so-called shape-memory metals. Such shape-memory stents experience a phase change at the elevated temperature of the human body. The phase change results in expansion from a collapsed state to an enlarged state.

### SUMMARY OF THE INVENTION

[0007] One embodiment of the present invention relates to a stent having a longitudinal axis. A plurality of circumferential support structures are spaced-apart along the longitudinal axis. At least some of the circumferential support structures are interconnected by connection members that extend generally in a circumferential direction.

[0008] A variety of advantages of the invention will be set forth in part in the description that follows, and in part will be apparent from the description, or may be learned by practicing the invention. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restricted.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a plan view of a first embodiment of a stent according to the present invention as it would appear if it were longitudinally split and laid out flat.

[0010] FIG. 2 is the view of FIG. 1 following expansion of the stent.

[0011] FIG. 3 is a partial plan view of a tapered-strut stent according to the present invention as it would appear if it were longitudinally split and laid out flat.

[0012] FIG. 4 is a partial plan view of another embodiment of a stent according to the present invention as it would appear if it were longitudinally split and laid out flat.

[0013] FIG. 5 is a partial plan view of another embodiment of a stent according to the present invention as it would appear if it were longitudinally split and laid out flat.

[0014] FIG. 6 is an enlarged partial view of the stent of FIG. 1.

[0015] FIG. 7 is a partial plan view of another embodiment of a stent according to the present invention, as it would appear if it were longitudinally split and laid out flat.

[0016] FIG. 8 is a plan view of another embodiment of a stent according to the present invention, as it would appear if it were longitudinally split and laid out flat.

[0017] FIG. 9 is a plan view of another embodiment of a stent according to the present invention, as it would appear if it were longitudinally split and laid out flat.

[0018] While the invention is amenable to various modifications and alternative forms, the specifics thereof have been shown by way of example in the drawings and will be described in detail below. It is to be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the invention is intended to cover all modifications, equivalents and alternatives falling within the scope of the invention as defined by the appended claims.

### DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0019] Referring now to the several drawing figures in which identical elements are numbered identically, a description of the preferred embodiment of the present invention will now be provided. In the following detailed description, references are made to the accompanying drawings that depict various embodiments in which the invention may be practiced. It is to be understood that other embodiments may be utilized, and structural and functional changes may be made without departing from the scope of the present invention. Further, each of the features disclosed herein can be considered stand-alone inventive features or features that have inventive aspects when considered in combination with one another.

[0020] FIG. 1 illustrates a stent 10, shown longitudinally split and laid flat, having an un-deployed or reduced circumference  $C_r$  and an un-deployed length L. FIG. 6 is an enlarged partial view of FIG. 1 to better illustrate a strut geometry as will be described.

[0021] The stent 10 is a reticulated, hollow tube. The stent 10 may be expanded from the reduced circumference  $C_r$  to an expanded or enlarged circumference  $C_e$ . FIG. 2 is a view illustrating the expanded stent 10 as it would appear if longitudinally split and laid flat. The enlarged circumference  $C_e$  is shown in FIG. 2.

[0022] The material of the stent 10 defines a plurality of circumferential support structures 12 spaced apart along the longitudinal axis, X-X of the stent 10. The phrase "circum-

ferential support structures” will be understood to include structures that extend generally about the circumference of the stent **10**. The support structures **12** are formed by longitudinal struts **14**. In one embodiment, the struts **14** have uniform cross-sectional dimensions throughout their length. Adjacent struts **14** within a support structure **12** are connected at apex portions **18** to form an undulating pattern that extends about the circumference of the stent **10**. As used herein, “apex portion” is intended to mean the region where two struts **14** are joined. The apex portions **18** can be semi-circular, arcuate, pointed, square, oval, or any other shape. Adjacent support structures **12** are joined by circumferential connecting struts **16** joining apex portions **18**. The phrase “circumferential connecting struts” or “circumferential connecting members” will be understood to mean struts or members that interconnect adjacent circumferential support structures **12** and have a spacial component or vector that extends in a circumferential direction about the stent **12**. The struts **14**, apex portions **18** and connecting struts **16** form bounded areas, or cells **20**, which are open as shown in **FIG. 2** (i.e., extend through the wall thickness of the stent **10**).

[0023] The struts **14** may all be the same length, or they may be of differing length. In one embodiment, when some longer struts are present, the longer struts in adjacent support structures interconnected.

[0024] The stent **10** may be formed through any suitable means including laser or chemical milling. In such processes, a hollow cylindrical tube laser cut or etched to remove material and form the open cells **20**.

[0025] In the embodiment of **FIG. 1**, the struts **14** extend along the longitudinal axis of the stent in the un-deployed orientation (**FIGS. 1 and 6**). At least some of the apex portions **18** are configured such that, when the stent is in the un-deployed orientation, they overlap in the axial/longitudinal direction. As used herein, “overlap” is intended to mean the apex portions **18** are directly in line circumferentially, or the apex portions **18** extend past each other such that the connecting strut joining them is positioned at an angle relative to the circumference. In the embodiment illustrated in **FIGS. 1 and 6**, the overlapping apex portions **18** are directly in line circumferentially, and the connecting struts **16** are substantially perpendicular to the struts **14**. In the embodiment illustrated in **FIG. 7**, apex portions **118** extending past each other are joined by angled connecting struts **416**. The angled connecting struts **416** extend at an oblique angle with respect to the circumferential direction.

[0026] The embodiment of **FIG. 3** includes longitudinal struts **114** that are tapered, as disclosed in co-pending, commonly assigned, U.S. patent application Ser. No. 09/765,725, the entire disclosure of which is incorporated herein by reference. In the embodiment illustrated in **FIG. 3**, circumferential support structures **112** are made up of pairs of tapered struts **114** alternating with single, non-tapered struts **113**. The tapered struts **114** are arranged such that their wide ends **115** are adjacent circumferential connecting struts **116** and their narrow ends **117** are adjacent unconnected or free apex portions. In a further embodiment, the connecting struts **116** can connect only apex portions **118** joining narrow ends **117**.

[0027] To increase the radiopacity of the stent, one or more of the connecting struts can have a width greater than

the width of the longitudinal struts **14**. In the embodiment illustrated in **FIG. 4**, all connecting struts **216** are wide. Preferably, the connecting struts **216** are at least 1.25, or 2, or 3, or 4, or 5, or 6, or 7 or 8 times as wide as the strut. By way of example, the connecting struts might range from 0.01 inch to 0.050 inches in width. In the embodiment illustrated in **FIG. 5**, wide connecting struts **216** are positioned between some of the support structures **12**, and narrower connecting struts **16** are positioned between the remaining support structures **12**. Incorporating both wide connecting struts **216** and narrower connecting struts **16** in the stent can provide a customized radiopacity.

[0028] In use, the stent **10** is advanced to a site in a lumen (e.g., an occlusion site in need of circumferential support) while in the compressed orientation. The stent **10** is then expanded at the site. The stent **10** may be expanded through any conventional means. For example, the stent **10** in the reduced diameter may be placed at the tip of a balloon catheter. At the site, the stent is expanded (e.g., through expansion of the balloon) thereby causing the stent to expand from the compressed orientation to the deployed orientation. A preferred material for balloon expandable stents is stainless steel. For self-expanding stents, the stent **10** may be formed of a super-elastic or shape memory material, such as nitinol, which is an alloy of nickel and titanium.

[0029] During expansion of the stent **10**, the cells **20** open to a configuration as shown in **FIG. 2**. The expansion of the stent **10** is typically provided primarily through bending of the apex portions **18**.

[0030] The stent **10** is highly flexible. To advance to a site, the axis X-X of the stent **10** bends to navigate through a curved lumen. Further, for placement at a curved site in a lumen, the stent **10** is preferably sufficiently flexible to retain a curved shape following expansion and to bend as the lumen bends over time. The stent **10**, as described above, achieves these objections.

[0031] When bending on its axis X-X, the stent **10** tends to axially compress on the inside of the bend and axially expand on the outside of the bend. The present design permits such axial expansion and contraction. The cell geometry results in a structure that is highly flexible before and after radial expansion.

[0032] When the stent **10** is in the deployed orientation, as shown in **FIG. 2**, the apex portions **18** on adjacent support structures **12** are offset. When the stent **10** flexes and bends, the apex portions **18** and corresponding struts **14** on one support structure **12** do not come in direct contact with facing apex portions **18** and struts **14** on an adjacent support structure **12**. This offset geometry provides increased flexibility to the stent **10** and allows the stent **10** to better conform to a lumen such as a coronary vessel.

[0033] In one embodiment, as shown in **FIG. 2**, the distance of offset  $D_1$  provided by the connection member **16** is about one-half the distance  $D_2$  provided between the apex portions **18** (i.e.,  $D_1=0.5D_2$ ). Thus, adjacent circumferential support structures **12** define waves that are “in-phase” with one another. This provides a greater longitudinal spacing (i.e., in a direction corresponding to the longitudinal axis of the stent) between the peaks as compared to having the apexes being in direct opposition to one another.

[0034] Table 1 provides examples of stent diameters and examples of offset geometry based on the number of apex portions around the circumference of the stent. It is to be understood that the dimensions in Table 1 are exemplary only and are not intended to be limiting. The dimensions are applicable to a stent in the expanded or deployed orientation. The stent dimensions will be selected based on the size and location of the lumen into which the stent is to be placed. This offset geometry allows for flexion of the stent without adjacent struts directly impacting each other. The preferred geometry has the apexes of struts in one support structure in between the apexes of struts in the adjacent support structure. When the stent is flexed, the apexes pass by one another and do not impact, which allows for increased flexibility.

TABLE 1

I.D. Diameter (mm)	I.D. Diameter (inch)	Circumference (inch)	Number of apexes around Circumference	Distance between apexes around Circumference (inch)	Preferred Offset: $\frac{1}{2}$ distance between apexes around Circumference (inch)
6.25	0.246	0.773	18	0.043	0.021
7.25	0.285	0.897	18	0.050	0.025
8.25	0.325	1.020	18	0.057	0.028
9.25	0.364	1.144	18	0.064	0.032

[0035] Numerous modifications are possible. For example the stent 10 may be lined with either an inner or outer sleeve (such as polyester fabric or ePTFE) for tissue growth.

[0036] Also, the stent may be coated with radiopaque coatings such as platinum, gold, tungsten or tantalum. In addition to materials previously discussed, the stent may be formed of any one of a wide variety of previous known materials including, without limitation, MP35N, tantalum, platinum, gold, Elgiloy and Phynox.

[0037] While twenty support structures 12 are shown in FIGS. 1 and 2 connected and spaced apart along the longitudinal axis of the stent, a different number could be so connected to vary the properties of the stent 10 as a designer may elect. Likewise, while each support structure 12 in FIGS. 1 and 2 is shown as having 36 struts 14, the number of struts 14 could vary to adjust the properties of the stent. Also, while each support structure 12 is shown connected to an adjacent support structure 12 by 6 connecting struts 16, the number of connecting struts 16 could vary. In one embodiment, the stent is made up of 20 support structures, 36 struts per support structure, 18 apex portions on each side of each support structure, and 6 connecting struts joining every third apex portion of adjacent support structures. Alternating the direction of the connecting struts between support structures prevents uneven expansion angles between the struts and prevents twisting of the stent. For example, in FIG. 1, connecting struts 16 extend from one apex portion 18 down to another apex portion 18 between first and second support structures, and extend up between the second and third support structures. This alternating pattern of connecting struts is more pronounced in the embodiment with angled connecting struts 416, shown in FIG. 7.

[0038] When forming the stent from shape memory metal such as nitinol, the stent can be laser cut from a nitinol tube.

Thereafter, the stent can be subjected to a shape-setting process in which the cut tube is expanded on a mandrel and then heated. Multiple expansion and heating cycles can be used to shape-set the stent to the final expanded diameter.

[0039] In use, the finished stent can be mounted on a delivery catheter. As is conventionally known in the art, the stent can be held in a compressed orientation on the delivery catheter by a retractable sheath. As is also known in the art, the delivery catheter can be used to advance the stent to a deployment location (e.g., a constricted region of a vessel). At the deployment cite, the sheath is retracted thereby releasing the stent. Once released, the stent self-expands to the deployed diameter.

[0040] FIG. 8 shows another stent 510 that is another embodiment of the present invention. The stent 510 is shown in a configuration corresponding to the stent when the stent has been initially fabricated from a tube (i.e., before the stent has been compressed on a catheter). Similar to the previous embodiments, the stent is shown longitudinally split and laid flat for ease of explanation. The stent includes 10 circumferential support structures CS1-CS10 spaced-apart along a longitudinal axis LA of the stent 510. Longitudinal struts 14 and apex portions 18 of the support structures CS1-CS10 define an undulating pattern that extends about the circumference of the stent 510. The undulating pattern defines a wave having a wavelength WL. Alternating pairs of the adjacent support structures are interconnected by circumferential connecting struts 16. For example, support structure pairs CS2 and CS3; CS4 and CS5; CS6 and CS7; and CS8 and CS9 are interconnected by circumferential connecting struts 16. Struts 16 interconnecting structure CS2 to structure CS3 and structure CS6 to structure CS7 extend downwardly, and struts 16 interconnecting structure CS4 to structure CS5 and structure CS8 to structure CS9 extend upwardly. By alternating the direction of extension, uniform expansion is facilitated.

[0041] Circumferential support structures CS1 and CS2; CS3 and CS4; CS5 and CS6; CS7 and CS8; and CS9 and CS10 are not interconnected by circumferential connecting struts. Instead, these pairs are integrally connected to one another.

[0042] Referring again to FIG. 8, the circumferential connecting struts 16 function to offset the apexes 18 of adjacent circumferential support structures relative to one another so that the apexes do not oppose one another. By offsetting the apex portions that face toward one another, the tips are prevented from contacting one another when in the expanded state thereby enhancing the stent's ability to conform to a lumen in which the stent is implanted. In the depicted embodiment, the circumferential connecting struts 16 have a length equal to about one and one half (i.e., 1.5)

wavelengths WL. Preferably, the circumferential struts 16 have a length of at least one half (i.e., 0.5) the wavelength WL. The integrally connected pairs of circumferential support structures have apex portions 18 that oppose one another.

[0043] FIG. 9 shows a stent 610 that is another embodiment of the present invention. The stent 610 is shown in a configuration corresponding to the stent when the stent has been initially fabricated from a tube (i.e., before the stent has been compressed on a catheter). Similar to the previous embodiments, the stent is shown longitudinally split and laid flat for ease of explanation. The stent includes 10 circumferential support structures CS1-CS10 spaced-apart along a longitudinal axis LA of the stent 610. Longitudinal struts 14 and apex portions 18 of the support structures CS1-CS10 define an undulating pattern that extends about the circumference of the stent 610. Support structure pairs CS2 and CS3; CS3 and CS4; CS7 and CS8; and CS8 and CS9 are interconnected by circumferential connecting members 16. The remaining support structure pairs (i.e., pairs CS1 and CS2; CS4 and CS5; CS5 and CS6; CS6 and CS7; and CS9 and CS10) are interconnected by integrally.

[0044] In the embodiments of FIGS. 8 and 9, the circumferential connecting struts 16 are generally perpendicularly aligned relative to the apex portions 18. In other embodiments, the circumferential connecting struts 16 could be angled similar to the struts 416 of FIG. 7. In embodiments where the apex portions 18 are not longitudinally overlapped, the circumferential connecting struts could be angled in the opposite direction as compared to the struts 416 of FIG. 7.

[0045] While a preferred use for the inventive features disclosed in FIGS. 1-9 is in a self-expanding stent, the features also have benefits when used with non-self-expanding stents (e.g., balloon expandable stents made of a material such as stainless steel). Also, while FIGS. 1-9 illustrate a preferred geometry for practicing the present invention, the technique for avoiding opposing longitudinal members coming in direct contact by varying the offset positions of the struts and apex positions in a stent is also applicable to stents having other geometries, shapes, or strut patterns.

[0046] From the foregoing, the present invention has been shown in a preferred embodiment. Modifications and equivalents are intended to be included within the scope of the appended claims.

What is claimed is:

1. A stent comprising:

a stent body expandable between an un-deployed orientation and a deployed orientation, the stent body having a longitudinal axis extending between first and second open ends;

the stent body having a plurality of adjacent circumferential support structures, the circumferential support structures being spaced-apart along the longitudinal axis;

each support structure including longitudinal struts interconnected at apex portions, the longitudinal struts and apex portions defining an undulating pattern, at least some of the apex portions of adjacent circumferential support structures being configured to longitudinally overlap one another when in the un-deployed configuration;

a plurality of circumferential connecting struts interconnecting at least some of the adjacent circumferential support structures, the circumferential connecting struts extending between the apex portions that overlap one another.

2. The stent of claim 1 wherein in the deployed orientation, adjacent circumferential support structures are offset such that the apex portions on one side of a support structure are positioned intermediate the apex portions on a facing side of an adjacent support structure.

3. The stent of claim 1 wherein at least some of the circumferential connecting struts have a width greater than a width of the longitudinal struts.

4. The stent of claim 1 wherein at least some of the circumferential connecting struts have a width at least twice as great as a width of the longitudinal struts.

5. The stent of claim 1 wherein at least some of the longitudinal struts have widths that taper as the at least some longitudinal struts extend along the stent body longitudinal axis.

6. The stent of claim 5 wherein each circumferential support structure comprises pairs of tapered struts alternating with single, non-tapered struts.

7. The stent of claim 6 wherein the pairs of tapered struts are longer than the non-tapered struts.

8. The stent of claim 7 wherein the pairs of longer tapered struts are interconnected by the circumferential connecting struts.

9. The stent of claim 1 wherein the circumferential connecting struts joining first and second adjacent support structures extend in a first direction and the circumferential connecting struts joining second and third support structures extend in a second direction opposite the first direction.

10. The stent of claim 1 wherein some of the longitudinal struts are longer than other longitudinal struts, and wherein the longer longitudinal struts provide the longitudinal overlap at the apex portions.

11. The stent of claim 1 wherein the circumferential connecting struts connecting the apex portions are angled with respect to a circumferential direction.

12. The stent of claim 1 wherein the undulating pattern defines a wavelength, and wherein the circumferential connecting members are at least one half the length of the wavelength.

13. The stent of claim 1, wherein the circumferential connecting members are located between only some of the adjacent pairs of circumferential support structures.

14. The stent of claim 13, wherein some adjacent pairs of circumferential support structures have apex portions that oppose one another, and other adjacent pairs of circumferential support structures have apex portions that are offset from one another.

15. The stent of claim 13, wherein only alternating pairs of circumferential support structures are interconnected by the circumferential support structures.

16. The stent of claim 13, wherein three consecutive circumferential support structures are interconnected by the circumferential connecting members.

17. A stent comprising:

a stent body expandable between an un-deployed orientation and a deployed orientation, the stent body having a longitudinal axis extending between first and second open ends;

the stent body having a plurality of adjacent circumferential support structures, the circumferential support structures being spaced-apart along the longitudinal axis;

each support structure including longitudinal struts interconnected at apex portions, the longitudinal struts and apex portions defining an undulating pattern; and

a plurality of circumferential connecting struts interconnecting at least some of the adjacent circumferential support structures, the circumferential connecting struts extending between the apex portions of adjacent circumferential support structures, at least some of the circumferential connecting struts having a width greater than a width of the longitudinal struts.

**18.** The stent of claim 17 wherein at least some of the circumferential connecting struts have a width at least twice as great as the width of the longitudinal struts.

**19.** A stent comprising:

a stent body expandable between an un-deployed orientation and a deployed orientation, the stent body having a longitudinal axis extending between first and second open ends;

the stent body having a plurality of adjacent circumferential support structures, the circumferential support structures being spaced-apart along the longitudinal axis;

each support structure including longitudinal struts interconnected at apex portions, the longitudinal struts and apex portions defining an undulating pattern; and

a plurality of circumferential connecting struts interconnecting only some of the adjacent circumferential support structures, the circumferential connecting struts extending between the apex portions of adjacent circumferential support structures, wherein some pairs of adjacent circumferential support structures have apex portions that oppose one another, and other pairs of adjacent support structures have apex portions that are offset by the circumferential connecting struts.

**20.** The stent of claim 19, wherein only alternating pairs of circumferential support structures are interconnected by the circumferential support structures.

\* \* \* \* \*