(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
21 July 2016 (21.07.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/114869 A1

(51) International Patent Classification:
E21B 34/06 (2006.01) *E21B 17/00* (2006.01)
E21B 43/12 (2006.01)

(21) International Application Number:
PCT/US2015/064811

(22) International Filing Date:
9 December 2015 (09.12.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/596,488 14 January 2015 (14.01.2015) US

(71) Applicant: **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, Texas 77210-4740 (US).

(72) Inventors: **CASTILLO, Jose Rafael Gonzalez**; 2929 Allen Parkway, Suite 2100, Houston, TX 77019-2118 (US). **MACKLIN, Nadine**; 2929 Allen Parkway, Suite 2100, Houston, TX 77019-2118 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: FLOW CONTROL DEVICE AND METHOD

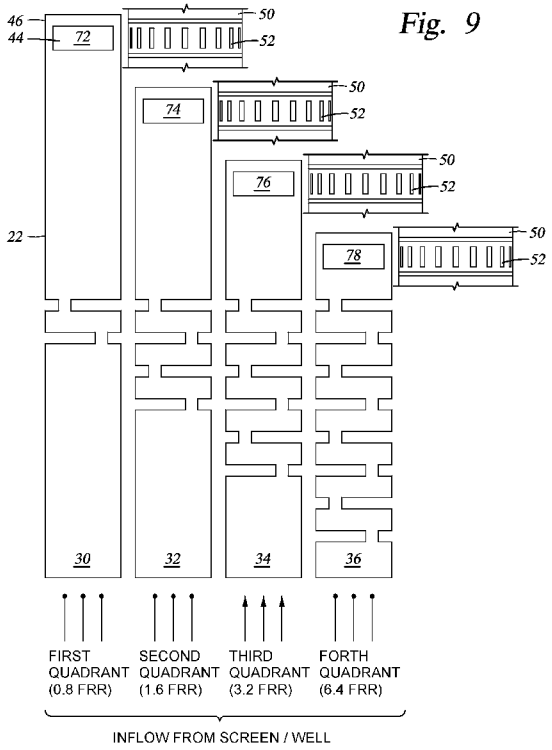


Fig. 9

(57) Abstract: A flow control device having a longitudinal axis includes an outer housing having at least one fluid inlet, a multi-channel flow member positioned radially within the outer housing, a plurality of flow channels formed between the outer housing and the flow member, at least two of the plurality of flow channels having a different flow resistance rating from each other, and a radial window formed in an outlet region of each of the plurality of flow channels. The flow control device further includes a sliding sleeve positioned radially within the multi-channel flow member, the sliding sleeve including a first section of radial slots. The first section of radial slots is configured to align with a selected radial window via longitudinal movement of the sliding sleeve with respect to the multi-channel flow member.

WO 2016/114869 A1

DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

FLOW CONTROL DEVICE AND METHOD

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Application No. 14/596488, filed on January 14, 2015, which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] In the drilling and completion industry, the formation of boreholes for the purpose of production or injection of fluid is common.

[0003] Hydrocarbons such as oil and gas are recovered from a subterranean formation using a well or wellbore drilled into the formation. In some cases the wellbore is completed by placing a casing along the wellbore length and perforating the casing adjacent each production zone (hydrocarbon bearing zone) to extract fluids (such as oil and gas) from the associated a production zone. In other cases, the wellbore may be open hole, i.e. no casing. One or more inflow control devices are placed in the wellbore to control the flow of fluids into the wellbore. These flow control devices and production zones are generally separated by packers installed between them. Fluid from each production zone entering the wellbore is drawn into a tubular that runs to the surface. It is desirable to have a substantially even flow of fluid along the production zone. Uneven drainage may result in undesirable conditions such as invasion of a gas cone or water cone. In the instance of an oil-producing well, for example, a gas cone may cause an in-flow of gas into the wellbore that could significantly reduce oil production. In like fashion, a water cone may cause an in-flow of water into the oil production flow that reduces the amount and quality of the produced oil.

[0004] A deviated or horizontal wellbore is often drilled into a production zone to extract fluid therefrom. Several inflow control devices are placed spaced apart along such a wellbore to drain formation fluid or to inject a fluid into the formation. Formation fluid often contains a layer of oil, a layer of water below the oil and a layer of gas above the oil. For production wells, the horizontal wellbore is typically placed above the water layer. The boundary layers of oil, water and gas may not be even along the entire length of the horizontal well. Also, certain properties of the formation, such as porosity and permeability, may not be the same along the well length. Therefore, fluid between the formation and the wellbore may not flow evenly through the inflow control devices. For production wellbores, it is desirable to have a relatively even flow of the production fluid into the wellbore and also to inhibit the flow of water and gas through each inflow control device. Passive inflow

control devices are commonly used to control flow into the wellbore. Such inflow control devices are set to allow a certain flow rate therethrough and then installed in the wellbore and are not designed or configured for downhole adjustments. Sometimes it is desirable to alter the flow rate from a particular zone. This may be because a particular zone has started producing an undesirable fluid, such as water or gas, or the inflow control device has clogged or deteriorated and the current setting is not adequate, etc. To change the flow rate through such passive inflow control devices, the production string is pulled out, which is very expensive and time consuming.

[0005] The art would be receptive to alternative devices and for flow control devices, and improved methods for operating such devices.

BRIEF DESCRIPTION

[0006] A flow control device having a longitudinal axis includes an outer housing having at least one fluid inlet, a multi-channel flow member positioned radially within the outer housing, a plurality of flow channels formed between the outer housing and the flow member, at least two of the plurality of flow channels having a different flow resistance rating from each other, and a radial window formed in an outlet region of each of the plurality of flow channels. The flow control device further includes a sliding sleeve positioned radially within the multi-channel flow member, the sliding sleeve including a first section of radial slots. The first section of radial slots is configured to align with a selected radial window via longitudinal movement of the sliding sleeve with respect to the multi-channel flow member.

[0007] A method of controlling flow between an annulus of a borehole and an interior of a tubing uses the flow control device and includes selecting a desired flow resistance rating amongst the plurality of flow channels, and moving the sliding sleeve longitudinally within the multi-channel flow member until the first section of slots aligns with the radial window of a flow channel having the desired flow resistance rating.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The following descriptions should not be considered limiting in any way. With reference to the accompanying drawings, like elements are numbered alike:

[0009] FIG. 1 is a schematic elevation view of an embodiment of a multi-zone wellbore that has a production string installed therein, which production string includes one

or more downhole-adjustable inflow control devices made according to an embodiment of the disclosure;

[0010] FIG. 2 shows an isometric view of a portion of passive inflow control member made according to the prior art;

[0011] FIG. 3 shows a side partial section view of an embodiment of an adjustable flow control device in a first position corresponding to a closed condition;

[0012] FIG. 4 shows a side partial section view of the adjustable flow control device of FIG. 3 in a second position;

[0013] FIG. 5 shows a side partial section view of the adjustable flow control device of FIG. 3 in a third position;

[0014] FIG. 6 shows a side partial section view of the adjustable flow control device of FIG. 3 in a fourth position;

[0015] FIG. 7 shows a side partial section view of the adjustable flow control device of FIG. 3 in a fifth position;

[0016] FIG. 8 shows a side partial section view of the adjustable flow control device of FIG. 3 in a sixth position, corresponding to an open position; and,

[0017] FIG. 9 shows a schematic diagram depicting a portion of an embodiment of a sliding sleeve positioned in relation to various flow paths of an embodiment of a multi-channel flow path tubular of the adjustable flow control device of FIG. 3.

DETAILED DESCRIPTION

[0018] A detailed description of one or more embodiments of the disclosed apparatus and method are presented herein by way of exemplification and not limitation with reference to the Figures.

[0019] Referring initially to FIG. 1, there is shown an embodiment of a production wellbore system 100 that includes a borehole 110 drilled through an earth formation 112 and into a pair of production zones or reservoirs 114, 116. The borehole 110 is shown lined with a casing having a number of perforations 118 that penetrate and extend into the formations production zones 114, 116 so that production fluids may flow from the production zones 114, 116 into the borehole 110. Alternatively, the borehole 110 may be an open borehole without a casing. The embodiment of the borehole 110 is shown to include a vertical section 110a and a substantially horizontal section 110b. The borehole 110 include a string (or assembly) 120 that includes a tubing (also referred to as the base pipe) 122 that extends downwardly from a wellhead 124 at the surface 126 of the borehole 110. The string 120 may be a

production string or a drill string. The string 120 defines an internal axial bore 128 along its length. An annulus 130 is defined between the string 120 and the borehole casing or borehole wall. The string 120 is shown to include a generally horizontal portion 132 that extends along the deviated leg or section 110b of the borehole 110. Devices 134 are positioned at selected locations along the production string 120. Optionally, each device 134 may be isolated within the borehole 110 by a pair of packer devices 136. Although only two devices 134 are shown along the horizontal portion 132, a large number of such devices 134 may be arranged along the horizontal portion 132.

[0020] Each device 134 includes a downhole-adjustable flow control device 138, as will be further described below, to govern one or more aspects of flow of one or more fluids from the zones into the string 120. The downhole-adjustable flow control device 138 may have a number of alternative structural features that provide selective operation and controlled fluid flow therethrough. As used herein, the term "fluid" or "fluids" includes liquids, gases, hydrocarbons, multi-phase fluids, mixtures of two of more fluids, water and fluids injected from the surface, such as water. Additionally, references to water should be construed to also include water-based fluids; *e.g.*, brine or salt water.

[0021] Subsurface formations typically contain water or brine along with oil and gas. Water may be present below an oil-bearing zone and gas may be present above such a zone. A horizontal borehole, such as section 110b, is typically drilled through a production zone, such as production zone 116, and may extend more than 5,000 feet in length. Once the borehole has been in production for a period of time, water may flow into some of the devices 134. The amount and timing of water inflow can vary along the length of the production zone. It is desirable to have flow control devices 138 that can be easily adjusted downhole as desired to control flow of unwanted fluids and/or to alter the flow there through for equalizing flow.

[0022] FIG. 2 shows an isometric view of an embodiment of a portion of an exemplary multi-channel inflow control device 200 according to the prior art that has been previously used in a production string and borehole. The inflow control device 200 has been included as a downhole-adjustable flow control device for controlling the flow of fluids from a reservoir into a production string. The production device that includes the inflow control device 200 may include a filtration device for reducing the amount and size of particulates entrained in the fluids and the inflow control device 200 that controls the overall drainage rate of the formation fluid into the borehole. As depicted, the inflow control device 200 is shown to include a number of structural flow sections 220a, 220b, 220c and 220d formed around a tubular member 202, each such section defining a flow channel or flow path. Each

section is configured to create a predetermined pressure drop to control a flow rate of the production fluid from the formation into the wellbore tubing. One or more of these flow paths or sections is occluded or independent (not in hydraulic communication with another section) in order to provide a selected or specified pressure drop across such sections.

[0023] As depicted, the total pressure drop across the inflow control device 200 is the sum of the pressure drops created by each active section. Structural flow sections 220a-220d are also referred to as flow channels or flow-through regions. To simplify description of the inflow control device 200, the flow control through each channel is described in reference to channel 220a. Channel 220a is shown to include an outflow region or area 212 (also referred to as "first flow region") and an inflow region 210 (also referred to as "second flow region"). Formation fluid enters the channel 220a into the inflow region 210 and exits the channel via outflow region 212. Channel 220a creates a pressure drop by channeling the flowing fluid through a flow-through region 230, which includes a plurality of flow stages or conduits, such as stages 232a, 232b, 232c and 232d. Each channel in the inflow control device 200 is shown to include a different number of stages, and each channel or stage is configured to provide an independent flow path between the inflow region and the outflow region. The channels 220a-220d are substantially hydraulically isolated from one another. That is, the flow across the channels and through the device 200 may be considered in parallel rather than in series. Thus, a production device that includes the inflow control device 200 enables flow across a selected channel while partially or totally blocking flow in the other channels. The inflow control device 200 blocks one or more channels without substantially affecting the flow across another channel. It should be understood that the term "parallel" is used in the functional sense rather than to suggest a particular structure or physical configuration.

[0024] Still referring to FIG. 2, there are shown further details of the inflow control device 200, which creates a pressure drop by conveying the in-flowing fluid through one or more of the plurality of channels 220a-220d. Each of the channels 220a-220d is formed along a wall of a base tubular or mandrel 202 and include structural features configured to control flow in a predetermined manner. The channels 220a-220d are aligned in a parallel fashion and longitudinally along the long axis of the mandrel 202. Generally, channels 220a-220d are separated from one another, for example in the region between their respective inflow and outflow regions.

[0025] The channel 220a is arranged as a maze or labyrinth structure that forms a tortuous or circuitous flow path for the fluid flowing therethrough. Each stage 232a-232d of channel 220a respectively includes a chamber 242a-242d. Openings 244a-244d hydraulically

connect chambers 242a-242d in a serial fashion. Formation fluid enters into the inflow region 210 and discharges into the first chamber 242a via port or opening 244a. The fluid then travels along a tortuous path 252a and discharges into the second chamber 242b via port 244b and so on. Each of the ports 244a-244d exhibit a certain pressure drop across the port that is a function of the configuration of the chambers on each side of the port, the offset between the ports associated therewith and the size of each port. The stage configuration and structure within determines the tortuosity and friction of the fluid flow in each particular chamber, as described herein. Different stages in a particular channel are configured to provide different pressure drops. Thus, the inflow control device 200 provides a plurality of flow paths from the formation into the tubular.

[0026] The inflow control device 200 includes a plurality of axially arranged ports 238, arranged parallel to the longitudinal axis of the inflow control device 200, provided in the mandrel 202 that allows fluid from the outflow regions 212 to pass in the longitudinal direction. Fluid flow through a particular section and into the tubular is controlled by closing ports 238 for the non-selected flow section, leaving the ports 238 open for the selected section. A tubular member (not shown) adjoins the ports and thereby exposes one or more selected ports, depending on parameters and conditions of the surrounding formation. U.S. Pat. No. 8,469,107, incorporated herein by reference in its entirety, describes a system for accessing selected ports 238 involving a rotationally indexed member, spring biased guide sleeve, and collet. The selecting of the ports 238 may also be performed at the rig site or workshop prior to deployment by plugging the non-selected ports 238.

[0027] As discussed below, a downhole-adjustable flow control device 138 is configured to enable adjustment of the flow path through a multi-channel flow member, thereby customizing the device based on formation and fluid flow characteristics. The channel or flow path is selected based on formation fluid content or other measured parameters. Turning now to FIGS. 3-8, one embodiment of the device 134 that includes the downhole-adjustable flow control device 138 is shown. The device 134 includes a longitudinal axis 12. The flow control device 138, sometimes referred to an inflow control device or "ICD," includes an outer housing 14, which may include a substantially imperforate section 16 and at least one ported or screened section 18. Radially interior to the outer housing 14 is a multi-channel flow member 20. The outer housing 14 may be fixedly secured to the exterior of the multi-channel flow member 20. The multi-channel flow member 20 includes a plurality of tortuous flow channels 22 disposed on the exterior surface 24 of the multi-channel flow member 20. Each flow channel 22 may include a number of chambers 26

interconnected by openings 28 to define a particular flow resistance rating ("FRR"). For example, a first flow channel 30 in a first quadrant of the multi-channel flow member 20 has a 0.8 FRR because fluid flowing through the first flow channel 30 experiences 0.8 Barr pressure drops; a second flow channel 32 in a second quadrant of the multi-channel flow member 20 has a 1.6 FRR; a third flow channel 34 in a third quadrant of the multi-channel flow member 20 has a 3.2 FRR; and a fourth flow channel 36 in a fourth quadrant of the multi-channel flow member 20 has a 6.4 FRR. In the illustrated embodiment of the multi-channel flow member 20, the greater FRR is simply created by having a larger number of stages/chambers 26, however the FRR could alternatively be adjusted by changing the sizes of the stages/chambers 26 and the sizes of the interconnecting openings 28. Further, while particular FRRs have been disclosed for the first through fourth flow channels 30, 32, 34, 36, it should be understood that the flow channels 22 of the multi-channel flow member 20 may have any FRR necessary for an expected borehole operation. Also, while the multi-channel flow member 20 is shown as having four quadrants and four flow channels 30, 32, 34, 36, the multi-channel flow member 20 may include any number of flow channels 22. In an alternative embodiment, instead of providing walls 38 on the exterior surface 24 of the multi-channel flow member 20 to create the flow channels 22 between the multi-channel flow member 20 and the outer housing 14, the walls 38 defining the flow channels 22 could extend from an interior surface 40 of the outer housing 14. The multi-channel flow member 20 includes at least one open or by-pass port 42 that may be arranged substantially adjacent to the screened or ported section 18 of the outer housing 14. The multi-channel flow member 20 further includes a radial window 44 positioned within an end or outlet region 46 (FIG. 9) of each flow channel 22. The sizes of the radial windows 44 may be the same or different for each flow channel 22. Also, the radial window 44 for each flow channel 22 is positioned at a longitudinal location with respect to the outer housing 14 that is different than the longitudinal locations of the radial windows 44 for the other flow channels 22. That is, the radial windows 44 are spaced longitudinally with respect to the longitudinal axis 12 of the production device 134.

[0028] The multi-channel flow member 20 is fixedly secured, such as via a threaded section or otherwise, to tubular sections of the string 120, such as tubing 122. Radially interior to the multi-channel flow member 20 and tubing 122 is a sliding sleeve 50. The sleeve 50 includes at least a first section of radial slots 52 and a second section of radial slots 54. Each section 52, 54 of radial slots is framed by a pair of seals 56, such as, by not limited to, chevron seal stacks. Movement of the sleeve 50 in opposing longitudinal directions 58, 60

(such as downhole or uphole directions) aligns the first and second sections of radial slots 52, 54 with either an imperforate portion 62 of the multi-channel flow member 20, one of the radial windows 44, or the by-pass port 42. It should be understood that while the view of the downhole-adjustable flow control device 138 is rotated 90 degrees to depict the different quadrants of the device 138 in FIGS. 3-8, no physical rotation of the device 138 or any of its components is required to select one of the flow channels 44. On the contrary, only a longitudinal movement of the sliding sleeve 50 is required. Longitudinal movement of the sliding sleeve 50 may be mechanically accomplished using a wireline tool or slickline tool, coiled tubing or tractor, or may be accomplished using hydraulic activation or electrical activation.

[0029] FIG. 3 demonstrates a closed condition of the downhole-adjustable flow control device 138. A first end 64 of the sliding sleeve 50 may abut with a first shoulder 66 in the tubing 122 to prevent the sliding sleeve 50 from misaligning with the respect to the multi-channel flow member 20, and to provide an indication of positioning of the sliding sleeve 50 within the multi-channel flow member 20. With the sliding sleeve 50 in the first position, such as, but not limited to, an end position, the radial windows 44 of the flow channels 22 of the multi-channel flow member 20, as well as the bypass port 42, are blocked from fluid communication with an interior of the sliding sleeve 50 and production device 134 by imperforate (solid-walled) sections 68 of the sliding sleeve 50. Likewise, the first and second sections of radial slots 52, 54 of the sliding sleeve 50 are blocked from fluid communication with the flow channels 22 between the multi-channel flow member 20 and outer housing 14 by imperforate (solid-walled) sections 62 of the multi-channel flow member 20. Thus, when the sliding sleeve 50 is in the first position shown in FIG. 3, the downhole-adjustable flow control device 138 is in the closed condition and fluid entering the flow channels 22 of the multi-channel flow member 20 through the screened or ported section 18 of the outer housing 14 is prevented from entering the interior 70 of the production device 134. In the closed position, the assembly behaves as a solid tubing, or solid working drilling string enabling drilling with the ICD assembly, tool testing, packer settings, hole cleaning, and other downhole operations.

[0030] By longitudinally moving the sliding sleeve 50 in direction 58 to a second position as shown in FIG. 4, the first section of radial slots 52 of the sliding sleeve 50 are aligned or at least substantially aligned with the first radial window 72 of the first flow channel 30, while the second section of radial slots 54 of the sliding sleeve 50 are blocked from fluid communication with the flow channels 22 by imperforate sections 62 of the multi-

channel flow member 20. Also, the remainder of the radial windows 74, 76, 78 of the second through fourth flow channels 32, 34, 36, as well as the bypass port 42, are blocked from fluid communication with the interior 70 of the production device 134 by imperforate sections 68 of the sliding sleeve 50. In the second position, fluids passing into the multi-channel flow member 20 through the screened section 18 of the outer housing 14 are only allowed to enter the interior 70 of the production device 134 through the first radial window 72 and thus enter under the first flow resistance rating, e.g. 0.8 FRR. The downhole-adjustable flow control device 138 may include one or more position indicators 80 to provide an indication to an operator or mechanical system that the second position has been reached. Such position indicators 80 may protrude radially inward from the tubing 122 or from a tubular shaped segment 81, interconnecting the tubing 122 to the flow member 20. The position indicators 80 may provide a physical indication to an operator that a particular position has been reached, but further movement of the sleeve 50 is not prohibited with a set amount of force applied to the sleeve 50 relative to the flow member 20, segment 81, and tubing 122. Alternate position indicators 80 may also be incorporated.

[0031] By longitudinally moving the sliding sleeve 50 in direction 58 to a third position as shown in FIG. 5, the first section of radial slots 52 of the sliding sleeve 50 are aligned or at least substantially aligned with the radial window 74 of the second flow channel 32, while the second section of radial slots 54 of the sliding sleeve 50 are blocked from fluid communication with the flow channels 22 by imperforate sections 62 of the multi-channel flow member 20. Also, the remainder of the radial windows 72, 76, 78 of the first, third, and fourth flow channels 30, 34, 36, as well as the bypass port 42, are blocked from fluid communication with the interior 70 of the production device 134 by imperforate sections 68 of the sliding sleeve 50. In the third position, fluids passing into the multi-channel flow member 20 through the screened section 18 of the outer housing 14 are only allowed to enter the interior 70 of the production device 134 through the second radial window 74 and thus enter under the second flow resistance rating, e.g. 1.6 FRR. The downhole-adjustable flow control device 138 may include a position indicator 80 or stop to provide an indication to an operator or mechanical system that the third position has been reached.

[0032] By longitudinally moving the sliding sleeve 50 in direction 58 to a fourth position as shown in FIG. 6, the first section of radial slots 52 of the sliding sleeve 50 are aligned or at least substantially aligned with the radial window 76 of the third flow channel 34, while the second section of radial slots 54 of the sliding sleeve 50 are blocked from fluid communication with the flow channels 22 by imperforate sections 62 of the multi-channel

flow member 20. Also, the remainder of the radial windows 72, 74, 78 of the first, second, and fourth flow channels 30, 32, 36, as well as the bypass port 42, are blocked from fluid communication with the interior 70 of the production device 134 by imperforate sections 68 of the sliding sleeve 50. In the fourth position, fluids passing into the multi-channel flow member 20 through the screened section 18 of the outer housing 14 are only allowed to enter the interior 70 of the production device 134 through the third radial window 76 and thus enter under the third flow resistance rating, e.g. 3.2 FRR. The downhole-adjustable flow control device 138 may include a position indicator or stop to provide an indication to an operator or mechanical system that the fourth position has been reached.

[0033] By longitudinally moving the sliding sleeve 50 in direction 58 to a fifth position as shown in FIG. 7, the first section of radial slots 52 of the sliding sleeve 50 are aligned or at least substantially aligned with the radial window 78 of the fourth flow channel 36, while the second section of radial slots 54 of the sliding sleeve 50 are blocked from fluid communication with the flow channels 22 by imperforate sections 62 of the multi-channel flow member 20. Also, the remainder of the radial windows 72, 74, 76 of the first, second, and third flow channels 30, 32, 34, as well as the bypass port 42, are blocked from fluid communication with the interior 70 of the production device 134 by imperforate sections 68 of the sliding sleeve 50. In the fifth position, fluids passing into the multi-channel flow member 20 through the screened section 18 of the outer housing 14 are only allowed to enter the interior 70 of the production device 134 through the fourth radial window 78 and thus enter under the fourth flow resistance rating, e.g. 6.4 FRR. The downhole-adjustable flow control device 138 may include a position indicator or stop to provide an indication to an operator or mechanical system that the fifth position has been reached.

[0034] By longitudinally moving the sliding sleeve in direction 58 to a sixth position, such as an end position, as shown in FIG. 8, the first section of radial slots 52 of the sliding sleeve 50 are blocked from the radial windows 72, 74, 76, 78 of the first through fourth flow channels 30, 32, 34, 36, while the second section of radial slots 54 of the sliding sleeve 50 are aligned, or at least substantially aligned, with the bypass ports 42, which in turn is substantially aligned with the screened section 18 of the outer housing 14. In the sixth position, fluids passing into the multi-channel flow member 20 through the screened or ported section 18 of the outer housing 14 enter the interior 70 of the production device 134, bypassing the flow channels 22 of the downhole-adjustable flow control device 138. Thus, the sixth position may be considered an open or by-pass position since all of the FRR radial windows 72, 74, 76, 78 are closed and the fluid from the formation can go through to the

interior 70 of the production device 134 by-passing the FRR channels 22. In this position, production from a formation is not resisted, or any treatment (e.g. fluid injection) can be performed as the flow control device 138 is by-passed. A second shoulder 82 may be provided in the tubing 122 such that the sliding sleeve 50 is stopped with respect to the multi-channel flow member 20 to ensure that the alignment of the second section of radial slots 54 with the by-pass port 42 is achieved and maintained as desired.

[0035] With reference to FIG. 9, an embodiment of the tortuous paths of the first through fourth flow channels 30, 32, 34, 36 is shown in relation to a portion of the sliding sleeve 50 having the first section of radial slots 52. FIG. 9 demonstrates how the first through fourth radial windows 72, 74, 76, 78 are longitudinally spaced from each other, so that only one of the flow channels 30, 32, 34, 38 is communicated with at one time by the first section of radial slots 52. Also, in the illustrated embodiment (see FIGS. 3-8), movement in one direction 58 increases the flow resistance of fluid entering the flow control device 138 from one flow channel 22 to the next, while movement in the opposite direction 60 decreases the flow resistance of fluid entering the flow control device 138 from one flow channel 22 to the next.

[0036] Thus, in an embodiment of the invention, an adjustable downhole active inflow control device ("ICD") 138 conforms to a completion hook-up and is usable to change the flow rate in particular flow zones starting or producing undesirables fluids without pulling a production string 120 out from the hole 110. The ICD 138 includes an axially movable sleeve 50 having positive position indicators 80 and radially flow open ports 54 enclosed between, but not limited to, chevron seal stacks 56 alignable to particular flow restrictor ports 72 of the inner tubular that lead to a multi-channel flow member 20 choking the flow. In another embodiment of the invention, both inner tubular 20 and sliding sleeve 50 open (FIG. 8) and close (FIG. 3) formation-borehole communication enabling hydraulic tool testing, packers setting, gravel packing, stimulation or fracturing without compromising the multi-channel integrity of the flow channels 22. Advantages, features and benefits of the invention further rely on the potential installation of a drilling hook-up to substantially reduce rig time for this particular application and from the included drawings, description and claims.

[0037] The teachings of the present disclosure may be used in a variety of well operations. These operations may involve using one or more treatment agents to treat a formation, the fluids resident in a formation, a wellbore, and / or equipment in the wellbore, such as production tubing. The treatment agents may be in the form of liquids, gases, solids, semi-solids, and mixtures thereof. Illustrative treatment agents include, but are not limited to,

fracturing fluids, acids, steam, water, brine, anti-corrosion agents, cement, permeability modifiers, drilling muds, emulsifiers, demulsifiers, tracers, flow improvers etc. Illustrative well operations include, but are not limited to, hydraulic fracturing, stimulation, tracer injection, cleaning, acidizing, steam injection, water flooding, cementing, etc.

[0038] While the invention has been described with reference to an exemplary embodiment or embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the claims. Also, in the drawings and the description, there have been disclosed exemplary embodiments of the invention and, although specific terms may have been employed, they are unless otherwise stated used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention therefore not being so limited. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced item.

CLAIMS

What is claimed is:

1. A flow control device (138) having a longitudinal axis (12) and comprising:

an outer housing (14) having at least one fluid inlet (18);

a multi-channel flow member (20) positioned radially within the outer housing (14), a plurality of flow channels (22) formed between the outer housing (14) and the flow member (20), at least two of the plurality of flow channels (22) having a different flow resistance rating from each other, and a radial window (44) formed in an outlet region of each of the plurality of flow channels (22); and,

a sliding sleeve (50) positioned radially within the multi-channel flow member (20), the sliding sleeve (50) including a first section of radial slots (52);

wherein the first section of radial slots (52) is configured to align with a selected radial window (44) via longitudinal movement of the sliding sleeve (50) with respect to the multi-channel flow member (20).

2. The flow control device (138) of claim 1, wherein the fluid inlet (18) in the outer housing (14) is screened.

3. The flow control device (138) of claim 1, wherein, when the first section of radial slots (52) is misaligned from each radial window (44), fluid communication between the fluid inlet (18) and an interior (70) of the sliding sleeve (50) is prevented.

4. The flow control device (138) of claim 1, wherein the multi-channel flow member (20) further comprises a by-pass port (42) substantially aligned with the fluid inlet (18), the sliding sleeve (50) longitudinally movable to fluidically communicate the by-pass port (42) with an interior (70) of the sliding sleeve (50).

5. The flow control device (138) of claim 4, wherein the sliding sleeve (50) includes a second section of radial slots (54) longitudinally spaced from the first section of radial slots (52), and the second section of radial slots (54) is configured to align with the by-pass port (42) when the first section of radial slots (52) is misaligned from each radial window (44).

6. The flow control device (138) of claim 1, wherein the outer housing (14) and the multi-channel flow member (20) are longitudinally fixed relative to each other.

7. The flow control device (138) of claim 1, wherein each radial window (44) in the at least two of the plurality of flow channels (22) is longitudinally spaced from each other.

8. The flow control device (138) of claim 1, wherein the first section of radial slots (52) is framed by a pair of seal assemblies (56).

9. The flow control device (138) of claim 1, wherein each flow channel (22) has a flow path in an axial direction with unique flow properties relative to other flow channels (22) and wherein only one of the plurality of flow channels (22) is fluidically communicable with an interior (70) of the sliding sleeve (50) at a time.

10. The flow control device (138) of claim 1, further comprising a plurality of longitudinally spaced indicators (80) configured to provide an indication when the first section of radial slots (52) aligns with each radial window (44).

11. A method of controlling flow between an annulus (130) of a borehole (110) and an interior (70) of a tubing (122) comprising:

using a flow control device (138) having a longitudinal axis (12); an outer housing (14) having at least one fluid inlet (18), a multi-channel flow member (20) positioned radially within the outer housing (14), a plurality of flow channels (22) formed between the outer housing (14) and the flow member (20), at least two of the plurality of flow channels (22) having a different flow resistance rating from each other, and a radial window (44) formed in an outlet region of each of the plurality of flow channels (22); and a sliding sleeve (50) positioned radially within the multi-channel flow member (20), the sliding sleeve (50) including a first section of radial slots (52); and the first section of radial slots (52) is configured to align with a selected radial window (44) via longitudinal movement of the sliding sleeve (50) with respect to the multi-channel flow member (20);

selecting a desired flow resistance rating amongst the plurality of flow channels (22); and,

moving the sliding sleeve (50) longitudinally within the multi-channel flow member (20) until the first section of slots (52) aligns with the radial window (44) of a flow channel (22) having the desired flow resistance rating.

12. The method of controlling flow of claim 11, further comprising engaging the sliding sleeve (50) with an indicator (80) when the first section of slots (52) is aligned with each radial window (44).

13. The method of controlling flow of claim 11, further comprising moving the sliding sleeve (50) to misalign the first section of slots (52) with each of the radial windows (44) to prevent fluid communication between the interior (70) of the sliding sleeve (50) and the fluid inlet (18).

14. The method of controlling flow of claim 11, further comprising by-passing the flow channels (22) by aligning a second section of slots (54) with a by-pass port (42) in the multi-channel flow member (20).

15. The method of controlling flow of claim 14, further comprising treating the annulus (130) through the second section of slots (54), by-pass port (42), and fluid inlet (18), wherein treating includes at least one of hydraulic fracturing, stimulation, tracer injection, cleaning, acidizing, steam injection, water flooding, and cementing.

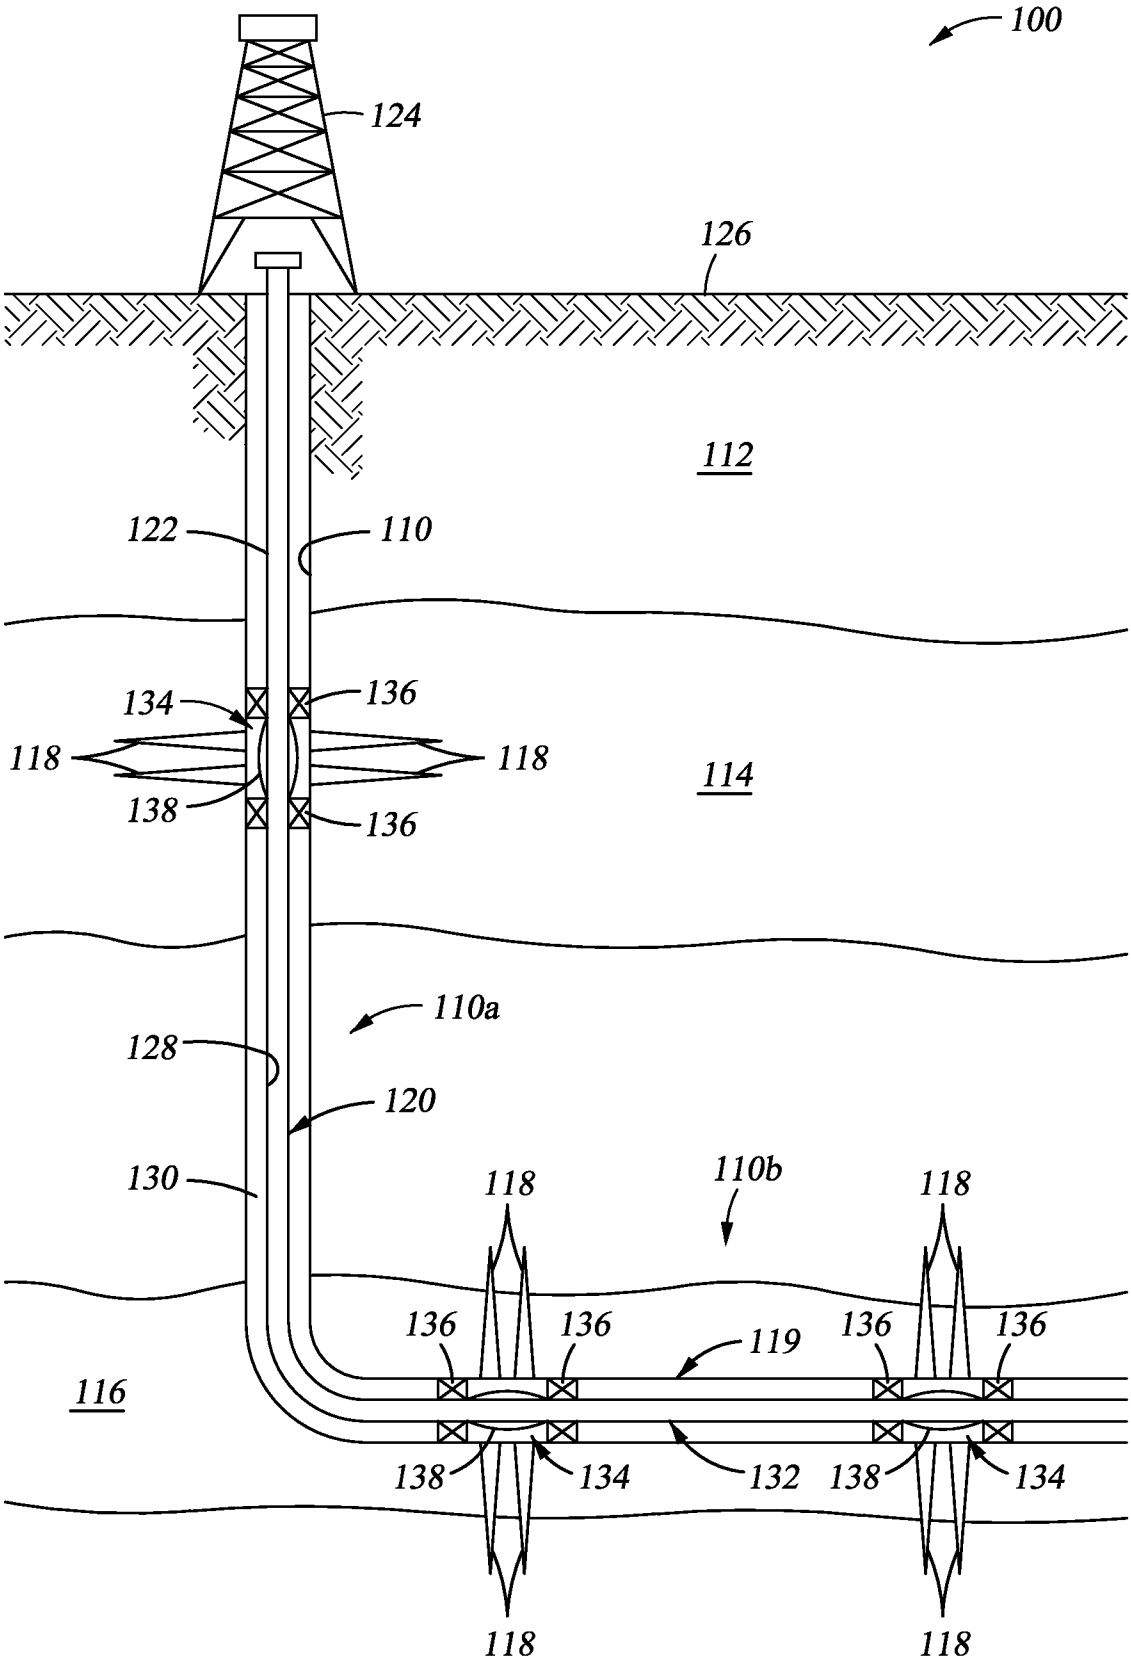

100
124
126
112
122
110
134
136
118
118
114
138
136
110a
128
120
130
118
110b
118
136
136
119
136
136
116
138
134
132
138
134
118
118

Fig. 1

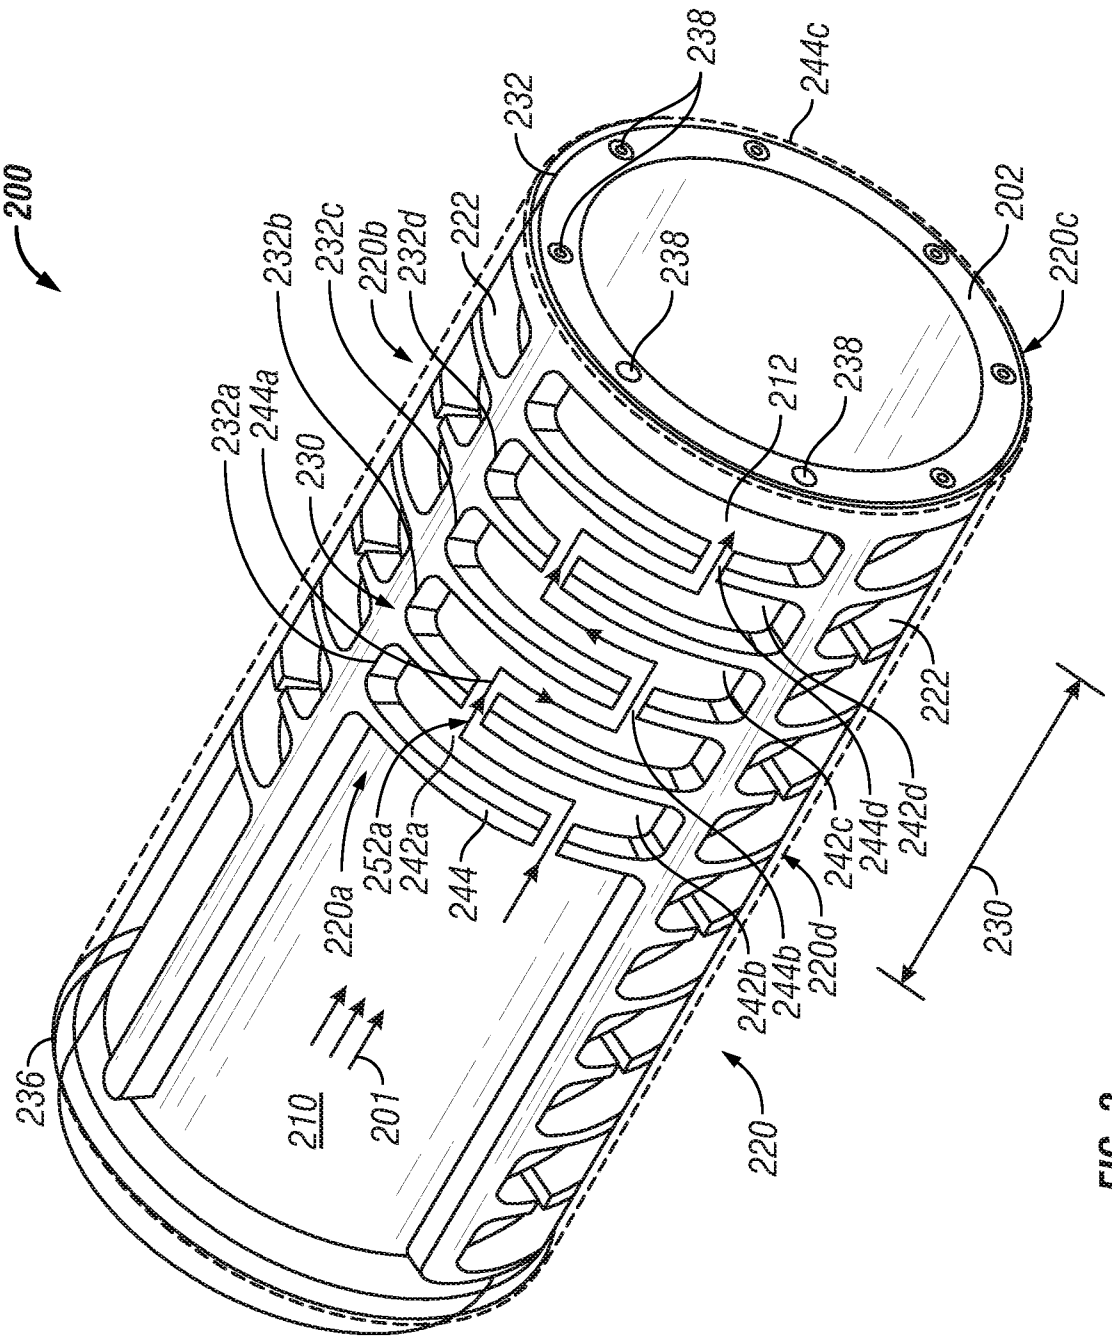


FIG. 2
(PRIOR ART)

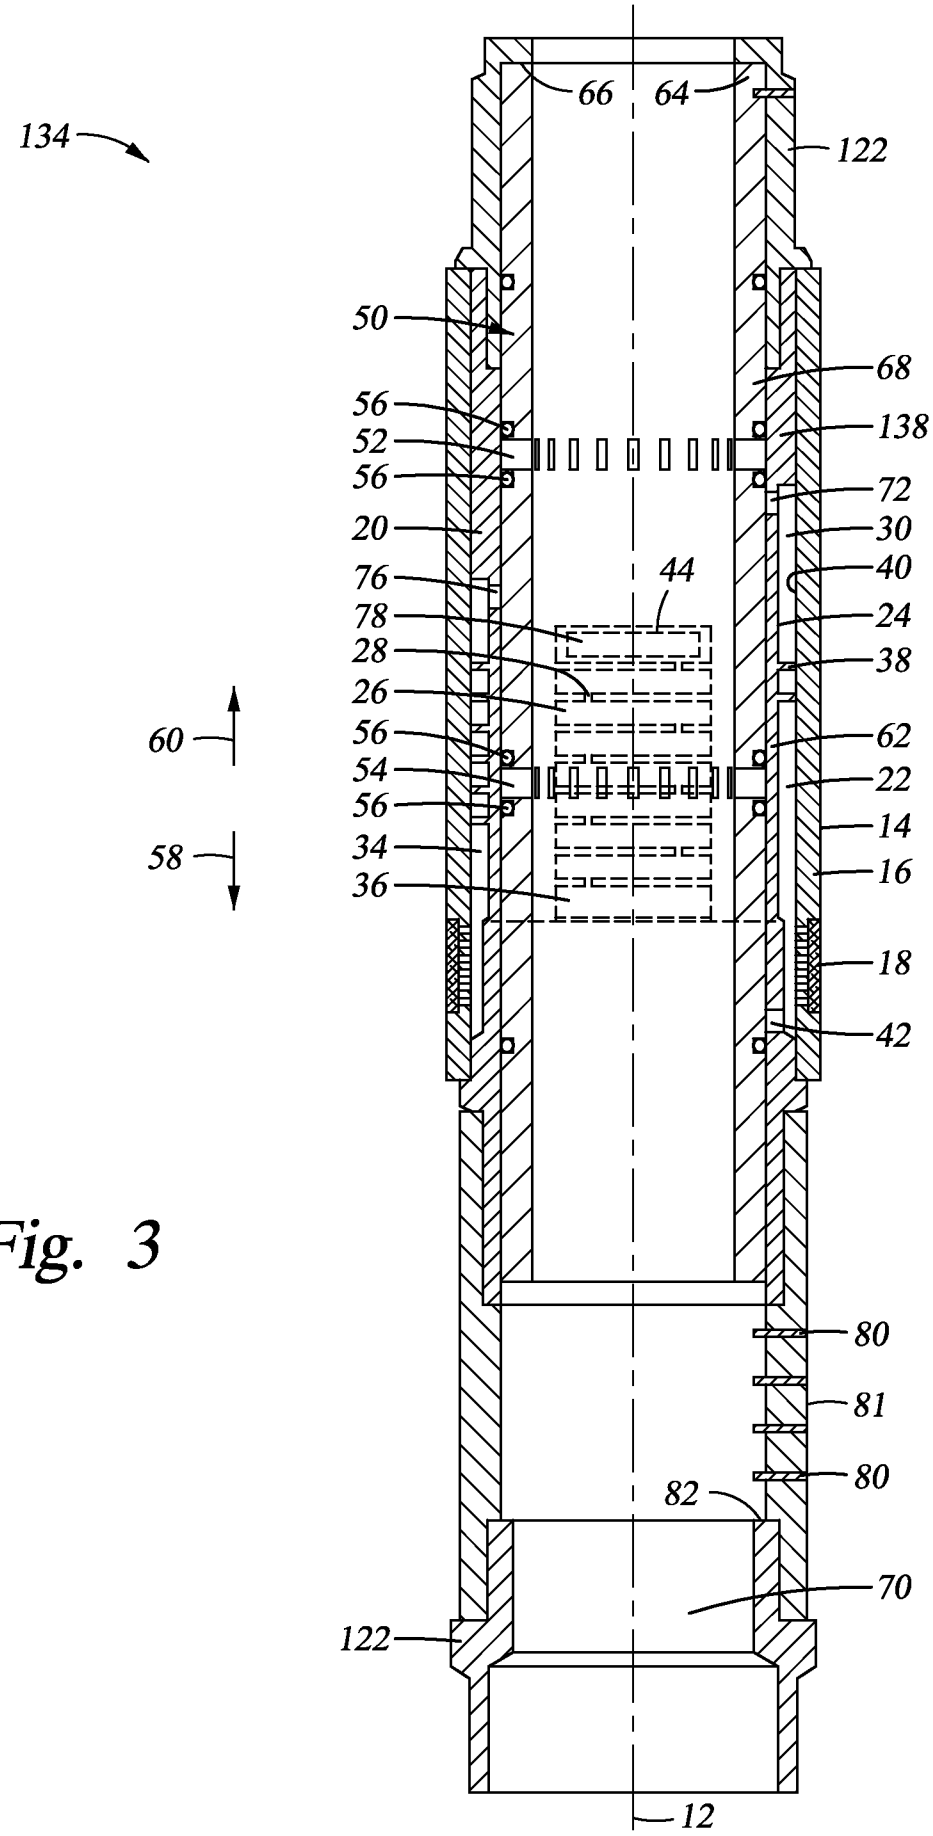

134
66
64
122
50
68
56
138
52
56
72
20
30
76
44
40
78
24
28
38
26
60
56
62
54
22
56
14
58
34
16
36
18
42
80
81
80
82
70
122
12

Fig. 3

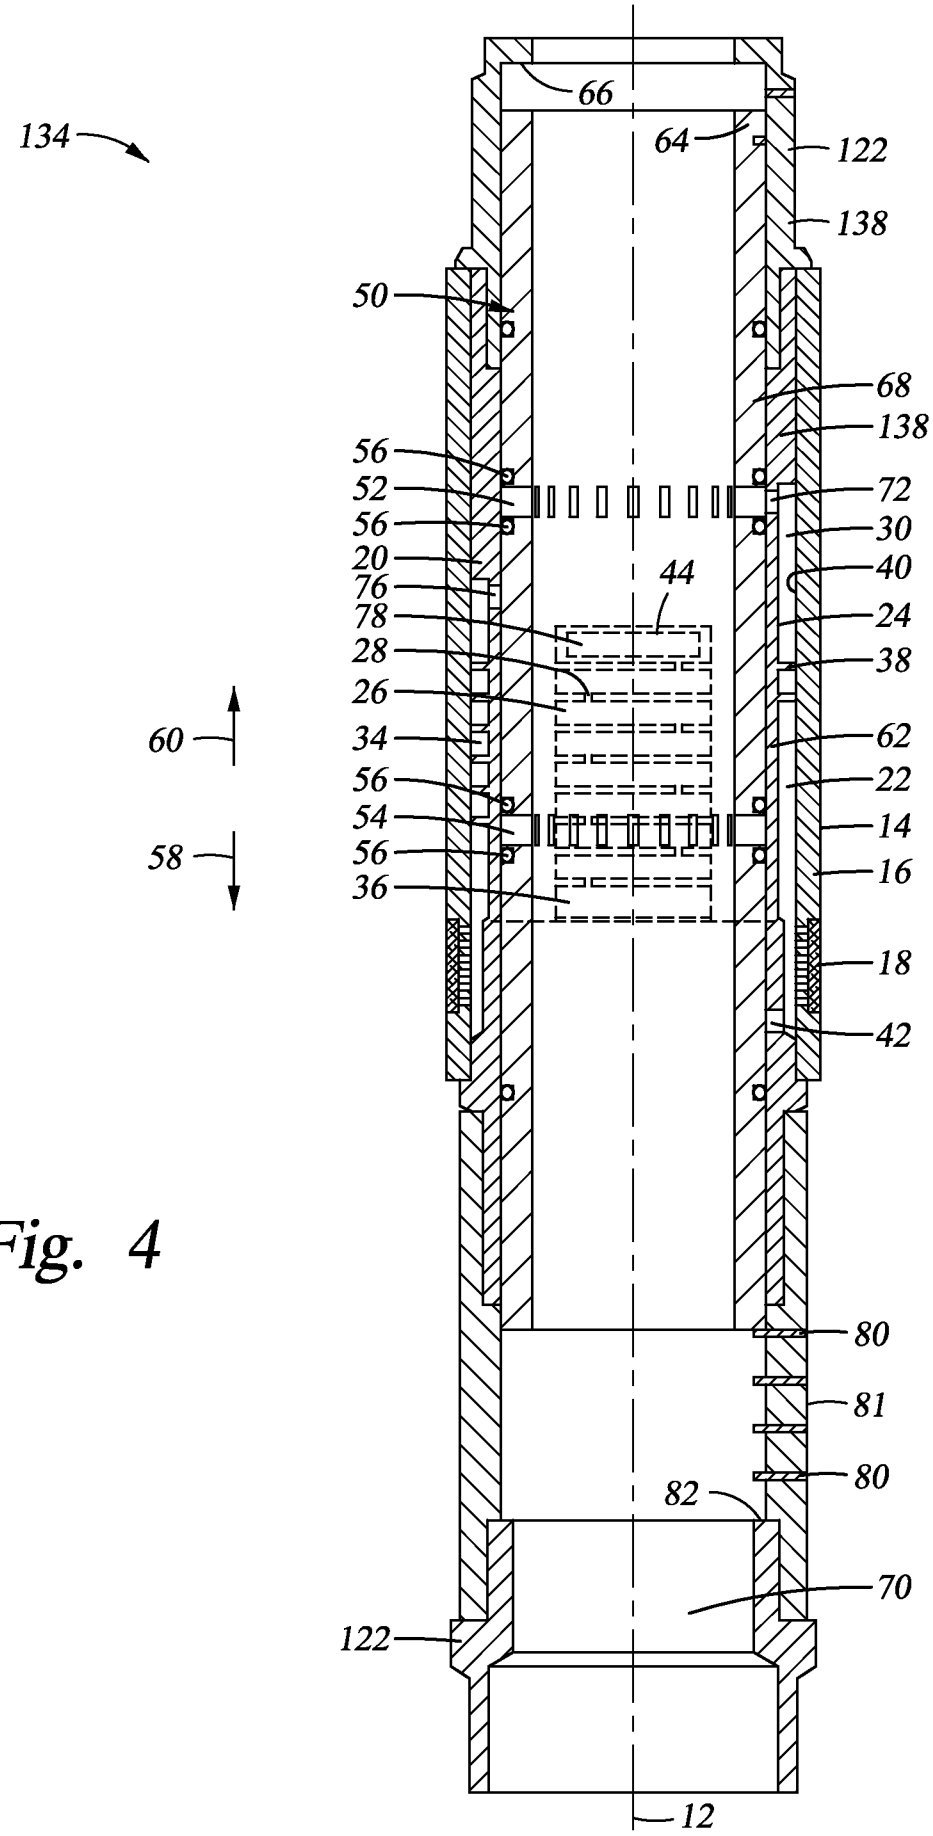

134
66
64
122
138
50
68
138
56
52
72
56
30
20
40
44
76
78
24
28
38
26
60
34
62
56
22
54
14
58
56
16
36
18
42
80
81
80
82
70
122
12

Fig. 4

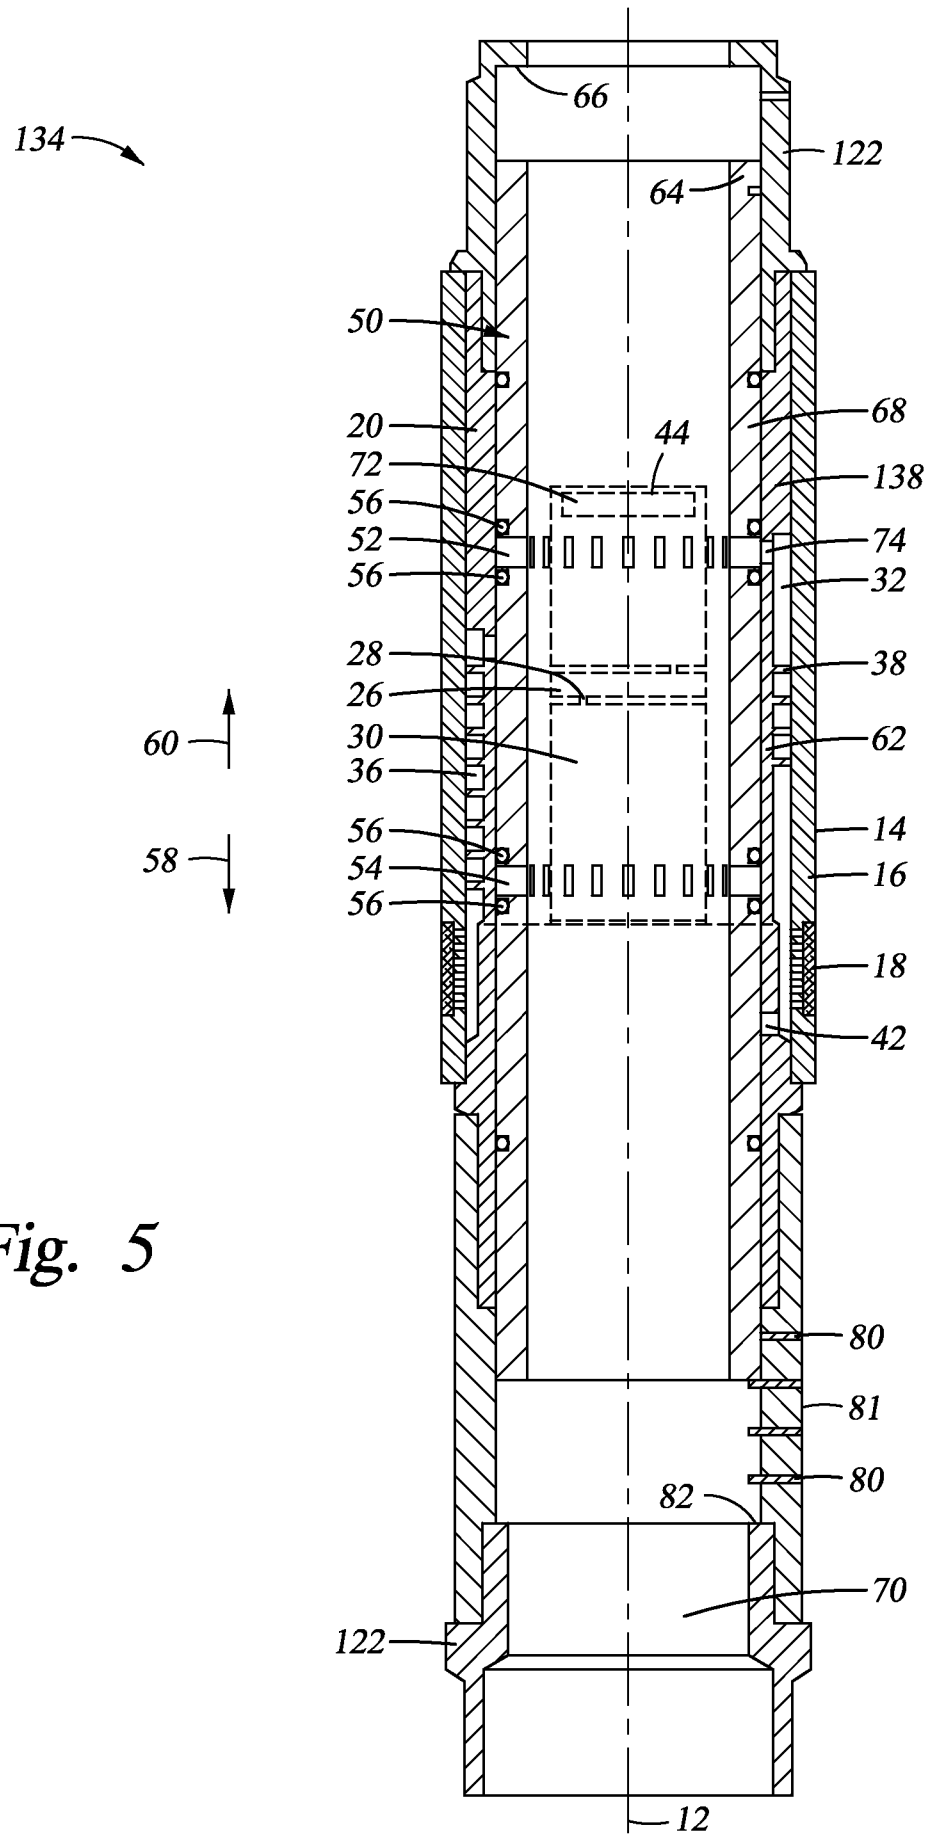

134
66
122
64
50
68
20
44
72
138
56
74
52
32
56
28
38
26
60
30
62
36
14
56
58
54
16
56
18
42
80
81
80
82
70
122
12

Fig. 5

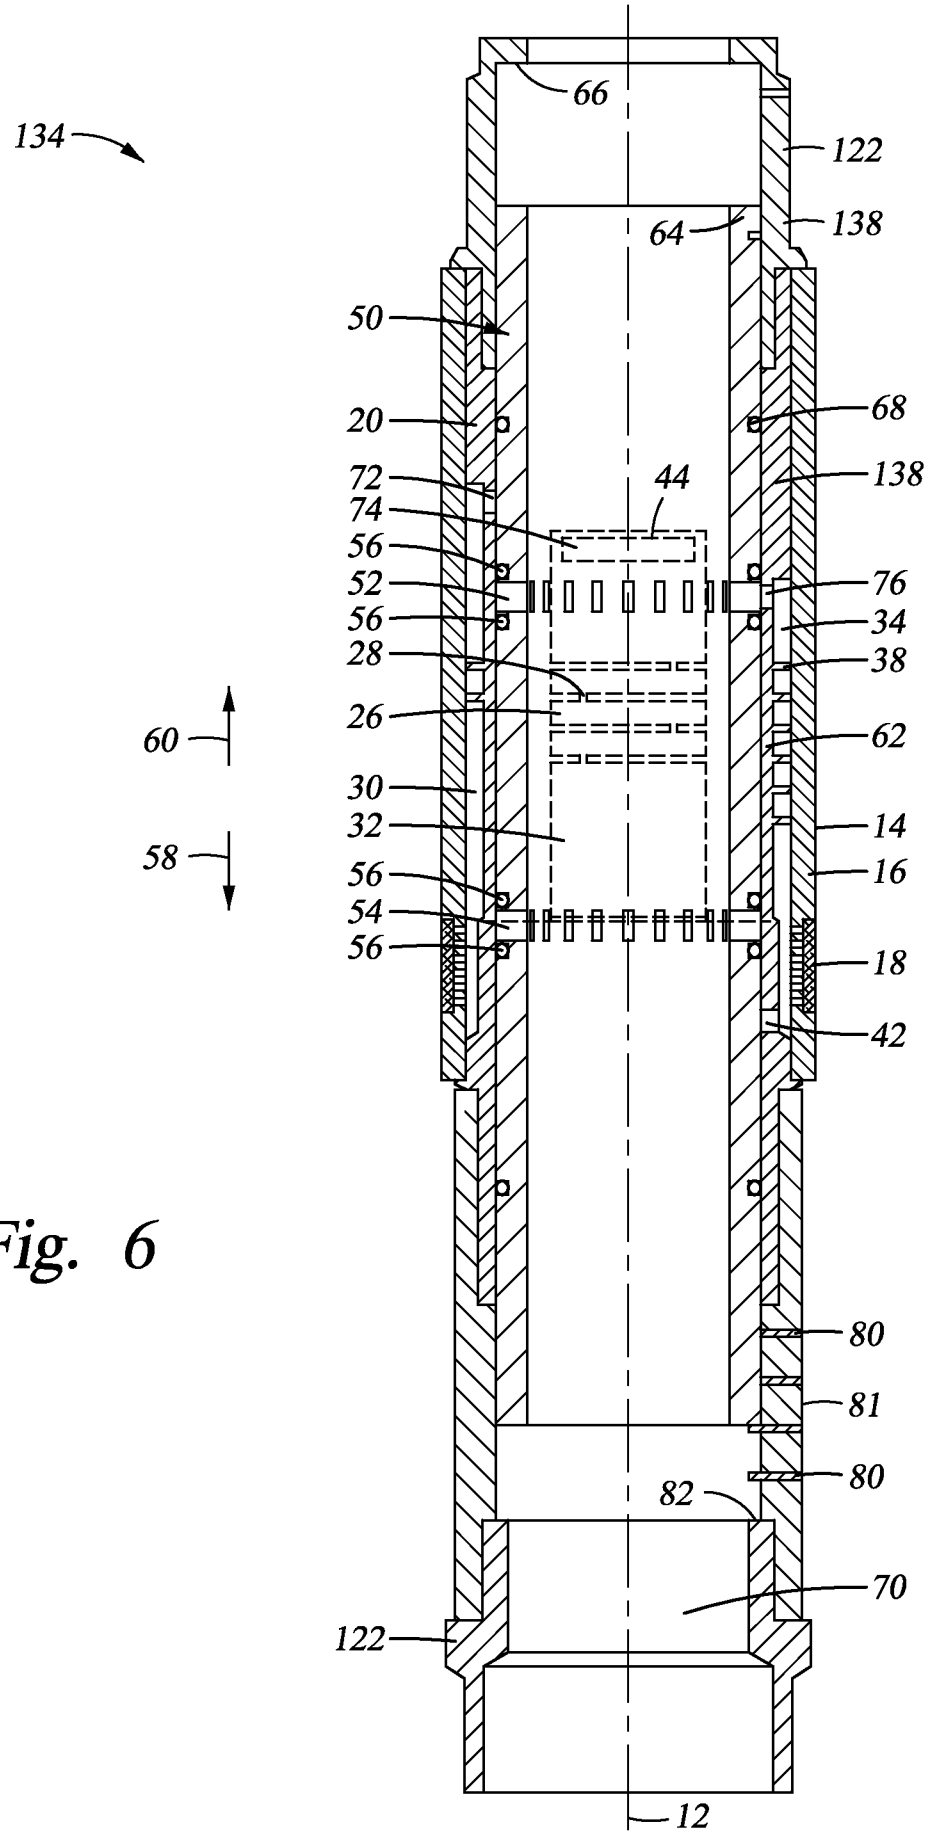

134
66
122
64
138
50
68
20
72
44
138
74
56
76
52
56
34
28
38
26
62
60
30
32
14
58
56
16
54
56
18
42
80
81
80
82
70
122
12

Fig. 6

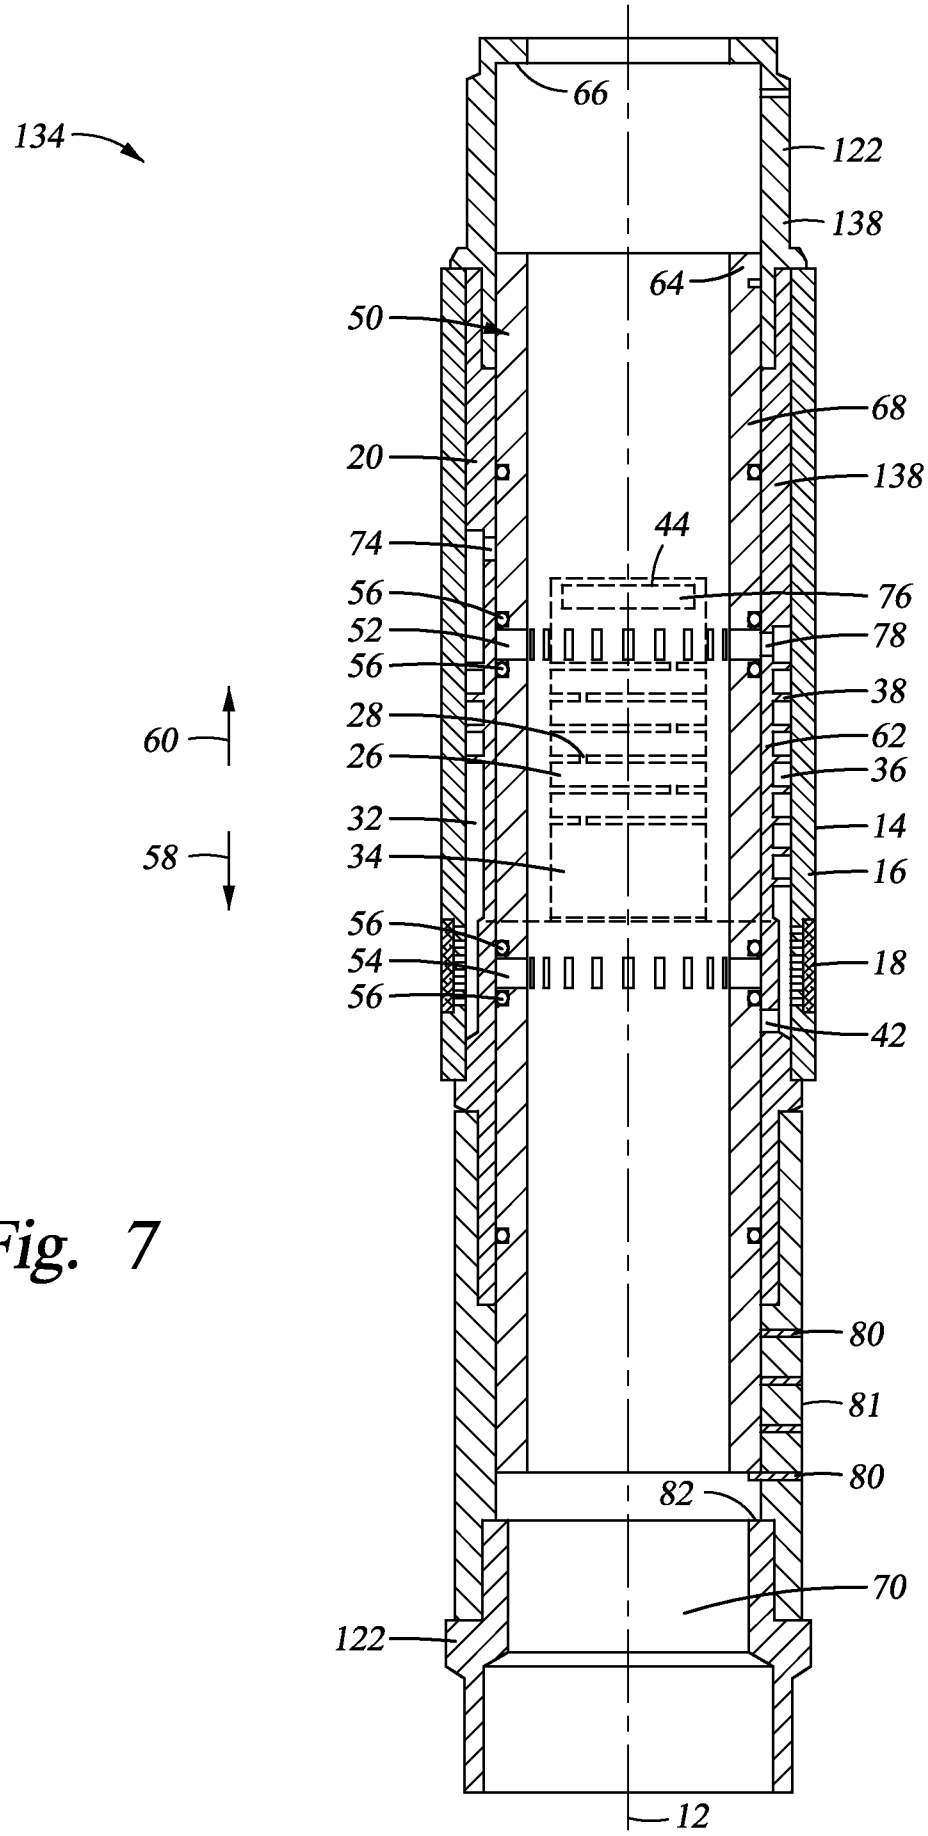

134
66
122
138
64
50
68
20
138
44
74
76
56
52
78
56
38
28
62
26
36
32
14
34
16
56
54
18
56
42
60
58
80
81
80
82
70
122
12

Fig. 7

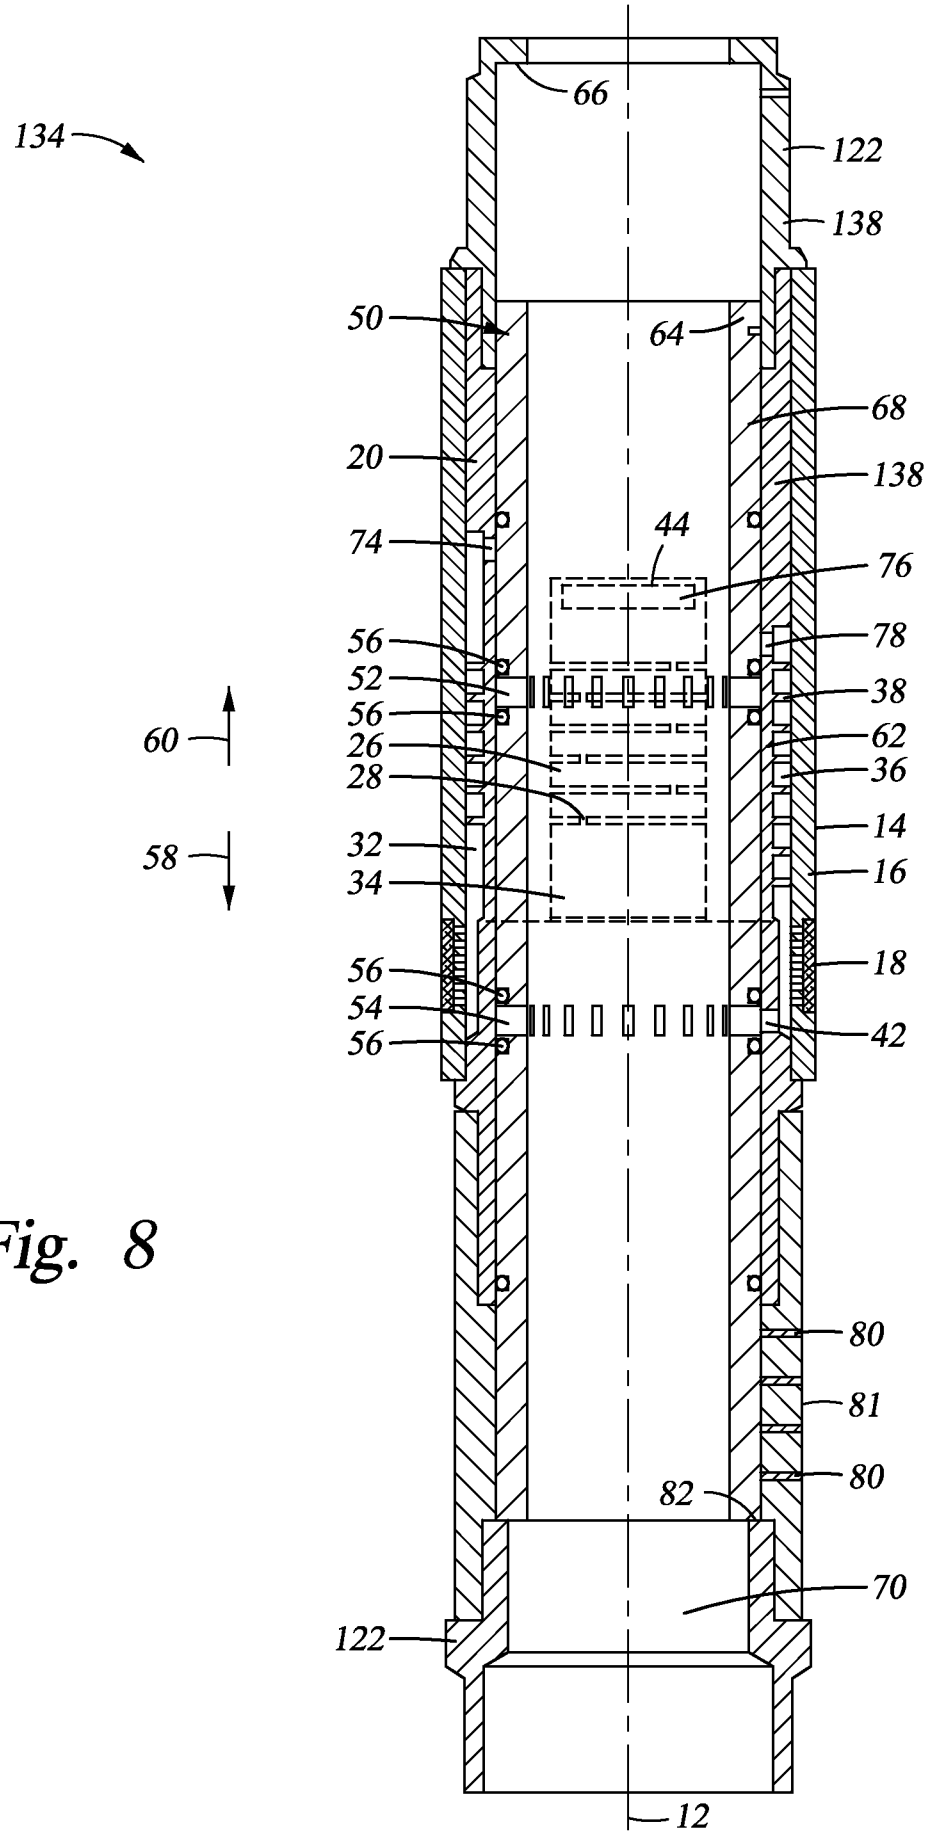

134
66
122
138
50
64
68
20
138
74
44
76
56
78
52
38
56
62
26
36
28
14
60
32
16
58
34
56
18
54
42
56
80
81
80
82
70
122
12

Fig. 8

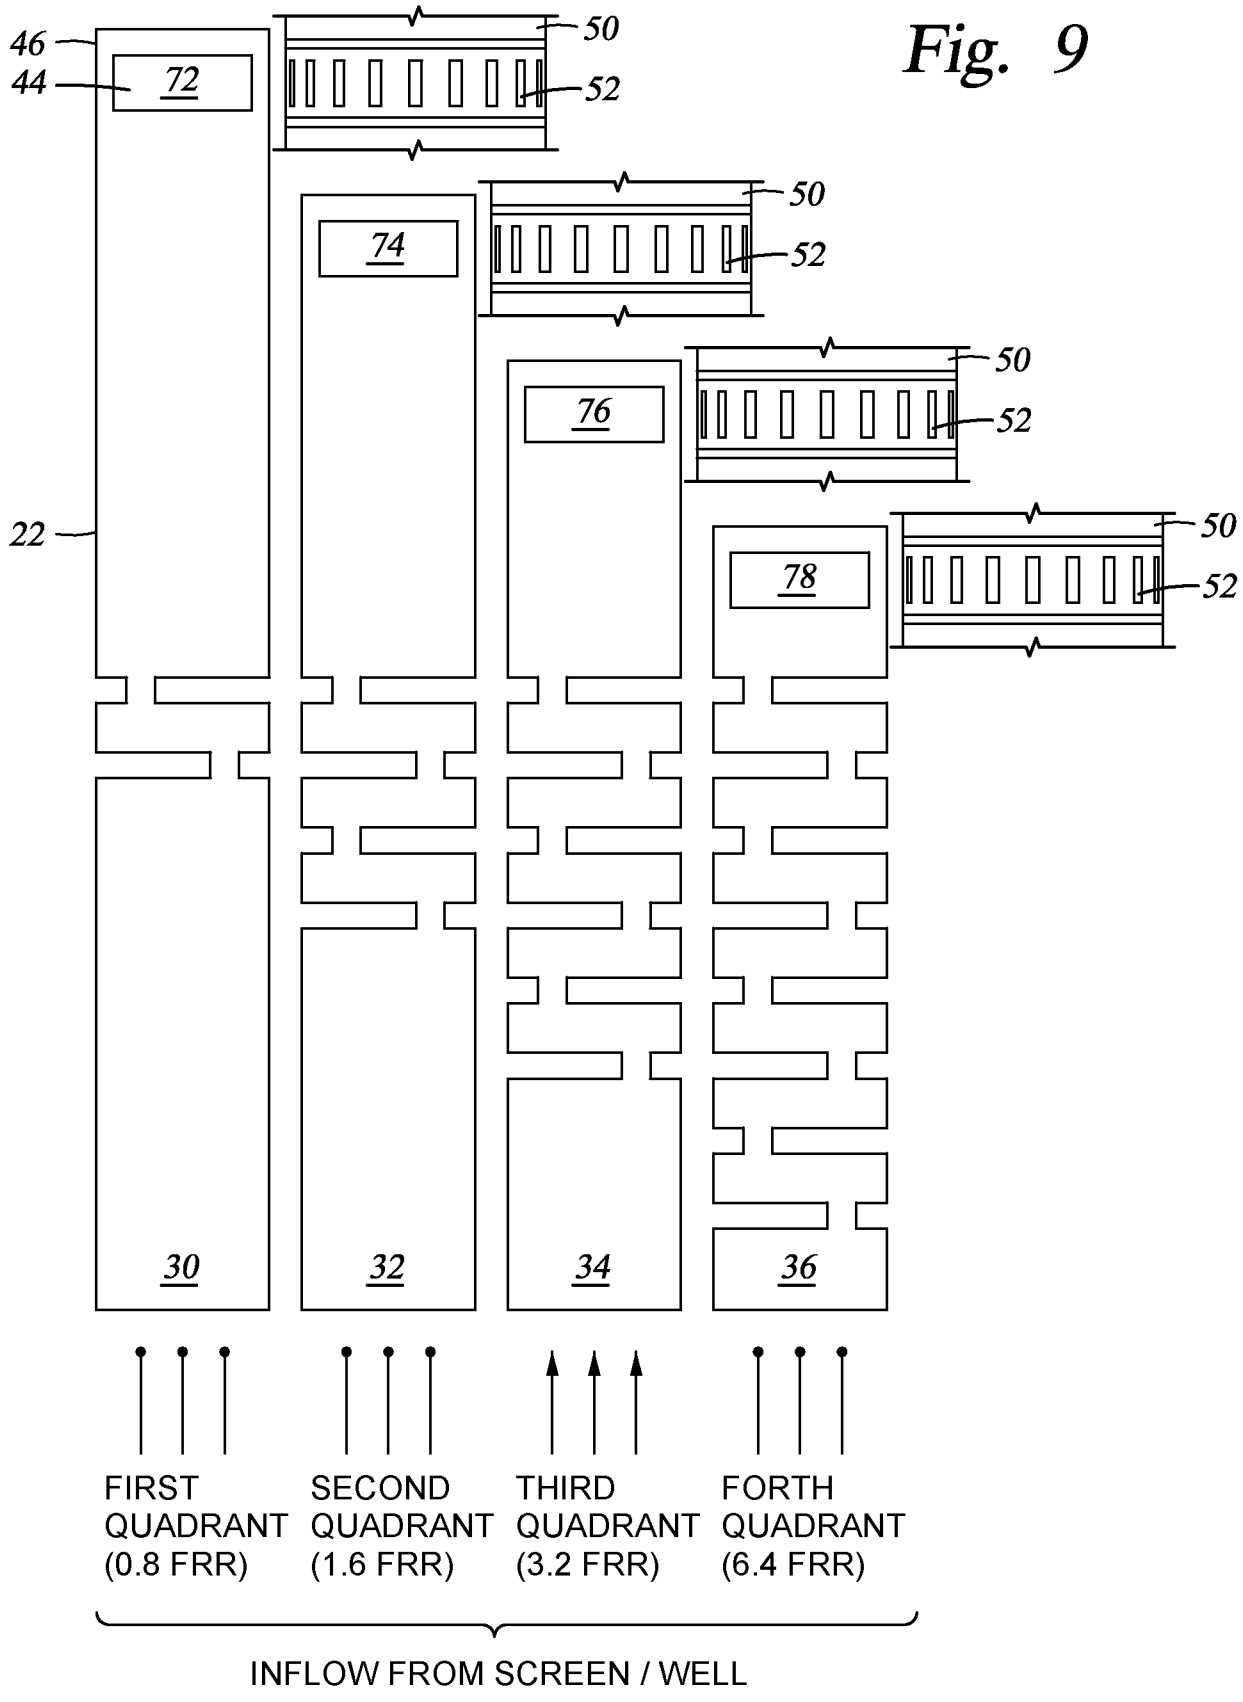

46
44
72
50
52
74
50
52
76
50
52
22
78
50
52
30
32
34
36
FIRST QUADRANT (0.8 FRR)
SECOND QUADRANT (1.6 FRR)
THIRD QUADRANT (3.2 FRR)
FORTH QUADRANT (6.4 FRR)
INFLOW FROM SCREEN / WELL

Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/064811

A. CLASSIFICATION OF SUBJECT MATTER

E21B 34/06(2006.01)i, E21B 43/12(2006.01)i, E21B 17/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B 34/06; E21B 34/00; E21B 43/24; E21B 34/14; E21B 43/12; E21B 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords:flow control device, multi-channel, radial window, different flow resistance, sliding sleeve and align

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 8469107 B2 (O`MALLEY et al.) 25 June 2013 See column 5, line 54 - column 6, line 26 and figures 3A-3B.	1-15
A	US 2002-0020534 A1 (WILSON et al.) 21 February 2002 See paragraphs [0010], [0030]-[0036] and figures 3a-3e.	1-15
A	US 2014-0251627 A1 (HOLDERMAN et al.) 11 September 2014 See paragraphs [0052]-[0059] and figures 3-8.	1-15
A	US 2011-0139453 A1 (SCHULTZ et al.) 16 June 2011 See paragraphs [0029]-[0031] and figures 1-3.	1-15
A	US 2012-0298370 A1 (XU et al.) 29 November 2012 See paragraph [0036] and figure 6.	1-15

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 February 2016 (16.02.2016)	**17 February 2016 (17.02.2016)**

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer
LEE, Hun Gil
Telephone No. +82-42-481-8525

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/064811

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8469107 B2	25/06/2013	AU 2010-341674 A1	21/06/2012
		AU 2010-341674 B2	22/01/2015
		CN 102667056 A	12/09/2012
		CN 102667056 B	03/12/2014
		GB 201210030 D0	18/07/2012
		GB 2490262 A	24/10/2012
		NO 20120657 A	24/07/2012
		US 2011-0147006 A1	23/06/2011
		US 2011-0147007 A1	23/06/2011
		US 8469105 B2	25/06/2013
		WO 2011-087608 A1	21/07/2011
US 2002-0020534 A1	21/02/2002	AU 2001-76555 A1	04/03/2002
		BR 0107057 A	11/06/2002
		BR 0107057 B1	09/02/2010
		EP 1309770 A1	14/05/2003
		EP 1309770 B1	21/06/2006
		EP 1627987 A1	22/02/2006
		EP 1627988 A1	22/02/2006
		EP 1627989 A1	22/02/2006
		GB 0020350 D0	04/10/2000
		GB 0411843 D0	30/06/2004
		GB 0411844 D0	30/06/2004
		GB 0411845 D0	30/06/2004
		GB 0411846 D0	30/06/2004
		GB 0411847 D0	30/06/2004
		GB 2365889 A	27/02/2002
		GB 2365889 B	15/09/2004
		GB 2399843 A	29/09/2004
		GB 2399843 B	22/12/2004
		GB 2399844 A	29/09/2004
		GB 2399844 B	22/12/2004
		GB 2399845 A	29/09/2004
		GB 2399845 B	12/01/2005
		GB 2399846 A	29/09/2004
		GB 2399847 A	29/09/2004
		NO 20021790 A	16/04/2002
		NO 20055012 A	16/04/2002
		NO 20055013 A	16/04/2002
		NO 20055014 A	16/04/2002
		NO 323192 B1	15/01/2007
		US 2003-0132001 A1	17/07/2003
		US 6494265 B2	17/12/2002
		US 6817416 B2	16/11/2004
		WO 02-16730 A1	28/02/2002
US 2014-0251627 A1	11/09/2014	US 9080421 B2	14/07/2015
		WO 2014-025338 A1	13/02/2014

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/064811

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0139453 A1	16/06/2011	AU 2010-328400 A1	21/06/2012
		CA 2782343 A1	16/06/2011
		CA 2782343 C	27/01/2015
		CN 102725478 A	10/10/2012
		CN 102725478 B	28/01/2015
		CO 6501126 A2	15/08/2012
		DK 2510187 T3	27/01/2014
		EC SP12011960 A	31/07/2012
		EP 2510187 A2	17/10/2012
		EP 2510187 B1	23/10/2013
		MX 2012006575 A	28/06/2012
		RU 2012122630 A	20/01/2014
		RU 2529316 C2	27/09/2014
		SG 181544 A1	30/07/2012
		US 8291976 B2	23/10/2012
		WO 2011-071830 A2	16/06/2011
		WO 2011-071830 A3	01/12/2011
US 2012-0298370 A1	29/11/2012	AU 2008-311027 A1	16/04/2009
		AU 2008-311027 B2	03/07/2014
		BR PI0818539 A2	16/06/2015
		CA 2700320 A1	16/04/2009
		CA 2700320 C	10/12/2013
		CN 101821476 A	01/09/2010
		CN 101821476 B	22/01/2014
		EA 017651 B1	28/02/2013
		EA 201000555 A1	29/10/2010
		GB 201004787 D0	05/05/2010
		GB 2468044 A	25/08/2010
		GB 2468044 B	18/04/2012
		MX 2010003649 A	21/04/2010
		NO 20100545 A	10/06/2010
		US 2009-0095487 A1	16/04/2009
		US 8312931 B2	20/11/2012
		US 8646535 B2	11/02/2014
		WO 2009-048822 A2	16/04/2009
		WO 2009-048822 A3	28/05/2009