

(12) **United States Patent**
Johansen

(10) **Patent No.:** **US 10,935,040 B2**
(45) **Date of Patent:** **Mar. 2, 2021**

(54) **RADIAL BLADE IMPELLER FOR AN INDUSTRIAL FAN ASSEMBLY**

F04D 29/26; F04D 29/266; F04D 29/329;
F04D 29/322; F04D 29/321; F04D 29/34;
F04D 29/388; F04D 29/626; F04D 29/30

(71) Applicant: **DEKALB BLOWER INC.**, Yorkville, IL (US)

See application file for complete search history.

(72) Inventor: **Eric J. Johansen**, Newark, IL (US)

(56) **References Cited**

(73) Assignee: **The Boeing Company**, Chicago, IL (US)

U.S. PATENT DOCUMENTS

2,108,841 A * 2/1938 Baker F04D 29/28
415/219.1
2,237,451 A * 4/1941 Samuels F04D 29/282
416/185

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 800 days.

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **15/626,999**

Garden City Fan & Blower Co., "PF2 Propeller. Plug Units," Bulletin PF681C 1982, p. 13.

(22) Filed: **Jun. 19, 2017**

Primary Examiner — Brian P Wolcott

Assistant Examiner — Aye S Htay

(65) **Prior Publication Data**

US 2018/0363670 A1 Dec. 20, 2018

(74) *Attorney, Agent, or Firm* — Miller, Matthias & Hull LLP

(51) **Int. Cl.**

F04D 29/28 (2006.01)
F04D 29/30 (2006.01)
F04D 29/32 (2006.01)
F04D 17/16 (2006.01)
F04D 29/34 (2006.01)
F04D 29/38 (2006.01)
F04D 29/26 (2006.01)
F04D 29/62 (2006.01)

(57) **ABSTRACT**

A radial blade impeller for an industrial fan assembly may include a cylindrical impeller hub having a hub outer surface and a hub shaft bore, a plurality of impeller blade assemblies circumferentially spaced about the hub outer surface and extending outward from the hub outer surface. A first sprocket disposed on a first end of the impeller hub engages a lateral edge of each of the impeller blade assemblies and has a plurality of first sprocket teeth extending outward from a first sprocket outer edge. Each of the first sprocket teeth corresponds to one of the impeller blade assemblies and engages and is secured to the first lateral edge of the corresponding one of the impeller blade assemblies. A second sprocket disposed on a second end of the impeller hub has a similar configuration with second sprocket teeth aligning with and engaging opposite lateral edges of the impeller blade assemblies.


(52) **U.S. Cl.**

CPC **F04D 29/282** (2013.01); **F04D 17/16** (2013.01); **F04D 29/263** (2013.01); **F04D 29/30** (2013.01); **F04D 29/329** (2013.01); **F04D 29/34** (2013.01); **F04D 29/388** (2013.01); **F04D 29/626** (2013.01)

(58) **Field of Classification Search**

CPC F04D 29/282; F04D 29/283; F04D 29/263;

19 Claims, 11 Drawing Sheets

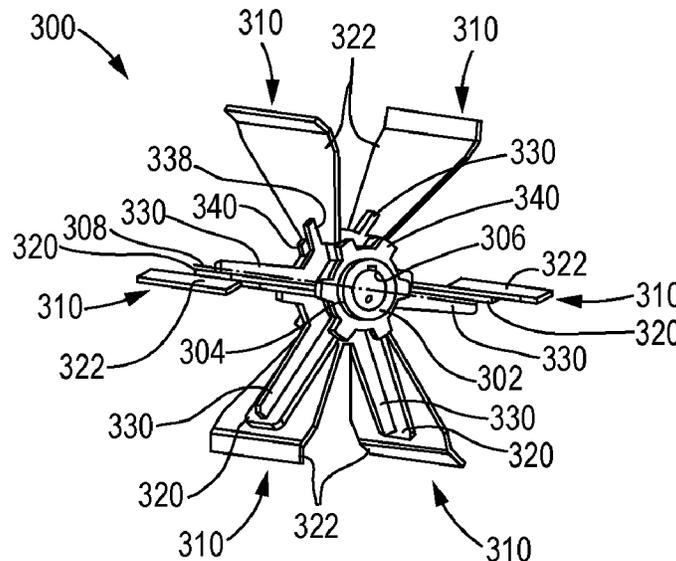

(56)	References Cited	6,726,454 B2 *	4/2004	Blass	F04D 29/329 416/236 R
	U.S. PATENT DOCUMENTS	6,797,041 B2	9/2004	Brownell et al.	
		6,994,743 B2	2/2006	Brownell et al.	
2,653,755 A *	9/1953 Kruhmin	7,018,289 B2	3/2006	Heil et al.	
	F04D 29/289 416/184	7,049,499 B1	5/2006	Mathson et al.	
4,040,769 A	8/1977 Britz	7,320,636 B2	1/2008	Seliger et al.	
4,253,483 A	3/1981 Cornelius	7,547,249 B2	6/2009	Seliger et al.	
4,373,509 A	2/1983 Neitzel et al.	7,682,231 B2	3/2010	Enzenroth et al.	
4,508,486 A	4/1985 Tinker	7,758,305 B2	7/2010	Kurszewski et al.	
4,775,294 A	10/1988 LaPorte	8,025,477 B2	9/2011	Ganesh et al.	
4,957,414 A *	9/1990 Willingham	8,221,082 B2	7/2012	Key	
	B29C 45/0025 416/134 R	8,758,101 B2	6/2014	Khalitov et al.	
5,006,064 A	4/1991 Freund	8,932,013 B2	1/2015	Khalitov et al.	
5,127,798 A *	7/1992 Campolmi	9,004,868 B2	4/2015	Rhodes	
	F04D 17/162 415/203	9,182,131 B1	11/2015	Prasser et al.	
5,171,128 A	12/1992 Williamson et al.	9,505,092 B2	11/2016	Brownell et al.	
5,238,453 A	8/1993 Heil	9,523,371 B2 *	12/2016	Hollan	F04D 29/023
5,437,541 A *	8/1995 Vainrub	2004/0254037 A1	12/2004	Williamson et al.	
	F04D 29/384 416/223 R	2005/0159101 A1	7/2005	Hrdina et al.	
5,567,380 A	10/1996 Hoover	2005/0204582 A1	9/2005	Rossi et al.	
5,673,681 A	10/1997 Neitzel et al.	2007/0202795 A1	8/2007	Seliger et al.	
D393,708 S	4/1998 Haeck	2012/0322358 A1	12/2012	Wendorski et al.	
5,809,993 A	9/1998 Neitzel et al.	2014/0241868 A1	8/2014	Brownell et al.	
D405,170 S	2/1999 Haeck	2014/0241894 A1	8/2014	Brownell et al.	
5,879,815 A	3/1999 Schotz	2015/0086349 A1	3/2015	Ganesh et al.	
5,894,737 A	4/1999 Haeck	2015/0176603 A1	6/2015	Fetting et al.	
5,915,960 A	6/1999 Check et al.	2015/0267713 A1	9/2015	Robinson et al.	
6,050,258 A	4/2000 Neitzel et al.	2015/0345512 A1	12/2015	Robinson et al.	
6,065,936 A *	5/2000 Shingai	2016/0061222 A1	3/2016	Robinson et al.	
	B29C 45/33 416/132 R	2016/0138606 A1	5/2016	Barry	
6,251,153 B1	6/2001 Neitzel et al.	2016/0161133 A1 *	6/2016	Oh	F24F 13/06 415/62
6,457,550 B1	10/2002 Barry et al.	2016/0356278 A1	12/2016	Khalitov et al.	
6,505,502 B1	1/2003 Brownell et al.	2016/0356287 A1	12/2016	Khalitov et al.	
6,644,337 B2	11/2003 Heil				

* cited by examiner

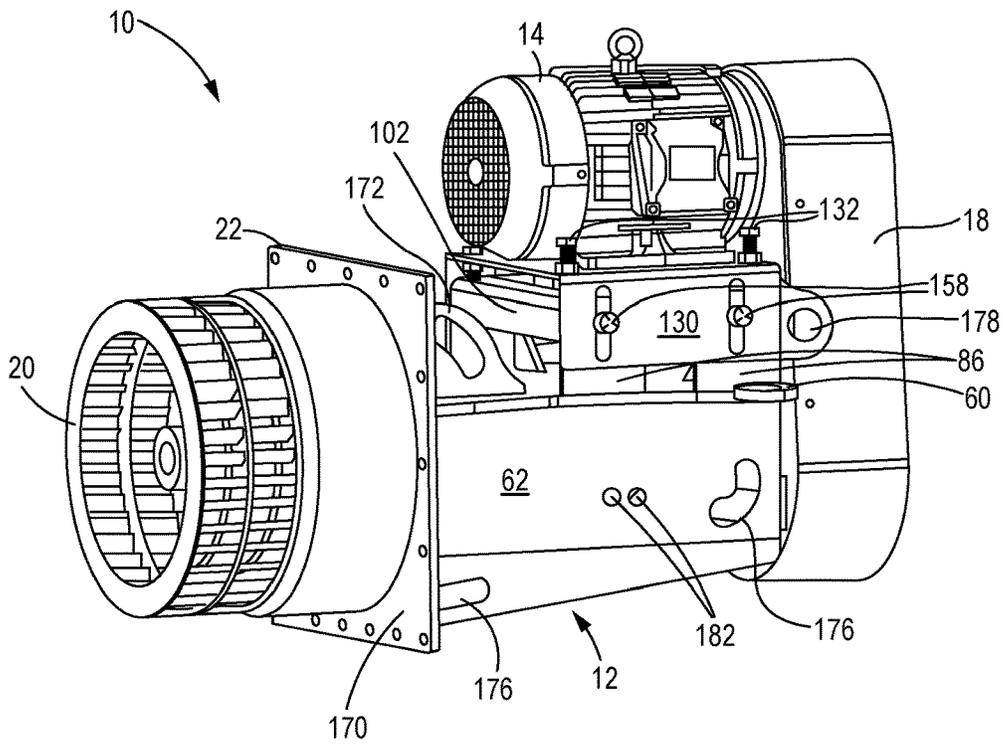


FIG. 1

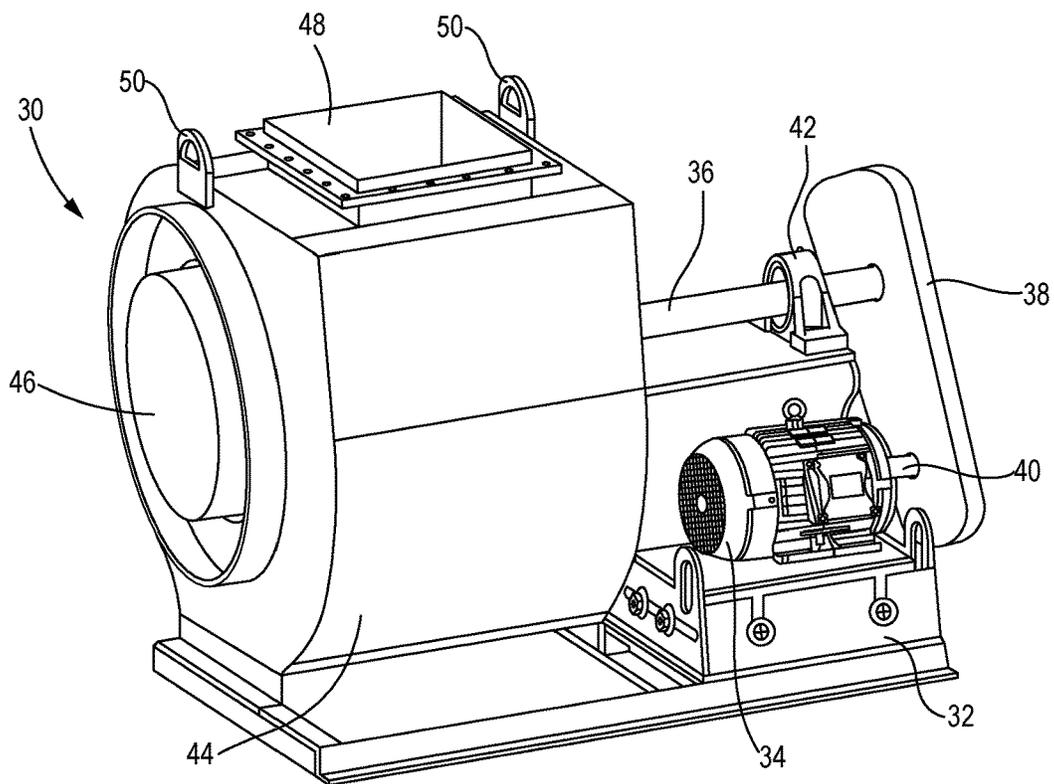


FIG. 2

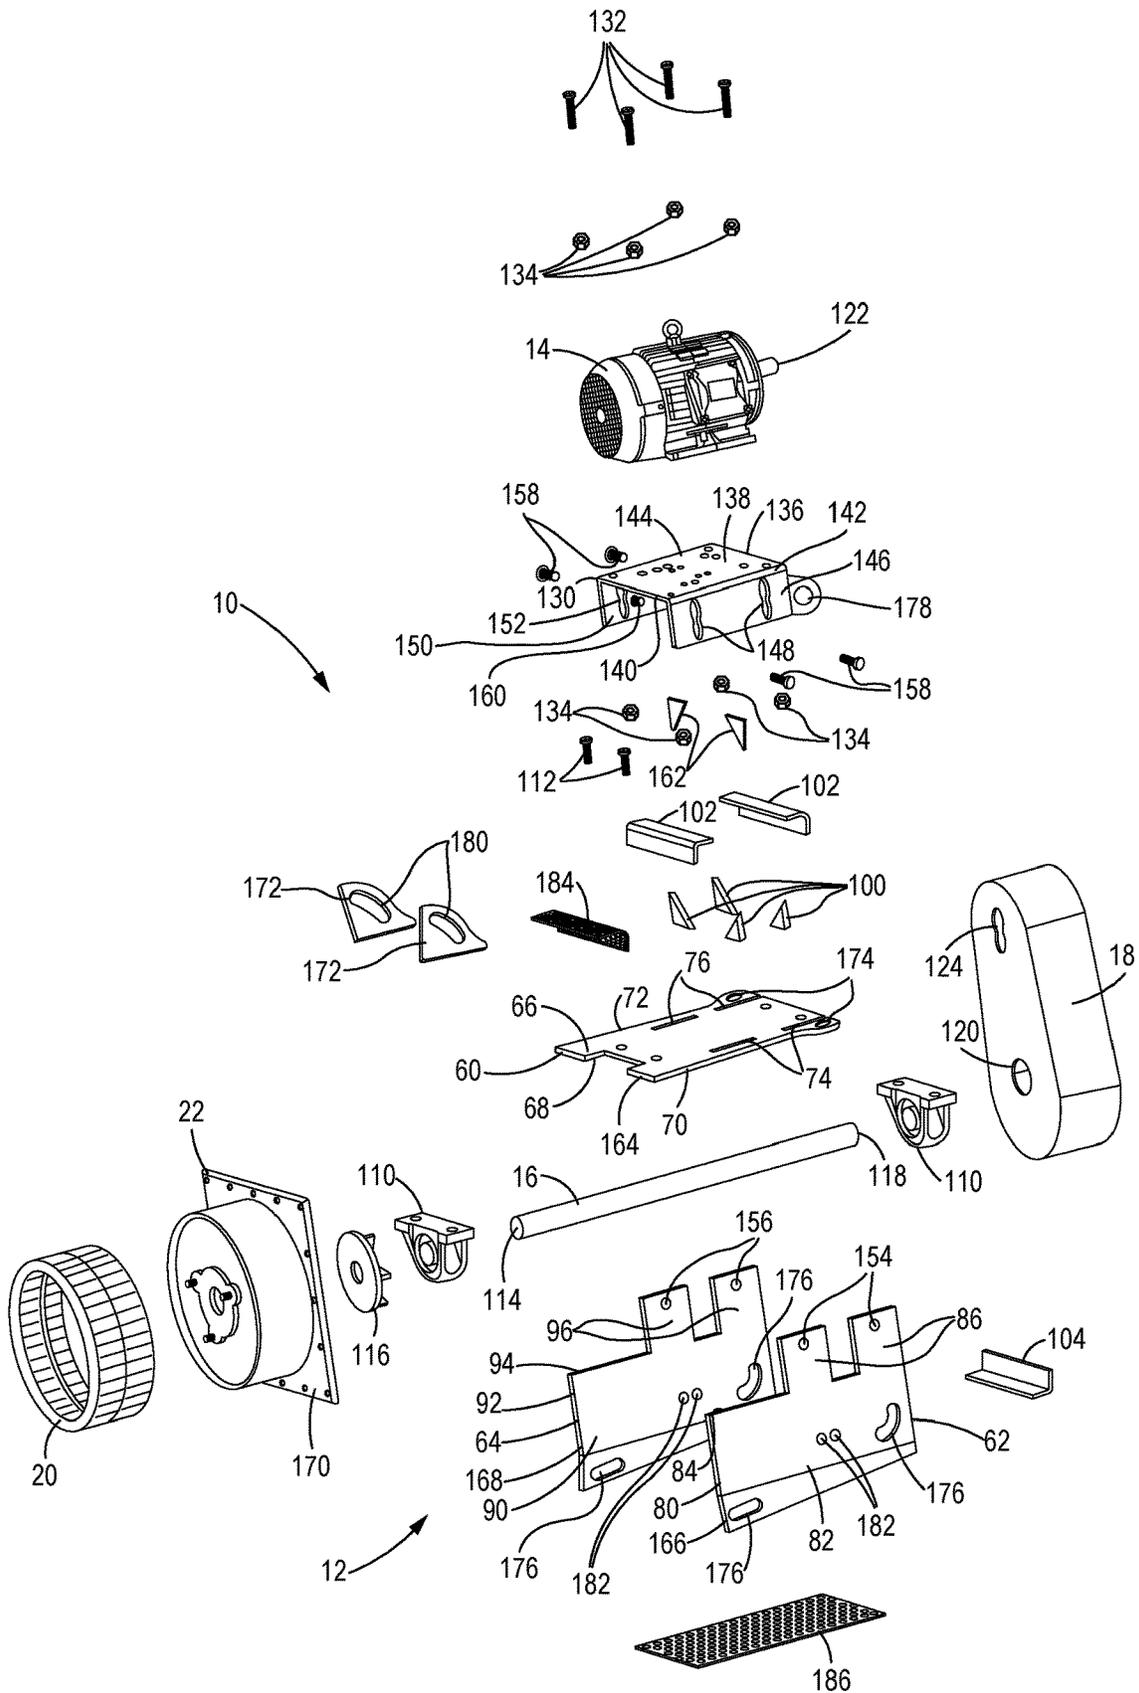


FIG. 3

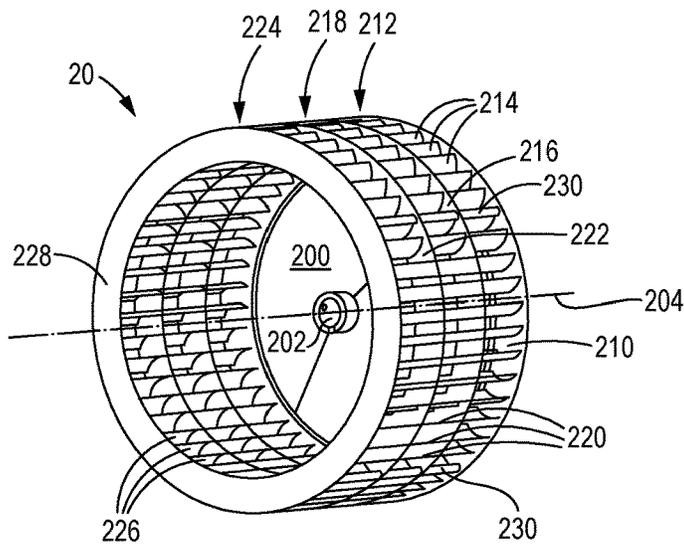


FIG. 4

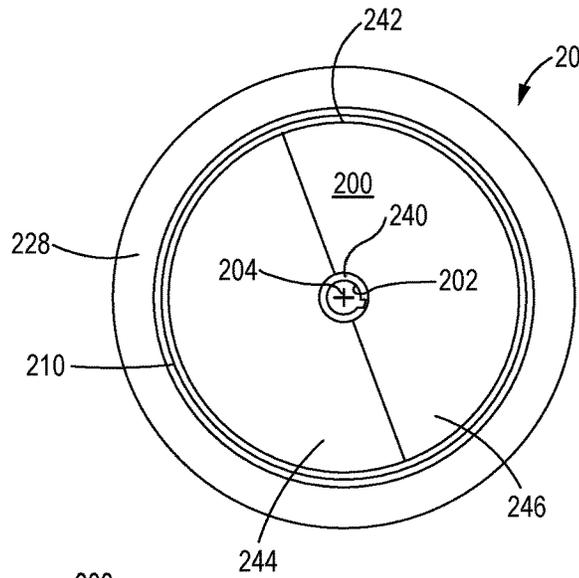


FIG. 5

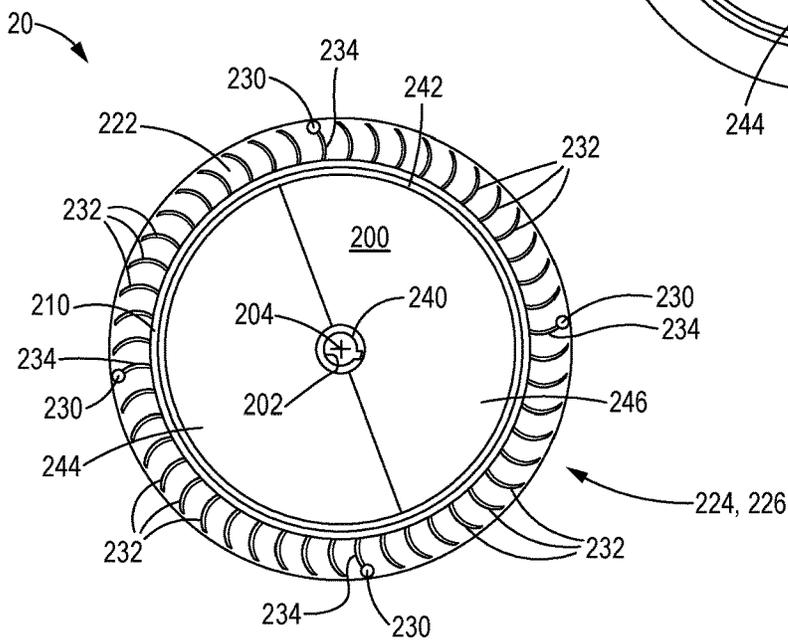


FIG. 6

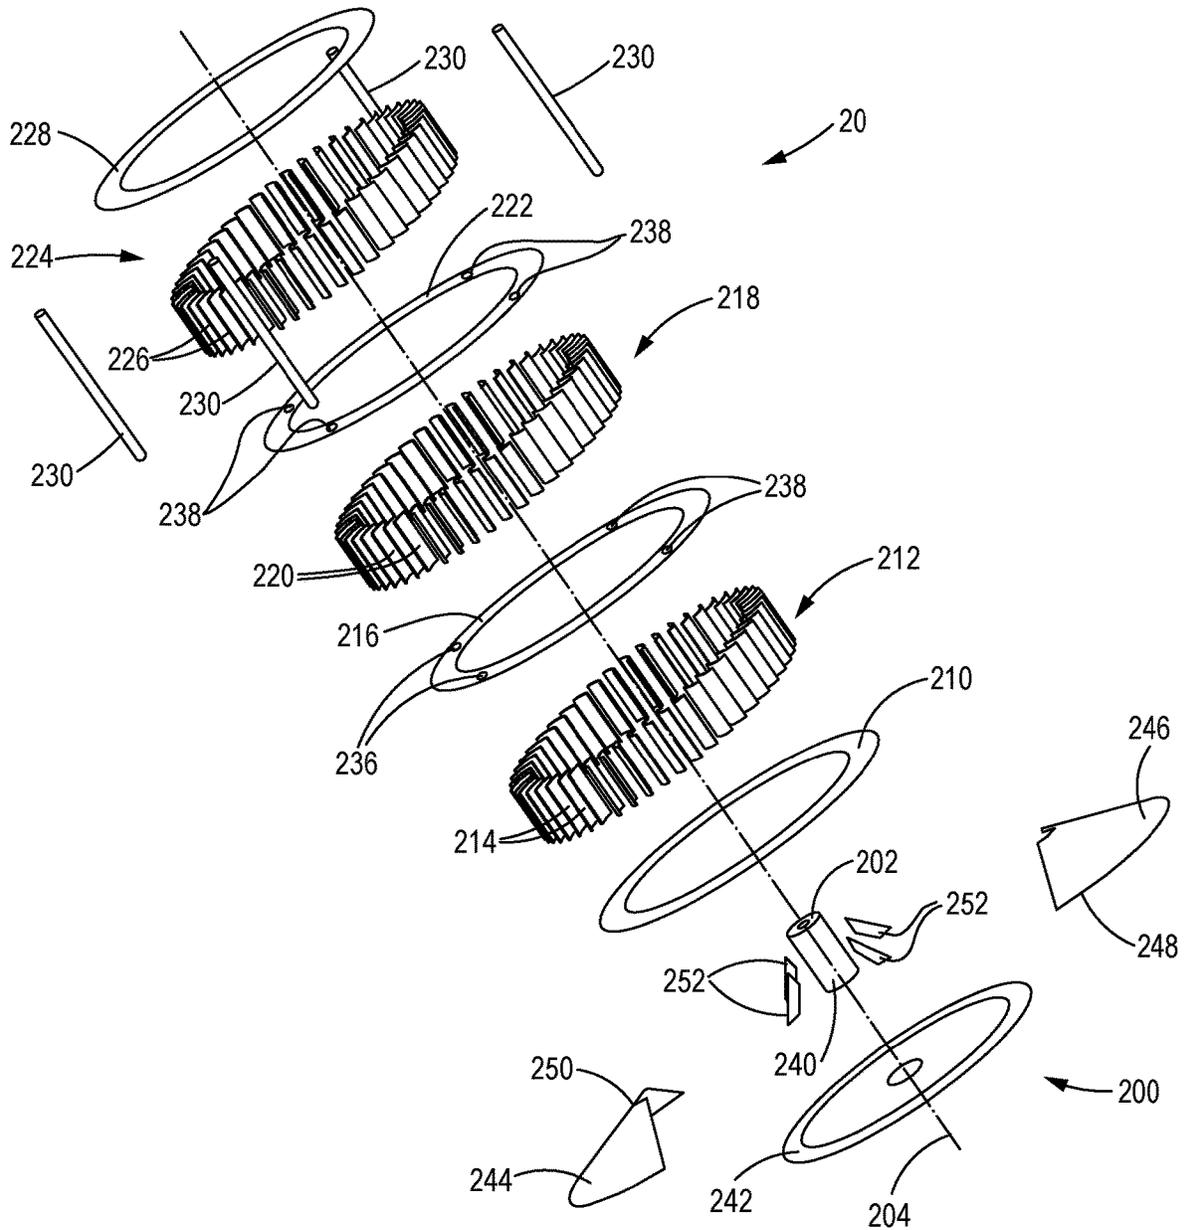


FIG. 7

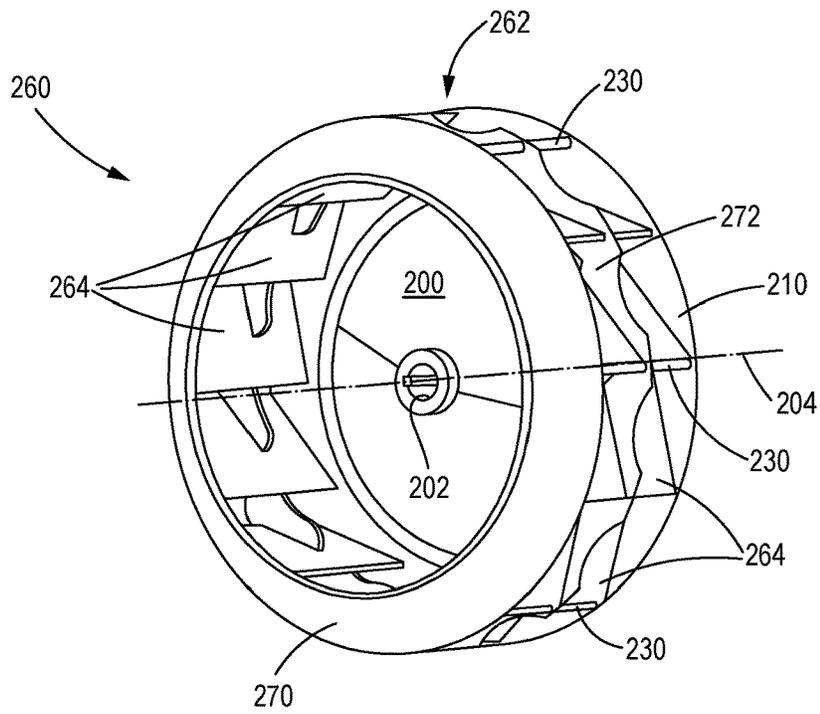


FIG. 8

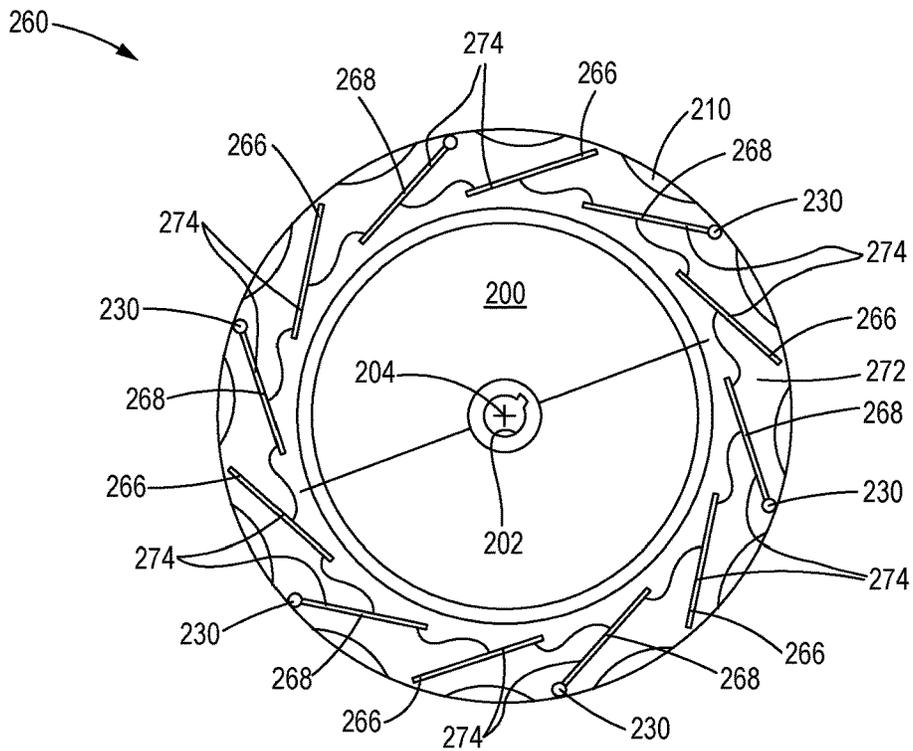


FIG. 9

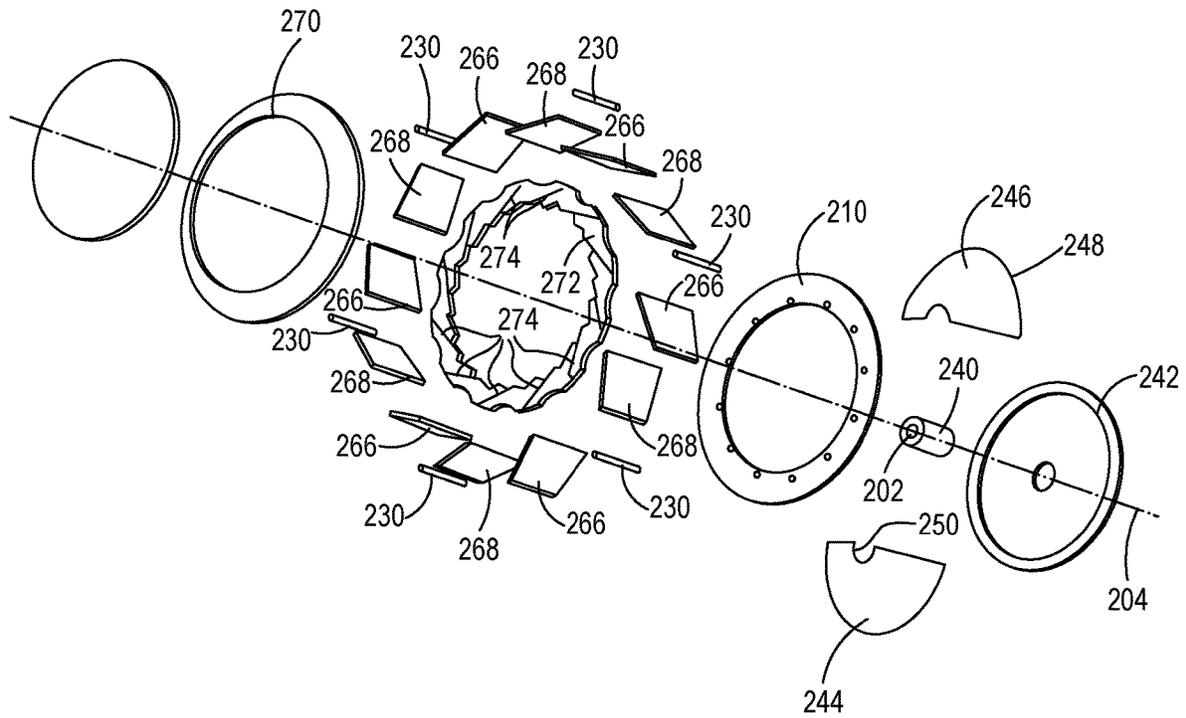


FIG. 10

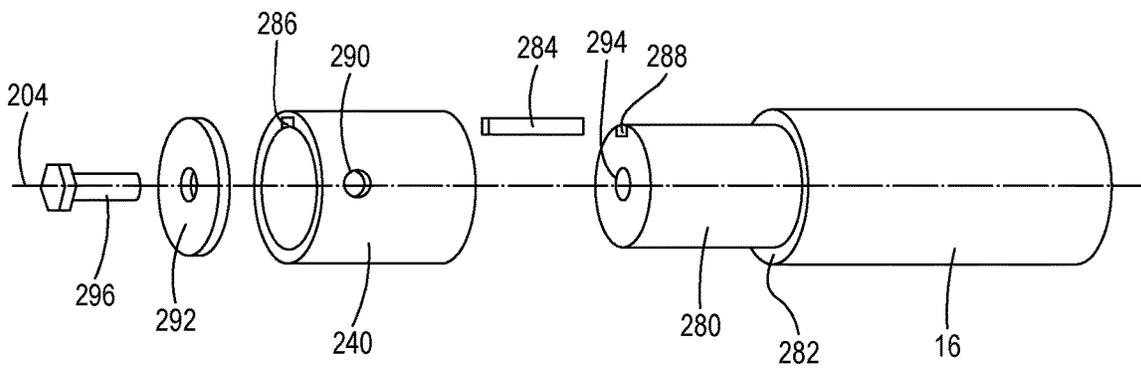


FIG. 11

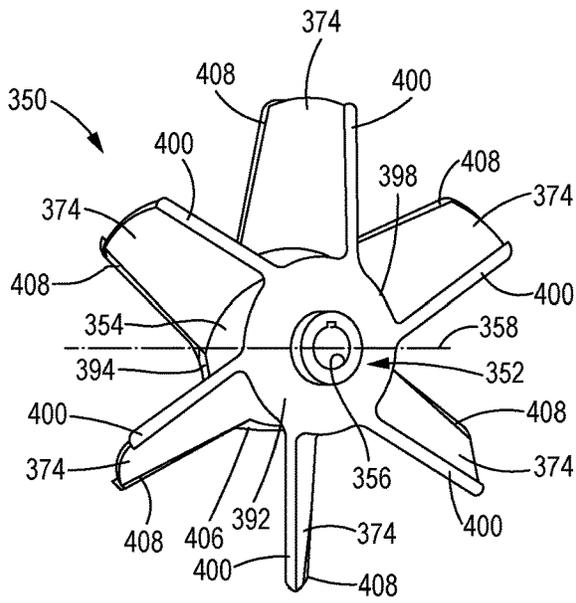


FIG. 16

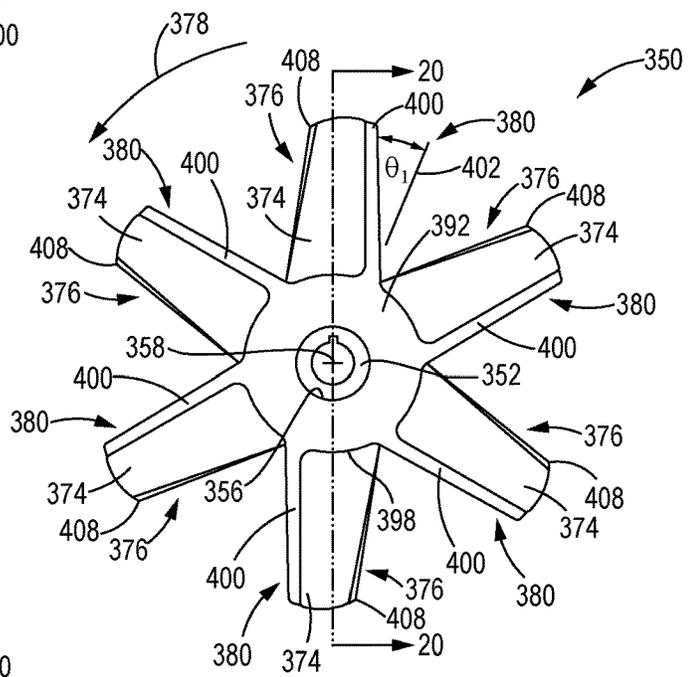


FIG. 17

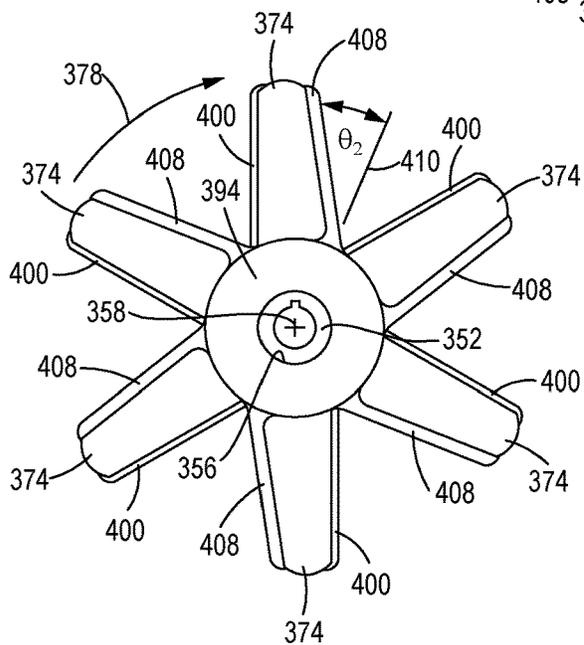


FIG. 18

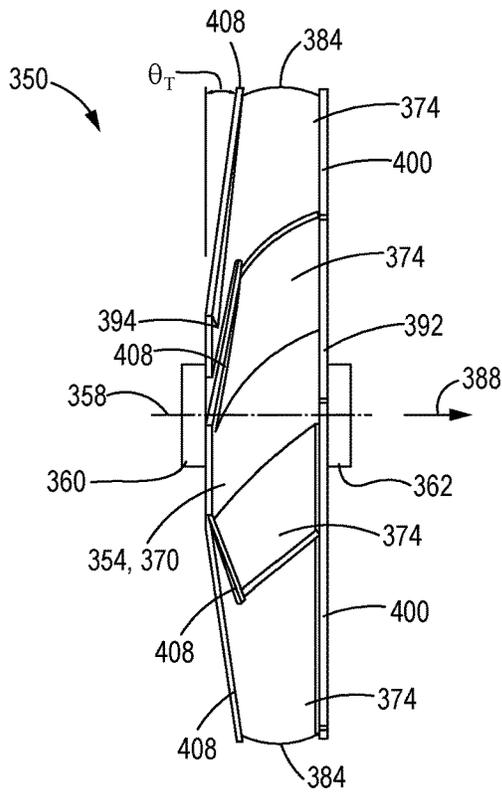


FIG. 19

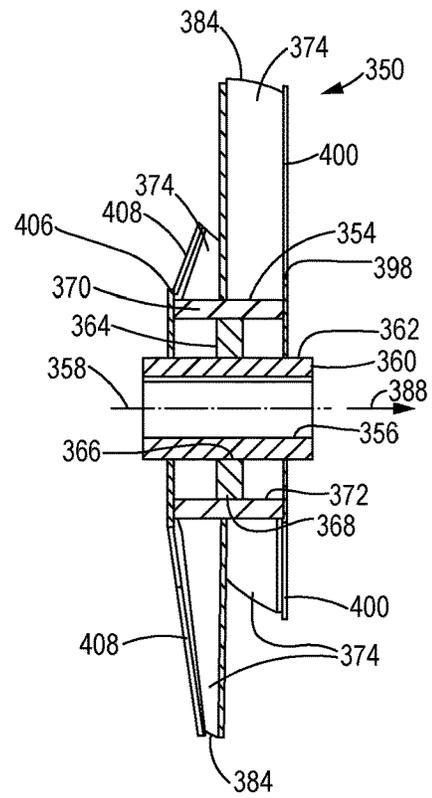


FIG. 20

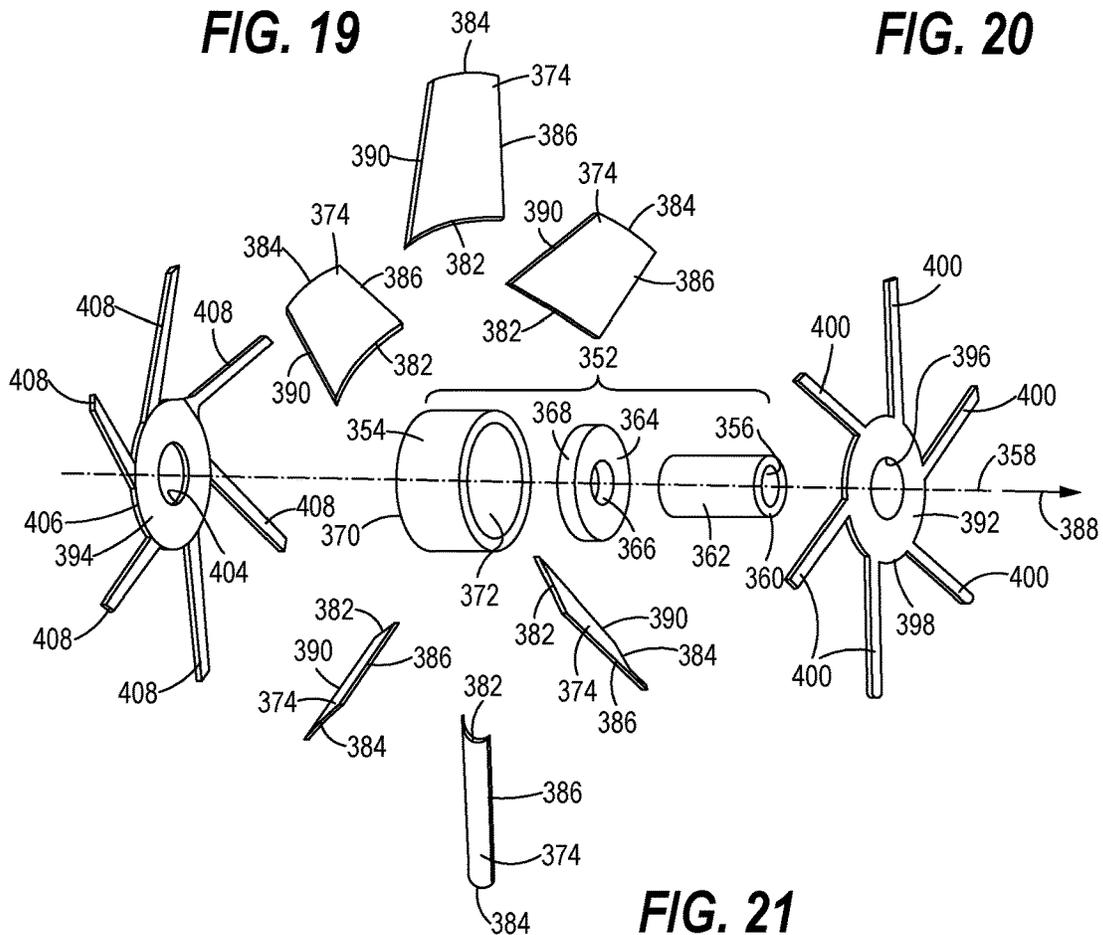


FIG. 21

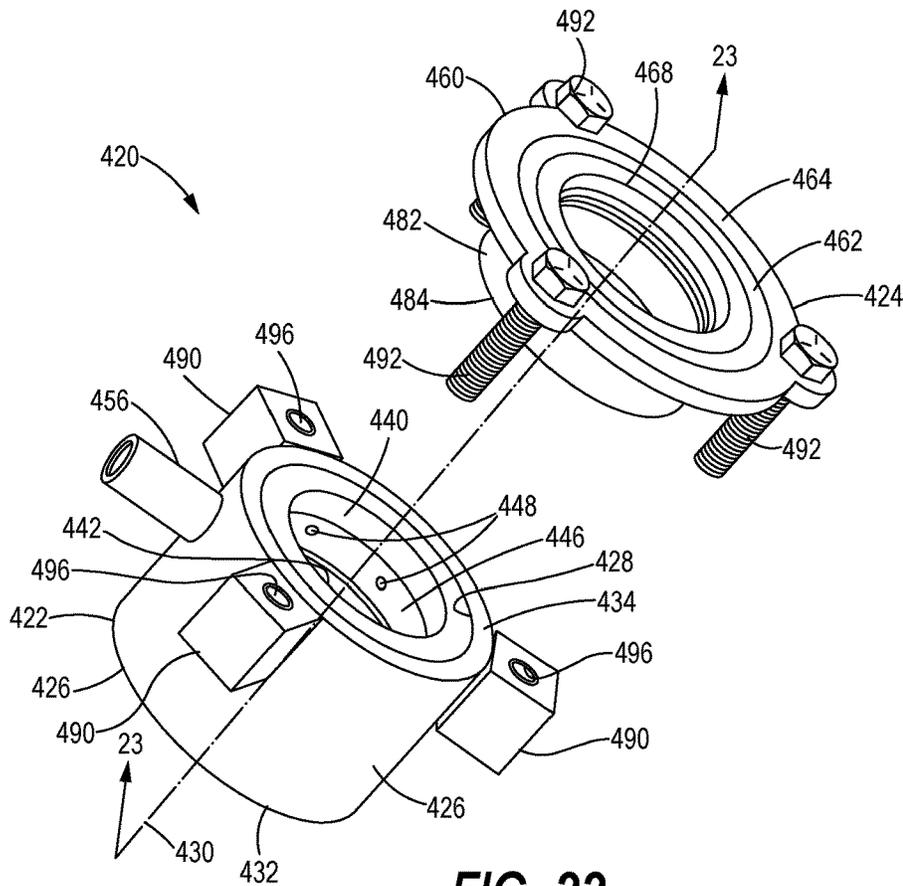


FIG. 22

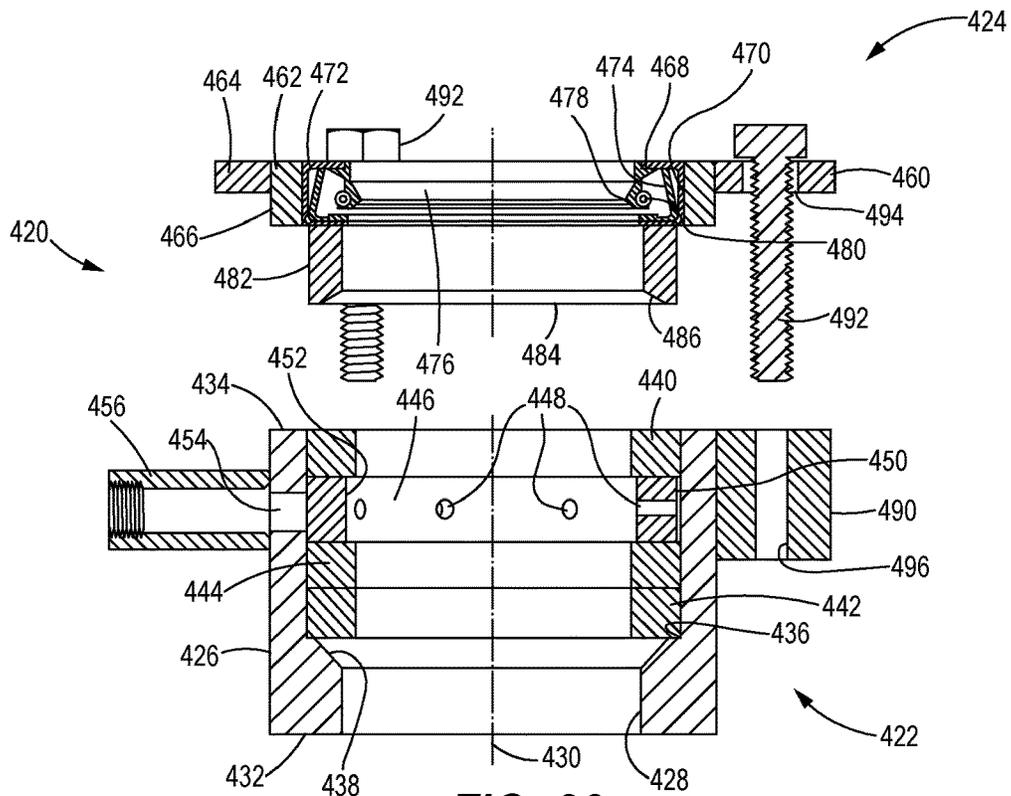


FIG. 23

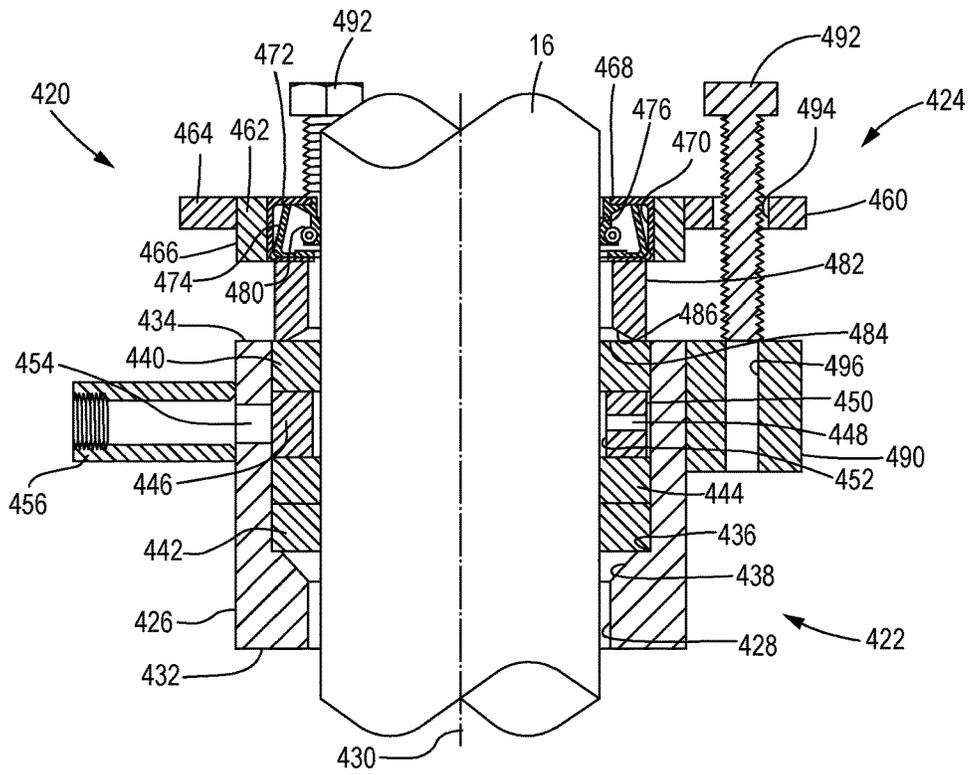


FIG. 24

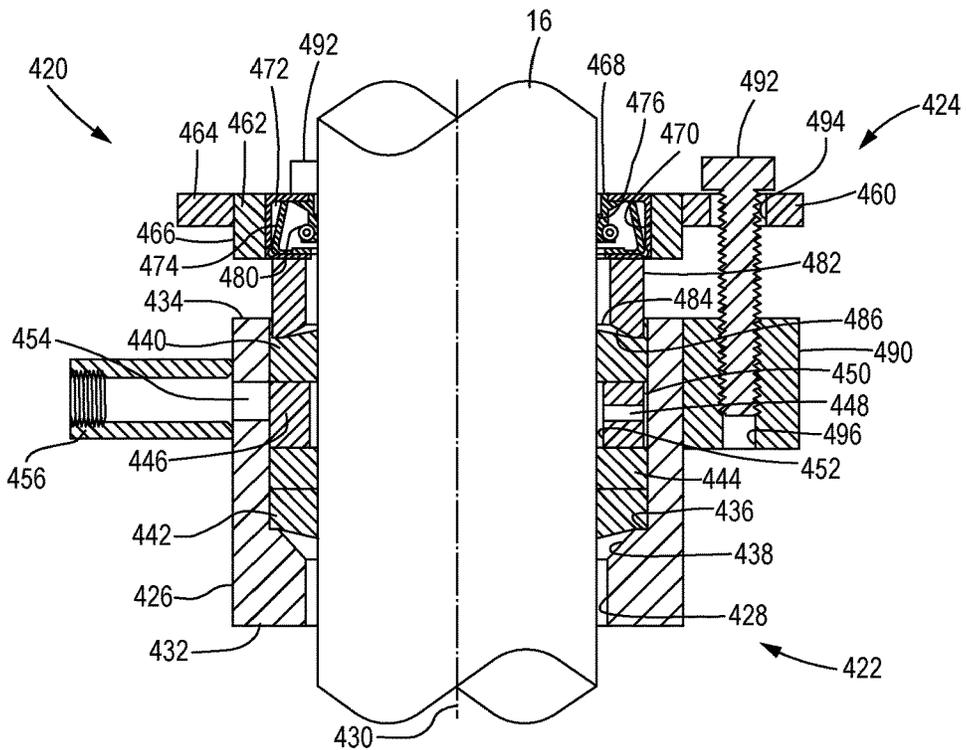


FIG. 25

RADIAL BLADE IMPELLER FOR AN INDUSTRIAL FAN ASSEMBLY

TECHNICAL FIELD

The present disclosure relates generally to industrial fan assemblies and, more particularly, to a radial blade impeller for an industrial fan assembly.

BACKGROUND

Industrial fan assemblies are used in industrial applications to create fluid flow for processes such as combustion, ventilation, aeration, particulate transport, exhaust, cooling, air-cleaning, drying and air recirculation. Fluid flow is created by rotating an impeller having a plurality of blades to create a reduced pressure at an inlet of the fan assembly to draw air in and an increased pressure at an outlet of the fan assembly to discharge air back into the operating environment. Typically, an industrial fan assembly includes a mounting structure on which a motor and a fan shaft are mounted. A transmission connects the motor to the shaft to convert rotation of a motor shaft of the motor into corresponding rotation of the fan shaft. The impeller is mounted on or otherwise operatively connected to the fan shaft so that rotation of the fan shaft causes rotation of the impeller to generate the fluid flow.

Industrial fans may be generally categorized as being either centrifugal fans or axial fans depending on the flow path of the air passing there through. Centrifugal fans use the rotating impeller to draw air in, typically entering the impeller along an axial path parallel to a rotational axis of the impeller. The air is then redirected to radial flow paths through the impeller blades and out of the fan assembly. The airflow gains kinetic energy as the air moves radially outward toward the impeller blade tips, and the kinetic energy is converted to a static pressure increase beyond the impeller blades causing discharge the air through the fan outlet. Axial fans in contrast move fluid along the rotational axis of the impeller. The fluid is pressurized by the axial forces, or aerodynamic lift, generated by the impeller blades.

The impeller blades of the industrial fan assemblies are subjected to loads and stresses during the operation of the fan assemblies. Where the industrial fan assemblies are implemented in high temperature environments, the impeller blades are further subjected to thermal stresses that, along with the other loads and stresses, can cause the impeller blades to change shape from having a formed radius and blade twist for optimum performance, and thereby result in reduced efficiency and unwanted vibration. These changes can also result in increased sound levels, increased turbulence past the impeller that increases the resistance of the system and the static pressure against which the fan operates. The components of the industrial fan assemblies may also be affected by chemicals and by-products in corrosive atmospheres. Ultimately, the additional thermal stresses and other adverse conditions can result in earlier fatigue failure of the impeller and more frequent need for replacement in high temperature environments as the fan endures numerous thermal cycles from process and in corrosive environments due to exposure to harmful chemicals than when operating in environments that do not cause the same level of thermal stresses or corrosive exposure on the impellers.

SUMMARY OF THE DISCLOSURE

In one aspect of the present disclosure, an impeller is disclosed. The impeller may include an impeller hub having

a cylindrical shape, a hub outer surface and a hub shaft bore, a plurality of blade arms circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the blade arms having a leading arm surface facing a direction of rotation of the impeller and a trailing arm surface opposite the leading arm surface, a plurality of impeller blades, each of the impeller blades corresponding to one of the blade arms and having a leading blade surface facing the direction of rotation of the impeller and a trailing blade surface opposite the leading blade surface and facing and engaging the leading arm surface of the one of the blade arms, and a plurality of blade gussets. Each of the blade gussets is disposed between adjacent impeller blades, has a long gusset arm engaging and secured to the trailing arm surface of the one of the blade arms corresponding to one of the impeller blades, and has a short gusset arm engaging and secured to the leading blade surface of an adjacent impeller blade.

In another aspect of the present disclosure, an impeller is disclosed. The impeller may include an impeller hub having a cylindrical shape, a hub outer surface and a hub shaft bore, a plurality of impeller blade assemblies circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the impeller blade assemblies having a leading blade assembly surface facing a direction of rotation of the impeller and a trailing blade assembly surface opposite the leading blade assembly surface, a first sprocket disposed on a first end of the impeller hub and engaging a first lateral edge of each of the impeller blade assemblies, the first sprocket having a plurality of first sprocket teeth extending outward from and circumferentially spaced about a first sprocket outer edge, wherein each of the plurality of first sprocket teeth corresponds to one of the impeller blade assemblies and engages and is secured to the first lateral edge of the corresponding one of the impeller blade assemblies, and a second sprocket disposed on a second end of the impeller hub and engaging a second lateral edge of each of the impeller blade assemblies, the second sprocket having a plurality of second sprocket teeth extending outward from and circumferentially spaced about a second sprocket outer edge, wherein each of the second sprocket teeth is aligned with one of the impeller blade assemblies and engages and is secured to the second lateral edge of the corresponding one of the impeller blade assemblies.

In a further aspect of the present disclosure, an impeller is disclosed. The impeller may include an impeller hub having a cylindrical shape, a hub outer surface and a hub shaft bore, six blade arms circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the six blade arms having a leading arm surface facing a direction of rotation of the impeller and a trailing arm surface opposite the leading arm surface, six impeller blades, each of the six impeller blades corresponding to one of the six blade arms and having a leading blade surface facing the direction of rotation of the impeller and a trailing blade surface opposite the leading blade surface and facing and engaging the leading arm surface of the one of the six blade arms, and six blade gussets, each of the six blade gussets being disposed between adjacent ones of the six impeller blades, having a long gusset arm engaging and secured to the trailing arm surface of the one of the six blade arms corresponding to one of the six impeller blades, and having a short gusset arm engaging and secured to the leading blade surface of the adjacent one of the six impeller blades. The impeller further includes a first sprocket disposed on a first end of the impeller hub and engaging a first

3

lateral edge of each of the six blade arms, the first sprocket having six first sprocket teeth extending outward from and circumferentially spaced about a first sprocket outer edge, wherein each of the six first sprocket teeth is aligned with one of the six blade arms and engages and is secured to the first lateral edge of the corresponding one of the six blade arms, and a second sprocket disposed on a second end of the impeller hub and engaging a second lateral edge of each of the six blade arms, the second sprocket having six second sprocket teeth extending outward from and circumferentially spaced about a second sprocket outer edge, wherein each of the six second sprocket teeth is aligned with one of the six blade arms and engages and is secured to the second lateral edge of the corresponding one of the six blade arms.

Additional aspects are defined by the claims of this patent.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an isometric view of an industrial fan assembly including an embodiment of a fan mount assembly in accordance with the present disclosure;

FIG. 2 is an isometric view of an industrial fan assembly including an alternative embodiment of a fan mount assembly in accordance with the present disclosure;

FIG. 3 is an exploded isometric view of the industrial fan assembly of FIG. 1;

FIG. 4 is an isometric view of an embodiment of an impeller of the industrial fan assembly of FIG. 1 in accordance with the present disclosure;

FIG. 5 is a top view of the impeller of FIG. 4;

FIG. 6 is a top view of the impeller of FIG. 4 with a top impeller ring removed to reveal a top impeller blade deck;

FIG. 7 is an isometric exploded view of the impeller of FIG. 4;

FIG. 8 is an isometric view of an alternative embodiment of an impeller of the industrial fan assembly of FIG. 1 in accordance with the present disclosure;

FIG. 9 is a top view of the impeller of FIG. 8 with an impeller ring removed to reveal an impeller blade deck;

FIG. 10 is an isometric exploded view of the impeller of FIG. 8;

FIG. 11 is an isometric exploded view of a shaft end and an impeller hub of the industrial fan assembly of FIG. 1;

FIG. 12 is an isometric view of a further alternative embodiment of an impeller of the industrial fan assembly of FIG. 1 in accordance with the present disclosure;

FIG. 13 is an end view of the impeller of FIG. 12;

FIG. 14 is an end view of the impeller of FIG. 12 with a hub sprocket removed;

FIG. 15 is an isometric exploded view of the impeller of FIG. 12;

FIG. 16 is an isometric view of a further alternative embodiment of an impeller of the industrial fan assembly of FIG. 1 in accordance with the present disclosure;

FIG. 17 is an end view of the impeller of FIG. 16;

FIG. 18 is an opposite end view of the impeller of FIG. 16;

FIG. 19 is a side view of the impeller of FIG. 16;

FIG. 20 is a cross-sectional view of the impeller of FIG. 16 taken through line 20-20 of FIG. 17;

FIG. 21 is an isometric exploded view of the impeller of FIG. 16;

FIG. 22 is an isometric exploded view of a rotary seal in accordance with the present disclosure for the industrial fan assemblies of FIGS. 1 and 2;

FIG. 23 is a cross-sectional view of the rotary seal of FIG. 22 taken through line 23-23 of FIG. 22;

4

FIG. 24 is the cross-sectional view of the rotary seal of FIG. 23 with a fan shaft inserted through the rotary seal and with a seal cover detached from a seal housing of the rotary seal; and

FIG. 25 is the cross-sectional view of the rotary seal of FIG. 23 with the fan shaft inserted through the rotary seal and with the seal cover attached to the seal housing and compressing seal rings disposed within the seal housing.

DETAILED DESCRIPTION

FIG. 1 illustrates an exemplary configuration of an industrial fan assembly 10 that may be implemented in high temperature applications. The industrial fan assembly 10 may include a fan mount assembly 12 supporting a motor 14, a fan shaft 16 (FIG. 3), and a transmission 18 connecting the motor 14 to the fan shaft 16. The fan assembly 10 further includes an impeller 20, such as the forward curve wheel hub impeller 20 shown in FIG. 1, mounted to an end of the fan shaft 16 opposite the transmission 18. The impeller 20 may be installed within a high temperature area such as a furnace or curing station, while the other components of the industrial fan assembly 10 are disposed external to the high temperature environment. An insulation dam assembly 22 may be positioned on the fan shaft 16 between the fan mount assembly 12 and the impeller 20, and mounted to a wall or other interface between the high temperature and low temperature areas to reduce or prevent heat transfer across the interface. The insulation dam assembly 22 can also prevent infiltration of the ambient atmosphere into the environment of the impeller 20 from negative pressure created by the spinning of the impeller 20, and vice versa where the impeller 20 is disposed within a pressurized environment.

FIG. 2 illustrates an alternative free-standing configuration of an industrial fan assembly 30 typically used in exhausting applications and having a fan mount assembly 32, a motor 34, a fan shaft 36 and a transmission 38 configured to specific applications. FIG. 2 more clearly illustrates the motor shaft 40 of the motor 34 and the fan shaft 36 connected by the transmission 38, and the fan shaft 36 being rotatably mounted on the fan mount assembly 32 by shaft bearings 42. An impeller (not shown) such as the impeller 20 or other appropriate impeller such as those illustrated and described further hereinafter, may be mounted to the fan shaft 36 opposite the transmission 38 and disposed within a fan housing 44. The fan housing 44 may be insulated and function similar to the insulation dam assembly 22 with regard to limiting heat transfer between the high temperature and low temperature areas to ensure workforce safety and protect personnel from burn hazards even in implementations where the high temperature environment can have temperatures in excess of 1,800° F. The fan housing 44 includes a fan housing inlet 46 for drawing air to the impeller, and a fan housing outlet 48 for expelling air from the fan housing 44. The fan housing 44 may include additional fan housing outlets 48 circumferentially spaced about the fan housing 44 to offer alternate discharge directions depending on the requirements of a particular customer installation. In this arrangement, the centrifugal flow impeller and the fan housing 44 change the direction of airflow by 90° from the fan housing inlet 46 to the fan housing outlet 48. When axial flow impellers are used, such as those described below, the fan housing 44 or other airflow control structures may be used to cause inlet air and outlet air to flow in the axial direction through the axial flow impeller relative to the fan shaft 16, 36 and the rotation of the impeller. The fan housing 44 may further include lift brackets 50 to which

5

cables, chains, pulleys, cranes or other positioning mechanisms may be attached to transport and position the fan housing 44 during installation.

Additional details of the fan assembly 10 of FIG. 1 are shown in the exploded view of FIG. 3. The fan mount assembly 12 is shown with the components detached and separated, including components welded together in the final assembly of the fan mount assembly 12. The fan mount assembly 12 includes a top plate 60, a first side plate 62 and a second side plate 64 as main structural components. The top plate 60 has a top plate top surface 66, a top plate bottom surface 68, and a first top plate lateral edge 70 and a second top plate lateral edge 72 disposed on opposite sides of the top plate 60. One or more top plate slots 74 extend through the top plate 60 proximate the first top plate lateral edge 70, and one or more top plate slots 76 extend through the top plate 60 proximate the second top plate lateral edge 72.

The first side plate 62 and the second side plate 64 may be generally planar, but may include some contouring to accommodate other structural elements and components attached to the fan mount assembly 12. The first side plate 62 has a first side plate inner surface 80, a first side plate outer surface 82 and a first side plate top edge 84. The first side plate 62 further includes one or more first side plate tabs 86 extending upward from the first side plate top edge 84. Each of the first side plate tabs 86 corresponds in size and position with one of the top plate slots 74. The second side plate 64 may be a mirror image of the first side plate 62, and includes a second side plate inner surface 90, a second side plate outer surface 92, a second side plate top edge 94 and one or more second side plate tabs 96 extending upward from the second side plate top edge 94 and each corresponding in size and position with one of the top plate slots 76. The main portion of the fan mount assembly 12 may be assembled by inserting the side plate tabs 86, 96 upward through the corresponding top plate slots 74, 76, respectively, until the side plate top edges 84, 94 engage the top plate bottom surface 68. The top plate slots 74, 76 and the side plate tabs 86, 96 may be dimensioned for a relatively close fit so that the side plates 62, 64 are at approximately their proper alignment relative to the top plate 60 when the side plate top edges 84, 94 engage the top plate bottom surface 68.

Further precise alignment of the side plates 62, 64 relative to the top plate 60 may be achieved with additional support structures. For example, tab gussets 100 may be welded to the top plate top surface 66 and corresponding portions of the side plate inner surfaces 80, 90 for each of the side plate tabs 86, 96, respectively, after the side plate tabs 86, 96 are inserted through the top plate slots 74, 76. Upper structural support brackets 102 may be connected between the side plate inner surfaces 80, 90 of the side plate tabs 86, 96 positioned across from each other after the side plate tabs 86, 96 are inserted through the top plate slots 74, 76. One or more lower structural support brackets 104 may be connected between the side plate inner surfaces 80, 90 below the top plate bottom surface 68 before or after the side plate tabs 86, 96 are inserted through the top plate slot 74, 76. The structural support brackets 102, 104 may have lengths that are approximately equal to a distance between the top plate slots 74, 76 so that the side plates 62, 64 are approximately parallel when the fan mount assembly 12 is assembled.

In the illustrated embodiment, the fan shaft 16 is mounted to the top plate bottom surface 68 by a pair of shaft bearings 110 that may be secured by shaft bearing mounting bolts 112 or other appropriate fastening means. The fan shaft 16 extends beyond the top plate 60 and the side plates 62, 64 at

6

both ends. A first shaft end 114 of the fan shaft 16 extends through a heat slinger 116 that is mounted on the fan shaft 16 to act as a heat sink and dissipate heat from the high temperature area. The first shaft end 114 further extends through the insulation dam assembly 22 and has the impeller 20 mounted thereon so that the insulation dam assembly 22 is disposed between the fan mount assembly 12 and the impeller 20.

A second shaft end 118 of the fan shaft 16 is received into the transmission 18 through a transmission fan shaft opening 120. A motor shaft 122 of the motor 14 is received into the transmission 18 by a transmission motor shaft opening 124. The second shaft end 118 and the motor shaft 122 are operatively connected to the internal components of the transmission 18 so that rotation of the motor shaft 122 causes a corresponding rotation of the fan shaft 16 and the impeller 20. The transmission 18 may include belts, chains or other torque transfer components that must be loaded to create sufficient attention to prevent slippage in the transmission 18. Consequently, the transmission motor shaft opening 124 may be an elongated slot that allows the distance between the second shaft end 118 and the motor shaft 122 to be varied as necessary to create the required tension in the components of the transmission 18.

Adjustment of the position of the motor shaft 122 is accomplished in the fan mount assembly 12 by providing a movable motor mounting bracket 130 to which the motor 14 is mounted with motor mounting bolts 132 and motor mounting nuts 134 or other appropriate fastening means. The motor mounting bracket 130 as illustrated includes a motor mounting plate 136 with a motor plate top surface 138 to which the motor 14 is secured, a motor plate bottom surface 140, a first motor plate lateral edge 142 and a second motor plate lateral edge 144 opposite the first motor plate lateral edge 142. A first motor height adjustment plate 146 extends downward from the first motor plate lateral edge 142 and has vertical motor height adjustment slots 148 there through, and a second motor height adjustment plate 150 extends downward from the second motor plate lateral edge 144 and also has vertical motor height adjustment slots 152 extending there through. The first side plate tabs 86 include motor height adjustment apertures 154 that can be aligned with the motor height adjustment slots 148 and the second side plate tabs 96 include motor height adjustment apertures 156 that can be aligned with the motor height adjustment slots 152. When the motor height adjustment apertures 154, 156 are aligned with the motor height adjustment slots 148, 152, respectively, motor height adjustment bolts 158 may be inserted through the pairs of motor height adjustment apertures 154, 156 and motor height adjustment slots 148, 152 and secured therein by the motor height adjustment nuts 160. The height of the motor 14 and the motor mounting plate 136 above the top plate 60, and correspondingly the distance between the second shaft end 118 and the motor shaft 122, is set by positioning the motor mounting bracket 130 relative to the top plate 60 and securing the first motor height adjustment plate 146 to the first side plate tabs 86 and the second motor height adjustment plate 150 to the second side plate tabs 96 with the motor height adjustment bolts 158 and the motor height adjustment nuts 160. If additional structural support as necessary, motor mounting plate gussets 162 may be installed on the motor plate bottom surface 140 and the motor height adjustment plates 146, 150 at locations that will not cause interference with the movement of the motor height adjustment plates 146, 150 relative to the side plate tabs 86, 96.

The fan mount assembly **12** may be secured to the insulation dam assembly **22** to form a single unitary component. In one embodiment, a top plate end edge **164**, a first side plate end edge **166** and a second side plate end edge **168** may be secured to an outer surface of an insulation dam mounting plate **170**, such as by welding. Further structural support may be provided by wing gussets **172** secured between the top plate top surface **66** and the insulation dam mounting plate **170**. One of the wing gussets **172** may be proximate the first top plate lateral edge **70** and be aligned approximately above the first side plate top edge **84**, and the other wing gusset **172** may be proximate the second top plate lateral edge **72** and be aligned approximately above the second side plate top edge **94**. In alternative embodiments, the wing gussets **172** may be additional side plate tabs **86**, **96** extending upward from the side plate top edges **84**, **94**, respectively. The top plate **60** may have additional top plate slots **74**, **76** at the top plate end edge **164** that align with the wing gussets **172**/side plate tabs **86**, **96**. The wing gussets **172** may be inserted through the top plate slots **74**, **76** along with the other side plate tabs **86**, **96** and then secured to the insulation dam mounting plate **170** by welding or other securement means.

The fan mount assembly **12** may facilitate installation by providing multiple points of attachment for lifting or transportation equipment. Consequently, the top plate **60** may have top plate lift openings **174** proximate the transmission **18**, and the side plates **62**, **64** may have side plate lift openings **176** proximate both the transmission **18** and the insulation dam assembly **22**. The motor mounting bracket **130** may have motor mounting bracket lift openings **178** on each of the motor height adjustment plates **146**, **150**, and the wing gussets **172** may have a wing gusset lift openings **180**. Each of the lift openings **174-180** may be sized for attachment of a rope, chain, hook or other lift or transportation mechanism connection. The fan mount assembly **12** may further facilitate access to the interior of the fan mount assembly **12** via access apertures **182** through the side plates **62**, **64**. The access apertures **182** can provide convenient access points for bearing lubrication stations for providing lubricant to the shaft bearings **110** without disassembling any components of the fan mount assembly **12** or removing shaft safety guards **184**, **186** that may be installed to cover the fan shaft **16**. The access apertures **182** may also provide a point of access for providing gas to or purging gas from a rotary seal (see FIGS. **22-25** and accompanying discussion below) that substantially prevents airflow between the high temperature or corrosive environment and the ambient environment.

FIGS. **4-7** illustrate an embodiment of the impeller **20** of the industrial fan assembly **10**. The impeller **20** is a forward curved wheel impeller that is configured for extended use in high temperature environments. The impeller **20** may include one or more levels or decks of impeller blades mounted on an impeller hub assembly. In the illustrated embodiment, the impeller has three impeller blade decks. Referring to FIG. **4**, the impeller **20** includes an impeller hub assembly **200** having a hub shaft bore **202** for receiving the first shaft end **114** of the fan shaft **16**. The hub shaft bore **202** has a bore longitudinal axis **204** about which the impeller hub assembly **200** and the other components of the impeller **20** are symmetrical to facilitate rotation substantially free of vibration.

The impeller **20** further includes an impeller baseplate **210** mounted on the impeller hub assembly **200**. The impeller baseplate **210** has an annular shape, a baseplate bottom surface facing and secured to the impeller hub assembly **200**,

and a baseplate top surface opposite the baseplate bottom surface. A first or bottom impeller blade deck **212** is formed by a plurality of first impeller blades **214** that are secured to and extend upward from the baseplate top surface. The first impeller blades **214** are circumferentially spaced about the bore longitudinal axis **204** and the impeller baseplate **210**. A first impeller ring **216** is secured to the first impeller blades **214** opposite the impeller baseplate **210**. Similar to the impeller baseplate **210**, the first impeller ring **216** has an annular shape, a first ring bottom surface facing and engaging the first impeller blades **214**, and a first ring top surface opposite the first ring bottom surface. A second impeller blade deck **218** is formed by a plurality of second impeller blades **220** extending between the first ring top surface and a second ring bottom surface of a second impeller ring **222**, and a third impeller blade deck **224** is formed by a plurality of third impeller blades **226** extending between the second ring top surface and a third ring bottom surface of a third impeller ring **228**. Three impeller blade decks **212**, **218**, **224** are shown in the illustrated embodiment, but the impeller **20** in accordance with the present disclosure may have more or fewer impeller blade decks depending on the requirements for the high temperature application.

As shown in the top views of FIG. **5** and FIG. **6** (third impeller ring **228** removed), the impeller baseplate **210** and the impeller rings **216**, **222**, **228** may have approximately equal outer diameters. The impeller rings **216**, **222**, **228** may have approximately equal inner diameters, while the impeller baseplate **210** may have a smaller inner diameter to provide greater surface area on the baseplate bottom surface for engagement with the impeller hub assembly **200**. In alternative embodiments, the outer diameters and the inner diameters of the impeller baseplate **210** and the impeller rings **216**, **222**, **228** may not be equal depending on the requirements of a particular implementation.

FIGS. **4** and **6** illustrate the distribution and alignment of the impeller blades **214**, **220**, **226** within and between the impeller blade decks **212**, **218**, **224**. As mentioned previously, the impeller blades **214**, **220**, **226** of each impeller blade deck **212**, **218**, **224** are circumferentially spaced about the bore longitudinal axis **204** is best seen in FIG. **6** for the third impeller blade deck **224**. Moreover, each impeller blade **214**, **220**, **226** is longitudinally aligned with corresponding impeller blades **214**, **220**, **226** in the adjacent decks as is most apparent from FIG. **4**. Each of the impeller blades **214**, **220**, **226** has a curved shape in a cross-sectional plane perpendicular to the bore longitudinal axis **204** for efficient discharge of air from the industrial fan assembly **10**. At the same time, the impeller blades **214**, **220**, **226** extend generally radially outward relative to the bore longitudinal axis **204** from corresponding inner edges of the impeller rings **216**, **222**, **228**. Those skilled in the art will understand that the impeller blades **214**, **220**, **226** may have alternative geometric configurations, and may even be flat or planar, and may have different orientations relative to the bore longitudinal axis **204**.

During use, the impeller blades **214**, **220**, **226** are subjected to inertial loads and stress loads caused by the rotation of the components of the impeller **20** and the forces required to redirect the airflow. Additionally, thermal stresses are created due to the high temperature environment. With the thin profiles of the impeller blades **214**, **220**, **226**, over time, the combination of stresses can cause the impeller blades **214**, **220**, **226** to flatten out, leading to decreased efficiency, imbalance causing vibration, and ultimately failure of the impeller blades **214**, **220**, **226**.

To reduce the stresses experienced by the impeller blades **214**, **220**, **226**, the impeller **20** in accordance with the present disclosure includes additional support structures. As seen in FIGS. **4** and **6**, the impeller **20** includes a plurality of reinforcement bars **230** extending from and secured to the impeller baseplate **210** and to the third impeller ring **216**. The reinforcement bars **230** are circumferentially spaced about the baseplate top surface and the third impeller ring bottom surface to preserve the balance of the impeller **20**. There are fewer reinforcement bars **230** than impeller blades **214**, **220**, **226** in each impeller blade deck **212**, **218**, **224**, and each reinforcement bar **230** is aligned with corresponding ones of the impeller blades **214**, **220**, **226** in each impeller blade deck **212**, **218**, **224**.

The reinforcement bars **230** are engaged by and secured to the corresponding impeller blades **214**, **220**, **226**. As a result, each group of impeller blades **214**, **220**, **226** in each impeller blade deck **212**, **218**, **224** has two types of impeller blades. Full impeller blades **232** (FIG. **6**) are not aligned with any of the reinforcement bars **230**, while reinforcement blades **234** are aligned with the reinforcement bars **230**. The full impeller blades **232** extend radially outward to a position proximate the outer edges of the impeller rings **216**, **222**, **228**, while the reinforcement blades **234** accommodate the reinforcement bars **230** that are positioned radially outward of the reinforcement blades **234** in the illustrated embodiment. Consequently, the reinforcement blades **234** have a shorter length than the full impeller blades **232** in the radial direction. As illustrated, each impeller blade deck **212**, **218**, **224** includes forty-eight total impeller blades **214**, **220**, **226**, with forty-four being full impeller blades **232** and four being reinforcement blades **234** corresponding to the four reinforcement bars **230**. Depending on the configuration of the impeller **20** and the requirements of an implementation of the industrial fan assembly **10**, the impeller **20** may have more or fewer impeller blades **214**, **220**, **226** and reinforcement bars **230**, and a ratio of the impeller blades **214**, **220**, **226** per impeller blade deck **212**, **218**, **224** to the reinforcement bars **230** of greater than or less than the 12-to-1 ratio in the present embodiment.

FIG. **7** presents an exploded view of the impeller **20** to further illustrate the configuration of the impeller rings **216**, **222** and the reinforcement bars **230**. The first impeller ring **216** has a plurality of first reinforcement bar apertures **236** and the second impeller ring **222** has a plurality of second reinforcement bar apertures **238** circumferentially spaced about the impeller rings **216**, **222**. During assembly, the reinforcement bar apertures **236**, **238** are aligned and the reinforcement bars **230** are inserted there through and secured to the impeller rings **216**, **222**, the baseplate top surface and the third ring bottom surface by welding or other securement means. In alternative embodiments, the reinforcement bar apertures **236**, **238** may be omitted and the reinforcement bars **230** may be replaced by shorter reinforcement bars having longitudinal links approximately equal to the longitudinal links of the impeller blades **214**, **220**, **226** and secured between the top and bottom surfaces of the impeller baseplate **210** and the impeller rings **216**, **222**, **228**.

FIG. **7** also illustrates one embodiment of the impeller hub assembly **200**. The impeller hub assembly **200** as shown includes an impeller hub **240** having a cylindrical shape, a hub outer surface and the hub shaft bore **202**. The impeller hub assembly **200** further includes an impeller hub backplate **242** having a hub backplate top surface and a hub backplate bottom surface opposite the hub backplate top surface. The impeller hub **240** is mounted to and is concentric with the

impeller hub backplate **242**, and the hub backplate top surface is facing, secured to and concentric with the baseplate bottom surface. An impeller hub cone is formed by a first hub half cone **244** and a second hub half cone **246**. When assembled, the impeller hub cone has a large diameter cone end **248** and a small-diameter cone end **250**. The large diameter cone end **248** is secured to the hub backplate top surface and is concentric with the impeller hub **240** and the impeller hub backplate **242**. The impeller hub **240** extends through the smaller diameter cone end **250**. The shape of the impeller hub cone promotes redirection of the airflow from an axial airflow when the air is entering the fan housing inlet **46** and the impeller **20** to radial airflow to the impeller blades **214**, **220**, **226** and out of the fan housing outlet **48**. The impeller hub assembly **200** may further include a plurality of hub gussets **252** that are circumferentially spaced about the impeller hub **240** and disposed between the hub backplate top surface and the impeller hub cone. The hub gussets **252** extend between and are secured to the hub outer surface and the hub backplate top surface. In alternative embodiments, the impeller hub cone could be a single unitary component, and the impeller baseplate **210** may be omitted and the reinforcement bars **230** and the impeller blades **214** of the first impeller blade deck **212** may be secured directly to the hub backplate top surface.

FIGS. **8-10** illustrate an alternative embodiment of an impeller **260** in the form of a backward inclined impeller having a single impeller blade deck **262** of a plurality of impeller blades **264**. In this embodiment, components corresponding to components of the impeller **20** are identified with the same reference numerals, such as the impeller hub assembly **200**, the impeller baseplate **210** and the reinforcement bars **230**. In this embodiment, the impeller blades **264** are configured as thin plates oriented at an angle relative to radial lines extending outwardly from the bore longitudinal axis **204** and passing through the impeller blades **264** as shown in the top view of FIG. **9**.

The number of reinforcement bars **230** is less than the number of impeller blades **264**, so the impeller blade deck **262** includes full impeller blades **266** that are not aligned with the reinforcement bars **230**, and reinforcement blades **268** aligned with the reinforcement bars **230** and being shorter than the full impeller blades **266**. The reinforcement bars **230** extend to a bottom surface of an impeller ring **270** (FIG. **8**) that has a conical shape that is apparent in FIGS. **8** and **10**. To accommodate the conical shape of the impeller ring **270**, the impeller blades **264** have an axial length that varies from a maximum at a radially inward most end to a minimum at a radially outward most end.

Due to their planar configuration and relatively large axial length, the impeller blades **264** may be more susceptible to deformation when subjected to torsional and thermal stresses during operation. The impeller blades **264** may be further reinforced by providing a blade support ring **272** between the impeller baseplate **210** and the impeller ring **270**. The blade support ring **272** may have a blade slot **274** corresponding to each of the impeller blades **264**, with the blade slots **274** being circumferentially spaced about the blade support ring **272**. The blade support ring **272** may be positioned approximately halfway between the impeller baseplate **210** and the impeller ring **270** and welded or otherwise secured to the impeller blades **264** and the reinforcement bars **230**. For each of the reinforcement blades **268**, the corresponding blade slots **274** may be configured to have the reinforcement bar **230** pass through the blade support ring **272**.

11

FIG. 11 illustrates an impeller attachment arrangement for securing the impellers 20, 260, and other impellers discussed herein can be reliably mounted to the first shaft end 114 of the fan shaft 16. The fan shaft 16 has a greater outer diameter than an inner diameter of the hub shaft bore 202. To be received into the hub shaft bore 202, the first shaft end 114 may have an impeller landing 280 machined down to an outer diameter that is less than the inner diameter of the hub shaft bore 202. The impeller landing 280 may have an axial length that is approximately equal to, or approximately 1/8" to 1/4" less than, an axial length of the impeller hub 240, and terminate at an impeller landing shoulder 282. When one end of the impeller hub 240 slides onto the impeller landing 28 to the impeller landing shoulder 282, the first shaft end 114 will be approximately flush with or slightly recessed from the opposite end of the impeller hub 240. The key 284 will be disposed within a keyway 286 of the impeller hub 240 and a key seat 288 of the impeller landing 280 to lock the impeller hub 280 and the fan shaft 16 for rotation together.

Set screws (not shown) tightened down in set screw apertures 290 will substantially prevent the impeller hub 240 from sliding axially away from the impeller landing shoulder 282. Further positive retention in the axial direction may be provided by an impeller retention plate 292. The impeller retention plate 292 may have an outer diameter greater than the inner diameter of the hub shaft bore 202 so that an outer edge of the impeller retention plate 292 extends beyond the hub shaft bore 202 and engages the end of the impeller hub 240. A retention bolt opening 294 is drilled in the first shaft end 114 and receives an impeller retention bolt 296. After the first shaft end 114 is inserted through the hub shaft bore 202, the impeller retention plate 292 is bolted to the first shaft end 114 to capture the impeller hub 240 between the impeller landing shoulder 282 and the impeller retention plate 292.

FIGS. 12-15 illustrate an alternative embodiment of a centrifugal impeller 300 in accordance with the present disclosure that may be implemented in the industrial fan assemblies 10, 30 in the form of a radial blade impeller 300. The impeller 300 includes an impeller hub 302 that may have a similar configuration as the impeller hub 240 illustrated and described above with a cylindrical shape, a hub outer surface 304 and a hub shaft bore 306 with a hub longitudinal axis 308 about which the impeller 300 rotates. The impeller 300 further includes a plurality of impeller blade assemblies 310 (e.g., six in the illustrated embodiment) circumferentially spaced about, secured to and extending outward from the hub outer surface 304. Each of the impeller blade assemblies 310 has a leading blade assembly surface 312 facing a direction of rotation 314 (FIG. 13) of the impeller 300 and a trailing blade assembly surface 316 opposite the leading blade assembly surface 312.

Each impeller blade assembly 310 may be a single unitary component in some embodiments. In the illustrated embodiment, however, the impeller blade assemblies 310 are formed from multiple component elements. Each impeller blade assembly 310 includes a blade arm 320 and an impeller blade 322 connected thereto. Each blade arm 320 has an inward arm edge secured to the hub outer surface 304 and extends approximately radially outward to an outward arm edge. Each blade arm 320 has a leading arm surface facing the direction of rotation 314 and a trailing arm surface opposite the leading arm surface, and has oppositely disposed lateral arm edges having an arm width there between that is less than a longitudinal length of the impeller hub 302.

12

Each impeller blade 322 has a leading blade surface facing the direction of rotation 314 and a trailing blade surface opposite the leading blade surface and facing and engaging the leading arm surface of the corresponding blade arm 320. The impeller blades 322 are oriented with an inward blade edge proximate the hub outer surface 304, and with the impeller blades 322 extending approximately radially outward to an outward blade edge. The impeller blades 322 have oppositely disposed lateral blade edges having a blade width that is greater than or equal to the arm width.

The impeller blades 322 may be configured to efficiently draw air in through the fan housing inlet 46 and discharge air from the fan housing outlet 48. Each impeller blade 322 may include a blade tapered portion 324 (FIG. 15) proximate the blade inward edge and a blade rectangular portion 326 proximate the blade outward edge. In the blade tapered portion 324, the blade width between the blade lateral edges may increase as the blade tapered portion 324 extends away from the blade inward edge and the hub outer surface 304. In the blade rectangular portion 326, the blade width may be constant as the blade rectangular portion 326 extends radially outward from the blade tapered portion 324 to the blade outward edge. Within the blade rectangular portion 326, an impeller blade bend 328 parallel to the hub longitudinal axis 308 may rotate the blade outward edge forward toward the direction of rotation 314 by an angle θ (FIG. 14). Depending on the implementation, the angle θ may be within the range from 10° to 40°, and may typically be approximately 30°. Forming the impeller blade bend 328 with the angle θ in the direction of rotation 314 may increase the overall strength of the impeller blades 322, and help prevent deformation or effects of the impeller blades 322 losing their straight edges due to torsional stresses or deformation cause by continuous operation in high temperature, chemical or highly corrosive processes.

The impeller 300 in accordance with the present disclosure includes additional support structures to reinforce the impeller blade assemblies 310 against torsional and thermal loads experienced during operation, particularly in high temperature environments. A first support structure is provided in the form of a plurality of blade gussets 330. Each blade gusset 330 is disposed between adjacent impeller blade assemblies 310, and includes a gusset base 332, a long gusset arm 334 and a short gusset arm 336. The gusset base 332 engages and is secured to a corresponding portion of the hub outer surface 304 as best seen in FIG. 14. The long gusset arm 334 extends radially outward from a leading side of the gusset base 332 and engages and is secured to the trailing blade assembly surface 316 of one of the impeller blade assemblies 310. The short gusset arm 336 extends radially outwardly from a trailing side of the gusset base 332 and engages and is secured to the leading blade assembly surface 312 of the adjacent impeller blade assembly 310 in the trailing direction.

In the illustrated embodiment, the long gusset arms 334 are secured to the trailing arm surfaces of the blade arms 320. The short gusset arms 336 may be secured to the leading surfaces of the blade arms 320, the impeller blades 322, or both. As shown in FIGS. 12 and 15, each of the impeller blades 322 has a gusset arm slot 338 extending upward from the inward blade edge by a distance sufficient for the gusset arm slot 338 to receive the short gusset arm 336 there in. The gusset arm slot 338 allows the short gusset arm 336 to engage the leading arm surface of the blade arm 320, and then the short gusset arm 336 may be welded to the blade arm 320 and/or the impeller blade 322.

As the impeller **300** rotates in the direction **314**, the force of the air creates loads on the impeller blade assemblies **310** in the opposite direction. The long gusset arms **334** assist in counteracting such loads. Moreover, when installed, the blade gussets **330** may be substantially axially aligned with respect to each other so that the long gusset arm **334** of one blade gusset **330** is aligned with the short gusset arm **336** on the opposite side of the impeller blade assembly **310**. This arrangement provides a unitizing structure whereby the blade arms **320** and the blade gussets **330** define a continuous support disk for the impeller blade assemblies **310** around the impeller hub **302**.

Additional structural support may be provided by a pair of hub sprockets **340** disposed on either end of the impeller hub **302** and engaging the impeller blade assemblies **310**. Each of the hub sprockets **340** is generally circular with a central sprocket opening **342** (FIG. 15) having an inner diameter large enough for the hub sprocket **340** to slide over one end of the impeller hub **302**. Each hub sprocket **340** further has a sprocket outer edge **344** having a plurality of sprocket teeth **346** extending radially outward from and circumferentially spaced about the sprocket outer edge **344**. The number of sprocket teeth **346** corresponds to the number of impeller blades **322**, i.e., six in the illustrated embodiment. This allows each sprocket tooth **346** to align with and provide support to one of the impeller blade assemblies **310**.

After the blade arms **320** are welded or otherwise secured to the hub outer surface **304**, one of the hub sprockets **340** may slide over a corresponding end of the impeller hub **302**. The hub sprocket **340** may then be rotated until the sprocket teeth **346** aligned with the impeller blade assemblies **310**. Once aligned, the hub sprocket **340** may be pressed against the corresponding lateral arm edges of the blade arms **320** and secured thereto by welds or other appropriate securement means. The second hub sprocket **340** may be installed on the opposite end of the impeller hub **302** in a similar manner. In some embodiments, the impeller blades **322** may be configured so that the inward blade edge and/or lateral blade edges are also engaged by and secured to the sprocket teeth **346**. The sprocket teeth **346** will provide additional support to the impeller blade assemblies **310** against loads applied opposite the direction of rotation **314**, and against loads tending to twist the impeller blade assemblies **310**. The hub sprockets **340** help to reinforce the areas of highest stress concentrations and add stability to the blade arms **320**. The additional support can prevent cracking between the blade arms **320** and the hub outer surface **304**, which tends to be an area with a high occurrence of failure in high temperature and corrosive environments, and a correspondingly high repair and replacement rate for previous radial blade impellers.

FIGS. 16-21 illustrate an embodiment of an axial impeller **350** in accordance with the present disclosure that may be implemented in the industrial fan assemblies **10**, **30**. The fan housing **44** would be replaced by an appropriate axial fan housing that would promote axial airflow into and out of the impeller **350**. The impeller **350** includes an impeller hub assembly **352** having a cylindrical shape, a hub assembly outer surface **354** and a hub shaft bore **356** having a hub longitudinal axis **358**. In some embodiments, the impeller hub assembly **352** may be a single unitary component that is forged, cast, machined or otherwise fabricated from a single piece of material. In contrast, in the illustrated embodiment as shown in FIG. 21, the impeller hub assembly **352** may be assembled from multiple components that may be fabricated from a single or multiple construction materials to form the central structure of the impeller **350**. As shown, the impeller

hub assembly **352** includes an impeller hub **360** having a cylindrical shape, a hub outer surface **362**, the hub shaft bore **356** with the hub longitudinal axis **358**, and a hub longitudinal length. The impeller hub assembly **352** may further include a hub center plate **364** having a center plate inner edge **366**, a center plate outer edge **368**, and a hub center plate thickness that is less than the hub longitudinal length. The hub center plate **364** is disposed on the impeller hub **360** with the center plate inner edge **366** engaging and secured to the hub outer surface **362**. As shown in FIG. 20, the hub center plate **364** may be located at approximately a longitudinal center point of the impeller hub **360**.

Returning to FIG. 21, the impeller hub assembly **352** may further include a hub outer cylinder **370** having an outer cylinder inner surface **372**, the hub assembly outer surface **354**, and an outer cylinder longitudinal length that is greater than the hub center plate thickness and less than the hub longitudinal length. The hub outer cylinder **370** is disposed on the hub center plate **364** and around the impeller hub **360**. The outer cylinder inner surface **372** of the hub outer cylinder **370** engages and is secured to the center plate outer edge **368**. The hub center plate **364** may be disposed within the hub outer cylinder **370** at approximately a longitudinal center point of the hub outer cylinder **370** (FIG. 20). With this configuration, ends of the impeller hub **360** may extend longitudinally beyond the corresponding ends of the hub outer cylinder **370**.

FIG. 16 further illustrates the impeller **350** having a plurality of impeller blades **374** circumferentially spaced about the hub assembly outer surface **354**. Each of the impeller blades **374** has a leading blade surface **376** (FIG. 17) facing a direction of rotation **378** of the impeller **350**, and a trailing blade surface **380** opposite the leading blade surface **376**. Each of the impeller blades **374** further has an inward blade edge **382** (FIG. 21) secured to the hub assembly outer surface **354**, and the impeller blades **374** extend outward to outward blade edges **384** that are opposite the inward blade edges **382**. A first or downstream lateral blade edge **386** is disposed on a downstream side of the impeller **350** relative to an airflow direction **388** created when the impeller **350** rotates in the direction of rotation **378** (FIGS. 17 and 18). A second or upstream lateral blade edge **390** is disposed opposite the downstream lateral blade edge **386** on an upstream side of the impeller **350**. The impeller blades **374** are curved, and in some implementations are slightly twisted into a formed fixture, to promote airflow in the airflow direction **388** and reduce stall and turbulence as the impeller **350** rotates in the direction of rotation **378**.

In previous axial impellers used in high temperature environments, impeller blades similar to those illustrated and described herein can tend to flatten and bend, and thereby reduce the airflow efficiency of and cause vibrations in the industrial fan assemblies **10**, **30**, make the airflow non-uniform, raise the static pressures, and increase the noise generated by the industrial fan assemblies **10**, **30**. Moreover, over time, cracks can develop at high stress areas found at the point of attachment of the impeller blades **374** to the hub assembly outer surface **354**. Vibration can lead to blade fatigue and the impeller blades **374** can detach from the hub assembly outer surface **354** and project from the impeller **350** as welds or other fastening systems and the impeller blades **374** themselves fail. In addition, dirt, soot, loose insulation, process heat by-products or other types of air stream debris can accumulate within the impeller hub assembly **352** in the area between the hub outer surface **362** and the outer cylinder inner surface **372** and cause imbalance in the impeller **350** that can further contribute to

vibrations and failure of the impeller 350. The impeller 350 in accordance with the present disclosure provides additional structural support and reinforcement of the impeller blades 374 that can extend the useful life of the impeller 350. The structural support may be provided by a first or downstream cover plate 392 and a second or upstream cover plate 394.

The first cover plate 392 is disposed on a downstream end of the impeller hub 360 and engages the hub outer cylinder 370. The first cover plate 392 is generally circular with a central cover plate opening 396 having an inner diameter large enough for the first cover plate 392 to slide over the downstream end of the impeller hub 360. The first cover plate 392 further has a first cover plate outer edge 398 having a cover plate outer diameter that is at least greater than an inner diameter of the outer cylinder inner surface 372 to prevent debris from entering and collecting in the downstream end of the impeller hub assembly 352. The flat outer surface of the first cover plate 392 may be flat and relatively smooth so that air stream debris in the airflow will not adhere to the first cover plate 392. The first cover plate 392 may also add strength to the hub outer cylinder 370. In previous axial blade impellers, extreme stresses associated with thermal and torsional stresses can increase downward of from the impeller blades to the center of rotation. Many times, the hub outer cylinder 370 and/or the impeller hub 360 will become deformed or will lose their round shape and deform into an "egg" or other non-symmetrical shape that will cause vibration. The first cover plate 392 supports the impeller hub assembly 352 to preserve the round, symmetrical shape. As shown in the illustrated embodiment in FIG. 20, the cover plate outer diameter may be greater than a hub assembly outer diameter of the impeller hub assembly 352 so that a portion of the first cover plate 392 extends beyond the hub assembly outer surface 354 and engages the first lateral blade edges 386 proximate the inward blade edges 382. The overlapping portions of the first cover plate 392 and the first lateral blade edges 386 may be welded or otherwise secured so that the first cover plate 392 supports a portion of the impeller blades 374.

The first cover plate 392 as illustrated further includes a plurality of first cover plate arms 400 extending outward from and circumferentially spaced about the first cover plate outer edge 398. The number of first cover plate arms 400 corresponds to the number of impeller blades 374, i.e., six in the illustrated embodiment. This allows each first cover plate arm 400 to align with and provide support to one of the impeller blades 374 when the first cover plate arm 400 is secured to the first lateral blade edge 386 of the impeller blades 374. In the present embodiment, the first cover plate arms 400 extend the length of the impeller blades 374 to the outward blade edges 384, and beyond the outward blade edges 384, to provide support to the entire length of the impeller blades 374 without disrupting the airflow and maintaining axial airflow velocity uniform along the radial length of the impeller blades 374. In axial impeller blades 374, the velocity is low near the hub assembly outer surface 354 and at a maximum at the outward blade edges 384 where flattening of the impeller blades 374 may begin to occur. The extension of the first cover plate arms 400 and corresponding support at the outward blade edges 384 can greatly reduce the overall flattening of the impeller blades 374.

The first cover plate arms 400 are oriented to follow the direction of the first lateral blade edges 386 of the impeller blades 374. As shown in FIG. 17, the first cover plate arms 400 extend from the first cover plate outer edge toward the direction of rotation of the impeller 350. The extension of

the first cover plate arms 400 may be expressed as a first plate arm angle θ_1 relative to a radial line 402 from the hub longitudinal axis 358. The first plate arm angle θ_1 may have a value within a range from 20° to 30°. In the illustrated embodiment, the first plate arm angle θ_1 is approximately equal to 23°.

The second cover plate 394 is disposed on an upstream end of the impeller hub 360 and engages the hub outer cylinder 370. The second cover plate 394 has a configuration that is generally similar to the configuration of the first cover plate 392, including a central cover plate opening 404 that slides over the upstream end of the impeller hub 360, and a cover plate outer edge 406 having the cover plate outer diameter to cover the upstream end of the impeller hub assembly 352, to extend beyond the hub assembly outer surface 354 and to engage the second lateral blade edges 390 proximate the inward blade edges 382. A smooth relatively flat outer surface that prevents buildup of air stream debris on the impeller hub 360, and the engagement of the second cover plate 394 with the hub outer cylinder 370 reinforces the impeller hub assembly 352 to preserve its round, symmetrical shape and prevent unwanted vibration. Six second cover plate arms 408 extend outward from and are circumferentially spaced about the second cover plate outer edge 406, and extend the length of the impeller blades 374 to the outward blade edges 384.

The second cover plate arms 408 are oriented to follow the direction of the second lateral blade edges 390 of the impeller blades 374. As shown in FIG. 18, the second cover plate arms 408 extend from the second cover plate outer edge away from the direction of rotation 378 of the impeller 350. The extension of the second cover plate arms 408 may be expressed as a second plate arm angle θ_2 relative to a radial line 410 from the hub longitudinal axis 358. Due to the curvature of the impeller blades 374, the second plate arm angle θ_2 may be greater than the first plate arm angle θ_1 . Consequently, the second plate arm angle θ_2 may have a value within a range from 25° to 40°. In the illustrated embodiment, the second plate arm angle θ_2 is approximately equal to 31°.

As can be seen in FIG. 19, the curvature of the impeller blades 374 may cause the longitudinal depth of the impeller blades 374 to decrease as the impeller blades 374 extend away from the hub assembly outer surface 354. In the illustrated embodiment, the first lateral blade edges 386 have an approximately constant longitudinal position between the inward blade edge 382 and the outward blade edge 384. The second lateral blade edges 390 move longitudinally toward the first lateral blade edges 386 as the impeller blades 374 extend away from the hub assembly outer surface 354. Consequently, the second cover plate arms 408 extend from the second cover plate outer edge 406 at a second plate arm taper angle θ_T so that a longitudinal distance between the second cover plate arms 408 and the first cover plate arms 400 decreases as the second cover plate arms 408 extend from the second cover plate outer edge 406. The second plate arm taper angle θ_T may have a value within a range from 5° to 10°.

In many implementations, the impellers 20, 260, 300, 350 are disposed within the high temperature or corrosive environments, while the fan mount assembly 12, the motor 14 and the transmission 18 are disposed in an ambient environment outside the high temperature environment, separated by an insulating structure such as the insulation dam assembly 22. However, because the fan shaft 16 must traverse the boundary between the high temperature and Ambient environments and be able to rotate to drive the

impellers **20**, **260**, **300**, **350**, heat transfer can occur at the interface where it may be preferable to thermally isolate the environments. Moreover, the high temperature environment in some implementations may have potentially hazardous gases or particulate matter that should not be permitted to be released into the ambient atmosphere. In some implementations, a controlled atmosphere may be utilized in the process performed within the controlled system, and ambient infiltration may yield non-desired results in the process or embrittlement to the finished products. In some processes, a chemical or gas such as nitrogen may be used in the process, such as a heat treating process, and may be injected or otherwise introduced into the high temperature environment to create a positive pressure in the system. Leakage of the chemical or gas from the enclosed system to the ambient surroundings through the fan shaft interface can yield undesired results within the process and create a potential hazard to the area surrounding the controlled system. Therefore, minimizing heat and material transmission across the interface may be a requirement in certain implementations of the industrial fan assemblies **10**, **30**.

FIGS. **22-25** illustrate an exemplary rotary seal **420** that may be installed at a shaft opening through the insulation dam assembly **22** of the industrial fan assembly **10** to isolate the high temperature environment and its associated heating and/or chemical process from the ambient environment. Referring to FIG. **22**, the rotary seal **420** may include a seal housing **422**, and a seal cover **424** that may close the rotary seal **420** after the fan shaft **16** is inserted through the shaft opening. The seal housing **422** as illustrated may be generally cylindrical, and has a seal housing outer surface **426**, a seal housing inner surface **428** (FIG. **23**) defining a seal housing bore having a rotary seal longitudinal axis **430**. The seal housing **422** further includes a seal housing mounting end **432** secured to the stationary structure about a shaft opening through the stationary structure. A seal housing sealing end **434** is disposed opposite the seal housing mounting end **432**.

The seal housing inner surface **428** shapes the seal housing bore to receive the ceiling structures of the rotary seal **420**. The seal housing inner surface **428** may extend longitudinally from the seal housing sealing end **434** with an approximately constant seal housing bore inner diameter. As the seal housing inner surface **428** approaches the seal housing mounting end **432**, the seal housing inner surface **428** extends radially inward to form a seal housing bore shoulder **436**. As the seal housing inner surface **428** continues to extend toward the seal housing mounting end **432**, the seal housing bore may have a seal housing bore tapered portion **438** with the seal housing bore inner diameter decreasing as the seal housing inner surface **428** extends axially from the seal housing bore shoulder **436** toward the seal housing mounting end **432**.

The seal housing **422** may have a plurality of seal rings **440**, **442**, **444** disposed within the seal housing bore. The first seal ring **440** may be disposed proximate the seal housing sealing end **434**. The second seal ring **442** may be disposed proximate the seal housing mounting end **432** and engaged by the seal housing bore shoulder **436**. The seal housing bore outer diameter of the seal housing bore at the seal housing bore shoulder **436** is less than a seal ring outer diameter of the seal rings **440**, **442**, **444** so that the seal housing bore shoulder **436** prevents the second seal ring **442** from passing out of the seal housing bore through the seal housing mounting end **432**. The third seal ring **444** may be disposed between the first seal ring **440** and the second seal ring **442**.

The seal rings **440**, **442**, **444** may be fabricated from a resilient material that is compressible by the seal cover **424**. For example, the seal rings **440**, **442**, **444** may be fabricated from graphite rope formed into annuli with the seal ring outer diameter allowing the seal rings **440**, **442**, **444** to be inserted within the seal housing bore, and a seal ring inner diameter that allows the fan shaft **16** to be inserted there through. Material such as graphite rope allow the seal rings **440**, **442**, **444** to form seals with the seal housing inner surface **428** and the shaft outer surface of the fan shaft **16** as discussed further below, while having a low coefficient of friction to allow the fan shaft **16** to rotate with minimal reduction in efficiency of the industrial fan assembly **10**.

The seal housing **422** further includes a cavity ring **446** disposed within the seal housing bore between the first seal ring **440** and the third seal ring **444**. The cavity ring **446** has a cavity ring outer diameter that is less than the seal housing bore inner diameter, and a cavity ring inner diameter that is greater than the shaft outer diameter of the fan shaft **16**. The cavity ring **446** has a plurality of cavity ring inlet passages **448** extending through the cavity ring **446** from a cavity ring outer surface **450** to a cavity ring inner surface **452**. The seal housing **422** has a pressurized inlet passage **454** extending through the seal housing **422** from the seal housing outer surface **426** to the seal housing inner surface **428**. The cavity ring **446** is aligned with the pressurized inlet passage **454** so that the pressurized inlet passage **454** and the cavity ring inlet passages **448** may place the cavity ring inner surface **452** and a corresponding portion of the fan shaft **16** in fluid communication with a pressurized air or fluid source (not shown) fluidly connected to the pressurized inlet passage **454**. A pressurized inlet connector **456** may be mounted on the seal housing outer surface **426** around the pressurized inlet passage **454** to provide a point of connection for a conduit connecting the pressurized air or fluid source with the rotary seal **420**.

The seal cover **424** may be formed from several components to facilitate forming seals within the seal housing bore, and providing additional sealing around the fan shaft **16** external to the seal housing bore. The seal cover **424** includes a seal cover flange **460** formed by a seal cover inner ring **462** having an annular shape, and a seal cover outer ring **464** having a generally annular shape mounted on an inner ring outer surface **466**. The seal cover **424** may further include a lip seal **468** mounted within an inner ring inner surface **470** of the seal cover inner ring **462**. The lip seal **468** may have a compound structure including a lip seal outer bracket **472** secured to the inner ring inner surface **470**, a lip seal inner bracket **474** disposed within the lip seal outer bracket **472** and providing additional structural support, and a lip seal sealing ring **476** mounted to the lip seal outer bracket **472**, the lip seal inner bracket **474**, or both. The lip seal sealing ring **476** may be formed from a resilient material and have an annular shaft engaging edge **478** that will engage the shaft outer surface to form a lip seal ring seal there between when the fan shaft **16** is inserted through the seal cover **424**. A lip seal tension band **480** may be disposed on the lip seal sealing ring **476** opposite the shaft engaging edge **478** and formed from a stiffer material than the lip seal sealing ring **476** to create extra sealing force against the shaft outer surface in the lip seal ring seal.

The seal cover **424** further includes a seal cover compression ring **482** having a hollow cylindrical shape and extending downward from the seal cover flange **460**. The seal cover compression ring **482** has a compression ring outer diameter that is less than the seal housing bore outer diameter proximate the seal housing sealing end **434** so that the seal

cover compression ring **482** can be inserted into the seal housing bore and engage the first seal ring **440**. The seal cover compression ring **482** has a seal ring engagement end **484** opposite the seal cover flange **460**. At a compression ring inner surface tapered portion **486** at the seal ring engagement end **484**, a compression ring inner diameter may decrease as the compression ring inner surface tapered portion **486** extends axially away from the seal ring engagement end **484**.

The rotary seal **420** also includes a seal cover anchor mechanism engaging the seal cover **424** and the seal housing **422** to secure the seal cover **424** to the seal housing **422**. The seal cover anchor mechanism causes the seal cover compression ring **482** to compress the seal rings **440**, **442**, **444** and cause the seal rings **440**, **442**, **444** to engage the seal housing inner surface **428** to create a seal ring outer seal there between, and to engage the shaft outer surface of the fan shaft **16** to create a seal ring inner seal there between while allowing the fan shaft **16** to rotate relative to the seal rings **440**, **442**, **444**. In the illustrated embodiment, the seal cover anchor mechanism includes a plurality of anchor blocks **490** mounted on and circumferentially spaced around the seal housing outer surface proximate the seal housing sealing end **434**. The seal cover anchor mechanism further includes a plurality of anchor bolts **492** extending through anchor bolt apertures **494** that are circumferentially spaced around the seal cover flange **460**. Each of the anchor bolts **492** corresponds to one of the anchor blocks **490** and is received within an anchor block aperture **496** of the corresponding anchor block **490** and tighten therein to compress the seal rings **440**, **442**, **444** as described below. Because the rotary seal **420** is used for extended periods of time, the seal rings **440**, **442**, **444** can wear from friction over time. The compression on the seal rings **440**, **442**, **444** can be increased as necessary over time by tightening the anchor bolts **492** in the anchor blocks **490**. This may increase the service life and minimize the maintenance required on the rotary seal **420** by extending the useful lives of the seal rings **440**, **442**, **444**. Moreover, the ability to adjust the compression on the seal rings **440**, **442**, **444** can increase the effectiveness of the rotary seal **420** in preventing unwanted gas and material flow across the interface and reduce maintenance requirements and undesirable process shut downs.

FIGS. **24** and **25** illustrate the installation of the fan shaft **16** and the closing and sealing of the rotary seal **420**. Referring to FIG. **24**, the first shaft end **114** of the fan shaft **16** is inserted through the seal cover **424**, the seal housing **422** and the shaft opening of the stationary structure (not shown) such as the insulation dam assembly mounting plate **170**. The first shaft end **114** may be chamfered for positive engagement and centering of the fan shaft **16** without damaging or rolling the lip seal **468** or the seal rings **440**, **442**, **444** during insertion. The seal housing **422** at the seal housing mounting end **432** is welded to the insulation dam assembly mounting plate **170** to form an air tight seal there between. A pilot bushing may be used to align the seal housing **422** with the mounting plate **170** to ensure axial alignment of the fan shaft **16**. When the fan shaft **16** is inserted, the shaft engaging edge **478** of the lip seal **468** engages the shaft outer surface to form the lip seal ring seal, and the seal rings **440**, **442**, **444** may engage the shaft outer surface to initially form the seal ring inner seals in implementations where the seal ring inner diameter is less than the shaft outer diameter. In such arrangements, the seal housing **422**, the seal cover **424** and the fan shaft **16** may be substantially axially aligned along the rotary seal longitudinal axis **430**. As discussed above, the cavity ring outer

diameter is less than the seal housing bore inner diameter and the cavity ring inner diameter is greater than the shaft outer diameter so air gaps are present between the seal housing inner surface **428** and the cavity ring outer surface **450**, and between the cavity ring inner surface **452** and the shaft outer surface.

The rotary seal **420** is closed by screwing the anchor bolts **492** into the anchor bolt apertures **496** of the anchor blocks **490**. As the anchor bolts **492** are tightened the seal cover **424** is forced toward the seal housing **422**, the seal rings **440**, **442**, **444** are compressed between the seal ring engagement end **484** of the seal cover compression ring **482** and the seal housing bore shoulder **436**. As the seal rings **440**, **442**, **444** are compressed in the axial direction, they increase in thickness in the radial direction. The seal rings **440**, **442**, **444** are pressed into the seal housing inner surface **428** and the shaft outer surface to strengthen the seal ring outer seals and the seal ring inner seals, respectively. The seal housing bore tapered portion **438** causes compression of the second seal ring **442** in the radial direction to further increase the seal ring seals proximate the seal housing mounting end **432**. The engagement of the first seal ring **440** by the compression ring inner surface tapered portion **486** similarly strengthens the seal ring seals proximate the seal housing sealing end **434**.

Even with the sealing ring seals created as described, the rotary seal **420** may not be completely airtight. Consequently, a risk may still exist for hazardous gases from the high temperature environment to pass through the rotary seal **420** and into the ambient environment. The rotary seal **420** can further prevent the leaking of hazardous gases by pressurizing the seal housing bore. Pressurization may be provided via the cavity ring **446** and the pressurized inlet passage **454**. Pressurized air or fluid may be supplied by the pressurized air or fluid source (not shown) connected to the pressurized inlet passage **454** by the pressurized inlet connector **456**. The seal rings **440**, **442**, **444** and the cavity ring **446** are dimensioned so that the cavity ring **446** moves axially but remains radially aligned with the pressurized inlet passage **454** after the seal rings **440**, **442**, **444** are compressed by the seal cover compression ring **482**. The pressurized air or fluid fills the space between the cavity ring **446** and the seal housing bore, and flows through the cavity ring inlet passages **448** to fill the space between the cavity ring **446** and the shaft outer surface. In this way, the pressurized air or fluid suppresses flow of gases through both the seal ring inner seals and the seal ring outer seals. High temperature environment typically are not high pressure environments, some modest increases in the air pressure within the seal housing bore may be sufficient to prevent leakage of the hazardous gases. However, the air pressure in the seal housing bore may be increased as necessary to suppress air leakage from the high temperature environment in a particular implementation.

INDUSTRIAL APPLICABILITY

The various designs in accordance with the present disclosure can improve the manufacturability and the performance of industrial fan assemblies. For example, the modular design of the fan mount assembly **12** of FIGS. **1** and **3** may allow the industrial fan assembly **10** to be assembled more quickly and simply than previously known mount assemblies. As discussed, the top plate slots **74**, **76** and the side plate tabs **86**, **96** may be dimensioned to provide a relatively tight fit so that side plates **62**, **64** may be approximately properly aligned with respect to the top plate **60** before being welded to each other and before adding addi-

tional support structures such as the tab gussets **100** and structural support brackets **102, 104**. This arrangement may also reduce the total number of components that must be assembled to form the fan mount assembly **12**. Further, the motor mount provided by the side plate tabs **86, 96** and the motor mounting bracket **130** allow for rapid and simple adjustment of the position of the motor **14** to achieve the necessary tension within the transmission **18**. As the belts or other power transmission components wear and stretch over time during operation, or continuous line starting or the assembly **10** starting and re-starting, the motor mounting bracket **130** allows for fast re-tensioning or replacement of the components by loosening the motor height adjustment bolts **158**. No other components or power transmission accessories need to be removed or loosened to gain proper access to defective or worn parts or to re-tension the power transmission accessories. Moreover, once assembled, the various lift openings **174-180** provide multiple options for attachment to the fan mount assembly **12** for transporting and installing the industrial fan assembly **10** in its operating environment.

The reinforcement bars **230** in the impellers **20, 260** provide increased structural support to withstand the normal loads and stresses to which the impellers **20, 260** will be subject, as well as additional thermal stresses that are experienced in high temperature environments and/or corrosive chemical environments. The reinforcement bars **230** can unitize the structure of the impellers **20, 260** so that the loads (torsional, thermal, etc.) experienced by the impeller blades **214, 220, 226, 264** during rotation may be transmitted through the impeller rings **216, 222, 228, 270** to the reinforcement bars **230** and ultimately to the impeller hub assembly **200**. Reduction of the loads and stresses on the less robust components of the impellers **20, 260** can reduce deformation, fatigue, vibration and failure of the components and thereby increase the useful lives of the impellers **20, 260**. Additionally, the configuration of the impeller hub assembly **200** with the impeller hub cone may promote fluid flow through the impellers **20, 260** by facilitating the redirection of the air from the axial flow from the fan housing inlet **46** to the radial flow through the impeller blades **214, 220, 226, 264** to the fan housing outlet **48**. The impeller hub cone may further provide additional structural support by adding additional welded surface area when the impeller hub cone is welded to the hub outer surface **304** at the small diameter cone end **250** and to the impeller hub backplate **242** at the large diameter cone end **248**.

The radial blade impeller **300** and the axial blade impeller **350** in accordance with the present disclosure are also provided with additional structural support of the impeller blades **322, 374**, respectively, to extend the useful life of the impellers **300, 350**. The hub sprockets **340** and their sprocket teeth **346** provide additional support to the impeller blade assemblies **310** proximate the points of connection between the blade arms **320** and the hub outer surface **304** where stress concentrations can lead to failure of the radial blade impeller **300**. The cover plates **392, 394** and the cover plate arms **400, 408**, respectively, perform similar structural support for the impeller blades **374** at areas of high stress concentrations. Additionally, the cover plate arms **400, 408** reinforce the entire lengths of the impeller blades **374** of the axial blade impeller **350** to maintain the curvature of the impeller blades **374** and the efficiency of the industrial fan assemblies **10, 30**. In the designs of both impellers **300, 350**, additional structural support is provided to the impeller blades **322, 374** without the sprocket teeth **346** and the cover plate arms **400, 408**, respectively, significantly encroaching

on the airflow paths between the impeller blades **322, 374** and through the impellers **300, 350** and creating undesired changes in the airflow.

The rotary seal **420** illustrated and described herein provides isolation of the ambient environment from high temperature and/or chemically induced corrosive environments despite the need to allow rotation of the fan shaft **16** extending there through. Use of seal rings **440, 442, 444** having low coefficients of friction, such as those formed from graphite rope, allow seals to be formed around the fan shaft **16** that can prevent heat transfer between the environments and leakage of gases and other particulate matter without significantly affecting the performance of the industrial fan assembly **10, 30**. Graphite rope in particular may be resistant to many corrosive materials that may cause degradation in other materials that could be used to fabricate the seal rings **440, 442, 444**. The effectiveness of the rotary seal **420** may be increased by pressurizing the seal housing bore to suppress leakage of gases through the seal ring seals using a neutral or non-contaminating gas or lubricant. The pressurization can prevent leakage of hazardous gases from the high temperature or corrosive environment to the ambient environment, and leakage of contaminants from the ambient environment into the high temperature environment where specific conditions are required for the high temperature operation.

While the preceding text sets forth a detailed description of numerous different embodiments, it should be understood that the legal scope of protection is defined by the words of the claims set forth at the end of this patent. The detailed description is to be construed as exemplary only and does not describe every possible embodiment since describing every possible embodiment would be impractical, if not impossible. Numerous alternative embodiments could be implemented, using either current technology or technology developed after the filing date of this patent, which would still fall within the scope of the claims defining the scope of protection.

It should also be understood that, unless a term was expressly defined herein, there is no intent to limit the meaning of that term, either expressly or by implication, beyond its plain or ordinary meaning, and such term should not be interpreted to be limited in scope based on any statement made in any section of this patent (other than the language of the claims). To the extent that any term recited in the claims at the end of this patent is referred to herein in a manner consistent with a single meaning, that is done for sake of clarity only so as to not confuse the reader, and it is not intended that such claim term be limited, by implication or otherwise, to that single meaning.

What is claimed is:

1. An impeller comprising:

an impeller hub having a cylindrical shape, a hub outer surface and a hub shaft bore;

a plurality of blade arms circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the blade arms having a leading arm surface facing a direction of rotation of the impeller and a trailing arm surface opposite the leading arm surface;

a plurality of impeller blades extending outward from the hub outer surface, each of the impeller blades corresponding to one of the blade arms and having a leading blade surface facing the direction of rotation of the impeller and a trailing blade surface opposite the leading blade surface and facing and engaging the leading arm surface of the one of the blade arms; and

23

a plurality of blade gussets, each of the blade gussets being disposed between adjacent impeller blades, having a long gusset arm engaging and secured to the trailing arm surface of the one of the blade arms corresponding to one of the impeller blades, and having a short gusset arm engaging and secured to the leading blade surface of an adjacent impeller blade.

2. The impeller of claim 1, wherein each of the blade gussets has a gusset base engaging and secured to the hub outer surface.

3. The impeller of claim 1, wherein each of the impeller blades has a gusset arm slot receiving the short gusset arm so that the short gusset arm engages and is secured to the leading arm surface of the one of the blade arms corresponding to the impeller blade.

4. The impeller of claim 1, wherein each of the impeller blades includes a blade tapered portion having a width that increases as the impeller blade extends outward from the hub outer surface, and a blade rectangular portion having a constant width as the blade rectangular portion extends outward from the blade tapered portion.

5. The impeller of claim 4, wherein the blade rectangular portion of each of the impeller blades has an impeller blade bend such that an impeller blade outer edge is rotated forward toward the direction of rotation of the impeller.

6. The impeller of claim 5, wherein the impeller blade bend rotates the impeller blade outer edge forward by an angle within a range from 10° to 40°.

7. The impeller of claim 1, comprising:

a first sprocket disposed on a first end of the impeller hub and engaging a first lateral edge of each of the blade arms, the first sprocket having a plurality of first sprocket teeth extending outward from and circumferentially spaced about a first sprocket outer edge, wherein each of the plurality of first sprocket teeth corresponds to one of the blade arms and engages and is secured to the first lateral edge of the corresponding one of the blade arms; and

a second sprocket disposed on a second end of the impeller hub and engaging a second lateral edge of each of the blade arms, the second sprocket having a plurality of second sprocket teeth extending outward from and circumferentially spaced about a second sprocket outer edge, wherein each of the second sprocket teeth is aligned with one of the blade arms and engages and is secured to the second lateral edge of the corresponding one of the blade arms.

8. The impeller of claim 1, wherein the trailing arm surface of each of the blade arms extends radially outward away from the hub outer surface.

9. The impeller of claim 1, wherein the blade arms comprise six blade arms, the impeller blades comprise six impeller blades, and the blade gussets comprise six blade gussets.

10. An impeller comprising:

an impeller hub having a cylindrical shape, a hub outer surface and a hub shaft bore;

a plurality of impeller blade assemblies circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the impeller blade assemblies having a leading blade assembly surface facing a direction of rotation of the impeller and a trailing blade assembly surface opposite the leading blade assembly surface, and each of the impeller blade assemblies comprising a blade arm extending outward from the hub outer surface;

24

a first sprocket disposed on a first end of the impeller hub and engaging a first lateral edge of each of the blade arm, the first sprocket having a plurality of first sprocket teeth extending outward from and circumferentially spaced about a first sprocket outer edge, wherein each of the plurality of first sprocket teeth corresponds to one of the blade arms and engages and is secured to the first lateral edge of the corresponding one of the blade arms; and

a second sprocket disposed on a second end of the impeller hub and engaging a second lateral edge of each of impeller blade arms, the second sprocket having a plurality of second sprocket teeth extending outward from and circumferentially spaced about a second sprocket outer edge, wherein each of the second sprocket teeth is aligned with one of the blade arms and engages and is secured to the second lateral edge of the corresponding one of the blade arms.

11. The impeller of claim 10, comprising a plurality of blade gussets, each of the blade gussets being disposed between adjacent impeller blade assemblies, having a first gusset arm engaging and secured to the trailing blade assembly surface of a first one of the adjacent impeller blade assemblies, and having a second gusset arm engaging and secured to the leading blade assembly surface of a second one of the adjacent impeller blade assemblies.

12. The impeller of claim 11, wherein the first gusset arm is longer than the second gusset arm of each of the blade gussets.

13. The impeller of claim 11, wherein each of the blade gussets has a gusset base engaging and secured to the hub outer surface.

14. The impeller of claim 10, wherein each of the blade arms has a leading arm surface and a trailing arm surface, wherein each of the plurality of impeller blade assemblies comprises an impeller blade having a leading blade surface and a trailing blade surface, and wherein the leading arm surface of the impeller blade is facing and engages the trailing blade surface of the corresponding blade arm.

15. The impeller of claim 14, comprising a plurality of blade gussets, each of the blade gussets being disposed between adjacent impeller blade assemblies, having a long gusset arm engaging and secured to the trailing arm surface of a first one of the adjacent impeller blade assemblies, and having a short gusset arm engaging and secured to the leading blade surface of a second one of the adjacent impeller blade assemblies.

16. The impeller of claim 15, wherein each impeller blade has a gusset arm slot receiving the short gusset arm so that the short gusset arm engages and is secured to the leading arm surface of the blade arm corresponding to the impeller blade.

17. An impeller comprising:

an impeller hub having a cylindrical shape, a hub outer surface and a hub shaft bore;

six blade arms circumferentially spaced about the hub outer surface and extending outward from the hub outer surface, each of the six blade arms having a leading arm surface facing a direction of rotation of the impeller and a trailing arm surface opposite the leading arm surface; six impeller blades extending outward from the hub outer surface, each of the six impeller blades corresponding to one of the six blade arms and having a leading blade surface facing the direction of rotation of the impeller and a trailing blade surface opposite the leading blade surface and facing and engaging the leading arm surface of the one of the six blade arms;

25

six blade gussets, each of the six blade gussets being disposed between adjacent ones of the six impeller blades, having a long gusset arm engaging and secured to the trailing arm surface of the one of the six blade arms corresponding to one of the six impeller blades, and having a short gusset arm engaging and secured to the leading blade surface of the adjacent one of the six impeller blades;

a first sprocket disposed on a first end of the impeller hub and engaging a first lateral edge of each of the six blade arms, the first sprocket having six first sprocket teeth extending outward from and circumferentially spaced about a first sprocket outer edge, wherein each of the six first sprocket teeth is aligned with one of the six blade arms and engages and is secured to the first lateral edge of the corresponding one of the six blade arms; and

a second sprocket disposed on a second end of the impeller hub and engaging a second lateral edge of

26

each of the six blade arms, the second sprocket having six second sprocket teeth extending outward from and circumferentially spaced about a second sprocket outer edge, wherein each of the six second sprocket teeth is aligned with one of the six blade arms and engages and is secured to the second lateral edge of the corresponding one of the six blade arms.

18. The impeller of claim 17, wherein the each of the six impeller blades has a gusset arm slot receiving the short gusset arm so that the short gusset arm engages and is secured to the leading arm surface of the one of the six blade arms corresponding to the one of the six impeller blades.

19. The impeller of claim 17, wherein each of the six impeller blades has an impeller blade bend such that an impeller blade outer edge is rotated forward toward the direction of rotation of the impeller.

* * * * *