



(86) **Date de dépôt PCT/PCT Filing Date:** 2013/08/29
 (87) **Date publication PCT/PCT Publication Date:** 2014/03/06
 (85) **Entrée phase nationale/National Entry:** 2015/01/20
 (86) **N° demande PCT/PCT Application No.:** US 2013/057250
 (87) **N° publication PCT/PCT Publication No.:** 2014/036237
 (30) **Priorité/Priority:** 2012/09/01 (US61/696,144)

(51) **Cl.Int./Int.Cl. E01F 15/02** (2006.01),
E01F 15/08 (2006.01)
 (71) **Demandeur/Applicant:**
EASI-SET INDUSTRIES, INC., US
 (72) **Inventeur/Inventor:**
SMITH, RODNEY I., US
 (74) **Agent:** MACRAE & CO.

(54) **Titre : STRUCTURE DE BARRIERE D'AUTOROUTE A ENCLENCHEMENT**
 (54) **Title: INTERLOCKING HIGHWAY BARRIER STRUCTURE**

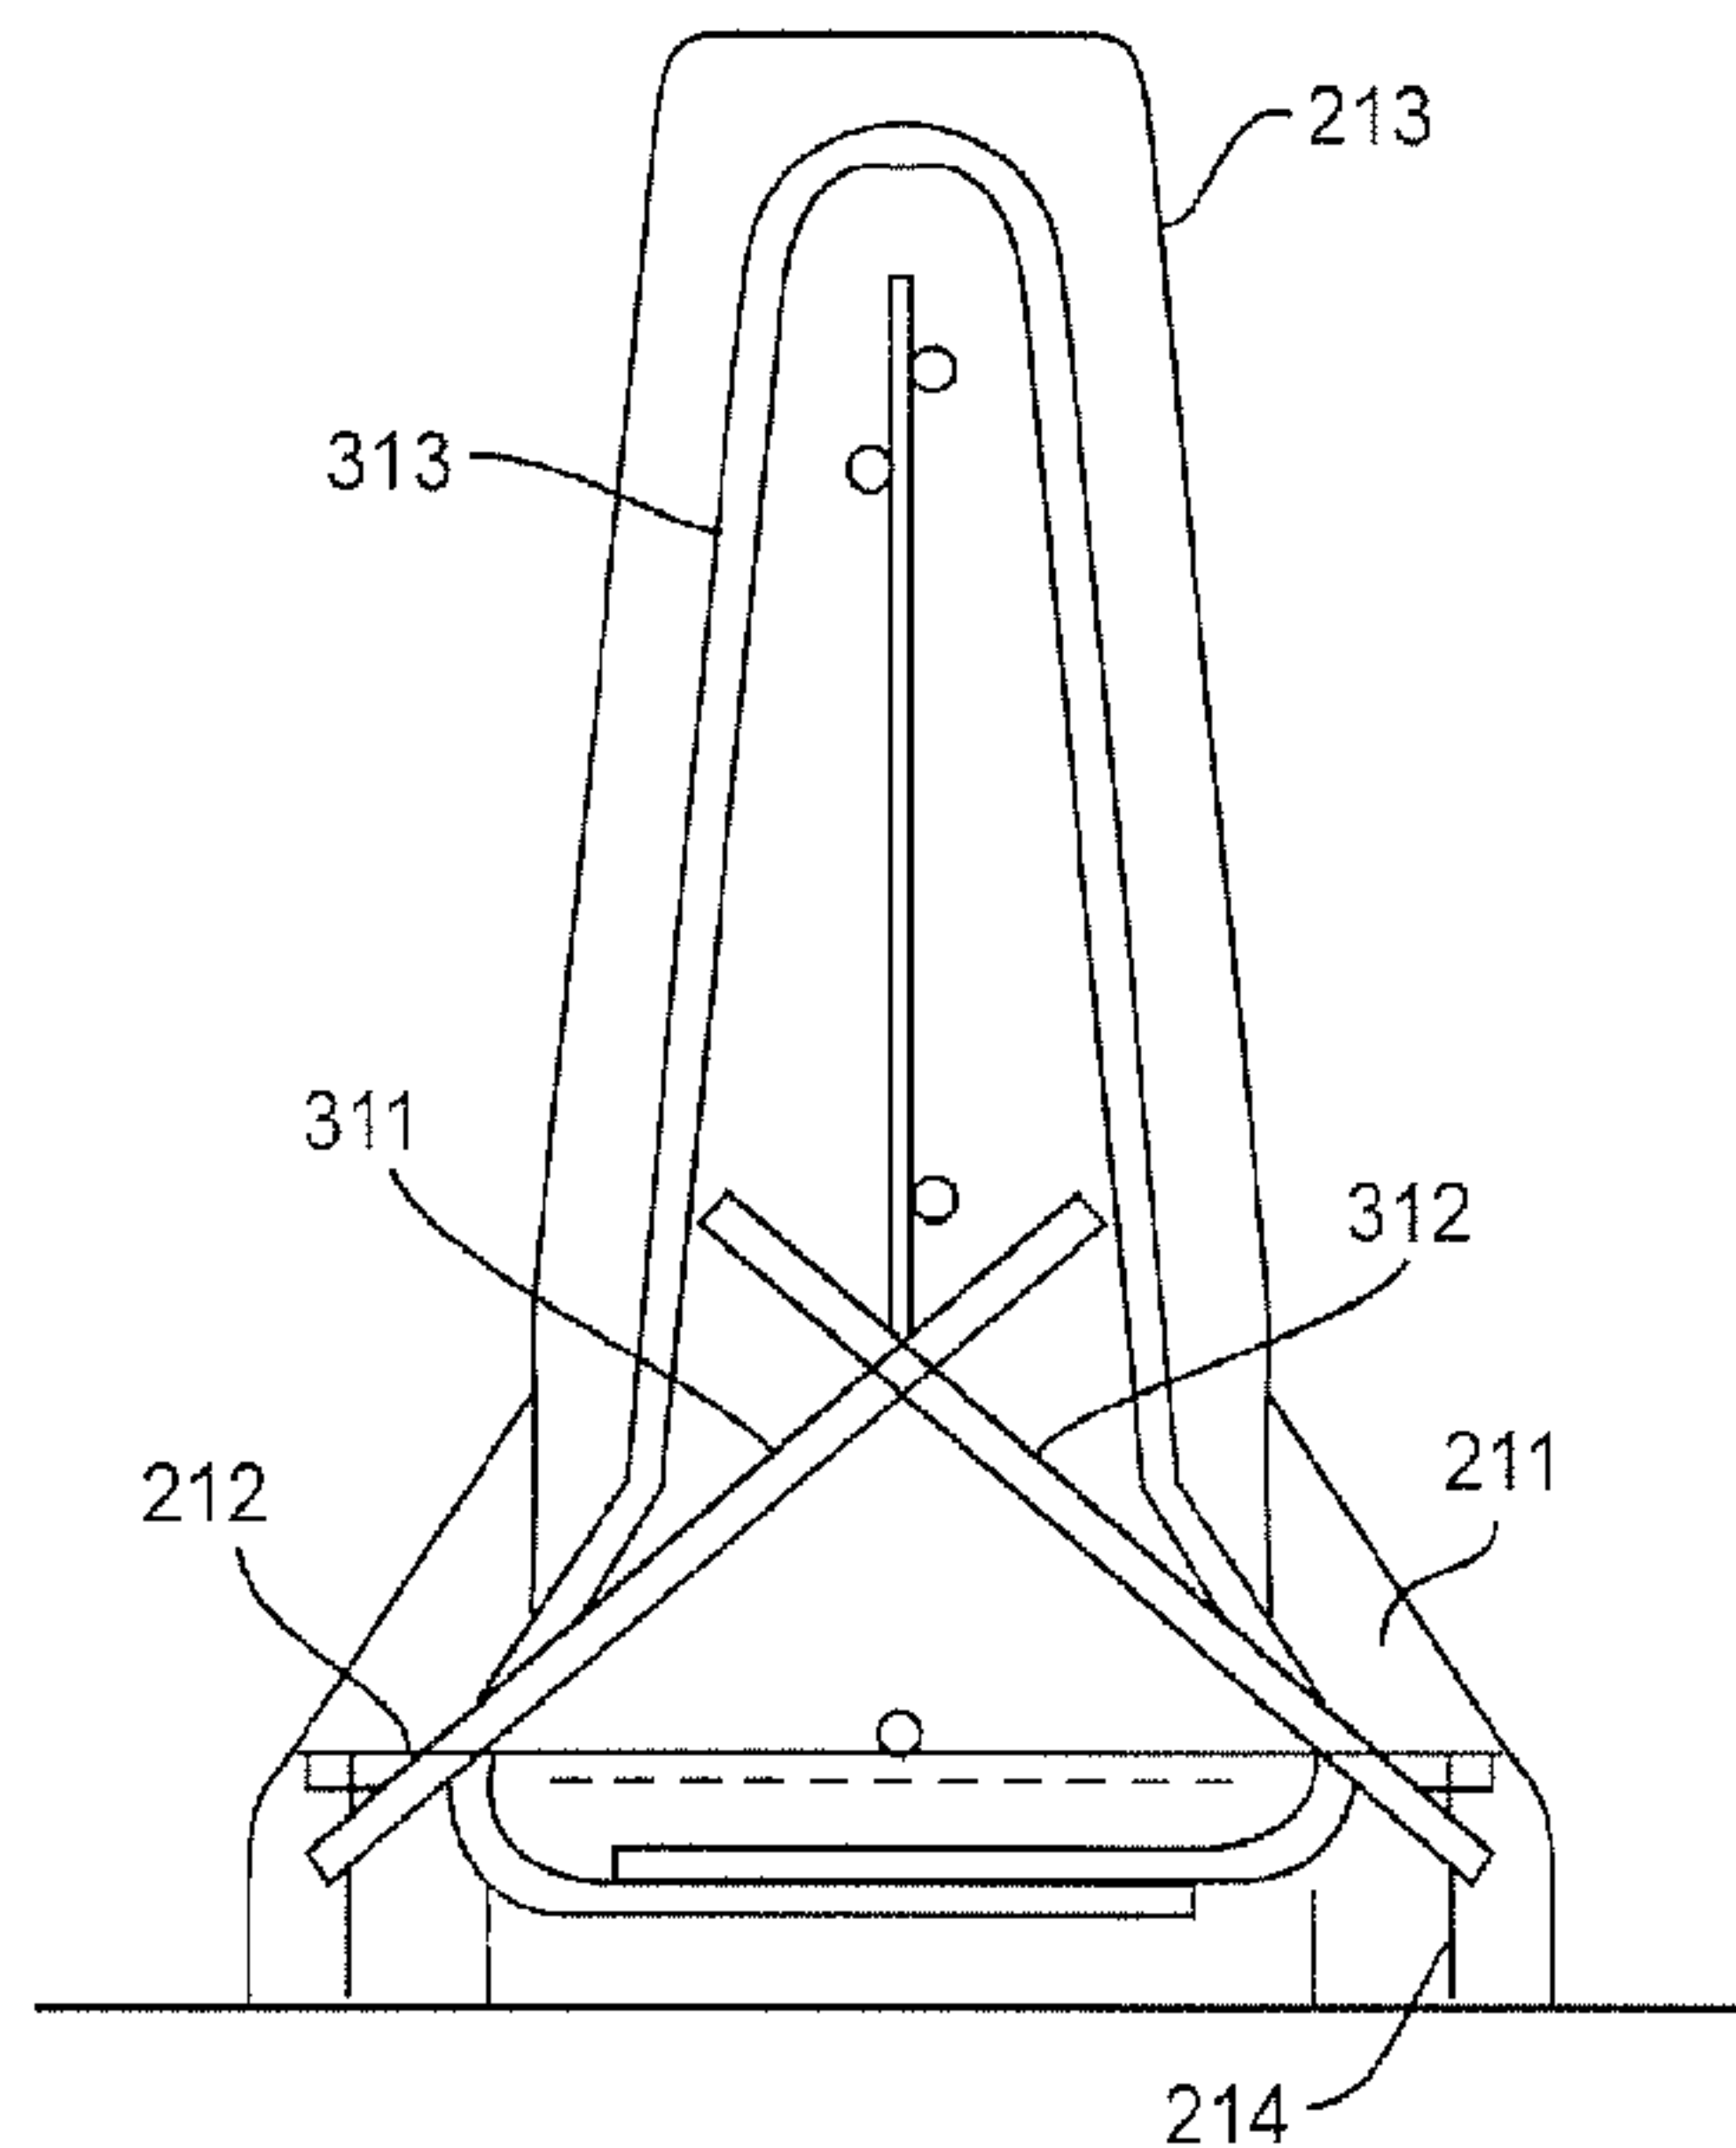


FIG. 3

(57) **Abrégé/Abstract:**

A barrier structure is provided with bolt-down pockets, allowing the structure to be installed as a semi-permanent or permanent structure. The bolt-down pockets are at uniform spacing along the base of the barrier structure and located on opposite sides of

(57) Abrégé(suite)/Abstract(continued):

the structure. A bolt-down bar extends across and through the base at each pair of bolt-down pockets. Additional reinforcement is provided by rebar bent a generally "U" shape, sometimes called a "hairpin" shape. Toward each end of each bolt-down plate, the base of the "U" shaped rebar is welded to the bolt-down plate near a bolt hole in the bolt-down plate with the legs of the "U" extending at an angle up into the concrete structure. Further reinforcing at the sites of the bolt-down pockets is provided by rebar, sometimes called "stirrups", bent in a form which generally conforms to the cross-section of the precast concrete structure.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
6 March 2014 (06.03.2014)(10) International Publication Number
WO 2014/036237 A1

- (51) **International Patent Classification:**
E01F 15/02 (2006.01) *E01F 15/08* (2006.01)
- (21) **International Application Number:**
PCT/US2013/057250
- (22) **International Filing Date:**
29 August 2013 (29.08.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/696,144 1 September 2012 (01.09.2012) US
- (71) **Applicant:** EASI-SET INDUSTRIES, INC. [US/US];
5119 Catlett Road, Midland, VA 22728 (US).
- (72) **Inventor:** SMITH, Rodney I.; 5689 Germantown Road,
Midland, VA 22728-1923 (US).
- (74) **Agents:** WHITHAM, Michael E. et al.; Whitham, Curtis,
Christofferson & Cook, P.C., 11491 Sunset Hills Road,
Suite 340, Reston, VA 20190 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

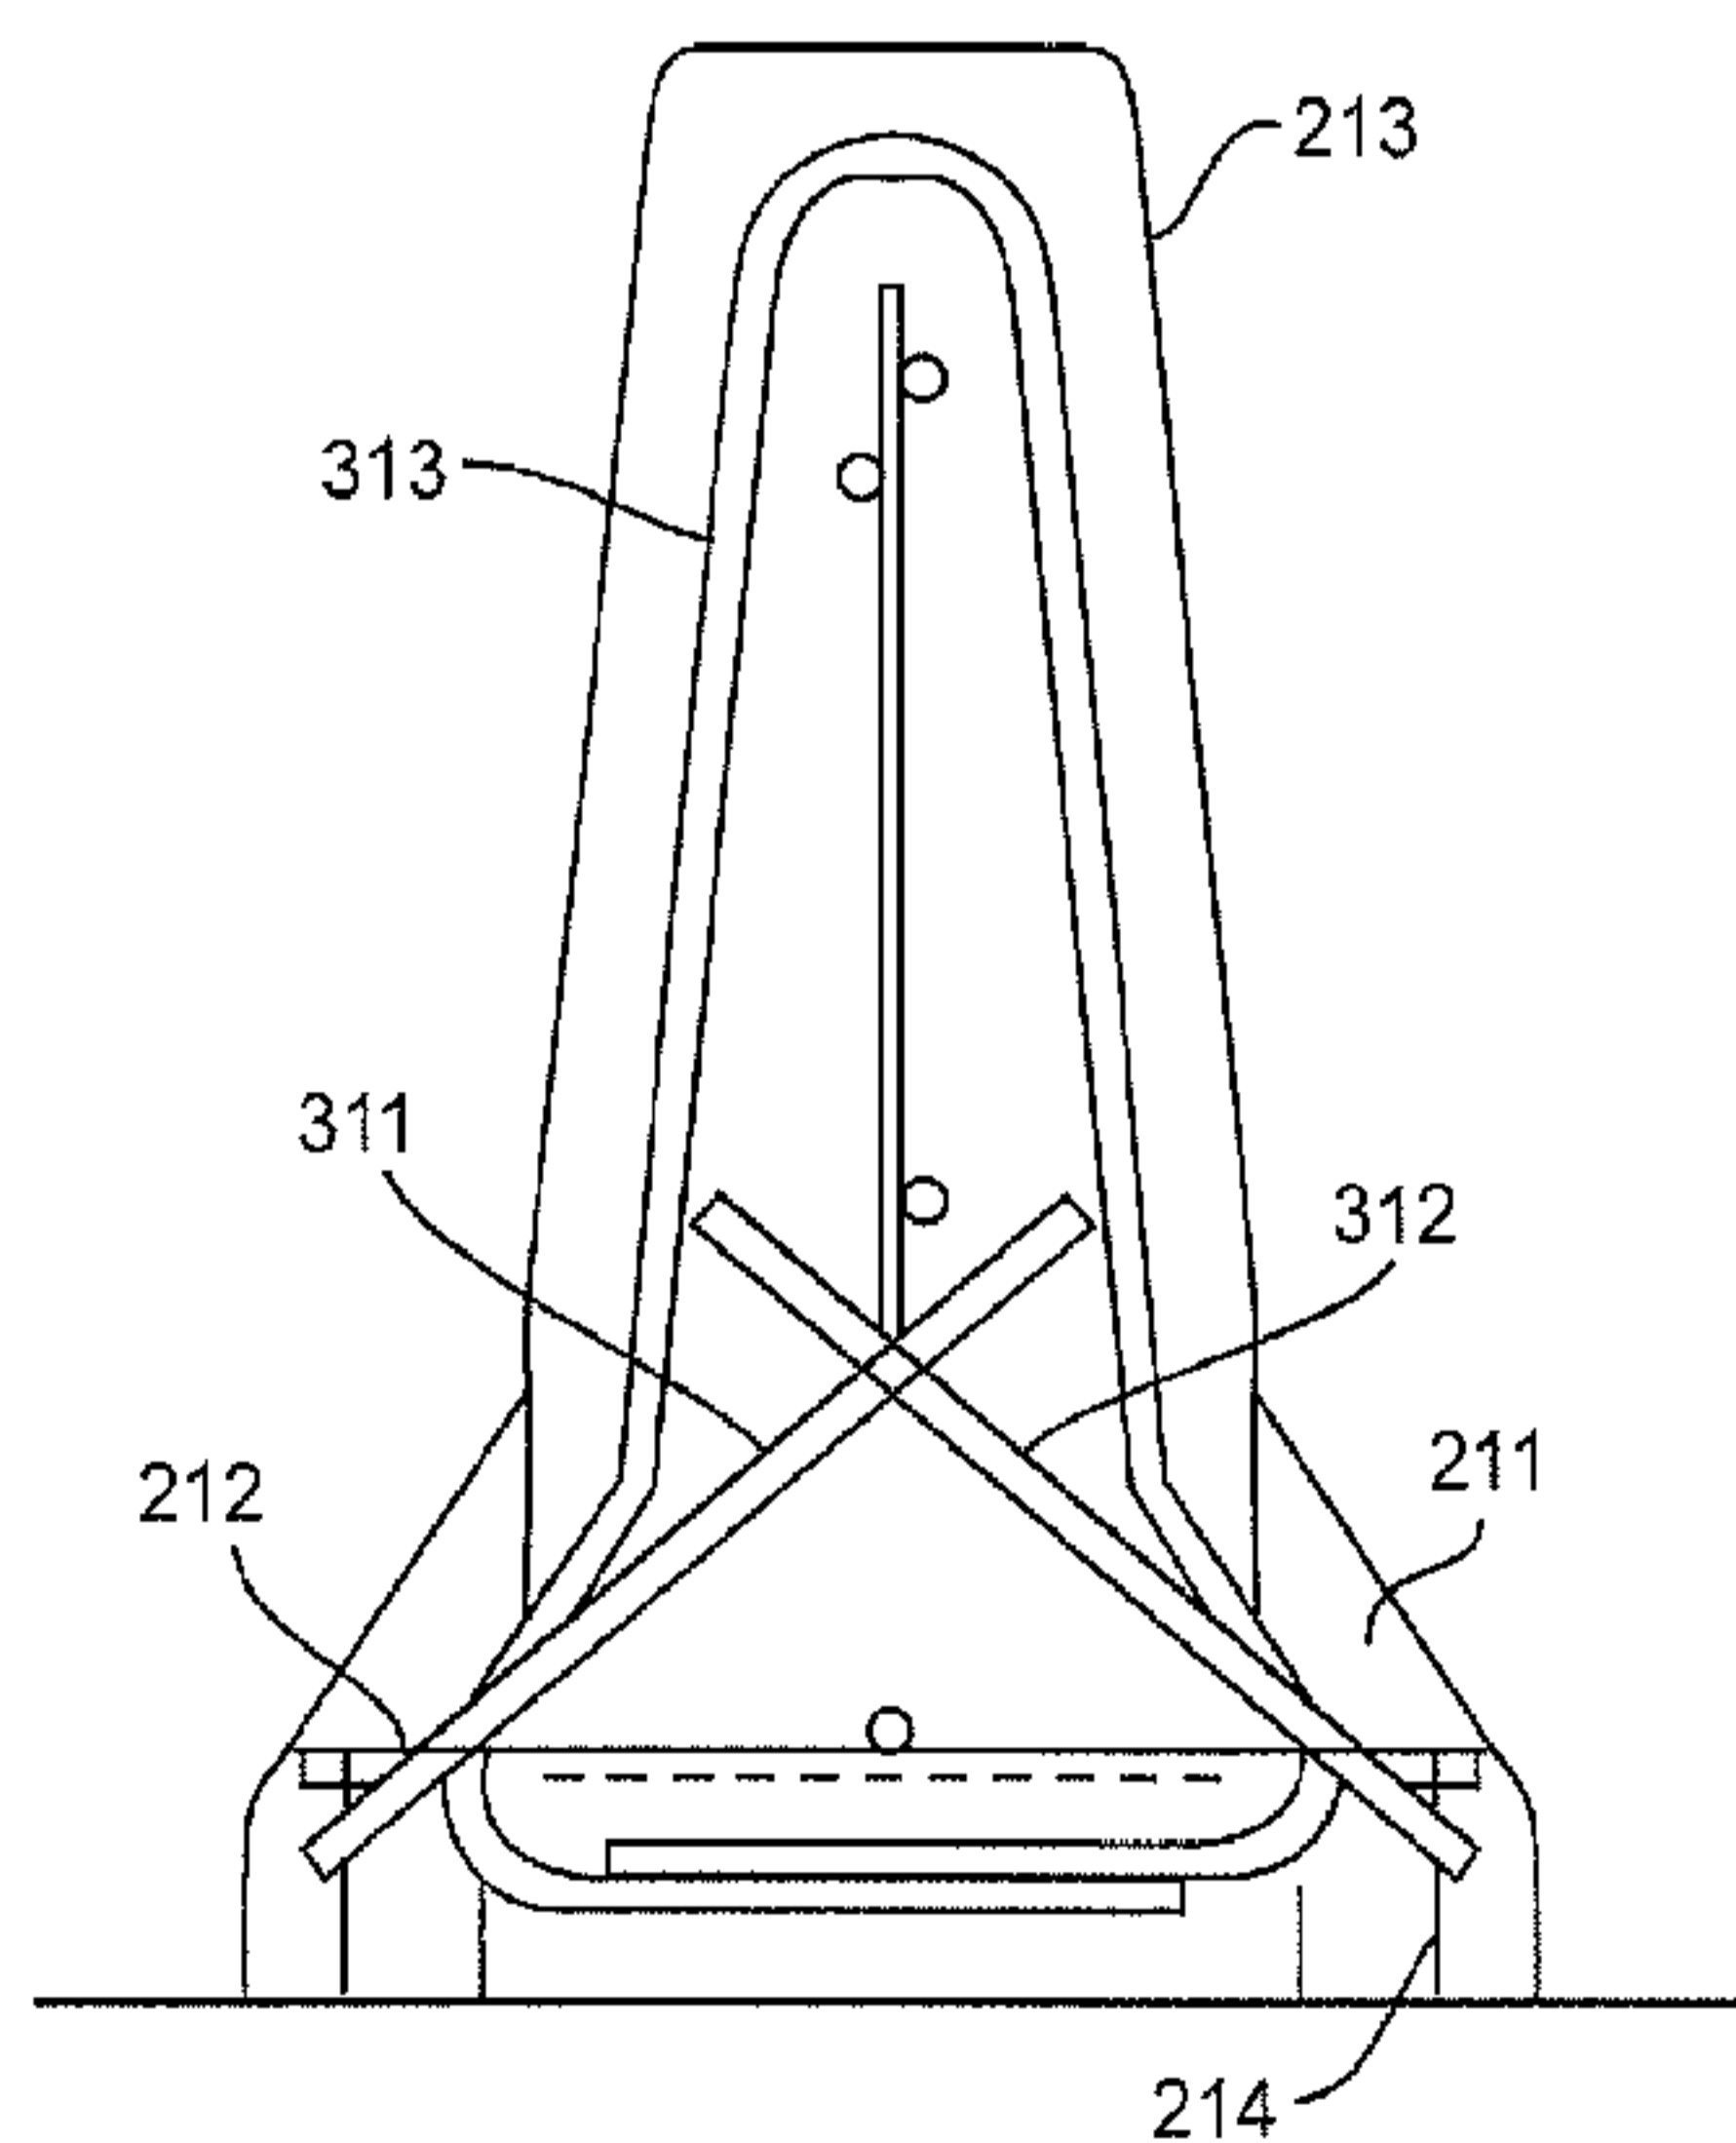
(54) **Title:** INTERLOCKING HIGHWAY BARRIER STRUCTURE

FIG. 3

(57) **Abstract:** A barrier structure is provided with bolt-down pockets, allowing the structure to be installed as a semi-permanent or permanent structure. The bolt-down pockets are at uniform spacing along the base of the barrier structure and located on opposite sides of the structure. A bolt-down bar extends across and through the base at each pair of bolt-down pockets. Additional reinforcement is provided by rebar bent a generally "U" shape, sometimes called a "hairpin" shape. Toward each end of each bolt-down plate, the base of the "U" shaped rebar is welded to the bolt-down plate near a bolt hole in the bolt-down plate with the legs of the "U" extending at an angle up into the concrete structure. Further reinforcing at the sites of the bolt-down pockets is provided by rebar, sometimes called "stirrups", bent in a form which generally conforms to the cross-section of the precast concrete structure.

WO 2014/036237 A1 

Published:

— *with international search report (Art. 21(3))*

INTERLOCKING HIGHWAY BARRIER STRUCTURE

DESCRIPTION

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention generally relates to a highway crash barrier structure for use
in a highway barrier system capable of addressing current requirements for improving the
crash performance of precast concrete barriers. The barrier system in which the crash
barrier structure is used comprises a plurality of rigid sections disposed end-to-end in
interlocking relationship with one another. The end of each section has a cavity and is
10 provided with embedded interlocks that join with one another to hold the sections together.
Individual sections can be removed or replaced without disrupting the remainder of the
barrier system while maintaining proper alignment. The crash barrier structure of the
present invention is provided with bolt down pockets which are reinforced with minimal
steel yet meet MASH test requirements.

15

Background Description

In recent years, for controlling the flow of traffic, various barrier systems consisting
of large sections of precast concrete have been used along highways. The sections can be
hoisted into place and removed with greater speed and ease than is usually required to
construct more permanent structures. Systems of this type can be dislodged when sufficient
20 external force is applied, resulting in a potential traffic hazard. In some instances, the
concrete sections are bolted together to maintain their alignment and assure that they will
not be either knocked over or displaced by a colliding vehicle. However, such systems have
the disadvantage of being complex and expensive and require considerable time and effort

to assemble as well as to remove without disassembling the entire structure when used in road repairs.

Improvements in the system of bolted connections has been the use of looped steel bars that allow for a straight steel pin connection holding the adjoining loops together. This system is expensive and relies on maintaining the pins which also requires one's hands in a dangerous position between the barrier sections during placement or replacement. Vehicle impact on these systems usually requires significant time and expense to remove the pins.

U.S. Patent No. 5,149,224 to Smith, which is herein incorporated by reference, shows an interlocking highway structure which employs a pair of "J" shaped hooks that connect separate concrete barrier members together without requiring extra hardware. In practice, the end of one precast concrete member is simply slid downward from the top such that the two adjoining precast concrete members have interlocking J connections. The product is commercially marketed as "JJ Hooks®". The "JJ Hooks®" product includes a short, approximately 12 inches in length, member to which rebar members are welded and extend inward into the precast concrete. While FIG. 3 of U.S. Patent No. 5,149,224 shows the rebar extending only part way into the precast concrete, in practice the rebar can extend end-to-end with weldment of the rebar to both attachment hooks or can extend only part way into the precast concrete based on "pull out" strength/resistance.

U.S. Patent No. 7,607,645 to Smith, which is herein incorporated by reference, addresses newer crash test criteria and to allow for greater use of the concrete barriers. These crash criteria are defined by the American Association of Highway & Traffic Officials (AASHTO's) Manual for Assessing Safety Hardware (MASH). The system disclosed in U.S. Patent No. 7,607,645 is an interlocking barrier system that includes a plurality of rigid upright sections that can be joined together end-to-end using a "J" shaped connection member. The connection member preferably is embedded in a recessed cavity in each end of each section and has an outwardly projected hook. The connection member, as well as its associated hook and an outwardly projected receptacle flange, ran linearly along a line extending from the top to the bottom of each end of each section (e.g., 18") a distance which almost equals the height of each section. A plurality of bars (e.g., rebar) are welded

or otherwise joined to the connection member and extend into the concrete section a distance that the minimum “pull out” strength resistance is met. In one embodiment, the rebar may extend end-to-end in the barrier structure. In another embodiment, the rebar do not traverse end-to-end distance of the section, and may extend two feet or more. This
5 configuration eliminates or reduces the rotational forces imparted by a collision at one end of the section being imparted at the other end, thus making the interlocking structure more compliant with newer crash test safety requirements.

SUMMARY OF THE INVENTION

10 The present invention is an improvement in the “JJ Hooks®” barrier structure which provides bolt-down pockets, allowing the structure to be installed as a semi-permanent or permanent structure. The bolt-down pockets are at uniform spacing along the base of the barrier structure and located on opposite sides of the structure. A bolt-down bar may extend across and through the base at various pairs of bolt-down pockets. Additional
15 reinforcement may be provided by rebar bent a generally “U” shape, sometimes called a “hairpin” shape. Toward each end of a bolt-down plate, the base of the “U” shaped rebar is located (and can be welded or otherwise secured if desired) near a bolt hole in the bolt-down plate with the legs of the “U” extending at an angle up into the concrete structure. Further reinforcing at the sites of the bolt-down pockets is provided by rebar, sometimes
20 called “stirrups”, bent in a form which generally conforms to the cross-section of the precast concrete structure. The structure minimizes the amount of steel used and still meets the MASH tests. In addition, the cost of fabrication is further reduced by requiring less labor to manufacture.

DESCRIPTION OF THE DRAWINGS

25 The foregoing and other objects, aspects and advantages will be better understood from the following detailed description of a preferred embodiment of the invention with

reference to the drawings, in which:

Figure 1 is perspective view which shows the alignment of three interlocked barrier sections;

Figure 2 is a perspective view of one end of the barrier structure of the present invention showing one of bolt-down pockets;

Figure 3 is a cross-sectional view of the barrier structure at the location of a pair of bolt-down pockets showing the locations of the bolt-down plate and reinforcing “hairpin” and “stirrup” rebars;

Figure 4 is a plan view of the barrier structure showing the locations of bolt-down pockets and reinforcements;

Figure 5 is a perspective view of the bolt-down plate used in the barrier structure of Figures 3 and 4;

Figure 6 is a plan view of the “hairpin” reinforcing rebar used in the barrier structure of Figures 3 and 4; and

Figure 7 is a plan view of the “stirrup” reinforcing rebar used in the barrier structure of Figures 3 and 4.

DESCRIPTION

Referring now to the drawings, and more particularly to Figure 1, there is shown, for exemplary purposes, three rigid upright sections 110, 111, and 112 linked end-to-end in alignment to form a highway barrier system. An unlimited number of sections can be linked together and positioned to follow the path of a roadway (or perimeter of a building in the case of building protection application) as described more particularly in U.S. Patent Nos. 5,149,224 and 6,607,645. Further, the outer shape and length of the upright sections 110, 111, and 112 can vary for different applications. In the preferred embodiment, each of the sections 110, 111, and 112 has a relatively wider base and tapers vertically to the top of the section. The invention can be used in road work as well as security and other applications.

Figure 2 shows in perspective view an end of one of the sections according to the

present invention. As in the “JJ Hooks®” barrier structure of U.S. Patent Nos. 5,149,224 and 6,607,645, the end of the structure is provided with a reinforced “J” hook 210 which interlocks with a corresponding “J” hook of an adjacent barrier section, as generally indicated in Figure 1. The present invention provides bolt-down pockets, one of which is
5 illustrated at 211, permitting semi-permanent or permanent installation of the barrier structure. Below the pocket 211 is an embedded bolt-down plate 212 which extends through the precast concrete structure 213 to a corresponding bolt-down pocket on the other side of the structure. The bolt-down plate is shown in perspective view in Figure 5. A hole 214 extends downwardly through the plate 212 and the concrete structure 213 to allow for
10 the passage of a bolt extending either up through the hole 214 and plate 212 from the surface below or down through the plate 212 and hole 214 to the surface below.

With such a structure, there is concern that a crash against the structure could cause the structure to crack at the locations of the bolt-down pockets or cause a shearing force of the bolts resulting in a failure of the structure in MASH tests. The present invention avoids
15 these failures through reinforcement of the bolt-down plates and the precast concrete structure at the locations of the bolt-down pockets. As shown in Figure 3, a pair of generally “U” shaped rebar rods 311 and 312, each having a shape shown in Figure 6, is provided in the precast concrete structure. As may be appreciated from the general shape shown in Figure 6, these rebar shapes are sometimes called “hairpins”. Toward each end of
20 each bolt-down plate 212, the base of the “U” shaped rebar is located near the bolt-down plate near a bolt hole in the bolt-down plate. The legs of the “U” shaped rods 311 and 312 extend at an angle up into the concrete structure 213. Further reinforcing at (e.g., directly adjacent, co-located with, or otherwise) the sites of the bolt-down pockets is provided by rebar 313, having a shape shown in Figure 7. Because of its shape, the rebar 313 is
25 sometimes called a “stirrup”, since it is bent in a form which generally conforms to the cross-section of the precast concrete structure 213.

Figure 4 shows a plan view of the barrier structure according to the invention. At each end of the structure are “J” hooks 210 oriented to mate with a corresponding “J” hook of an adjacent barrier structure. In the illustrated embodiment, there are three pairs of bolt-

down pockets 211, two of which includes a bolt-down plate 212 extending through the concrete structure 213. Each bolt down pocket 211 is reinforced by a pair of “hairpin” rebar 311 and 312. Although not shown in this view, additional reinforcing may be provided at each location of bolt-down plates 212 by “stirrup” rebar 313, as shown in Figures 3 and 7.

5 With the described design, for a 12 foot barrier, only two bolts are required, and as shown in Figure 4 there are only two bolt down bars which saves costs. A twenty foot section may use either three or four bolt down bars dependent on the location and number of pockets.

While the invention has been described in terms of a single preferred embodiment, those skilled in the art will recognize that the invention can be practiced with modification
10 within the spirit and scope of the appended claims.

CLAIMS

What is claimed is as follows:

- 1 1. An interlocking barrier structure for use in a barrier system in which sections are linkable
2 end-to-end in an interlocking fashion, comprising:
 - 3 a rigid precast concrete upright structure having a connection member embedded in
4 each of a first and a second end, each said connection member having a hook member
5 which projects outward from said first or said second end wherein said hook member
6 extends linearly a given length along a line running from a top to a bottom of each rigid
7 precast concrete upright structure;
 - 8 the rigid precast concrete upright structure having a relatively wide base and
9 tapering vertically, the base being provided with bolt-down pockets on opposite sides of the
10 structure at uniform spacing along the base of the structure;
 - 11 a plurality of bolt-down bars, each extending across and through the base of the
12 structure at each pair of bolt-down pockets; and
 - 13 “U” shaped reinforcement rebars, one for each end of a bolt-down bar, a base of
14 each “U” shaped rebar being located near the bolt-down plate near a bolt hole in the bolt-
15 down plate with legs of the “U” extending at an angle up into the concrete structure.

- 1 2. The interlocking barrier structure recited in claim 1, further comprising reinforcing rebar
2 at each of the sites of the bolt-down pockets, the reinforcing rebar being bent in a form
3 which generally conforms to the cross-section of the rigid precast concrete upright
4 structure.

Substitute Sheet

1/4

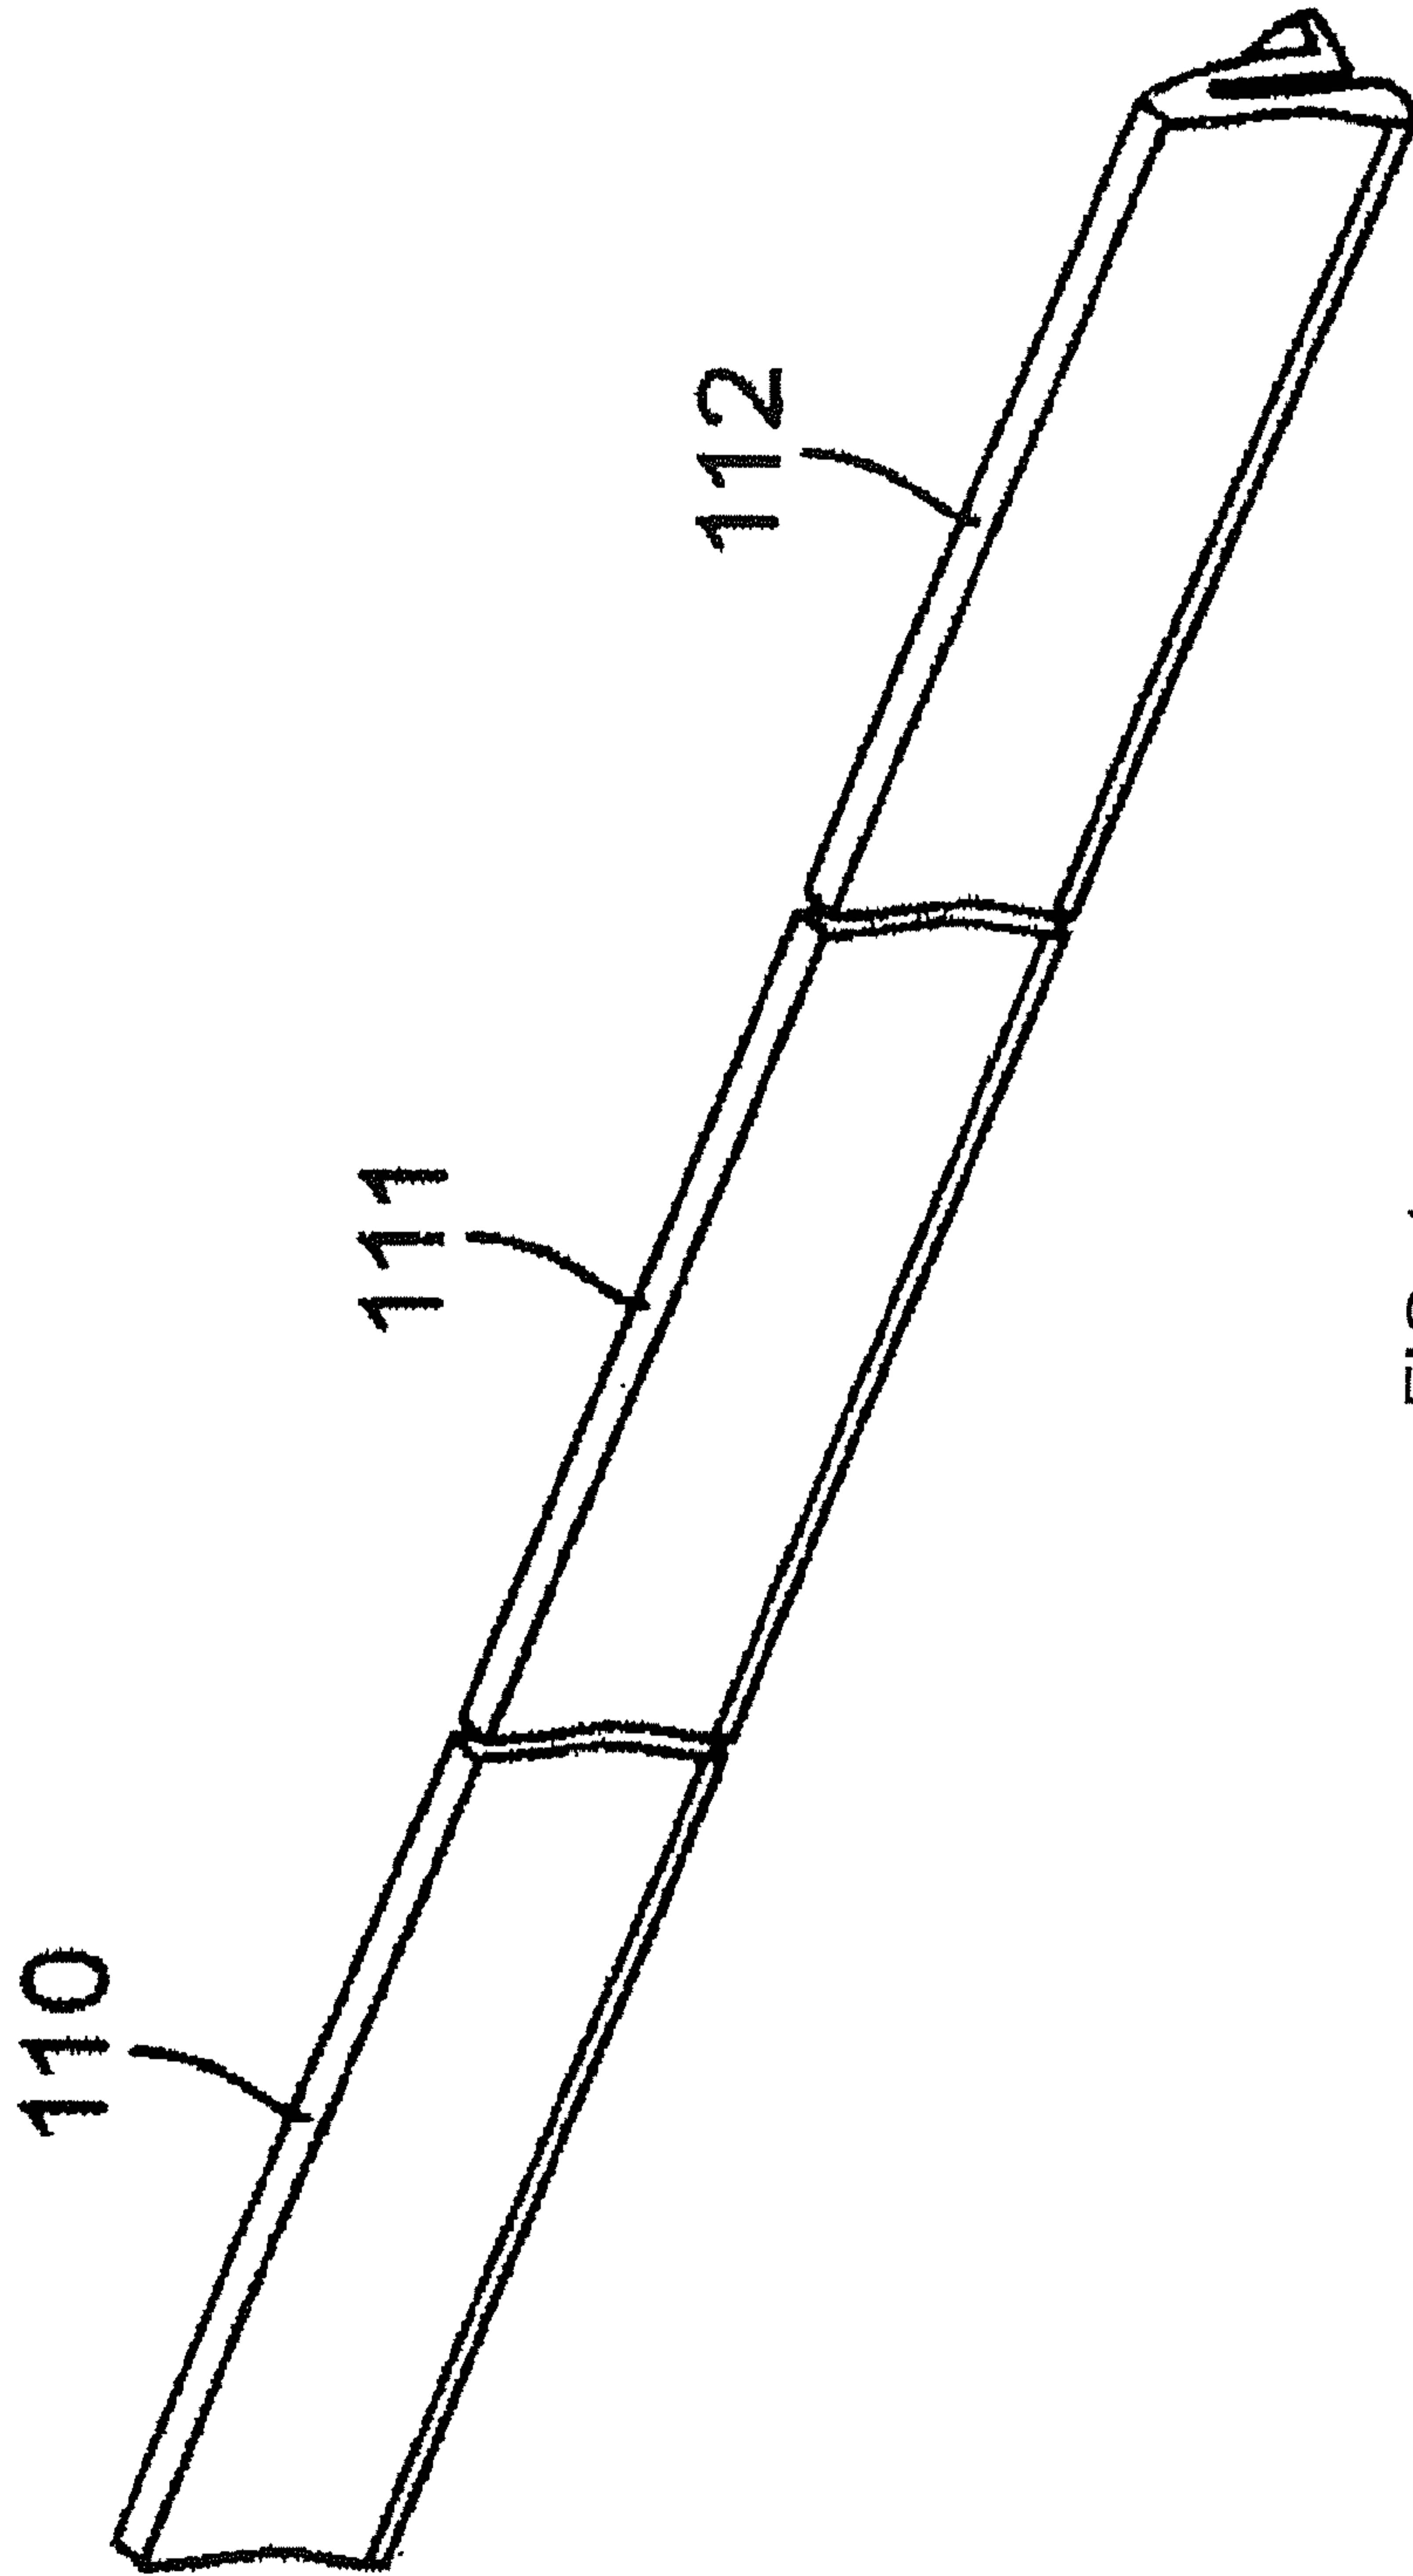


FIG. 1

Substitute Sheet

2/4

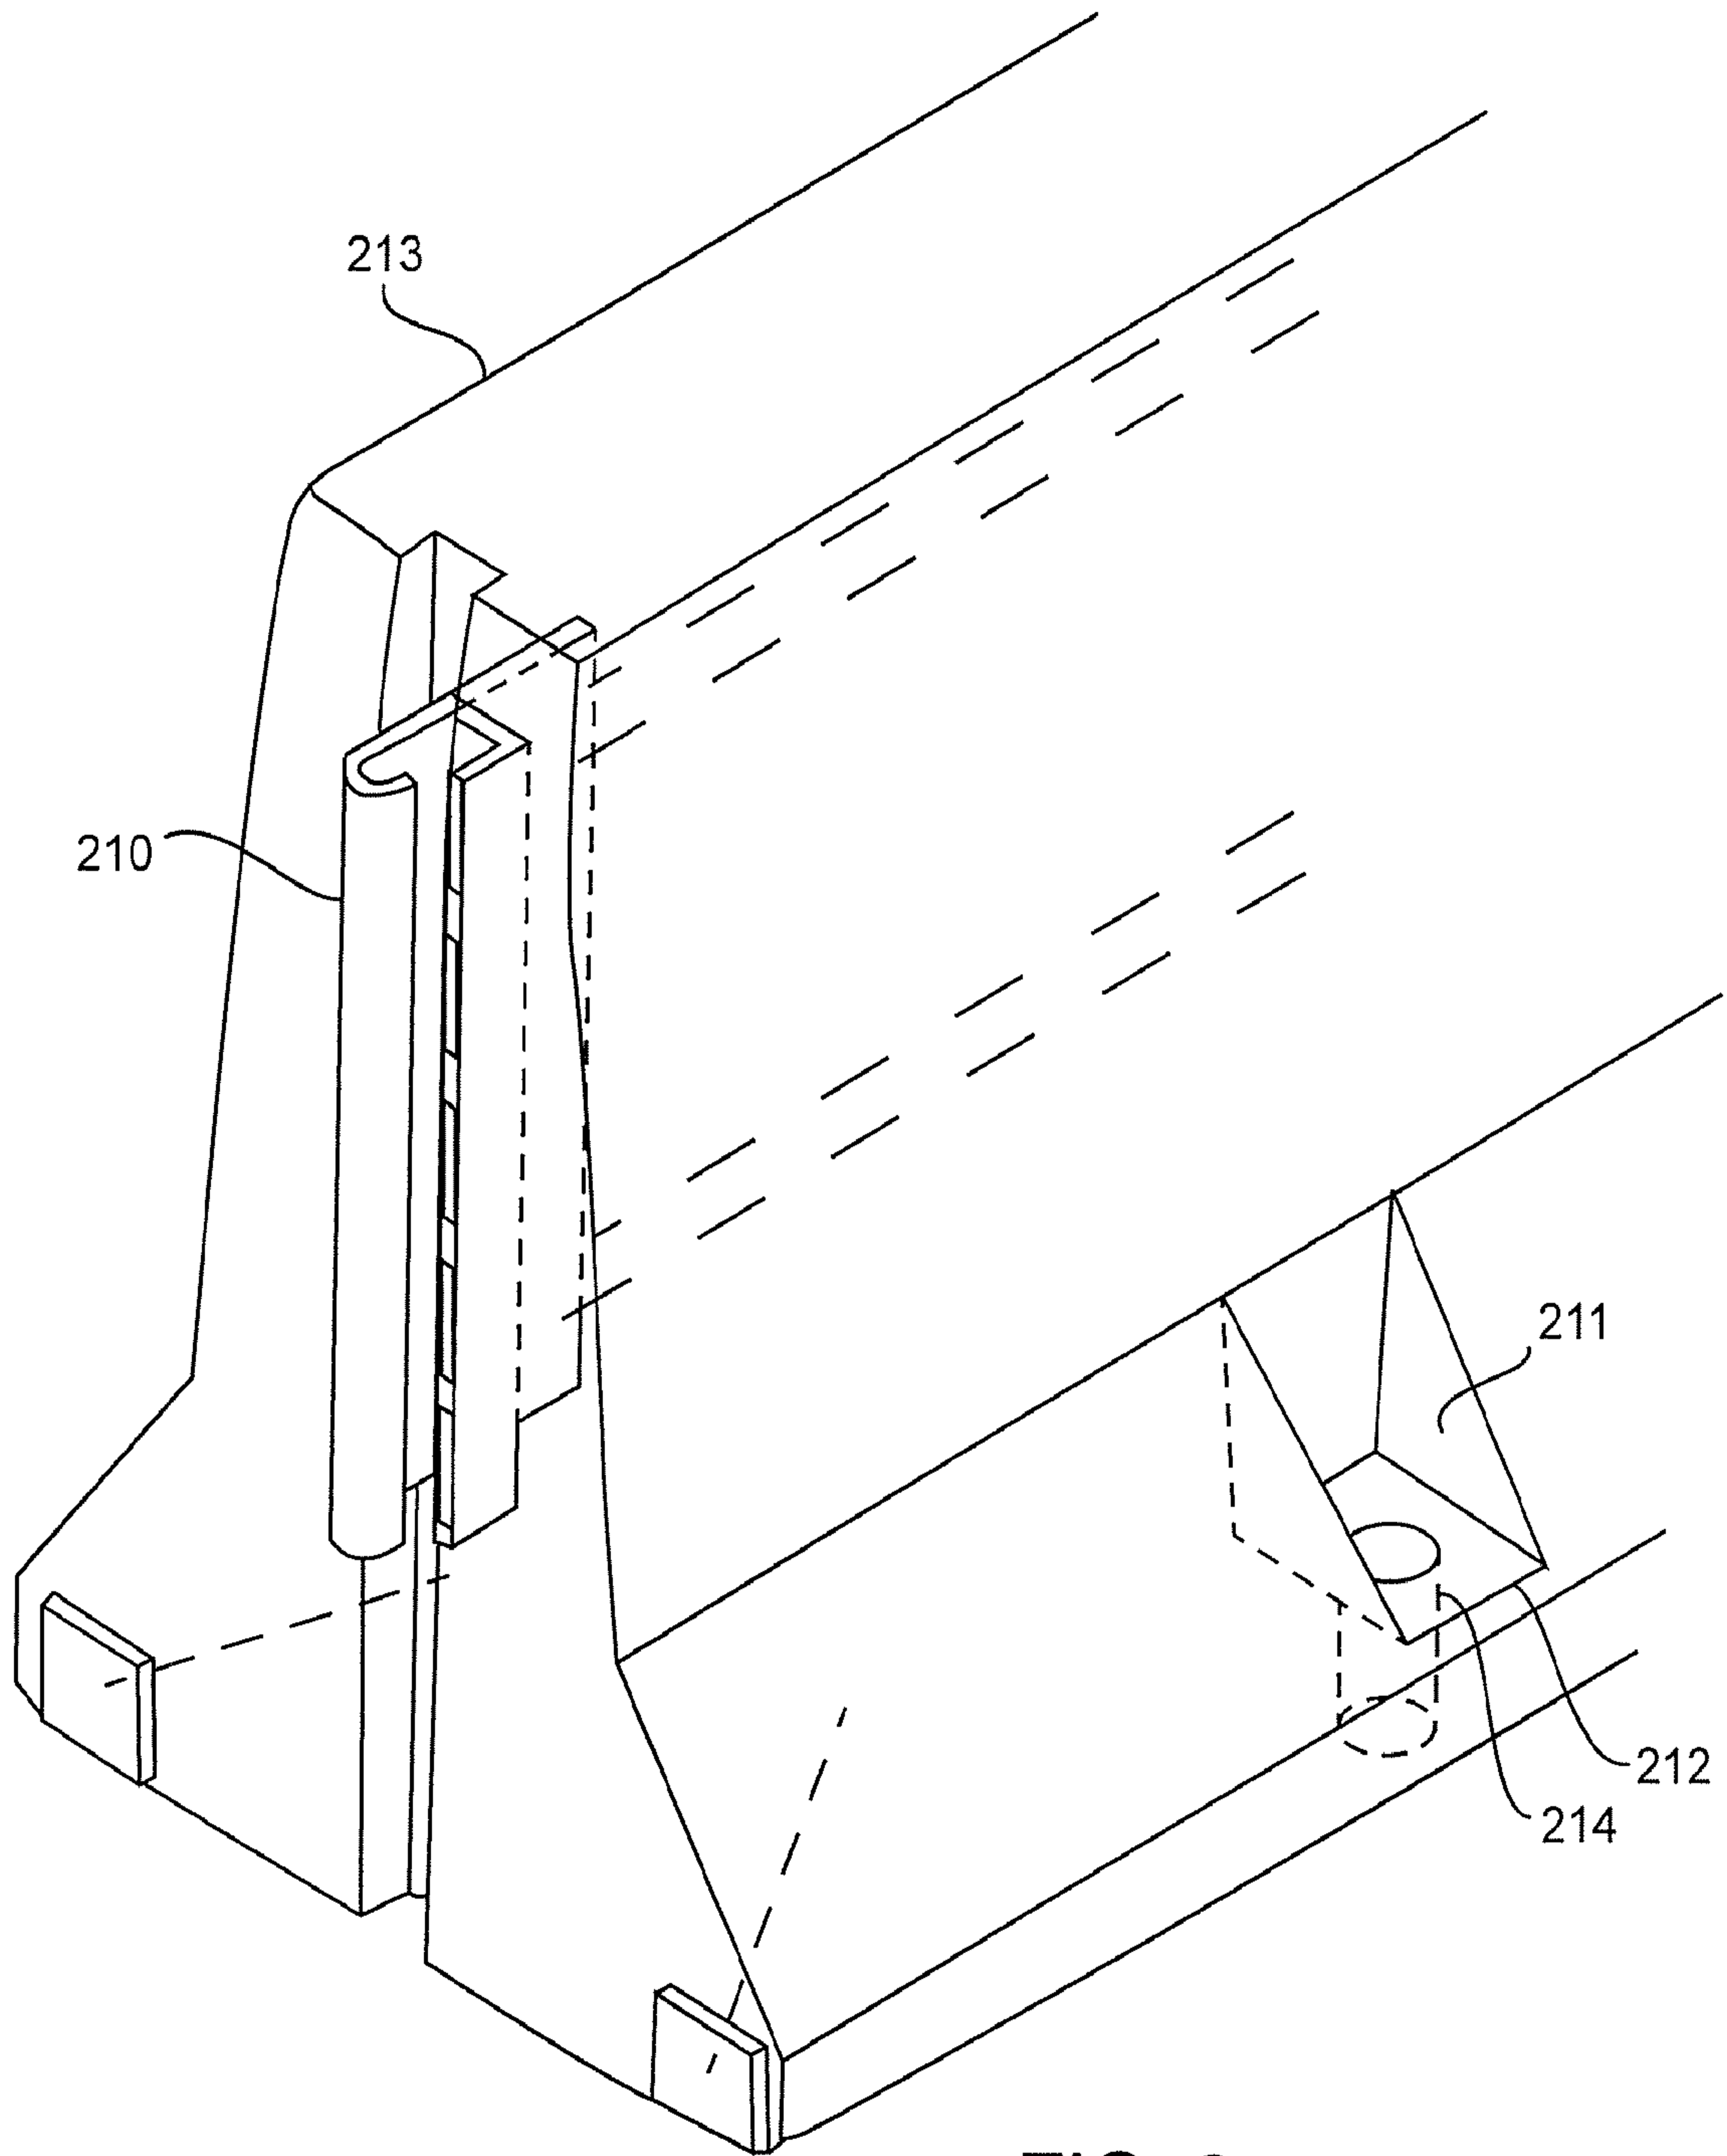


FIG. 2

Substitute Sheet

3/4

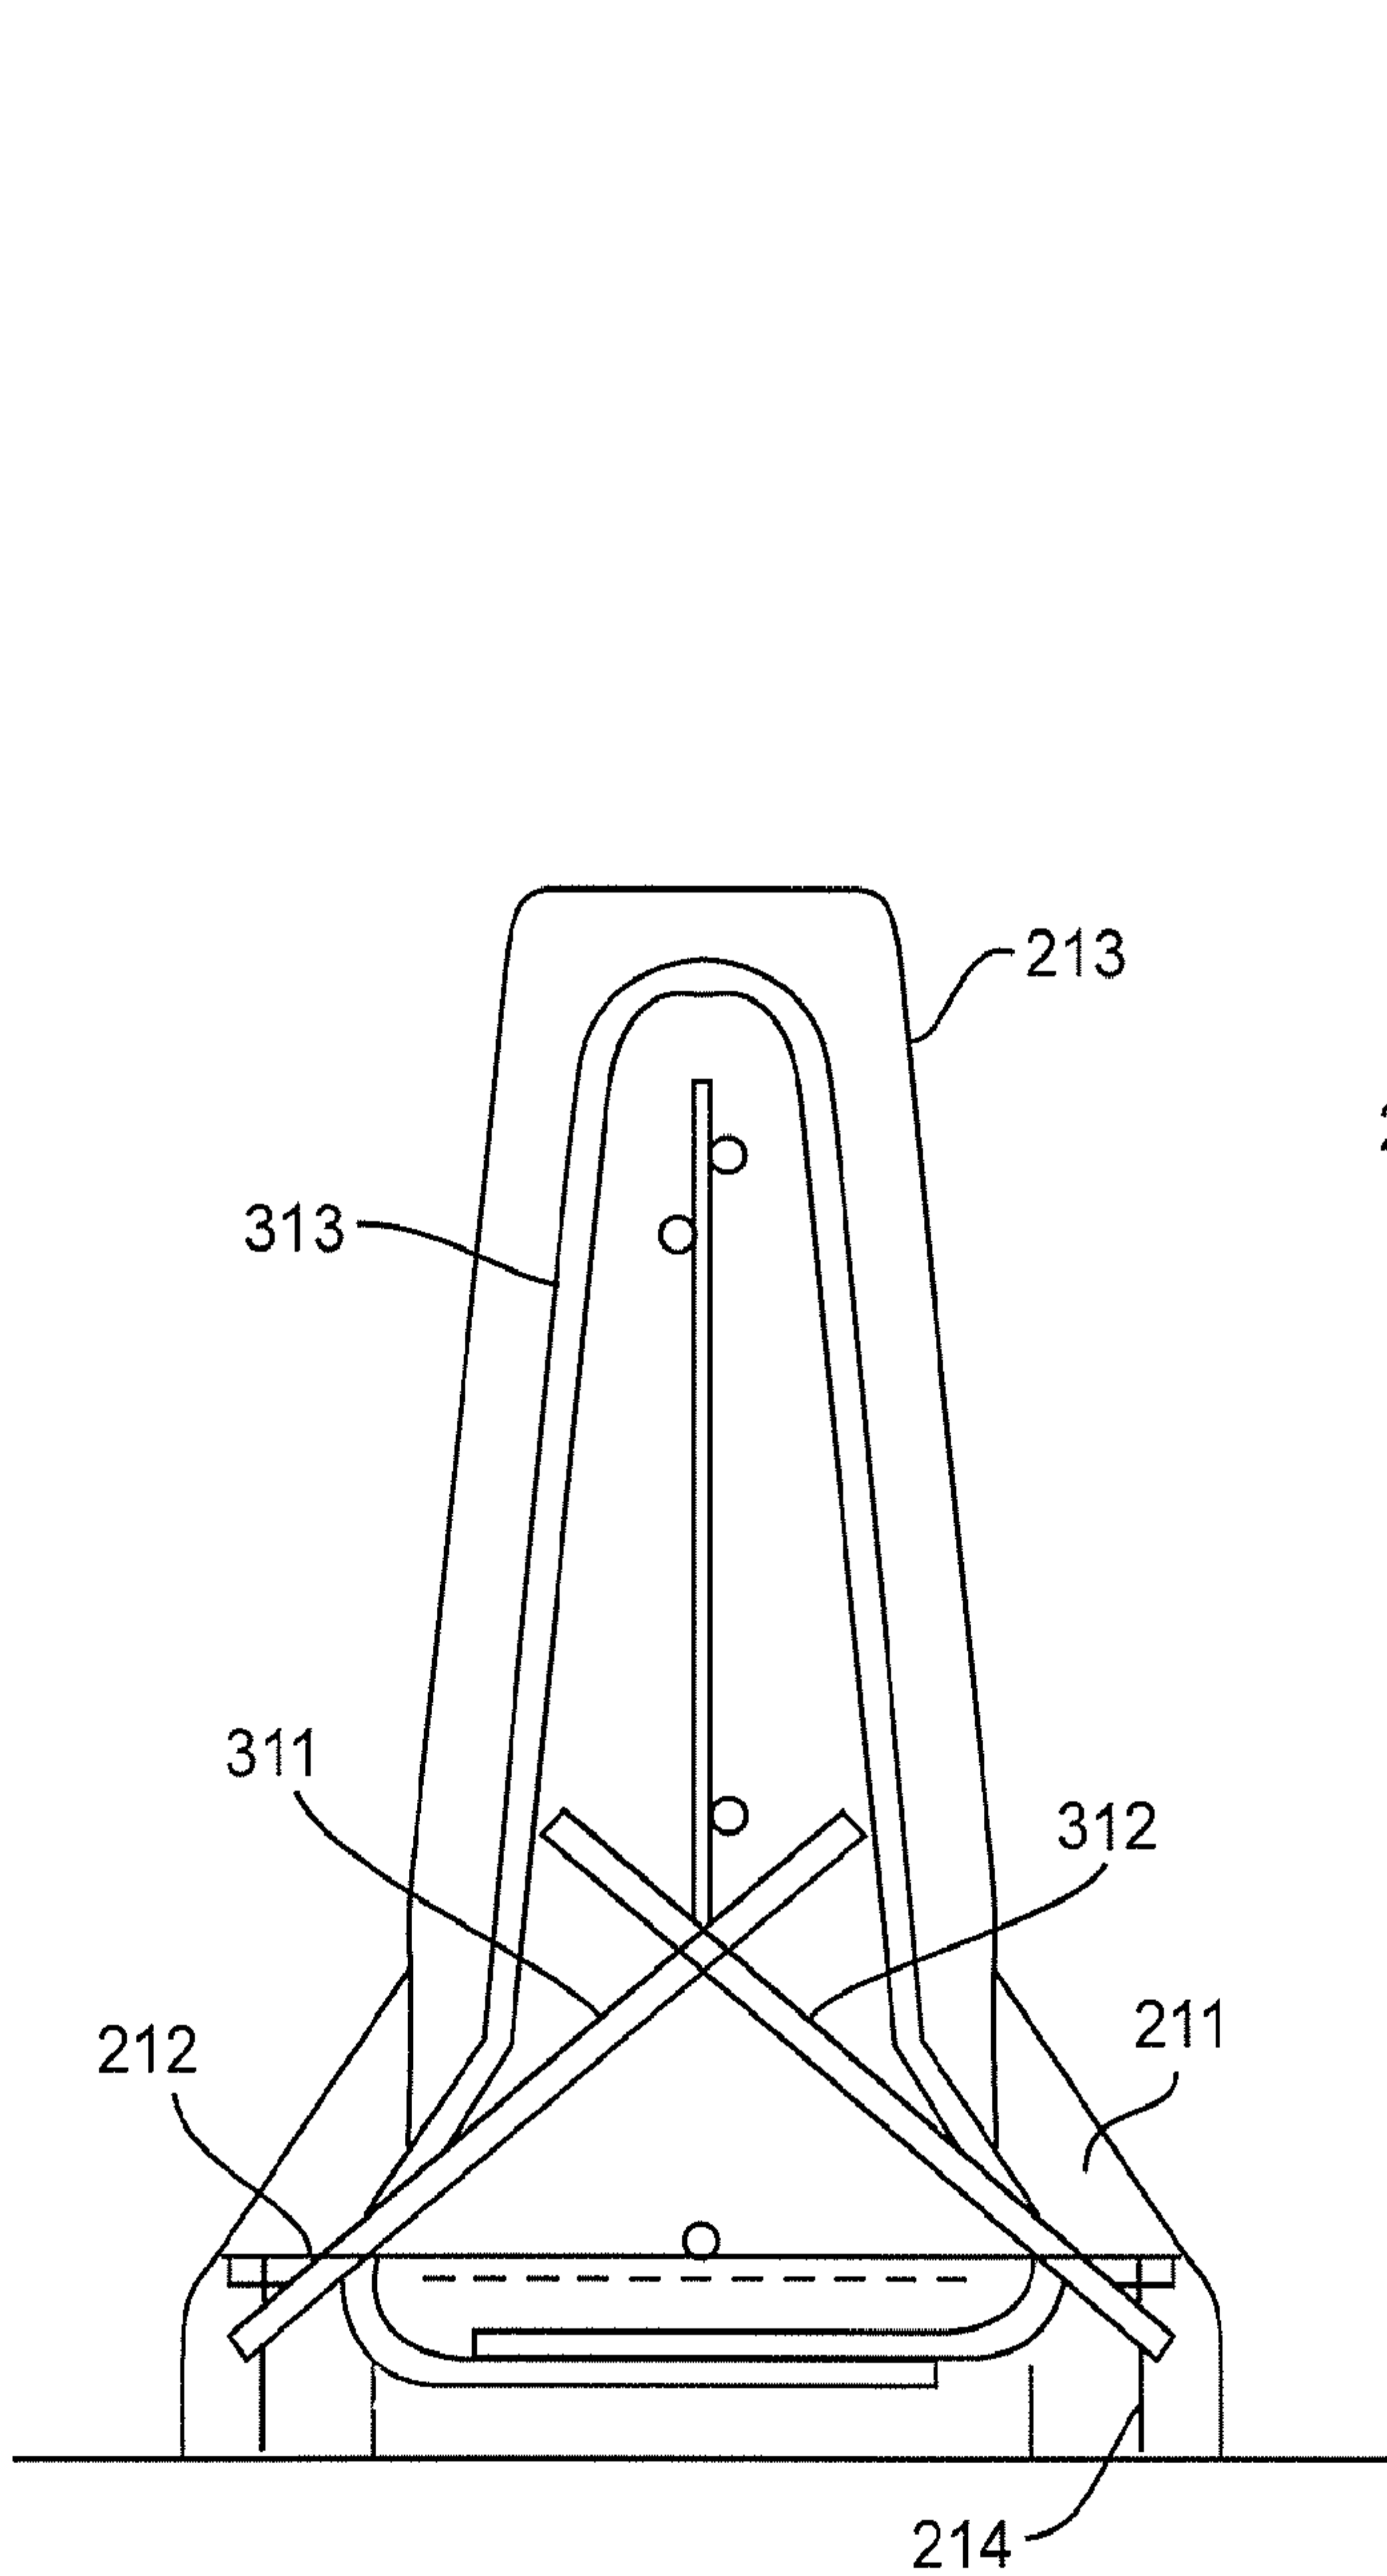


FIG. 3

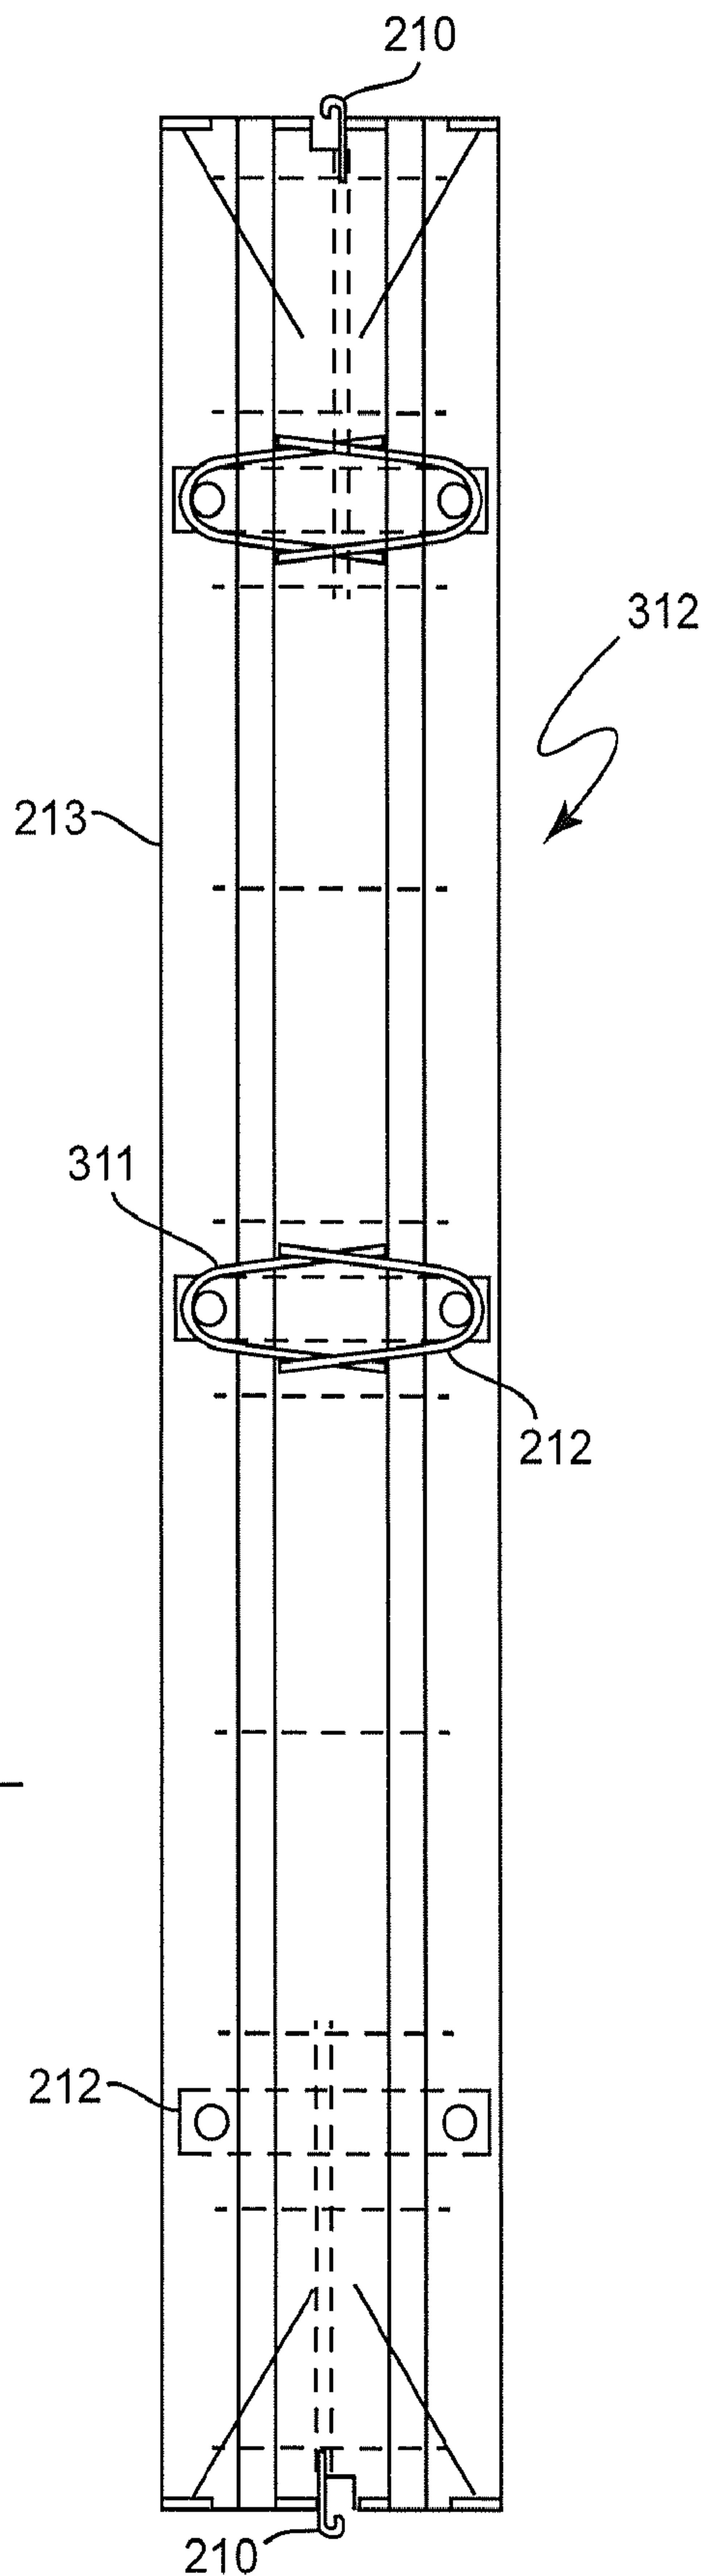


FIG. 4

Substitute Sheet

4/4

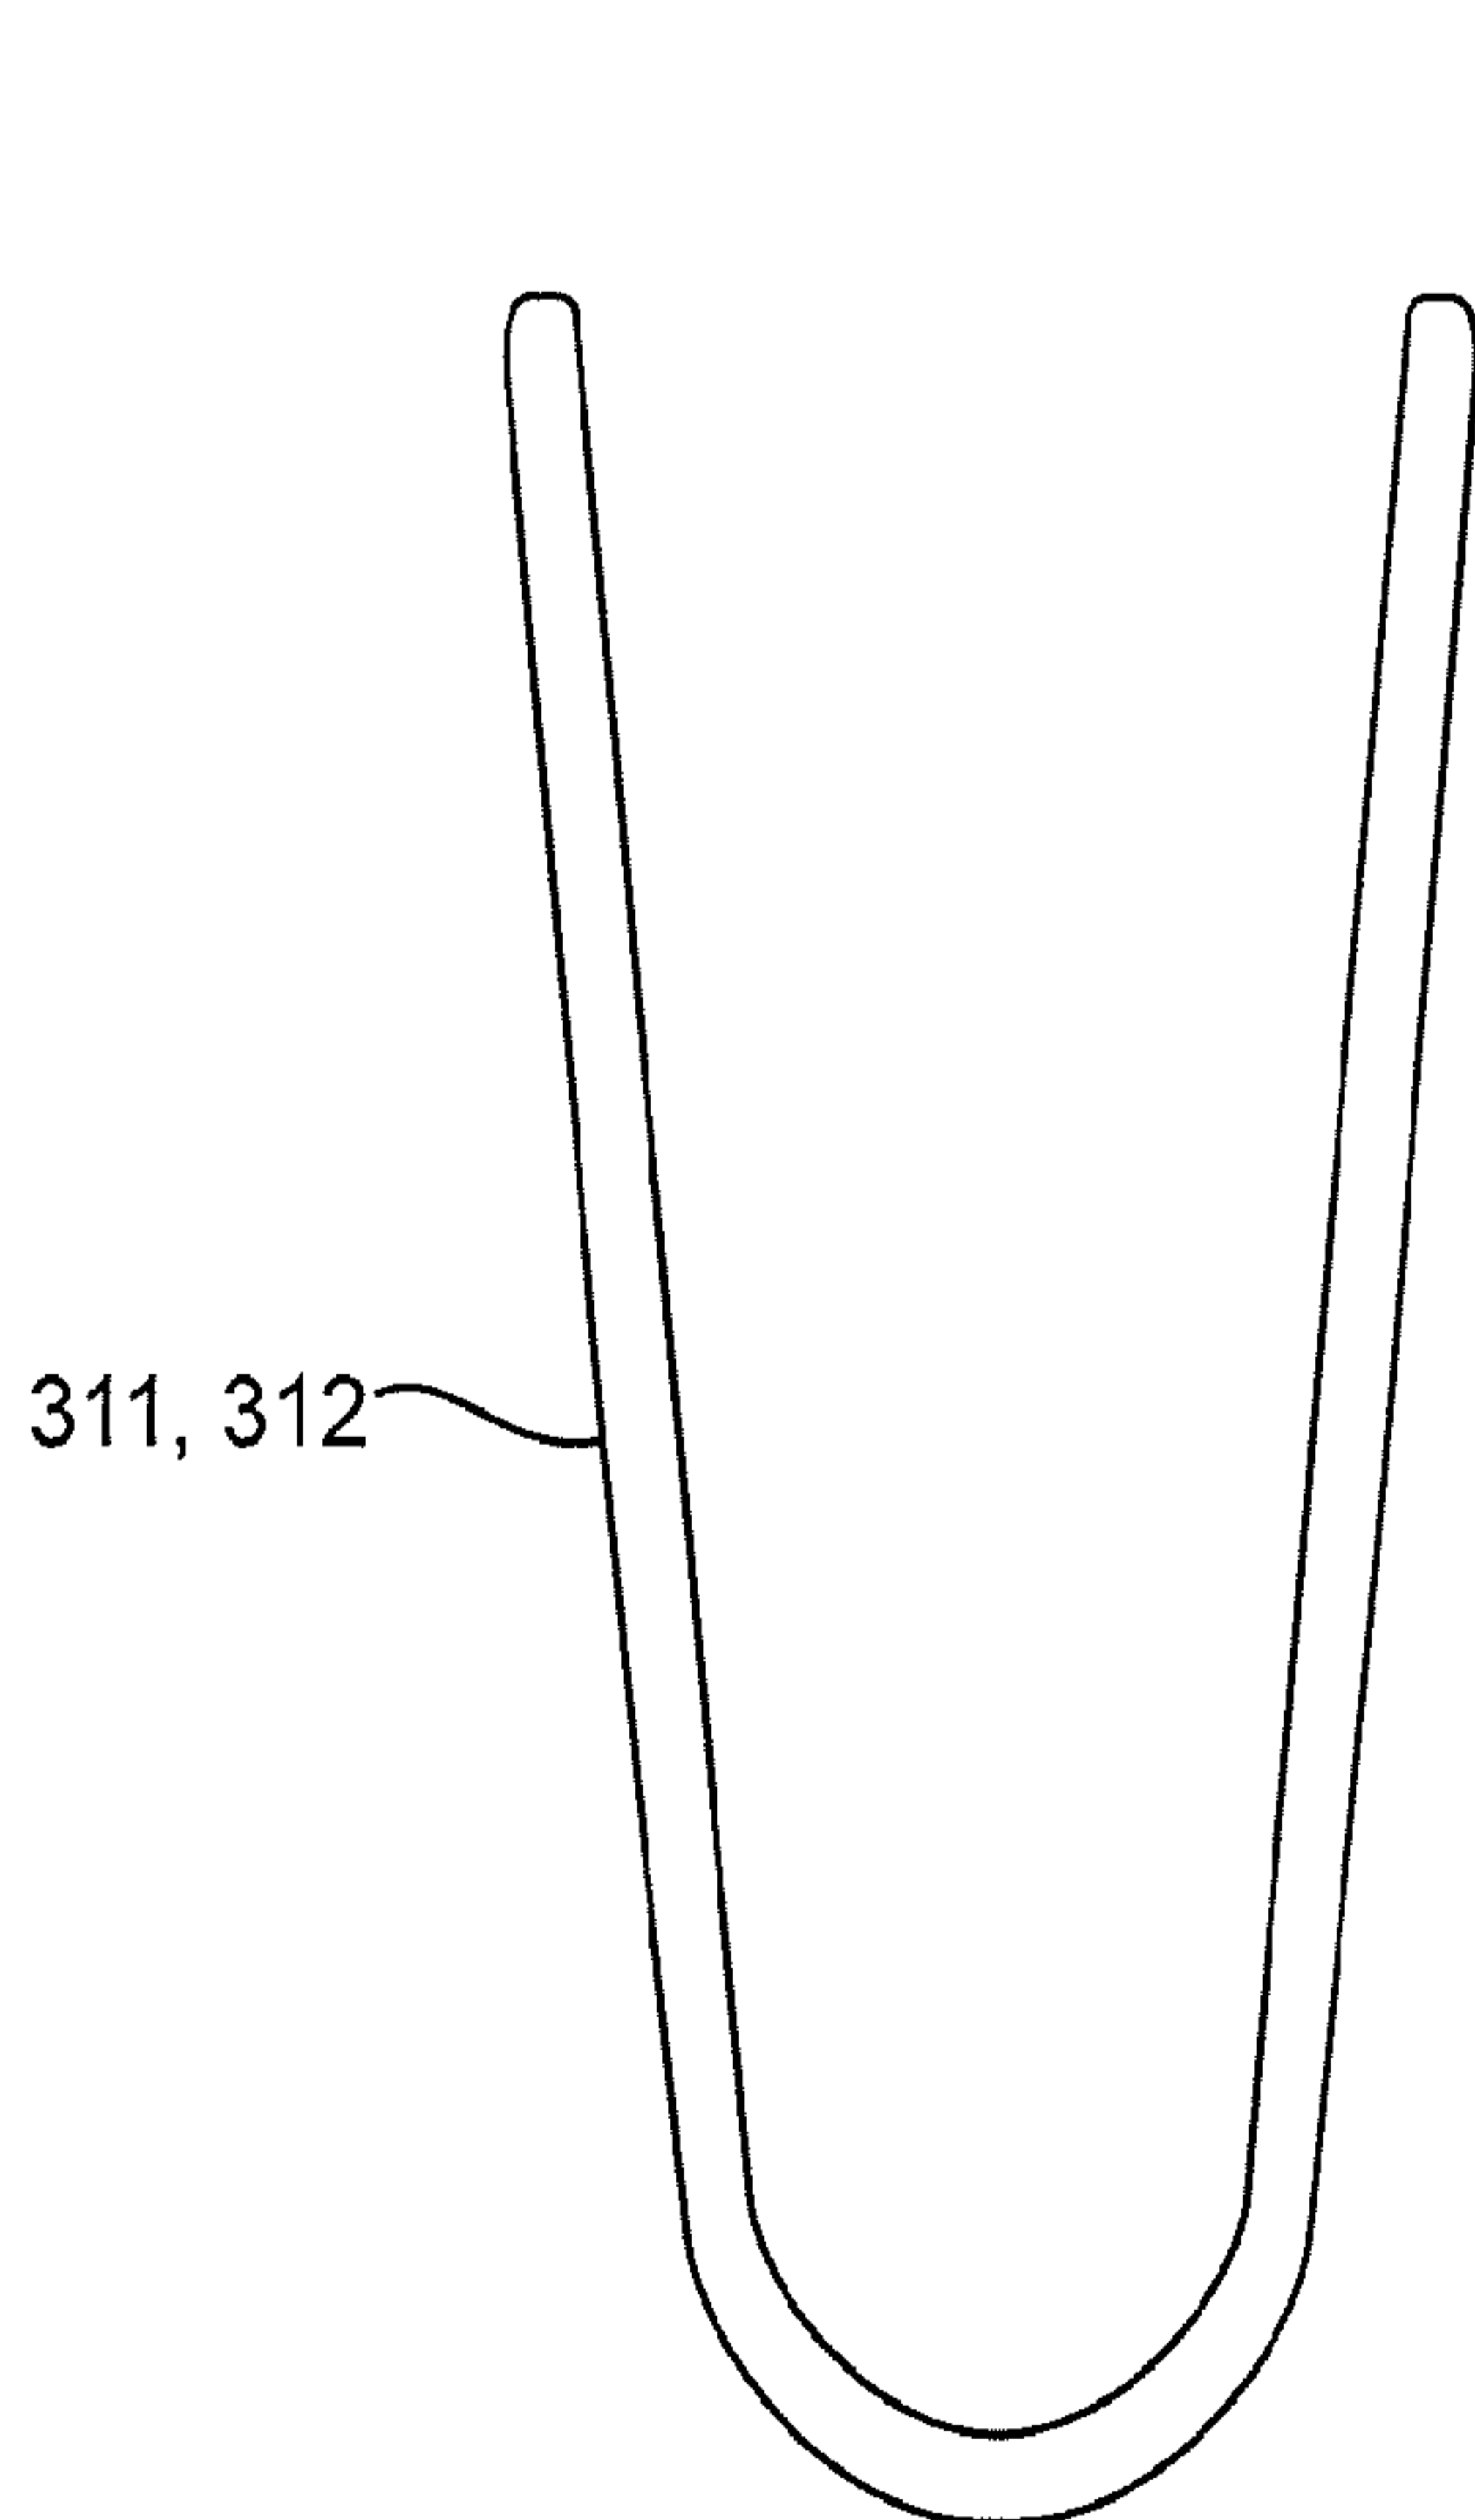
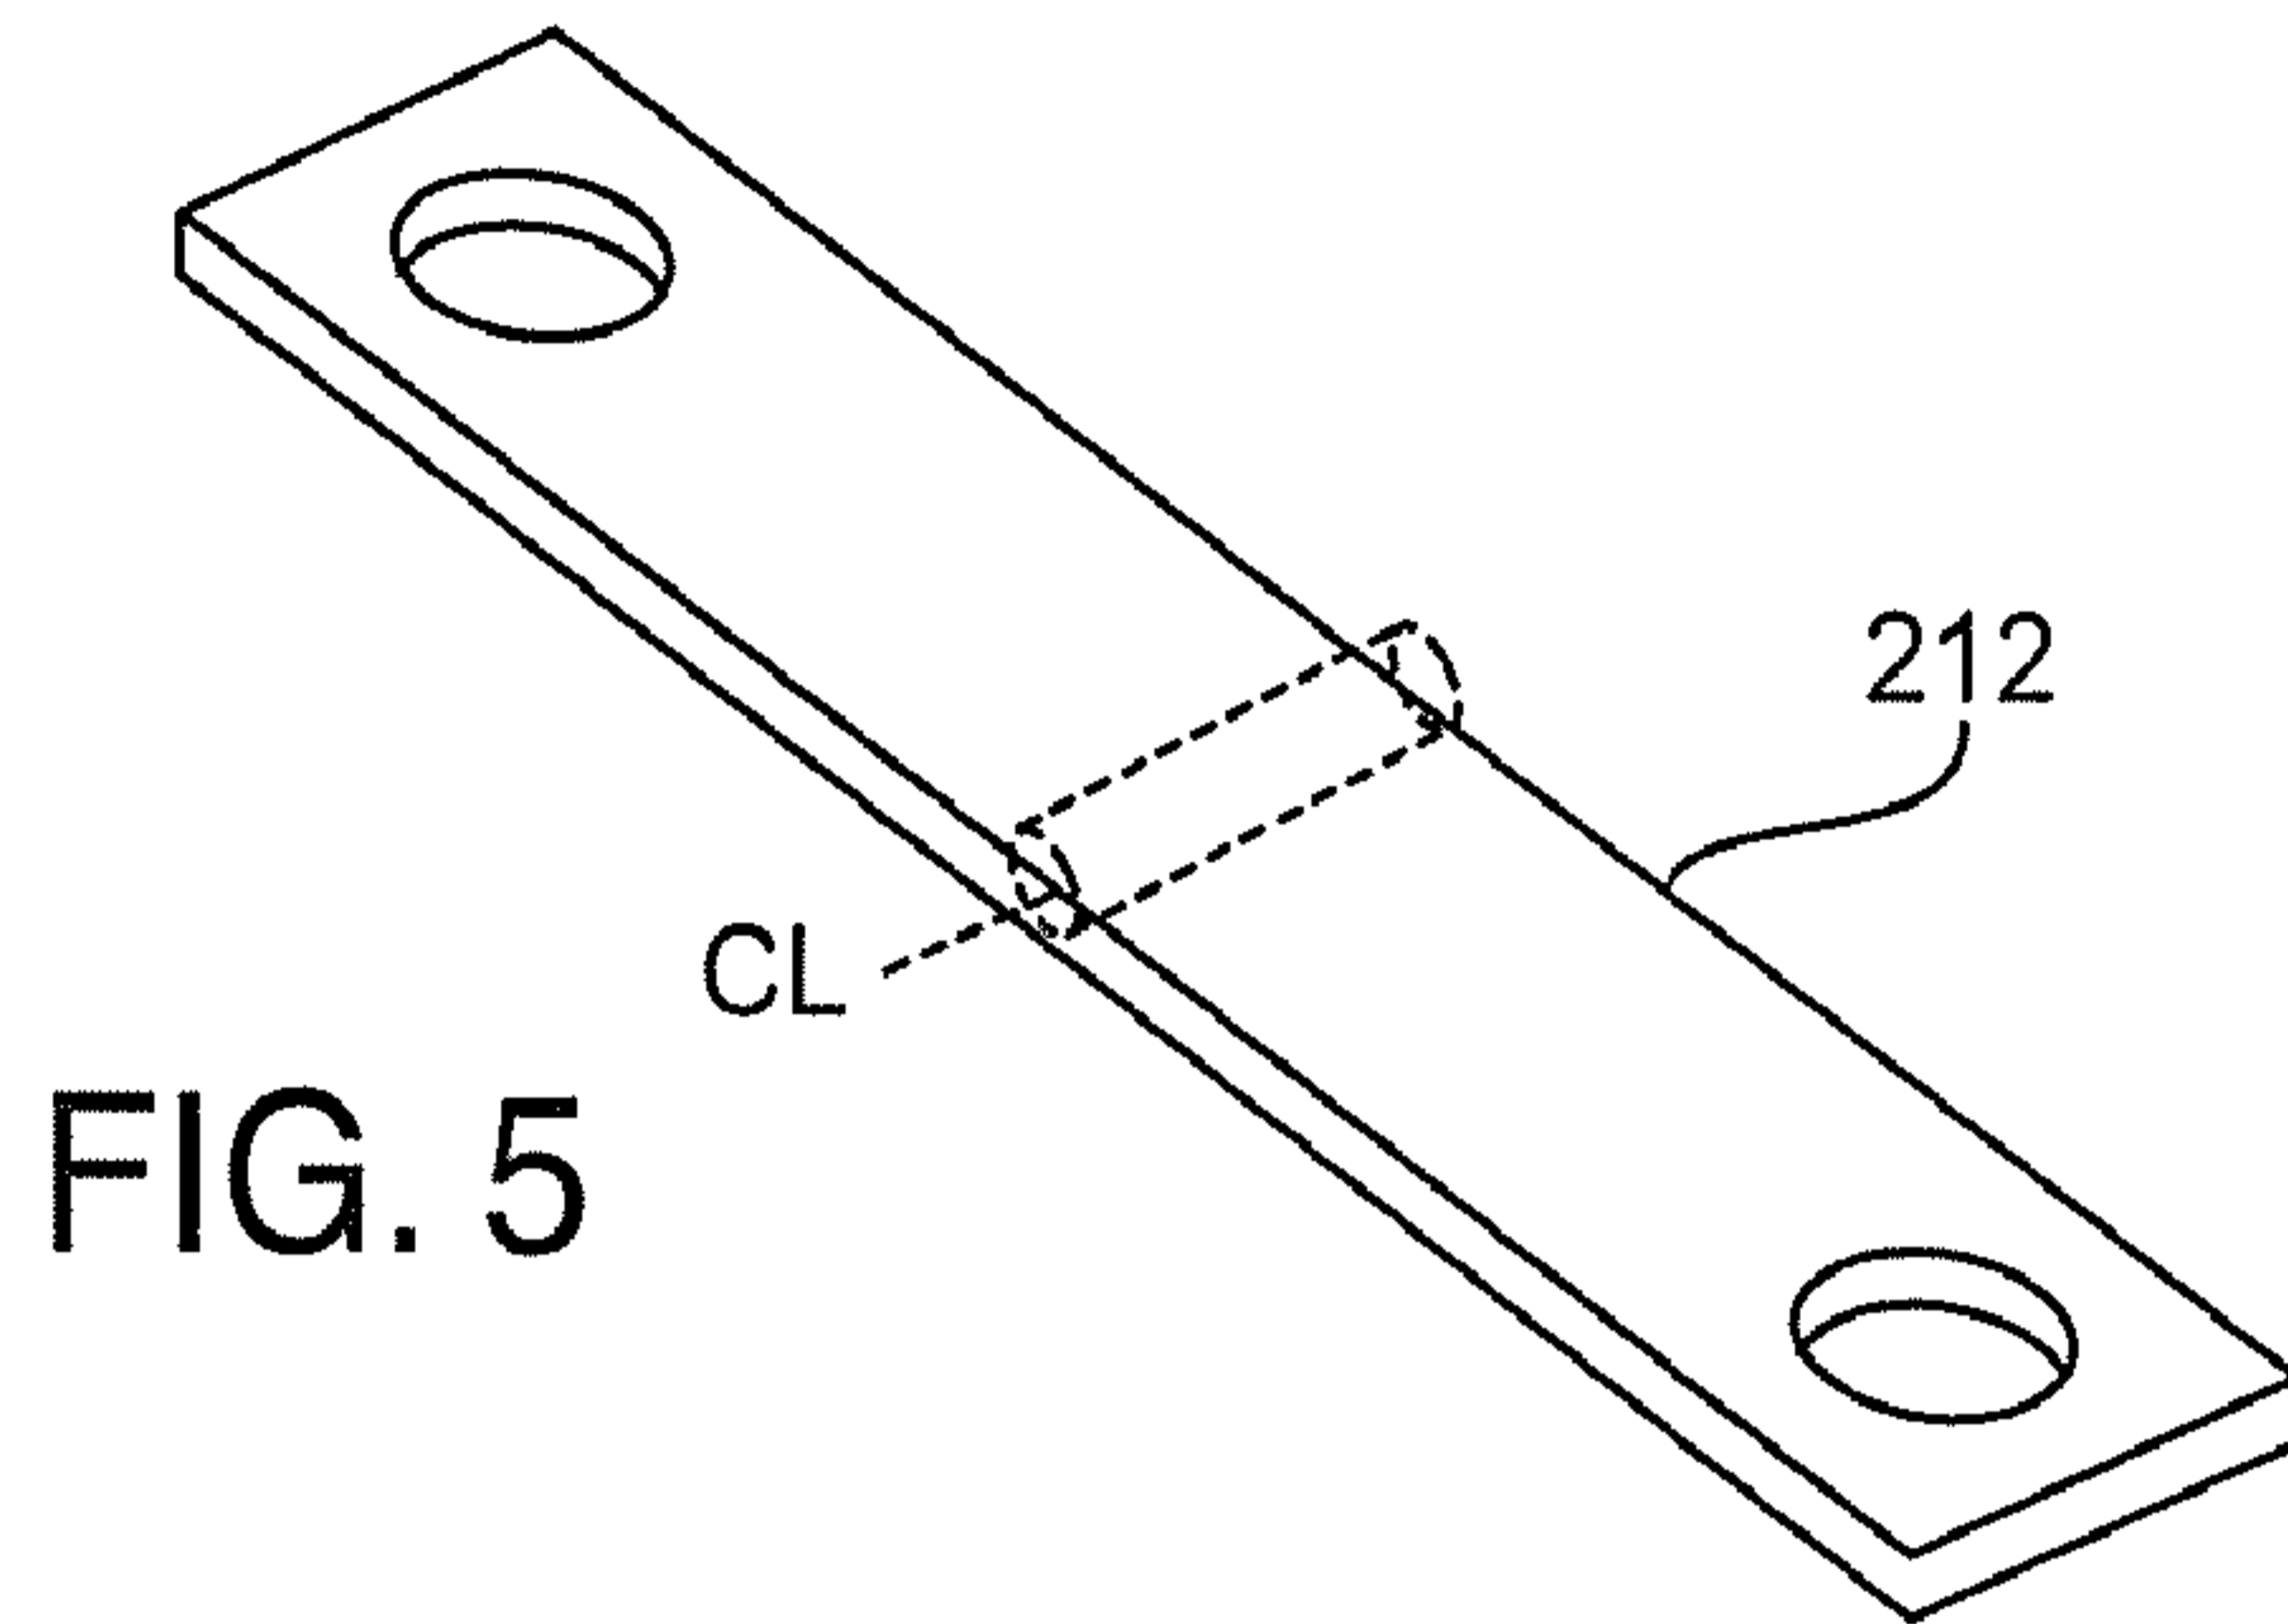


FIG. 6

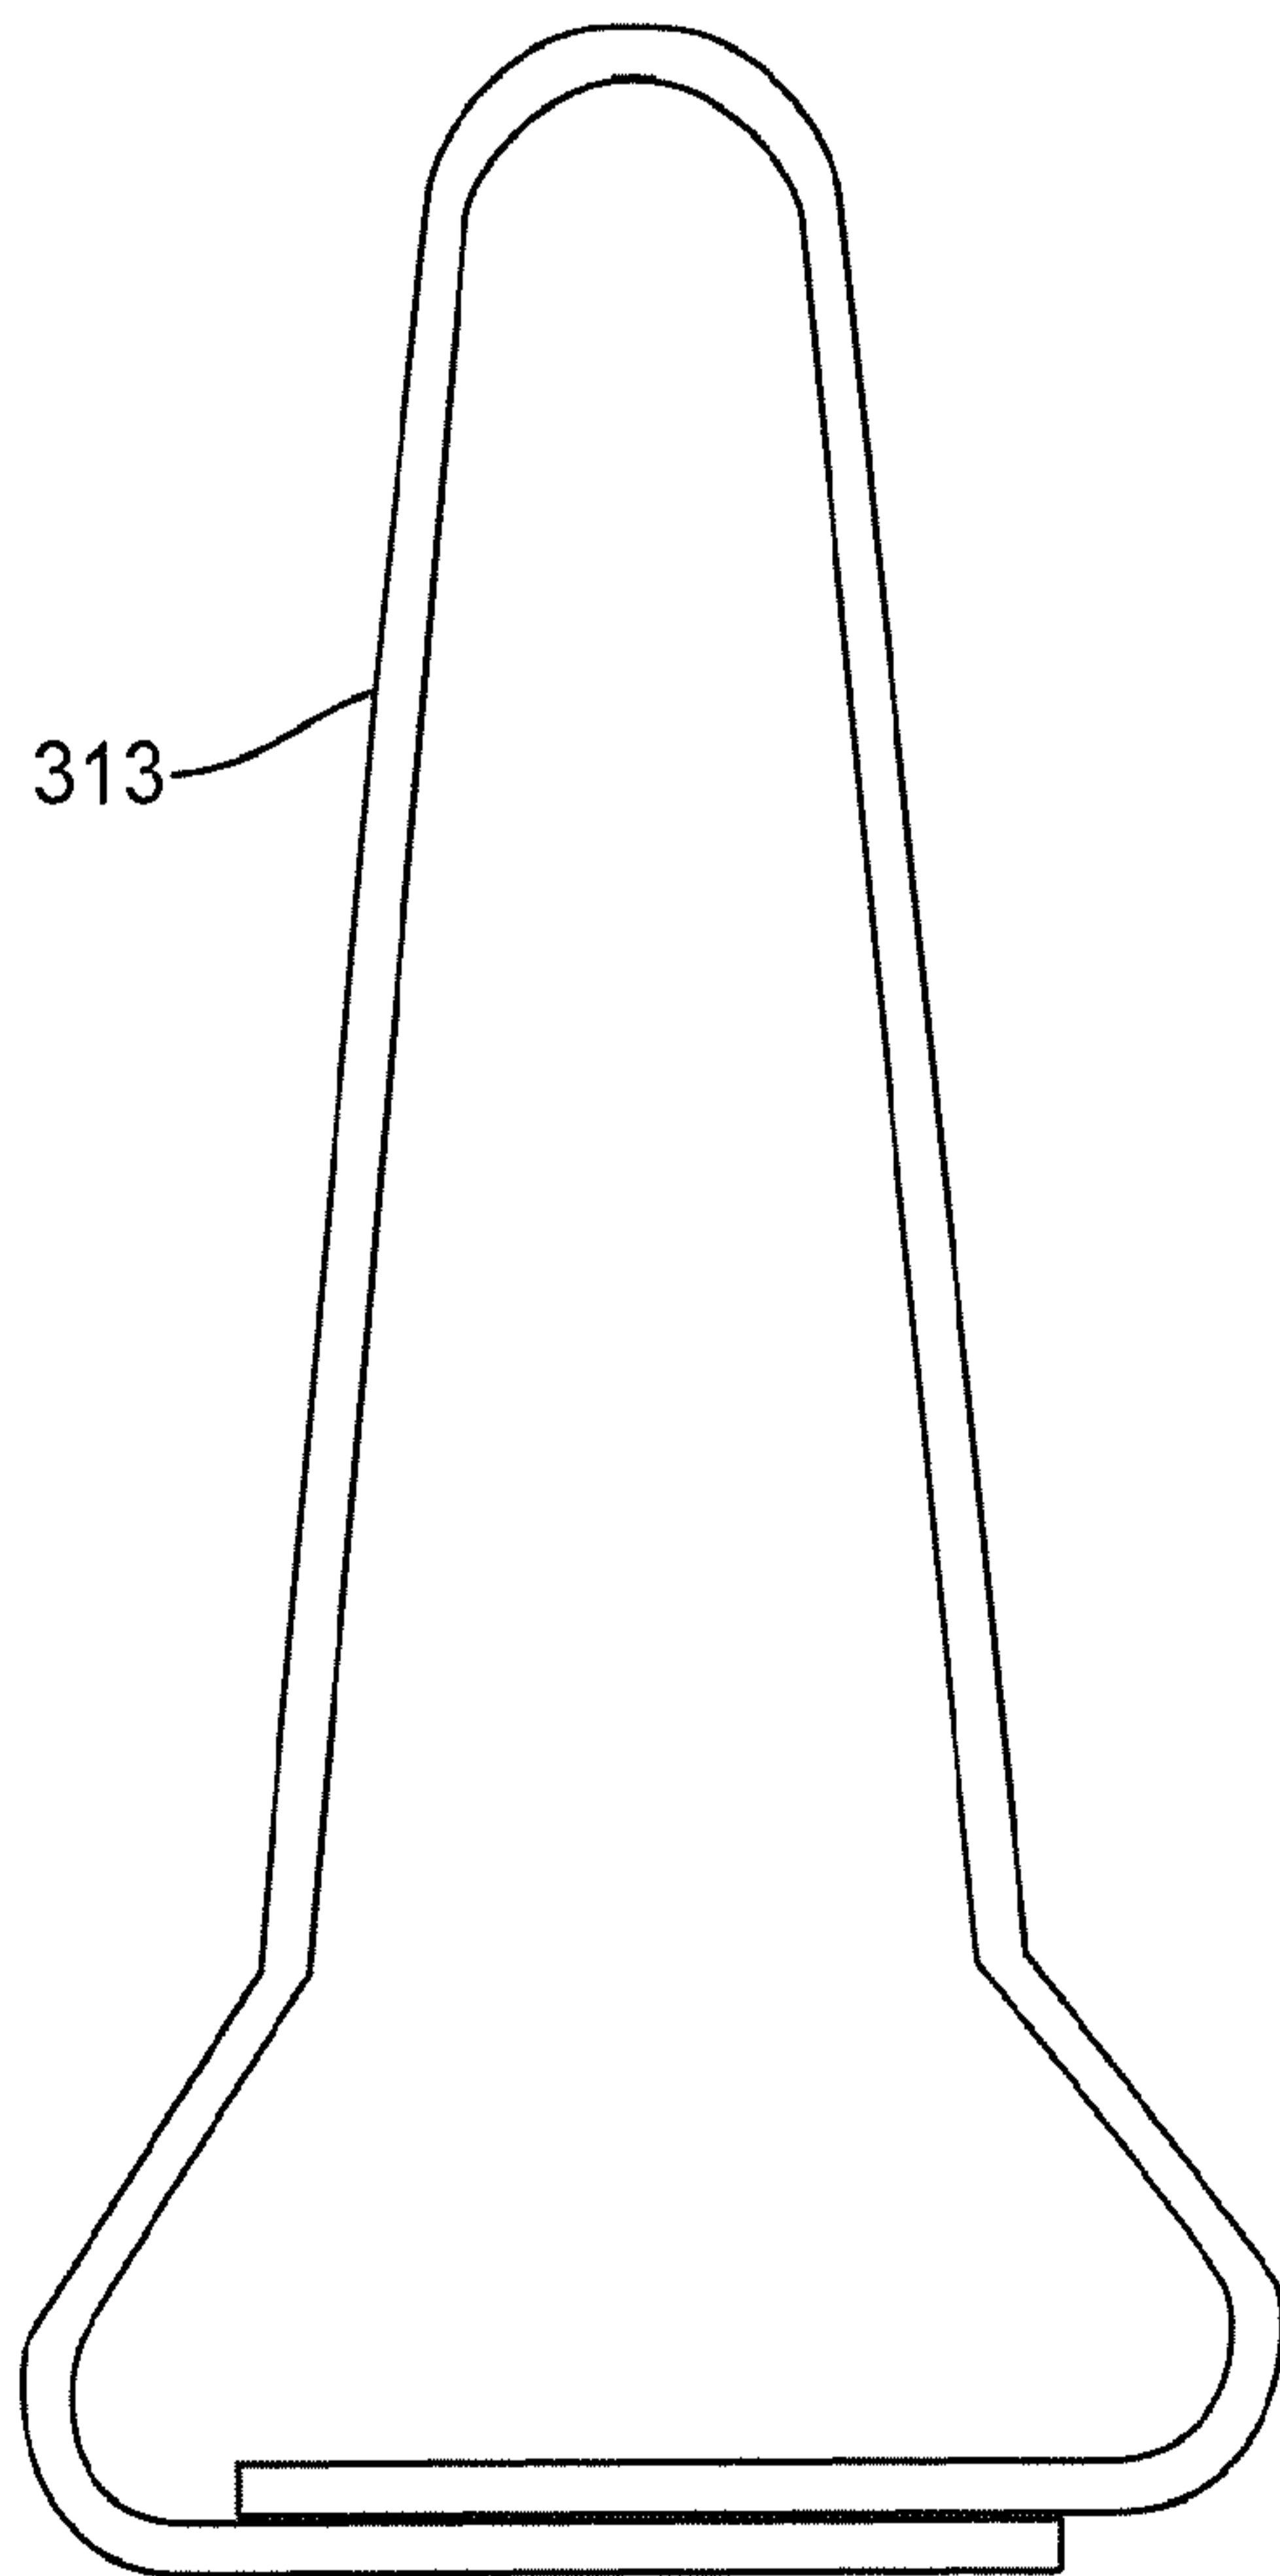


FIG. 7

