

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2013209422 B2**

(54) Title
Flexible robotic actuators

(51) International Patent Classification(s)
B25J 9/10 (2006.01) **B25J 9/14** (2006.01)

(21) Application No: **2013209422** (22) Date of Filing: **2013.01.22**

(87) WIPO No: **WO13/110086**

(30) Priority Data

(31) Number	(32) Date	(33) Country
61/588,596	2012.01.19	US

(43) Publication Date: **2013.07.25**

(44) Accepted Journal Date: **2017.08.17**

(71) Applicant(s)
President and Fellows of Harvard College

(72) Inventor(s)
Mazzeo, Aaron D.;Morin, Stephen A.;Shepherd, Robert F.;Whitesides, George M.;Kalb, William B.

(74) Agent / Attorney
Davies Collison Cave Pty Ltd, Level 15 1 Nicholson Street, MELBOURNE, VIC, 3000, AU


(56) Related Art
US 2006/0028041 A1
EP 1190819 B1
WO 2012/148472 A2



- (51) International Patent Classification:
B25J 9/10 (2006.01) *B25J 9/14* (2006.01)
- (21) International Application Number:
PCT/US2013/022593
- (22) International Filing Date:
22 January 2013 (22.01.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/588,596 19 January 2012 (19.01.2012) US
- (71) Applicant: **PRESIDENT AND FELLOWS OF HARVARD COLLEGE** [US/US]; 17 Quincy Street, Cambridge, MA 02138 (US).
- (72) Inventors: **MAZZEO, Aaron, D.**; 280 Western Avenue #4, Cambridge, MA 02139 (US). **MORIN, Stephen, A.**; 1 Brattie Drive, Apt. 8, Arlington, MA 02474 (US). **SHEPHERD, Robert, F.**; 28 Dickinson Street Unit 1, Somerville, MA 02143 (US). **WHITESIDES, George, M.**; 124 Grasmere Street, Newton, MA 02458 (US). **KALB, William, B.**; 12 Oxford Street, Cambridge, MA 02138 (US).
- (74) Agents: **SCOZZAFAVA, Mary, Rose** et al.; Wilmer Cutler Pickering Hale And Dorr LLP, 7 World Trade Center, 250 Greenwich Street, New York, NY 10007 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FLEXIBLE ROBOTIC ACTUATORS

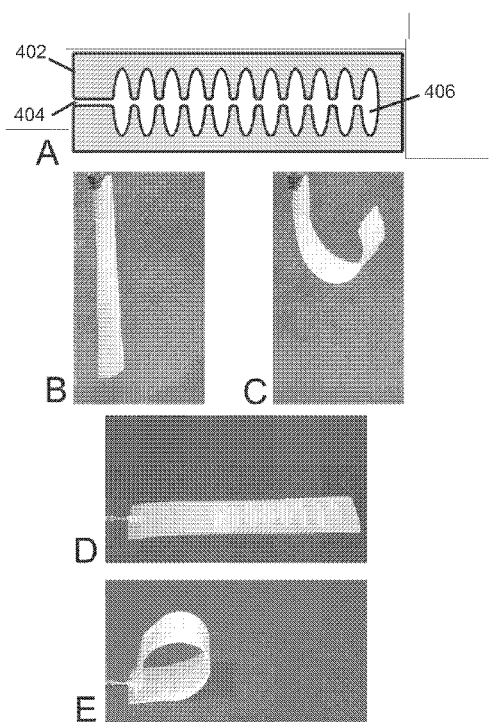

(57) Abstract: The laminated robotic actuator includes a strain - limiting layer comprising a flexible, non - extensible material in the form of a sheet or thin film, a flexible inflatable layer in the form of a thin film or sheet in facing relationship with the strain - limiting layer, wherein the inflatable layer is selectively adhered to the strain - limiting layer, and wherein a portion of an un- adhered region between the strain - limiting layer and the inflatable layer defines a pressurizable channel, and at least one fluid inlet in fluid communication with the pressurizable channel. The first flexible non - extensible material has a stiffness that is greater than the stiffness of the second flexible elastomeric material and the flexible elastomer is non - extensible under actuation conditions.



Published:

— *with international search report (Art. 21(3))*

FLEXIBLE ROBOTIC ACTUATORS

[0001] The entire content of U.S. Provisional Patent Application No.: 61/588,596, entitled "Flexible Robotic Actuators," filed on January 19, 2012, are herein incorporated by reference.

[0002] All patents, patent applications and publications cited herein are hereby incorporated by reference in their entirety in order to more fully describe the state of the art as known to those skilled therein as of the date of the invention described herein.

[0003] This paragraph has been left intentionally blank.

[0004] This technology relates generally to flexible actuators. In particular, this invention relates to substantially thin robotic manipulators.

[0005] Most robots are constructed using so-called "hard" body plans; that is, a rigid (usually metal) skeleton, electrical or hydraulic actuation, electromechanical control, sensing, and feedback. These robots are very successful at the tasks for which they were designed (e.g., heavy manufacturing in controlled environments) but have severe limitations when faced with more demanding tasks (for example, stable motility in demanding environments): tracks and wheels perform less well than legs and hooves.

[0006] Evolution has selected a wide range of body plans for mobile organisms. Many approaches to robots that resemble animals with skeletons are being actively developed: "Big Dog" is an example. A second class of robot—those based on animals without skeletons—are much less explored, for a number of reasons: i) there is a supposition that "marine-like" organisms (squid) will not operate without the buoyant support of water; ii) the materials and components necessary to make these systems are not available; iii) the major types of actuation used in them (for example, hydrostats) are virtually unused in conventional robotics. These systems are intrinsically very different in their capabilities and potential uses than hard-bodied systems. While they will (at least early in their development) be slower than hard-bodied

systems, they will also be more stable and better able to move through constrained spaces (cracks, rubble), lighter, and less expensive.

[0007] Robots, or robotic actuators, which can be described as “soft” are most easily classified by the materials used in their manufacture and their methods of actuation. The field of soft robotic actuation began with work by Kuhn *et al* in 1950. Their work focused on the reversible change in the coiling and uncoiling of a polymeric material dependant on the pH of the surrounding medium. They used this to successfully raise and lower a weight, thus showing proof of principle for the use of soft materials in robotic actuation. Hamlen *et al* expanded upon this idea in 1965 and showed that polymeric materials can be made to contract electrolytically. These two developments set the scene for future work using the swelling of polymeric gels and electronic control of dielectric-based actuators. Otake *et al* have demonstrated the use of electro-active polymers in the manufacture of starfish-shaped robotic actuators. Pneumatically-driven soft actuators based on pressurization of sealed chambers fabricated from extensible polymers were first reported by Suzumori *et al* in 1991. This type of actuation has been used on the *millimetre scale* to fabricate grippers, tentacles, and other related devices including pneumatic balloon actuators.

[0008] Pneumatic soft robotic actuators can be manufactured using inextensible materials, which rely on architectures such as bellows. McKibben actuators, also known as pneumatic artificial muscles (PMAs), rely on the inflation of a bladder constrained within a woven sheath which is inextensible in the axis of actuation. The resultant deformation leads to radial expansion and axial contraction; the force that can be applied is proportional to the applied pressure. Related actuators are called pleated pneumatic artificial muscles.

[0009] There are “soft” robotic actuators such as shape memory alloys which have been used by Sugiyama *et al* both as the actuation method and as the main structural component in robots which can both crawl and jump. Another approach, which can be described as “soft” uses a combination of traditional robotic elements (an electric motor) and soft polymeric linkages based on Shape Deposition Manufacturing (SDM). This technique is a combination of 3D printing and milling. An example of a composite of traditional robotics with soft elements has been used with great success in developing robotic grippers comprising soft fingers to improve the speed and efficiency of soft fruit packing in New Zealand.

2013209422 03 Jul 2017

[0010] Flexible robotic actuators are described. Embodiments of the disclosure are illustrated and described below.

[0011] According to a first aspect of the present invention, there is provided a laminated robotic actuator comprising a strain-limiting layer comprising a flexible, non-extensible material in a form of a sheet or thin film; a sealing layer comprising a flexible, non-extensible material in a form of a thin film or sheet in a facing relationship with the strain-limiting layer, wherein a stiffness of the strain-limiting layer is greater than a stiffness of the sealing layer, wherein the sealing layer is selectively adhered to the strain-limiting layer, and wherein a portion of an un-adhered region between the strain-limiting layer and the sealing layer defines a pressurizable channel; and at least one fluid inlet, in fluid communication with the pressurizable channel, configured to receive pressurized fluid to cause the actuator to bend toward the sealing layer.

[0012] In any of the embodiments described herein, the laminated robotic actuator can include an adhesive layer disposed between the strain-limiting layer and the inflatable layer, wherein the adhesive layer is shaped to selectively adhere the inflatable layer to the strain-limiting layer to define the channel.

[0013] In any of the embodiments described herein, one of the strain-limiting layer and the inflatable layer is coated with an adhesive, and the laminated robotic actuator further includes a masking layer disposed between the strain-limiting layer and the inflatable layer, wherein the masking layer defines a shape of the un-adhered region between the strain-limiting layer and the inflatable layer.

[0014] In any of the embodiments described herein, the strain-limiting layer includes the adhesive coating.

[0015] In any of the embodiments described herein, the channel includes a plurality of interconnected chambers configured to provide a twisting motion of the flexible robotic actuator upon pressurization of the channel via the fluid inlet.

[0016] In any of the embodiments described herein, the channel includes a plurality of interconnected chambers configured to provide a bending motion of the flexible robotic actuator upon pressurization of the channel via the fluid inlet.

2013209422 03 Jul 2017

[0017] In any of the embodiments described herein, a stiffness of the strain-limiting layer is configured to determine a physical strength associated with the flexible robotic actuator upon pressurization of the channel via the fluid inlet.

[0018] In any of the embodiments described herein, the channel includes a plurality of interconnected chambers configured to provide two different motions of the flexible robotic actuator upon pressurization of the channel via the fluid inlet.

[0019] In any of the embodiments described herein, the actuator further includes a reinforcing structure for providing additional physical support to the flexible robotic actuator.

[0020] In any of the embodiments described herein, the channel includes a plurality of sub-channels that are independently coupled to the at least one fluid inlet, thereby enabling independent pressurization of the sub-channels.

[0021] In any of the embodiments described herein, the channel includes a plurality of interconnected chambers arranged along a curved central flow conduit.

[0022] According to a second aspect of the present invention, there is provided a twisting actuator comprising a laminated robotic actuator as described above, wherein the pressurizable channel comprises a central flow conduit and a plurality of slanted branches, and the slanted branches are at an acute angle with respect to a central axis of the actuator to determine a twisting motion of the actuator.

[0023] In any of the embodiments described herein, the central axis of the twisting actuator is aligned with the central flow conduit.

[0024] According to a third aspect of the present invention, there is provided a lifting robot comprising a laminated robotic actuator as described above, wherein the pressurizable channel includes radial channels arranged in a concentric manner about a central point of the laminated robotic actuator, and connecting channels perpendicular to the radial channels, wherein the radial channels are configured to deflect away from a surface of the strain-limiting layer upon pressurization.

[0025] According to a fourth aspect of the present invention, there is provided a robot

2013209422 03 Jul 2017

comprising a plurality of actuatable arms in accordance with any of the embodiments described herein, wherein each of the plurality of actuatable arms includes a laminated robotic actuator as described above.

[0026] In any of the embodiments described herein, the robot includes 2, 3, 4, 5, 6, 7, 8 or more actuatable arms.

[0027] In any of the embodiments described herein, one or more of the plurality of actuatable arms is configured to be actuated independently.

[0028] According to a fifth aspect of the present invention, there is provided a gripping device comprising a plurality of actuatable arms, wherein each of the plurality of actuatable arms includes a laminated robotic actuator as described above, wherein the plurality of actuatable arms are configured to bend from a first resting position to a second actuated position upon pressurization.

[0029] In any of the embodiments described herein, the gripping device includes 2, 3, 4, 5, 6, 7, 8 or more actuatable arms.

[0030] In any of the embodiments described herein, one or more of the plurality of actuatable arms is configured to be actuated independently.

[0031] According to a sixth aspect of the present invention, there is provided a method for providing a flexible robotic actuator, comprising providing a strain-limiting layer having a substantially two-dimensional layer of a first flexible material, wherein the strain-limiting layer is non-extensible; providing a sealing layer having a substantially two-dimensional layer of a second flexible material, wherein the sealing layer is non-extensible, and the strain-limiting layer is stiffer compared to the sealing layer; determining a shape of a region at which the sealing layer is to be adhered to the strain-limiting layer; and adhering the sealing layer to the strain-limiting layer based on the shape of the region, thereby forming a channel for fluid communication having the shape that, upon receiving pressurized fluid, causes the actuator to bend towards the sealing layer.

[0032] In any of the embodiments described herein, the method for providing a flexible robotic actuator can also include providing an adhesive layer between the strain-limiting layer and the inflatable layer, wherein the adhesive layer is shaped to selectively adhere the inflatable layer

2013209422 03 Jul 2017

to the strain-limiting layer to define the channel.

[0033] In any of the embodiments described herein, the method for providing a flexible robotic actuator can also include providing a masking layer disposed between the strain-limiting layer and the inflatable layer, wherein the masking layer defines a shape of the un-adhered region between the strain-limiting layer and the inflatable layer.

[0034] According to a seventh aspect of the present invention, there is provided a method of actuating a laminated soft robotic comprising providing a laminated soft robotic actuator as described above; and initiating a series of pressurizations and depressurizations that actuate the laminated soft robotic to provide a predetermined motion.

[0035] In any of the embodiments described herein, the series of pressurization and depressurizations provide a sequence of two or more predetermined motions.

[0036] The disclosed subject matter includes a method of gripping. The method of gripping can include providing a gripping device in accordance with any of the embodiments described herein, and initiating a series of pressurizations and depressurizations that bring the arms in gripping contact with a target object.

[0037] In any of the embodiments described herein, the method of gripping can also include initiating a series pressurizations and depressurizations to perform a walking motion.

[0038] In any of the embodiments described herein, the pressure of the fluid applied to the channel via the fluid inlet is selected to provide a predetermined range of a motion.

[0039] The present invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings briefly described as follows.

[0040] FIGs. 1A-1B illustrate the principle of pneumatic actuation of a flexible robotic actuator in accordance with some embodiments.

[0041] FIGs. 2A-2B illustrates a force diagram and a bending motion of a soft robot having a non-extensible inflatable layer in accordance with some embodiments.

[0042] FIGs. 3A-3F illustrate methods for fabricating flexible robotic actuators in accordance

2013209422 03 Jul 2017

with some embodiments.

[0043] FIGs. 4A-4E illustrate a flexible, curling actuator in accordance with some embodiments.

[0044] FIGs. 5A-5B illustrate a twisting thin soft robot and its movement in accordance with some embodiments.

[0045] FIGs. 6A-6B illustrate a radially curling thin soft robot and its movement in accordance with some embodiments.

[0046] FIGs. 7A-7B illustrate a lifting thin robot that is configured to lift an object on the robot in accordance with some embodiments.

[0047] FIGs. 8A-8B show a thin actuator with augmented support structures in accordance with some embodiments.

[0048] FIG. 9 illustrates a flexible, undulating actuator capable of an undulating motion in accordance with some embodiments.

[0049] FIGs. 10A-10E illustrate a robot having a plurality of thin actuators in accordance with some embodiments.

[0050] FIGs. 11A-11D illustrates a flexible gripper device having three curling actuators in accordance with some embodiments.

[0051] FIG. 12 shows a physical support robot in accordance with some embodiments.

[0052] FIG. 13 illustrates an expanding robot that provides an expanding movement in accordance with some embodiments.

[0053] FIG. 14 illustrates a robot having one or more actuators configured to perform a predetermined task in accordance with some embodiments.

[0054] FIGs. 15A-15B illustrate an actuator with a plurality of channels in accordance with some embodiments.

2013209422 03 Jul 2017

[0055] FIGs. 16A-C and 17A-D illustrate a glider with a plurality of thin actuators in accordance with some embodiments.

[0056] FIGs. 18A-18D illustrates a paper-based rotor with two flexible actuators in accordance with some embodiments.

[0057] Organisms, such as Echinoderms (starfish, sea urchins) and Cnidarians (jellyfish) are ancient and incredibly successful, relatively simple organisms capable of movement unheard of in even the most advanced hard-robotic systems. One major reason for the gap between nature and the state of the art robotic systems is the severe limitation in material selection available for robotics. To bridge this gap between nature and the state of the art robotic systems, robotic systems have exploited different materials. For example, a soft robotic system can use soft materials, such as soft elastomer, to build its structures, as disclosed in the PCT Patent Application No. PCT/US11/61720, titled "Soft robotic actuators" by Shepherd et al., filed on November 21, 2011, which is hereby incorporated by reference in its entirety.

[0058] The present disclosure provides a different approach to bridging the gap between nature and the state of the art robotic systems. In particular, disclosed systems and methods

provide laminated robotic actuators. Some embodiments of the flexible robotic actuators include a stack of substantially two-dimensional (thin film or sheet) materials that are arranged to form an internal set of pressurizable pathways, which can be configured to provide three-dimensional motions. The thin actuators can be fabricated quickly using cheap materials and cheap processes. The actuators only require two non-extensible layers having a differing stiffness and (optionally) an adhesive layer that secures the two layers together. The strength and the flexibility of the actuator can be easily controlled by varying the materials used for the two layers having a different stiffness. Furthermore, the arrangement and shape of the pressurizable pathways can be prepared in multiple ways, thereby enabling different motions and applications.

[0059] These thin, flexible actuators can provide distinct advantages compared to other robotic actuators. For example, thin actuators can be easy to store and transport, and can be configured to maneuver adeptly on flat surfaces. Furthermore, thin actuators can be lightweight and can enable developments of advanced aerodynamic structures and synthetic marine organisms. In addition, thin actuators can be configured to operate in narrow spaces unlike other robotic systems, thereby providing robotic support in “search and rescue missions”. The thin actuators can be particularly useful in dealing with crevasses, objects in a packed setting, or thin objects, obstacles, or cracks in general. For example, it would be challenging for regular soft robotic actuators to grab one of the eggs in a basket because the space between the eggs is limited and the actuator would not “fit” into the limited space. In contrast, it would be easy for thin actuators to grab one of the eggs in a basket since the thin actuator can fit into the limited space.

[0060] The thin, flexible actuators can be useful in a variety of applications. In particular, the thin, flexible actuators can be useful in biomedical applications. The thin, flexible actuators can be used as a surgical tool for delicately manipulating and operating on organs. For example, the flexible actuators can be inserted into narrow incisions and are able to delicately separate organs for a better line of sight. Because existing surgical tools are rigid and hard, if mishandled during operation, the existing tools can cut organs or cause unnecessary medical complications. In contrast, since the thin actuators can be soft and flexible, thin actuator based surgical tools are less likely to cause medical complications.

[0061] **FIG. 1** illustrates a structure of a laminated robotic actuator and its principle of actuation in accordance with some embodiments. The flexible robotic actuator 100 can include a plurality of layers stacked on top of each other. Each layer can be substantially two-dimensional and is in the form of a sheet, layer or thin film. A substantially two-dimensional layer can be characterized as a material having a width, height, and thickness, where the thickness of the material is substantially smaller than the material's width and height. In some cases, the ratio between the smaller of the width and height of the layer and the thickness of the layer can be defined as a form factor. In some embodiments, the form factor of the substantially two-dimensional layer is at least 5. In other embodiments, the form factor of the substantially two-dimensional layer is at least 10. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 20. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 50. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 100. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 200. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 500. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 1000. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 2000. In yet another embodiment, the form factor of the substantially two-dimensional layer is at least 5000.

[0062] The flexible robotic actuator can include a strain-limiting layer **102** and an inflatable layer **104**. The strain-limiting layer can limit various types of strains, including a strain resulting from bending, expanding, and/or twisting. Bending, expanding, and twisting strains can apply uniform or anisotropic tensile stress to the strain-limiting layer, and the strain-limiting layer can resist this tensile stress until its yield strength is reached. In some embodiments, the materials for the strain-limiting layer **102** and the inflatable layer **104** can be selected to satisfy certain mechanical characteristics, such as the physical strength of the actuator upon actuation.

[0063] The strain-limiting layer **102**, due in part to its thin, 2-dimensional form factor, is made of a flexible material, e.g., is capable of bending without damage to the layer, but is it relatively stiff, e.g., it is resistant to stretching or expansion. In some cases, the stiffness of the strain-limiting layer can determine the physical strength associated with the flexible robotic actuator upon actuation.

[0064] The strain-limiting layer is made of a stiffer material compared to that of the inflatable layer **104**. For example, the strain-limiting layer **102** can include a packaging tape, and a Gorilla Tape®. The strain-limiting layer **102** can include an extensive range stiff, inextensible materials, including a stiff polymer, such as polyethylene terephthalate (PET), a synthetic fiber, a duct tape, Kevlar®, and a fabric such as paper, cotton, and nylon. Suitable thickness is selected based on the desired material properties of the material. For example, a thicker sheet will be stiffer and provide higher bending resistance, requiring a greater actuation force, but greater robot strength. Exemplary thicknesses can range from tens of micro-meters to a few milli-meters. Such materials are readily available in sheet and thin film format and can be incorporated into the assembly process without any additional resizing or reprocessing. For example, packaging tapes are commercially available in thicknesses ranging from 1 mil (ca. 25 μm to 4 mil (ca. 100 μm) in thickness; PET films are commercially sold in thicknesses ranging from 10 μm to 1-2 mm.

[0065] The inflatable layer **104** is fabricated using a flexible material having a stiffness that is less than that of the strain-limiting layer **102**. Therefore, the inflatable layer **104** bends or deforms more readily compared to the strain-limiting layer **102**. In some cases, the stiffness of a structure can depend on its material and its shape. Thus, the stiffness of the inflatable layer **104** can be controlled by selecting an adequate material and an adequate shape. In some embodiments, the material for the inflatable layer **104** preferably possesses a sufficiently high Young's modulus that it does not expand significantly under the pressurizing conditions of actuation. Thus, the material for the inflatable layer **104** bends more readily than the strain-limiting material **102**, but does not stretch or expand (as a balloon) under the actuation pressures. In some cases, the actuation pressure can be controlled so that the inflatable layer **104** does not expand or stretch. For example, the actuation pressure applied to the actuator can be between 2 psi and 10 psi. The range of pressure that can be applied to the actuator while preventing the expansion or stretching of the inflatable layer **104** can depend on the Young's modulus of the material used for the inflatable layer **104** and the adhesion strength of the adhesive between the inflatable layer **104** and the strain limiting layer **102**. In some embodiments, the inflatable layer **104** can be formed using the same material as the strain-limiting layer **102**. In such embodiments, the inflatable layer **104** can be thinner than the strain-limiting layer **102** to exhibit less stiffness compared to the strain-limiting layer **102**.

[0066] Exemplary thicknesses of the inflatable layer **104** can range between tens of micro-meters to hundreds of micro-meters. Exemplary materials include an extensive range of less stiff materials, including a less-stiff polymers, such as a nitrile, a latex rubber, vinylidene chloride, and a low-density polyethylene. The polymers made from vinylidene chloride can include polyvinylidene chloride (PVDC), and Saran® PVDC film and Kevlar® polymer (poly-paraphenylene terephthalamide). Such materials are readily available in sheet and thin film format and can be incorporated into the assembly process without any additional resizing or reprocessing. For example, PDVC film is commercially available in thicknesses ranging from 1 mil (ca. 25 μm to 4 mil (ca. 100 μm) in thickness; PCV films are commercially sold in thicknesses ranging from 10 μm to 1-2 mm. In some embodiments, the inflatable layer **104** can be formed using the same material as the strain-limiting layer **102**. In such embodiments, the inflatable layer **104** can be thinner than the strain-limiting layer **102** to exhibit less stiffness compared to the strain-limiting layer **102**.

[0067] Portions of the strain-limiting layer **102** and the inflatable layer **104** can be selectively adhered to each other to form a single laminate structure having a plurality of layers, as illustrated in **FIG. 1A**. By “selectively adhered,” it is meant that not all surfaces between the two layers are glued together. Regions remain unglued and non-adhering to the facing surface. The unadhered interface between the strain-limiting layer **102** and the inflatable layer **104** form a channel **106**. As discussed in greater detail herein, the unglued, non-adhering regions are selected to define interconnecting chambers or channels that can be pressurized using a pressurizing source. Several ways of adhering the two layers can be used, as is discussed in greater detail below. The channel **106** can be substantially hollow and can be substantially contained or surrounded (i.e., compartmentalized) by the adhered interface between the strain-limiting layer **102** and the inflatable layer **104**. Also, the channel **106** can be coupled to a fluid inlet and can be amenable to fluid communication. For example, the channel **106** can be in fluid communication with a pressure source via the fluid inlet, thereby receiving fluid from the pressure source. The pressure source can provide air, or, more generally, any types of fluid (e.g., water, oil).

[0068] A resting state is characterized as a state in which the pressure inside the channel (“ P_1 ”) is substantially identical to the pressure outside the chamber **106**, such as the atmospheric pressure (“ P_{atm} ”). At a resting state, the channel **106** maintains its shape, as illustrated in **FIG. 1A** in accordance with some embodiments.

[0069] A pressurized state is characterized as a state in which the pressure inside the channel is greater than the pressure outside the chamber **106**. At a pressurized state, the channel **106** can deform, as illustrated in **FIG. 1B** in accordance with some embodiments. The deformation of the channel **106** can depend on the stiffness of the two layers. Because the inflatable layer **104** is less stiff compared to the strain-limiting layer **102**, the pressurized channel **106** would trigger the inflatable layer **104** to deform before the strain-limiting layer **102**, thereby providing a bending motion.

[0070] The direction of the bending motion depends, in part, on the expansion property of the inflatable layer **104**. For example, if the inflatable layer **104** is formed using an expansible material, then the inflatable layer **104** can be deformed and expanded, so that the surface area of the elastomer increases. Upon pressurization, the flexible robotic actuator **100** expands, increases its volume, and bends towards the strain-limiting layer **102**, as disclosed in the PCT Patent Application No. PCT/US11/61720, titled "Soft robotic actuators" by Shepherd et al., filed on November 21, 2011,. In other words, the pressurization of the flexible robotic actuator **100** causes the actuator **100** to deflect towards the side of the strain-limiting layer **102**.

[0071] In contrast, where the inflatable layer **104** is formed using a flexible, e.g., bendable, non-expansible material, the inflatable layer **104** can be deformed, e.g., bended, but cannot be expanded. Upon pressurization, the tension around the perimeter of the channel **106** on the inflatable layer **104** pulls the strain-limiting layer **102** at an angle substantially normal to the strain-limiting layer **102**, which causes a bending motion towards the inflatable layer **104**. When pressurized, the "contact angle" between the inflated portion of the inflatable layer **104** and the strain-limiting layer **102**, shown as θ in **FIG. 1B**, is typically less than 90° , which indicates that the inflatable layer **104** places a tension on the strain-limiting layer **102** at the contact point, causing the bending motion. In other words, the pressurization of the flexible robotic actuator **100** having a non-extensible inflatable layer would cause the actuator **100** to deflect to the side of the inflatable layer **104**.

[0072] **FIGs. 2A-2B** provides a schematic illustration of the forces in play during pressurization of the laminated soft robotic actuator, demonstrating the bending motion of a soft robot having a non-extensible inflatable layer in accordance with some embodiments. **FIG. 2A** shows a cross-section of a pneumatic channel sealed by a strain-limiting layer **102** on one side and an inflatable layer **104** on the other. When the pneumatic channel is pressurized,

the pressure would exert a force on the strain-limiting layer **102** and the inflatable layer **104**. The forces are shown by vectors **202** and **204**. The pressure induces the pneumatic channel to maximize volume while minimizing the surface area. Therefore, the pressure causes the non-extensible inflatable layer **104** to deflect outward and away from the strain-limiting layer **102**. However, this pressure may not be enough to deflect the strain-limiting layer **102** outward and away from the inflatable layer **104** since the strain-limiting layer **102** is stiffer compared to the non-extensible inflatable layer **104**. Therefore, the net force on the strain-limiting layer **102** would be a downward force, as shown by the large vector **206**. This downward force on the strain-limiting layer **202**, along with the effective shortening of the inflatable layer **104** through outward deflection, causes a bending motion in the direction towards the inflatable layer **104**, as illustrated in **FIG. 2B**.

[0073] In some embodiments, operating the flexible robotic actuator using a high-pressure source is desirable because the force provided by the flexible actuator can be higher when actuated with a high-power pressure source. The maximum pressure that can be handled by the channel **106** depends on the properties of the strain-limiting layer **102** and the inflatable layer **104** and also on the strength of the attachment between the two layers. Therefore, it is sometimes desirable to secure a strong attachment between the two layers.

[0074] **FIG. 3** illustrates two methods for fabricating a flexible robotic actuator in accordance with some embodiments. The first method imposes a thin layer having an adhesive coating on both sides **302** between the strain-limiting layer **102** and the inflatable layer **104**, as illustrated in **FIG. 3A**. At a high level, the first method fabricates a flexible robotic actuator by adhering strain-limiting layer **102** and inflatable layer **104** to either side of adhesive layer **302**. In some embodiments, adhesive layer **302** can be a double-sided tape such as is commercially available. Suitable double sided adhesive layers are available from a variety of sources, such as Scotch brand and 3M adhesive tapes. The adhesive layer **302** can be shaped, e.g., by cutting, punching, embossing, etc., to the desired shape of the channel **106**. For example in **FIG. 3A**, a central portion **304** is removed from rectangular adhesive layer **302** to form a void space corresponding to channel **106**. When the adhesive layer adheres the strain-limiting layer **102** to the inflatable layer **104**, it does so at every facing position except for the central cutout portion **304**. Therefore, the strain-limiting layer **102** at the central cutout portion **304** is not attached to the inflatable layer **104**, and this un-attached interface between the strain-limiting layer **102** and the inflatable layer **104** forms a channel **106**.

[0075] FIG. 3B shows the top-down view 306 and the front-view 308 of the actuator assembled in accordance with the first method. The adhesive layer 302 is disposed between the strain-limiting layer 102 and the inflatable layer 104, and the central cutout portion 304 forms the channel 106. FIG. 3C is a photograph of an actuator 310 fabricated in accordance with the first method.

[0076] The second method for fabricating a flexible robotic actuator uses a strain-limiting layer 102, an inflatable layer 104, and a masking layer 312, as illustrated in FIG. 3D. In some embodiments, this method uses a strain-limiting layer 102 with a surface that has thereon an adhesive. The adhesive on the strain-limiting layer 102 can be uniformly distributed across the surface of the strain-limiting layer 102 or can be selectively distributed (i.e., patterned) across the surface of the strain-limiting layer 102. The adhesive can similarly be applied to the inflatable layer in addition to or in place of the strain-limiting layer.

[0077] At a high level, the second method fabricates a flexible robotic actuator by adhering the strain-limiting layer 102 to the inflatable layer 104 using the adhesive on the top surface of the strain-limiting layer 102. To form a channel 106, some portions of the strain-limiting layer 102 can be selectively prevented from adhering to the inflatable layer 104 using a masking layer 312 (e.g., a patterned spacer). The masking layer 312 can prevent the physical contact of the two layers, and this un-attached interface between the strain-limiting layer 102 and the inflatable layer 104 forms a channel 106. In some embodiments, the adhesive can be present on the bottom surface of the inflatable layer 104 instead of the top surface of the strain-limiting layer 102; in other embodiments, the adhesive can be present on both the top surface of the strain-limiting layer 102 and the bottom surface of the inflatable layer 104. In some cases, the adhesive can include a double-sided tape or glue. In some embodiments, the strain-limiting layer 102 can include a single-sided tape that already has adhesive applied to it. In other embodiments, the inflatable layer 104 can include a single-sided tape that already has adhesive applied to it. The tape can include a duct tape, a box sealing tape, an electrical tape, a filament tape, a hockey tape, a medical tape, a slug tape, or a surgical tape.

[0078] FIG. 3E shows the top-down view 314 and the front-view 316 of the actuator assembled in accordance with the second method. The masking layer 312 is disposed between the strain-limiting layer 102 and the inflatable layer 104, forming the channel 106. FIG. 3F is a photograph of an actuator 318 fabricated in accordance with the second method.

[0079] The two methods illustrated in **FIG. 3** are amenable to both easy prototyping and easy manufacturing. For example, for easy prototyping, different layers of the flexible actuator can be cut (i.e., shaped) using laser cutting techniques; for easy manufacturing, different layers of the flexible actuator can be cut using die cutting techniques that are already prevalent in industrial settings. Photolithographic techniques or other expensive and time-consuming processes are not needed.

[0080] The flexible robotic actuator can be designed to provide certain, sometimes complex, three-dimensional motions. For example, depending upon the number and arrangement of the pressurized channels and materials selected for the strain-limiting and elastomeric sheet, the laminated robotic actuator can perform bending, twisting, grabbing, and curling motions. Robotic actuators can be designed that incorporate one or more of these motions.

[0081] **FIG. 4** illustrates a flexible, bending actuator in accordance with some embodiments. **FIG. 4A** shows the structure of the curling actuator **402**. The curling actuator **402** includes a strain-limiting layer, an adhesive layer, and an inflatable layer. The strain-limiting layer is a polyester thin-film (i.e., PET) 50 micro-meters in thickness; the inflatable layer is a latex rubber sheet 150 micro-meters in thickness; and the adhesive layer is a double sided tape with a thickness of about 50 micro-meters. The adhesive layer is patterned (or cutout) so that when the tape adheres the strain-limiting layer to the inflatable layer, the interface between the two layers forms a plurality of interconnected channels **406**. The plurality of interconnected channels **406** are configured to receive a pressurizing fluid via the fluid inlet **404**. The fluid inlet **404** can be in fluid communication with a pressure source (not shown in the figure).

[0082] **FIG. 4B** shows the curling actuator **402** in its resting state, hanging from a clip. In its resting state, the curling actuator **402** is static and conforms to the gravity. In contrast, **FIG. 4C** illustrates the same curling actuator **402** in its pressurized state, pressurized with about 3ml of pressurized air. In its pressurized state, the curling actuator **402** bends around the inflatable layer, working against gravity. The pressure applied to the curling actuator **402** can be controlled so that the inflatable layer **104** for the curling actuator **402** does not expand upon pressurization.

[0083] **FIG. 4D** illustrate a curling actuator **402** lying horizontally at its resting state, and **FIG. 4E** illustrate the same curling actuator **402** lying horizontally at its pressurized state, pressurized with about 3ml of pressurized air. At its pressurized state, the curling actuator **402** curls around the inflatable layer, working against the gravity.

[0084] In some embodiments, a twisting motion of a thin actuator can be encoded into the shape of the channel. **FIGs. 5A-5B** illustrate a twisting laminated soft robot and its movement in accordance with some embodiments. **FIG. 5A** shows a channel embedded in a twisting thin soft robot **502**. As illustrated in **FIG. 5A**, the twisting thin soft robot **502** can include a channel shaped as a tree, having a central flow conduit **504** with slanted branches **506**. The angle of the slanted branches **506** with respect to a central axis of the robot can determine the motion of the thin soft robot as it receives pressurized air via a gas inlet **508**. For the thin robot **502**, the central axis is aligned with the a central flow conduit **504** of the channel. When the branches **506** are disposed at equi-angles, e.g., at a right angle with the central axis, then as the actuator receives pressurized air, the laminated actuator curls at right angles with the central flow conduit **504** of the channel, as illustrated in **FIG. 4C**. However, if the slanted branches **506** are at less than a right angle with the central axis, (e.g., the smaller of the angles **510a** and **510b** between the slanted branches **506** and the central axis is an acute angle), then as the actuator receives pressurized air, the thin actuator would twist, as illustrated in **FIG. 5B**, because the actuator curls at an acute angle with respect to the central axis.

[0085] As the angle between the central axis and the slanted branches **506** becomes smaller, e.g., more acute, the thin actuator twists at a sharper angle (the actuator twists faster as a function of input pressure.) For example, if the input pressure is 2 psi, an actuator having slanted branches **506** at 60 degrees with the central axis would twist more compared to an actuator having slanted branches **506** at 80 degrees with the central axis pressurized to 2 psi.

[0086] In some embodiments, the orientation in which the thin actuator curls depends on which of the two angles **510a** and **510b** is smaller. For example, if the angle **510a** is smaller than the angle **510b**, then the actuator **502** would twist in a counter-clockwise direction, as illustrated in **FIG. 5B**. However, if the angle **510a** is larger than the angle **510b**, then the actuator **502** would twist in a clockwise direction.

[0087] In some embodiments, a single channel can encode different types of motions. For example, a top portion of a channel can include slanted branches at a right angle with respect to

the central axis, which would induce a curling motion at right angles to the central axis. However, a lower portion of the channel can include slanted branches at 45 degrees with the central axis, which would induce a twisting motion. Therefore, different parts of the actuator can be encoded with different motions using different channel structures.

[0088] In some embodiments, a channel can be arranged in a radial manner to encode a radial curling motion in thin soft robots. **FIGs. 6A-6B** illustrate a radially curling thin soft robot and its movement in accordance with some embodiments. **FIG. 6A** shows a channel embedded in a radially curling thin soft robot **602**. As illustrated in **FIG. 6A**, the twisting thin soft robot **602** can include a channel shaped as a tree arranged in a radial manner, having a curved central axis **604** with pie shaped branches **606**, e.g., the channels or “branches” are larger on the outside of the curved line defined by the curved central axis and taper to a smaller size on the inside of the curved line defined by the curved central axis. The arrangements of the pie shaped branches **606** with respect to the shape of the robot **602** determines the motion of the thin soft robot **602** as it receives pressurized air via a gas inlet **608**, as illustrated in **FIG. 6B**.

[0089] **FIGs. 7A-7B** illustrate a lifting thin robot that is configured to lift the center portion of the actuator in accordance with some embodiments. The ability to elevate the center portion of the flat soft robotic allows object placed on the robotic to be raised or elevated. **FIG. 7A** shows a channel structure associated with the lifting thin robot. The lifting thin robot **702** can include radial channels **704** arranged in a concentric manner about a central point, and connecting channels **706** perpendicular to the radial channels **704**. Upon pressurization, the radial channels **704** deflect away from the surface of the strain-limiting layer. When the soft robotic is positioned so that the strain-limiting layer faces upward, actuation causes the elastic layer to deflect downward into the plane of the underlying supporting surface, thereby elevating the central section **708**. Cross channels **706** can provide mechanical support for the soft robot during actuation. **FIG. 7B** shows a lifting motion of the lifting thin robot **702** as the pressure level increases. In this example, the mass of the cup is 12.1 grams.

[0090] In some embodiments, a thin soft robot can be reinforced to strengthen the limbs of the laminated actuator and to provide additional physical support. **FIGs. 8A-8B** show a thin actuator strengthened with reinforcing beams in accordance with some embodiments. As shown in **FIG. 8A**, the thin actuator **802** includes a pneumatic channel **804** for providing

actuation and one or more reinforcing structures **806**. Upon pressurization, the pneumatic channels **804** induce bending motion, as discussed in **FIG. 4C**. The reinforcing structures **806** provide an additional strength to the actuator **802**. The reinforcing structures **806** can be particularly useful when the inflatable layer and the strain-limiting layer do not have sufficient mechanical strength to support the entire structure, or when the pneumatic channels **804** do not encompass the entire thin actuator **802** and the actuation force is then transferred along the length of the actuator. The support structure can include arches, beams, or columns formed using stiff materials, including wood, metals, plastic or a tape. **FIG. 8B** shows the movement of the thin robot **802** upon pressurization. The thin robot **802** may only curl in regions with the pneumatic channels **804**; the rest of the thin robot **802** made rigid by the reinforcing structures **806**. As reinforced, the ‘legs’ of the actuator are able to support the mass of the thin robot **802**.

[0091] Flexible robotic actuators can be designed to be capable of complex motions. **FIG. 9** illustrates a flexible, locomoting actuator capable of an undulating motion that allows the device to move across a surface in accordance with some embodiments. The locomoting actuator **902** can include a curling actuator, substantially as illustrated in **FIG. 4C**. The strain-limiting layer of the curling actuator can include a duct tape and/or a strip of transparency tape, and the inflatable layer of the curling actuator can include a latex rubber and/or paper. The adhesive layer can be shaped to provide a plurality of interconnected channels, as in the curling actuator **402** of **FIG. 4A**. The bottom surface of the undulating actuator **902** further includes walking pads **904, 906**. The walking pads **904, 906** were cutout from a brush for removing lint. The walking pads **904, 906** include asymmetrically aligned bristles that are aligned to lie flat against the pad surface when moved in one direction so that movement occurs freely and to engage the underlying surface and resist movement when moved in the opposite direction. The actuator is periodically pressurized, initiating the bending motion. However, because of the walking pads, walking pad **906** remains anchored on the surface and walking pad **904** curls up to it. As pressure is released and the actuator unbends, walking pad **904** now remains anchored to the underlying surface and walking pad **906** slides forward to unbend the actuator. By cyclically actuating and releasing the device, the actuator moves in a predetermined direction (i.e., left to right).

[0092] In some embodiments, a robot can perform complex motions when its thin actuators are provided with appropriate instructions. For example, one or more of its thin actuators can be actuated independently to provide desired complex motions. **FIGs. 10A-10E** illustrate a

robot having a plurality of thin actuators in accordance with some embodiments. The robot has three bending actuators stacked over each other. Each curling actuator in the robot has a strain-limiting layer, an inflatable layer, and an adhesive layer. The strain-limiting layer can include a duct tape, and the inflatable layer can include a latex rubber and/or paper. The adhesive layer can be shaped to provide a plurality of interconnected channels **406**, as in the curling actuator **402** of **FIG. 4A**.

[0093] Each of the bending actuators in the robot can receive different motion instructions. For example, each of the bending actuators can be independently pressured at different pressures at different times to be controlled independently. For instance, in **FIG. 10A**, all the bending actuators are in their resting state. In **FIG. 10B**, the top bending actuator is pressurized, providing a curling motion; in **FIG. 10C**, both the top bending actuator and the middle bending actuator are pressurized, thereby providing a curling motion to both the top bending actuator and the middle bending actuator; in **FIG. 10D**, all the bending actuators are pressurized, providing a curling motion to all the actuators; and in **FIG. 10E**, all the bending actuators are depressurized, so all the bending actuators return to their resting states.

[0094] A plurality of thin robot actuators can be assembled into a single robot to provide a robot capable of complex motions. **FIGs. 11A-11D** illustrate a flexible gripper device having three bending actuators in accordance with some embodiments. The gripper of **FIG. 11** has three bending actuators, each bending actuator having a strain-limiting layer, an inflatable layer, and an adhesive layer. The bending actuators in the gripper can be designed to satisfy certain mechanical characteristics, such as the strength of the grip upon actuation. The strain-limiting layer can include a duct tape and/or a strip of transparency, and the inflatable layer can include a latex rubber and/or paper. The adhesive layer can be shaped to provide a plurality of interconnected channels **406**, as in the curling actuator **402** of **FIG. 4A**.

[0095] **FIG. 11A** shows the gripper suspended by at least one silicone tubing in fluid communication with one or more bending actuators. The silicon tubing can be configured to provide fluid to one or more curling actuators in the gripper. In some embodiments, each silicon tubing can be coupled to one bending actuator, thereby providing independent control of the bending actuators in the gripper. In other embodiments, silicone tubings can be coupled to all bending actuators, thereby providing higher pressure to the curling actuators. **FIG. 11B** shows the underside of the gripper in accordance with some embodiments. The gripper can include a triangular piece of acrylic at the center. The triangular piece of acrylic can be

configured to provide fluid to all the bending actuators using a single fluid inlet coupled to the pressure source. **FIGs. 11C-11D** illustrate the operation of the gripper. In **FIG. 11C**, the gripper picks up a Styrofoam cup; in **FIG. 11D**, the gripper picks up a paper cup. In both of these cases, the grippers were pneumatically pressurized at approximately 34 kPa (5 psi).

[0096] In some embodiments, the gripper can be operated to perform a walking motion. For example, one or more of the actuators in the gripper can be actuated independently or in concert to mimic a walking motion. In some embodiments, the gripper can perform its walking motion to move to a location proximate to an object of interest, and subsequently use its actuators to grab the object of interest.

[0097] **FIG. 12** shows a soft robot capable of supporting itself in accordance with some embodiments. The self-supporting robot **1202** can include two or more thin actuators **1204** capable of providing a physical support. The self-supporting robot **1202** can support an object at a raised position when its thin actuators **504** receive pressurized air. The thin actuators **1204** can include a bending robot **402** and/or a partially bending robot **802**.

[0098] **FIG. 13** illustrates an expanding robot that provides an expanding movement in accordance with some embodiments. The expanding robot can include two or more thin actuators **1302** stacked on top of one another, but are arranged to physically repel one another upon actuation, as illustrated in **FIG. 13**. To ensure that the thin actuators **1302** stay as one piece even upon actuation, the thin actuators **1302** can be adhered to one another. In some embodiments, the thin actuators **1302** are adhered to one another using an adhesive tape **1304**. The thin actuators **1302** can include a bending robot **402** and/or a partially bending robot **802**. In some cases, the expanding robot **1302** can be useful for separating two objects for a desired period of time. For example, during a surgical operation, the expanding robot **1302** can separate two organs for a desired period of time to provide a line of sight for surgeons. In another example, the expanding robot **1302** can provide a jumping motion when it receives a pulse of pressurized air.

[0099] In some embodiments, a robot can include one or more of its actuators that are preconfigured to perform a predetermined task. **FIG. 14** illustrates a robot having one or more actuators configured to perform a predetermined task in accordance with some embodiments. This robot includes four actuators: pulling actuators **1402** are configured to pulling the robot vertically and grabbing actuators **1404** are configured to grabbing an object. The actuators

1402 and **1404** can be physically coupled to one another using, for example, a tape. Based on motion instructions, each of these actuators can be actuated independently or in concert with one another. In the top figure, the grabbing actuators **1404** are placed over a cup, and in the middle figure, the grabbing actuators **1404** grab the cup. Then in the bottom figure, the grabbing actuators **1404** are raised using the pulling actuators **1402**.

[0100] In some embodiments, a robot can include a plurality of channels, and one or more of the channels can be pressurized independently to actuate different parts of the robot. **FIGs. 15A-15B** illustrate an actuator with a plurality of channels in accordance with some embodiments. **FIG. 15A** shows the channel structure in the actuator. The actuator has four channels **1502**, **1504**, **1506**, and **1508**. The two channels **1502** and **1504** form the pneumatic channel for controlling the body of the actuator, and the remaining two channels **1506** and **1508** form the pneumatic channel for controlling the limbs of the actuator. **FIG. 15B** illustrates the motion of the actuator for a certain motion instruction. At a rest position, the actuator's limb is placed below a pen. Subsequently, the pneumatic channel in each limb **1506** and **1508** can be independently pressurized to grab the pen, and the body channels **1502** and **1504** can be pressurized to hold and lift the pen. The actuator weighs 13.5g and is about 0.35mm thick. This particular implementation of the actuator can lift objects up to 10g in weight. However, the strength of the actuator can be controlled by using different materials for the inflatable layer and the strain-limiting layer, and also by using highly pressurized gas to pressurize the pneumatic channels.

[0101] **FIGs. 16** and **17** illustrate another robot with a plurality of thin actuators in accordance with some embodiments. The illustrated robot is a glider having three parts: a body, a wing, and a nose. **FIGs. 16A-16C** illustrate the channel structure for the body, the wing, and the nose, respectively. The channels for the body are configured to roll the body part into a cylinder; the channels for the wing are configured to actuate the wing into an airfoil shape; and the channels for the nose is configured to form a cone that caps one end of the rolled body. **FIG. 17A** illustrates the body **1702**, the wing **1704**, and the nose **1706** for the glider. The wing **1704** is attached to the body **1702** by physically weaving a portion of the wing **1704** onto the body **1702**. **FIG. 17B-17D** illustrate the motion of the robot. In **FIG. 17B**, the body **1702** of the glider is rolled up to form a cylinder; in **FIG. 17C**, the wing **1704** is actuated to form an airfoil shape; and in **FIG. 17D**, the nose is actuated to form a cone that caps one of the rolled body. This implementation of the glider weighs about 22.6g and is about 0.35mm thick.

In some embodiments, the glider structure can be used as an ultra-light aircraft, a water strider, or any other robots that may advantageously leverage the light weight characteristics of the thin actuators.

[0102] The thin actuators can provide new mechanisms for controlling aerodynamic characteristics of an object. **FIG. 18** illustrates how flexible actuators provide control of an aerodynamic structure in accordance with some embodiments. **FIG. 18A** illustrates a rotor **1802** having a body and a plurality of flexible actuators **1804**, where the body and the flexible actuators **1804** are formed using papers. The rotor **1802** is designed so that when dropped, the rotor **1802** would spiral downward.

[0103] To understand the effect of flexible actuators **1804**, the rotor **1802** was dropped multiple times from a fixed position, with and without the actuators pressurized, and the aerodynamic properties of the rotor **1802** were characterized. The characterized aerodynamic properties include the drop time (i.e., the time it takes for a rotor to reach the ground when dropped from a fixed position) and the motion trajectory (i.e., the trajectory of a rotor when dropped from a fixed position.)

[0104] **FIG. 18B** shows the drop time of the rotor **1802**, with and without pressurized actuators **1804**. **FIG. 18B** illustrates that the rotor **1802** takes a longer time to reach the ground when its actuators **1804** are pressurized. This result illustrates that the actuators **1804** in the rotor **1802** can affect the drag (i.e., fluid resistance) of the rotor **1802**. The motion trajectory of a rotor **1802** is indirectly characterized by observing the location at which the rotor hits the ground when dropped from a fixed position. **FIG. 18C** shows the drop location of rotors **1802** when their actuators **1804** are pressurized, and **FIG. 18D** shows the drop location of rotors **1802** when their actuators **1804** are not pressurized. These figures illustrate that the drop locations of rotors with pressurized actuators are consistent, whereas the drop locations of rotors with unpressurized actuators are highly varying. This serves as an evidence that the pressurized actuators **1804** can provide a control of motion trajectory. Therefore, these experiments illustrate that flexible robotic actuators can provide advanced mechanisms for controlling the aerodynamic properties of an object.

[0105] The flexible robotic actuator can be used in a variety of other applications. For example, the curling actuator of **FIG. 4** can be used to provide a bending sheet. Also, the undulating actuator of **FIG. 9** can be extended to provide an undulating motion on a surface of

2013209422 03 Jul 2017

liquid such as water. Additionally, a flexible actuator can be used to form an acoustic medium of varying acoustic characteristics. For example, a portion of a wall can be formed using a flexible, pressurizable actuator. When the flexible actuator is at its resting state, the wall would exhibit certain sound transmission characteristics; when the flexible actuator is at its pressurized state, the wall would exhibit different sound transmission characteristics. By controlling the material properties and/or physical geometry of the flexible actuator, the wall's sound transmission characteristics can be controlled.

[0106] In some embodiments, the flexible robotic actuators can be powered using an off-board pressure source. The pressure source can include a compressed air source connected to the actuators through flexible tubing. The flexible tubing can include a silicon tubing. The flexible tubing can be meters long without loss of performance. In other embodiments, the flexible actuators can be powered by using an on-board pressure source. The on-board pressure source includes disposable compressed air cylinders or an on-board pump configured to provide fluid such as gas, fluid, or oil. The on-board pump can include an on-board mechanical air compressor, an on-board water electrolyzer, and an on-board chemical pump, as disclosed in the PCT Patent Application No. PCT/US11/61720, titled "Soft robotic actuators" by Shepherd et al., filed on November 21, 2011,.

[0107] In some embodiments, the pressure source coupled to the flexible robotic actuator can be controlled using software running on a computational device. The software needed for implementing the control process includes a high level procedural or an object-orientated language such as MATLAB®, C, C++, C#, Java, or Perl. The software may also be implemented in assembly language if desired. In some embodiments, the software is stored on a storage medium or device such as read-only memory (ROM), programmable-read-only memory (PROM), electrically erasable programmable-read-only memory (EEPROM), flash memory, or a magnetic disk that is readable by a general or special purpose-processing unit to perform the processes described in this document. The processors can include any microprocessor (single or multiple core), system on chip (SoC), microcontroller, digital signal processor (DSP), graphics processing unit (GPU), or any other integrated circuit capable of processing instructions such as an x86 microprocessor.

2013209422 03 Jul 2017

[0108] While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not by way of limitation. It will be apparent to a person skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus, the present invention should not be limited by any of the above described exemplary embodiments.

[0109] Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

[0110] The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

2013209422 03 Jul 2017

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A laminated robotic actuator comprising:
a strain-limiting layer comprising a flexible, non-extensible material in a form of a sheet or thin film;
a sealing layer comprising a flexible, non-extensible material in a form of a thin film or sheet in a facing relationship with the strain-limiting layer, wherein a stiffness of the strain-limiting layer is greater than a stiffness of the sealing layer, wherein the sealing layer is selectively adhered to the strain-limiting layer, and wherein a portion of an un-adhered region between the strain-limiting layer and the sealing layer defines a pressurizable channel; and
at least one fluid inlet, in fluid communication with the pressurizable channel, configured to receive pressurized fluid to cause the actuator to bend toward the sealing layer.
2. The laminated robotic actuator of claim 1, further comprising an adhesive layer disposed between the strain-limiting layer and the sealing layer, wherein the adhesive layer is shaped to selectively adhere the sealing layer to the strain-limiting layer to define the channel.
3. The laminated robotic actuator of claim 1, wherein one of the strain-limiting layer and the sealing layer is coated with an adhesive, and further comprising a masking layer disposed between the strain-limiting layer and the sealing layer, wherein the masking layer defines a shape of the un-adhered region between the strain-limiting layer and the sealing layer.
4. The laminated robotic actuator of claim 3, wherein the strain-limiting layer comprises the adhesive coating.
5. The laminated robotic actuator of claim 1, wherein the channel comprises a plurality of interconnected chambers configured to provide a twisting motion of the laminated robotic actuator upon pressurization of the channel via the fluid inlet.
6. The laminated robotic actuator of claim 1, wherein the channel comprises a plurality of interconnected chambers configured to provide a bending motion of the laminated robotic actuator upon pressurization of the channel via the fluid inlet.

2013209422 03 Jul 2017

7. The laminated robotic actuator of claim 1, wherein a stiffness of the strain-limiting layer is configured to determine a physical strength associated with the laminated robotic actuator upon pressurization of the channel via the fluid inlet.
8. The laminated robotic actuator of claim 1, wherein the channel comprises a plurality of interconnected chambers configured to provide two different motions of the laminated robotic actuator upon pressurization of the channel via the fluid inlet.
9. The laminated robotic actuator of claim 1, further comprising a reinforcing structure for providing additional physical support to the laminated robotic actuator.
10. The laminated robotic actuator of claim 1, further wherein the channel comprises a plurality of sub-channels that are independently coupled to the at least one fluid inlet, thereby enabling independent pressurization of the sub-channels.
11. The laminated robotic actuator of claim 1, wherein the channel comprises a plurality of interconnected chambers arranged along a curved central flow conduit.
12. A twisting actuator comprising a laminated robotic actuator of any of claims 1-10, wherein the pressurizable channel comprises a central flow conduit and a plurality of slanted branches, and the slanted branches are at an acute angle with respect to a central axis of the actuator to determine a twisting motion of the actuator.
13. The twisting actuator of claim 12, wherein the central axis is aligned with the central flow conduit.
14. A lifting robot comprising a laminated robotic actuator of any of claims 1-10, wherein the pressurizable channel comprises radial channels arranged in a concentric manner about a central point of the laminated robotic actuator, and connecting channels perpendicular to the radial channels, wherein the radial channels are configured to deflect away from a surface of the strain-limiting layer upon pressurization.
15. A robot comprising a plurality of actuatable arms, wherein each of the plurality of actuatable arms includes a laminated robotic actuator of any of claims 1-14.

2013209422 03 Jul 2017

16. The robot of claim 15, wherein the robot comprises 2, 3, 4, 5, 6, 7, 8 or more actuatable arms.
17. The robot of claim 15, wherein one or more of the plurality of actuatable arms is configured to be actuated independently.
18. A gripping device comprising a plurality of actuatable arms, wherein each of the plurality of actuatable arms includes a laminated robotic actuator of any of claims 1-14, wherein the plurality of actuatable arms are configured to bend from a first resting position to a second actuated position upon pressurization.
19. The gripping device of claim 18, wherein the gripping device comprises 2, 3, 4, 5, 6, 7, 8 or more actuatable arms.
20. The gripping device of claim 18, wherein one or more of the plurality of actuatable arms is configured to be actuated independently.
21. A method for providing a flexible robotic actuator, comprising:
 - providing a strain-limiting layer having a substantially two-dimensional layer of a first flexible material, wherein the strain-limiting layer is non-extensible;
 - providing a sealing layer having a substantially two-dimensional layer of a second flexible material, wherein the sealing layer is non-extensible, and the strain-limiting layer is stiffer compared to the sealing layer;
 - determining a shape of a region at which the sealing layer is to be adhered to the strain-limiting layer; and
 - adhering the sealing layer to the strain-limiting layer based on the shape of the region, thereby forming a channel for fluid communication having the shape that, upon receiving pressurized fluid, causes the actuator to bend towards the sealing layer.
22. The method of claim 21, further comprising providing an adhesive layer between the strain-limiting layer and the sealing layer, wherein the adhesive layer is shaped to selectively adhere the sealing layer to the strain-limiting layer to define the channel.

2013209422 03 Jul 2017

23. The method of claim 21, further comprising providing a masking layer disposed between the strain-limiting layer and the sealing layer, wherein the masking layer defines a shape of the un-adhered region between the strain-limiting layer and the sealing layer.
24. A method of actuating a laminated soft robotic comprising:
providing a laminated soft robotic actuator according to any of claims 1-16; and
initiating a series of pressurizations and depressurizations that actuate the laminated soft robotic to provide a predetermined motion.
25. The method of claim 24, wherein the series of pressurization and depressurizations provide a sequence of two or more predetermined motions.
26. A method of gripping comprising:
providing a plurality of laminated robotic actuators according to claim 1; and
initiating a series of pressurizations and depressurizations that bring the actuators in gripping contact with a target object.
27. The method of claim 26, further comprising initiating a series pressurizations and depressurizations to perform a walking motion.
28. The method of claim 24, 26 or 27, wherein the pressure of the fluid applied to the channel via the fluid inlet is selected to provide a predetermined range of a motion.



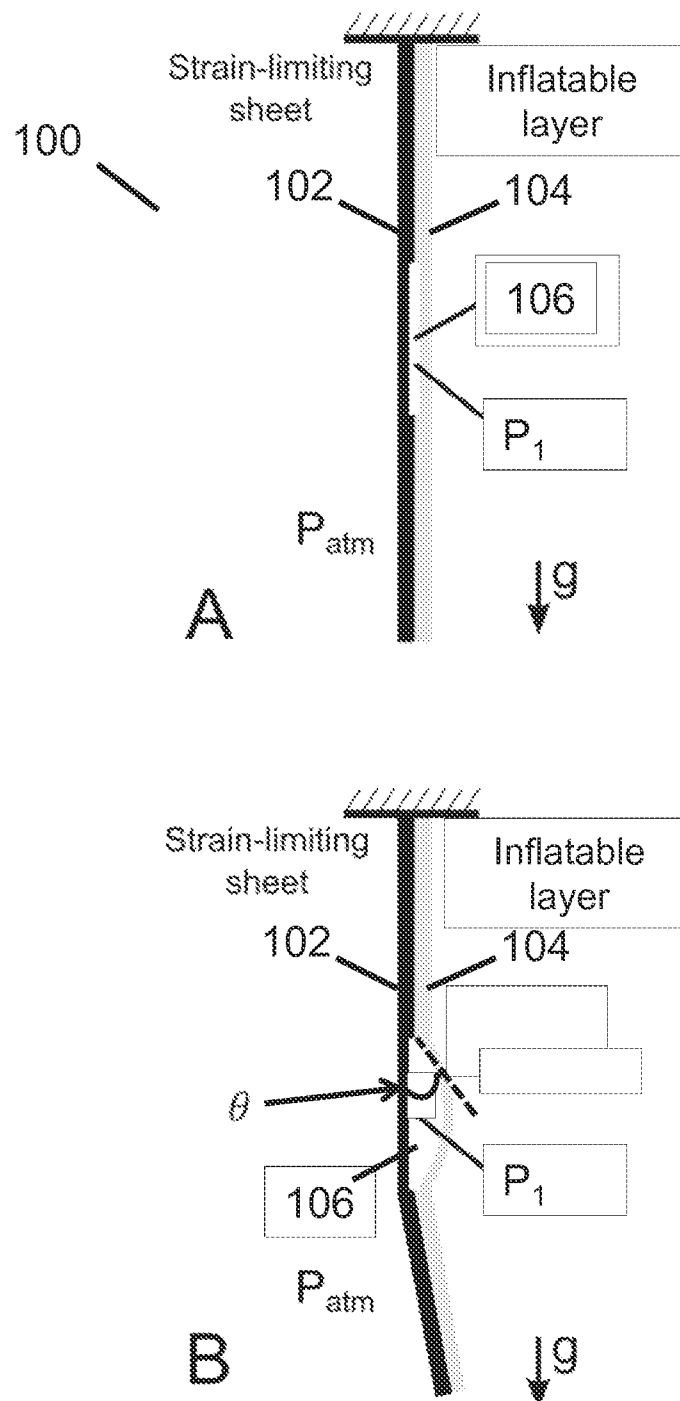


FIG. 1

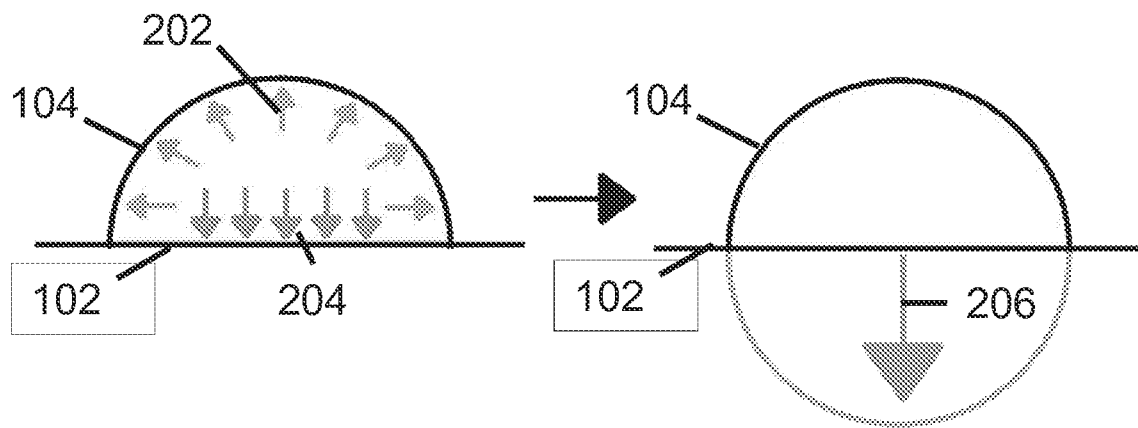

A

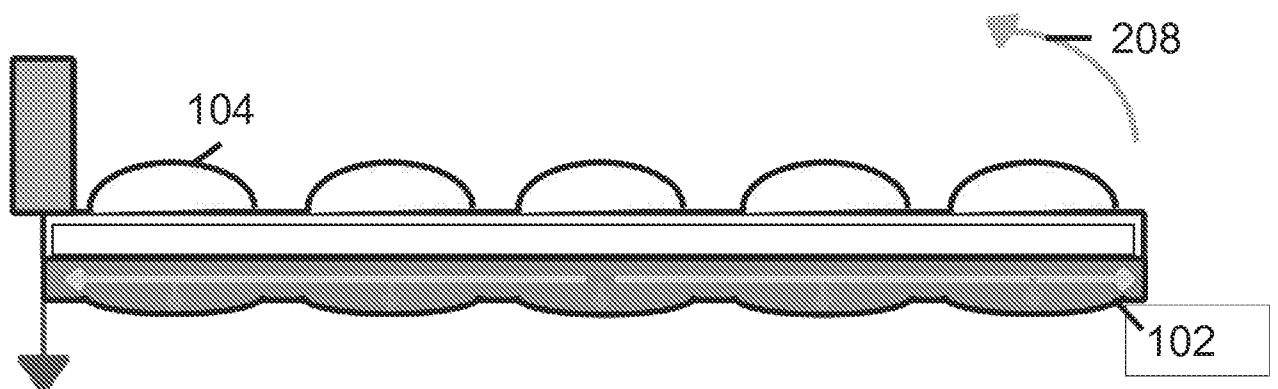

B

FIG. 2

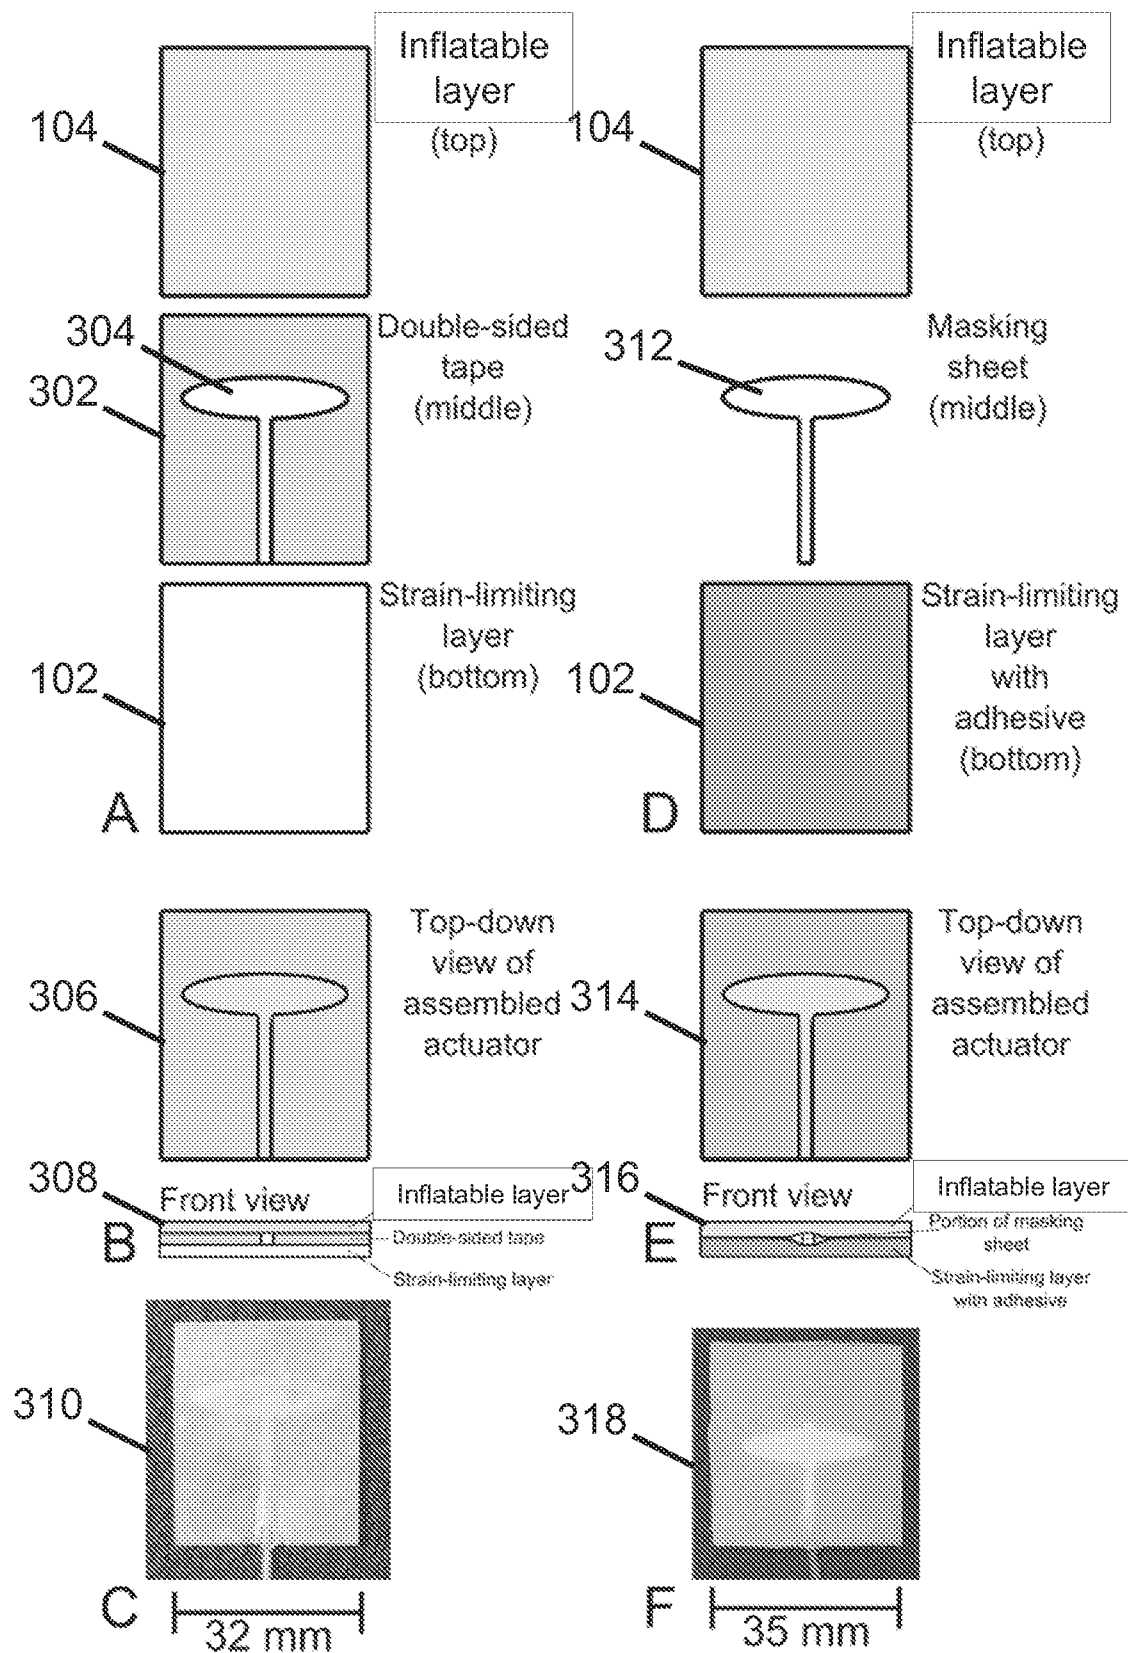


FIG. 3

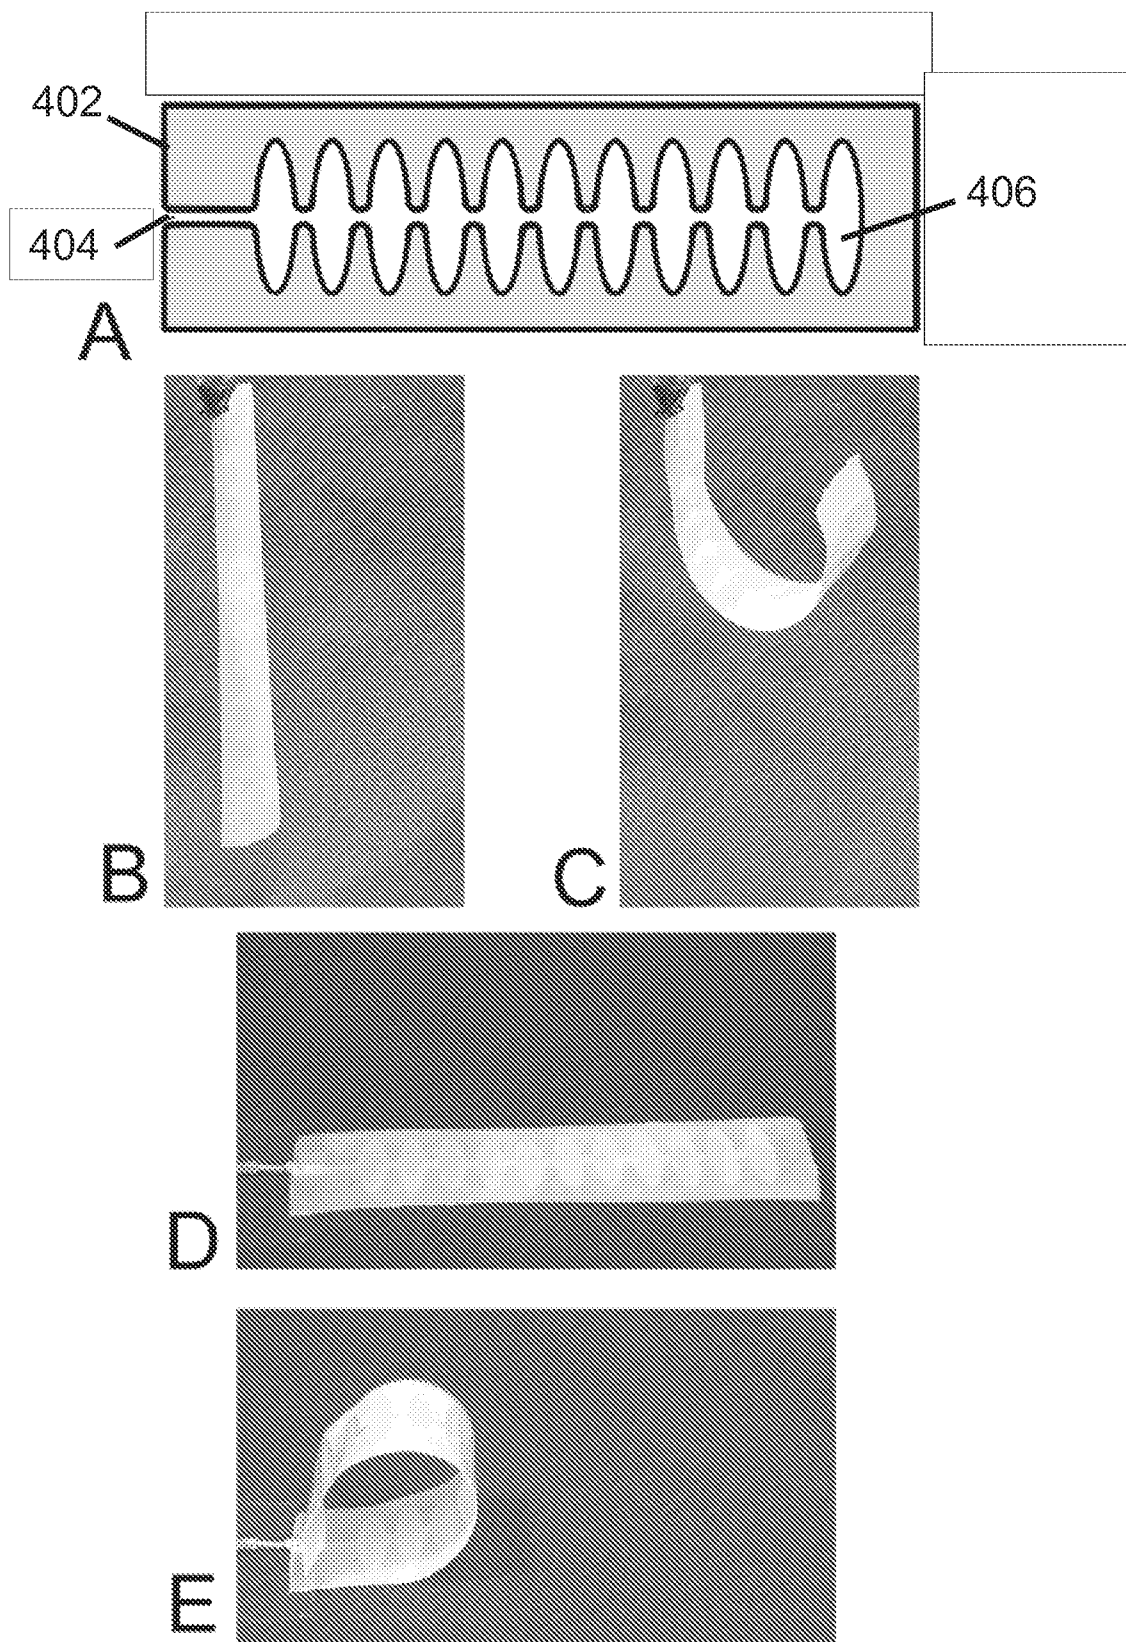


FIG. 4

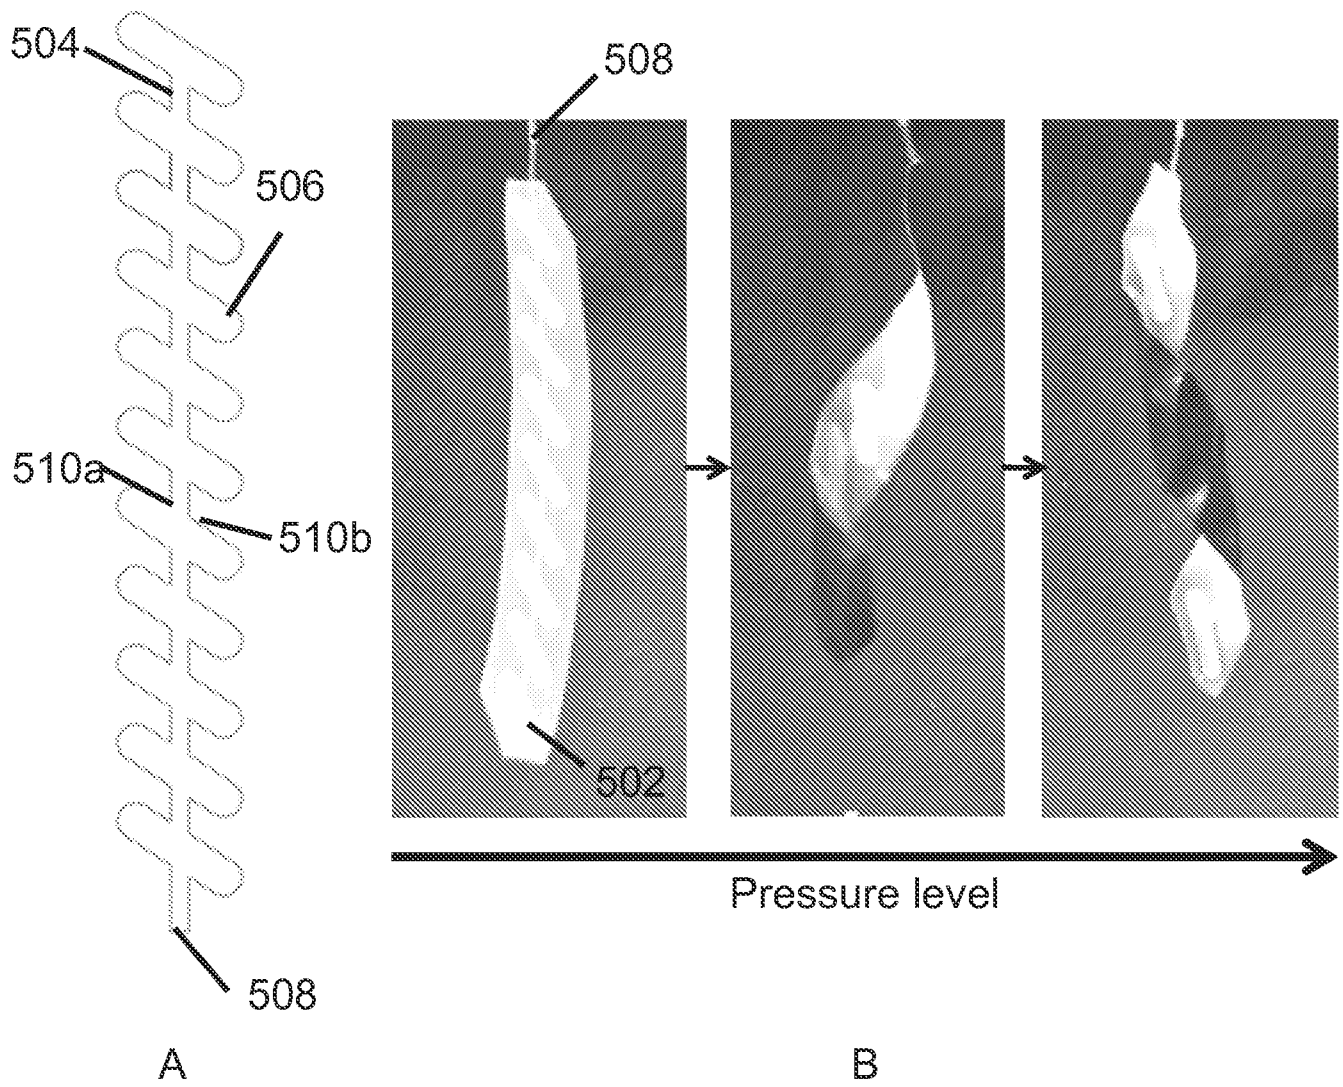


FIG. 5

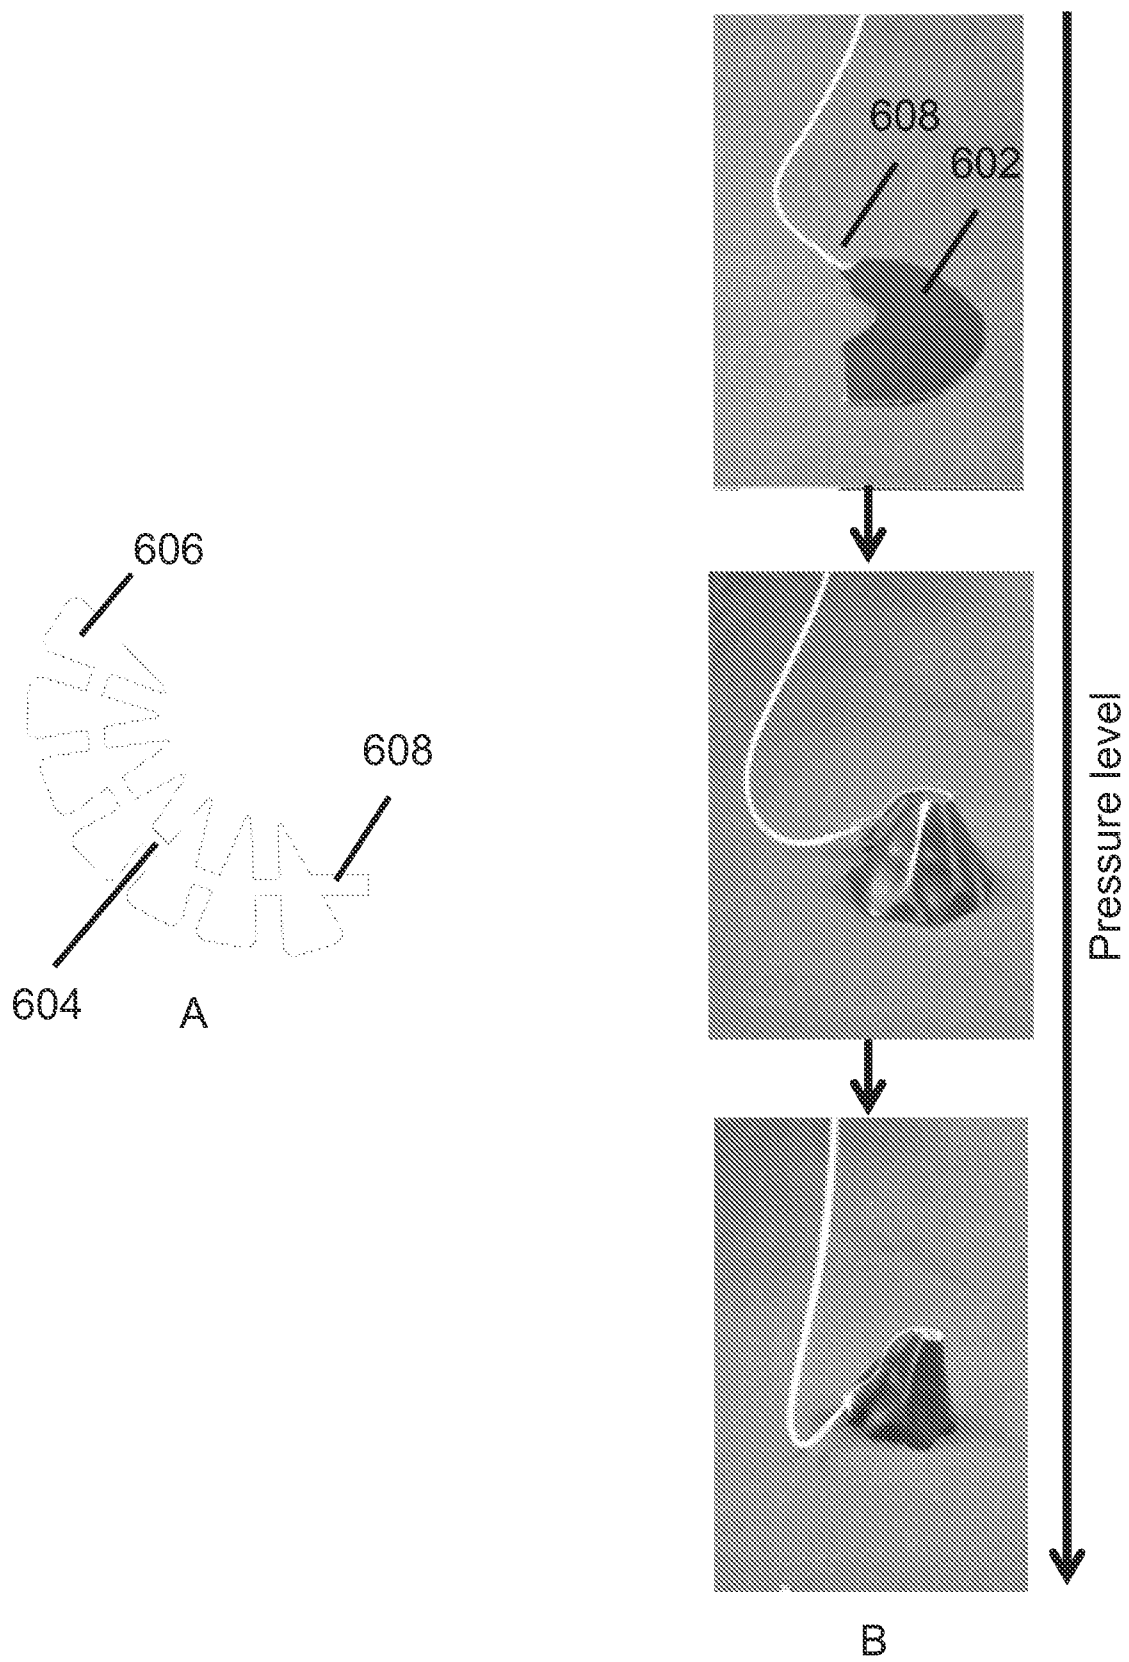


FIG. 6


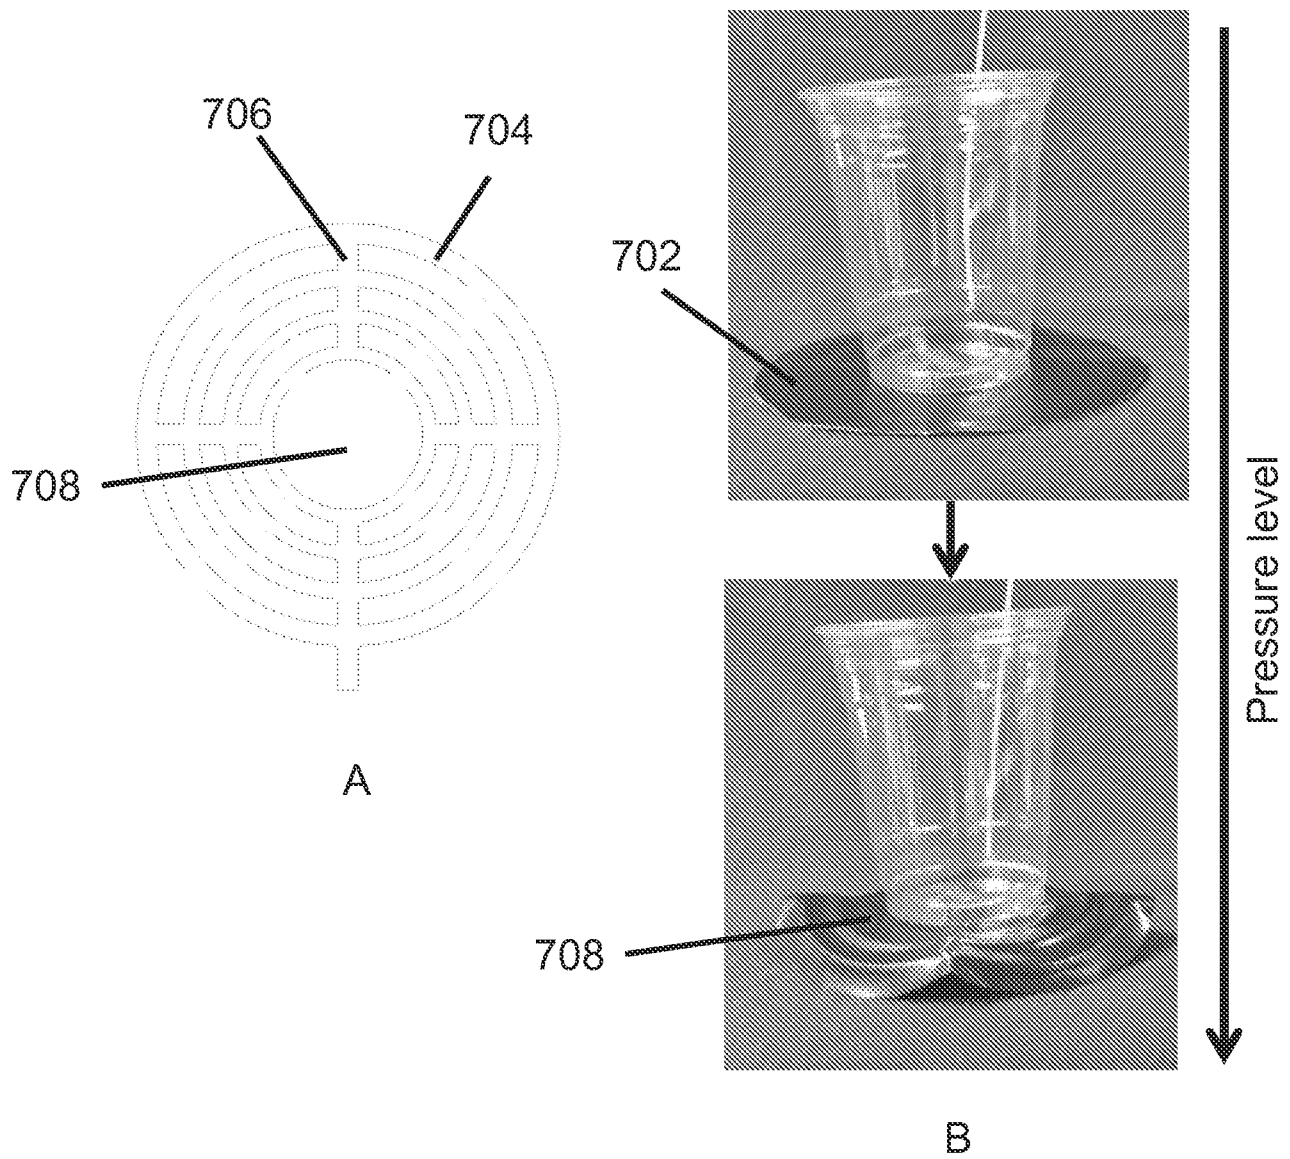


FIG. 7

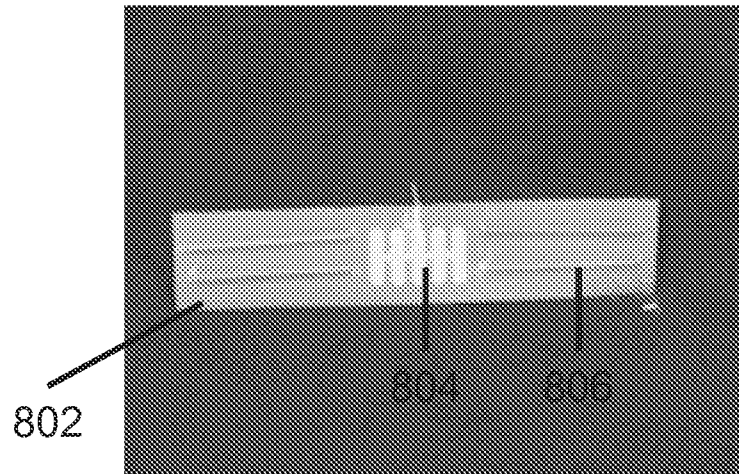

A

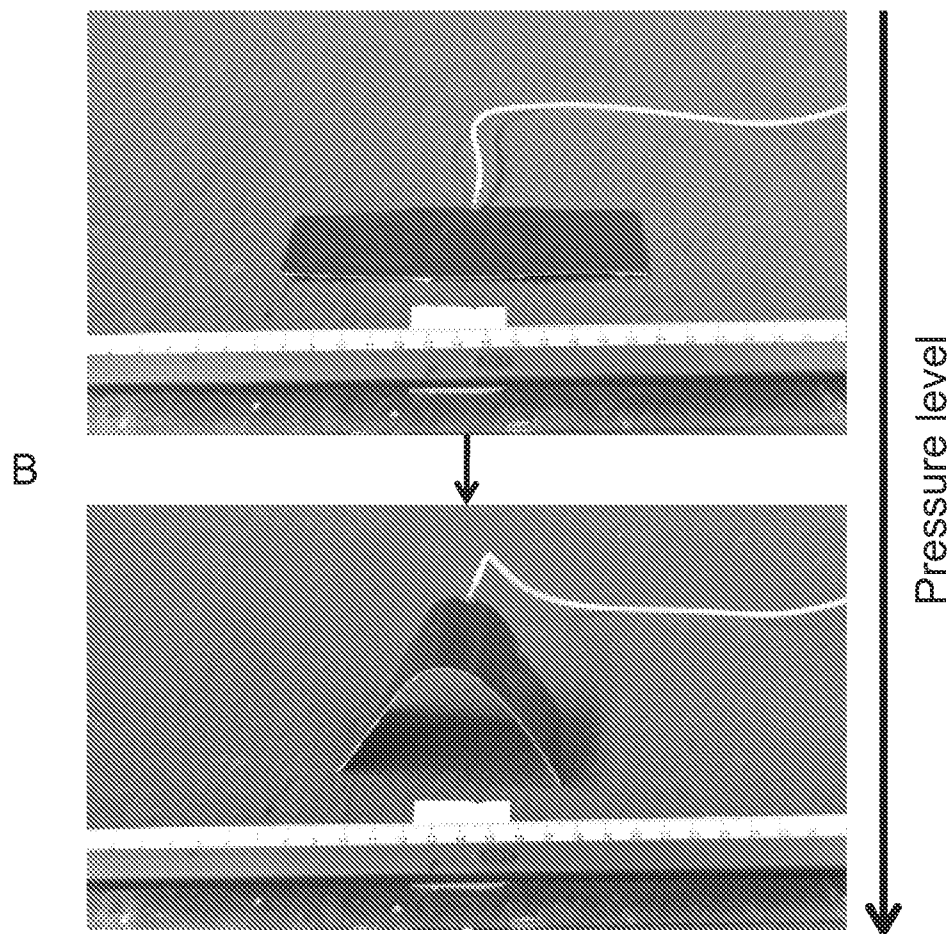


FIG. 8

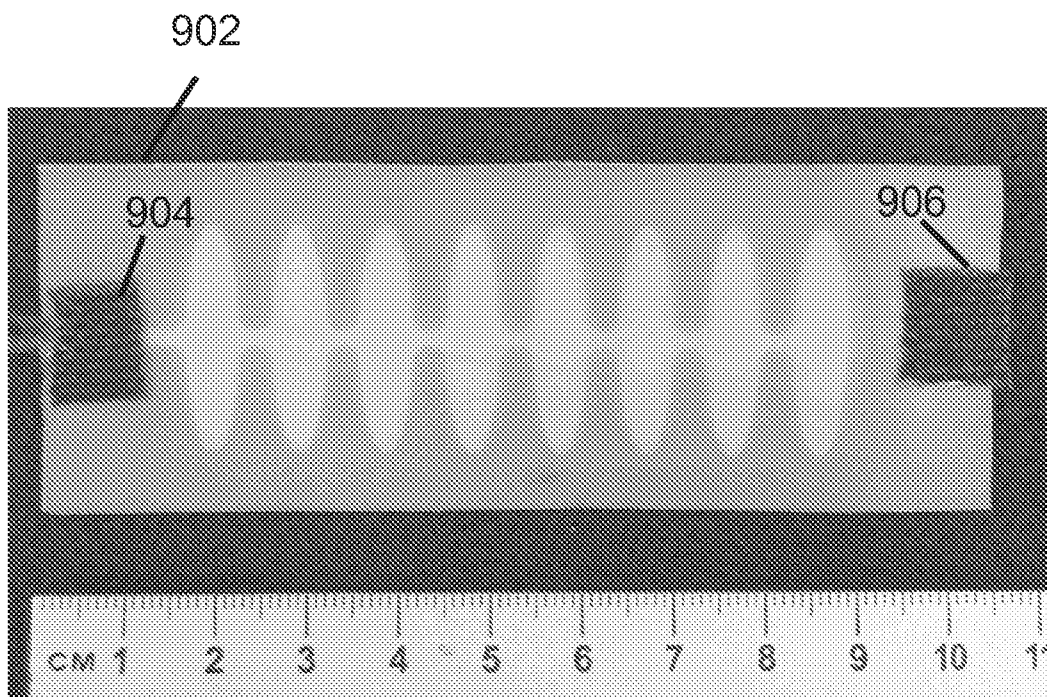


FIG. 9

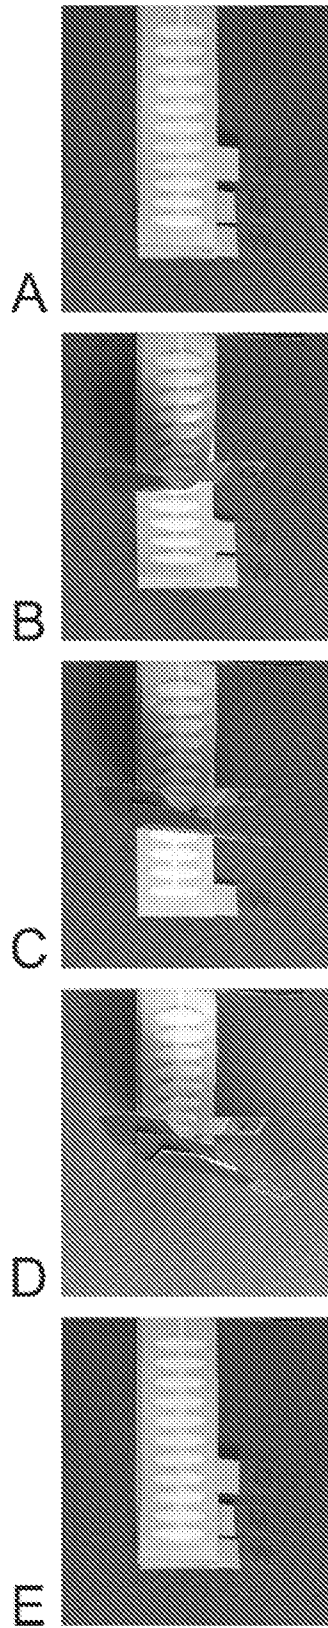


FIG. 10

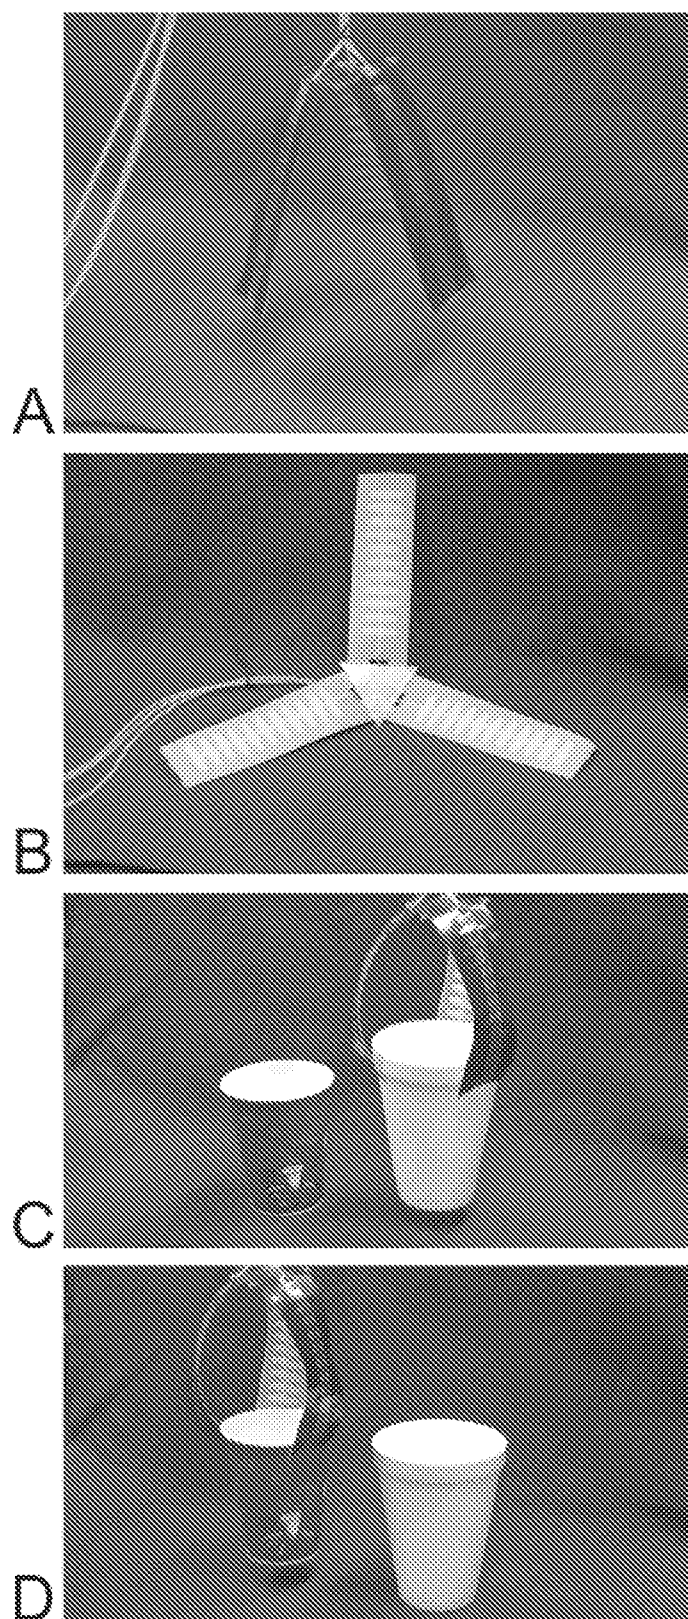


FIG. 11

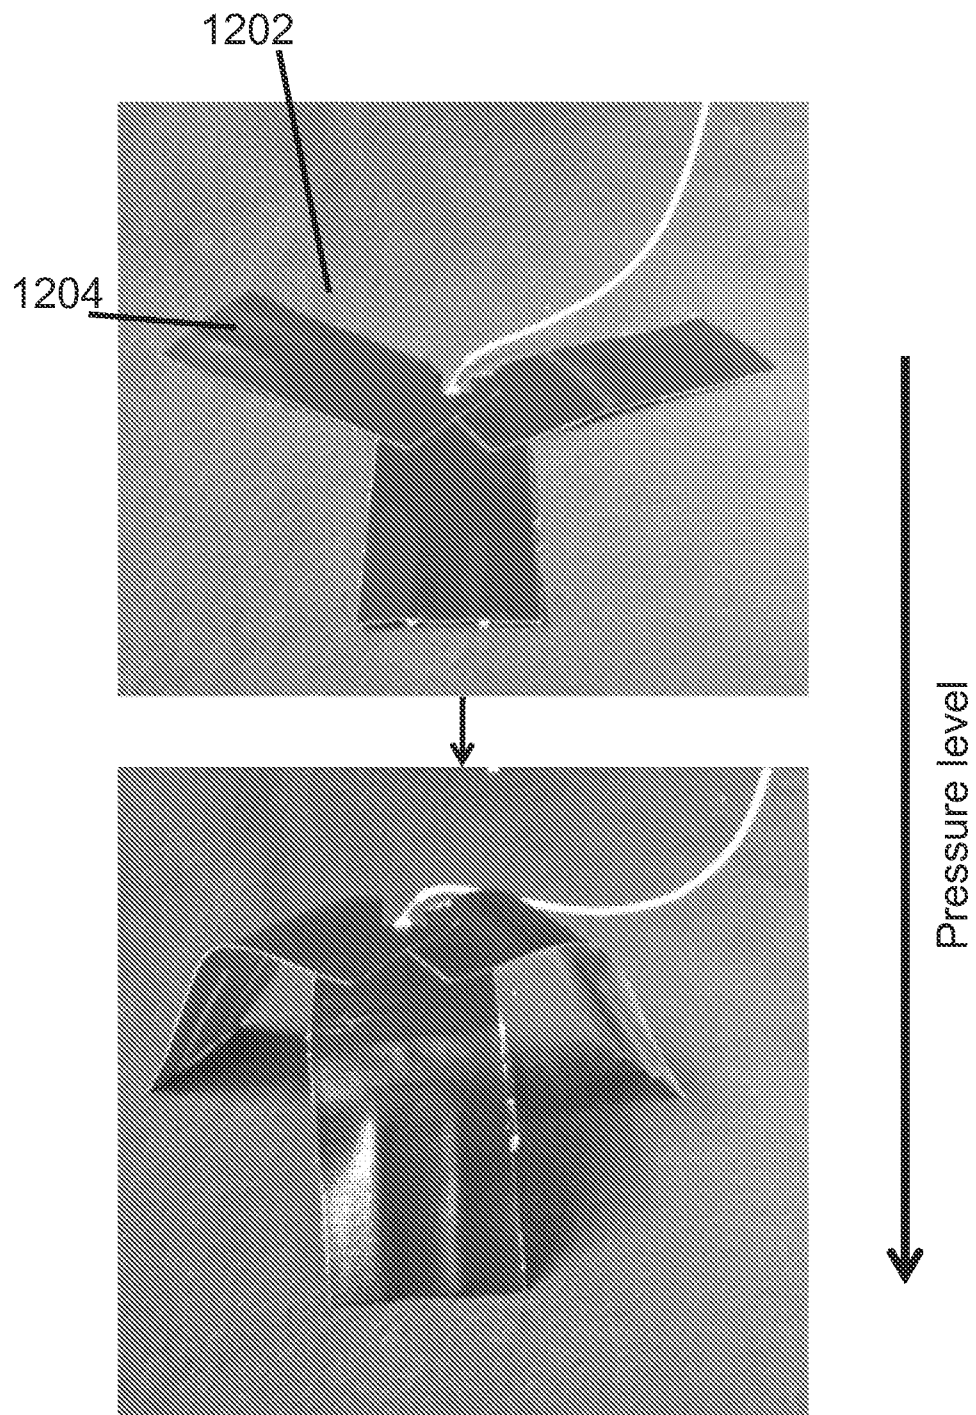


FIG. 12

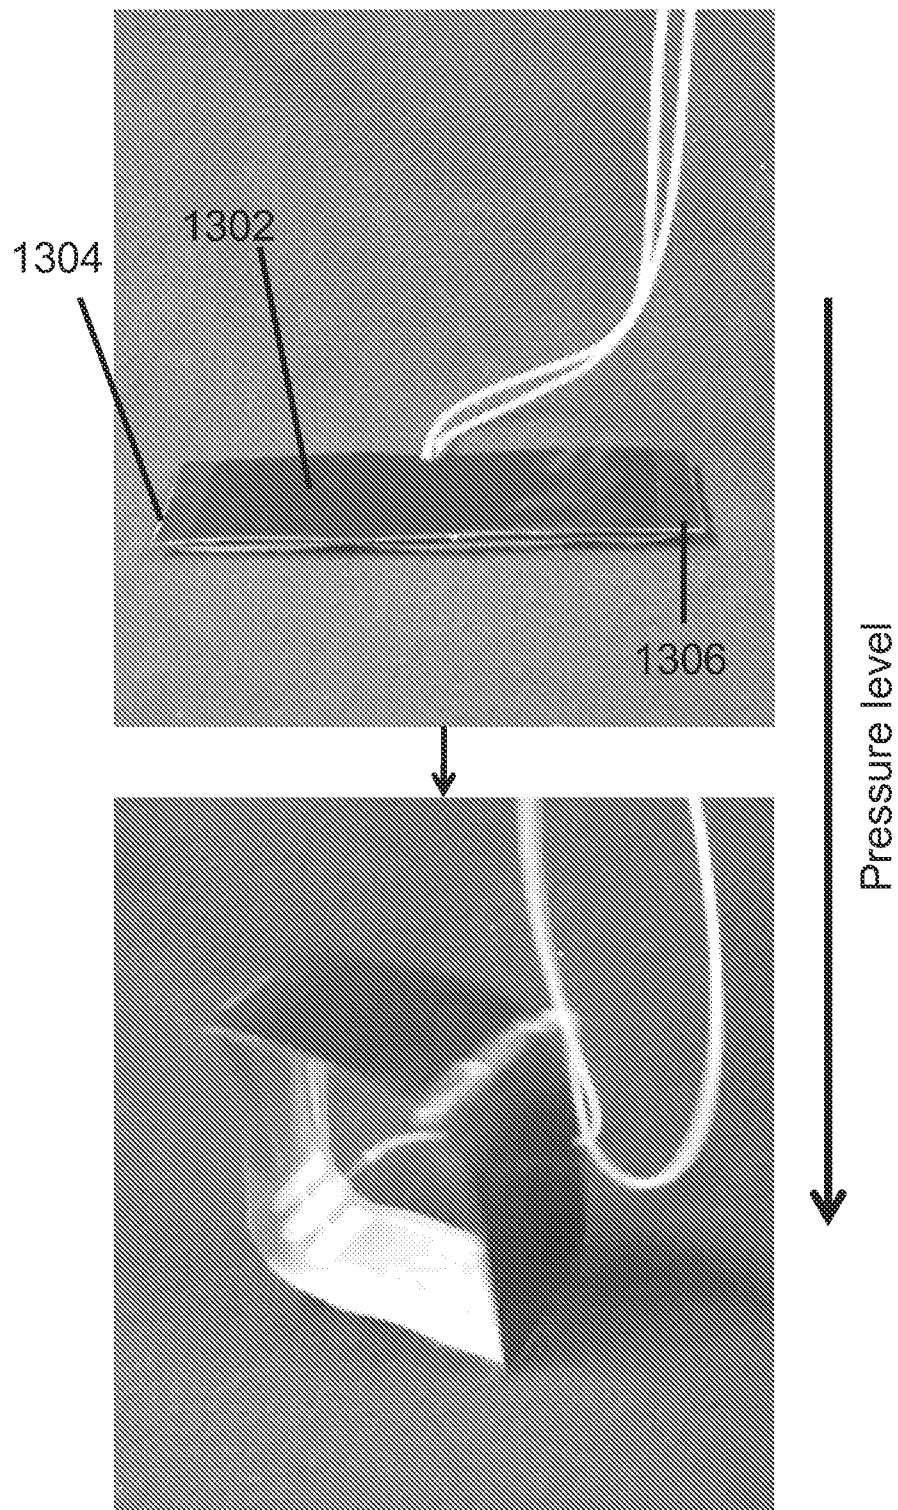


FIG. 13



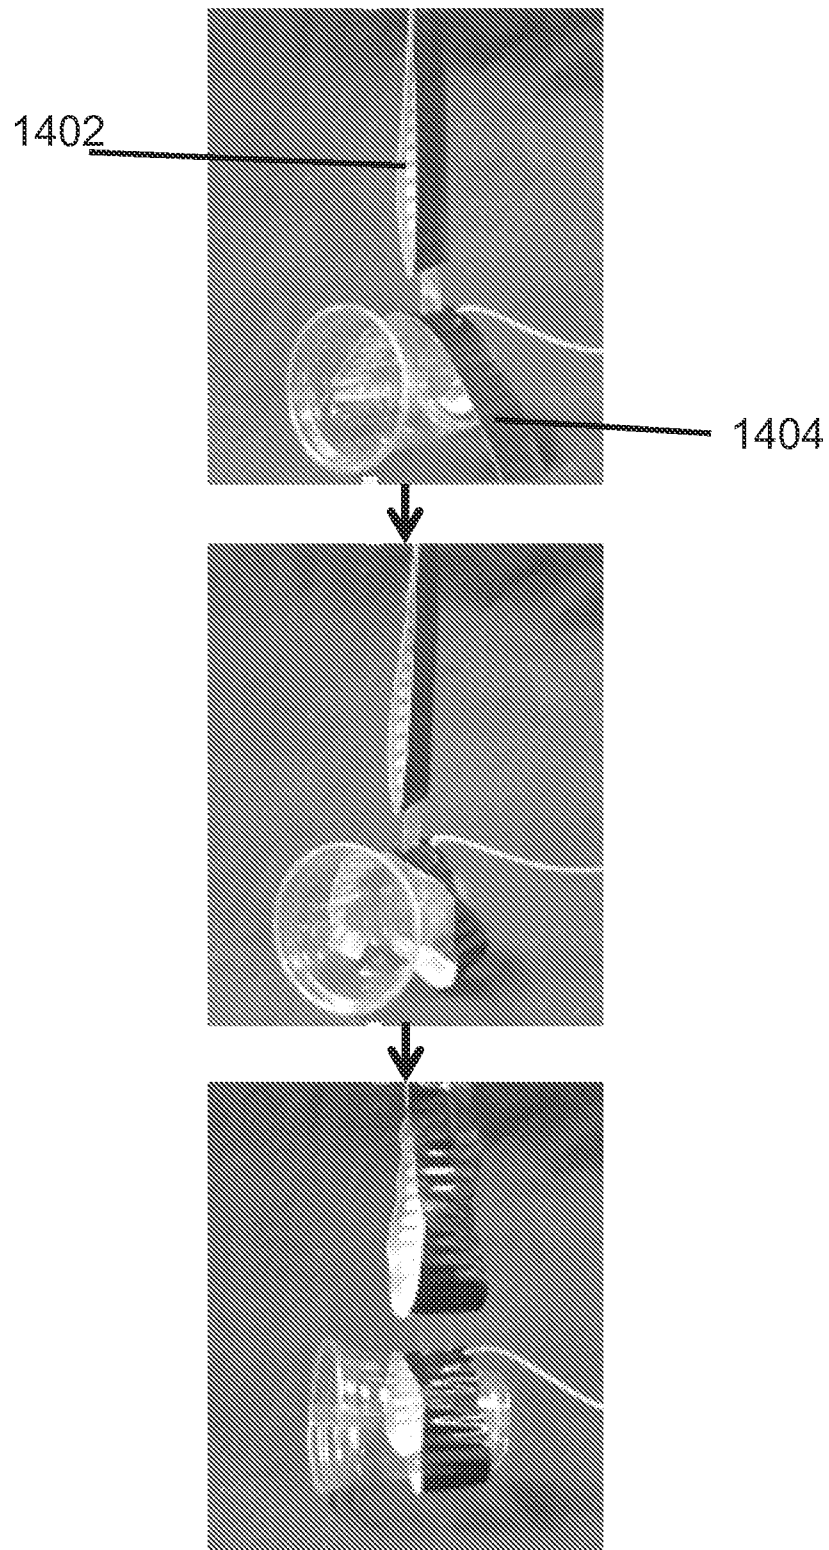


FIG. 14

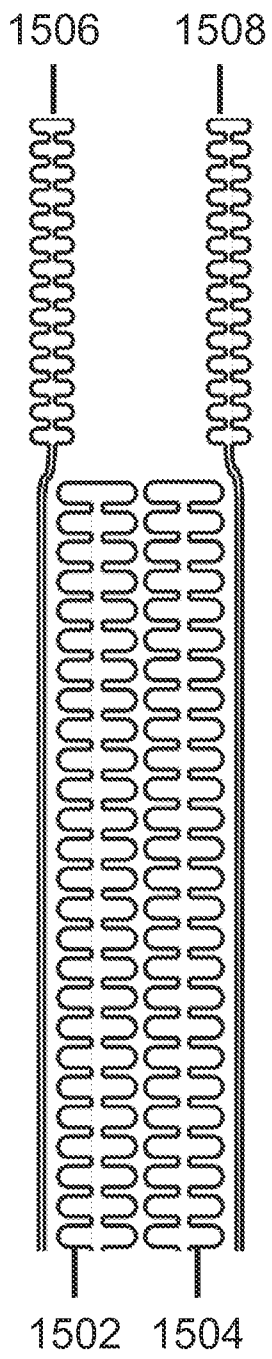

A

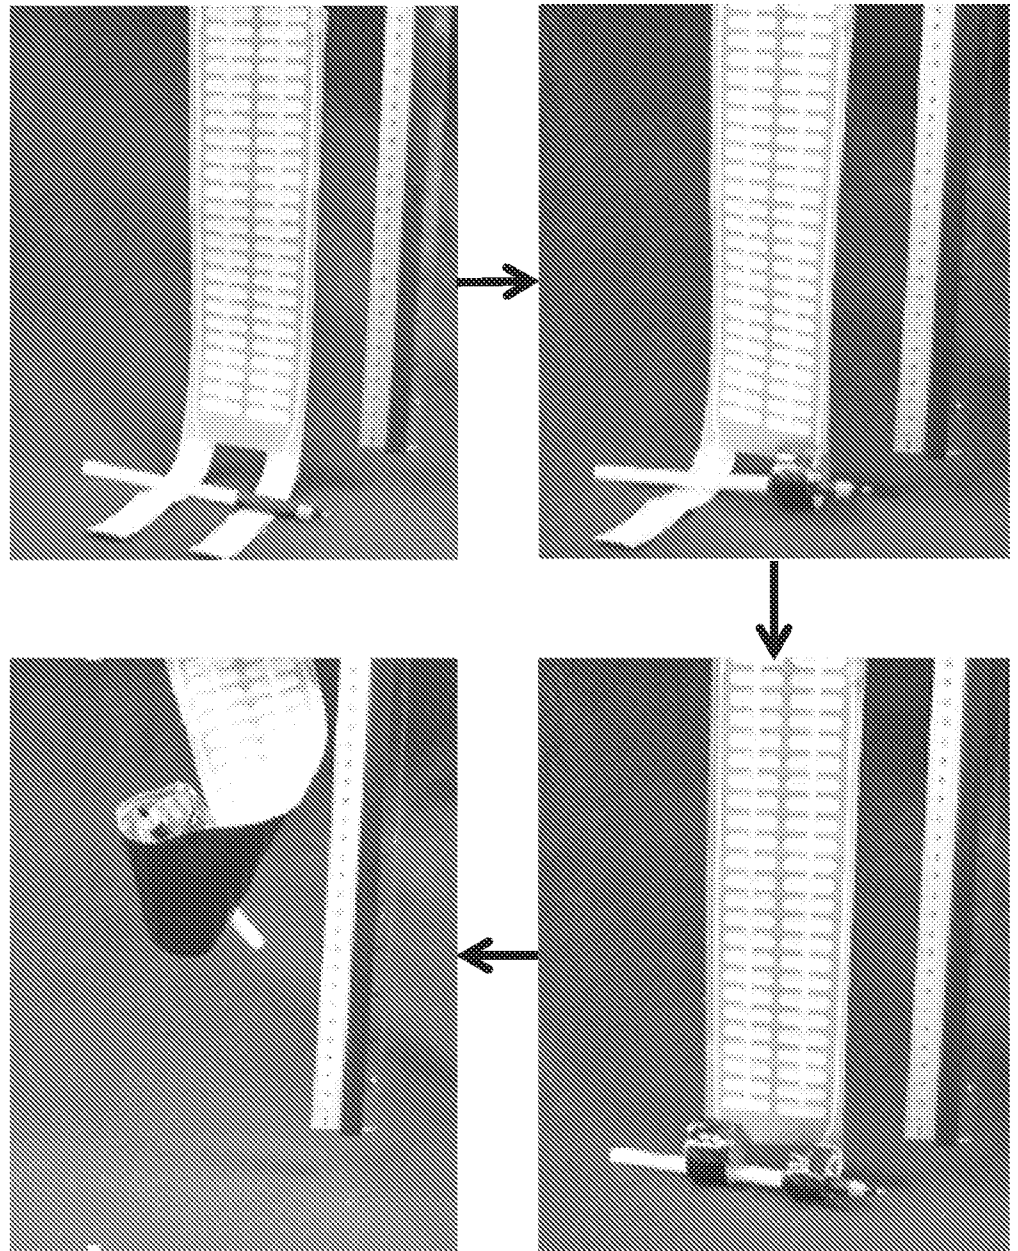

B

FIG. 15

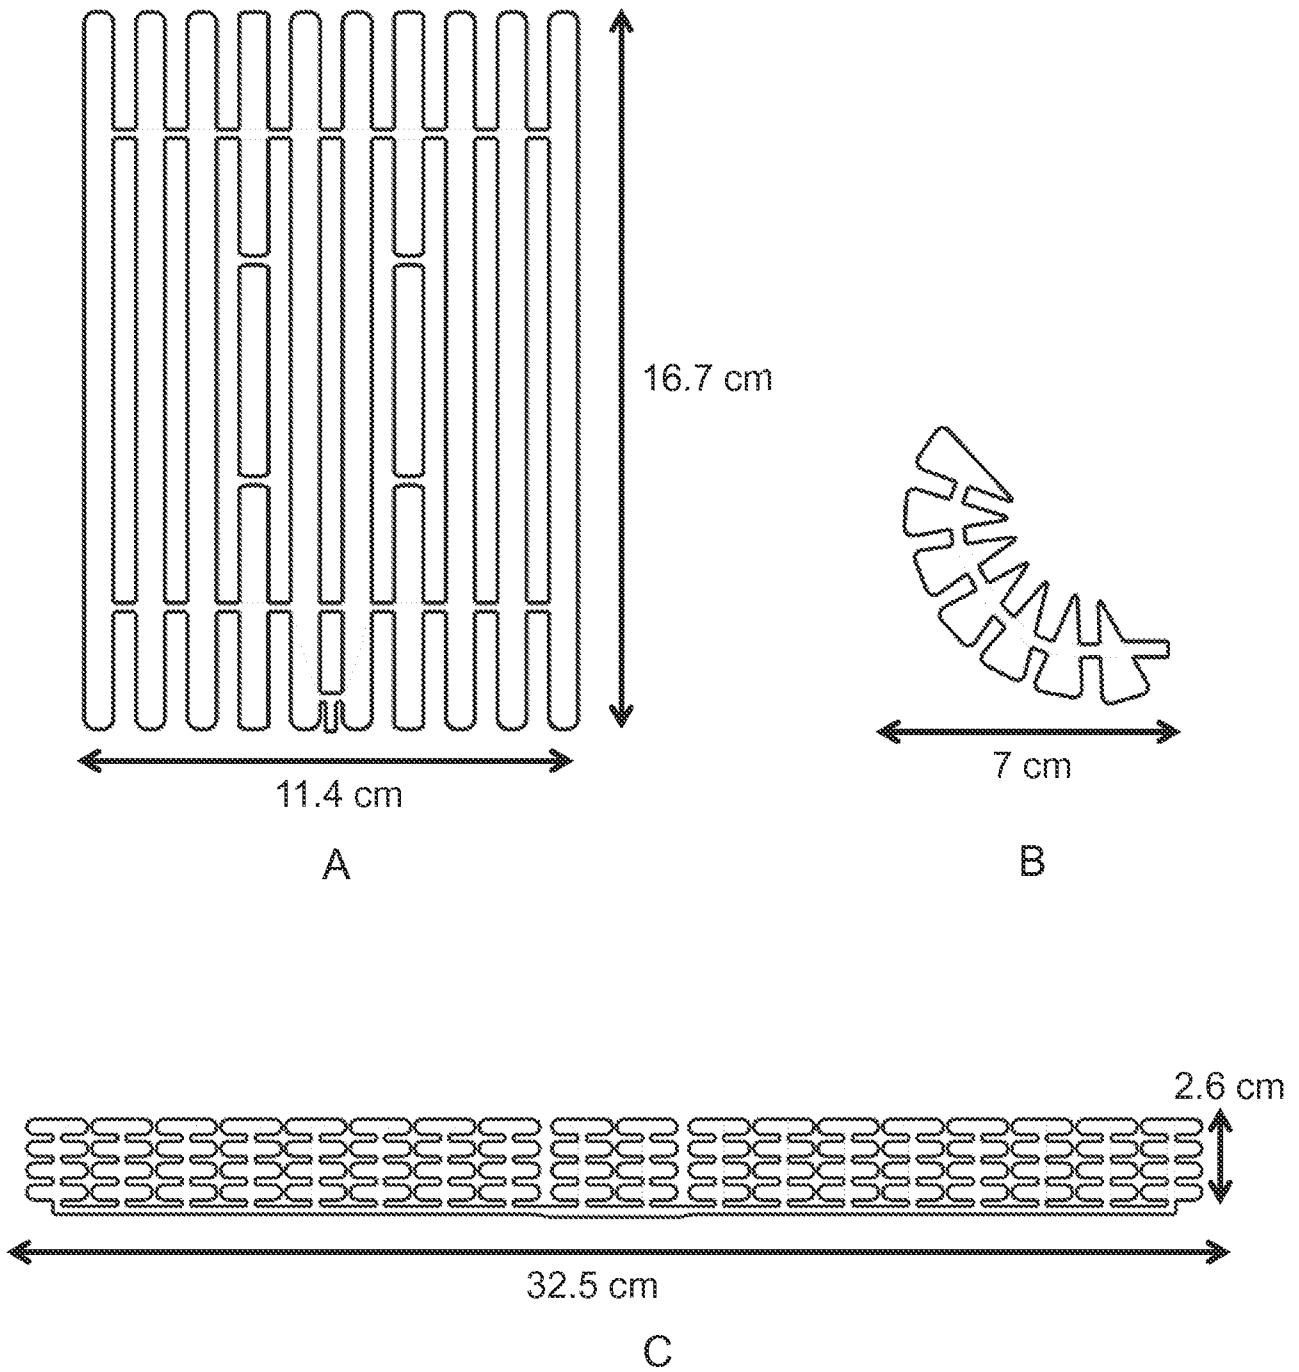


FIG. 16

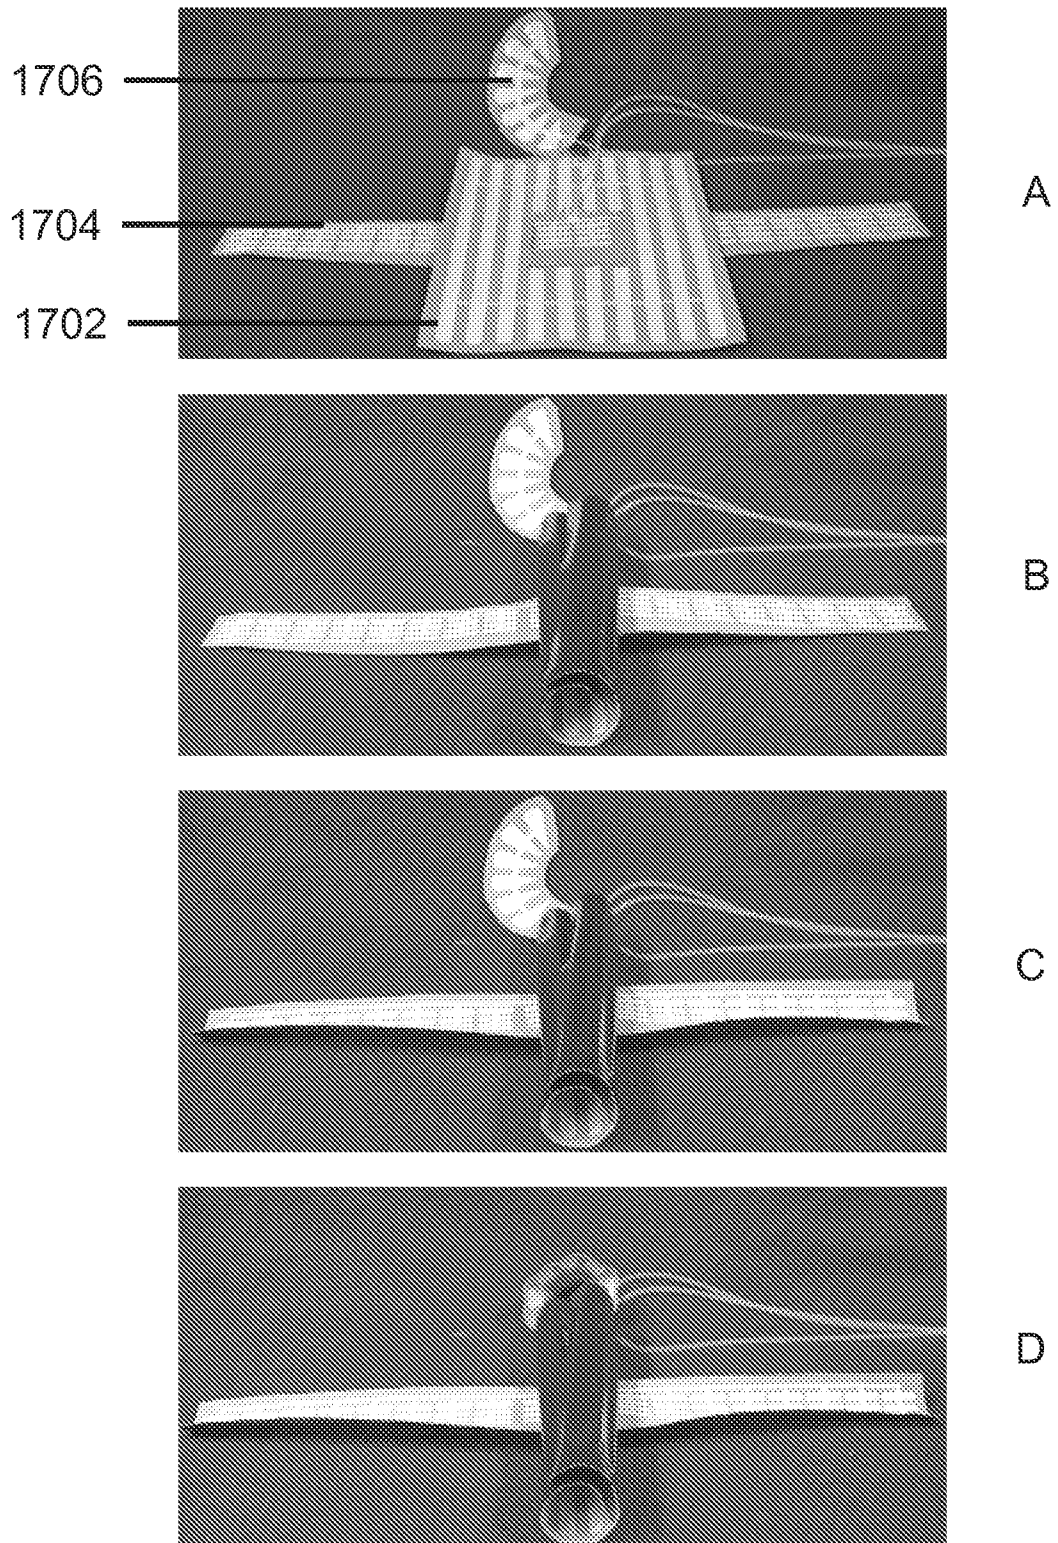


FIG. 17

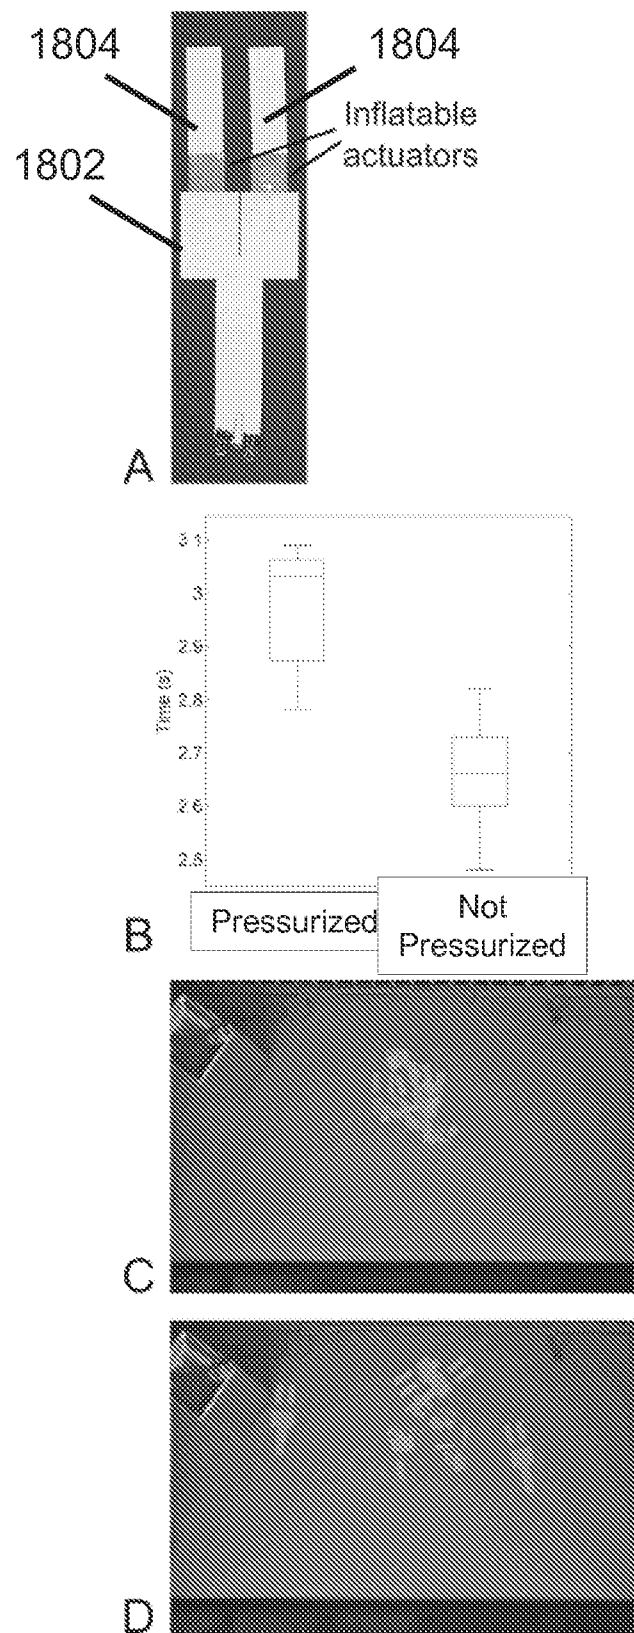


FIG. 18