


B. H. STEELE & R. HODGIN.

Improvement in Spring-Brace for Vehicles.

No. 128,669.

Patented July 2, 1872.

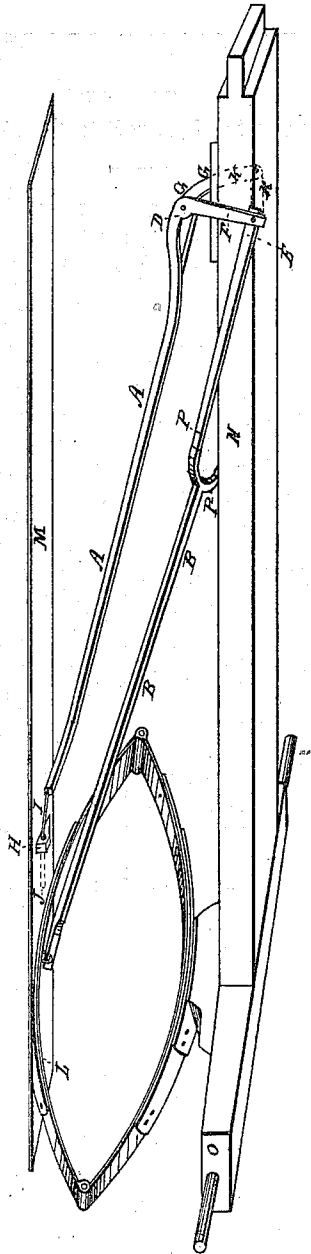

Witnesses

R. C. Graves.
A. C. Hogue

Inventors

Ben H. Steele
Robert Hodgine

UNITED STATES PATENT OFFICE.

BEN H. STEELE AND ROBERT HODGIN, OF BARNESVILLE, OHIO.

IMPROVEMENT IN SPRING-BRACES FOR VEHICLES.

Specification forming part of Letters Patent No. 128,669, dated July 2, 1872.

Specification describing certain Improvements in Buggy or Wagon-Spring Braces, invented by BEN H. STEELE and ROBERT HODGIN, of Barnesville, Belmont county, Ohio.

Our invention relates to an improved method of bracing buggy or other vehicle-springs.

Figure 1 is a drawing of our improvement in position on a buggy.

A A is a lever; B B, brace; C C, the fulcrum-block; F, lever-fulcrum; D, pivot by means of which the lever is attached and swung to fulcrum-block G G. P P are brace-arms. E is a pivot, by means of which the brace-arm P is connected with lever-fulcrum F. O is the buggy-axle; N, the reach or coupling-pole. L L is the spring; M, the bottom of buggy-bed. H is a guide-block. I is the end of lever A A. The lever A A and brace-rod B B are attached together at E by means of pivots, and are attached or swung to the fulcrum-block G G by a pivot at D. When weight is placed upon the bed of buggy M the arms of lever F and brace P move in the direction of the dotted lines K K at the same time the end of lever I passes forward through the guide-block H to the place indicated by the dotted lines J. As the buggy-bed M descends the

brace-rod B B is lengthened; the lever A A moves forward, thereby taking up the slack of the brace-rod and permitting the spring L L to descend without any rocking motion.

The object of our invention is to give additional strength to the spring, to save wearing of the spring-lugs, to prevent the splitting of the spring-bars, and to prevent the breaking of the spring-bar bolts, which frequently results from the oscillating motion of the common springs when held only by an iron brace. We make the rod and lever of half-inch or five-eighths iron.

What we claim as our invention, and desire to secure by Letters Patent, is—

The attachments for carriage or wagon-springs herein described, consisting of the lever A, forked at F, with the forked brace-rod B P, guide-block H, and fulcrum G, constructed and arranged substantially as and for the purpose specified.

BEN H. STEELE.
ROBERT HODGIN.

Witnesses:

R. C. GRAVES,
A. C. HOGUE.