




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/14
(87) Date publication PCT/PCT Publication Date: 2006/12/28
(45) Date de délivrance/Issue Date: 2013/12/24
(85) Entrée phase nationale/National Entry: 2007/10/29
(86) N° demande PCT/PCT Application No.: SE 2006/000706
(87) N° publication PCT/PCT Publication No.: 2006/137775
(30) Priorité/Priority: 2005/06/22 (SE0501448-5)

(51) Cl.Int./Int.Cl. *B25D 9/26* (2006.01),
B25D 9/16 (2006.01), *E21B 1/24* (2006.01),
E21B 1/26 (2006.01)
(72) Inventeur/Inventor:
ANDERSSON, KURT, SE
(73) Propriétaire/Owner:
ATLAS COPCO ROCK DRILLS AB, SE
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF A PERCUSSION POUR PERFORATRICE DE ROCHES, PROCEDE POUR OBTENIR UN
MOUVEMENT DE PISTON ALTERNATIF A PERCUSSION ET PERFORATRICE DE ROCHES
(54) Title: PERCUSSION DEVICE FOR A ROCK DRILLING MACHINE, METHOD FOR ACHIEVING A RECIPROCATING
PERCUSSION PISTON MOVEMENT AND ROCK DRILLING MACHINE

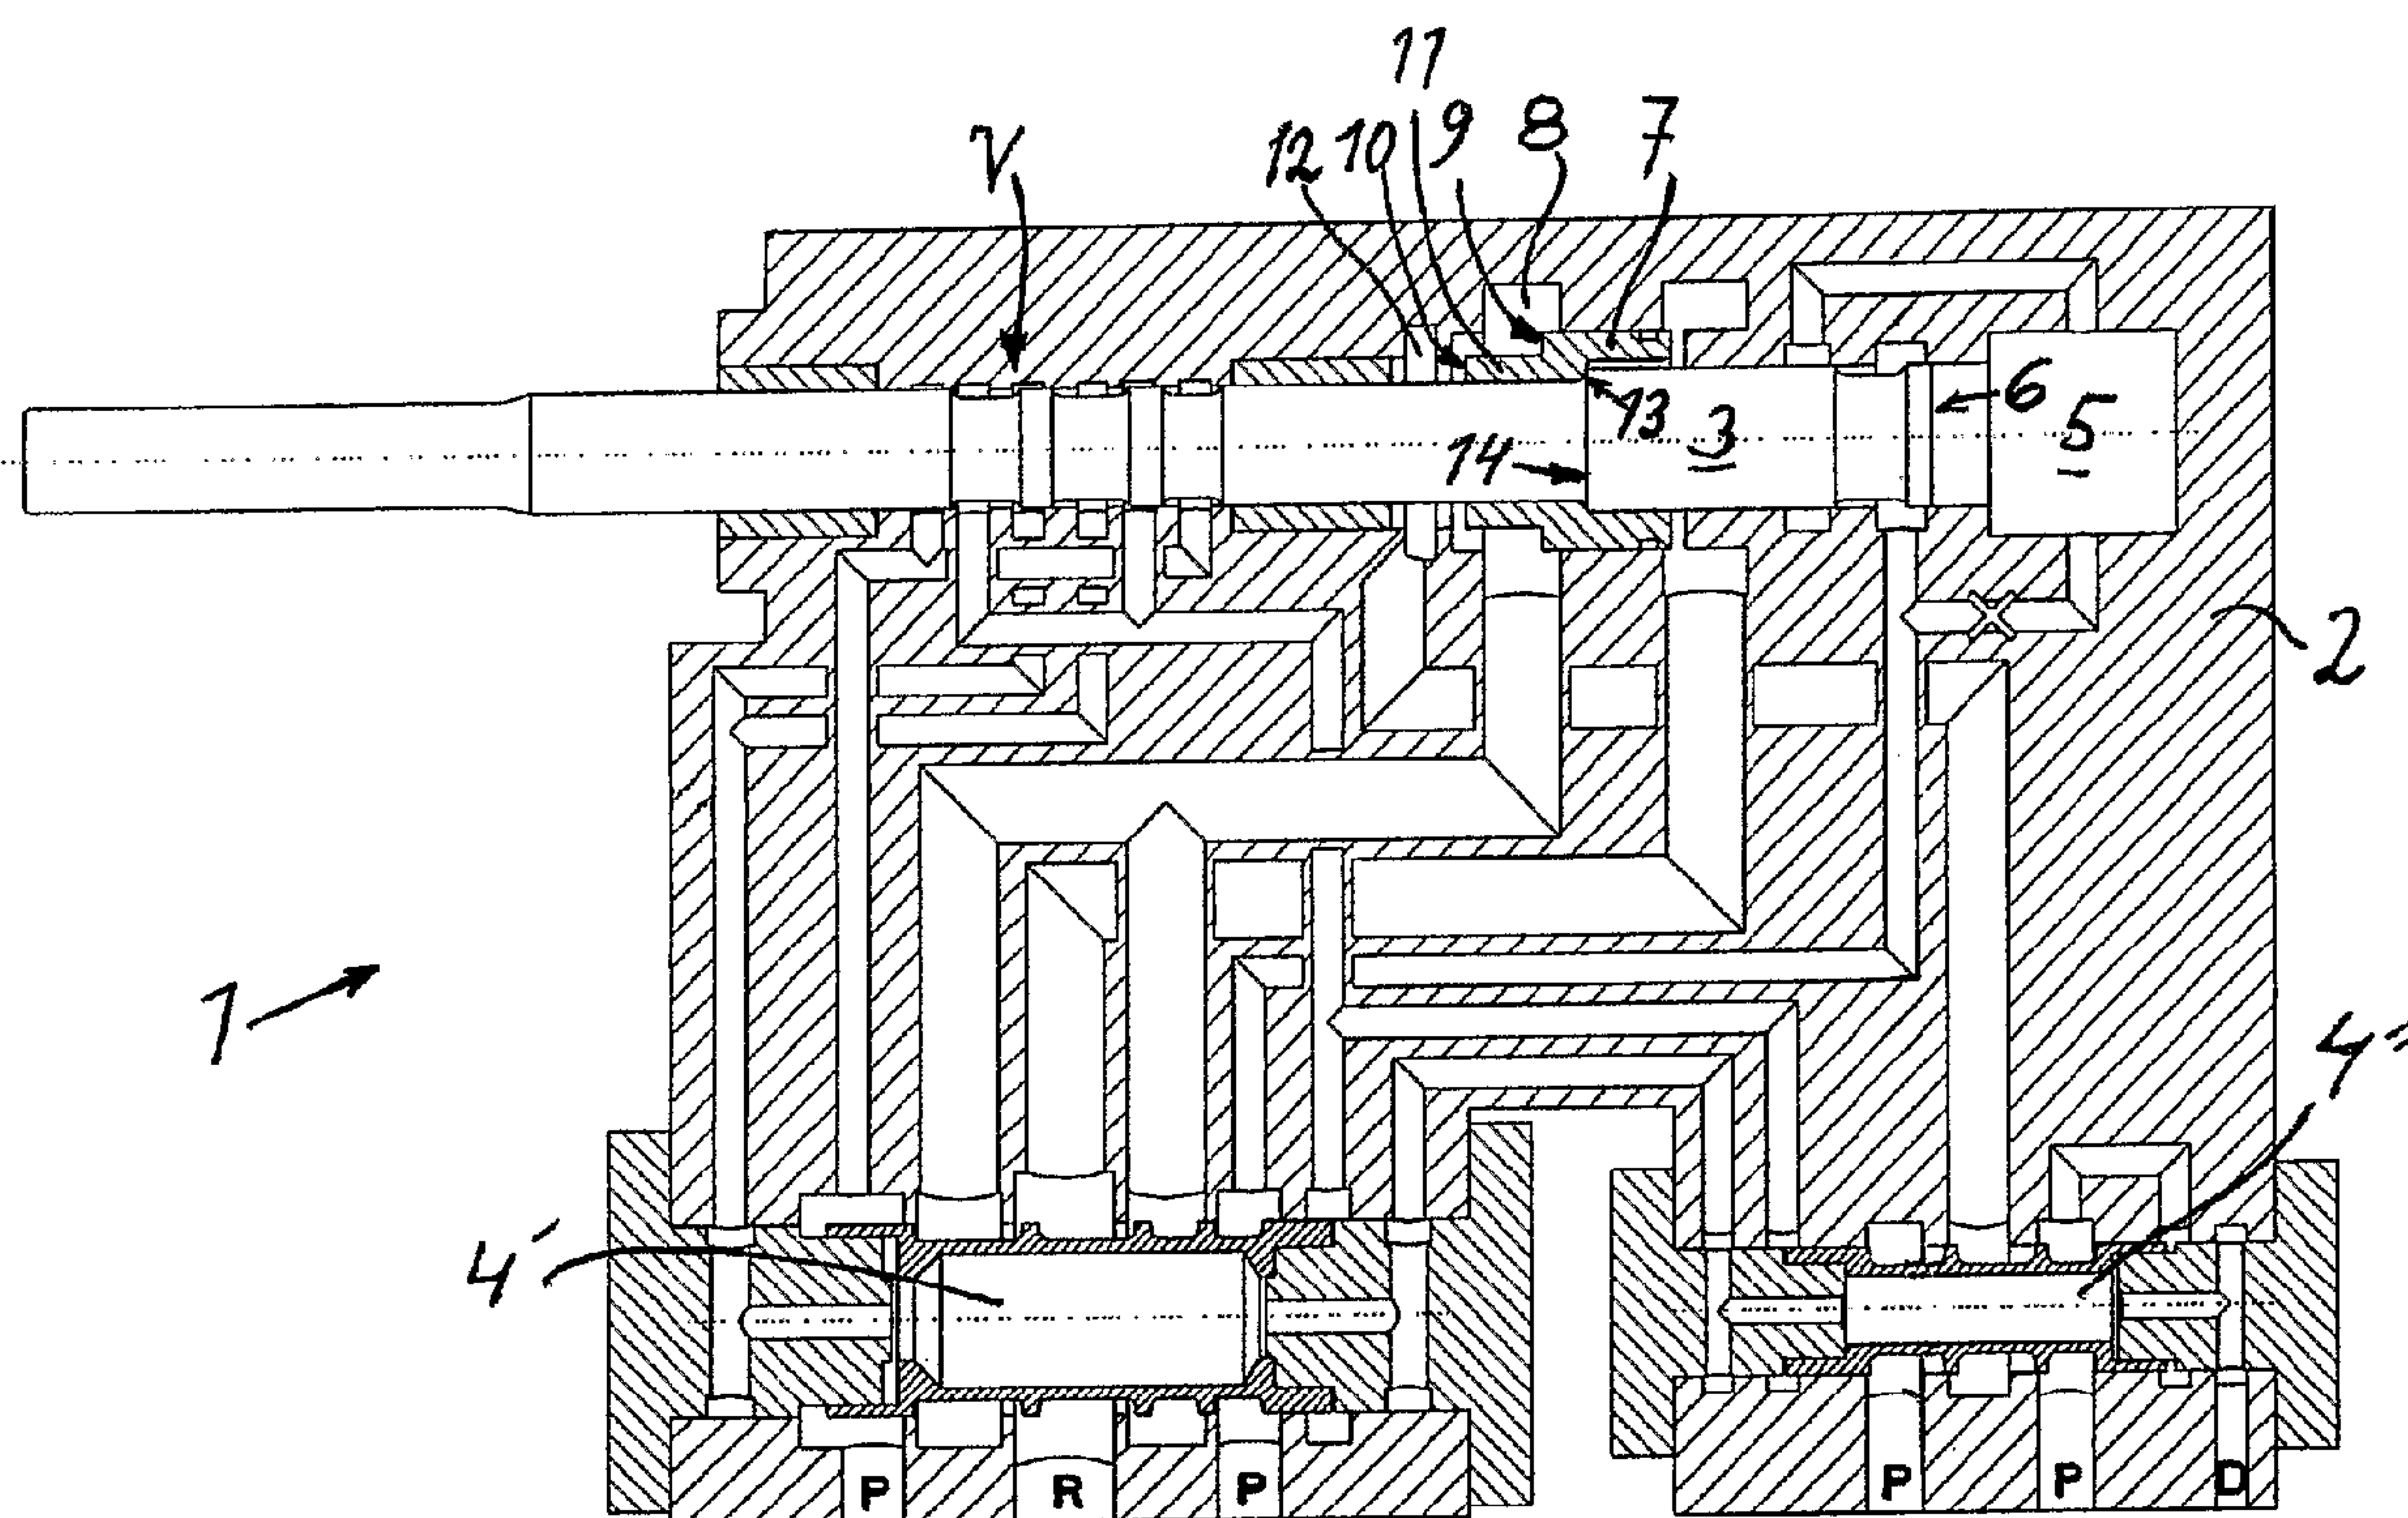

(57) Abrégé/Abstract:

A percussion device (1) with a reciprocating percussion piston (3), includes a first chamber (5) that can be pressurized for forward driving of the percussion piston (3) and a second chamber (8) that can be periodically pressurized for back-driving of the percussion piston (3). The percussion device includes at least one driving piston (7) arranged for actuating the back-driving of the percussion piston (3) wherein a portion of said driving piston (7) is arranged to enter into the second chamber (8) for pressure actuating on a driving surface of the driving piston by pressure medium being present in this chamber in the direction of back-



(57) **Abrégé(suite)/Abstract(continued):**

driving, wherein the driving piston (7) includes means for back-driving co- operation with the percussion piston (3) , and wherein the driving piston (7) is free for axial movement with respect to the percussion piston (3), opposite the direction of back- driving. The invention also concerns a method and a rock drilling machine .

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2006 (28.12.2006)

PCT

(10) International Publication Number
WO 2006/137775 A1

(51) International Patent Classification:
B21B 1/26 (2006.01) *B25D 9/26* (2006.01)

(21) International Application Number:
PCT/SE2006/000706

(22) International Filing Date: 14 June 2006 (14.06.2006)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0501448-5 22 June 2005 (22.06.2005) SE

(71) Applicant (for all designated States except US): **ATLAS COPCO ROCK DRILLS AB** [SE/SE]; S-701 91 Örebro (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ANDERSSON, Kurt** [SE/SE]; Skälsåtravägen 7, S-135 54 Tyresö (SE).

(74) Agent: **EHRNER & DELMAR PATENTBYRÅ AB**; Box 10316, S-100 55 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PERCUSSIVE DEVICE FOR A ROCK DRILLING MACHINE, METHOD FOR ACHIEVING A RECIPROCATING PERCUSSIVE PISTON MOVEMENT AND ROCK DRILLING MACHINE

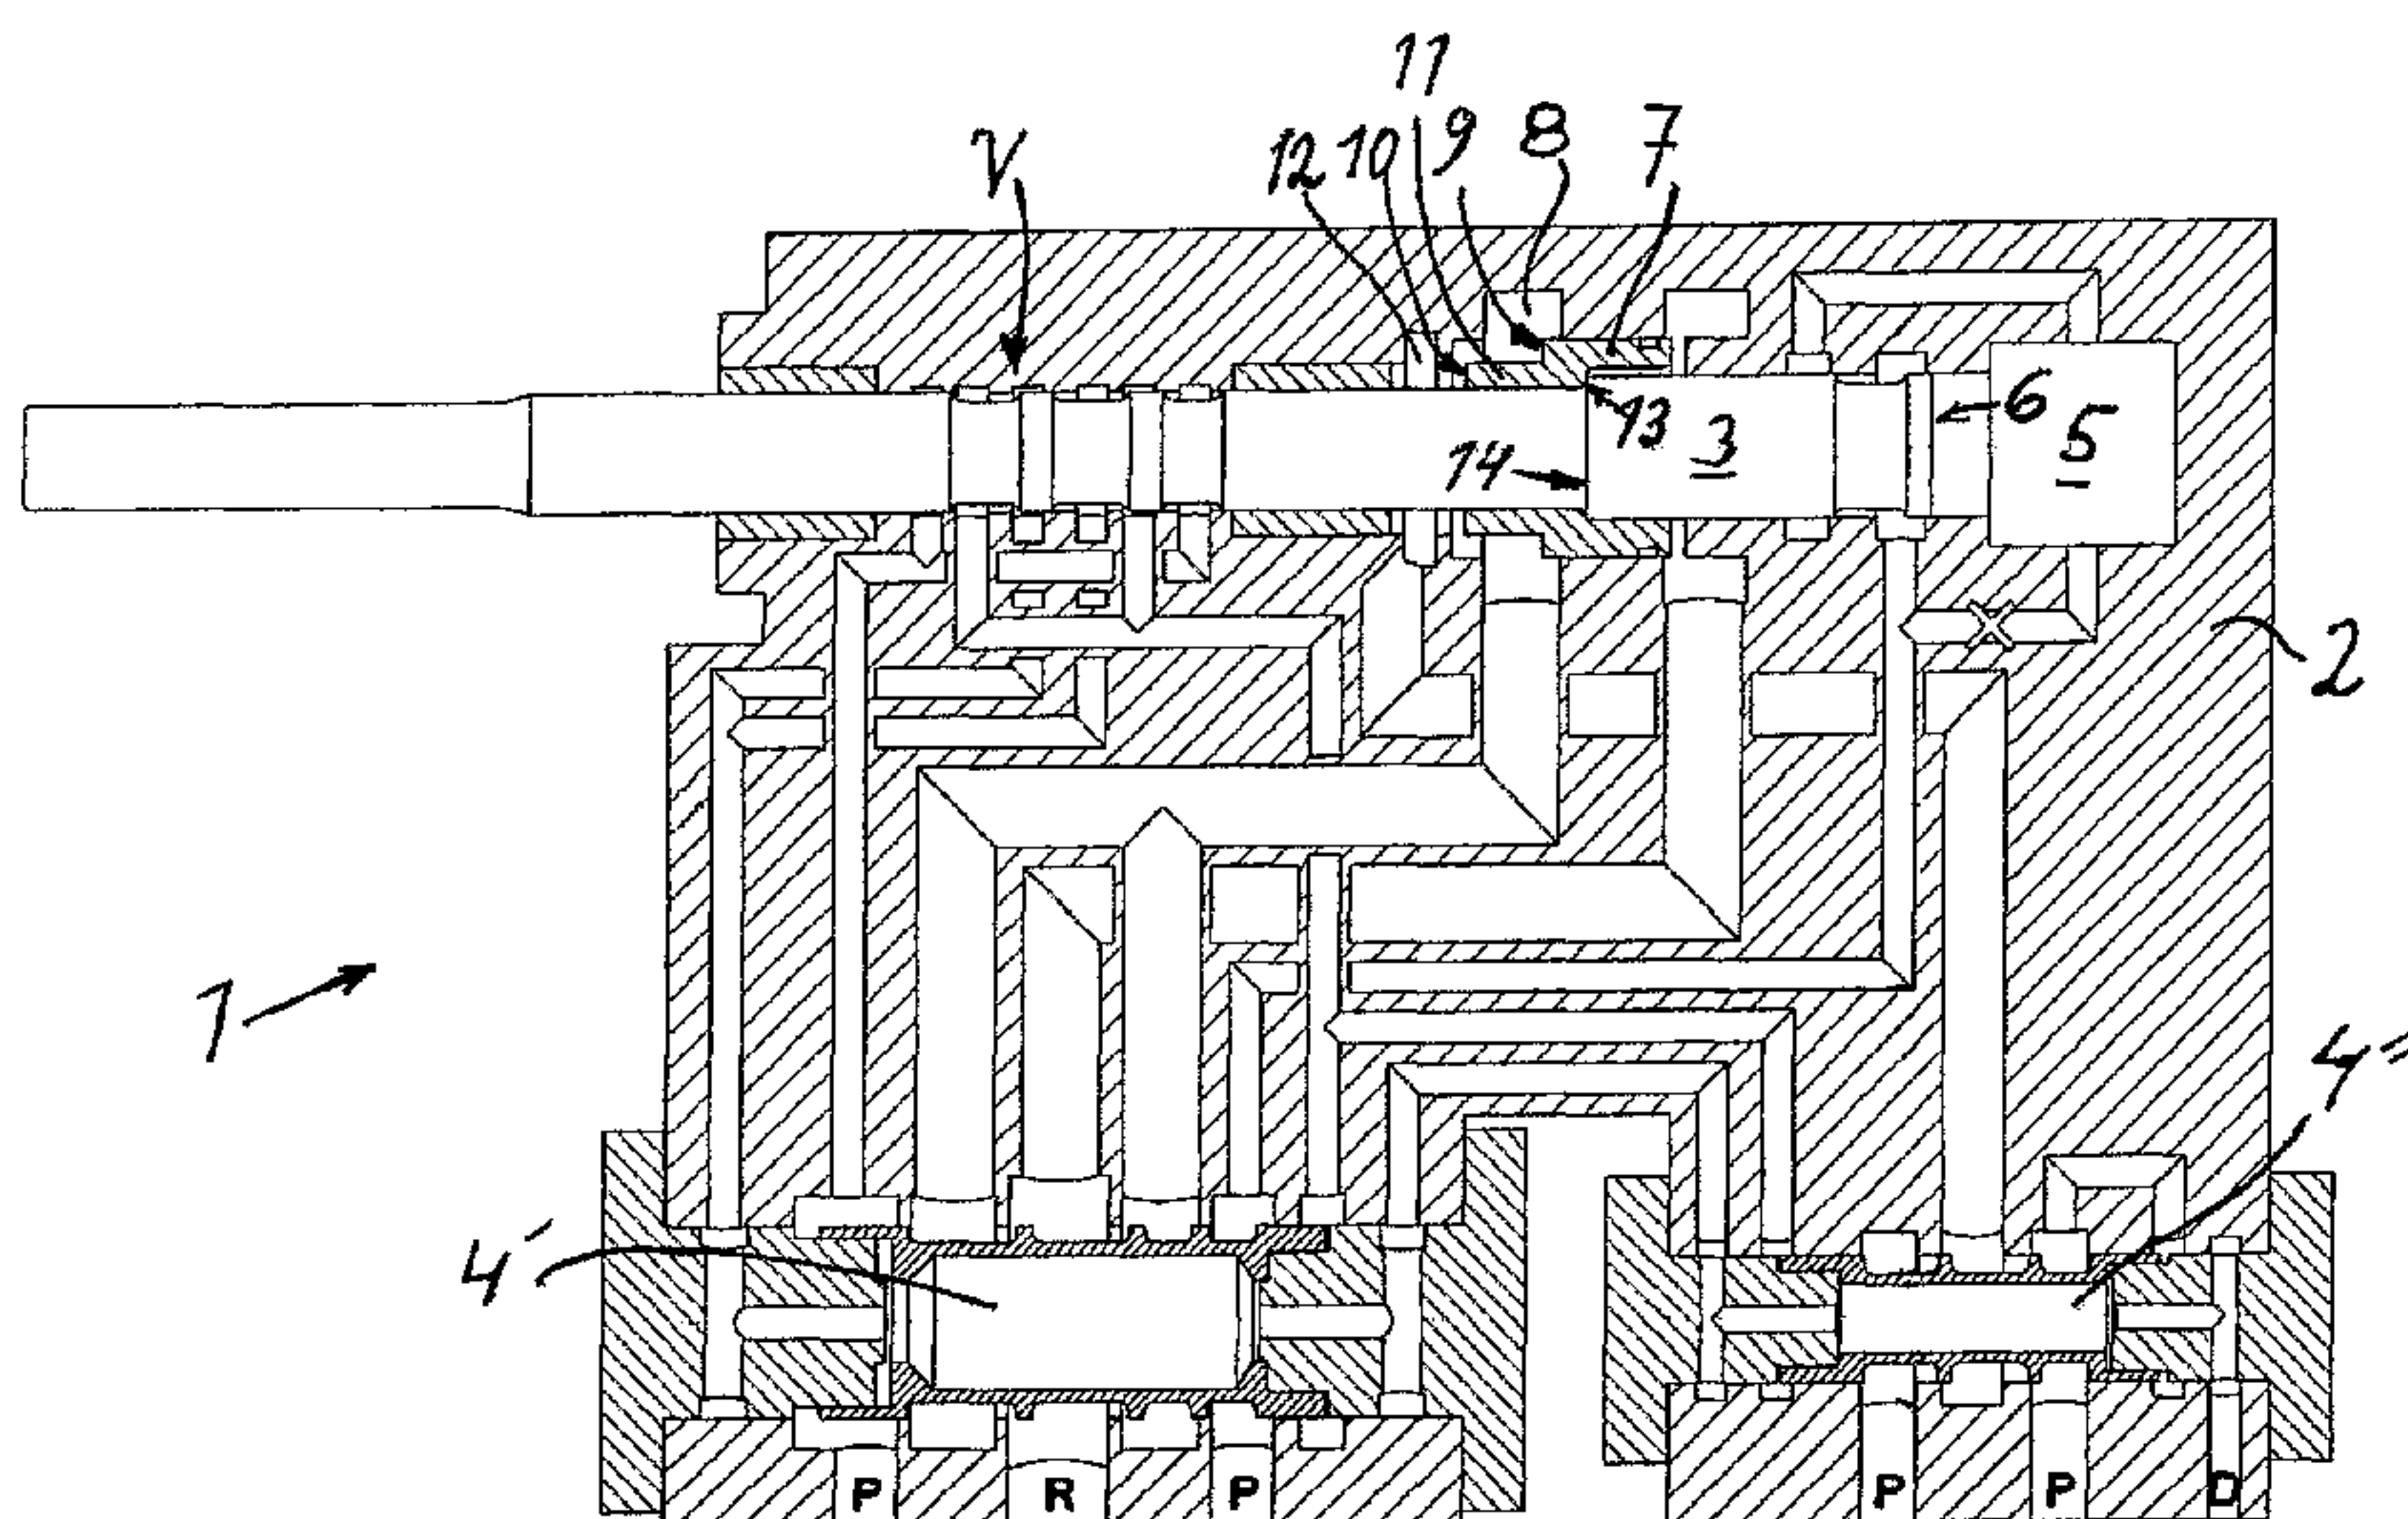

(57) Abstract: A percussion device (1) with a reciprocating percussion piston (3), includes a first chamber (5) that can be pressurized for forward driving of the percussion piston (3) and a second chamber (8) that can be periodically pressurized for back-driving of the percussion piston (3). The percussion device includes at least one driving piston (7) arranged for actuating the back-driving of the percussion piston (3) wherein a portion of said driving piston (7) is arranged to enter into the second chamber (8) for pressure actuating on a driving surface of the driving piston by pressure medium being present in this chamber in the direction of back-driving, wherein the driving piston (7) includes means for back-driving co-operation with the percussion piston (3), and wherein the driving piston (7) is free for axial movement with respect to the percussion piston (3), opposite the direction of back-driving. The invention also concerns a method and a rock drilling machine.

WO 2006/137775 A1

24280-90

1

**PERCUSSION DEVICE FOR A ROCK DRILLING MACHINE, METHOD FOR
ACHIEVING A RECIPROCATING PERCUSSION PISTON MOVEMENT AND ROCK
DRILLING MACHINE.**

5 **Field of the invention**

The invention concerns a percussion device for a rock drilling machine and a method for

achieving a reciprocating percussion piston movement.

The invention also concerns a

10 rock drilling machine including such a percussion device.

Background of the invention

From US 5,372,196 is previously known a percussion device of this kind. This percussion device includes a percussion

15 piston, which is reciprocatingly movable inside a machine housing. The reciprocating movement of the percussion piston

is controlled by a valve device, wherein the valve element is movable to and fro in the machine housing. At its rear end,

the machine housing has a space which is supplied with

20 pressure fluid and thus drives the percussion piston in the forward direction. A second chamber that can be pressurized is arranged for back-driving the percussion piston.

The known percussion device functions well and aims to obtain percussive frequencies in the magnitude of 150 Hz.

25 Recently raised desires of higher work rate and better economy in rock drilling have, however, resulted in the desire for yet higher percussive frequencies.

Features of some embodiments of the invention

30 Some embodiments

of the present invention may provide a development of a percussion device as initially defined that gives the possibility of operation at higher frequency.

24280-90

2

Some embodiments disclosed herein relate to percussion device for a rock drilling machine including a housing with a reciprocating percussion piston, the movement of which being controlled by a valve device, wherein the housing includes a first chamber that can be pressurized for forward driving of the percussion piston and a second chamber that can be periodically pressurized for back-driving of the percussion piston, wherein at least one driving piston arranged for actuating the back-driving of the percussion piston is arranged by the percussion piston, wherein a portion of said driving piston is arranged to enter into the second chamber for pressure actuating on a driving surface of the driving piston by pressure medium being present in this chamber in the direction of back-driving, wherein said driving piston includes an engagement surface for back-driving co-operation with an actuating surface on the percussion piston, wherein said driving piston is free for axial movement with respect to the percussion piston, opposite the direction of back-driving, from a position of engagement between the engagement surface and the actuating surface, and wherein - that said driving piston includes a cushioning portion for co-operation with a cushioning chamber in the housing after a performed impact by the percussion piston, wherein the percussion piston is surrounded by the driving piston at a distance from the first chamber, and the cushioning chamber is connected to a pressure medium source for regaining energy emitted during cushioning.

Some embodiments disclosed herein relate to method for obtaining a reciprocating percussion piston movement, wherein a first chamber is pressurized for forward driving of a

24280-90

2a

percussion piston and a second chamber is periodically pressurized for back-driving of the percussion piston, wherein the percussion piston is back-driven by means of at least one driving piston which is arranged at the percussion piston, 5 wherein pressure medium in the second chamber is brought to pressure actuate the driving piston in the back-driving direction, wherein the driving piston during back-driving establishes a back-driving co-operation with the percussion piston, and wherein the driving piston moves axially freely 10 with respect to the percussion piston, opposite to the direction of back-driving, from a position of said back-driving co-operation, and wherein said driving piston by means of a cushioning portion co-operates with a cushioning chamber in the housing after a performed impact by the percussion piston, 15 wherein the driving piston during back-driving establishes a back-driving co-operation with the percussion piston at a distance from the first chamber, and energy emitted during cushioning the cushioning chamber is regained in a pressure medium source.

20 By providing a driving piston, having a driving area for actuation by pressure fluid in the second chamber, that can be made as great as desired, and in particular greater than a corresponding actuating surface on the percussion piston itself, the possibility is provided for increased back-driving 25 speed and thereby increased percussion frequency.

Further, by the driving piston being separate, which in this connection means free for axial movement with respect of the percussion piston after that the percussion piston has performed its impact on a drill shank, it is avoided that an

24280-90

2b

unfavourably shaped stress wave is produced in the drilling steel. In particular it is avoided that a stress wave peak is formed, which could be operationally unfavourable since it would bring along undesired strain peaks in the drilling steel.

- 5 The percussion piston can therefore according to the invention be constructed optimally for performing the impact itself, whereas the back-driving aspects are considered when constructing the driving piston.

- 10 A further advantage may be that the pressure in the second chamber can be chosen lower and that the percussion device still can have an essentially higher percussive frequency than a percussion device according to the background art.

- 15 With an arrangement according to the invention it is fully realistic to reach percussive frequencies of 300-500 Hz. Also other, particularly higher, percussive frequencies can, however, exist.

It is preferred that the driving piston includes a cushioning portion for co-operation with a cushioning chamber in the housing after performed impact of the percussion piston in order to obtain gentle cushioning of the driving piston after that the driving piston has ceased its co-operation with the percussion piston. In particular it is preferred that said cushioning chamber is connected to a pressure medium source for regaining energy emitted during cushioning by the increased pressure in the cushioning chamber being transmitted to said pressure medium source.

It is preferred that the first chamber is arranged to be pressurized to a permanent pressure. In particular the second chamber is periodically pressurized through the valve device. Through the arrangement with the driving piston, the relation between the driving area, pressure in the second chamber and pressure in the first chamber, can be chosen optimally in order to obtain a desired percussive frequency.

Corresponding advantages are obtained in a method and a rock drilling machine according to the invention.

Brief description of drawings

The invention will now be described in more detail by way of embodiments and with reference to the annexed drawings, wherein:

Fig. 1 diagrammatically shows a percussion device according to the invention with the percussion piston in a first position,

Fig. 2 shows the percussion device in Fig. 1 with the percussion piston in a second position, and

Fig. 3 diagrammatically illustrates a method according to the invention by means of a block diagram.

Description of embodiments

A percussion piston 1 shown in Fig. 1 includes, inside a housing 2, a reciprocatingly movable percussion piston 3 which with a rear pressure surface 6 is actuated by the pressure of pressurized fluid in a first chamber 5 in a forward direction of the percussion piston 3 for acceleration before performing an impact against a tool (not shown).

At a distance from the first chamber, the percussion piston 3 is surrounded by a driving piston 7, which with a driving surface including a first driving area 9 and a second driving area 10 is actuated by the pressure of a pressurized fluid in a second chamber 8 for back-driving the percussion piston 3 after a performed impact. For that purpose, the driving piston 7 has a ring-shaped engagement surface 13, which in a back-driving position co-operates with an actuating surface 14 on the percussion piston 3 for displacing the percussion piston 3 in backward direction, to the right as seen in Fig. 1.

Further, the driving piston 7 includes a cushioning portion 11, which in an advanced position of the driving piston 7 enters a cushioning chamber 12 in such a way that fluid that is enclosed inside this cushioning chamber 2 exerts a cushioning force on the second driving area 10 of the driving piston 7.

The first chamber 5 can be permanently pressurized, whereas the second chamber 8 can be periodically pressurized over the main valve 4' of the percussion device 1 in such a way that is per se previously known, whereby the valve element of the main valve 4' is controlled by the position of the percussion piston 3, which over a valve portion V on the percussion piston controls the valve element of the main valve 4' for pressurising and evacuating, respectively, of the second chamber 8.

Fig. 2 shows the percussion device 1 with the percussion piston 3 in a second position immediately after having performed an impact against a tool (not shown). In the position shown in Fig. 2, the driving piston 7 has been displaced so far in the percussion direction that its engagement surface 13 has left the contact with the actuating surface 14 of the percussion piston 3. The driving piston 7 has thus no axial contact with the percussion piston 3 in this position. With its cushioning portion 11 the driving piston 7 now enters the cushioning chamber 12, whereby its kinetic energy is being regained by the increased pressure of fluid being present in the cushioning chamber 2 being supplied to a pressure source over a regain channel 15 and auxiliary valve 4''.

By the shown arrangement with a separate driving piston 7 which is free from the percussion piston 3 in connection with the latter performing its percussion movement, a disadvantageous stress wave configuration is avoided which otherwise would occur with a correspondingly added form to a percussion piston.

The method according to the invention for achieving a reciprocating percussion piston movement is diagrammatically illustrated in Fig. 3 as a block sequence.

Position 20 indicates the start of the sequence.

Position 21 indicates pressurising the first chamber 5 for the forward driving of percussion piston 3. This can be performed by essentially direct connection to a system pressure. (Mode 1).

Position 22 indicates evacuating pressure fluid in the second chamber 8 and thereby initiating a percussion movement of the percussion piston 3.

Position 23 indicated performing the percussion movement. The driving piston 7 now follows the percussion piston 3 in

the forward direction until the impact has been completed. Thereafter the driving piston 7 moves axially freely with respect of the percussion piston 3 in the percussion direction.

5 Position 24 indicates the entering of the driving piston 7 with a cushioning portion 11 into a cushioning chamber 12 for cushioning its axial movement and possibly also for regaining the kinetic energy of the driving piston 7.

 Position 25 indicates the stop of the sequence.

10 In a modified sequence it is provided that a connection to the first chamber can be blocked. This way is ensured a considerable pressure increase in the first chamber during the back-driving of the percussion piston. This pressure increase is as an example in the magnitude 3 times the system pressure.
15 It is thus to be understood that other increase rates can exist.

 The invention can be modified within the scope of the following claims. The driving piston as well as the percussion piston can be constructed otherwise with differently formed
20 mutual means for achieving back-driving connection. In a modified driving piston, a specific thinned cushioning portion is missing. The driving piston can thus have unchanged section along its axial extension. It is also possible to have the driving piston constructed otherwise than as a sleeve. It can
25 also be possible to have a plurality of driving pistons with suitable design distributed around the percussion piston.

 The invention makes it possible to provide percussion devices with slender percussion pistons that are well shaped for their impact operation and still have powerful means for
30 effective and fast back-driving of the percussion piston, whereby the aim of higher percussive frequency can be reached with relatively simple and cost efficient measures.

It is not necessary for the invention that the kinetic energy of the driving piston is regained in the manner that is described above even if this is preferred, i.a. because it contributes to better operating economy.

5 The energy loss occurring because the mass of the driving piston is not contributing to the impact energy at impact, can because of this aspect be regained by supplying the increased pressure in the cushioning chamber directly to the pressure system. More specifically it is regained through an
10 accumulator (not shown in the figures) which is connected to the pressure system. The valve 4'' I Figs. 1 and 2 receives in the shown embodiment a signal from the valve V to open in order to free the connection between the cushioning chamber 12 and the system.

15 Other arrangements for obtaining the movement of the driving piston can also come into question. The valve arrangement for controlling the reciprocating movement can be constructed otherwise, for example by initiating a valve movement in any other way than through a valve portion V on
20 the percussion piston.

24280-90

8

CLAIMS:

1. Percussion device for a rock drilling machine including a housing with a reciprocating percussion piston, the movement of which being controlled by a valve device, wherein
5 the housing includes a first chamber that can be pressurized for forward driving of the percussion piston and a second chamber that can be periodically pressurized for back-driving of the percussion piston, wherein at least one driving piston arranged for actuating the back-driving of the percussion
10 piston is arranged by the percussion piston, wherein a portion of said driving piston is arranged to enter into the second chamber for pressure actuating on a driving surface of the driving piston by pressure medium being present in this chamber in the direction of back-driving, wherein said driving piston
15 includes an engagement surface for back-driving co-operation with an actuating surface on the percussion piston, wherein said driving piston is free for axial movement with respect to the percussion piston, opposite the direction of back-driving, from a position of engagement between the engagement surface
20 and the actuating surface, and wherein - that said driving piston includes a cushioning portion for co-operation with a cushioning chamber in the housing after a performed impact by the percussion piston, wherein
- the percussion piston is surrounded by the driving piston at
25 a distance from the first chamber, and
- the cushioning chamber is connected to a pressure medium source for regaining energy emitted during cushioning.

24280-90

9

2. Percussion device according to claim 1, wherein the driving piston is sleeve-shaped and arranged co-axially with and on the outside of the percussion piston.

3. Percussion device according to claim 1 or 2, wherein
5 said engagement surface and actuating surface include ring-shaped surfaces.

4. Percussion device according to claim 1 or 3 and in dependence of claim 2, wherein the driving piston has a diameter which exceeds the diameter of the percussion piston.

10 5. Percussion device according to any one of claims 1-4, wherein the first chamber is constructed to be pressurized to an essentially constant pressure.

6. Percussion device according to any one of claims 1-4, wherein the first chamber is arranged for obtaining a
15 considerable pressure increase during the back driving of the percussion piston.

7. Percussion device according to any one of claims 1-6, wherein a pressure medium conduit is drawn to the first chamber for maintaining a desired pressure.

20 8. Percussion device according to any one of claims 1-7, wherein the second chamber can be periodically pressurized through a valve device.

9. Percussion device according to any one of claims 1-8, wherein the first chamber is arranged to receive a rear end of
25 the percussion piston, as seen in an impact direction against a tool.

24280-90

10


10. Method for obtaining a reciprocating percussion piston movement, wherein a first chamber is pressurized for forward driving of a percussion piston and a second chamber is periodically pressurized for back-driving of the percussion piston, wherein the percussion piston is back-driven by means of at least one driving piston which is arranged at the percussion piston, wherein pressure medium in the second chamber is brought to pressure actuate the driving piston in the back-driving direction, wherein the driving piston during back-driving establishes a back-driving co-operation with the percussion piston, and wherein the driving piston moves axially freely with respect to the percussion piston, opposite to the direction of back-driving, from a position of said back-driving co-operation, and wherein said driving piston by means of a cushioning portion co-operates with a cushioning chamber in the housing after a performed impact by the percussion piston, wherein

- the driving piston during back-driving establishes a back-driving co-operation with the percussion piston at a distance from the first chamber, and

- energy emitted during cushioning the cushioning chamber is regained in a pressure medium source.

11. Method according to claim 10, wherein the first chamber receives a considerable pressure increase during the back-driving of the percussion piston.

12. Rock drilling machine including a percussion device according to any one of claims 1-9.

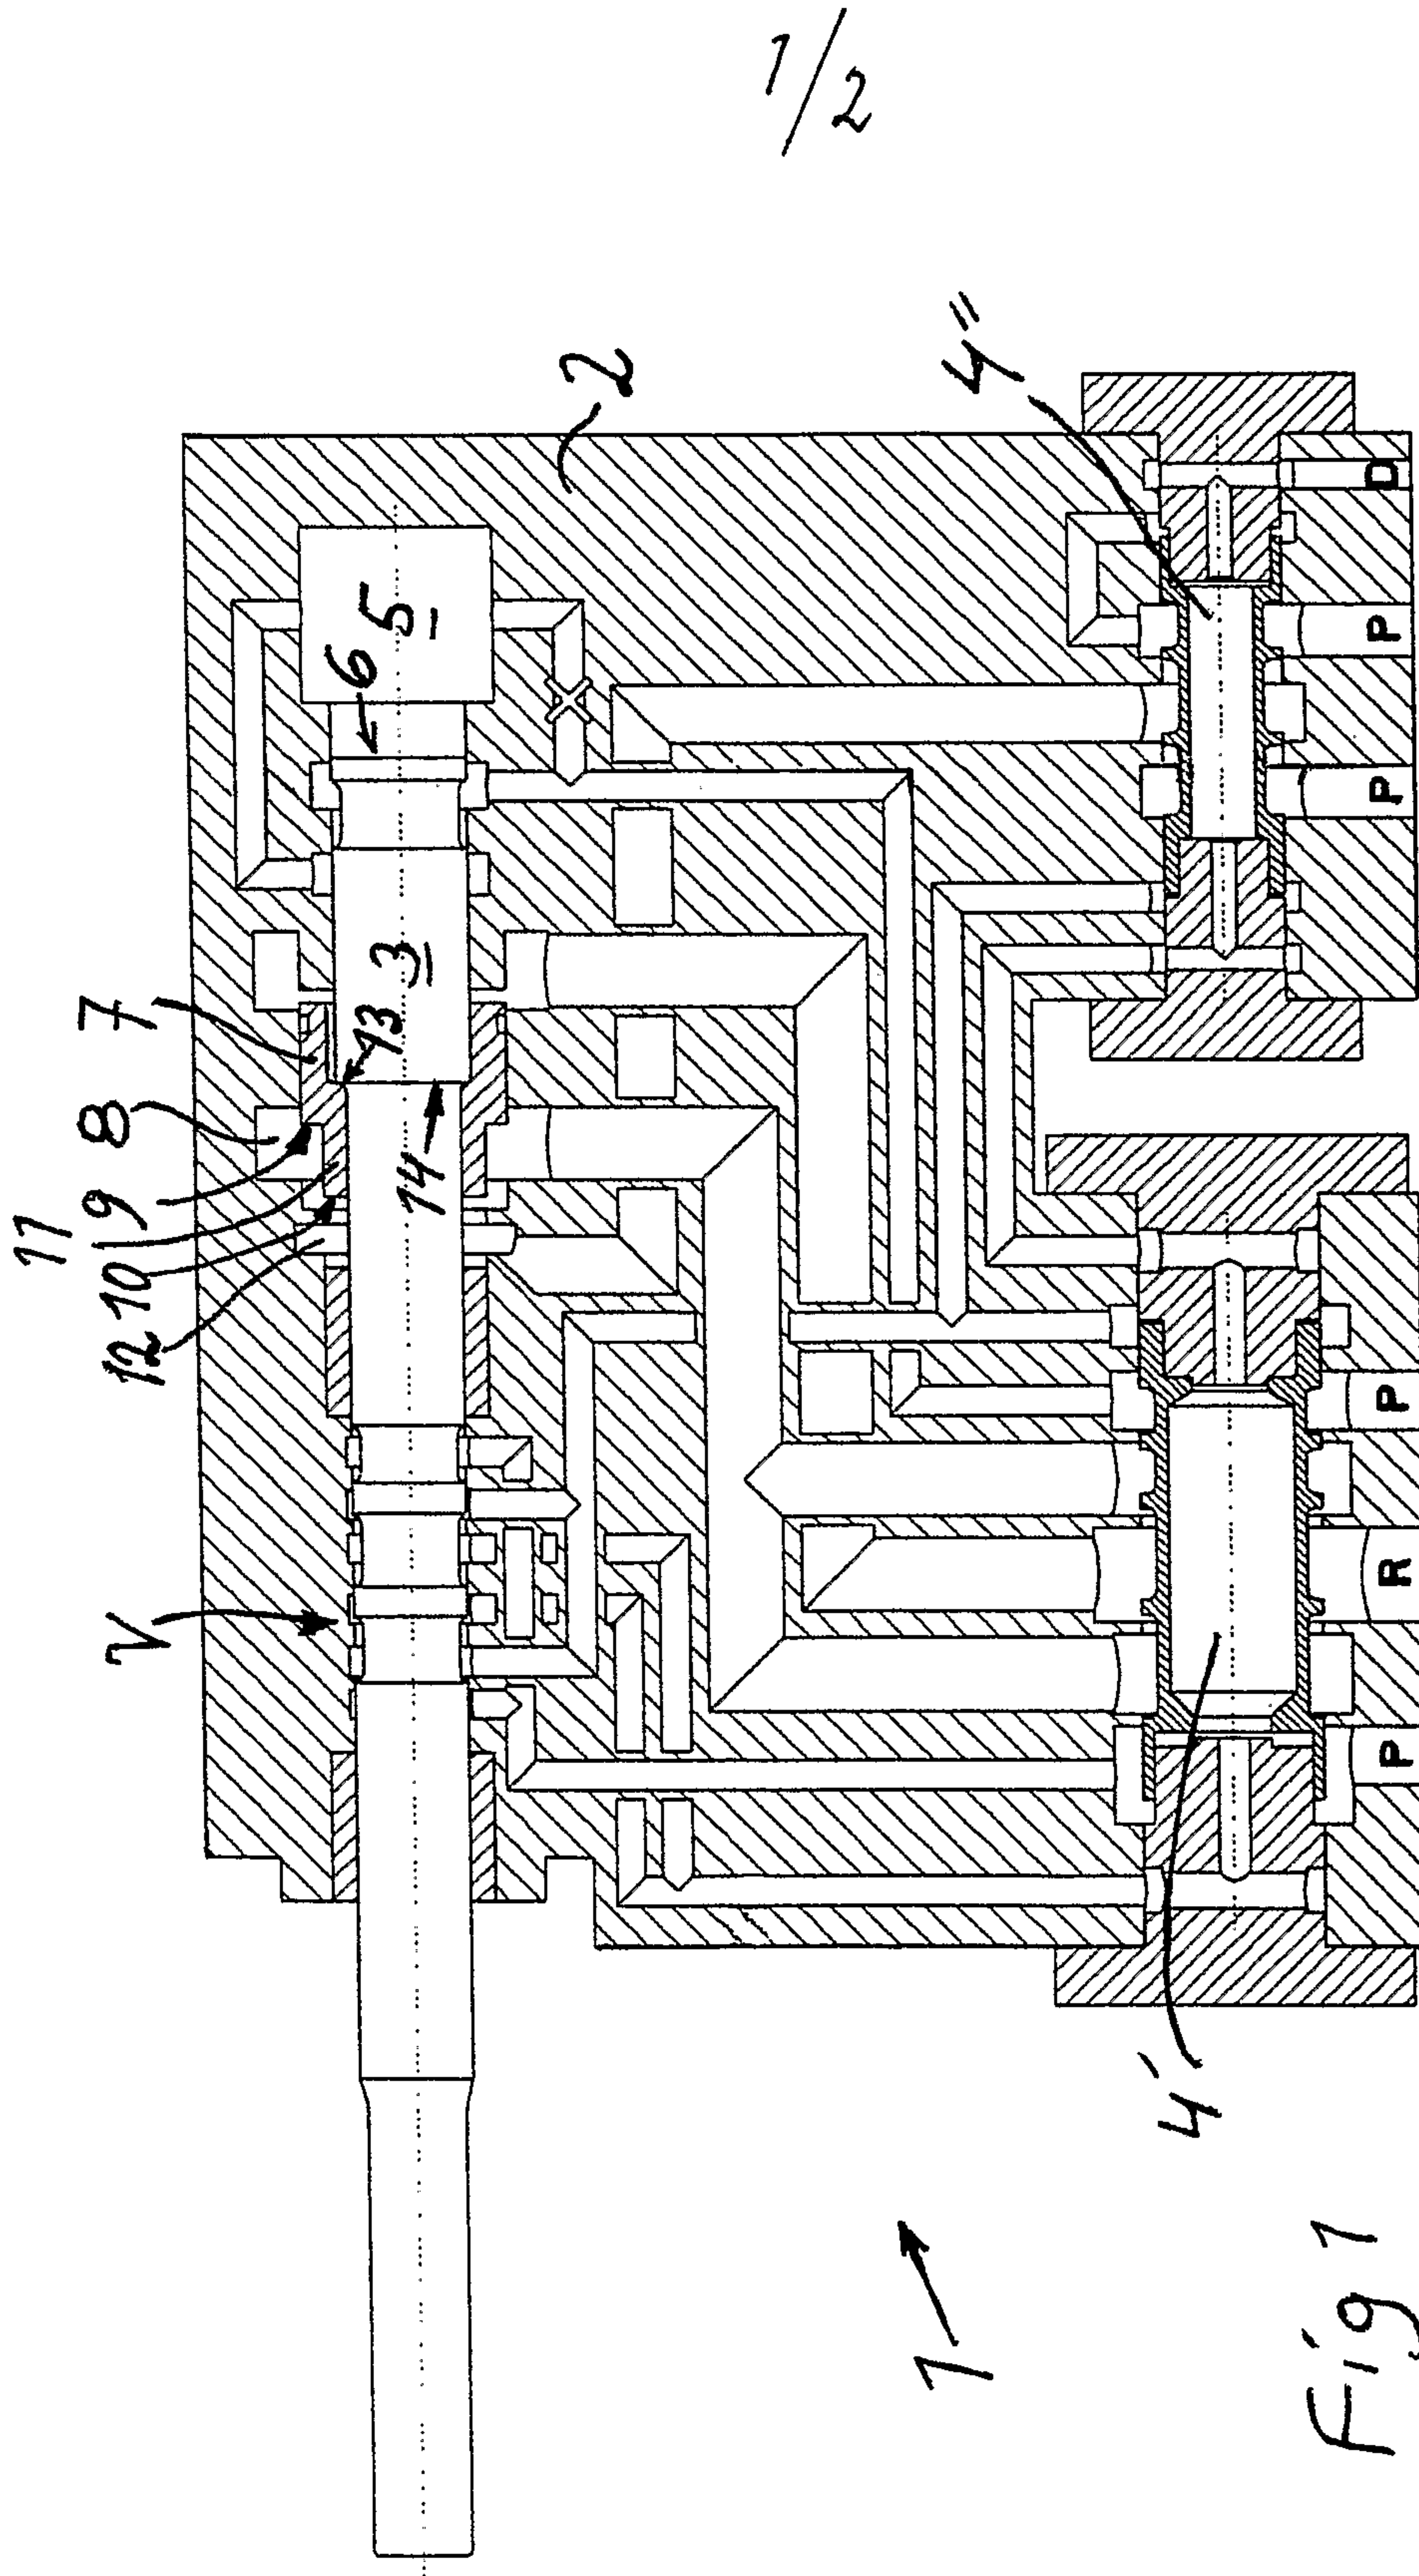

2/2

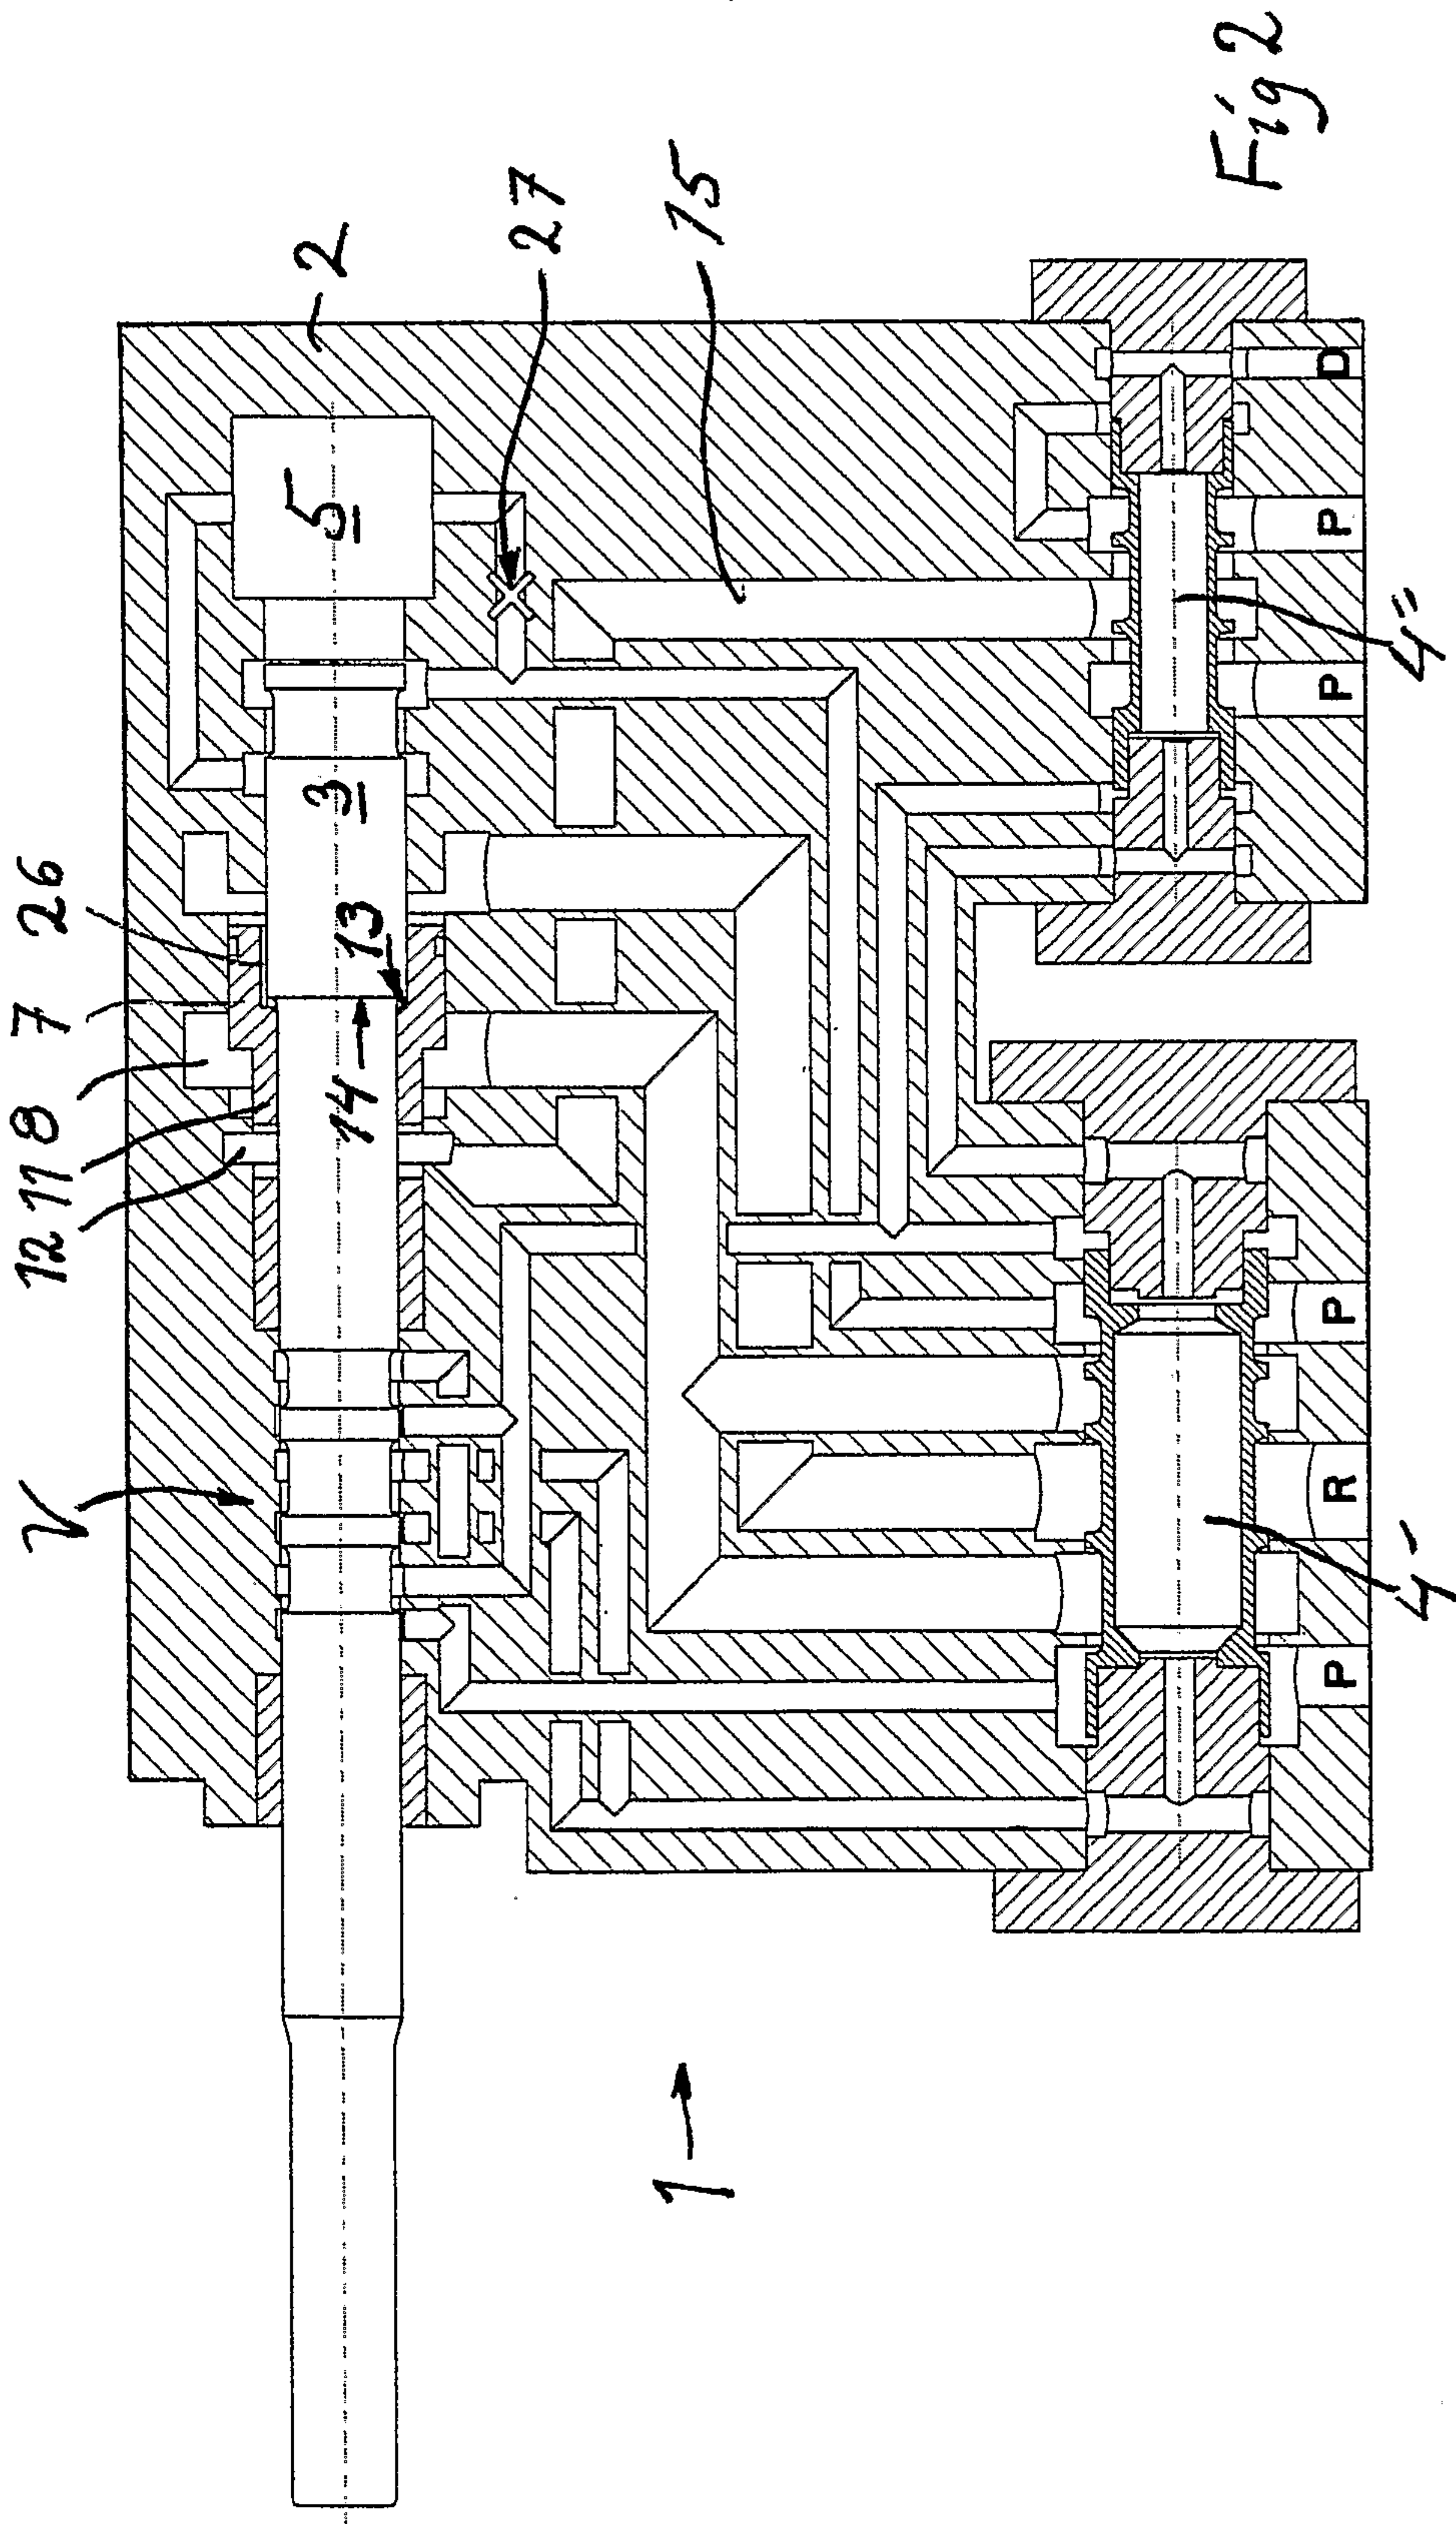


Fig 2

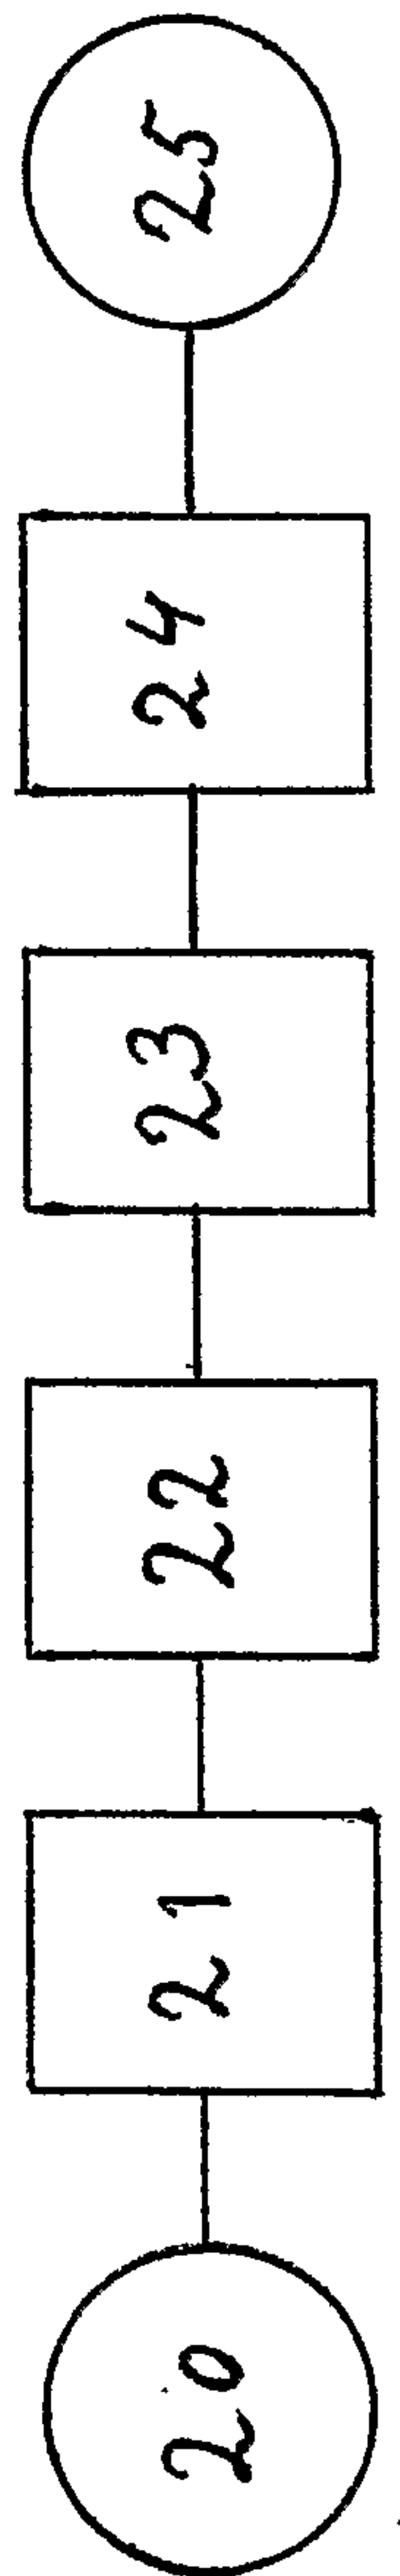


Fig 3

