INSTRUCTIONS

(a) If Convention application insert "Convention"

(a) Convention

AUSTRALIA 615958

Patents Act

(b) Delete one

APPLICATION FOR A (b) STANDARD/~~PETTY~~ PATENT

(c) Insert FULL name(s) of applicant(s)

~~I~~/We (c) L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE

(d) Insert FULL address(es) of applicant(s)

of (d) 75, quai d'Orsay - 75321 PARIS CEDEX 07 (FRANCE)

(e) Delete one

hereby apply for the grant of a (e) Standard/~~Petty~~ Patent for an invention entitled

(f) Insert TITLE of invention

(f) " PROCESS FOR HEAT TREATMENT UNDER A GASEOUS ATMOSPHERE CONTAINING NITROGEN AND HYDROCARBON "

(g) Insert "complete" or "provisional" or "petty patent"

which is described in th. accompanying (g) complete specification.

(Note: The following applies only to Convention applications)

Details of basic application(~~s~~)

(h) Insert number, country and filing date for the/or each basic application

Application No.	Country	Filing Date
(h) 87 15.860	FRANCE	November 17, 1987

Address for Service: PH.LLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia 3000

(i) Insert date of signing

Dated (i) October 12, 1988

(j) Signature of applicant(s) (For body corporate see headnote*)

(k) Corporate seal if any

(k)

(j) L'AIR LIQUIDE
Société Anonyme pour l'Etude et l'Exploitation des Procédés Georges Claude
Jacques R. BEGHAIN
General Counsel
75, QUAI D'ORSAY, 75
75321 PARIS CEDEX 07
(France)

Note: No legalization or other witness required

PHILLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia

P17/2/83

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS
(a) Insert "Convention" if applicable
(b) Insert FULL name(s) of applicant(s)

In support of the (a) convention application made by
(b) L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE

(c) Insert "of addition" if applicable
(d) Insert TITLE of invention

(hereinafter called "applicant(s)" for a patent (c) for an invention entitled (d)

" PROCESS FOR HEAT TREATMENT UNDER A GASEOUS ATMOSPHERE CONTAINING NITROGEN AND HYDROCARBON "

(e) Insert FULL name(s) AND address(es) of declarant(s) (See headnote*)

I/We (e) Jacques R. BEGHAIN

of L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE - 75, quai d'Orsay - 75321 PARIS CEDEX 07 (FRANCE)

do solemnly and sincerely declare as follows:

1. I/We am/are the applicant(s).

(or, in the case of an application by a body corporate)

1. I am/We are authorized to make this declaration on behalf of the applicant(s).
2. I am/We are the actual inventor(s) of the invention

(or, where the applicant(s) is/are not the actual inventor(s))

2. (f)

(f) Insert FULL name(s) AND address(es) of actual inventor(s)

Pascal BALDO of 6, avenue Georges Clémenceau - 92330 SCEAUX (FRANCE);

Eric DUCHATEAU of 28, rue Borgnis Desbordes - 78000 VERSAILLES (FRANCE)

is/are the actual inventor(s) of the invention and the facts upon which the applicant(s) is/are entitled to make the application are as follows:

(g) Recite how applicant(s) derive(s) title from actual inventor(s) (See headnote**)

(g)

The applicant is the assignee of the invention from the actual inventors.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

3. The basic application(s) for patent or similar protection on which the application is based is/are identified by **country, filing date, and basic applicant(s)** as follows:

(h) Insert country, filing date, and basic applicant(s) for the/or EACH basic application

(h)

FRANCE
November 17, 1987
BY L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE

4. The basic application(s) referred to in paragraph 3 hereof was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.

(k) Insert PLACE of signing
(l) Insert DATE of signing

Declared at (k) PARIS, October 12, 1988

Dated (l)

L'AIR LIQUIDE
Société Anonyme pour l'Etude et l'Exploitation des Procédés Georges Claude
75, QUAI D'ORSAY, 75
75321 PARIS CEDEX 07

(m) Signature(s) of declarant(s)

Jacques R. BEGHAIN
General Counsel

Note: No legalization or other witness required

To: The Commissioner of Patents (France)

P18/7/78

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia

(12) PATENT ABRIDGMENT (11) Document No. AU-B-24965/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 615958

(54) Title
HEAT TREATMENT UNDER A CONTROLLED PROTECTIVE ATMOSPHERE

International Patent Classification(s)
(51)[4] C21D 011/00 C21D 001/26 C21D 001/76 C21D 009/08

(21) Application No. : 24965/88 (22) Application Date : 09.11.88

(30) Priority Data

(31) Number (32) Date (33) Country
87 15860 17.11.87 FR FRANCE

(43) Publication Date : 18.05.89

(44) Publication Date of Accepted Application : 17.10.91

(71) Applicant(s)
L'AIR LIQUIDE SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE

(72) Inventor(s)
PASCAL BALDO; ERIC DUCHATEAU

(74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000

(56) Prior Art Documents
JP 59/001626
AU 531424 56393/80 C26D 1/18 1/74 C23C 8/20 8/30 11/12 11/18
US 2815305

(57) Fig. 2 shows the diagram of the principle of an atmosphere control whereby the process of the invention may be carried out. The infrared analyser 1 has for function to analyze the residual contents of CH_4 and CO; the temperature is measured by a thermocouple 2. The analyzers and the thermocouple are connected to a computer 4 which periodically receives the temperature of the gaseous mixture and of the values of the residual concentrations of CH_4 and CO. The equation F=f (T, CH_4, CO, H_2O) stored in the memory of the computer permits, with the measurements of T, CH_4, and CO, calculating the dew point DP_s which gives a flow equal to the set flow. This set dew point DP_s is compared with the value of the dew point DP_m measured in the furnace by a hygrometer 3. The error signal is sent into a control of type PID which controls two electrically-operated valves 5 and 6 and calculates their respective opening times. The table of the distribution of the nitrogen and the hydrocarbon C_xH_y operates in accordance with a double flow, a low flow, which may be zero and a high flow. When the valves 5 and 6 are closed, the low flows of nitrogen and C_xH_y are controlled by means of valves 7 and 8. It is possible to adjust for a

.../2

low flow of nitrogen the proportion of C_xH_y injected to obtain a set residual content of CH_4. When the valves 5 and 6 are opened, complementary flows of nitrogen and hydrocarbon C_xH_y are adjusted by the valves 9 and 10. It is then possible to control the proportion of C_xH_y injected for obtaining the set residual content of CH_4 for a high nitrogen flow. The reading of the flows of nitrogen and C_xH_y is carried out by rotameters 11 and 12. The pressure reducers 13 and 14 permit regulating the pressure in the rotameters for a correct reading of the flows.

CLAIM

1. A process for heat treating a low alloy steel work piece, comprising heat treating said piece to a temperature greater than 600°C within a protective atmosphere in a furnace, and injecting N_2 and a hydrocarbon C_xH_y into the furnace, to control said atmosphere, said injection of N_2 and hydrocarbon C_xH_y being increased when the measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 and hydrocarbon C_xH_y being maintained when DP_m is equal to DP_s, and said injection of N_2 and hydrocarbon C_xH_y being reduced when DP_m is less than DP_s.

2. A process according to claim 1, wherein the flow of nitrogen and hydrocarbon is increased or decreased as a function of the amplitude of the difference between the measured dew point DP_m and the set dew point DP_s.

3. A process according to claim 1, wherein the injection of N_2 and hydrocarbon C_xH_y is increased by changing from a first flow rate to a second flow rate, and the injection of N_2 and hydrocarbon C_xH_y is decreased by changing from the second flow rate to the first flow rate, the mean value of the flow rate being determined by the respective durations of the first and second flow rates, said first flow rate being a lower flow

.../3

rate than said second flow rate.

4. A process according to claim 3, wherein the ratio of the concentrations $(C_xH_y)/(N_2)$ in the first flow rate is different than the ratio of the concentrations $(C_xH_y)/(N_2)$ in the second flow rate.

5. A process according to claim 3 or claim 4, wherein the change from the first flow rate to the second flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen and the hydrocarbon is simultaneous.

6. A process according to any one of claims 3 to 5, wherein the change from the first flow rate to the second flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen is independent of that of the hydrocarbon.

18. A process for heat treating a low alloy steel work piece in a furnace to a temperature greater than 600°C, within a protective atmosphere containing N_2, CH_4 and CO not in a thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 0.5% and a residual content of CO lower than 2%, wherein N_2 and a hydrocarbon C_xH_y are injected into the furnace to control said atmosphere, which process comprises: varying the temperature and the concentrations of CO, CH_4 and H_2O at a first minimum value and at a second maximum value for said temperature and concentrations to determine corresponding carbon transfer flows $F = f(T, CO, CH_4, H_2O)$ which correspond to all temperature T and concentrations of CO, CH_4 and H_2O between the minimum and maximum values; measuring the instant values of temperature and concentrations of CO and CH_4, and measured dew point DP_m in the furnace; and injecting varying amounts of N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere dependent upon a calculated set dew point (DP_s) corresponding to a desired carbon transfer flow F_s and measured values of temperature and concentrations of CO and CH_4, said

.../4

injection of N_2 and hydrocarbon C_xH_y being either increased when the measured dew point DP_m in the furnace is greater than said dew point DP_s, or reduced when DP_m is less than DP_s, or maintained when DP_m is equal to DP_s.

AUSTRALIA

Patents Act

615958

COMPLETE SPECIFICATION
(ORIGINAL)

Class Int. Class

Application Number:
Lodged:

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

APPLICANT'S REFERENCE: 2962/222/071

Name(s) of Applicant(s):

L'Air Liquide, Societe Anonyme pour l'Etude et l'Exploitation des Procedes Georges Claude

Address(es) of Applicant(s):

75 Quai d'Orsay,
75007 Paris,
FRANCE.

Address for Service is:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Complete Specification for the invention entitled:

PROCESS FOR HEAT TREATMENT UNDER A GASEOUS ATMOSPHERE CONTAINING NITROGEN AND HYDROCARBON

Our Ref : 111990
POF Code: 1290/43509

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

PROCESS FOR HEAT TREATMENT UNDER A GASEOUS ATMOSPHERE CONTAINING NITROGEN AND HYDROCARBON

The present invention relates to a process for heat treatment of non-alloyed steels or low alloy steels at temperatures higher than 600°C, such as annealing, tempering, heating before hardening etc..., said treatment being carried out in an atmosphere containing at least nitrogen, a hydrocarbon C_xH_y, and possibly hydrogen, said atmosphere being produced by the injection of these products into the furnace.

In the heat treatment of low-alloy steels at temperatures higher than 600°C (annealing, tempering, heating before hardening, etc.), atmospheres of the type $N_2(+H_2)+C_xH_y$ are used for protecting the steel. In this type of treatment, the specification imposes a more or less large limitation of the decarburization. Now, it is found that atmospheres of the type described hereinbefore are never at thermodynamic equilibrium in the usual treatment times, which renders impossible any calculation of the activity of the carbon in the atmosphere and consequently any attempt to forecast the carburization or decarburization of the work pieces, and the a priori control of the treatment. At the present time, there is determined empirically for each furnace and each type of treatment an atmosphere composition which is such that the limitations of the specification may be respected. The process employed is often the following:

The experimenter arbitrarily chooses a flow and a composition of N_2, H_2, C_xH_y. He carries out a test and, as the case may be, modifies the flow and the quantity of C_xH_y in order to try to obtain a dew point which is lower than an empirical value (often - 25°C). The examination of the treated metallurgical samples shows him if his choices have been judicious. In the negative, he recommences and tries to obtain a lower dew point.

The process employed at the present time in practice results from a purely empirical procedure whose results are valid solely for a specific treatment.

These results depend on a multitude of parameters:

time, temperature, the grade of the steel, the instantaneous sealing of the furnace, the condition in which the furnace has been put, etc.

For each type of treatment and each furnace, the experimenter must recommence his tests. Any subsequent modification of a treatment may give bad metallurgical results.

The awkwardness of the procedure involves a real non-optimization of the flows and composition of the atmosphere which might render the use of synthetic gases of prohibitive cost, consequently leading to the use of endothermic or exothermic generators.

When an atmosphere of the endothermic type is used (essentially rich in N_2, CO, H_2) there is obtained a mixture of the following gases: N_2, CO, CO_2, H_2O, C_xH_y. This type of atmosphere permits a cementation of the work pieces, i.e. an enrichment with carbon on the surface of said work pieces. These gases are generally in thermodynamic equilibrium with respect to one another except with the hydrocarbons present (mainly CH_4). This situation is not prejudicial to a control of the atmosphere on the treated work pieces, based on the existence of a thermodynamic equilibrium, since these hydrocarbons cannot have a direct action on the metal in the presence of a large quantity of CO (for example $CO/CH_4 > 25$). Indeed, in this case the hydrocarbons do not participate in the transfer of the carbon from the gaseous mixture to the surface of the metal but solely react in a gaseous phase. Therefore, only the gases of the mixture in thermodynamic equilibrium govern the action of the atmosphere on the treated work pieces.

In the use of a mixture N_2 ($+H_2$) + C_xH_y for applications such as those described hereinbefore, the same gases are obtained but in different proportions ($0.05 < CO/CH_4 < 15$ - preferably CO/CH_4 is substantially equal to 1, the respective contents of CO and CH_4 being preferably in the neighbourhood of 1%). In this case, the hydrocarbon or hydrocarbons present may directly participate in the exchanges of carbon with the metal. It

is therefore no longer possible to consider solely the thermodynamic equilibriums for controlling the gas-metal carbon transfers.

The invention is based on an experimental knowledge of the laws of transfer of the carbon between the surface of a low-alloy steel and a gaseous mixture applied for the protection. The study of these laws has resulted in the conclusion that the surface flow of carbon (such as defined in FICK's 1st law) principally depends on the temperature and residual concentrations (or partial pressures) of the gases CO, CH_4, H_2O produced by the injection of a mixture N_2 + C_xH_y (and possibly H_2) into a furnace.

According to the present invention there is provided a process for heat treating a low alloy steel work piece, comprising heat treating said piece to a temperature greater than 600°C within a protective atmosphere in a furnace, and injecting N_2 and a hydrocarbon C_xH_y into the furnace, to control said atmosphere, said injection of N_2 and hydrocarbon C_xH_y being increased when the measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 and hydrocarbon C_xH_y being maintained when DP_m is equal to DP_s, and said injection of N_2 and hydrocarbon C_xH_y being reduced when DP_m is less than DP_s.

The present invention also provides a process for heat treating a low alloy steel work piece, comprising heat treating said piece in a furnace to a temperature greater than 600°C within a protective atmosphere containing N_2, CH_4 and CO, not in thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, and injecting N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere, said injection of N_2 and hydrocarbon C_xH_y being increased when a measured dew

point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 and hydrocarbon C_xH_y being maintained when DP_m is equal to DP_s and said injection of N_2 and hydrocarbon C_xH_y being reduced when DP_m is less than DP_s.

The present invention further provides a process for heat treating a low alloy steel work piece, comprising heat treating said piece in a furnace to a temperature greater than 600°C, within a protective atmosphere containing N_2, CH_4 and CO not in a thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, and injecting N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere, said injection of N_2 being increased when a measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 being reduced when DP_m is less than DP_s and said injection of hydrocarbon C_xH_y being increased when a measured value of residual CH_4 is less than a set value of residual CH_4, said injection of hydrocarbon C_xH_y being maintained when the measured value of residual CH_4 is equal to the set value of residual CH_4, and said injection of hydrocarbon C_xH_y being reduced when the measured value of residual CH_4 is greater than the set value of residual CH_4.

Furthermore, the present invention provides a process for heat treating a low alloy steel work piece in a furnace to a temperature greater than 600°C, within a protective atmosphere containing N_2, CH_4 and CO not in a thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, wherein N_2 and a hydrocarbon C_xH_y are injected into the furnace to control said atmosphere,

which process comprises: varying the temperature and the concentrations of CO, CH_4 and H_2O at a first minimum value and at a second maximum value for said temperature and concentrations to determine corresponding carbon transfer flows $F = f(T, CO, CH_4, H_2O)$ which correspond to all temperature T and concentrations of CO, CH_4 and H_2O between the minimum and maximum values; measuring the instant values of temperature and concentrations of CO and CH_4, and measured dew point DP_m in the furnace; and injecting varying amounts of N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere dependent upon a calculated set dew point (DP_s) corresponding to a desired carbon transfer flow F_s and measured values of temperature and concentrations of CO and CH_4, said injection of N_2 and hydrocarbon C_xH_y being either increased when the measured dew point DP_m in the furnace is greater than said dew point DP_s, or reduced when DP_m is less than DP_s, or maintained when DP_m is equal to DP_s.

Generally, the specification imposes a required or set surface flow of carbon (through the surface of the treated work piece) which represents the tolerance of the decarburization of the work pieces to be treated. This required or set flow F_s, the temperature, and the residual contents of CO and CH_4 measured in the furnace are entered in a calculator or computer which calculates from an established formula in accordance with experimental laws of the transfer of carbon at the gas-metal interface, a dew point (physical magnitude). This new required or set dew point (which is therefore variable, since it is a function of the composition of the atmosphere) is applied to a control of the PID (proportional, integral, derivative) type which acts on the flow of the atmosphere injected into the furnace. Preferably, this control is effected with two adjustable magnitudes which are the flow of nitrogen and the flow of hydrocarbon so that the residual content of CH_4 permits minimizing the flow of nitrogen.

A better understanding of the invention will be had

from the following non-limitative examples with reference to the drawings, in which:

Fig. 1 represents a curve of the profile of carbon concentration of a work piece after treatment,

Fig. 2 represents a diagram of a device for controlling a furnace.

The knowledge of the exchanges of carbon between the surface of a steel work piece and a gaseous mixture of a protection atmosphere $N_2 + C_xH_y$ (with a possible addition of H_2) is based on the stastistic utilization of the results of an experimental plan. This experimental plan permits measuring a profile of concentration of carbon in low-alloy steel work pieces (less than 5% metal alloy element) treated in a furnace and thus calculating a group of surface flows of carbon with atmospheres of a composition ranging within previously-determined limits. It is of course possible to employ any other method of calculating (other than an experimental plan) of the surface flows in a theoretical manner which is outside the scope of the present invention or by the use empirical formulae.

As an example, the limits of this experimental plan may be the following:

$680^{\circ}C < T < 1050^{\circ}C$

residual content of $CH_4 < 2.5\%$

residual content of $CO < 2.0\%$

$40ppm <$ residual content of $H_2O < 1600$ ppm

(namely $-50^{\circ}C <$ dew point $< -15^{\circ}C$)

residual content of hydrogen $< 5\%$

residual content of $CO_2<$ residual content of H_2O.

The residual content of a compound (or partial pressure of this compound) is intended to mean the content of this compound measured at a point of the furnace where the decomposition of the injected gases has already occurred.

The surface flow of carbon represents the unknown quantity on the surface in the solution of FICK's equations. Obtaining by successive approximations a carbon profile calculated by solving FICK's equations

MVS

superposable on the carbon profile obtained by metallurgical analysis of the treated work piece permits finding this unknown flow parameter. The expression of FICK's equations as a dimension is the following:

FICK's 1st law

$$J = -D\frac{(dc)}{(dx)_{x=0}}$$ (Equality of the flows of surface and surface diffusion)

FICK's 2nd law

$$\frac{dc}{dt} = -\frac{dF}{dx}$$

with F = diffusion flow = $-D\frac{dc}{dx}$

c: content of carbon (% mass)

x: distance to the surface

D: coefficient of diffusion of the carbon in the low-alloy steel work piece.

This experimental plan is carried out in the manner described by the following table:

Za	Zb	Zc	Zd
Temperature	CO	CH_4	H_2O
-	-	-	-
+	-	-	-
-	+	-	-
-	-	+	-
-	-	-	+
+	+	-	-
+	-	+	-
+	-	-	+
-	+	+	-
-	+	-	+
-	-	+	+
+	+	+	-
+	+	-	+
+	-	+	+
-	+	+	+
+	+	+	+

The signs + and - respectively designate for each factor Za, Zb, Zc, Zd (respectively the temperature and the residual contents of CO, CH_4, H_2O (dew point)) a high value Za, Zb, Zc, Zd and a low value Za, Zb, Zc, Zd such that $Za^- < Za < Za^+$ (etc...), with Za^- and Za^+ within the limits fixed hereinbefore for the parameters of the atmosphere (temperature and residual contents of CO, CH_4, H_2O).

Each line of the table gives the parameters of an atmosphere in which an experiment has been carried out. This experiment consists in reproducing this atmosphere in a furnace and maintaining a low-alloy steel sample therein during a given period of time. Thereafter, the spectrographic analysis of the treated work piece (spark spectrography, luminescent spectrography...) gives the

profile of concentration of carbon (Fig. 1 discrete points (A)); the latter is produced by the calculation (Fig. 1 continuous curve (B)) by solving FICK's equations which correspond to the experiment, by successive approximations of the value of the condition at the limit constituted by the surface of the treated steel. This value corresponds to the sought surface flow of the carbon at the gas-metal interface (hereinafter termed required or set flow F).

The application of YATES' algorithm (YATES F., "DESIGN AND ANALYSIS OF FACTORIAL EXPERIMENTS", IMPERIAL BUREAU OF SOIL SCIENCE (LONDON 1937)) to this experimental plan 2 leads to the expression of the following linear combination which analytically describes the surface flow F of carbon of a work piece as a function of the factors temperature and residual contents in the furnace of CH_4, CO and H_2O:

$$F = P_0 + P_1.X_a + P_2.X_b + P_3.X_c + P_4.X_d + P_5.X_a.X_b + P_6.X_a.X_c + P_7.X_a.X_d + P_8.X_b.X_c + P_9.X_b.X_d + P_{10}.X_c.X_d + P_{11}.X_a.X_b.X_c + P_{12}.X_a.X_b.X_d + P_{13}.X_a.X_c.X_d + P_{14}.X_b.X_c.X_d + P_{15}.X_a.X_b.X_c.X_d$$

$$Za = \frac{Za^- + Za^+}{2}$$

$$X_a = \frac{Za^+ - Za^-}{\frac{}{2}}$$

Xb, Xc and Xd being defined respectively in the same way relative to Zb^+, Zb^-; Zc^+, Zc^-; Zd^+, Zd^-; respectively. X_a, X_b, X_c, X_d are the reduced centered coordinates of the parameters of the atmosphere (temperature CO, CH_4, H_2O), between -1 and +1.

a represents the index of temperature T

b represents the index of CO

c represents the index of CH_4

d represents the index of H_2O

The coefficients Po to P15 of the linear combination are the mean effects of each factor and their

interactions. Mean effect is intended to mean, for each factor combination, the mean of the 16 responses weighted by the products of the levels +1 or -1 taken by the factors of the combination in each of the atmospheres relating to the responses.

The application of an analysis of the variance to the results of the experimental plan permits checking whether all the effects are significant. Those not significant are ignored.

The experimental plan may be carried out with any specimens of non-alloyed steel or low-alloy steel and permits determining the equation of the surface flow F of carbon which may be subsequently applicable to different types of work pieces to be treated in the furnace. The nature of the specimens of the experimental plan is not related to that of the work pieces subsequently treated in the furnace.

The surface flow of carbon is therefore a function of the temperature and the residual concentrations of CO, H_2O and CH_4 and this function comes from the utilization of the results of the aforementioned experimental plan.

With this equation, several types of control over the residual gases become possible.

The dew point is the magnitude which has the most effect on the flow of carbon. An increase in the dew point increases the decarburization of the work piece; a decrease in the dew point reduces the decarburization of the work piece.

On the other hand, it has been found that the action of the residual gases CO and CH_4 in the gaseous mixture is not univocal and may tend to increase or decrease the decarburization in different conditions.

In order to control the surface flow of carbon (carburization or decarburization or protection), the magnitude to be controlled is therefore the dew point.

The preferential mode of the control of the chosen atmosphere is the following:

The specification imposes a set flow F (carbon

through the surface of the work piece) which is entered in a calculator or computer; this set flow F_s is calculated as indicated hereinbefore.

The permanent analysis of the atmosphere of the furnace indicates the temperature and the residual contents of CH_4 and CO which are automatically recorded by the computer (together with the concentration of H_2O, i.e. the measured dew point DP_m).

The expression of the flow $F=f\ (T, CH_4, CO, H_2O)$ contained in the memory of the computer is applied for calculating the value of the dew point DP_s (equivalent to X_d when $F=F_s$) which would give a flow F equal to the set flow F_s. The set flow is therefore converted into a set dew point DP_s which varies with the composition of the atmosphere which is regularly sampled.

The value of the measurement of the dew point DP_m given by the permanent analysis of the atmosphere of the furnace is compared with the regularly calculated value DP_s, generally after each sampling. The result of this comparison causes, owing to the action of a control of the type PID,

- either the maintenance of the flow $N_2 + C_xH_y$ if $DP_s = DP_m$;
- or the increase of this flow if $DP_s < DP_m$;
- or the decrease of this flow if $DP_s > DP_m$.

It was found that it was possible to control the dew point by a variation of the flow of nitrogen. The nitrogen eliminates the water in the furnace by dilution (law of the type $c=c_o e^{(-dt/v)}$ with c_o the concentration of initial water, c the concentration of water at time t, d the gaseous flow, t the duration and v the volume of the furnace), without having a contrary effect. Varying the nitrogen flow therefore permits controlling the dew point of the furnace.

On the other hand, it was found that the dew point was not controlled by varying the flow of injected hydrocarbon C_xH_y. Indeed, the hydrocarbon reacts on the water and drys the furnace and forms water. These concurrent reactions do not permit a control of the

atmosphere by a variation of the flow of C_xH_y.

But the control of the nitrogen flow has an effect on the value of the dew point DP_s which represents the set flow F_s. Indeed, a variation in the flow of nitrogen injected into the furnace causes a dilution or a concentration of the residual contents of CH_4 and CO taken into account in the expression $F_s = f(T, CH_4, CO, H_2O)$ which serves to convert the set flow F_s into the dew point DP_s.

Consequently, this variation of the set dew point DP_s may be limited by imposing such conditions that the content of residual CH_4 varies but slightly as a function of the nitrogen flow.

For this purpose, two preferential solutions exist:

-A first solution consists in adjusting the proportions of C_xH_y as a function of the nitrogen flow so that a substantially constant residual CH_4 is obtained. For example, the proportions of C_xH_y will be determined for the low and high nitrogen flows and the intermediate nitrogen flows will be obtained by interpolation.

-A second solution consists in employing a control of the PID type of the concentration of residual CH_4 by imposing a set value for the concentration of residual CH_4. There may be found, with the flow equation:

$$F = f(T, CO, CH_4, H_2O)$$

a concentration of residual CH_4 which, for a given set flow F_s, permits calculating a maximum set dew point DP_s : controlling the atmosphere around this set value permits minimizing the flow of nitrogen injected into the furnace.

The fixing of this set value of residual CH_4 is effected either manually by the operator or preferably by calculation by the computer which searches the set value of the residual CH_4 which gives the highest calculated dew point.

In the case of a discontinuous furnace, it is preferable to put the latter previously in condition. It is possible, by the injection of hydrogen at a temperature

MB

lower than that at which the C_xH_y starts to react with the water, to put the furnace in such condition that it has the lowest possible amount of oxides in the furnace when the CH_4 is injected, which therefore reduces the risk of formation of water by reduction of C_xH_y.

Fig. 2 shows the diagram of the principle of an atmosphere control whereby the process of the invention may be carried out. The infrared analyser 1 has for function to analyze the residual contents of CH_4 and CO; the temperature is measured by a thermocouple 2. The analyzers and the thermocouple are connected to a computer 4 which periodically receives the temperature of the gaseous mixture and of the values of the residual concentrations of CH_4 and CO. The equation $F=f(T, CH_4, CO, H_2O)$ stored in the memory of the computer permits, with the measurements of T, CH_4, and CO, calculating the dew point DP_s which gives a flow equal to the set flow. This set dew point DP_s is compared with the value of the dew point DP_m measured in the furnace by a hygrometer 3. The error signal is sent into a control of type PID which controls two electrically-operated valves 5 and 6 and calculates their respective opening times. The table of the distribution of the nitrogen and the hydrocarbon C_xH_y operates in accordance with a double flow, a low flow, which may be zero and a high flow. When the valves 5 and 6 are closed, the low flows of nitrogen and C_xH_y are controlled by means of valves 7 and 8. It is possible to adjust for a low flow of nitrogen the proportion of C_xH_y injected to obtain a set residual content of CH_4. When the valves 5 and 6 are opened, complementary flows of nitrogen and hydrocarbon C_xH_y are adjusted by the valves 9 and 10. It is then possible to control the proportion of C_xH_y injected for obtaining the set residual content of CH_4 for a high nitrogen flow. The reading of the flows of nitrogen and C_xH_y is carried out by rotameters 11 and 12. The pressure reducers 13 and 14 permit regulating the pressure in the rotameters for a correct reading of the flows. The residual content of

CH_4 in the furnace may also be maintained constant by a PID control. The residual content of CH_4 (or the set residual content of CH_4) is imposed manually by the operator or produced by the computer for minimizing the flow of nitrogen injected into the furnace, as described before.

It will be observed that the device according to the invention comprises electrically operated valves 5 and 6 controlled by the computer 4 and manually operated valves 7, 8, 9 and 10. Indeed, it is desired, in accordance with the invention, to maintain a constant residual content of CH_4 in the atmosphere of the furnace. It has been found that this was not always possible when the flow of nitrogen and hydrocarbon C_xH_y injected into the furnace varied with a constant ratio $(C_xH_y)/(N_2)$. Consequently, it may be found in some cases of utility or necessary to be in a position to vary the ratio $(C_xH_y)/(N_2)$ to conserve under all circumstances a constant concentration of residual CH_4.

Two variants are possible according to the invention:

A first variant in which a value of residual CH_4 is fixed manually without control of the residual CH_4: for this purpose there is effected a first manual control of the low flow by means of valves 7 and 8, taking into account a prior calculation or an empirical estimation of the residual CH_4 to be obtained in the furnace. The control of the ratio $(C_xH_y)/(N_2)$ in the case of the low flow is terminated when the measured residual CH_4 reaches about the desired value. A second manual control of the high flows is then effected by means of the valves 9 and 10, as a function of the residual CH_4 to be maintained (as before). The control of the ratio $(C_xH_y)/(N_2)$ in the case of the high flow is terminated when the measured residual CH_4 reaches about the desired value. The ratios $(C_xH_y)/(N_2)$ are not necessarily the same for the low and high flows. However, they are controlled once and for all.

In this first variant, there is no control of the residual CH_4 (no set CH_4 - see the Figure).

MB

In this variant, the electrically-operated valves 5 and 6 are opened simultaneously.

-A second variant in which a set value "set CH_4" is fixed with which a second control loop is realized and controlled by the computer. the latter compares the measured value of the residual CH_4 with the set value:

if the residual CH_4 is less than the set CH_4: the computer orders an increase in the opening time of the valve 6 (increase in the flow of injected C_xH_y, since there is an increase in the duration of the high flow of C_xH_y);

- if the residual CH_4 = the set CH_4, the opening times are maintained;

- if the residual CH_4 > the set CH_4, the opening time of the valve 6 is reduced (and consequently the duration of the high flow is reduced).

The dew point is checked ($DP_m = DP_s$) in a similar manner in a single nitrogen channel by means of the electrically-operated valve 5 whose opening time is more or less long depending on whether the duration of the high flow of nitrogen must be increased or decreased.

The opening and closing of the two valves 5 and 6 are therefore no longer necessarily simultaneous.

EXAMPLE

There will be shown hereinafter the manner in which the invention is used when one is confronted with a technical problem posed by a user.

The user defines a specification from which are deduced the limits of the experimental plan defined hereinbefore so as to determine the flow equation which will then be stored in the memory of the computer. The aforementioned experimental plan is of course only one possible example of the determination of the flow equation. Any other simplified, approximate or theoretical means is of course possible. In particular, this equation may also be determined empirically or in a purely theoretical manner.

After this flow equation $F=f(T, CH_4, CO, H_2O)$, has been determined, the set flow F_s is determined which

represents a mean decarburization tolerance which is acceptable for the treatment of the work pieces of the user. This set flow is determined by successive approximations by solving FICK's equations. The computer then determines the set dew point DP_s (corresponding to the value X_d in the flow equation). The dew point DP measured in the furnace in which the work pieces are treated is then compared with the set dew point DP. There will be shown hereinafter why only an overall variation of the flow of nitrogen and hydrocarbon permits obtaining both the imposed flow F and a minimized flow of the atmosphere injected into the furnace.

The specification of the user imposes an atmosphere having the following compos'tion permitting the definition of parameters Za, Zb, Zc, Zd such as defined hereinbefore:

$900^{o}C$ < temperature < $925^{o}C$

0.2% < residual content of CO < 0.4%

0.5% < residual content of CH_4 < 1.0%

$-45^{o}C$ (70 ppm) < dew point < $-35^{o}C$ (220 ppm)

content of H_2 < 5%

residual content of CO_2 < residual content of H_2O

Experiments are carried out in accordance with the following table on discs of low-alloy steel of grade XC38 (1038) in a testing furnace which is generally different from the industrial furnace or furnaces in which the process according to the invention will be carried out (this is an advantage of the process according to the invention of not relating the control of the atmosphere to a particular type of furnace but solely to the concentration of certain substances of the atmosphere irrespective of the furnace). Each treatment of the work pieces has an identical duration and is usually on the order of one hour.

MTS

Temperature	CO	CH_4	H_2O	Flow of carbon $10^9.mol.cm^{-2}.s^{-1}$
-	-	-	-	-1.78
+	-	-	-	-1.79
-	+	-	-	-0.57
-	-	+	-	3.01
-	-	-	+	-7.12
+	+	-	-	-0.44
+	-	+	-	4.28
+	-	-	+	-8.52
-	+	+	-	1.73
-	+	-	+	-5.98
-	-	+	+	-3.58
+	+	+	-	2.93
+	+	-	+	-7.51
+	-	+	+	-4.51
-	+	+	+	-4.29
+	+	+	+	-4.95

The right column indicates the result of the calculation of the flow according to the previously given indications. For each experiment, a curve is drawn of the profile of the carbon measured on the treated work pieces and the corresponding flow is calculated, which is the solution of FICK's equations giving the same profile - see Fig. 1. By applying YATES' algorithm, the flow equation is in the present case:

$F = -2.51 + 1.75X_c - 0.51X_cX_b - (3.41 + 0.45x_a)Xd$
$(10.^9.mol.cm^{-2}.s^{-1})$

This equation is stored in the memory of the computer which will control the heat treatment process according to the invention by calculating the parameter Xd (dew point DP_s) from the values Xa, Xb and Xc measured in the furnace (or more precisely Za, Zb, Zc converted in the computer in to Xa, Xb, Xc) and from the imposed set flow F_s. The computer effects a sampling at regular intervals of time for measuring Xa, Xb and X^c. This sampling interval, which is generally fixed, is determined by experience for a given furnace.

The invention is carried out in respect of an annealing heat treatment of tubes of steel Xc 22 (1022) in a continuous roller furnace.

The decarburization tolerance accepted by the user for said tubes is characterized by a set flow which is such that $F_s = -3X10^{-9}$ $mol.cm^{-2}s^{-1}$ is a specification of non-recarburization and a partial decarburization acceptable at a thickness of 0.1 mm for a period of 30 minutes. This flow was calculated in accordance with the same procedure as that adopted for the flows of the experiment plan (it is the surface flow which is such that the experimental carbon profile of a tube is a solution of FICK's equations - see Fig. 1).

There is injected into the furnace a high flow of 100 Nm^3/h comprising 98.5% N_2 and 1.5% natural gas and a low flow of 50 Nm^3/h of a mixture of 98.8% nitrogen and 1.2% hydrocarbon (natural gas) to obtain 1% residual CH_4 (value fixed by the user - the aforementioned first variant). This corresponds to 98.8 Nm^3/h of N_2 and 1.2 Nm^3/h of C_xH_y at a high flow and 49.25 Nm^3/h of N_2 (valve 7) and 0.75 Nm^3/h of C_xH_y (valve 8) at a low flow. These two flows are those which are commanded by the control of the PID type (proportional, integral, derivative) in response to the information communicated thereto by the computer concerning the comparison of the set dew point DP_s and the measured dew point DP_m.

When DP_s is lower than DP_m, the total flow of nitrogen and natural gas is increased by activating the

MB

high flow of the PID control.

When $DP_s = DP_m$ the existing flow is maintained (high or low flow).

When DP_s is higher than DP_m, the total flow of nitrogen and natural gas is reduced by activating the low flow of the PID control.

In practice it is found that, under stabilized conditions, the high flow is injected about 70% of the time and the low flow about 30% of the time, namely a mean flow in the furnace on the order of 85 Nm^3/h. The treated work pieces satisfy the imposed specification, in particular as concerns the fixed maximum decarburization.

The following table gives a number of examples of situations noted in the course of the treatment of the aforementioned work pieces in the furnace and which illustrate the action of the control according to the process of the invention:

	Temperature (°C)	%CH_4	%CO	DP (°C) set	DP (°C) measured	F_9 (10^{-2} mol.cm^{-2}s^{-1})
A	910	0,7	0·3	- 38.5	- 38,5	-3,0
B	910	1.0	0,3	- 36,0	- 36.0	-3.0
C	910	1.0	0,3	- 36.0	- 35.0	-4.1
D	910	0,7	0.3	- 38.5	- 36,0	-5.1
E	910	1.0	0,3	- 36.0	- 36,0	-3,0
F	910	1.0	0,4	- 36,6	- 36.0	-3,5
G	910	1.0	0.4	- 36,6	- 36.6	-3,0

State A: measured in the furnace before optimization:

The user arbitrarily fixed a residual (CH_4) of 0.7%.

The measurement A indicates that the atmosphere is controlled, i.e. the measured dew point DP_m is equal to the set dew point DP_s. However, the computer indicates (flow equation) that the dew point is not maximum in the

MB

possible range of variation of the residual CH_4. It indicates a maximum for a residual (CH_4) = 1.0% (flow equation).

State B: the residual (CH_4) was fixed by the operator at 1.0%. The set dew point DP_s is maximum (-36^oC) - the atmosphere flow is reduced. It is minimum because the DP_s is maximum.

State C:

The measurement C was effected after the measurement B which represents a minimized stable state it was desired to obtain permanently. This measurement shows the occurrence of a disturbance in the atmosphere of the furnace (for example the introduction of work pieces to be treated, entry of air, etc.) since the measured dew point increases (-35^oC) representing an increase in the humidity of the atmosphere of the furnace. The control according to the invention will therefore act to induce a return to state B by a variation in the overall flow of the injected atmosphere (by acting on the high flow until state E, identical to state B, returns).

State D:

By way of comparison, there was attempted in the course of the treatment of the work pieces in the furnace a control by solely increasing the nitrogen flow.

In this case the residual (CH_4) is reduced by dilution. The set dew point DP_s diminishes (-38.5^oC), which results in an instability of the control: the control always seeks to catch up with the set DP_s by increasing the nitrogen flow.

This shows the necessity of a control concerning solely the overall flow of nitrogen and hydrocarbon.

State E: identical to state B.

State F:

State F indicates another disturbance produced in the course of the process, due to an increase in the concentration of CO in the atmosphere of the furnace (0.4 instead of 0.3). This results in a variation in the measured flow $(-3.5)X10^{-9}$ $mol.cm^{-2}s^{-2}$ which no longer conforms to the value F_s. Consequently, the new

set value DP_s (-36.6°C) is calculated (from the equation stored in the memory) and the overall flow is so adjusted as to return to the stable state C which is different from B.

By way of comparison, there was carried out in this same furnace a treatment of tubes having the same characteristics after annealing by means of an atmosphere created by an exothermic generator. The treatment is carried out at the same temperature and with the same duration but the flow of atmosphere in the furnace is 160Nm^3/h.

The invention therefore permits, for an equal duration of treatment and an identical quality of the work pieces, a large reduction in the flow of the atmosphere injected into the furnace, this reduction being in the present case 47%.

It is of course possible to effect the flows of nitrogen and hydrocarbon as a function of the amplitude of the difference between the measured dew point DP_m and the set dew point DP_s.

The claims defining the invention are as follows:

1. A process for heat treating a low alloy steel work piece, comprising heat treating said piece to a temperature greater than 600°C within a protective atmosphere in a furnace, and injecting N_2 and a hydrocarbon C_xH_y into the furnace, to control said atmosphere, said injection of N_2 and hydrocarbon C_xH_y being increased when the measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 and hydrocarbon C_xH_y being maintained when DP_m is equal to DP_s, and said injection of N_2 and hydrocarbon C_xH_y being reduced when DP_m is less than DP_s.

2. A process according to claim 1, wherein the flow of nitrogen and hydrocarbon is increased or decreased as a function of the amplitude of the difference between the measured dew point DP_m and the set dew point DP_s.

3. A process according to claim 1, wherein the injection of N_2 and hydrocarbon C_xH_y is increased by changing from a first flow rate to a second flow rate, and the injection of N_2 and hydrocarbon C_xH_y is decreased by changing from the second flow rate to the first flow rate, the mean value of the flow rate being determined by the respective durations of the first and second flow rates, said first flow rate being a lower flow rate than said second flow rate.

4. A process according to claim 3, wherein the ratio of the concentrations $(C_xH_y)/(N_2)$ in the first flow rate is different than the ratio of the concentrations $(C_xH_y)/(N_2)$ in the second flow rate.

5. A process according to claim 3 or claim 4, wherein the change from the first flow rate to the second flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen and the hydrocarbon is simultaneous.

6. A process according to any one of claims 3 to 5, wherein the change from the first flow rate to the second

MB

flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen is independent of that of the hydrocarbon.

7. A process for heat treating a low alloy steel work piece, comprising heat treating said piece in a furnace to a temperature greater than 600°C within a protective atmosphere containing N_2, CH_4 and CO, not in thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, and injecting N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere, said injection of N_2 and hydrocarbon C_xH_y being increased when a measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 and hydrocarbon C_xH_y being maintained when DP_m is equal to DP_s and said injection of N_2 and hydrocarbon C_xH_y being reduced when DP_m is less than DP_s.

8. A process according to claim 7, wherein the flow of nitrogen and hydrocarbon is increased or decreased as a function of the amplitude of the difference between the measured dew point DP_m and the set dew point DP_s.

9. A process according to claim 7 or claim 8, wherein the protective atmosphere further contains H_2 with a residual content of H_2 lower than 5%.

10. A process according to any one of claims 7 to 9, wherein said atmosphere is controlled by further injecting H_2.

11. A process according to claim 7, wherein the injection of N_2 and hydrocarbon C_xH_y is increased by changing from a first flow rate to a second flow rate, and the injection of N_2 and hydrocarbon C_xH_y is decreased by changing from the second flow rate to the first flow rate, the mean value of the flow rate being determined by the respective durations of the first and second flow rates, said first flow rate being a lower flow

rate than said second flow rate.

12. A process according to claim 11, wherein the ratio of the concentrations $(C_xH_y)/(N_2)$ in the first flow rate is different than the ratio of the concentrations $(C_xH_y)/(N_2)$ in the second flow rate.

13. A process according to claim 11 or claim 12, wherein the change from the first flow rate to the second flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen and the hydrocarbon is simultaneous.

14. A process according to any one of claims 11 to 13, wherein the change from the first flow rate to the second flow rate, and the change from the second flow rate to the first flow rate, of the nitrogen is independent of that of the hydrocarbon.

15. A process for heat treating a low alloy steel work piece, comprising heat treating said piece in a furnace to a temperature greater than 600°C, within a protective atmosphere containing N_2, CH_4 and CO not in a thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, and injecting N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere, said injection of N_2 being increased when a measured dew point DP_m in the furnace is greater than a set dew point DP_s calculated from a set flow F_s of transfer of the carbon between the work piece and the atmosphere through the surface of the work piece, said injection of N_2 being reduced when DP_m is less than DP_s and said injection of hydrocarbon C_xH_y being increased when a measured value of residual CH_4 is less than a set value of residual CH_4, said injection of hydrocarbon C_xH_y being maintained when the measured value of residual CH_4 is equal to the set value of residual CH_4, and said injection of hydrocarbon C_xH_y being reduced when the measured value of residual CH_4 is greater than the set value of residual CH_4.

16. A process according to claim 15, wherein the

MB

protective atmosphere further contains H_2 with a residual content of H_2 lower than 5%.

17. A process according to claim 15 or claim 16, wherein said atmosphere is controlled by further injecting H_2.

18. A process for heat treating a low alloy steel work piece in a furnace to a temperature greater than 600°C, within a protective atmosphere containing N_2, CH_4 and CO not in a thermodynamic equilibrium and having a relative proportion of CO/CH_4 between 0.05 and 15 with a residual content of CH_4 lower than 2.5% and a residual content of CO lower than 2%, wherein N_2 and a hydrocarbon C_xH_y are injected into the furnace to control said atmosphere, which process comprises: varying the temperature and the concentrations of CO, CH_4 and H_2O at a first minimum value and at a second maximum value for said temperature and concentrations to determine corresponding carbon transfer flows $F = f(T, CO, CH_4, H_2O)$ which correspond to all temperature T and concentrations of CO, CH_4 and H_2O between the minimum and maximum values; measuring the instant values of temperature and concentrations of CO and CH_4, and measured dew point DP_m in the furnace; and injecting varying amounts of N_2 and a hydrocarbon C_xH_y into the furnace to control said atmosphere dependent upon a calculated set dew point (DP_s) corresponding to a desired carbon transfer flow F_s and measured values of temperature and concentrations of CO and CH_4, said injection of N_2 and hydrocarbon C_xH_y being either increased when the measured dew point DP_m in the furnace is greater than said dew point DP_s, or reduced when DP_m is less than DP_s, or maintained when DP_m is equal to DP_s.

19. A process for heat treating a low alloy steel work piece according to claim 18, wherein the relative proportion of CO/CH_4 is substantially equal to 1.

20. A process for heat treating a low alloy steel work piece according to claim 18 or claim 19, wherein the residual content of CO is about 1%.

21. A process for heat treating a low alloy steel work

MB

piece according to any one of claims 18 to 20, wherein the residual content of CH_4 is about 1%.

22. A process for heat treating a low alloy steel work piece according to any one of claims 18 to 21, wherein the temperature is between 680°C and 1050°C.

23. A process for heat treating a low alloy steel work piece according to any one of claims 18 to 22, wherein the set dew point of the atmosphere is between -50°C and -15°C.

24. A process for heat treating a low alloy steel work piece according to any one of claims 18 to 23, wherein the protective atmosphere has a residual content of H_2 lower than 5%.

25. A process for heat treating a low alloy steel work piece according to any one of claims 18 to 24, wherein the protective atmosphere has a residual content of CO_2 lower than that of H_2O.

26. A process according to any one of claims 18 to 25, wherein said atmosphere is controlled by further injecting H_2.

27. A process according to claim 1, substantially as herein described with reference to Figure 1 or Figure 2 of the accompanying drawings.

28. A process according to claim 1, substantially as herein described with reference to the Example.

DATED: 18 July, 1991
PHILLIPS ORMONDE & FITZPATRICK
Attorneys For:
L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE

1511Z

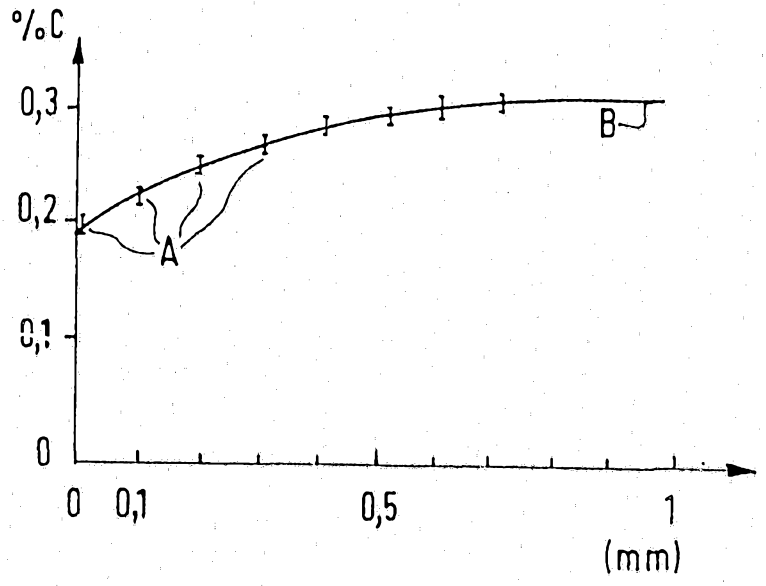


FIG.1

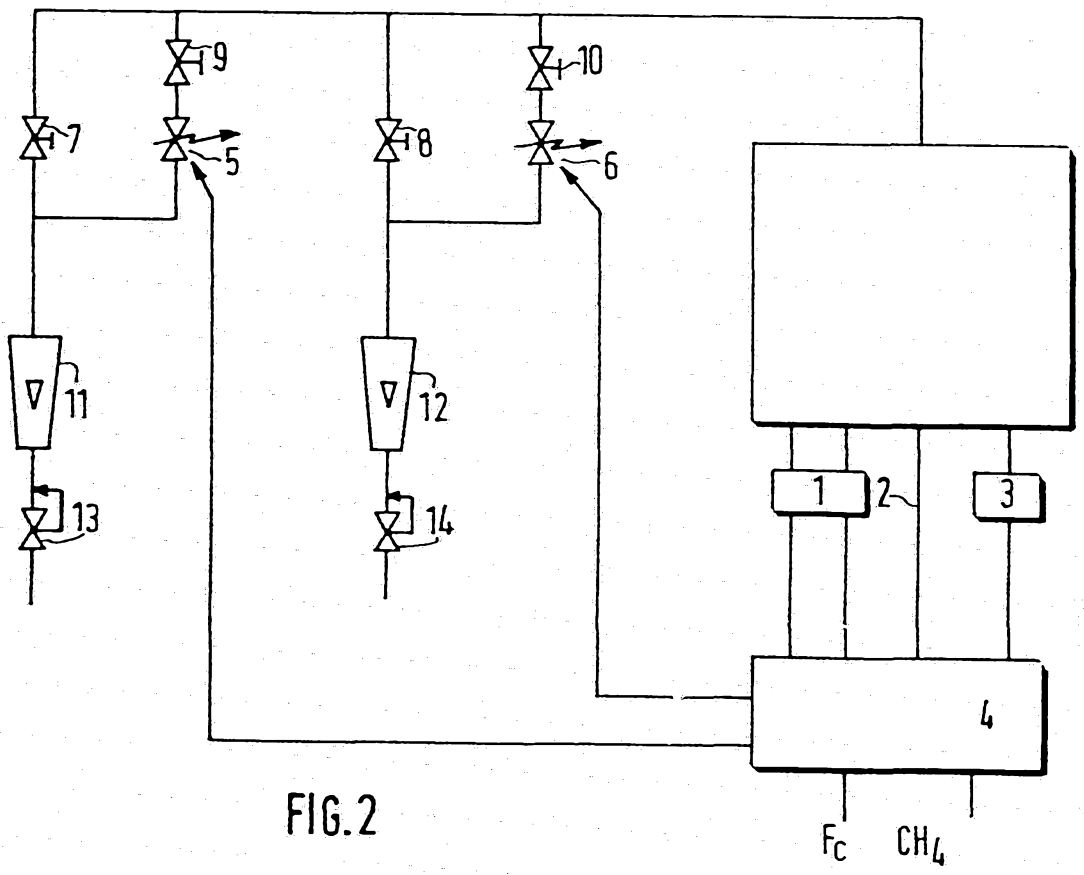


FIG.2

24 965/88