

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2008 (31.07.2008)

PCT

(10) International Publication Number  
**WO 2008/091837 A2**

(51) International Patent Classification:  
**H01L 27/15** (2006.01)

(US). VAN DE VEN, Antony, Paul [AU/CN]; 11F Hing Keng Shek, Sai Kung, NT, Hong Kong SAR (CN).

(21) International Application Number:  
PCT/US2008/051611

(74) Agents: BROWN, Kevin, C. et al.; P.O. Box 7068, Syracuse, NY 13261 (US).

(22) International Filing Date: 22 January 2008 (22.01.2008)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/982,892 26 October 2007 (26.10.2007) US  
60/986,662 9 November 2007 (09.11.2007) US  
60/885,937 22 January 2007 (22.01.2007) US

(71) Applicant (for all designated States except US): CREE LED LIGHTING SOLUTIONS, INC. [US/US]; 4600 Silicon Drive, Durham, NC 27703 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

(72) Inventors; and

(75) Inventors/Applicants (for US only): NEGLEY, Gerald, H. [US/US]; 811 Clearview Lane, Durham, NC 27713

[Continued on next page]

(54) Title: FAULT TOLERANT LIGHT EMITTERS, SYSTEMS INCORPORATING FAULT TOLERANT LIGHT EMITTERS AND METHODS OF FABRICATING FAULT TOLERANT LIGHT EMITTERS

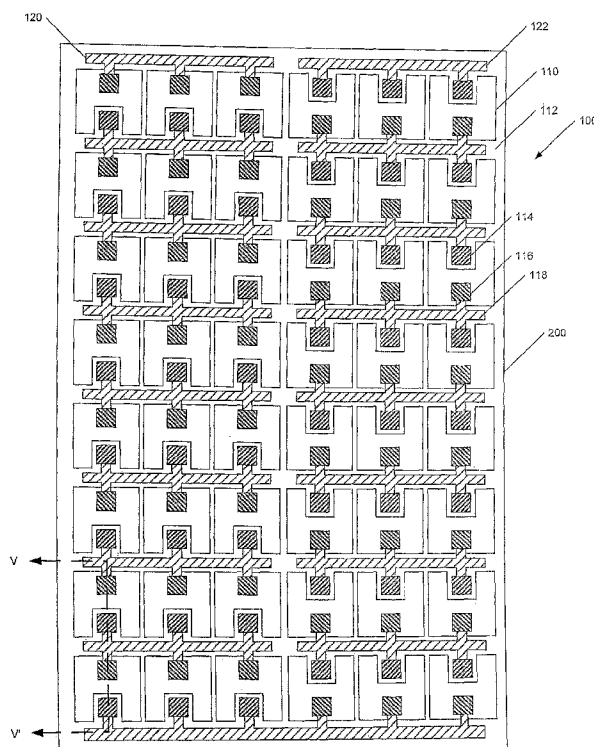

(57) Abstract: There is provided a light emitter comprising light emitting devices (for example, light emitting diodes) which are electrically interconnected to provide an array of at least two serially connected subsets of parallel connected light emitting devices, each subset comprising at least three light emitting devices, in some embodiments, the light emitting devices are from a contiguous region of a wafer. There is also provided a light emitter, comprising light emitting devices, means for mechanically interconnecting the light emitting devices and means for electrically interconnecting the light emitting devices to provide serially connected subsets interconnected in parallel, each subset comprising at least three light emitting devices. Also, methods of fabricating light emitters.



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *without international search report and to be republished upon receipt of that report*

FAULT TOLERANT LIGHT EMITTERS, SYSTEMS INCORPORATING FAULT  
TOLERANT LIGHT EMITTERS AND METHODS OF FABRICATING FAULT TOLERANT  
LIGHT EMITTERS

**Cross-reference to Related Applications**

This application claims the benefit of U.S. Provisional Patent Application No. 60/885,937, filed January 22, 2007, the entirety of which is incorporated herein by reference.

This application claims the benefit of U.S. Provisional Patent Application No. 60/982,892, filed October 26, 2007, the entirety of which is incorporated herein by reference.

This application claims the benefit of U.S. Provisional Patent Application No. 60/986,662, filed November 9, 2007, the entirety of which is incorporated herein by reference.

**Field of the Invention(s)**

The present inventive subject matter relates to light emitters, systems incorporating such light emitters, and methods of making such light emitters and systems. In particular, the present inventive subject matter is directed to fault tolerant light emitters, systems incorporating them, and methods of making them.

**Background of the Invention(s)**

To date, the highest light extraction for an LED (light emitting diode) chip and LED package (more chip-specific than package-specific) has generally been with small LED chips (~ 300 micrometers x 300 micrometers) as compared with “power chips” (LEDs of ~ 0.9-1 mm x 0.9 – 1 mm).

Efforts have been ongoing to develop ways by which solid state light emitting devices can be used in place of incandescent lights, fluorescent lights and other light-generating devices in a wide variety of applications. In addition, where light emitting diodes (or other solid state light emitting devices) are already being used, efforts are ongoing to provide light emitting diodes (or other solid state light emitting devices) which have improved energy efficiency.

Various efforts have been directed at improving the performance of light emitting diodes

on a common substrate. For example:

United States Patent No. 6,635,503 describes cluster packaging of light emitting diodes;

United States Patent Application Publication No. 2003/0089918 describes broad spectrum light emitting devices and methods and systems for fabricating broad spectrum light emitting devices;

United States Patent No. 6,547,249 describes monolithic series/parallel light emitting diode arrays formed on highly resistive substrates;

United States Patent No. 7,009,199 describes electronic devices having a header and anti-parallel connected light emitting diodes for producing light from AC current;

United States Patent No. 6,885,035 describes multi-chip semiconductor light emitting diode assemblies;

United States Patent Nos. 7,213,942 and 7,221,044 each describe single chip integrated LEDs adapted for direct use with a high AC or DC voltage;

United States Patent Application Publication No. 2005/0253151 describes a light emitting device operating on a high drive voltage and a small drive current;

Japanese Patent Publication No. 2001-156331 describes a plurality of nitride semiconductor layers formed on the same substrate, where the layers are electrically separated from each other and each nitride semiconductor layer is electrically connected with a conductive wire;

Japanese Patent Publication No. 2001-307506 describes two or more light emitting diodes being formed on the same semiconductor substrate; and

United States Patent Application Publication No. 2007/0202623 describes a wafer level package for very small footprint and low profile white LED devices.

### **Summary of the Invention(s)**

The question of whether or not “power chips” (larger area LEDs) make sense in a given LED lighting (illumination) application should be viewed at the “systems level”. That is, it is necessary to consider “chip” (LED) efficiency, package efficiency, driver (AC to DC conversion) efficiency and optic efficiency.

The best performance of driver technology for devices which include LED chips (and/or one or more other solid state light emitting devices) is with “higher voltage, lower current” compared to “lower voltage, higher current”. Typical small LED chips run at ~ 20 – 30 mA of current and ~ 3 volts, whereas typical power chips run at ~350 mA and 3 volts.

The improved driver technology at lower drive currents can be viewed as follows:

a) There is a fixed cost (power drops) that occurs in a driver assembly. These driver assemblies are made of “pn junctions” so that there is a power loss each time that a “junction” is added in the driver technology. Hence, the overhead (this fixed cost of power) can be amortized over each LED, such that the cost of going to higher voltage strings and many LEDs is better than lower voltage strings and few parts.

b) The associated loss of power with current (at fixed resistance) is  $I^2R$ . Hence, the lower current approach will always reach higher efficiencies.

Owing to this, driver efficiencies of 80%-85% are obtainable for “power LED technology” while driver efficiencies of 95% are obtainable for standard LED technology.

In accordance with the present inventive subject matter, there is provided a light emitter which comprises a plurality of light emitting devices which are mechanically interconnected to one another (e.g., on a common substrate on which the devices were formed) and which are electrically interconnected to provide an array of at least two serially connected subsets of light emitting devices, each subset comprising at least three light emitting devices electrically connected in parallel. The light emitting devices are electrically interconnected to provide an array of light emitting devices, the array sometimes herein being referred to as including “rows” and “columns.” Each of the “rows” in the array is one of the subsets of parallel-connected light emitting devices. Each of the “columns” in the array includes one of the light emitting devices from each of the subsets, i.e., the array includes a number of columns which is equal to the number of light emitting devices in each of the “rows” (i.e., subsets). The present inventive subject matter, however, is not limited to light emitters in which each subset includes the same number of light emitting devices, i.e., the present inventive subject matter encompasses light emitters in which some or all of the subsets include different numbers of light emitting devices. Thus, the arrays include at least three columns and at least two rows of light emitting devices.

The expression “high voltage”, as used herein, means that the voltage drop across a light emitter is at least three times that of one of the light emitting devices included in the light emitter, i.e.:

$$V \geq V_f \text{ of at least three series light emitting devices.}$$

In some embodiments, the light emitting devices are electrically interconnected on a common substrate. The expression “electrically connected on a common substrate”, as used herein, and analogous statements (e.g., “electrically connected on a substrate”), means that the electrical connection(s) is/are made on the same structure of which the substrate is a part, e.g., the electrical connection(s) can be above and/or below the substrate, and/or there can be no structures or layer, or there can be one or more structures or layers, between the structure which provides the electrical connection(s) and the substrate. In some embodiments, the forward voltage of the light emitter is at least 325 volts and in others, the forward voltage of the light emitter is at least 395 volts.

The light emitting devices can be any desired component which is capable of emitting light upon being supplied with electricity, e.g., solid state light emitting devices. In particular embodiments of the present inventive subject matter, the light emitting devices are light emitting diodes (LEDs). In some of such embodiments, the LEDs are electrically interconnected on a common substrate. In some embodiments, the LEDs are isolated from one another by one or more insulating region, in other embodiments, the LEDs are isolated from one another by one or more trench, and in still further embodiments, the LEDs are isolated by both one or more trench and one or more insulating region. The LEDs may be lateral devices, vertical devices or some of each.

In some embodiments of the present inventive subject matter, a light emitter includes a plurality of light emitting devices from a contiguous region of a wafer of light emitting devices. As noted above, the plurality of light emitting devices are electrically connected as a plurality of serially connected subsets of at least three parallel connected light emitting devices. In some embodiments, the plurality of serially connected subsets includes at least forty subsets and in other embodiments, the plurality of serially connected subsets includes at least one hundred subsets.

In some embodiments, the plurality of light emitting devices are mechanically connected by a common substrate of the wafer. In such a case, the light emitting devices may be defined by insulating regions that define the peripheries of individual light emitting devices. Alternatively or additionally, the light emitting devices may be defined by one or more trenches that define the peripheries of the individual light emitting devices. The light emitting devices may include lateral devices and/or vertical devices.

In some embodiments of the present inventive subject matter, the light emitter includes a mechanical substrate on which the light emitting devices are mounted to provide mechanical support for the light emitting devices.

Some embodiments of the present inventive subject matter provide a light emitter, that includes a plurality of light emitting devices, means for mechanically interconnecting the plurality of light emitting devices and means for electrically interconnecting the plurality of light emitting devices to provide serially connected subsets, each subset comprising at least three light emitting devices that are electrically interconnected in parallel.

In some embodiments, means for healing a short circuit failure of one or more of the plurality of light emitting devices may also be provided.

A lighting system is also provided that includes a boost power supply having an output voltage that is greater than a corresponding input voltage, and a light emitter. The light emitter includes a plurality of light emitting devices from a contiguous region of a wafer of light emitting devices, the plurality of light emitting devices being electrically connected as a plurality of serially connected subsets of at least three parallel connected light emitting devices electrically coupled to the output voltage of the boost power supply. The boost power supply may be configured to be coupled to an AC power source to provide the input voltage.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

- a plurality of light emitting devices formed on a common substrate, each of the light emitting devices comprising means for generating light,

- means for electrically connecting at least first, second and third of the light emitting devices in parallel as a first subset;

means for electrically connecting at least fourth, fifth and sixth of the light emitting devices in parallel as a second subset;

means for electrically connecting the first subset and the second subset in series.

In some embodiments of this aspect of the present inventive subject matter:

the first light emitting device comprises a first n-type region and a first p-type region;

the second light emitting device comprises a second n-type region and a second p-type region;

the third light emitting device comprises a third n-type region and a third p-type region;

the fourth light emitting device comprises a fourth n-type region and a fourth p-type region;

the fifth light emitting device comprises a fifth n-type region and a fifth p-type region;

the sixth light emitting device comprises a sixth n-type region and a sixth p-type region;

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region are each regions of a single monolithic n-type layer;

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region are each regions of a single monolithic p-type layer;

the light emitter comprises means for isolating each of the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region from each other; and

the light emitter comprises means for isolating each of the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region from each other.

A statement that two or more elements are “isolated” from each other means that the respective elements are not electrically connected with each other (even though, for example, they might both be in contact with another element).



Statements herein that two or more elements are each isolated regions of a single monolithic layer (e.g., “the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region are each isolated regions of a single monolithic n-type layer”), and similar statements, means that (at least) each of the elements (e.g., each of the light emitting diode devices or each of the first through sixth n-type regions, etc.) includes structural features which persons of ordinary skill in the art recognize inherently result from being formed as a single integral monolithic layer and later being isolated from each other, e.g., by forming one or more trenches, implanting ions, etc., such that electricity cannot be conducted directly between the respective n-type regions. Analogous statements apply with respect to analogous statements herein, e.g., that p-type regions are isolated regions of a single monolithic p-type layer, etc.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

- at least first, second, third, fourth, fifth and sixth solid state light emitting devices,
- the first solid state light emitting device comprising a first n-type region and a first p-type region,

- the second solid state light emitting device comprising a second n-type region and a second p-type region,

- the third solid state light emitting device comprising a third n-type region and a third p-type region,

- the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

- the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

- the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

- the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device;

the anode end of the fourth solid state light emitting device being electrically connected to an anode end of the fifth solid state light emitting device and an anode end of the sixth solid state light emitting device; and

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

at least first, second, third, fourth, fifth and sixth solid state light emitting devices;

the first solid state light emitting device comprising a first n-type region and a first p-type region,

the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a first anode electrically connected to the first p-type region;

a first cathode electrically connected to the first n-type region;

a second anode electrically connected to the second p-type region;

a second cathode electrically connected to the second n-type region;

a third anode electrically connected to the third p-type region;

a third cathode electrically connected to the third n-type region;

a fourth anode electrically connected to the fourth p-type region;

a fourth cathode electrically connected to the fourth n-type region;

a fifth anode electrically connected to the fifth p-type region;

a fifth cathode electrically connected to the fifth n-type region;

a sixth anode electrically connected to the sixth p-type region;

a sixth cathode electrically connected to the sixth n-type region;

a first interconnect electrically connected to the first anode, the second anode and the third anode;

a second interconnect electrically connected to the first cathode, the second cathode and the third cathode; and

a third interconnect electrically connected to the fourth cathode, the fifth cathode and the sixth cathode.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one means for opening an electrically conductive

connection in series with at least one of the light emitting devices.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

at least first, second, third, fourth, fifth and sixth solid state light emitting devices;

the first solid state light emitting device comprising a first n-type region and a first p-type region,

the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a first p-type contact electrically connected to the first p-type region,

a first n-type contact electrically connected to the first n-type region,

a second p-type contact electrically connected to the second p-type region,

a second n-type contact electrically connected to the second n-type region,

a third p-type contact electrically connected to the third p-type region,

a third n-type contact electrically connected to the third n-type region,

a fourth p-type contact electrically connected to the fourth p-type region,

a fourth n-type contact electrically connected to the fourth n-type region,  
a fifth p-type contact electrically connected to the fifth p-type region,  
a fifth n-type contact electrically connected to the fifth n-type region,  
a sixth p-type contact electrically connected to the sixth p-type region,  
a sixth n-type contact electrically connected to the sixth n-type region,  
a first interconnect electrically connected to the first p-type contact, the second p-type contact and the third p-type contact,  
a second interconnect electrically connected to the first n-type contact, the second n-type contact and the third n-type contact,  
a third interconnect electrically connected to the fourth p-type contact, the fifth p-type contact and the sixth p-type contact, and  
a conductive via electrically connected to the second interconnect and the third interconnect, the conductive via extending through the p-type layer.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

at least first, second, third, fourth, fifth and sixth solid state light emitting devices; and  
a substrate,  
the first solid state light emitting device comprising a first n-type region and a first p-type region,  
the second solid state light emitting device comprising a second n-type region and a second p-type region,  
the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

the first solid state light emitting device, the second solid state light emitting device, the third solid state light emitting device, the fourth solid state light emitting device, the fifth solid state light emitting device and the sixth solid state light emitting device being on the substrate,

an anode end of the first solid state light emitting device being electrically connected to an anode end of the second solid state light emitting device and an anode end of the third solid state light emitting device;

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device;

the anode end of the fourth solid state light emitting device being electrically connected to an anode end of the fifth solid state light emitting device and an anode end of the sixth solid state light emitting device; and

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

In some embodiments according to this aspect of the present inventive subject matter, the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

In another aspect of the present inventive subject matter, there is provided a light emitter, comprising:

at least a first array of solid state light emitting devices and a second array of solid state light emitting devices, the first array of solid state light emitting devices comprising at least first, second, third, fourth, fifth and sixth solid state light emitting devices,

the first solid state light emitting device comprising a first n-type region and a first p-type region,

the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device;

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device;

the anode end of the first solid state light emitting device being electrically connected to the anode end of the second solid state light emitting device and the anode end of the third solid state light emitting device,

the first array and the second array being electrically arranged in an anti-parallel relationship.

In some embodiments according to this aspect of the present inventive subject matter, the second array comprises at least seventh, eighth, ninth, tenth, eleventh and twelfth solid state light emitting devices,

the seventh solid state light emitting device comprising a seventh n-type region and a seventh p-type region,

the eighth solid state light emitting device comprising an eighth n-type region and an eighth p-type region,

the ninth solid state light emitting device comprising a ninth n-type region and a ninth p-type region,

the tenth solid state light emitting device comprising a tenth n-type region and a tenth p-type region,

the eleventh solid state light emitting device comprising an eleventh n-type region and an eleventh p-type region,

the twelfth solid state light emitting device comprising a twelfth n-type region and a twelfth p-type region,

the seventh n-type region, the eighth n-type region, the ninth n-type region, the tenth n-



type region, the eleventh n-type region and the twelfth n-type region each being isolated regions of a single monolithic n-type layer,

the seventh p-type region, the eighth p-type region, the ninth p-type region, the tenth p-type region, the eleventh p-type region and the twelfth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the seventh solid state light emitting device being electrically connected to a cathode end of the eighth solid state light emitting device and a cathode end of the ninth solid state light emitting device;

a cathode end of the tenth solid state light emitting device being electrically connected to a cathode end of the eleventh solid state light emitting device and a cathode end of the twelfth solid state light emitting device;

the cathode end of the seventh solid state light emitting device being electrically connected to an anode end of the tenth solid state light emitting device; and

the anode end of the seventh solid state light emitting device being electrically connected to the anode end of the eighth solid state light emitting device and the anode end of the ninth solid state light emitting device.

In some embodiments according to this aspect of the present inventive subject matter, at least the solid state light emitting devices in the first array and the solid state light emitting devices in the second array have a common substrate.

In some embodiments according to this aspect of the present inventive subject matter, at least the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region, the sixth n-type region and the n-type regions of the solid state light emitting devices in the second array are all part of the same integral n-type element.

In some embodiments according to this aspect of the present inventive subject matter, at least the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region, the sixth p-type region and the p-type regions of the solid state light emitting devices in the second array are all part of the same integral p-type element.

In another aspect of the present inventive subject matter, there is provided a circuit for a light emitter, the circuit comprising:

a rectifying bridge;

at least first, second, third, fourth, fifth and sixth solid state light emitting devices,

the first solid state light emitting device comprising a first n-type region and a first p-type region,

the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device;

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device; and

the anode end of the first solid state light emitting device being electrically connected to

the anode end of the second solid state light emitting device and the anode end of the third solid state light emitting device.

In some embodiments according to this aspect of the present inventive subject matter, the rectifying bridge comprises at least one solid state light emitting device.

Methods of fabricating a light emitter are also provided. Such methods may include forming a plurality of light emitting devices on a substrate and electrically connecting the light emitting devices to provide an array of light emitting devices, where, as discussed above, the light emitting devices in a subset (or row) within in the array are connected in parallel and in which the subsets in the array are connected in series. The subsets in the array each include at least three light emitting devices, and the number of rows in the array provide a forward voltage for the light emitter of at least 18 volts.

Some embodiments provide methods of fabricating a light emitting device that include forming a plurality of light emitting device layers on a substrate, defining individual light emitting devices in regions of the light emitting device layers and electrically connecting the individual light emitting devices on the substrate to provide serially connected subsets of the light emitting devices. Each of the subsets comprises at least three light emitting devices electrically connected in parallel.

In some embodiments, defining individual light emitting devices comprises implanting ions about the peripheries of the light emitting devices to provide one or more insulating or semi-insulating region that defines the peripheries of the individual light emitting devices.

In some embodiments, each of the light emitting devices comprises lateral light emitting device having a first surface on which a first ohmic contact is provided on a first contact layer of the respective light emitting device and a second, buried, contact layer. In such embodiments, electrically connecting individual light emitting devices may include: (a) for each light emitting device, forming a conductive region that extends from the first surface through the insulating or semi-insulating region of the light emitting device to electrically connect to the buried contact layer, (b) for each light emitting layer, forming an ohmic contact on the conductive region to provide a second ohmic contact electrically connected to the buried contact layer and (c) forming an electrical interconnection pattern on the respective first surfaces to selectively interconnect

first ohmic contacts and second ohmic contacts to provide the serially connected subsets of light emitting devices.

Additionally, forming a conductive region may be provided by forming a highly doped region of semiconductor material of the same conductivity type as the buried contact layer. Alternatively, forming a conductive region may be provided by, for each light emitting device, forming a conductive via extending from the first surface to the buried contact layer.

In some embodiments, each of the light emitting devices comprises a vertical light emitting diode having respective ohmic contacts on opposite faces of the light emitting device. In such a case, electrically connecting individual light emitting devices may be provided by (a) forming interconnection patterns on the opposite faces of the light emitting devices to electrically connect respective ohmic contacts of the light emitting devices into the subsets of light emitting devices, the interconnection patterns extending onto the electrically insulating or semi-insulating regions, and (b) forming conductive vias through the electrically insulating or semi-insulating region to selectively electrically connect respective interconnection patterns so as to serially connect the subsets of light emitting devices.

In some embodiments, light extraction features are formed in the substrate.

In some embodiments, defining individual light emitting devices comprises forming one or more trench about the peripheries of the light emitting devices, wherein the trench defines the peripheries of the individual light emitting devices. In such embodiments, where the light emitting devices include a first ohmic contact and the trench extends to a contact layer of the light emitting device, the methods may further include forming a second ohmic contact on the contact layer, filling the trench with an insulator material and forming a conductive via through the insulator material to contact the ohmic contact. Electrically connecting the individual light emitting devices may include forming interconnection patterns that electrically connect first contacts of a first subset of light emitting devices to conductive vias associated with second contacts of a second subset of light emitting devices.

In some embodiments of the present inventive subject matter, the method further comprises testing at least one of the light emitting devices.

In some embodiments of the present inventive subject matter, the method further

comprises testing at least one of the light emitting devices and electrically disconnecting one of the light emitting devices from the light emitting device.

In some embodiments of the present inventive subject matter, the step of electrically disconnecting one of the light emitting devices is carried out by etching an anode contact or a cathode contact of one of the light emitting devices. In some of such embodiments, the step of electrically disconnecting one of the light emitting devices is carried out by applying insulating material on an anode contact or a cathode contact of one of the light emitting devices.

The present inventive subject matter provides light emitters in which activation of the light emitter (i.e., supplying electricity to it) activates more than one light emitting device contained in the light emitter, i.e., the light emitters are not arrays of individual addressable light emitting devices (such as in the case of displays and the like).

### **Description of the Drawings**

**Fig. 1** is a top view of a light emitter provided by a string of serially connected light emitting diodes on a common substrate.

**Fig. 2** is an electrical schematic of the light emitter of **Fig. 1**.

**Fig. 3** is an electrical schematic of light emitting diodes arranged as an array of serially connected parallel subsets of light emitting diodes according to some embodiments of the present inventive subject matter.

**Fig. 4** is a top plan view of a light emitter according to some embodiments of the present inventive subject matter.

**Fig. 5A** is a cross-sectional illustration taken along line V-V' of **Fig. 4**.

**Fig. 5B** is a cross-sectional illustration according to alternative embodiments of the present inventive subject matter.

**Figs. 6A through 6G** are cross-sectional illustrations illustrating fabrication of devices according to some embodiments of the present inventive subject matter.

**Figs. 7A through 7F** are cross-sectional illustrations illustrating fabrication of devices according to some embodiments of the present inventive subject matter.

**Figs. 8A through 8D** are cross-sectional illustrations illustrating fabrication of devices

according to some embodiments of the present inventive subject matter.

**Fig. 9** is a top plan view of a light emitter according to some embodiments of the present inventive subject matter.

**Fig. 10** is a cross-sectional illustration taken along line X-X' of **Fig. 9**.

**Figs. 11A through 11G** are cross-sectional illustrations illustrating fabrication of devices according to some embodiments of the present inventive subject matter.

**Fig. 12** is a block diagram of a lighting system incorporating light emitters according to some embodiments of the present inventive subject matter.

**Fig. 13** is a schematic drawing of a lighting system according to some embodiments of the present inventive subject matter.

**Fig. 14** is a schematic drawing of a lighting system according to some embodiments of the present inventive subject matter.

#### **Detailed Description of the Invention(s)**

The present inventive subject matter now will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the inventive subject matter are shown. However, this inventive subject matter should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the inventive subject matter to those skilled in the art. Like numbers refer to like elements throughout. As used herein the term "and/or" includes any and all combinations of one or more of the associated listed items.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the inventive subject matter. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

As noted above, the various aspects of the present inventive subject matter include various combinations of electronic components (transformers, switches, diodes, capacitors, transistors, etc.). Persons skilled in the art are familiar with and have access to a wide variety of such components, and any of such components can be used in making the devices according to the present inventive subject matter. In addition, persons skilled in the art are able to select suitable components from among the various choices based on requirements of the loads and the selection of other components in the circuitry.

A statement herein that two components in a device are “electrically connected,” means that there are no components electrically between the components, the insertion of which materially affect the function or functions provided by the device. For example, two components can be referred to as being electrically connected, even though they may have a small resistor between them which does not materially affect the function or functions provided by the device (indeed, a wire connecting two components can be thought of as a small resistor); likewise, two components can be referred to as being electrically connected, even though they may have an additional electrical component between them which allows the device to perform an additional function, while not materially affecting the function or functions provided by a device which is identical except for not including the additional component; similarly, two components which are directly connected to each other, or which are directly connected to opposite ends of a wire or a trace on a circuit board or another medium, are electrically connected.

Although the terms “first”, “second”, etc. may be used herein to describe various elements, components, regions, layers, sections and/or parameters, these elements, components, regions, layers, sections and/or parameters should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present inventive subject matter.

Embodiments in accordance with the present inventive subject matter are described herein with reference to cross-sectional (and/or plan view) illustrations that are schematic illustrations of idealized embodiments of the present inventive subject matter. As such,

variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the present inventive subject matter should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, an implanted region illustrated or described as a rectangle will, typically, have rounded or curved features. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region of a device and are not intended to limit the scope of the present inventive subject matter.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this inventive subject matter belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed "adjacent" another feature may have portions that overlap or underlie the adjacent feature.

According to the present inventive subject matter, there is provided a higher voltage, lower current device, so that the system benefits can be obtained. While the discussion herein frequently refers to LEDs, the present inventive subject matter is applicable to all types of light emitting devices, e.g., solid state light emitting devices, a variety of which are well-known to those skilled in the art. Such solid state light emitting devices include inorganic and organic light emitters. Examples of types of such light emitting devices include a wide variety of light emitting diodes (inorganic or organic, including polymer light emitting diodes (PLEDs)), laser diodes, thin film electroluminescent devices, light emitting polymers (LEPs), a variety of each of which are well-known in the art.

According to the present inventive subject matter, instead of using a single P/N junction, the device is made into multiple regions so that each isolated region can be series connected to obtain the desired arrangements that provide higher voltage operation and fault tolerance in the device. In this way, a large area (single component) can be used with the benefit of placing (or



packaging) fewer chips while still obtaining the best overall system performance.

**Fig. 1** depicts a representative light emitter **10** having multiple interconnected regions **12**. The light emitter **10** of **Fig. 1** may provide a high voltage light emitter having a relatively small area. However, the manufacturability of such a light emitter may depend on the composition of the respective regions and how the respective regions of the light emitter are electrically interconnected. For example, if the regions are individual light emitting diodes connected serially as described in **Fig. 2**, such a light emitter may be difficult to fabricate in that failure of a single light emitting diode as an open circuit in the string would result in loss of the entire string. For single string devices, this would result in a complete loss of light output from the device or one entire string for multiple string devices. Because the light emitting devices are on a common substrate and it would be difficult to repair or replace the individual devices, a failure of one device could result in rejection of the entire part. As such, the overall yield in producing such light emitters would be lower per unit area of wafer than the yield for the individual devices that make up the light emitter.

To overcome problems associated with series strings of devices, the "high voltage" light emitter according to the present inventive subject matter is configured in a series of parallel-connected subsets (i.e., the light emitting devices are electrically connected as a plurality of serially connected subsets, each subset comprising at least three parallel-connected light emitting devices). Such an arrangement (i.e., a series of parallel-connected subsets) is illustrated in **Fig. 3**. The interconnected regions **12** include parallel-connected light emitting devices. These parallel-connected subsets of the light emitting devices are then serially connected. The parallel-connected subsets provide redundancy if a failure occurs (open or short). If an open occurs, only one device or pixel is lost for the entire construction. If a short occurs, all devices in that particular parallel subset (three are shown in the light emitter depicted in **Fig. 3**) fail. These failures could occur at  $t=0$  (upon fabrication and test) or in the field (in use). Such an arrangement (i.e., series of parallel-connected subsets) permits the ability to increase wafer yield (higher yielding wafer), which is an extremely important result.

While **Fig. 3** illustrates sixteen subsets of devices in series, other numbers of devices in series may also be provided. The number of subsets can be selected based on the forward voltage

drop of the light emitting devices utilized and the desired operation voltage. For example, forty subsets or more may be connected in series. Such a series connection for a device with a forward voltage of 3.2 volts would be 128V. Similarly, 100 or more subsets could be connected in series to provide light emitters with operating voltages of 300 volts or more. For example, subsets could be connected in series to provide an operating voltage of 325 volts or more or even 395 volts or more. Such light emitters could be operated, for example, with a boost power supply from a 230 VAC or 277VAC line voltage as described below.

The light emitters according to the present inventive subject matter can be manufactured on an "insulating substrate" – for example, standard InGaN on sapphire. For conventional power chips on conductive SiC, insulating or semi-insulating SiC can be used, or an insulating "buffer layer" can be used so that active layers (and subsequent devices) can be isolated from one another.

Alternatively, new chip platforms (*e.g.*, the EZ chip from Cree Research, Inc., or "thinGaN" from Osram Opto Semiconductors, GmbH) are moving to a substrateless chip/dice assembly. This takes the active device to a very thin configuration. In such devices, as the thickness is reduced, the brightness increases. In these cases, the "thin LED" structures are mounted to a supporting substrate with a mirror layer to direct light out the device (GaN) side. Nonetheless, the same "high voltage" configuration will boost overall system efficiency.

**Figs. 1 and 3** show configurations based upon keeping the device less than 60 volts (class 1 vs. class 2 cutoff for Underwriter's Laboratory standards). However, any configuration (voltage) can be designed. **Fig. 1** is a conceptual view of a 1 mm x 1 mm chip having sixteen regions (4 x 4) arranged in series. **Fig. 3** is a circuit diagram of a die having sixteen regions connected in series, each region including three sub-regions connected in parallel, i.e., each region including a subset of parallel connected light emitting devices.

While Fig. 1 illustrates a 1 mm x 1mm chip, other chip sizes, even larger chip sizes could be provided. For example, 3 mm x 3mm or larger chips could be provided. Additionally, the present inventive subject matter could also be utilized with different sizes of the individual light emitting devices. By building redundancy, the limitation on chip/die size is no longer a "yield hit" at the wafer level. Large area, high voltage chips (with a few pixels out due to materials or

fabrication issues) no longer have to be rejected due to a pixel or segment not working, etc.

In certain embodiments of the present inventive subject matter, a plurality of mechanically connected light emitting devices from a common semiconductor substrate are electrically connected to provide a high voltage monolithic large area light emitter. In particular embodiments, the light emitting devices are light emitting diodes (LEDs). The light emitter structure includes a plurality of light emitting devices electrically connected in an array having a dimension of at least three columns of light emitting devices (i.e., each subset includes at least three parallel-connected light emitting devices). The array electrical interconnection provides for the anodes of the light emitting devices in a row (i.e., a subset) to be electrically connected together and the cathodes in a row to be electrically connected to the anodes of the light emitting devices in an adjacent row. The number of "columns" refers to the number of light emitting devices in a row, i.e., whose anodes are electrically connected together. By electrically connecting the light emitting devices in an array, the failure of one or more devices in any row of the array may be compensated for by the other devices in the row. Similarly, by electrically connecting the devices in an array, failure of one or more devices in a column may also be compensated for by the other devices in the array. At least two rows are included, to make the large area multi-light emitting device light emitter a high-voltage device to reduce resistive losses in an overall system for producing light.

Embodiments of the present inventive subject matter may be utilized with any suitable light emitting device structure. Exemplary embodiments are described with reference to an InGaN multi-quantum well light emitting device structure, although any other suitable light emitting device structures can be employed, e.g., ZnO, ZnTe or any other Group III - Group V and/or Group II - Group VI combination, any binary, ternary or quaternary combination of aluminum, indium, gallium and phosphorus, any binary, ternary or quaternary combination of aluminum, indium, gallium and nitrogen, any binary, ternary or quaternary combination of aluminum, gallium, indium and arsenic, or the like may be used, if desired. Thus, any light emitting device structure that provides a common substrate on which multiple light emitting devices may be formed or transferred and which may be interconnected as described herein may be suitable for use in embodiments of the present inventive subject matter.

In particular embodiments, the plurality of light emitting devices that make up a high voltage light emitter come from a contiguous region of a wafer on which the light emitting devices are formed. The expression "light emitting devices come from a contiguous region of a wafer", as used herein, means that plural layers (e.g., at least an n-type layer and a p-type layer) were formed on a wafer, the wafer was treated (e.g., to form one or more trenches and/or insulating regions) to define a plurality of isolated light emitting devices (preferably spaced very closely to each other) and the wafer was divided into at least two light emitting devices (typically a large number of light emitting devices), each of which includes light emitting devices which came from a contiguous region (or the wafer is not divided, and includes light emitting devices which came from a contiguous region). In other words, "contiguous region" means that the entire die came from a single integral region of the wafer, such that separate isolated regions of layers (e.g., n-type or p-type) of light emitting devices which are adjacent to each other on the die were adjacent to each other on the wafer, and are spaced from each other on the die the same or substantially the same distance they were spaced on the wafer. By providing devices from a contiguous region of a wafer, variations in the characteristics of the individual devices may be reduced or even minimized compared with light emitters with light emitting devices from differing parts of a wafer or even different wafers. Such reductions in variation may also increase predictability of device characteristics which may also improve yield or the ability to target specific characteristics in the final product.

Exemplary embodiments of the present inventive subject matter will now be described with reference to **Figs. 4** through **6G**, where devices with an insulating substrate or buffer layer are provided. The devices in the embodiments depicted in Figs. 4 through 6G have two "top-side" contacts and are referred to herein as "lateral" devices in that current does not flow through the substrate and/or buffer layer but flows "laterally" to/from a contact through, for example, a current spreading layer or contact layer. In contrast, **Figs. 7** through **9G** illustrate exemplary embodiments of the present inventive subject matter incorporating a "vertical" device where current flows "vertically" from one contact to the other. While lateral devices typically have two contacts on the same side of the device and vertical devices typically have contacts on opposing sides of the device, either device could have contacts on the same side or on opposite sides of the

device.

**Fig. 4** is a top plan view of a large area high voltage monolithic light emitter **100** according to some embodiments of the present inventive subject matter. As seen in **Fig. 4**, the lighting device **100** includes a plurality of light emitting devices **110** on a common substrate **200**. The lighting emitting devices **110** are defined by isolation regions **112** that define the peripheries of the individual light emitting devices **110**. The individual light emitting devices **110** each have an anode contact **116** and a cathode contact **114**.

As seen in **Fig. 4**, the anodes **116** of light emitting devices **110** in subsequent rows are connected to the cathodes **114** of devices **110** in previous rows by the interconnection patterns **118**. The anodes **116** of devices **110** in a first row of the light emitter **100** are connected together to provide an anode contact **120** for the monolithic light emitter **100**. The cathode contacts **114** of the last row of devices **110** in the array are also connected together to provide a cathode contact **122** for the monolithic light emitter **100**. Thus, the structure of **Fig. 4** provides an array of light emitting devices **110** electrically connected as illustrated in **Fig. 3** as a monolithic light emitter **100**.

One or more of the monolithic light emitters **100** may be formed on a wafer of light emitting devices **110** and then separated into individual monolithic light emitters **100**. Thus, the isolated light emitting devices **110** are separated from a wafer in groups, and in some embodiments in respective groups from contiguous regions of the wafer, so that each contiguous region provides a monolithic structure **100** that includes a plurality of individual light emitting devices **110**. This separation process may, for example, be carried out by sawing, scoring and breaking, or by other techniques known to those of skill in the art for separating die within a wafer.

**Fig. 5A** is an exemplary cross-section of the monolithic light emitter **100** taken along lines V-V'. As seen in **Fig. 5A**, multiple light emitting devices are provided on a common substrate **200**. As discussed above, the substrate **200** may comprise any suitable material or combination of materials. For example, the substrate may comprise sapphire, SiC, AlN, GaN, ZnO or other suitable semiconductor substrate. The particular material for the substrate **200** may be selected based on the light emitting devices to be formed on the substrate. Substrates and

techniques for forming light emitting devices on substrates are known to those of skill in the art.

Furthermore, in some embodiments, the substrate **200** may be removed or thinned after mounting the monolithic light emitter **100** on another substrate to provide mechanical support for the individual devices. The substrate **200** may also be thinned, laser patterned, etched or subjected to chemical mechanical polishing (CMP). For example, as illustrated in **Fig. 5A**, light extraction features **190** may also be provided on the substrate to improve extraction of light through the substrate. In particular embodiments, the light extraction features **190** approximate a "moth eye" structure. In other embodiments, other light extraction features may also be provided. Various light extraction features are known to those of skill in the art. Techniques for patterning the substrate for light extraction are also known to those of skill in the art.

In addition, the light emitting devices may also include one or more phosphors or other luminous materials. Such luminous material materials may be provided in or on any desired structure, including on the substrate **200**. For example, a YAG phosphor may be provided in a glob or conformal application on the substrate **200**. In other embodiments where light extraction is not through the substrate **200**, the luminous materials may be provided adjacent a surface from which light is extracted. Various luminous materials and techniques for the application of luminous materials are known to those of skill in the art.

As is further illustrated in **Fig. 5A**, a buffer layer **202** may optionally be provided on the substrate **200**. For example, if the substrate **200** is an electrically conductive substrate, then a non-conductive buffer layer may be provided to isolate the electrically conductive substrate from the light emitting devices. Alternatively or additionally, the buffer layer **202** may provide for transitions in materials, for example, to lattice match the substrate **200** to the materials that form the active regions of the die. For example, an AlN buffer layer may be used between a sapphire substrate and GaN, AlGaIn, InGaIn or AlInGaIn active layers to improve the quality of these active layers in comparison to formation of these layers directly on the sapphire substrate. The particular buffer layer material can be selected based on the materials of the substrate and the active layers, with suitable choices for different substrate/active layer combinations being well-known to those skilled in the art. Buffer layers and techniques for the use of buffer layers in fabricating light emitting devices are known to those of skill in the art and need not be described

further herein.

Each light emitting device **110** depicted in **Fig. 5A** also includes an n-type semiconductor layer **204** that may act as a contact layer, one or more quantum well layers **206** and a p-type semiconductor layer **208** that also may act as a contact layer. These layers are collectively referred to as the "active layers" of the device. The particular structure, materials and configuration of the active layers may be any suitable structure, materials or configuration that is capable of producing light when a current passes between the p-type layer and the n-type layer. Various structures, materials and configurations for the active layers of a light emitting device are known to those of skill in the art. Any suitable structures, materials and configurations for the active layers may be utilized in embodiments of the present inventive subject matter as long as such structures, materials and configurations allow for the electrical interconnection of individual devices on the substrate **200** as described herein with reference to the exemplary structures, materials and configurations. In particular embodiments, the structure, materials and configuration may allow for the electrical interconnection of devices which are within a contiguous region on a wafer.

The individual devices **110** of the lighting device **100** are defined by isolation regions **112**. The isolation regions **112** may, in some embodiments, be provided by ion implantation to create insulating or semi-insulating regions that extend through the active layers as illustrated in **Fig. 5A**. Alternatively or additionally, trenches could be formed between the devices **110**. The trenches could, optionally, be filled with an insulator, such as  $\text{SiO}_x$  or  $\text{SiN}$ , to provide a more planar surface on which the electrical interconnect **118** is provided. Combinations of trenches and implantation could also be provided. For example, a trench could be formed and then ions implanted into the sidewalls and/or bottom of the trench to make these regions insulating or semi-insulating.

Also illustrated in **Fig. 5A** is an  $n^+$  contact region **210** that extends from a top surface of the device through the isolating region **112** to the n-type layer **204**. The  $n^+$  contact region **210** allows for the formation of the cathode **114** to provide a more planar device. The  $n^+$  contact region **210** may, for example, be provided by ion implantation through the isolation region to the n-type layer **204**.

Alternatively, the contact to the n-type layer **204** may be made through a via hole which is then filled with a conductive metal to provide an electrical via **192**. For example, a conventional two top side contact device could be fabricated and isolated from adjacent devices utilizing an isolation trench. A cathode contact could be provided on the n-type layer **204**. The trench could then be filled with an insulator and a contact hole formed through the insulator to the cathode contact **204**. The contact hole could be filled with metal or other conductor to provide an electrical via **192** which is in contact with the electrical interconnection **118**. Such a configuration is illustrated in **Fig. 5B**. Alternatively, a via could be formed through an ion implanted isolation region as described above. Techniques for forming vias and then filling them with metal or other conductors are known to those of skill in the art.

With regard to either **Fig. 5A** or **Fig. 5B**, an n-type contact **114** provides a cathode contact for each device and a p-type contact **116** provides an anode contact for each device. The particular configuration and composition of the n-type and p-type contacts **114** and **116** can be selected based on the material system of the lighting device. Techniques for fabricating n-type and p-type ohmic contacts in differing materials systems are well known to those of skill in the art. Embodiments of the present inventive subject matter may be utilized with any type of ohmic contact that is capable of being electrically interconnected to ohmic contacts of other die on the wafer.

**Figs. 5A** and **5B** also illustrate an optional insulating layer **212** that may be provided on exposed portions of the devices and/or between devices. The insulating layer **212** may function as a protective and/or passivation layer for the devices. Such a layer may be the result of the fabrication of the interconnection or may be provided as a separate layer after fabrication of the remainder of the device. Additionally, multiple layers may also be provided, for example, an Oxide-Nitride-Oxide (ONO) or Nitride-Oxide (NO) structure may be utilized.

**Figs. 6A** through **6G** illustrate an exemplary series of processing steps for providing a lighting device **100** according to some embodiments of the present inventive subject matter. As seen in **Fig. 6A**, a mask **310** is deposited and patterned on a wafer having an n-type active layer **304**, quantum well layer **306** and p-type active layer **308** formed thereon. As discussed above, any desired known particular configuration and fabrication of active layers can be employed



according to the present inventive subject matter, and any suitable technique and materials for forming active layers may be utilized. The patterned mask **310** opens windows corresponding to the isolation regions between the individual devices. Mask materials and techniques for patterning masks are well known to those of skill in the art and need not be described in detail here. After patterning the mask **310**, ions **312** are implanted in the active layers **304**, **306** and **308** to turn the region below the window in the mask **310** insulating or semi-insulating by, for example, damaging the crystal lattice of the underlying semiconductor layers, to form isolation regions **314**. Suitable ions and implant energies will depend on the material system, the structure of the underlying device active layers and the dimensions of those layers. The determination of suitable ions and implant energies are within the routine skill of those in the art in light of the present disclosure.

**Fig. 6B** illustrates the formation of an insulating region through which a contact region to the n-type layer **204** is provided. A second mask layer is formed or further patterning of the mask layer **310** may be performed to provide the second patterned mask layer **316** having windows that expose the region of the active layers **306** and **308** through which the contact region to the n-type layer **204** is formed. Ion implantation may then be performed using the mask layer **316** to implant the ions **312** into the active layers **306** and **308** to make the region below the window in the mask layer **316** insulating or semi-insulating.

**Fig. 6C** illustrates one technique for forming a contact region to the n-type layer **204** to provide substantially planar contacts for the devices **110**. In **Fig. 6C**, the mask layer **316** is removed and a third mask layer **318** is formed and patterned to provide windows corresponding to the contact region **210**. Ion implantation is performed using the mask layer **318** to implant ions **320** into the exposed regions of the active layers **306** and **308** to provide an n<sup>+</sup> contact region that extends to and/or into the n-type layer **204**. In some material systems, an anneal of the implanted region may be performed to activate the implanted ions. Such anneal may be provided as a separate step or may be provided as part of another anneal step, for example, if an anneal is provided to form the ohmic contact to the p-type region.

As used herein, references to "+" or "-" in the context of n-type or p-type semiconductor materials are relative indications of the level of doping of such regions. Thus, for example, the

n<sup>+</sup> contact region **210** would be more highly doped than the n-type layer **204**.

**Fig. 6D** illustrates the formation of the ohmic contact **114** to the n-type contact region **210**. A fourth mask layer is formed or further patterning of the third mask layer **318** may be performed to provide the fourth patterned mask layer **320** having windows that expose the n<sup>+</sup> contact region **210**. A blanket deposition of contact material and, in some embodiments contact metal, is performed to provide the contact layer **322**. The portions of the contact layer **322** formed on the fourth patterned mask layer **320** are removed by, for example, CMP, lift-off or other techniques known to those of skill in the art, to provide the ohmic contact **114** to the n<sup>+</sup> contact region **210**.

**Fig. 6E** illustrates the formation of the ohmic contact **116** to the p-type region **308**. A fifth mask layer is formed and patterned, for example, by blanket deposition and patterning, to provide the fifth patterned mask layer **324** having windows that expose the p-type layer **308**. A blanket deposition of contact material and, in some embodiments contact metal, is performed to provide the contact layer **326**. The portions of the contact layer **326** formed on the fifth patterned mask layer **324** are removed by, for example, CMP, lift-off or other techniques known to those of skill in the art, to provide the ohmic contact **116** to the p-type layer **308**.

**Fig. 6F** illustrates formation of the interconnection **118**. A sixth mask layer is formed or further patterning of the fifth mask layer **334** may be performed to provide the sixth patterned mask layer **328** having windows corresponding to the locations for the interconnection **118**. The windows in the sixth patterned mask layer **328** extend to expose the ohmic contacts **114** and **116** so as to selectively electrically connect the individual devices **110** as described herein. A blanket deposition of interconnection material and, in some embodiments interconnection metal, is performed to provide the interconnection layer **330**. The portions of the interconnection layer **330** that are not formed in the windows of the fourth patterned mask layer **322** are removed by, for example, CMP or other techniques known to those of skill in the art, to provide the interconnection structure **118** that selectively electrically connects the ohmic contacts **114** and **116** to provide the structure illustrated in **Fig. 6G**.

**Figs. 7A through 7F** illustrate processing steps for fabrication of a light emitter **100** utilizing trench isolation and a via to the cathode contact, rather than the n<sup>+</sup> region **210** described

above.

Turning to **Fig. 7A**, active layers of the light emitting devices may be isolated by forming a trench **348** to define the peripheries of the individual devices. The cathode contact **114** may be formed on the n-type layer **204** at the periphery of a mesa structure that includes the quantum wells **206** and the p-type layer **208**. The creation of the structure illustrated in **Fig. 7A** may be carried out as part of a conventional process for producing light emitting devices.

**Fig. 7B** illustrates the blanket deposition of one or more insulating materials **350** to fill the trench **348**. Such an insulating material may be any suitable insulator compatible with the material system of the light emitting devices **110**. In some embodiments, the insulator may be multiple layers, such as in an ONO or NO structure. The blanket deposited insulator **350** is planarized to expose the p-type layer **208** to provide the isolation regions **112**. Such planarization may, for example, be carried out by CMP of the structure illustrated in **Fig. 7B**.

**Fig. 7C** illustrates the formation of a patterned mask **352** having windows corresponding to the location of the ohmic contacts on the p-type layer **208**. An ohmic contact material **354** is blanket deposited on the mask **352** and into the openings so as to contact the p-type layer **208**. The contact material **354** is planarized to expose the mask **352** and thereby provide the ohmic contacts **116** on the p-type layer **208**. In some material systems, an anneal of the resulting structure may be performed to improve the quality of the ohmic contacts **116**.

**Fig. 7D** illustrates the formation of a second patterned mask **356** having windows corresponding to the locations of the ohmic contact **114** to the n-type layer **204**. Via openings are made to expose the ohmic contact **114**, for example, by using the mask **356** as an etch mask. Other alternative techniques for opening vias to the ohmic contact **114** may also be utilized. For example, depending on the aspect ratio of the via, a lift-off technique could be used to open a via to the ohmic contact **114**.

As seen in **Fig. 7E**, after formation of the via, the mask **356** may be re-patterned to provide windows corresponding to the interconnect structure to provide a third patterned mask **360**. Alternatively, the mask **356** may be removed and a new mask formed and patterned to provide the third patterned mask **360**. An interconnect electrically conductive material, such as a conductive metal, is blanket deposited on the third patterned mask **360** and the areas exposed by

the windows in the third patterned mask **360**. The conductive material **362** extends into the via to contact the ohmic contact **114**. The conductive material **362** is planarized to at least expose the third patterned mask **360** and, in some embodiments, to expose the ohmic contact **116**, resulting in the structure illustrated in **Fig. 7F**.

In **Fig. 7E**, the blanket deposition of the conductive material **362** fills the via to the ohmic contact **114**. However, depending on the aspect ratio of the via, a separate step or steps may be needed to fill the via with conductive material. Such techniques for filling a via with a conductive material are known to those of skill in the art. In such a case, the blanket deposition of conductive material **362** would contact the filled via and, thereby, provide an electrical connection to the ohmic contact **114**.

**Figs. 8A through 8D** illustrate processing steps for fabrication of a light emitter **100** utilizing a wafer of light emitting devices prior to singulation but after definition of the individual devices. As seen in **Fig. 8A**, the trench isolation regions between the individual devices are filled with an insulating material **370**. The insulating material may be blanket deposited as one or more layers to fill the trench between the devices and then planarized to expose the ohmic contact **116**. Suitable insulators have been described above, as have techniques for planarization.

**Fig. 8B** illustrates the formation of a patterned mask **372** having windows corresponding to the locations of vias to the ohmic contacts **114**. **Fig. 8C** illustrates the formation of the vias and the filling of the vias with a conductive material **376**. The conductive material **376** outside of the via may be removed to expose the ohmic contact **116** and provide the conductive via **378** and provide a substantially planar surface on which to form electrical interconnections between the devices. **Fig. 8D** illustrates the formation and patterning of the electrical interconnection **380** to electrically connect the devices as described herein to provide the light emitter **100**. Thus, using the process illustrated in **Figs. 8A through 8D**, light emitters **100** may be fabricated from a conventional wafer of light emitting devices.

**Fig. 9** is a top plan view of a monolithic high voltage light emitter **1400** that includes a plurality of vertical light emitting devices **410** mechanically connected by a common substrate **400**. In the light emitter **1400** illustrated in **Fig. 9**, the light emitting devices **410** are vertical light

emitting diodes each having an anode contact **416** on one side of the device and a cathode contact **414** on an opposite side of the device. Isolation regions **412** define the peripheries of individual devices **410**. Topside and backside electrical interconnects **418** and **420** are connected to each other through vias **422** to provide the electrical interconnection of devices **410** as illustrated in **Fig. 3**.

**Fig. 10** is a cross-sectional view of a portion of the light emitter **1400** taken along lines X-X' in **Fig. 9**. As seen in **Fig. 9**, multiple light emitting devices are provided on a common substrate **400**. As discussed above, the substrate **400** may be any suitable material or combination of materials. However, in the devices of **Fig. 10**, the substrate is conductive. Thus, for example, the substrate may be SiC, GaN or other suitable semiconductor substrate. The particular material for the substrate **400** may depend on the light emitting device structure to be formed on the substrate. Substrates and techniques for forming light emitting devices on substrates are known to those of skill in the art.

Furthermore, in some embodiments, the substrate **400** may be removed or thinned after mounting the monolithic light emitter **1400** on another substrate to provide mechanical support for the individual devices. The substrate **400** may also be thinned, laser patterned, etched or subjected to chemical mechanical polishing (CMP). For example, light extraction features may also be provided on the substrate to improve extraction of light through the substrate as described above. In addition, the light emitting devices may also include one or more phosphors or other luminous materials. Such luminous materials may be provided on the substrate **400**. For example, a YAG phosphor may be provided in a glob or conformal application on the substrate **400**. In other embodiments where light extraction is not through the substrate **400**, the luminous materials may be provided adjacent a surface from which light is extracted. Various luminous materials and techniques for the application of luminous materials are known to those of skill in the art.

As is further illustrated in **Fig. 10**, a buffer layer **402** may optionally be provided on the substrate **400**. The buffer layer **402** may provide for transitions in materials, for example, to lattice-match the substrate **200** to the materials that form the active regions of the light emitting device. For example, a graded AlGaN buffer layer may be used between a SiC substrate and

GaN, AlGaIn, InGaIn or AlInGaIn active layers to improve the quality of these active layers in comparison to formation of these layers directly on the SiC substrate. The particular buffer layer material will depend on the materials of the substrate and the active layers. Buffer layers and techniques for the use of buffer layers in fabricating light emitting devices are known to those of skill in the art and need not be described further herein.

The light emitting device may also include an n-type semiconductor layer **404**, one or more quantum well layers **406** and a p-type semiconductor layer **408**. In a vertical device, these layers along with the conductive substrate **400** and conductive buffer layer **402** are collectively referred to as the "active layers" of the device. The particular structure, materials and configuration of the active layers may be any suitable structure, materials or configuration that is capable of producing light when a current passes between the p-type layer and the n-type layer. Various structures, materials and configurations for the active layers of a vertical light emitting device are known to those of skill in the art. Any suitable structures, materials and configurations for the active layers may be utilized in embodiments of the present inventive subject matter as long as such structures, materials and configurations allow for the electrical interconnection of individual devices on the substrate **400** as described herein with reference to the exemplary structures, materials and configurations. In particular embodiments, the structure, materials and configuration may allow for the electrical interconnection of light emitting devices which are on a contiguous region of a wafer.

The individual light emitting devices **410** of the light emitter **1400** are defined by isolation regions **412**. The isolation regions **412** may, in some embodiments, be provided by ion implantation to create insulating or semi-insulating regions that extend through the active layers as illustrated in **Fig. 10**. Alternatively or additionally, one or more trenches could be formed between the light emitting devices **410**. The trenches could, optionally, be filled with an insulator, such as SiO<sub>x</sub> or SiN, to provide a more planar surface on which the electrical interconnect **418** and/or **420** is provided. Combinations of trenches and implantation could also be provided. For example, a trench could be formed and then ions implanted into the sidewalls and/or bottom of the trench to make these regions insulating or semi-insulating.

An n-type contact **414** on the substrate **400** provides a cathode contact for each die and a

p-type contact **416** provides an anode contact for each die. The particular configuration and composition of the n-type and p-type contacts **414** and **416** can be selected based on the material system of the lighting device. Techniques for fabricating n-type and p-type ohmic contacts in differing materials systems are well known to those of skill in the art. Embodiments of the present inventive subject matter may be utilized with any type of ohmic contact that is capable of being electrically interconnected to ohmic contacts of other light emitting devices on the wafer.

**Fig. 10** also illustrates optional insulating layers **424** and/or **426** that may be provided on exposed portions of the devices and/or between devices. The insulating layers **424** and/or **426** may function as protective and/or passivation layers for the devices. Such layers may be the result of the fabrication of the interconnection or may be provided as a separate layer after fabrication of the remainder of the device. Additionally, multiple layers may also be provided, for example, an Oxide-Nitride-Oxide (ONO) or Nitride-Oxide (NO) structure may be utilized.

As is further seen in **Fig. 10**, a conductive via **422** extends through the structure and connects the conductive die interconnections **418** and **420** formed on the opposing sides of the structure. The via **422** allows for the connection of anodes of a subsequent subset of devices to the cathodes of the previous subset of devices to provide the “series of parallel-connected subsets” array of devices illustrated in **Fig. 3**. Additionally, a via may also have the added benefit of conducting heat to an exterior surface of the device, thereby facilitating heat extraction from the junction region of the device.

**Figs. 11A through 11G** illustrate processing steps for the fabrication of lighting devices **1400** according to exemplary embodiments of the present inventive subject matter. As seen in **Fig. 11A**, a wafer with conventional layers for forming a light emitting diode may have a patterned mask **510** formed on an upper surface of the wafer. The patterned mask **510** defines the regions of the wafer for forming light emitting diodes with windows in the pattern mask corresponding to the isolation regions of the lighting device **1400**. Ion implantation is performed by implanting ions **512** through the patterned mask **510** to create insulating or semi-insulating isolation regions **412** in the structure of **Fig. 11A**. While the ion implantation is illustrated as being from a top side of the wafer, additionally or alternatively, ion implantation with a corresponding mask could be performed from the bottom or substrate side of the wafer as well.

Furthermore, a trench could be provided on one side of the wafer, for example, by utilizing the mask **510** as an etch mask, and then ion implantation performed using the same etch mask to provide a self-aligned trench and implanted region that, together, provide the isolation region **412**. The trench could also be filled with an insulator as described above to provide a more planar device surface for subsequent fabrication processes.

However the isolation region **412** is provided, as seen in **Fig. 11B**, a second mask layer **520** may be provided, the windows of which define vias through the isolation region **412**. Utilizing the second mask layer **520**, a via hole may be etched through the isolation region to extend through the device. The via hole is filled with conductive material, such as a metal, to provide a conductive via **422** through the device.

**Fig. 11C** illustrates the formation of the ohmic contact **416** to the p-type layer **408** by forming a third patterned mask **522** having windows corresponding to the locations of the ohmic contact **416**. Contact material is deposited in and patterned using the mask layer **522**. Similarly, **Fig. 11D** illustrates formation of the ohmic contact **414** on the substrate side of the device utilizing a fourth patterned mask **524**.

**Figs. 11 E and F** illustrate formation of the device interconnections **418, 420** on the front and back sides of the wafer. Thus, mask layers **526** and **528** are provided on opposite sides of the wafer and conductive material, such as a conductive metal, is deposited and patterned using the respective mask layers. Fabrication of the conductive interconnect regions **418** and **420** then results in the structure illustrated in **Fig. 11G**.

The processing steps of **Fig. 6A** through **6G**, **7A** through **7F**, **8A** through **8D** and **11A** through **11G** need not be carried out in the described order but may be carried out in any suitable order. For example, with respect to **Figs. 6A** through **6G**, if a high temperature anneal is required to produce the  $n^+$  contact region **210**, then it may be advantageous to perform the implant of the  $n^+$  contact region **210** prior to creating the isolation region **112** so that the anneal does not repair the crystal structure in the isolation region **112**. Similarly, if the formation of an ohmic contact to the p-type layer **208** requires an anneal, the ohmic contact **116** may be formed prior to implantation of the isolation region **112**. Thus, the sequence and particular processing steps utilized to provide the structures illustrated in the Figures may be selected depending on the



characteristics of the material system and the structure of the light emitting devices. Such variations are within the scope of the present inventive subject matter.

Also, while embodiments of the present inventive subject matter have been described with reference to using a mask layer, depositing a material on the mask and then using a lift-off or planarization technique to remove the undesired material, the present inventive subject matter should not be construed as limited to such techniques. For example, in alternative embodiments, a mask may be provided on a layer of material and the mask corresponding to the regions to be retained and windows corresponding to regions to remove. The unwanted material could then be removed, for example, by etching or other techniques known to those of skill in the art.

Systems incorporating embodiments of the present inventive subject matter will now be described with reference to **Fig. 12**. As seen in **Fig. 12**, a high voltage LED 610 as described above may be driven by a boost power supply 600. The boost power supply 600 may receive an alternating current (AC) input, such as an AC power line of 100, 120, 220, 230 or 277 volts RMS, and it converts that AC voltage to a direct current (DC) voltage having a higher value than the peak voltage of the AC input voltage. Boost power supply configurations are known to those of skill in the art.

Boost power supplies may be highly efficient. Furthermore, as discussed above, by providing a high voltage light emitter,  $I^2R$  losses may be reduced because the current through the light emitter may be reduced in comparison to corresponding lower voltage light emitters. Combining the high voltage light emitter as described herein with a boost power supply may provide very high system efficacies. Thus, in some embodiments of the present inventive subject matter, the high voltage light emitters are provided to operate at a voltage of at least 50 volts, at least 150 volts, at least 325 volts or at least 395 volts. The operating voltage of the high voltage light emitter may be controlled by the forward voltage drop of the individual devices and the number of subsets of parallel-connected devices that are connected in series. Thus, for example, if a 90 volt device is desired, 30 subsets of devices, each with a  $V_f$  of 3 volts, could be connected in series.

Representative examples of circuits which include a boost component are described in U.S. Patent Application No. 60/844,325, filed on September 13, 2006, entitled

“BOOST/FLYBACK POWER SUPPLY TOPOLOGY WITH LOW SIDE MOSFET CURRENT CONTROL” (inventor: Peter Jay Myers; attorney docket number 931\_020 PRO), and U.S. Patent Application No. 11/854,744, filed September 13, 2007, the entireties of which are hereby incorporated by reference.

As discussed above, by connecting subsets of parallel-connected devices in series, device yield may be increased because a failed light emitting device would not necessarily result in failed light emitter. Additionally, the higher the voltage of the monolithic device, the less likely that a short circuit of a die will make the overall light emitter unusable. For example, if a 300V light emitter is being fabricated from a serial connection of 100 subsets of parallel-connected devices and one of the devices short circuits, then the light emitter will have a voltage drop of 297V or 99% of the desired voltage. In contrast, if a 30V device is fabricated from the serial connection of 10 subsets of devices, failure of one device as a short circuit would result in a 27V device, or a change of 10%. Accordingly, for a given forward voltage, higher voltage monolithic light emitters may be more tolerant of individual faults in the devices of the light emitter.

Additionally, the number of devices within a subset may be balanced against the likelihood of short circuit failure. The more devices that are connected in parallel, the higher percentage of the total number of devices that will be lost in the event of a short circuit. However, the more devices that are connected in parallel, the more devices that can have an open circuit fault without raising the current through an individual device to an unacceptable level. In any event, at least three light emitting devices should be connected in parallel, so that the current through remaining devices in the event of an open circuit fault will not increase to levels that could substantially shorten the life of the remaining light emitting devices in the subset (which could otherwise start a spiral of failure).

Because a short circuit would result in the bypass of a subset of devices, in some embodiments of the present inventive subject matter a short circuit tolerant device could be provided. For example, when a light emitting device short-circuits, substantially all of the current that flows through the device flows through the shorted device. Thus, a fuse link or other such device could be incorporated in series with each device so that if the total current through the device (at least 3 times the normal current that would be expected to flow through the die)

flows through the die, the link opens. Thus, the current would transfer back to the remaining devices in the subset and the short circuit would be "healed." This process could continue until one of only two remaining functioning light emitting devices in a subset failed, in which case both fuses would open and the entire light emitter would fail. Fuses could be incorporated, for example, between the anode of a device and the interconnection metallization that forms a subset of devices.

In addition to self-healing devices as described above, yield could also be improved by measuring devices during the manufacturing process to detect short-circuited devices. These devices could then not be connected to the other devices in the subset. For example, the anode or cathode contact of the short-circuited device could be etched from the device using a stepper mask which would prevent the device from becoming part of the total device.

While embodiments of the present inventive subject matter have been described with reference to interconnections being formed on the wafer, other interconnection techniques for electrically interconnecting devices that are mechanically connected by a common substrate may also be utilized. For example, the submount described in commonly assigned and concurrently filed United States Patent Application Serial No. 60/986,795 entitled ILLUMINATION DEVICES USING EXTERNALLY INTERCONNECTED ARRAYS OF LIGHT EMITTING DEVICES, AND METHODS OF FABRICATING SAME, filed November 9, 2007 (Attorney Docket No. 931\_078 PRO2; Inventors: Gerald H. Negley and Antony Paul van de Ven), the disclosure of which is incorporated herein by reference as if set forth in its entirety, could be utilized.

Additionally, embodiments of the present inventive subject matter may be particularly well suited to providing light emitters as described in United States Patent No. 7,213,940, the disclosure of which is incorporated herein by reference as if set forth in its entirety. In embodiments incorporating a luminous material, light emitters according to the present inventive subject matter may provide light emitters as described in U.S. Patent Application No. 60/857,305, filed on November 7, 2006, entitled "LIGHTING DEVICE AND LIGHTING METHOD" (inventors: Antony Paul van de Ven and Gerald H. Negley; attorney docket number 931\_027 PRO, the entirety of which is hereby incorporated by reference as if set forth in its

entirety.

While inventive aspects have been described above primarily with reference to monolithic devices for operation with DC power sources, additional inventive aspects may provide monolithic devices suitable for operation with AC and/or DC power sources. Examples of such devices are illustrated in **Figs. 13** and **14**.

**Fig. 13** illustrates an AC monolithic device **1000**. The AC monolithic device **1000** includes a plurality of light emitting diodes **1010** provided as two or more arrays **1014**, **1016** of serially connected subsets **1012** of parallel connected light emitting diodes **1010**. The diodes **1010** may be interconnected as described elsewhere herein. The diodes **1010** may have a common substrate and/or be formed from a common n-type or p-type layer. The arrays **1014** and **1016** may be electrically arranged in an anti-parallel relationship such that when an alternating current (AC) power source is applied to the two arrays **1014**, **1016**, substantially all of the current flows through only one of the arrays on alternating cycles of the AC input. Thus, the monolithic device **1000** may be suitable for use as an AC device. The expression “anti-parallel”, as used herein, refers to circuitry in which arrays of diodes are arranged in parallel, with the diodes in at least one array being oriented (biased) in a direction which is opposite to the direction of orientation (bias) of the diodes in at least one other array (as shown in the circuit depicted in **Fig. 13**).

The monolithic device **1000** may be made using any of the fabrication techniques described herein that are capable of providing the interconnections illustrated in **Fig. 13**. The number of serially connected subsets **1012** of light emitting diodes **1010** may be selected based on the desired operating voltage. Also, the number of light emitting diodes **1010** that are connected in parallel may be selected as described above and should include at least three parallel connected devices.

**Fig. 14** illustrates a monolithic device **2000** that may receive an AC or DC input. In particular, the monolithic device **2000** includes a rectifying bridge **2020** and one or more arrays **2010** of serially connected subsets **2012** of parallel connected light emitting devices. The rectifying bridge **2020** may be constructed of light emitting devices **2022**. The light emitting devices **2022** may be formed on a common substrate, from a common n-type or p-type layer or

from a common material system, such as SiC, GaN, etc., as the light emitting devices in the array **2010**. The diodes **2022** may also be non-light emitting. The number of diodes **2022** in each leg of the bridge **2020** depends on the reverse breakdown characteristics of the diodes and should be sufficient to support the reverse voltage from alternating cycles of the AC input. While the diodes **2022** are shown as two diodes serially connected, other numbers of diodes may be utilized. Furthermore, the diodes **2022** of the bridge **2020** may be provided as serially connected subsets of parallel connected diodes as described herein.

The output of the bridge **2020** is a full wave rectified voltage that is provided to the array **2010**. As described above, the number of serially connected devices in the array **2010** may be selected based on the operating voltage provided by the bridge **2020**.

The monolithic device **2000** may be provided using any suitable fabrication and interconnection technique as described above. Furthermore, while the monolithic device is illustrated in **Fig. 14** with an AC input, a DC input could be applied to the device.

While embodiments of the present inventive subject matter have been described with reference to particular techniques and/or processes for the interconnection of multiple devices on a common substrate, other techniques may also be utilized. For example, techniques from microelectronic fabrication for interconnection of devices on a common substrate, such as interconnection techniques used in the fabrication of memory devices, may be utilized. Accordingly, some embodiments of the present inventive subject matter should not be construed as limited to the particular techniques and/or processes for the interconnection of multiple devices.

In some embodiments of the present inventive subject matter, an insulating layer(s) may be blanket deposited on all of the devices and regions between devices of the monolithic light emitter. Vias may be patterned and filled to connect to contacts of the individual devices. Interconnections between the vias may be provided, for example, using a damascene process where trenches are formed in the insulating layer followed by a blanket deposition of interconnection metal. A planarization, such as by CMP, may then be performed to remove interconnect metal that is not in the trenches, thereby creating a desired interconnection pattern on the wafer or portion thereof containing the devices of the light emitter.

The light emitters of the present inventive subject matter can be supplied with electricity in any desired manner. Skilled artisans are familiar with a wide variety of power supplying apparatuses, and any such apparatuses can be employed in connection with the present inventive subject matter. The light emitters of the present inventive subject matter can be electrically connected (or selectively connected) to any desired power source, persons of skill in the art being familiar with a variety of such power sources.

Furthermore, while certain embodiments of the present inventive subject matter have been illustrated with reference to specific combinations of elements, various other combinations may also be provided without departing from the teachings of the present inventive subject matter. Thus, the present inventive subject matter should not be construed as being limited to the particular exemplary embodiments described herein and illustrated in the Figures, and it may also encompass combinations of elements of the various illustrated embodiments.

For example, embodiments have been described herein in which each of the serially connected subsets of light emitting devices contains the same number of light emitting devices (for example, in the embodiment depicted in Fig. 3, and other embodiments depicted herein, each of the subsets contains three light emitting devices), but the present inventive subject matter is not limited to light emitters in which such is the case. In other words, the present inventive subject matter encompasses light emitters in which each of the subsets have the same number of light emitting devices as well as light emitters in which at least one (or more) of the subsets has a number of light emitting devices which differs from the number of light emitting devices in at least one other subset. In addition, respective light emitting devices within a single subset and/or in different subsets can be of the same or substantially the same size, or can be of differing sizes. In light emitters in which a first subset is connected in series with a second subset and the first and second subsets have different respective numbers of light emitting devices, in some embodiments according to the present inventive subject matter, the current density passing through the first and second subsets is the same or substantially the same, e.g., by selecting the respective light emitting devices to be of differing sizes.

Many alterations and modifications may be made by those having ordinary skill in the art, given the benefit of the present disclosure, without departing from the spirit and scope of the

inventive subject matter. Therefore, it must be understood that the illustrated embodiments have been set forth only for the purposes of example, and that it should not be taken as limiting the inventive subject matter as defined by the following claims. The following claims are, therefore, to be read to include not only the combination of elements which are literally set forth but all equivalent elements for performing substantially the same function in substantially the same way to obtain substantially the same result. The claims are thus to be understood to include what is specifically illustrated and described above, what is conceptually equivalent, and also what incorporates the essential idea of the inventive subject matter.

Any two or more structural parts of the devices described herein can be integrated. Any structural part of the devices described herein can be provided in two or more parts (which are held together, if necessary). Similarly, any two or more functions can be conducted simultaneously, and/or any function can be conducted in a series of steps.

That which is claimed is:

1. A light emitter, comprising:  
a plurality of light emitting devices mechanically interconnected by a common substrate on which the light emitting devices are formed;  
wherein the light emitting devices are electrically interconnected on the common substrate to provide an array of at least two serially connected subsets of parallel connected light emitting devices, each subset comprising at least three light emitting devices.
2. The light emitter of Claim 1, wherein the forward voltage of the light emitter is at least 325 volts.
3. The light emitter of Claim 1, wherein the forward voltage of the light emitter is at least 395 volts.
4. The light emitter of Claim 1, wherein the light emitting devices comprise light emitting diodes (LEDs).
5. The light emitter of Claim 4, wherein the LEDs are isolated from one another by an insulating region.
6. The light emitter of Claim 4, wherein the LEDs are isolated from one another by a trench.
7. The light emitter of Claim 4, wherein the LEDs are lateral devices.
8. The light emitter of Claim 4, wherein the LEDs are vertical devices.
9. The light emitter of Claim 1, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.



10. The light emitter of Claim 1, wherein the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

11. A light emitter comprising:

a plurality of light emitting devices from a contiguous region of a wafer of light emitting devices, the plurality of light emitting devices being electrically connected on a substrate as a plurality of serially connected subsets of parallel connected light emitting devices, each subset comprising at least three light emitting devices.

12. The light emitter of Claim 11, wherein the plurality of serially connected subsets comprises at least forty subsets.

13. The light emitter of Claim 11, wherein the plurality of serially connected subsets comprises at least one hundred subsets.

14. The light emitter of Claim 11, wherein the plurality of light emitting devices are mechanically connected by a common substrate of the wafer.

15. The light emitter of Claim 14, wherein the light emitting devices are defined by at least one insulating region that defines a periphery of each of the individual light emitting devices.

16. The light emitter of Claim 14, wherein the light emitting devices are defined by at least one trench that defines a periphery of each of the individual light emitting devices.

17. The light emitter of Claim 11, further comprising a mechanical substrate on which the light emitting devices are mounted to provide mechanical support for the light emitting devices.

18. The light emitter of Claim 11, wherein the light emitting devices comprise lateral devices.

19. The light emitter of Claim 11, wherein the light emitting devices comprise vertical devices.

20. The light emitter of Claim 11, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

21. The light emitter of Claim 11, wherein the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

22. A light emitter, comprising:  
a plurality of light emitting devices;  
means for mechanically interconnecting the plurality of light emitting devices; and  
means for electrically interconnecting the plurality of light emitting devices to provide serially connected subsets of light emitting devices that are electrically interconnected in parallel, each subset comprising at least three light emitting devices.

23. The light emitter of Claim 22, further comprising means for healing a short-circuit failure of one of the plurality of light emitting devices.

24. The light emitter of Claim 22, wherein:  
the light emitter further comprises a boost power supply having an output voltage that is greater than a corresponding input voltage; and  
the serially connected subsets of light emitting devices are electrically coupled to the output voltage of the boost power supply.

25. The light emitter of Claim 24, wherein the boost power supply is configured to be coupled to an AC power source to provide the input voltage.

26. A method of fabricating a light emitter, comprising:  
forming a plurality of light emitting devices on a substrate; and  
electrically connecting the light emitting devices on the substrate to provide an array of at least two serially connected subsets of parallel connected light emitting devices, each subset comprising at least three light emitting devices.

27. The method of Claim 26, wherein the array provides a forward voltage for the light emitter of at least 18 volts.

28. The method of Claim 26, wherein the method further comprises testing at least one of the light emitting devices.

29. The method of Claim 26, wherein the method further comprises testing at least one of the light emitting devices and electrically disconnecting one of the light emitting devices from the light emitting device.

30. The method of Claim 29, wherein the step of electrically disconnecting one of the light emitting devices is carried out by etching an anode contact or a cathode contact of one of the light emitting devices.

31. The method of Claim 29, wherein the step of electrically disconnecting one of the light emitting devices is carried out by applying insulating material on an anode contact or a cathode contact of one of the light emitting devices.

32. A method of fabricating a light emitter, comprising:  
forming a plurality of light emitting device layers on a substrate;

defining individual light emitting devices in regions of the light emitting device layers;  
and

electrically connecting the individual light emitting devices on the substrate to provide serially connected subsets of the light emitting devices, wherein each of the subsets comprises at least three light emitting devices electrically connected in parallel.

33. The method of Claim 32, wherein defining individual light emitting devices comprises implanting ions about the peripheries of the light emitting devices to provide at least one insulating or semi-insulating region that defines the peripheries of the individual light emitting devices.

34. The method of Claim 33, wherein each of the light emitting devices comprises a lateral light emitting device having a first surface on which a first ohmic contact is provided on a first contact layer of the respective light emitting device and a second, buried contact layer, and wherein the step of electrically connecting individual light emitting devices comprises:

for each light emitting device, forming a conductive region that extends from the first surface through the insulating or semi-insulating region of the light emitting device to electrically connect to the buried contact layer;

for each light emitting device, forming an ohmic contact on the conductive region to provide a second ohmic contact electrically connected to the buried contact layer; and

forming an electrical interconnection pattern on the respective first surfaces of the light emitting devices to selectively interconnect first ohmic contacts and second ohmic contacts to provide the serially connected subsets of light emitting devices.

35. The method of Claim 34, wherein forming a conductive region comprises forming a highly doped region of semiconductor material of the same conductivity type as the buried contact layer.

36. The method of Claim 34, wherein forming a conductive region comprises, for each light emitting device, forming a conductive via extending from the first surface to the buried contact layer.

37. The method of Claim 33, wherein each of the light emitting devices comprises a vertical light emitting diode having respective ohmic contacts on opposite faces of the light emitting device, and wherein electrically connecting individual light emitting devices comprises:

forming interconnection patterns on the opposite faces of the light emitting devices to electrically connect respective ohmic contacts of the light emitting devices into the subsets of light emitting devices, the interconnection patterns extending onto the electrically insulating or semi-insulating regions; and

forming conductive vias through the electrically insulating or semi-insulating regions to selectively electrically connect respective interconnection patterns so as to serially connect the subsets of light emitting devices.

38. The method of Claim 32, further comprising forming light extraction features in the substrate.

39. The method of Claim 32, wherein defining individual light emitting devices comprises forming at least one trench about the peripheries of the light emitting devices, wherein the at least one trench defines the peripheries of the individual light emitting devices.

40. The method of Claim 39, wherein each light emitting device includes a first ohmic contact and the at least one trench extends to respective contact layers of each of the light emitting devices, the method further comprising:

forming a second ohmic contact on the contact layer of each of the light emitting devices;

filling the at least one trench with an insulator material;

forming a plurality of conductive vias through the insulator material, each conductive via contacting the first ohmic contact of one of the light emitting devices; and

wherein electrically connecting the individual light emitting devices comprises forming interconnection patterns that electrically connect respective first contacts of a first subset of the light emitting devices to respective conductive vias associated with second contacts of a second subset of the light emitting devices.

41. The method of Claim 32, wherein the method further comprises testing at least one of the light emitting devices.

42. The method of Claim 32, wherein the method further comprises testing at least one of the light emitting devices and electrically disconnecting one of the light emitting devices from the light emitting device.

43. The method of Claim 42, wherein the step of electrically disconnecting one of the light emitting devices is carried out by etching an anode contact or a cathode contact of one of the light emitting devices.

44. The method of Claim 42, wherein the step of electrically disconnecting one of the light emitting devices is carried out by applying insulating material on an anode contact or a cathode contact of one of the light emitting devices.

45. A light emitter, comprising:  
a plurality of light emitting devices formed on a common substrate, each of the light emitting devices comprising means for generating light,  
means for electrically connecting at least first, second and third of the light emitting devices in parallel as a first subset;  
means for electrically connecting at least fourth, fifth and sixth of the light emitting devices in parallel as a second subset;  
means for electrically connecting the first subset and the second subset in series.

46. A light emitter as recited in claim 45, wherein:  
the first light emitting device comprises a first n-type region and a first p-type region;  
the second light emitting device comprises a second n-type region and a second p-type region;  
the third light emitting device comprises a third n-type region and a third p-type region;  
the fourth light emitting device comprises a fourth n-type region and a fourth p-type region;  
the fifth light emitting device comprises a fifth n-type region and a fifth p-type region;  
the sixth light emitting device comprises a sixth n-type region and a sixth p-type region;  
the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region are each regions of a single monolithic n-type layer;  
the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region are each regions of a single monolithic p-type layer;  
the light emitter comprises means for isolating each of the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region from each other; and  
the light emitter comprises means for isolating each of the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region from each other.

47. The light emitter of Claim 45, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

48. The light emitter of Claim 45, wherein the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

49. A light emitter, comprising:

- at least first, second, third, fourth, fifth and sixth solid state light emitting devices,
- the first solid state light emitting device comprising a first n-type region and a first p-type region,
- the second solid state light emitting device comprising a second n-type region and a second p-type region,
- the third solid state light emitting device comprising a third n-type region and a third p-type region,
- the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,
- the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,
- the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,
- the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,
- the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,
- an anode end of the first solid state light emitting device being electrically connected to an anode end of the second solid state light emitting device and an anode end of the third solid state light emitting device;
- a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;
- the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device;



the anode end of the fourth solid state light emitting device being electrically connected to an anode end of the fifth solid state light emitting device and an anode end of the sixth solid state light emitting device; and

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device.

50. The light emitter of Claim 49, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

51. The light emitter of claim 49, wherein the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

52. A light emitter, comprising:  
at least first, second, third, fourth, fifth and sixth solid state light emitting devices;  
the first solid state light emitting device comprising a first n-type region and a first p-type region,  
the second solid state light emitting device comprising a second n-type region and a second p-type region,  
the third solid state light emitting device comprising a third n-type region and a third p-type region,  
the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,  
the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,  
the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,  
the first n-type region, the second n-type region, the third n-type region, the fourth n-type

region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a first anode electrically connected to the first p-type region;

a first cathode electrically connected to the first n-type region;

a second anode electrically connected to the second p-type region;

a second cathode electrically connected to the second n-type region;

a third anode electrically connected to the third p-type region;

a third cathode electrically connected to the third n-type region;

a fourth anode electrically connected to the fourth p-type region;

a fourth cathode electrically connected to the fourth n-type region;

a fifth anode electrically connected to the fifth p-type region;

a fifth cathode electrically connected to the fifth n-type region;

a sixth anode electrically connected to the sixth p-type region;

a sixth cathode electrically connected to the sixth n-type region;

a first interconnect electrically connected to the first anode, the second anode and the third anode;

a second interconnect electrically connected to the first cathode, the second cathode and the third cathode; and

a third interconnect electrically connected to the fourth cathode, the fifth cathode and the sixth cathode.

53. A light emitter as recited in claim 52, wherein said light emitter is suitable for operation with an AC power source.

54. The light emitter of Claim 52, wherein the first interconnect, the second interconnect and the third interconnect are all positioned to a first side of the p-type layer.

55. The light emitter of claim 52, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices and/or at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

56. A light emitter, comprising:  
at least first, second, third, fourth, fifth and sixth solid state light emitting devices;  
the first solid state light emitting device comprising a first n-type region and a first p-type region,  
the second solid state light emitting device comprising a second n-type region and a second p-type region,  
the third solid state light emitting device comprising a third n-type region and a third p-type region,  
the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,  
the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,  
the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,  
the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,  
the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,  
a first p-type contact electrically connected to the first p-type region,  
a first n-type contact electrically connected to the first n-type region,  
a second p-type contact electrically connected to the second p-type region,  
a second n-type contact electrically connected to the second n-type region,

a third p-type contact electrically connected to the third p-type region,  
a third n-type contact electrically connected to the third n-type region,  
a fourth p-type contact electrically connected to the fourth p-type region,  
a fourth n-type contact electrically connected to the fourth n-type region,  
a fifth p-type contact electrically connected to the fifth p-type region,  
a fifth n-type contact electrically connected to the fifth n-type region,  
a sixth p-type contact electrically connected to the sixth p-type region,  
a sixth n-type contact electrically connected to the sixth n-type region,  
a first interconnect electrically connected to the first p-type contact, the second p-type contact and the third p-type contact,  
a second interconnect electrically connected to the first n-type contact, the second n-type contact and the third n-type contact,  
a third interconnect electrically connected to the fourth p-type contact, the fifth p-type contact and the sixth p-type contact, and  
a conductive via electrically connected to the second interconnect and the third interconnect, the conductive via extending through the p-type layer.

57. A light emitter as recited in claim 56, wherein said light emitter is suitable for operation with an AC power source.

58. The light emitter of Claim 56, wherein the light emitter further comprises at least one fuse link electrically connected in series with at least one of the light emitting devices.

59. The light emitter of claim 56, wherein the light emitter further comprises at least one means for opening an electrically conductive connection in series with at least one of the light emitting devices.

60. A light emitter, comprising:

at least a first array of solid state light emitting devices and a second array of solid state

light emitting devices, the first array of solid state light emitting devices comprising at least first, second, third, fourth, fifth and sixth solid state light emitting devices,

the first solid state light emitting device comprising a first n-type region and a first p-type region,

the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device,

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device,

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device,

the anode end of the first solid state light emitting device being electrically connected to

the anode end of the second solid state light emitting device and the anode end of the third solid state light emitting device, and

the first array and the second array being electrically arranged in an anti-parallel relationship.

61. A light emitter as recited in claim 60, wherein said second array comprises at least seventh, eighth, ninth, tenth, eleventh and twelfth solid state light emitting devices,

the seventh solid state light emitting device comprising a seventh n-type region and a seventh p-type region,

the eighth solid state light emitting device comprising an eighth n-type region and an eighth p-type region,

the ninth solid state light emitting device comprising a ninth n-type region and a ninth p-type region,

the tenth solid state light emitting device comprising a tenth n-type region and a tenth p-type region,

the eleventh solid state light emitting device comprising an eleventh n-type region and an eleventh p-type region,

the twelfth solid state light emitting device comprising a twelfth n-type region and a twelfth p-type region,

the seventh n-type region, the eighth n-type region, the ninth n-type region, the tenth n-type region, the eleventh n-type region and the twelfth n-type region each being isolated regions of a single monolithic n-type layer,

the seventh p-type region, the eighth p-type region, the ninth p-type region, the tenth p-type region, the eleventh p-type region and the twelfth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the seventh solid state light emitting device being electrically connected to a cathode end of the eighth solid state light emitting device and a cathode end of the ninth solid state light emitting device,

a cathode end of the tenth solid state light emitting device being electrically connected to

a cathode end of the eleventh solid state light emitting device and a cathode end of the twelfth solid state light emitting device,

the cathode end of the seventh solid state light emitting device being electrically connected to an anode end of the tenth solid state light emitting device, and

the anode end of the seventh solid state light emitting device being electrically connected to the anode end of the eighth solid state light emitting device and the anode end of the ninth solid state light emitting device.

62. A light emitter as recited in claim 60, wherein at least the solid state light emitting devices in the first array and the solid state light emitting devices in the second array have a common substrate.

63. A light emitter as recited in claim 60, wherein at least the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region, the sixth n-type region and the n-type regions of the solid state light emitting devices in the second array are all part of the same integral n-type element.

64. A light emitter as recited in claim 60, wherein at least the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region, the sixth p-type region and the p-type regions of the solid state light emitting devices in the second array are all part of the same integral p-type element.

65. A circuit for a light emitter, the circuit comprising:  
a rectifying bridge;  
at least first, second, third, fourth, fifth and sixth solid state light emitting devices,  
the first solid state light emitting device comprising a first n-type region and a first p-type region,  
the second solid state light emitting device comprising a second n-type region and a second p-type region,

the third solid state light emitting device comprising a third n-type region and a third p-type region,

the fourth solid state light emitting device comprising a fourth n-type region and a fourth p-type region,

the fifth solid state light emitting device comprising a fifth n-type region and a fifth p-type region,

the sixth solid state light emitting device comprising a sixth n-type region and a sixth p-type region,

the first n-type region, the second n-type region, the third n-type region, the fourth n-type region, the fifth n-type region and the sixth n-type region each being isolated regions of a single monolithic n-type layer,

the first p-type region, the second p-type region, the third p-type region, the fourth p-type region, the fifth p-type region and the sixth p-type region each being isolated regions of a single monolithic p-type layer,

a cathode end of the first solid state light emitting device being electrically connected to a cathode end of the second solid state light emitting device and a cathode end of the third solid state light emitting device;

a cathode end of the fourth solid state light emitting device being electrically connected to a cathode end of the fifth solid state light emitting device and a cathode end of the sixth solid state light emitting device;

the cathode end of the first solid state light emitting device being electrically connected to an anode end of the fourth solid state light emitting device;

the anode end of the first solid state light emitting device being electrically connected to the anode end of the second solid state light emitting device and the anode end of the third solid state light emitting device.

66. A circuit as recited in claim 65, wherein the rectifying bridge comprises at least one solid state light emitting device.



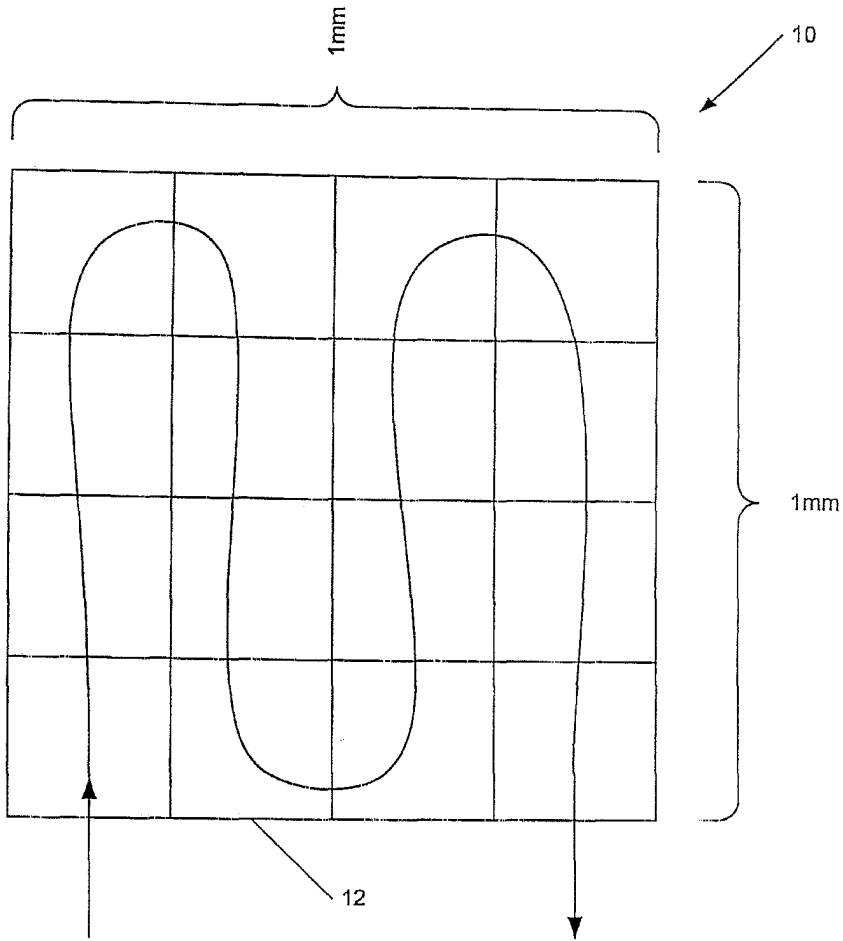


FIG. 1

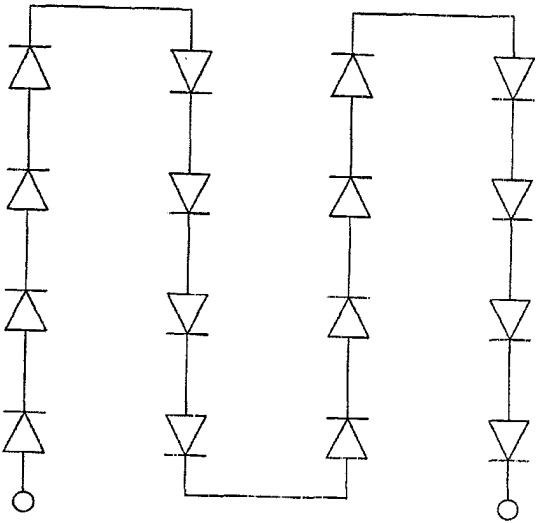


FIG. 2

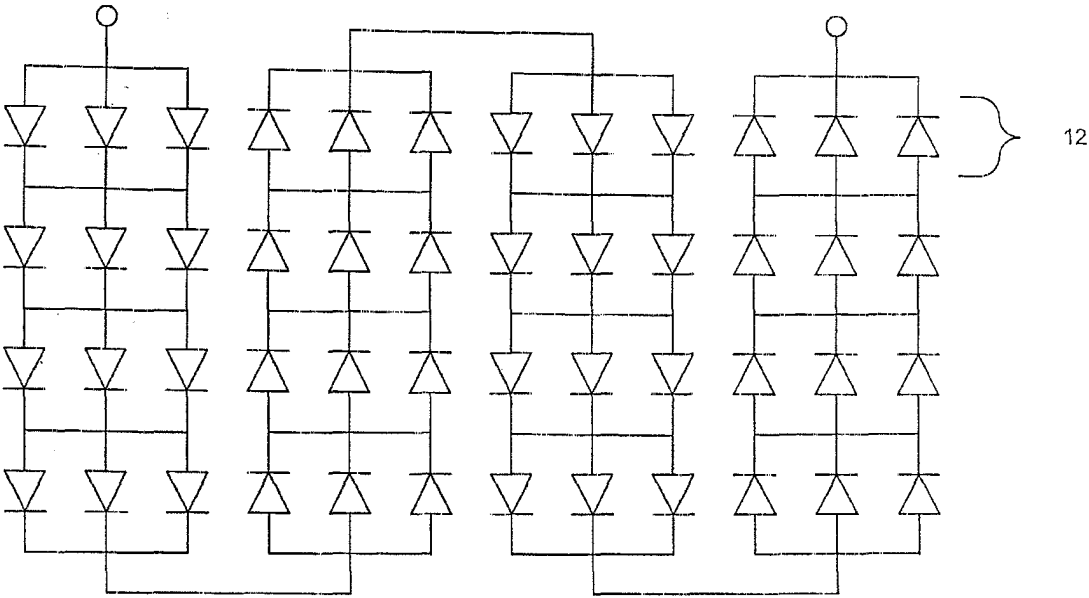


FIG. 3

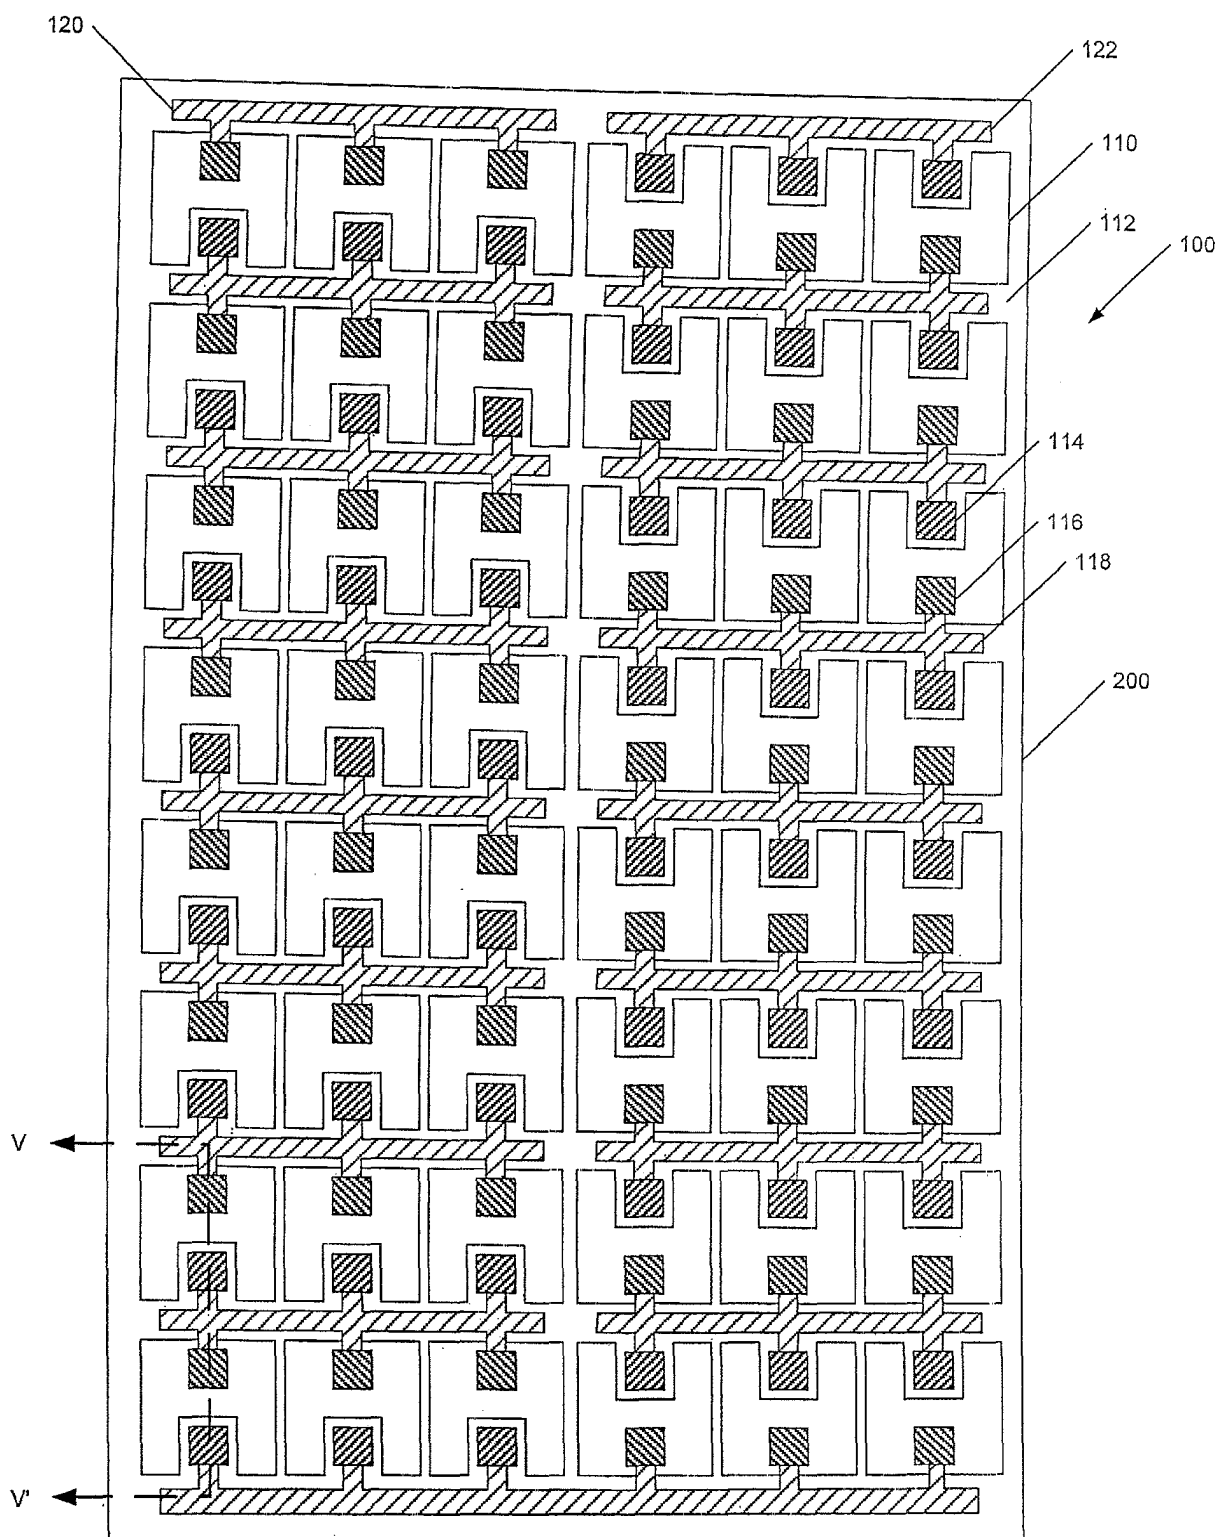


FIG. 4

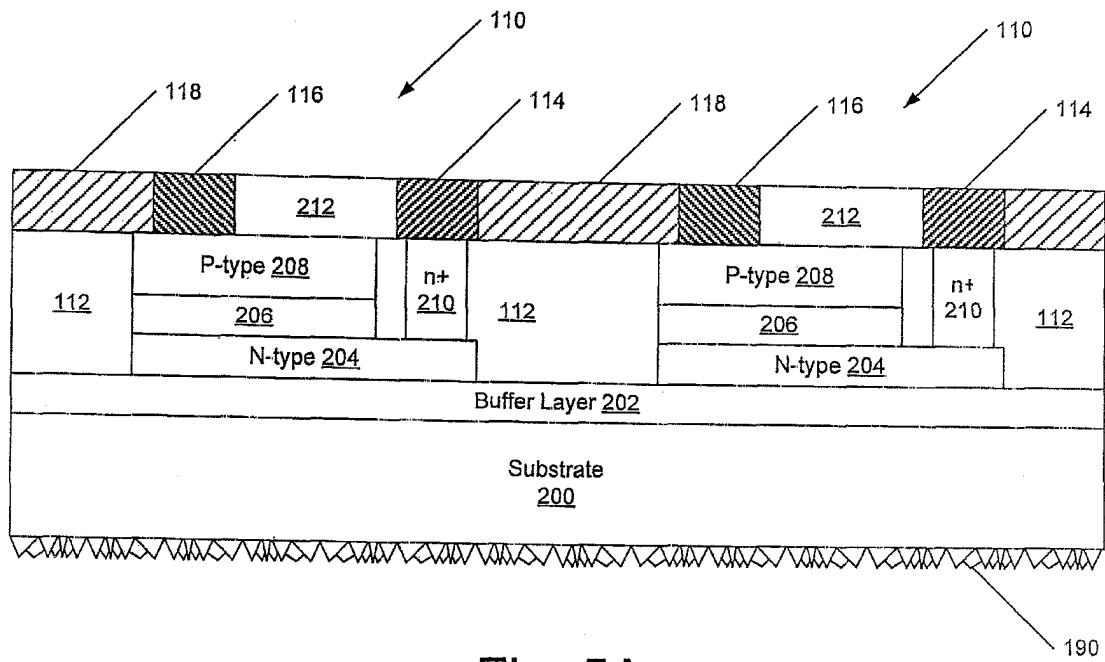


Fig. 5A

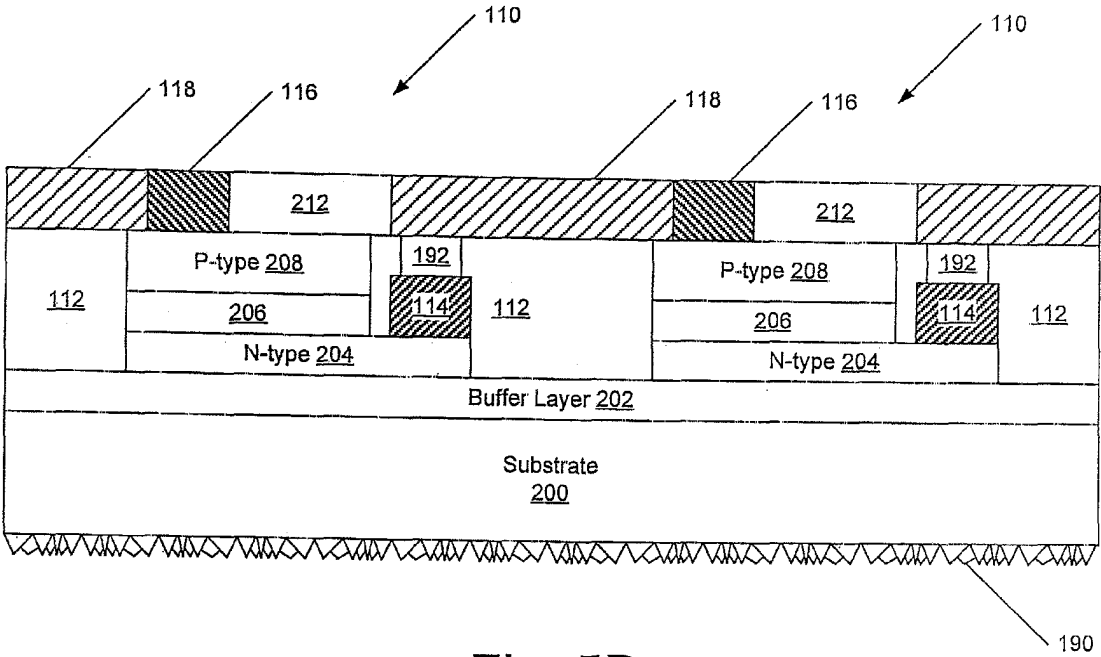


Fig. 5B

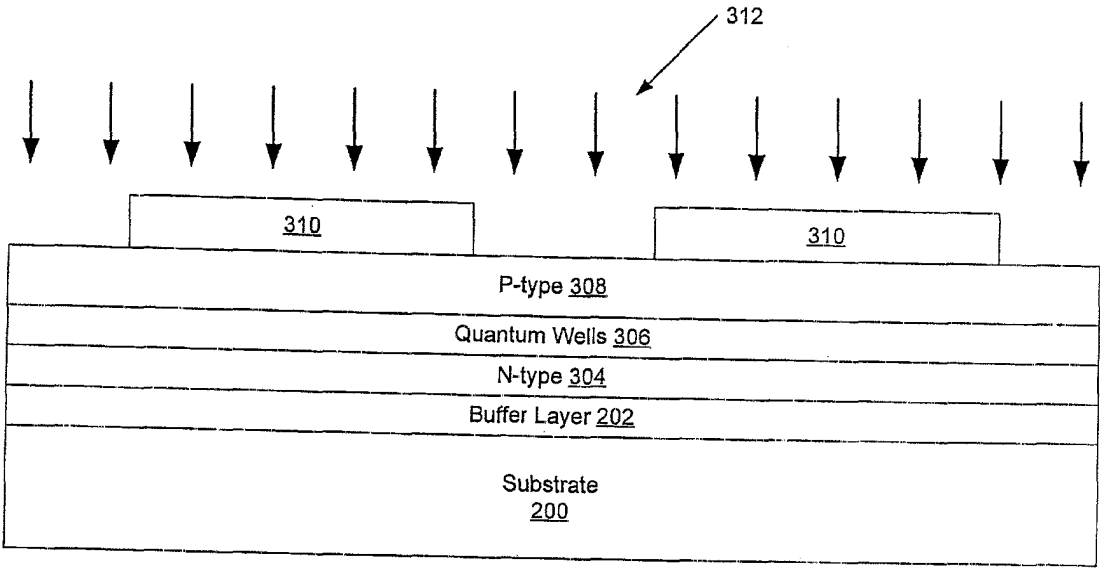


Fig. 6A

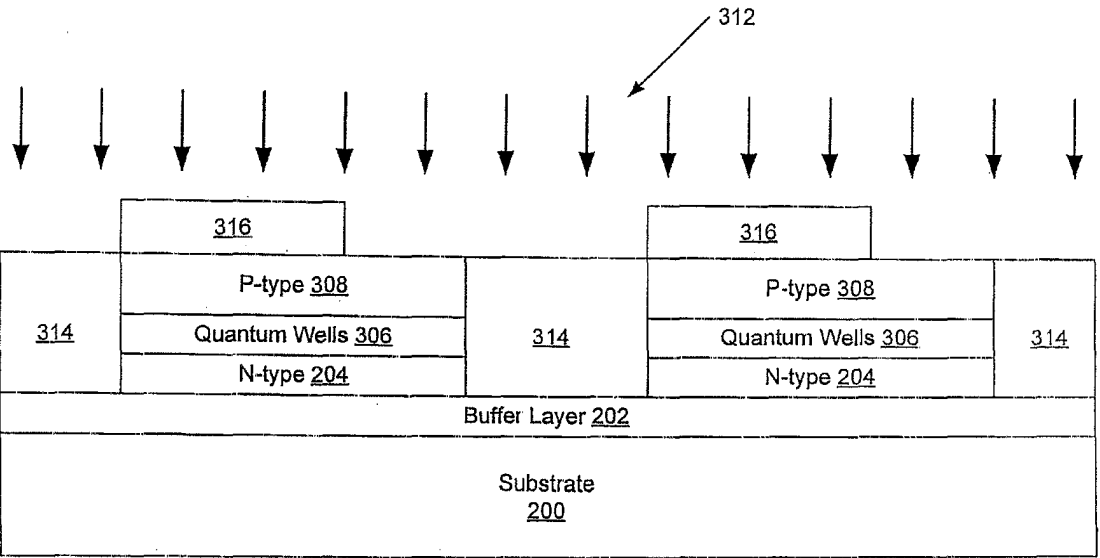


Fig. 6B

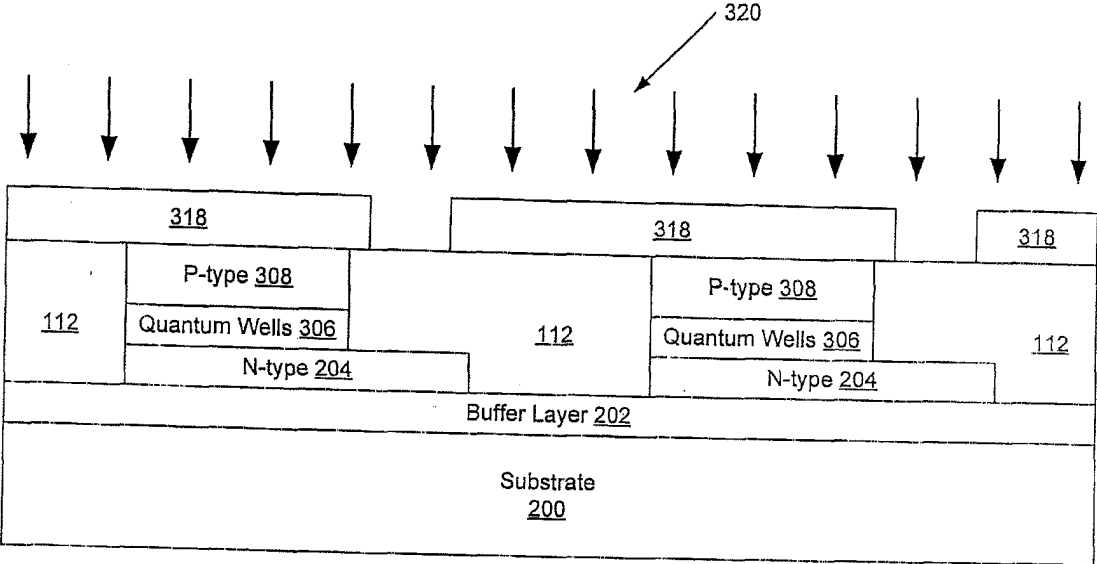


Fig. 6C

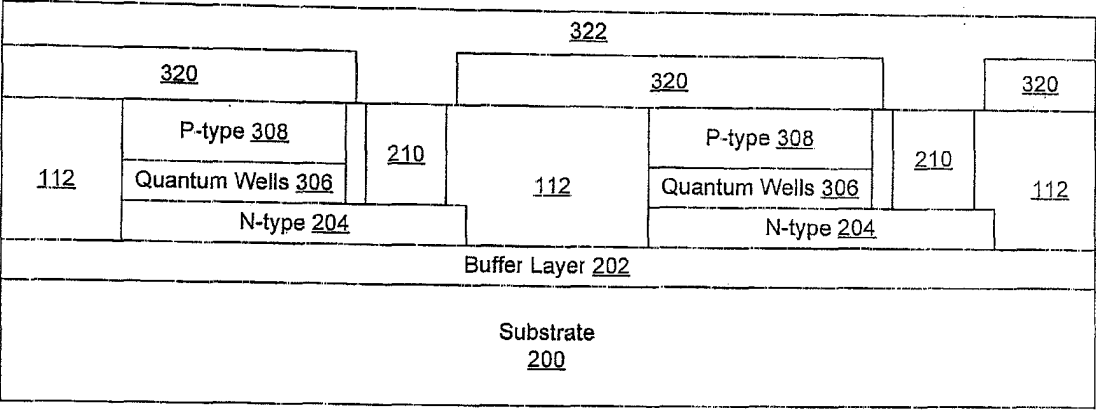


Fig. 6D

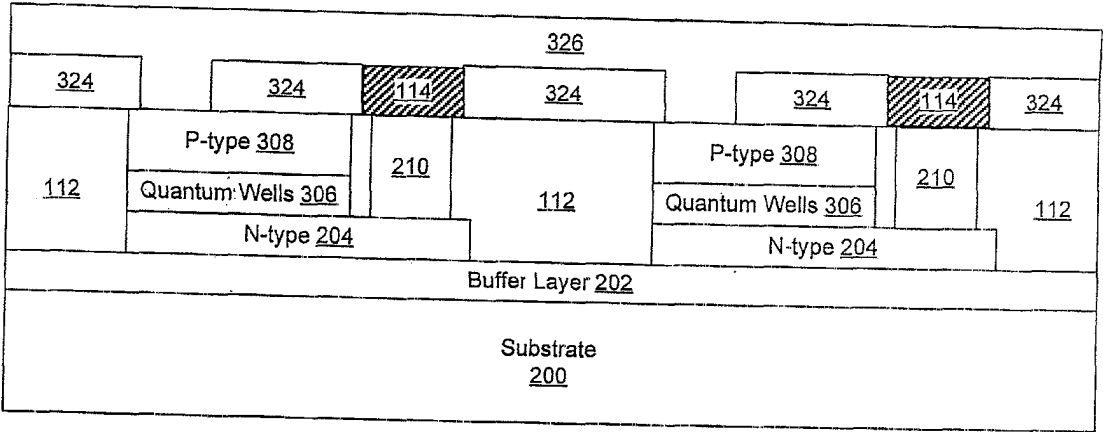


Fig. 6E

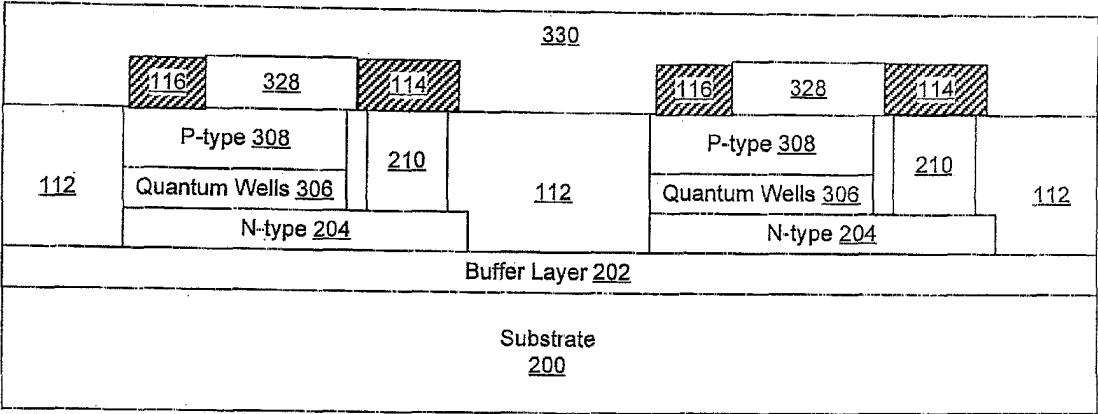


Fig. 6F



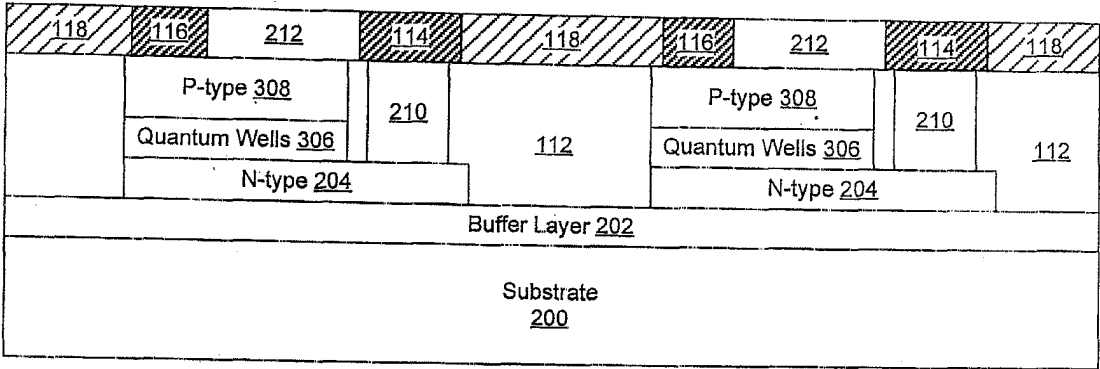


Fig. 6G

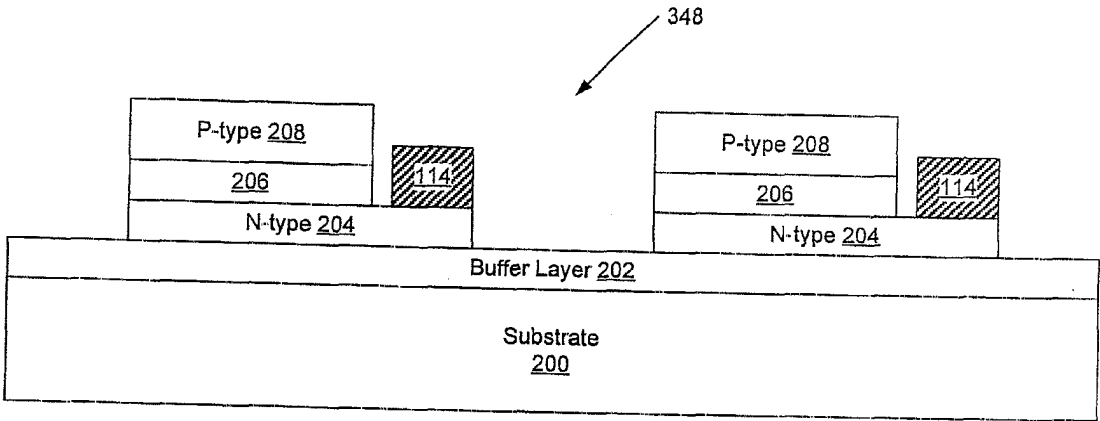


Fig. 7A

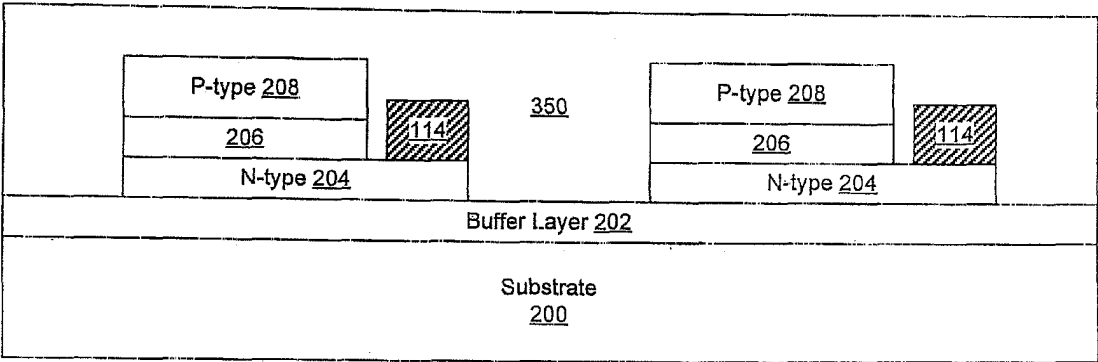


Fig. 7B

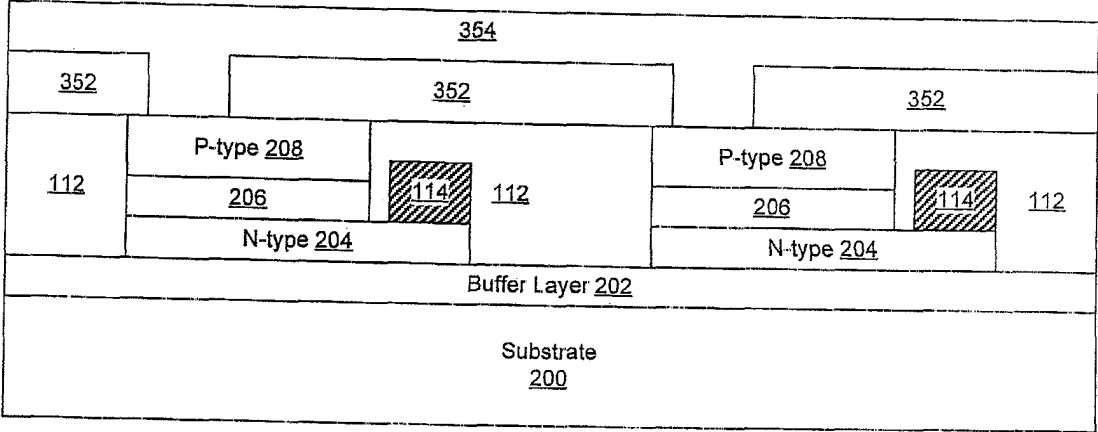


Fig. 7C

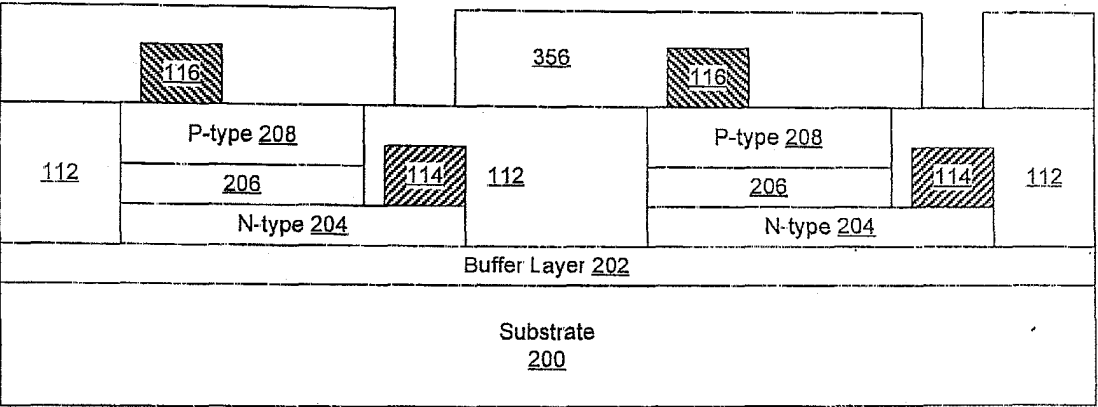


Fig. 7D

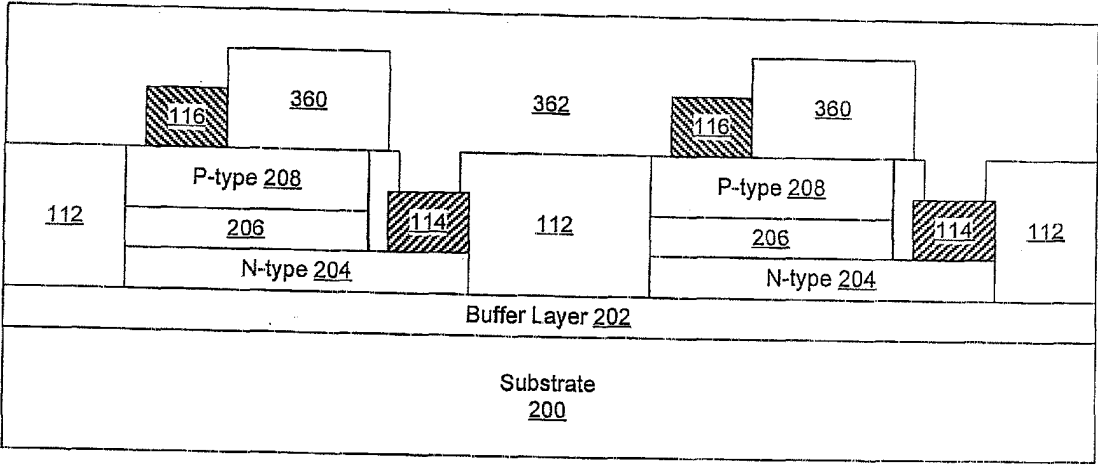


Fig. 7E

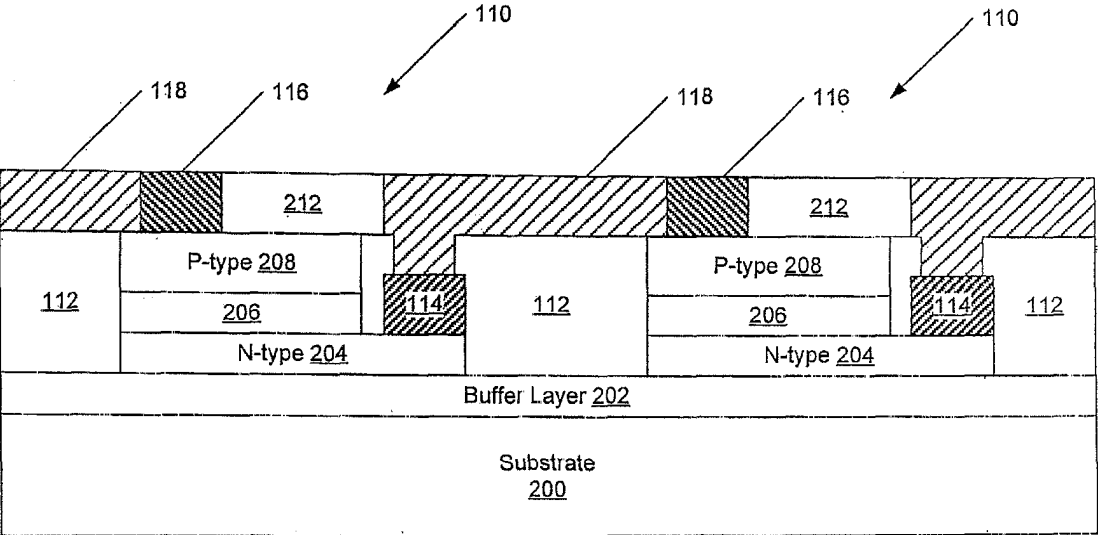


Fig. 7F

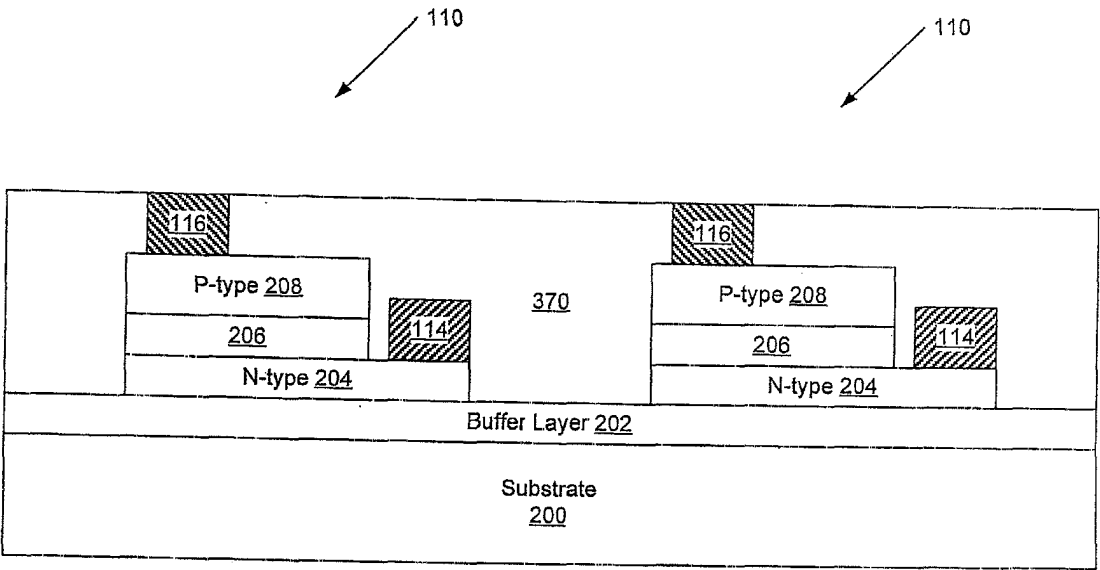


Fig. 8A

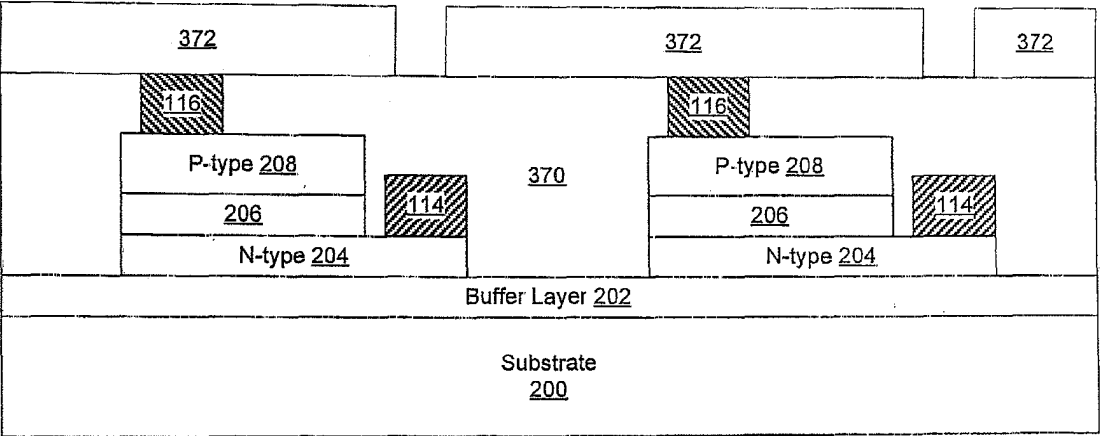


Fig. 8B

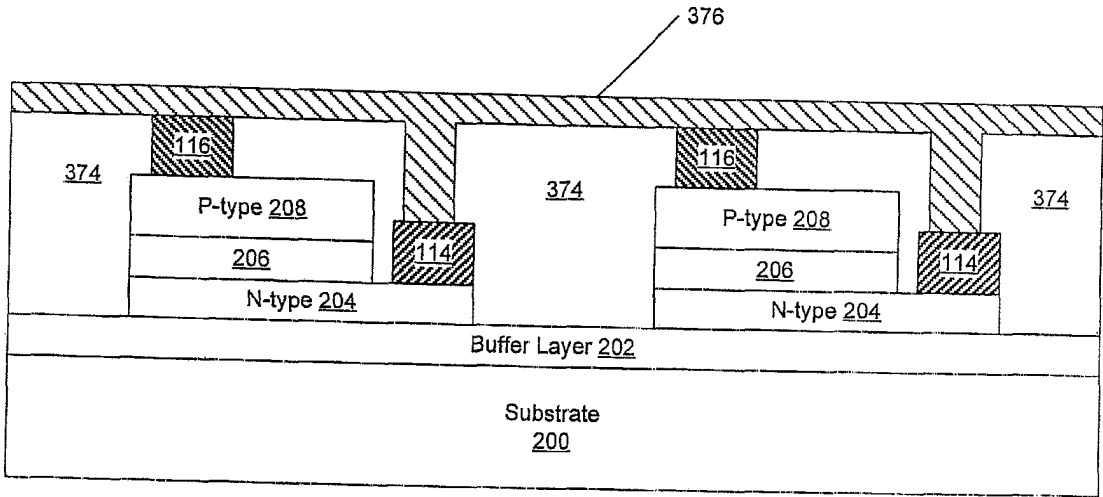


Fig. 8C

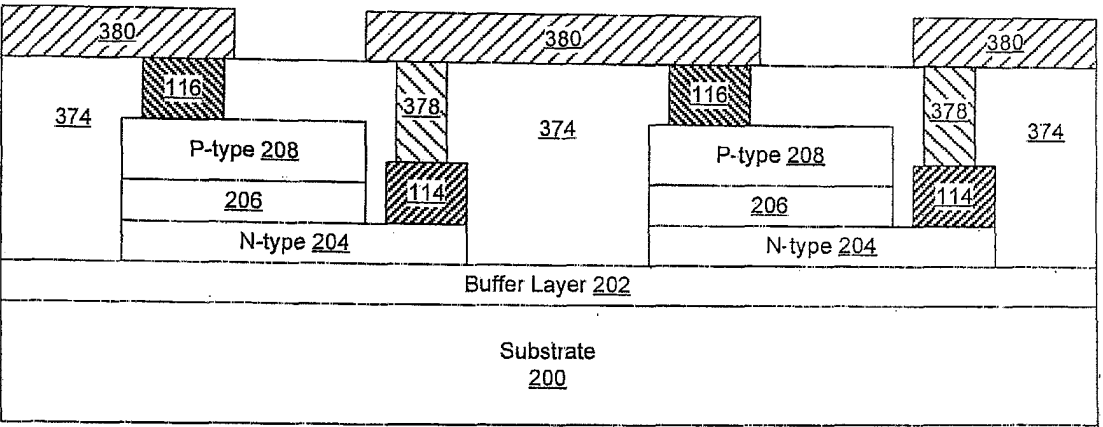


Fig. 8D

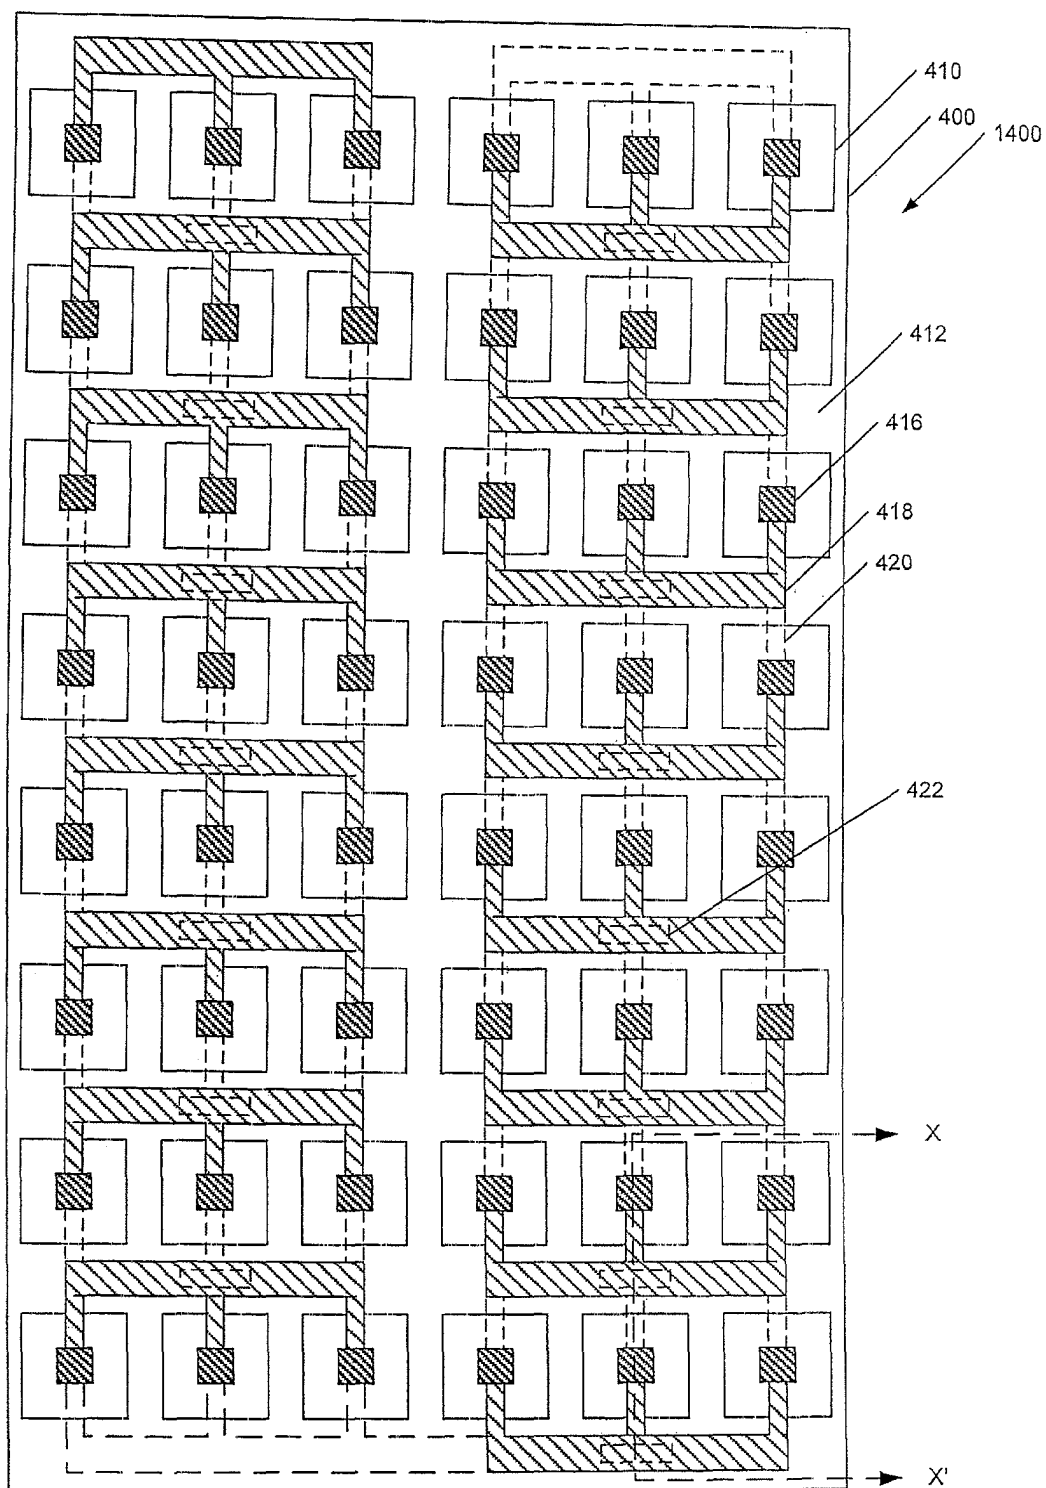


FIG. 9

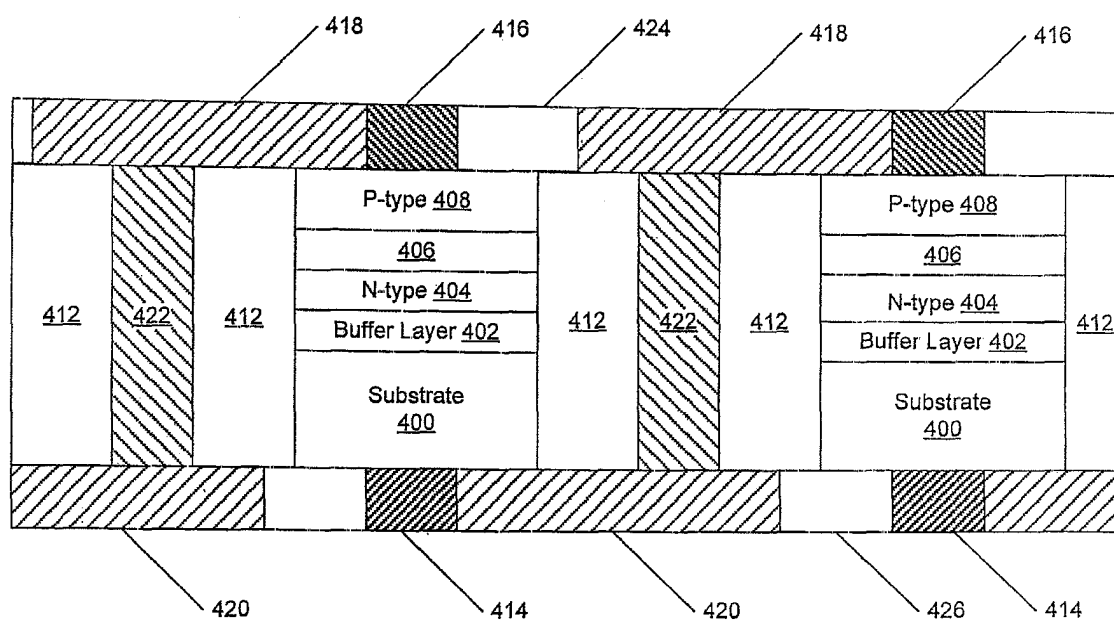


Fig. 10



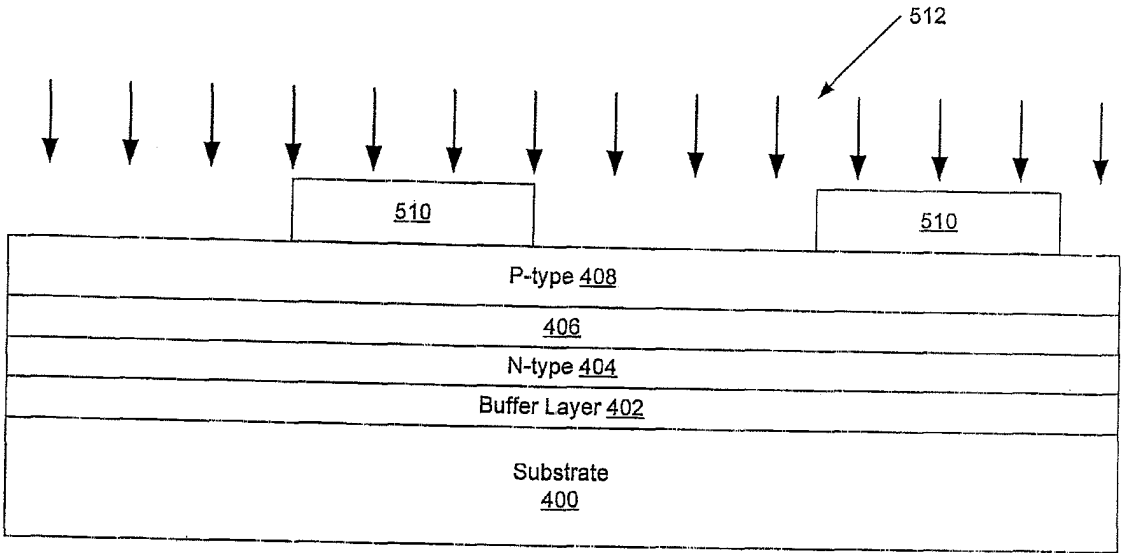


Fig. 11A

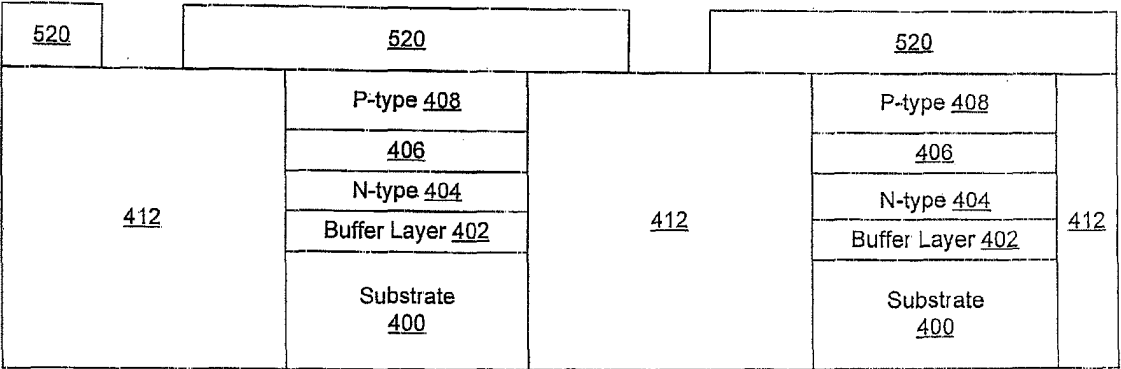


Fig. 11B

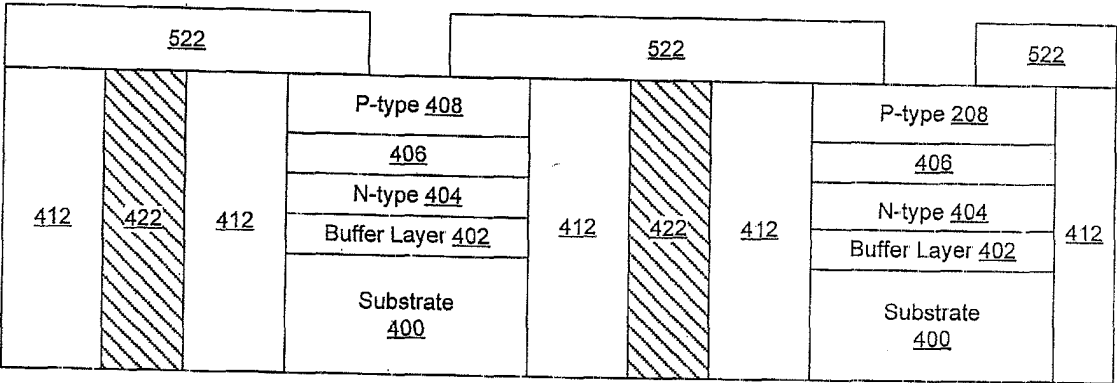


Fig. 11C

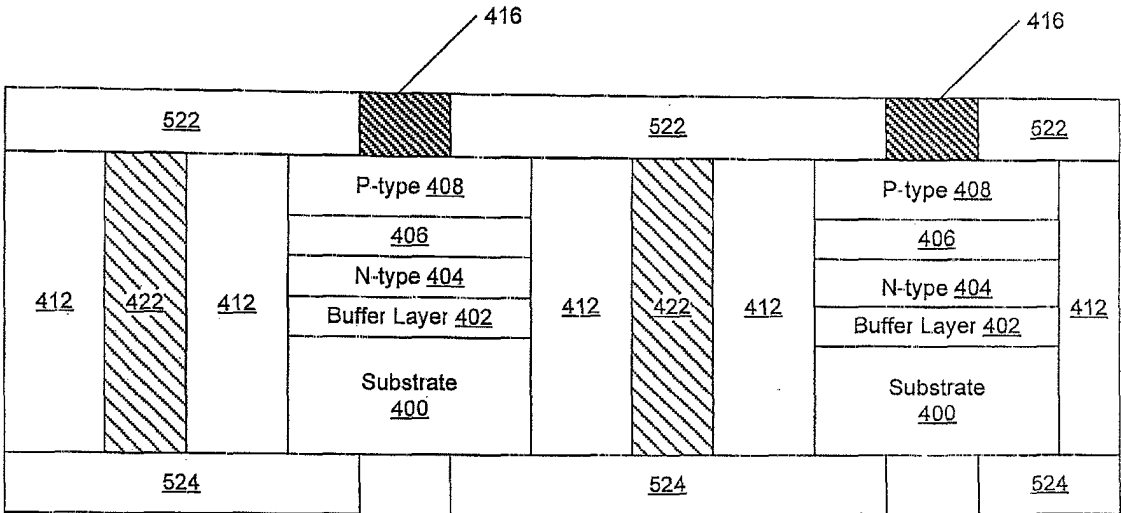


Fig. 11D

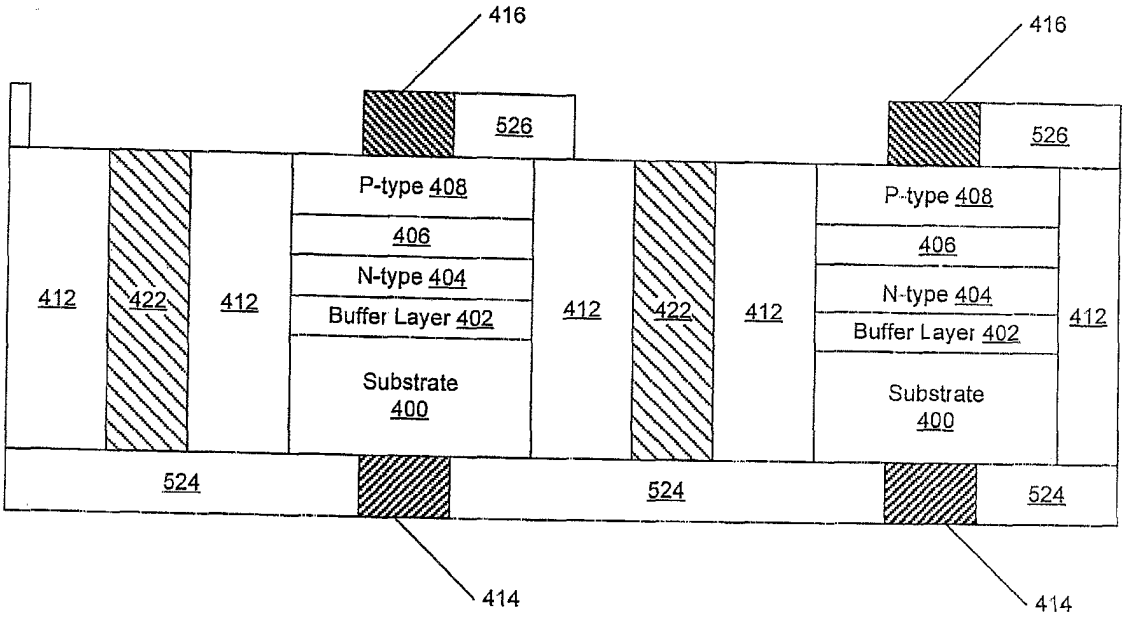


Fig. 11E

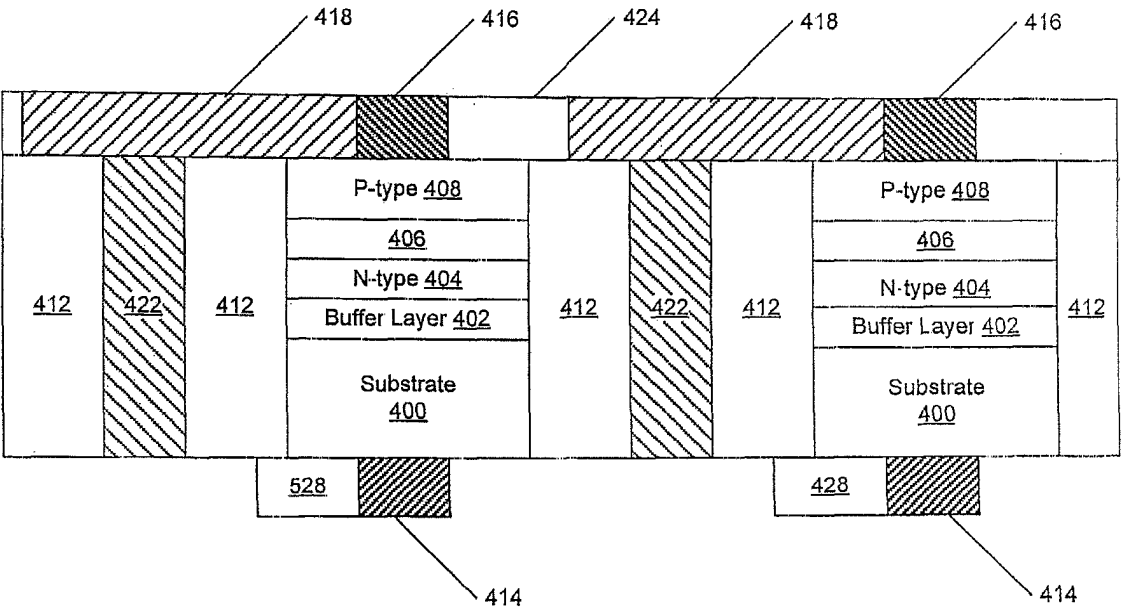


Fig. 11F

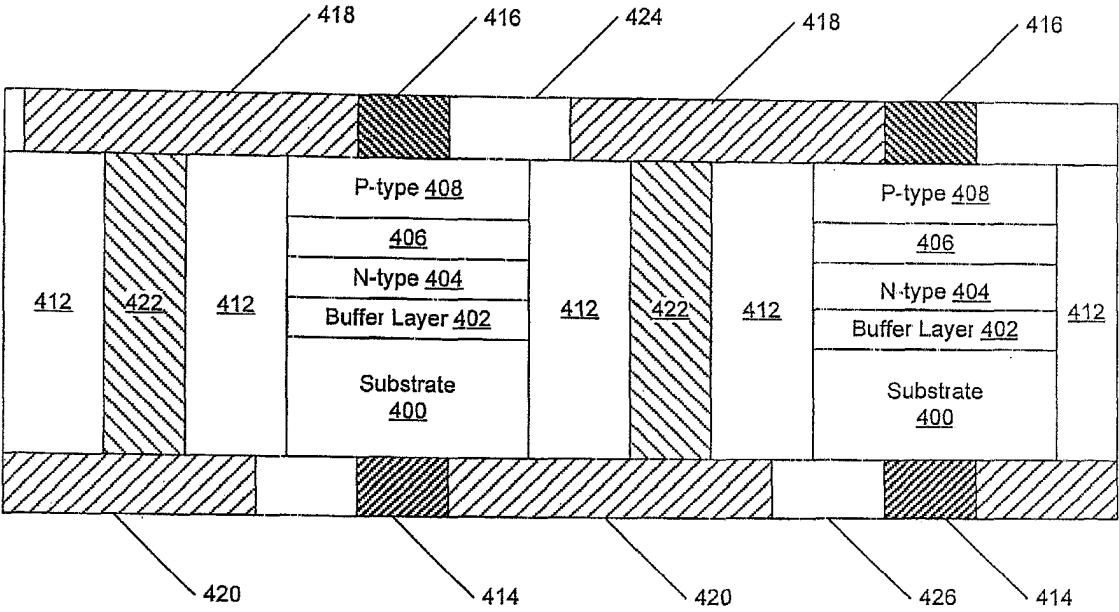


Fig. 11G

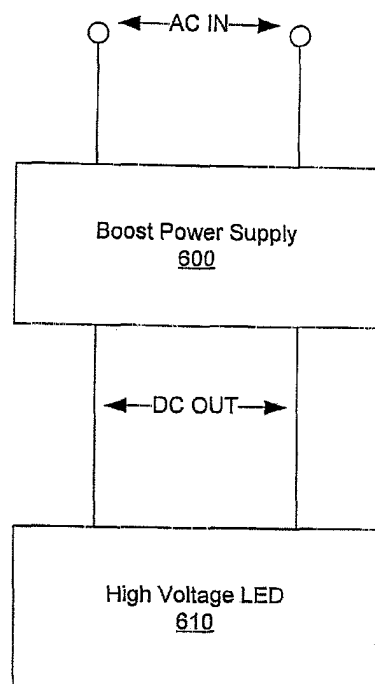
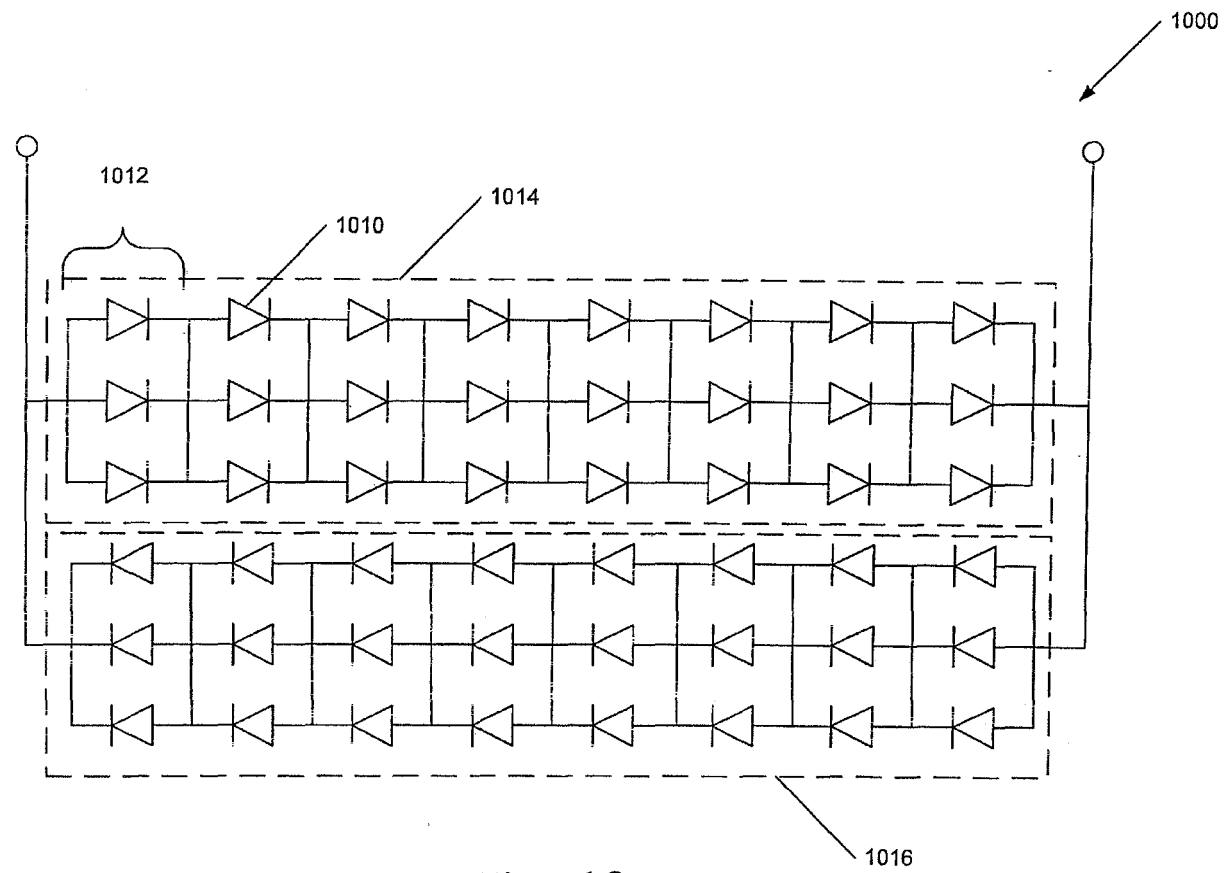


Fig. 12



**Fig. 13**

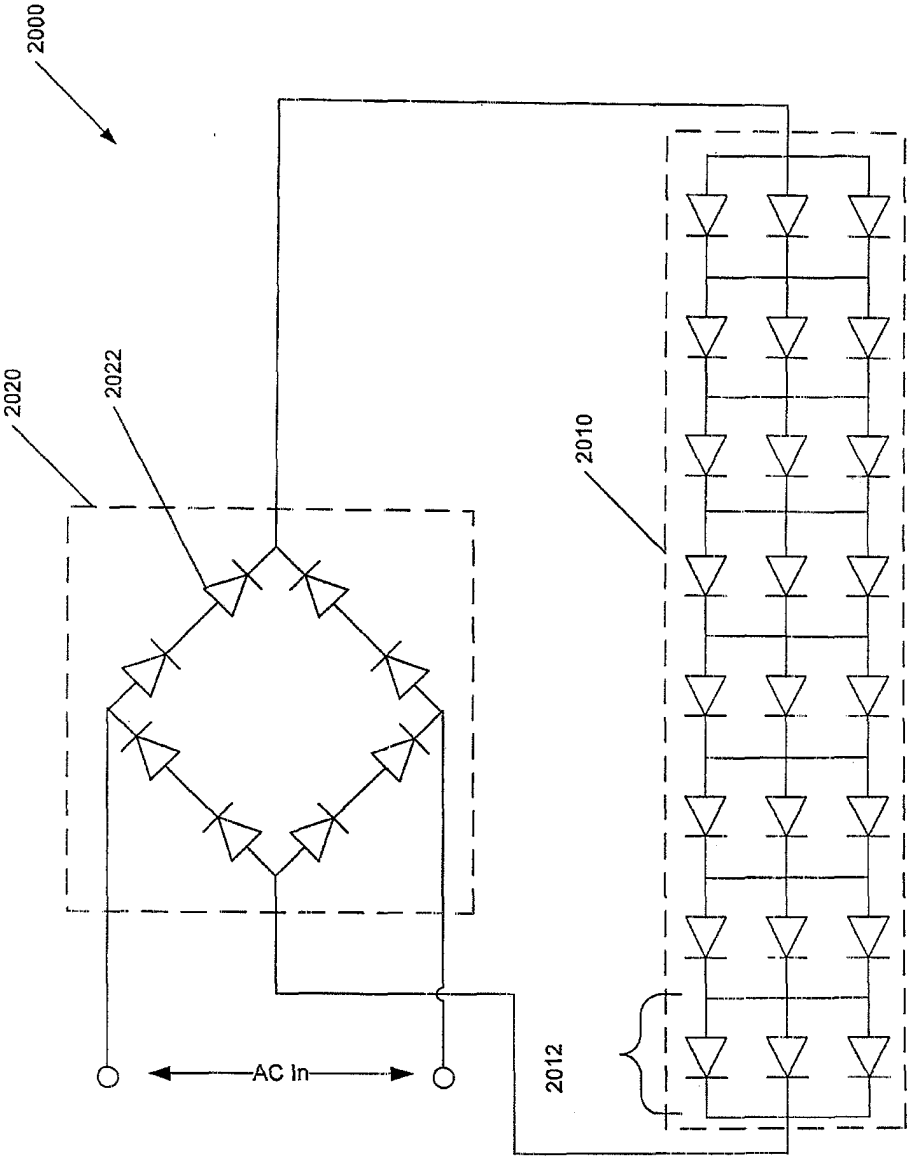


Fig. 14