




- (51) International Patent Classification:
H01L 31/02 (2006.01) *H01L 31/0256* (2006.01)
- (21) International Application Number:
PCT/US2015/022334
- (22) International Filing Date:
24 March 2015 (24.03.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/229,759 28 March 2014 (28.03.2014) US
- (71) Applicant: **SUNPOWER CORPORATION** [US/US]; 77
Rio Robles, San Jose, CA 95134 (US).
- (72) Inventors: **HARLEY, Gabriel**; 680 Farley Street, Moun-
tain view, CA 94043 (US). **HARRINGTON, Scott**; 155
Lakeside Drive, Apt. 150, Oakland, CA 94612 (US).
SMITH, David, D.; 426 N. Milton Avenue, Campbell, CA
95008 (US).
- (74) Agents: **VINCENT, Lester, J.** et al.; Blakely Sokoloff
Taylor Zafman LLP, 1279 Oakmead Parkway, Sunnyvale,
CA 94085 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: METALLIZATION OF SOLAR CELLS

FIG. 2

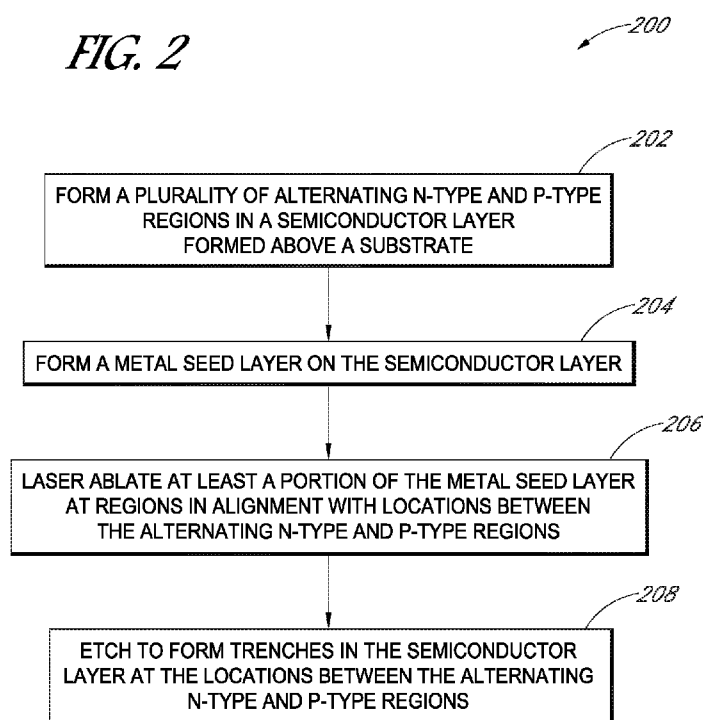

(57) Abstract: Approaches for the metallization of solar cells and the resulting solar cells are described. In an example, a method of fabricating a solar cell involves forming a plurality of alternating N-type and P-type regions in or above a substrate. The method also involves forming a metal seed layer on the plurality of alternating N-type and P-type regions. The method also involves patterning at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. The method also involves, subsequent to the patterning, etching to form trenches at the locations between the alternating N-type and P-type regions, isolating the alternating N-type and P-type regions from one another.

WO 2015/148571 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

METALLIZATION OF SOLAR CELLS

TECHNICAL FIELD

[0001] Embodiments of the present disclosure are in the field of renewable energy and, in particular, include approaches for metallization of solar cells and the resulting solar cells.

BACKGROUND

[0002] Photovoltaic cells, commonly known as solar cells, are well known devices for direct conversion of solar radiation into electrical energy. Generally, solar cells are fabricated on a semiconductor wafer or substrate using semiconductor processing techniques to form a p-n junction near a surface of the substrate. Solar radiation impinging on the surface of, and entering into, the substrate creates electron and hole pairs in the bulk of the substrate. The electron and hole pairs migrate to p-doped and n-doped regions in the substrate, thereby generating a voltage differential between the doped regions. The doped regions are connected to conductive regions on the solar cell to direct an electrical current from the cell to an external circuit coupled thereto.

[0003] Efficiency is an important characteristic of a solar cell as it is directly related to the capability of the solar cell to generate power. Likewise, efficiency in producing solar cells is directly related to the cost effectiveness of such solar cells. Accordingly, techniques for increasing the efficiency of solar cells, or techniques for increasing the efficiency in the manufacture of solar cells, are generally desirable. Some embodiments of the present disclosure allow for increased solar cell manufacture efficiency by providing novel processes for fabricating solar cell structures. Some embodiments of the present disclosure allow for increased solar cell efficiency by providing novel solar cell structures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Figures 1A, 1B, 1C(i) – 1C(iv) and 1D-1F illustrate cross-sectional views of various stages in the fabrication of a solar cell, in accordance with an embodiment of the present disclosure, where:

[0005] Figure 1A illustrates a stage in solar cell fabrication following formation of a plurality of alternating N-type and P-type regions in a semiconductor layer formed above a substrate;

[0006] Figure 1B illustrates the structure of Figure 1A following formation of a metal seed layer on the semiconductor layer;

[0007] Figures 1C(i) – 1C(iv) illustrate four options for the structure of Figure 1B following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions;

[0008] Figure 1D illustrates the structures of Figures 1C(i) – 1C(iv) following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions;

[0009] Figure 1E illustrates the structure of Figure 1D following formation of a passivation material in the trenches; and

[0010] Figure 1F illustrates the structure of Figure 1E following exposing seed layer portions and plating of contact structures thereon.

[0011] Figure 2 is a flowchart listing operations in a method of fabricating a solar cell as corresponding to Figures 1A, 1B, 1C(i) – 1C(iv) and 1D, in accordance with an embodiment of the present disclosure.

[0012] Figures 3A-3C illustrate cross-sectional views of various stages in the fabrication of another solar cell, in accordance with another embodiment of the present disclosure, where:

[0013] Figure 3A illustrates the structure of Figure 1B following formation of a resist layer on the metal seed layer;

[0014] Figure 3B illustrates the structure of Figure 3A following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions; and

[0015] Figure 3C illustrates the structure of Figure 3B following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions, formation of a passivation material in the trenches, and following exposing seed layer portions and plating of contact structures thereon.

[0016] Figures 4A-4C illustrate cross-sectional views of various stages in the fabrication of another solar cell, in accordance with another embodiment of the present disclosure, where:

[0017] Figure 4A illustrates the structure of Figure 1B following formation of a metal foil layer on the metal seed layer;

[0018] Figure 4B illustrates the structure of Figure 4A following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions; and

[0019] Figure 4C illustrates the structure of Figure 4B following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions and formation of a passivation material in the trenches.

DETAILED DESCRIPTION

[0020] The following detailed description is merely illustrative in nature and is not intended to limit the embodiments of the subject matter or the application and uses of such embodiments. As used herein, the word “exemplary” means “serving as an example, instance, or illustration.” Any implementation described herein as exemplary is not necessarily to be construed as preferred or advantageous over other implementations. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding technical field, background, brief summary or the following detailed description.

[0021] This specification includes references to “one embodiment” or “an embodiment.” The appearances of the phrases “in one embodiment” or “in an embodiment” do not necessarily refer to the same embodiment. Particular features, structures, or characteristics may be combined in any suitable manner consistent with this disclosure.

[0022] Terminology. The following paragraphs provide definitions and/or context for terms found in this disclosure (including the appended claims):

[0023] “Comprising.” This term is open-ended. As used in the appended claims, this term does not foreclose additional structure or steps.

[0024] “Configured To.” Various units or components may be described or claimed as “configured to” perform a task or tasks. In such contexts, “configured to” is used to connote structure by indicating that the units/components include structure that performs those task or tasks during operation. As such, the unit/component can be said to be configured to perform the task even when the specified unit/component is not currently operational (e.g., is not on/active). Reciting that a unit/circuit/component is “configured to” perform one or more tasks is expressly intended not to invoke 35 U.S.C. §112, sixth paragraph, for that unit/component.

[0025] “First,” “Second,” etc. As used herein, these terms are used as labels for nouns that they precede, and do not imply any type of ordering (e.g., spatial, temporal, logical, etc.). For example, reference to a “first” solar cell does not necessarily imply that this solar cell is the first solar cell in a sequence; instead the term “first” is used to differentiate this solar cell from another solar cell (e.g., a “second” solar cell).

[0026] “Coupled” – The following description refers to elements or nodes or features being “coupled” together. As used herein, unless expressly stated otherwise, “coupled” means that one element/node/feature is directly or indirectly joined to (or directly or indirectly communicates with) another element/node/feature, and not necessarily mechanically.

[0027] In addition, certain terminology may also be used in the following description for the purpose of reference only, and thus are not intended to be limiting. For example, terms such as “upper”, “lower”, “above”, and “below” refer to directions in the drawings to which reference

is made. Terms such as “front”, “back”, “rear”, “side”, “outboard”, and “inboard” describe the orientation and/or location of portions of the component within a consistent but arbitrary frame of reference which is made clear by reference to the text and the associated drawings describing the component under discussion. Such terminology may include the words specifically mentioned above, derivatives thereof, and words of similar import.

[0028] Approaches for the metallization of solar cells and the resulting solar cells are described herein. In the following description, numerous specific details are set forth, such as specific process flow operations, in order to provide a thorough understanding of embodiments of the present disclosure. It will be apparent to one skilled in the art that embodiments of the present disclosure may be practiced without these specific details. In other instances, well-known fabrication techniques, such as lithography and patterning techniques, are not described in detail in order to not unnecessarily obscure embodiments of the present disclosure. Furthermore, it is to be understood that the various embodiments shown in the figures are illustrative representations and are not necessarily drawn to scale.

[0029] Disclosed herein are methods of fabricating solar cells. In one embodiment, a method of fabricating a solar cell involves forming a plurality of alternating N-type and P-type regions in or above a substrate. The method also involves forming a metal seed layer on the plurality of alternating N-type and P-type regions. The method also involves patterning at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. The method also involves, subsequent to the patterning, etching to form trenches at the locations between the alternating N-type and P-type regions, isolating the alternating N-type and P-type regions from one another.

[0030] Also disclosed herein are solar cells. In one embodiment, a solar cell includes a substrate. A semiconductor emitter region is disposed in or above the substrate. A contact structure is electrically connected to the semiconductor emitter region and includes a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region, and a metal foil material disposed on and covering the entire metal seed material.

[0031] In another embodiment, a solar cell includes a substrate. A semiconductor emitter region is disposed in or above the substrate. A contact structure is electrically connected to the semiconductor emitter region and includes a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region and a resist material disposed on the metal seed material, the resist material having an opening formed therein exposing a portion of the metal seed material. The contact structure also includes a metal structure disposed in the opening of the resist material and in contact with the metal seed material.

[0032] One or more embodiments described herein are directed to solar cell architectures for integrated metal. Embodiments may involve the use of a texturizing wet etch process to pattern a partially scribed metal seed layer during a silicon trench etch process. Other embodiments involve laser scribing through an entire depth of a metal seed layer. Conventional fabrication schemes may be simplified using approaches described herein. In some embodiment, metallization processing is performed prior to substrate passivation and texturizing operations.

[0033] To provide context, back contact solar cell fabrication involving formation of emitter regions above a substrate can be complex and expensive. Additionally, one or more high temperature processing operations are typically affiliated with such processing schemes, e.g., processing at temperatures above 800 degrees Celsius for a phosphorous (P)-drive operation. Such high temperature processing typically precludes the use of metal due to diffusion and contamination in the associated high temperature furnace. Accordingly, conventional processing schemes typically involve metallization after the solar cell has been passivated.

[0034] For some high-efficiency back contact, back junction solar cells, the junction formed by the P and N interface is a region of high recombination and must be removed by the formation of a “trench” between the P and N regions, as depicted by 116 in Figure 1F, described below. The formation of the trench in the Si at the back side also typically requires the passivation of the trench in order to maintain high efficiency. During the subsequent metallization of the active semiconductor, the metal is also patterned and isolated between the P and N regions. A typical etchant for silicon semiconductors is aqueous hydroxide. Metals such as aluminum also etch with this chemistry, and thus need to be protected if present during a etching with this chemistry. However, KOH based chemistry (as an example) may be used during the metallization step to pattern an aluminum metallization. In this example, KOH would be used to pattern and texture the Si during the “front-end,” and then later used to pattern the aluminum during the back-end metallization. The result is a sequence of redundant patterning process operations: Si trench formation, masking, etching, contact opening, metal isolation, etc., to form an interdigitated back-contact cell.

[0035] In accordance with embodiments of the present disclosure, if the metal is deposited in blanket form prior to the Si trench formation, it is possible to isolate both the P and N regions within the Si, as well as the two polarities of the metal at the same time, and to use the etch chemistry to finish patterning while performing the texturing, and thereby eliminate this redundancy. As such a process may require moving at least part of the metallization sequence prior to passivation, temperatures for passivation operations may be limited, e.g., to less than approximately 400 degrees Celsius. Thus, in accordance with one or more embodiments

described herein, low-temperature passivation approaches are described to enable combined emitter/metallization process schemes that eliminate redundant operations.

[0036] As described in association with another embodiment, for the solar cell described with both front and back-side texturing due to the presence of the trench, bringing at least part of the metallization sequence before the texture, e.g., by a hydroxide based etch, enables the use of this etching to complete the isolation step, and/or remove the damage caused by the patterning step. Accordingly, potential options for patterning, including use of lasers, are made accessible.

[0037] More specifically, embodiments described herein enable simplified metallization schemes which involve low stress, straight forward alignment and, possibly, low temperature (e.g., less than approximately 400 degrees Celsius) processing. In one embodiment, a combined trench and contact mask process scheme facilitates patterning and mitigate risks otherwise associated with trench formation. In one embodiment, formation of a metal seed layer is performed in advance of cell passivation. In that embodiment, the passivation operation may be used to anneal the metal seed layer to provide good adhesion to underlying silicon emitter regions and, possibly, eliminate additional annealing operations. In other embodiments, a metal foil is incorporated into the process flow.

[0038] In a first aspect, 1A, 1B, 1C(i) – 1C(iv) and 1D-1F illustrate cross-sectional views of various stages in the fabrication of a solar cell, in accordance with an embodiment of the present disclosure. Figure 2 is a flowchart 200 listing operations in a method of fabricating a solar cell as corresponding to Figures 1A, 1B, 1C(i) – 1C(iv) and 1D, in accordance with an embodiment of the present disclosure.

[0039] Figure 1A illustrates a stage in solar cell fabrication following formation of a plurality of alternating N-type and P-type regions in a semiconductor layer formed above a substrate. Referring to Figure 1A and corresponding operation 202 of flowchart 200, a plurality of alternating N-type 106 and P-type 108 regions is formed in a semiconductor layer 104 formed above a substrate 100. In particular, the substrate 100 has disposed there above N-type semiconductor regions 106 and P-type semiconductor regions 108 disposed on a thin dielectric material 102 as an intervening material between the N-type semiconductor regions 106 or P-type semiconductor regions 108, respectively, and the substrate 100. The substrate 100 has a light-receiving surface 101 opposite a back surface above which the N-type semiconductor regions 106 and P-type semiconductor regions 108 are formed.

[0040] In an embodiment, the substrate 100 is a monocrystalline silicon substrate, such as a bulk single crystalline N-type doped silicon substrate. It is to be appreciated, however, that substrate 100 may be a layer, such as a multi-crystalline silicon layer, disposed on a global solar cell substrate. In an embodiment, the thin dielectric layer 102 is a tunneling silicon oxide layer

having a thickness of approximately 2 nanometers or less. In one such embodiment, the term “tunneling dielectric layer” refers to a very thin dielectric layer, through which electrical conduction can be achieved. The conduction may be due to quantum tunneling and/or the presence of small regions of direct physical connection through thin spots in the dielectric layer. In one embodiment, the tunneling dielectric layer is or includes a thin silicon oxide layer.

[0041] In an embodiment, the semiconductor layer 104 having the plurality of alternating N-type 106 and P-type 108 regions is formed from polycrystalline silicon formed by, e.g., using a plasma-enhanced chemical vapor deposition (PECVD) process. In one such embodiment, the N-type polycrystalline silicon regions 106 are doped with an N-type impurity, such as phosphorus. The P-type polycrystalline silicon regions 108 are doped with a P-type impurity, such as boron.

[0042] Figure 1B illustrates the structure of Figure 1A following formation of a metal seed layer on the semiconductor layer. Referring to Figure 1B and corresponding operation 204 of flowchart 200, a metal seed layer 110 is formed on the semiconductor layer 104.

[0043] In an embodiment, the metal seed layer 110 includes aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%. In one such embodiment, the metal seed layer 110 includes a first metal layer including aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, a second metal layer including titanium and tungsten (TiW), and a third metal layer including copper. In another embodiment, the metal seed layer 110 includes a first metal layer including aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and a second metal layer including nickel.

[0044] In another embodiment, although not depicted, a dielectric layer such as a silicon oxide layer is formed on the semiconductor layer 104 surface, patterned to partially expose the semiconductor layer 104 surface, and then the entire surface is covered in the metal seed layer 110. In that embodiment, the inclusion of a thin oxide layer can enhance optical properties since oxide has a better-matched index of refraction to Si as compared with the metal seed layer.

[0045] Figures 1C(i) – 1C(iv) illustrate four options for the structure of Figure 1B following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. Referring to Figures 1C(i) – 1C(iv) and corresponding operation 206 of flowchart 200, at least a portion of the metal seed layer 110 is laser ablated at regions in alignment with locations between the alternating N-type and P-type regions 106 and 108, respectively. The patterning forms trenches 112 between the alternating N-type and P-type regions 106 and 108. In an embodiment, the patterning is achieved by using laser ablation.

[0046] With specific reference to Figure 1C(i), in one embodiment, patterning of the metal seed layer 110 is performed through the entire metal seed layer 110, through the entire semiconductor layer 104 and, possibly, through the thin dielectric material 102 and into the substrate 100. With specific reference to Figure 1C(ii), in another embodiment, patterning of the metal seed layer 110 is performed through only a portion of the metal seed layer 110. With specific reference to Figure 1C(iii), in another embodiment, patterning of the metal seed layer 110 is performed through the entire metal seed layer 110 but does not extend into the entire semiconductor layer 104. With specific reference to Figure 1C(iv), in another embodiment, patterning of the metal seed layer 110 is performed through the entire metal seed layer 110 and extending into, but not through, the semiconductor layer 104.

[0047] Figure 1D illustrates the structures of Figures 1C(i) – 1C(iv) following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions. Referring to Figure 1D and corresponding operation 208 of flowchart 200, trenches 114 are formed in the semiconductor layer 104 at the locations between the alternating N-type and P-type regions 106 and 108, isolating the alternating N-type and P-type regions 106 and 108 from one another.

[0048] Referring to Figure 1D, regardless of the extent of the depth of trenches 112, a variety of example of which is shown in Figures 1C(i) – 1C(iv), trenches 114 are formed through the entire metal seed layer 110, through the entire semiconductor layer 104, through the thin dielectric material 102, and into the substrate 100. In one embodiment, the etching performed to form trenches 114 involves etching using an aqueous hydroxide-based solution. In an embodiment, as depicted in Figure 1D, etching to form trenches 114 involves texturizing both the light-receiving surface 101 and the bottom of the trenches 114 to form a texturized surface 116. In an embodiment, the etching involves removal of any damage from the patterning process, for example, the heat-affected-zone or any photo-optical damage from laser based patterning, or mechanical damage from any mechanical-based patterning. In an embodiment, a texturized surface may be one which has a regular or an irregular shaped surface for scattering incoming light, decreasing the amount of light reflected off of exposed substrate 100 surfaces of the solar cell. In an embodiment, the metal layer 110 is used as an etch resist during the etching process, to serve as a mask for the etching process. In an embodiment, a relatively thick metal (e.g., greater than approximately 20 microns) is bonded to the metal seed layer, and patterned together with the metal seed layer, such that the thick-metal layer acts as an etch resist. In a specific embodiment, the thickness is selected to account for the portion consumed during the etching, but the final thickness remains sufficient for the electrical and mechanical properties of the finished device.

[0049] Figure 1E illustrates the structure of Figure 1D following formation of a passivation material in the trenches. Referring to Figure 1E, a passivation material layer 118 is formed in the trenches 114 and, in an embodiment, covering the metal seed layer 110. In an embodiment, the passivation material layer 118 is a bottom anti-reflective coating (BARC) material or other passivation material, such as silicon nitride. In an embodiment, the passivation layer further provides the reverse bias breakdown, which is typically obtained through a high-temperature POCl_3 diffusion operation. Without such a diffusion step, the trench is not lightly doped and may not provide a break-down path. In order to maintain the reverse bias breakdown in a range less than approximately 5V, passivation materials, such as SiN in combination with a-Si, doped a-Si, AlOx , or other high-band gap dielectrics can be used.

[0050] Figure 1F illustrates the structure of Figure 1E following exposing seed layer portions and plating of contact structures thereon. Referring to Figure 1F, metal seed layer portions 110 are exposed by patterning the passivation material layer 118, e.g., by laser ablation. Contact structures 120 for the N-type 106 regions and contact structures 122 for P-type regions 108 are then formed on the exposed portions of the metal seed layer 110, e.g., by plating with copper. Referring again to Figure 1F, additional embodiments can include formation of a passivation and/or anti-reflective coating (ARC) layers (shown collectively as layer 124) on the light-receiving surface 101. It is to be appreciated that the timing of the formation of passivation and/or ARC layers may vary.

[0051] Referring to the structure of Figure 1F, in an embodiment, a solar cell includes a substrate 100. A semiconductor emitter region 106 or 108 is disposed above the substrate 100. In one embodiment, prior to metallization, the dopants in the semiconductor are activated, e.g., via a thermal or laser operation. In one embodiment, the surface of the semiconductor layer is prepared for contacting to the metal, e.g., by local or blanket removal of any oxide that may be present after any dopant activations. For example, in the case of a thermal activation, there may be presence of a thin-oxide which would be a barrier to metal contact. A contact structure is electrically connected to the semiconductor emitter region 106 or 108 and includes a metal seed material 110 disposed on and covering an uppermost surface of the semiconductor emitter region 106 or 108. A passivation material 118 is disposed on the metal seed material 110. A trench 116 is then formed partially or completely through the seed stack, so as to isolate both the N and P regions of the metal and the semiconductor. The structure is then etched in to texture the trench and the front surface, and remove any damage from the patterning process. The passivation material 118 has an opening formed therein, exposing a portion of the metal seed material 110. The contact structure also includes a metal structure 120 or 122 disposed in the opening of the passivation material 118 and in contact with the metal seed material 110. In one

such embodiment, the substrate 100 is an N-type monocrystalline silicon substrate, and the semiconductor emitter region 106 or 108 is an N-type or P-type polycrystalline silicon emitter region. The metal seed material(s) 110 includes a first portion including Ta, Ag, or aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%. The metal seed layer also includes a second or third portion disposed above the first portion and including titanium and tungsten (TiW) or including nickel. In one embodiment, the top metal seed layer is exposed to an etchant is etch resistant. For hydroxide based etchants, this can include an exposed portion of Ni, Ta, Ag, or the like. The metal structure 120 or 124 includes plated copper, or metal foil (e.g., Al), bonded to the metal seed layer through the passivation layer.

[0052] In a second aspect, an resist layer is formed on the metal seed layer prior to patterning the metal seed layer. For example, Figures 3A-3C illustrate cross-sectional views of various stages in the fabrication of another solar cell, in accordance with another embodiment of the present disclosure. Formation of a resist layer on top of a metal seed layer enables top-layer seed layer metals (e.g., Al, Cu) that would otherwise be etched within, e.g., a hydroxide based etchant, to survive. In this way, an Al-only seed layer may be deposited, which may be preferable for a subsequent Al-foil bonding step. By contrast, a Cu top seed layer may be preferable for a plating based solution. Also, depending on the passivation material (332) and method of deposition, the resist material 330 can provide protection from corrosion from aggressive gasses. For example, it is known that Cu seed layer layers can be corroded by ammonia-based gases. As ammonia gas may be present in the formation of some passivation layers (e.g., SiN), a top Cu seed layer must be protected during the trench passivation step.

[0053] Figure 3A illustrates the structure of Figure 1B following formation of an resist layer on the metal seed layer. Referring to Figure 3A, an resist layer 330 is formed on the metal seed layer 110. In an embodiment, the resist layer 330 is a bottom anti-reflective coating (BARC) material or other passivation material, such as silicon nitride. Other possibilities for materials of the resist layer include oxides, polymers, printed, sprayed, or deposited in sheets.

[0054] Figure 3B illustrates the structure of Figure 3A following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. Referring to Figure 3B, trenches 112 are formed in the resist layer 330 and at least partially into the metal seed layer 110. Although the trenches 112 depicted in Figure 3B have a depth of similar extent to the depth depicted in Figure 1C(i), it is to be appreciated that other trench 112 depth extents may be suitable, such as is described in association with Figures 1C(ii) – 1C(iv). In an embodiment, the patterning is achieved by using laser ablation.

[0055] Figure 3C illustrates the structure of Figure 3B following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions, formation of a passivation material in the trenches, and following exposing seed layer portions and plating of contact structures thereon. Referring to Figure 3C, trenches (similar to trenches 114 described in association with Figure 1D) are formed in the semiconductor layer 104 at the locations between the alternating N-type and P-type regions 106 and 108, isolating the alternating N-type and P-type regions 106 and 108 from one another. A passivation material layer 332, which may be similar to passivation material layer 118, is formed in the trenches and, in an embodiment, covering the resist layer 330. Metal seed layer portions 110 are exposed by patterning the passivation material layer 332 and the resist layer 330, e.g., by laser ablation. Alternatively, resist layer 330 may be completely removed prior to passivation, e.g., by ink-strip, if not required for protection of the seed during the passivation step. Contact structures 120 for the N-type 106 regions and contact structures 122 for P-type regions 108 are then formed on the exposed portions of the metal seed layer 110, e.g., by plating with copper. Referring again to Figure 3C, additional embodiments can include formation of a passivation and/or anti-reflective coating (ARC) layers (shown collectively as layer 124) on the light-receiving surface 101. It is to be appreciated that the timing of the formation of passivation and/or ARC layers may vary.

[0056] Referring to the structure of Figure 3C, in an embodiment, a solar cell includes a substrate 100. A semiconductor emitter region 106 or 108 is disposed above the substrate 100. A contact structure is electrically connected to the semiconductor emitter region (with or without patterned surface oxide) 106 or 108 and includes a metal seed material 110 disposed on and covering an uppermost surface of the semiconductor emitter region 106 or 108. A resist 330 is disposed on the metal seed material 110. A trench is formed at least partially through the resist to isolate the P and N regions in the semiconductor and the metal seed material. An etchant may be used to texture the front, the trench, and remove any residual damage from the trench patterning process. After etching, the trench is passivated with a passivation material such as SiN, doped amorphous Si, AlOx. Next, the resist material 330 and passivation material 332 have an opening formed therein, exposing a portion of the metal seed material 110. The contact structure also includes a metal structure 120 or 122 disposed in the opening of the resist material 330 and in contact with the metal seed material 110. In one such embodiment, the substrate 100 is an N-type monocrystalline silicon substrate, and the semiconductor emitter region 106 or 108 is an N-type or P-type polycrystalline silicon emitter region. The metal seed material 110 includes a first portion including aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%. The metal seed layer may also include a second portion disposed above the first portion and including titanium and tungsten (TiW) or

including nickel. The metal structure 120 or 124 include copper plated in to the openings, as well as other metal deposited or bonded to the metal seed layer, such as Aluminum (printed or laser bonded). In one embodiment, a passivation layer 332 is included over the resist material 330.

[0057] In a third aspect, a metal foil layer is formed on the metal seed layer prior to patterning the metal seed layer. For example, Figures 4A-4C illustrate cross-sectional views of various stages in the fabrication of another solar cell, in accordance with another embodiment of the present disclosure.

[0058] Figure 4A illustrates the structure of Figure 1B following formation of a metal foil layer on the metal seed layer. Referring to Figure 4A, a metal foil layer 440 is formed on the metal seed layer 110.

[0059] In an embodiment, the metal foil layer 440 is an aluminum foil layer. In one such embodiment, the metal foil layer 440 is an aluminum (Al) foil having a thickness approximately in the range of 5-100 microns and, preferably, a thickness approximately in the range of 50-100 microns. In an embodiment, the metal foil layer 440 is adhered to the plurality of metal seed material regions 114 by using a technique such as, but not limited to, a laser welding process, a thermal compression process or an ultrasonic bonding process.

[0060] Figure 4B illustrates the structure of Figure 4A following patterning of at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. Referring to Figure 4B, trenches 112 are formed in the metal foil layer 440 and at least partially into the metal seed layer 110. Although the trenches 112 depicted in Figure 4B have a depth of similar extent to the depth depicted in Figure 1C(i), it is to be appreciated that other trench 112 depth extents may be suitable, such as is described in association with Figures 1C(ii) – 1C(iv). In an embodiment, the patterning is achieved by using laser ablation.

[0061] Figure 4C illustrates the structure of Figure 4B following formation of trenches in the semiconductor layer at the locations between the alternating N-type and P-type regions, formation of a passivation material in the trenches, and following exposing and contacting metal foil layer portions. Referring to Figure 4C, trenches are formed in the semiconductor layer 104 at the locations between the alternating N-type and P-type regions 106 and 108, isolating the alternating N-type and P-type regions 106 and 108 from one another. A passivation material layer 442, which may be similar to passivation material layer 118, is formed in the trenches and, in an embodiment, covering the metal foil layer 440. It is to be appreciated that additional metal contacts in the traditional sense may not be needed in the foil-based embodiment, since the foil is already the primary conductor and no further metal is needed ‘on-cell.’ The only contact to the

foil that may be required, is for cell to cell interconnection, and for testing. In an embodiment, electrical contact is made to the metal foil layer 440 by piercing portions of the passivation material layer 442.

[0062] Referring to the structure of Figure 4C, in an embodiment, a solar cell includes a substrate 100. A semiconductor emitter region 106 or 108 is disposed above the substrate 100 (with or without the formation of a thin oxide thereon). A contact structure is disposed on the semiconductor emitter region and includes a metal seed material 110 disposed on and covering an uppermost surface of the semiconductor emitter region 106 or 108. A metal foil material 440 is electrically connected to and covers the entire metal seed material 110. In one such embodiment, the substrate 100 is an N-type monocrystalline silicon substrate, the semiconductor emitter region 106 or 108 is an N-type or P-type polycrystalline silicon emitter region, the metal seed material 110 includes aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and the metal foil material 440 is an aluminum metal foil.

[0063] Although certain materials are described specifically above with reference to Figures 1A, 1B, 1C(i) – 1C(iv), 1D-1F, 3A-3C and 4A-4C, some materials may be readily substituted with others with other such embodiments remaining within the spirit and scope of embodiments of the present disclosure. For example, in an embodiment, a different material substrate, such as a group III-V material substrate, can be used instead of a silicon substrate. In other embodiments, the substrate is a monocrystalline silicon substrate, and the alternating N-type and P-type semiconductor regions are formed in the monocrystalline silicon substrate, as opposed to being formed in a polycrystalline silicon layer formed above the substrate. In other embodiments, the above described approaches can be applicable to manufacturing of other than solar cells. For example, manufacturing of light emitting diode (LEDs) may benefit from approaches described herein.

[0064] Thus, approaches for the metallization of solar cells and the resulting solar cells have been disclosed.

[0065] Although specific embodiments have been described above, these embodiments are not intended to limit the scope of the present disclosure, even where only a single embodiment is described with respect to a particular feature. Examples of features provided in the disclosure are intended to be illustrative rather than restrictive unless stated otherwise. The above description is intended to cover such alternatives, modifications, and equivalents as would be apparent to a person skilled in the art having the benefit of this disclosure.

[0066] The scope of the present disclosure includes any feature or combination of features disclosed herein (either explicitly or implicitly), or any generalization thereof, whether

or not it mitigates any or all of the problems addressed herein. Accordingly, new claims may be formulated during prosecution of this application (or an application claiming priority thereto) to any such combination of features. In particular, with reference to the appended claims, features from dependent claims may be combined with those of the independent claims and features from respective independent claims may be combined in any appropriate manner and not merely in the specific combinations enumerated in the appended claims.

[0067] In an embodiment, a method of fabricating a solar cell includes forming a plurality of alternating N-type and P-type regions in or above a substrate. The method also includes forming a metal seed layer on the plurality of alternating N-type and P-type regions. The method also includes patterning at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions. The method also includes, subsequent to the patterning, etching to form trenches at the locations between the alternating N-type and P-type regions, isolating the alternating N-type and P-type regions from one another.

[0068] In one embodiment, the method also includes, prior to the patterning, forming an aluminum foil layer on the metal seed layer, where the patterning further includes patterning the aluminum foil layer at regions in alignment with the locations between the alternating N-type and P-type regions, leaving remaining portions of the metal seed layer and the aluminum foil layer at regions in alignment with the alternating N-type and P-type regions.

[0069] In one embodiment, the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, and patterning at least the portion of the metal seed layer includes patterning through the metal seed layer, but not into the semiconductor layer, exposing the semiconductor layer at the locations between the alternating N-type and P-type regions, and etching to form the trenches includes etching through the exposed locations of the semiconductor layer.

[0070] In one embodiment, the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, patterning at least the portion of the metal seed layer includes patterning through the metal seed layer and partially through the semiconductor layer, exposing the semiconductor layer at the locations between the alternating N-type and P-type regions, and etching to form the trenches includes etching through the exposed locations of the semiconductor layer.

[0071] In one embodiment, the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, and patterning at least the portion of the metal seed layer includes patterning only partially through the metal seed layer, and etching to form the trenches further includes etching through remaining portions of the metal seed layer

in alignment with locations between the alternating N-type and P-type semiconductor regions to expose the semiconductor layer at the locations between the alternating N-type and P-type regions, and etching to form the trenches includes etching through the exposed locations of the semiconductor layer.

[0072] In one embodiment, forming the metal seed layer includes forming a metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%.

[0073] In one embodiment, the method also includes, prior to the patterning, forming a resist layer on the metal seed layer, and the patterning further includes patterning the resist layer at regions in alignment with the locations between the alternating N-type and P-type regions, leaving remaining portions of the metal seed layer and the resist layer at regions in alignment with the alternating N-type and P-type regions.

[0074] In one embodiment, forming the metal seed layer includes forming a first metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, forming a second metal layer comprising titanium and tungsten (TiW), and forming a third metal layer comprising copper.

[0075] In one embodiment, the method also includes, subsequent to etching to form the trenches, patterning the remaining portions of the resist layer to expose regions of the remaining portions of the metal seed layer, and plating metal contact features on the exposed regions of the remaining portions of the metal seed layer.

[0076] In one embodiment, the method also includes forming a passivation material at least in the trenches.

[0077] In one embodiment, forming the passivation material further includes forming the passivation material on remaining portions of the metal seed layer in alignment with the alternating N-type and P-type regions, and the method further includes patterning portions of the passivation material to expose regions of the remaining portions of the metal seed layer, and plating metal contact features on the exposed regions of the remaining portions of the metal seed layer.

[0078] In one embodiment, forming the metal seed layer includes forming a first metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and forming a second metal layer comprising nickel.

[0079] In one embodiment, the plurality of alternating N-type and P-type regions is formed in a polycrystalline silicon layer formed on a thin dielectric layer formed on the substrate.

[0080] In one embodiment, etching to form the trenches in the semiconductor layer includes etching using an aqueous hydroxide-based solution.

[0081] In one embodiment, patterning at least the portion of the metal seed layer includes laser ablating the portion of the metal seed layer.

[0082] In an embodiment, a solar cell includes a substrate. A semiconductor emitter region is disposed in or above the substrate. A contact structure is electrically connected to the semiconductor emitter region and includes a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region, and a metal foil material disposed on and covering the entire metal seed material.

[0083] In one embodiment, the substrate is an N-type monocrystalline silicon substrate, the semiconductor emitter region is an N-type or P-type polycrystalline silicon emitter region formed above the substrate, the metal seed material comprises aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and the metal foil is an aluminum metal foil.

[0084] In an embodiment, a solar cell includes a substrate. A semiconductor emitter region is disposed in or above the substrate. A contact structure is electrically connected to the semiconductor emitter region and includes a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region, a resist material disposed on the metal seed material, the resist material having an opening formed therein exposing a portion of the metal seed material, and a metal structure disposed in the opening of the resist material and in contact with the metal seed material.

[0085] In one embodiment, the substrate is an N-type monocrystalline silicon substrate, the semiconductor emitter region is an N-type or P-type polycrystalline silicon emitter region formed above the substrate, the metal seed material comprises at least a first portion comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and a second portion disposed above the first portion and comprising titanium and tungsten (TiW) or comprising nickel, and the metal structure includes copper.

CLAIMS

What is claimed is:

1. A method of fabricating a solar cell, the method comprising:
forming a plurality of alternating N-type and P-type regions in or above a substrate;
forming a metal seed layer on the plurality of alternating N-type and P-type regions;
patterning at least a portion of the metal seed layer at regions in alignment with locations between the alternating N-type and P-type regions; and
subsequent to the patterning, etching to form trenches at the locations between the alternating N-type and P-type regions, isolating the alternating N-type and P-type regions from one another.
2. The method of claim 1, further comprising:
prior to the patterning, forming an aluminum foil layer on the metal seed layer, wherein the patterning further comprises patterning the aluminum foil layer at regions in alignment with the locations between the alternating N-type and P-type regions, leaving remaining portions of the metal seed layer and the aluminum foil layer at regions in alignment with the alternating N-type and P-type regions.
3. The method of claim 1, wherein the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, wherein patterning at least the portion of the metal seed layer comprises patterning through the metal seed layer, but not into the semiconductor layer, exposing the semiconductor layer at the locations between the alternating N-type and P-type regions, and wherein etching to form the trenches comprises etching through the exposed locations of the semiconductor layer.
4. The method of claim 1, wherein the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, wherein patterning at least the portion of the metal seed layer comprises patterning through the metal seed layer and partially through the semiconductor layer, exposing the semiconductor layer at the locations between the alternating N-type and P-type regions, and wherein etching to form the trenches comprises etching through the exposed locations of the semiconductor layer.
5. The method of claim 1, wherein the plurality of alternating N-type and P-type regions is formed in a semiconductor layer formed above the substrate, wherein patterning at least the

portion of the metal seed layer comprises patterning only partially through the metal seed layer, wherein etching to form the trenches further comprises etching through remaining portions of the metal seed layer in alignment with locations between the alternating N-type and P-type semiconductor regions to expose the semiconductor layer at the locations between the alternating N-type and P-type regions, and wherein etching to form the trenches comprises etching through the exposed locations of the semiconductor layer.

6. The method of claim 2, wherein forming the metal seed layer comprises forming a metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%.

7. The method of claim 1, further comprising:

prior to the patterning, forming a resist layer on the metal seed layer, wherein the patterning further comprises patterning the resist layer at regions in alignment with the locations between the alternating N-type and P-type regions, leaving remaining portions of the metal seed layer and the resist layer at regions in alignment with the alternating N-type and P-type regions.

8. The method of claim 7, wherein forming the metal seed layer comprises forming a first metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, forming a second metal layer comprising titanium and tungsten (TiW), and forming a third metal layer comprising copper.

9. The method of claim 7, further comprising:

subsequent to etching to form the trenches, patterning the remaining portions of the resist layer to expose regions of the remaining portions of the metal seed layer; and plating metal contact features on the exposed regions of the remaining portions of the metal seed layer.

10. The method of claim 1, further comprising:

forming a passivation material at least in the trenches.

11. The method of claim 10, wherein forming the passivation material further comprises forming the passivation material on remaining portions of the metal seed layer in alignment with the alternating N-type and P-type regions, the method further comprising:

patterning portions of the passivation material to expose regions of the remaining portions of the metal seed layer; and
plating metal contact features on the exposed regions of the remaining portions of the metal seed layer.

12. The method of claim 11, wherein forming the metal seed layer comprises forming a first metal layer comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and forming a second metal layer comprising nickel.

13. The method of claim 1, wherein the plurality of alternating N-type and P-type regions is formed in a polycrystalline silicon layer formed on a thin dielectric layer formed on the substrate.

14. The method of claim 1, wherein etching to form the trenches in the semiconductor layer comprises etching using an aqueous hydroxide-based solution.

15. The method of claim 1, wherein patterning at least the portion of the metal seed layer comprises laser ablating the portion of the metal seed layer.

16. A solar cell fabricated according to the method of claim 1.

17. A solar cell, comprising:

a substrate;

a semiconductor emitter region disposed in or above the substrate; and

a contact structure electrically connected to the semiconductor emitter region and comprising:

a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region; and

a metal foil material disposed on and covering the entire metal seed material.

18. The solar cell of claim 17, wherein the substrate is an N-type monocrystalline silicon substrate, the semiconductor emitter region is an N-type or P-type polycrystalline silicon emitter region formed above the substrate, the metal seed material comprises aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and the metal foil is an aluminum metal foil.

19. A solar cell, comprising:

a substrate;

a semiconductor emitter region disposed in or above the substrate; and

a contact structure electrically connected to the semiconductor emitter region and comprising:




a metal seed material disposed on and covering an uppermost surface of the semiconductor emitter region;

a resist material disposed on the metal seed material, the resist material having an opening formed therein exposing a portion of the metal seed material; and




a metal structure disposed in the opening of the resist material and in contact with the metal seed material.

20. The solar cell of claim 19, wherein the substrate is an N-type monocrystalline silicon substrate, wherein the semiconductor emitter region is an N-type or P-type polycrystalline silicon emitter region formed above the substrate, wherein the metal seed material comprises at least a first portion comprising aluminum in an amount greater than approximately 97% and silicon in an amount approximately in the range of 1-2%, and a second portion disposed above the first portion and comprising titanium and tungsten (TiW) or comprising nickel, and wherein the metal structure comprises copper.

1/6

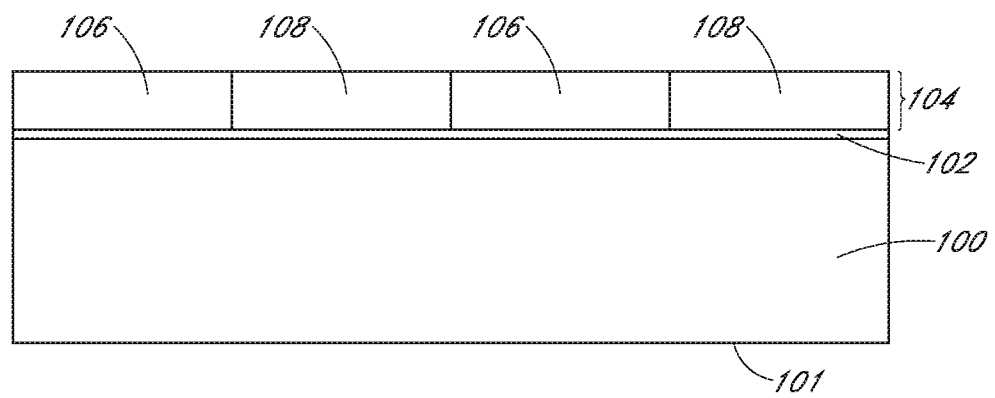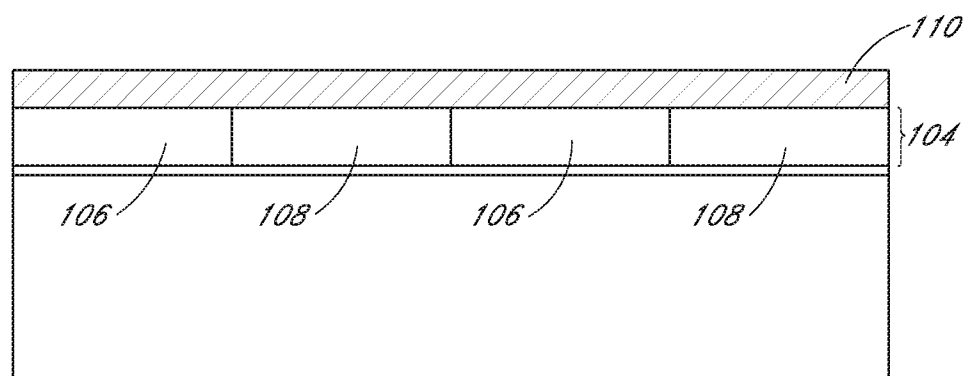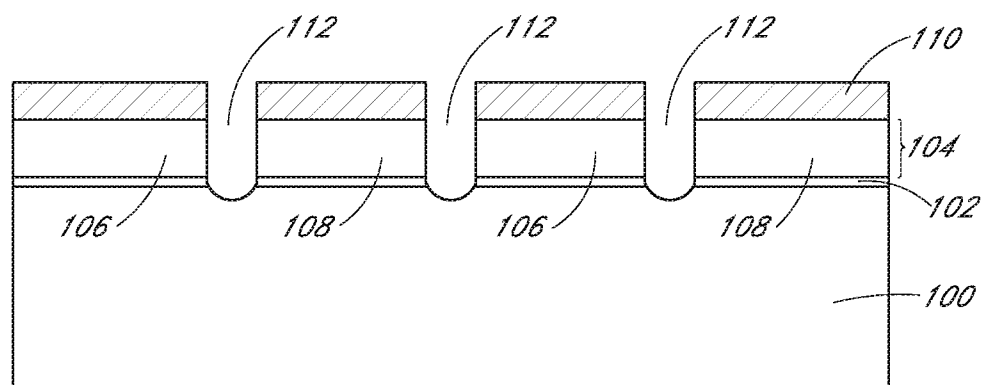*FIG. 1A**FIG. 1B**FIG. 1C(i)*

2/6

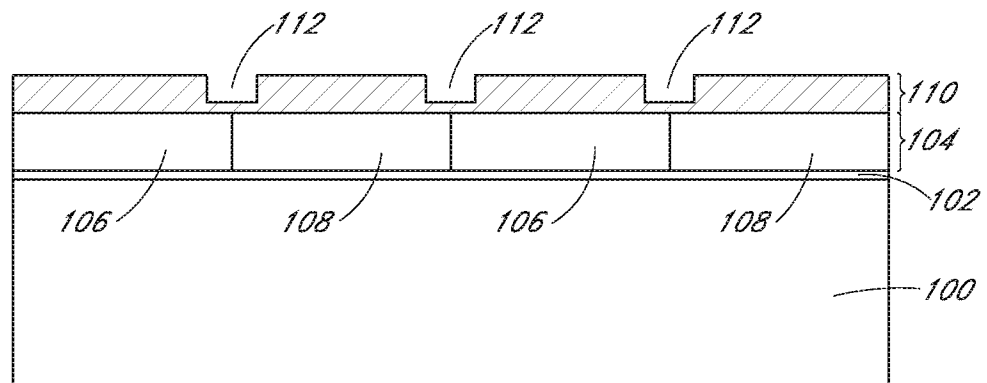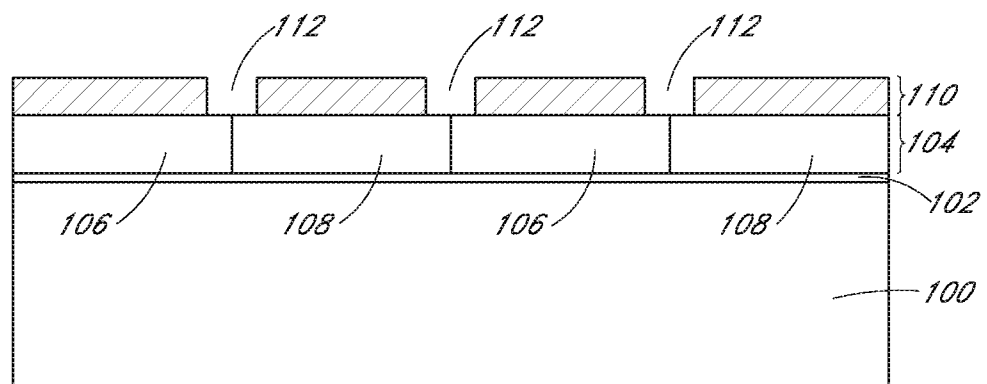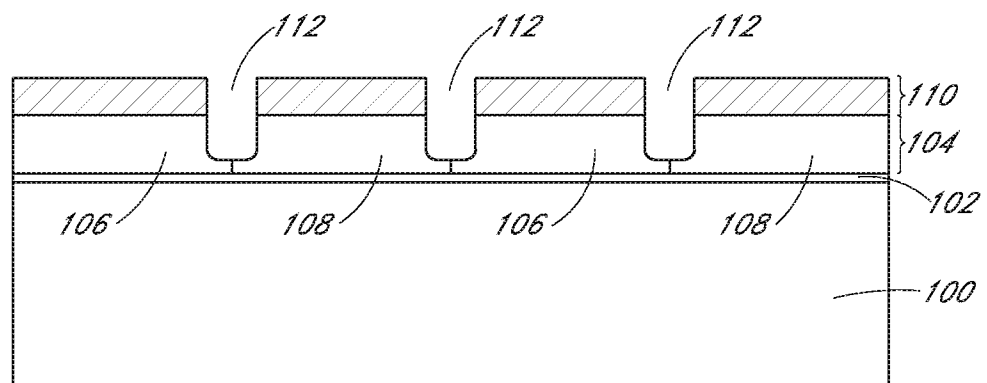*FIG. 1C(ii)**FIG. 1C(iii)**FIG. 1C(iv)*

3/6

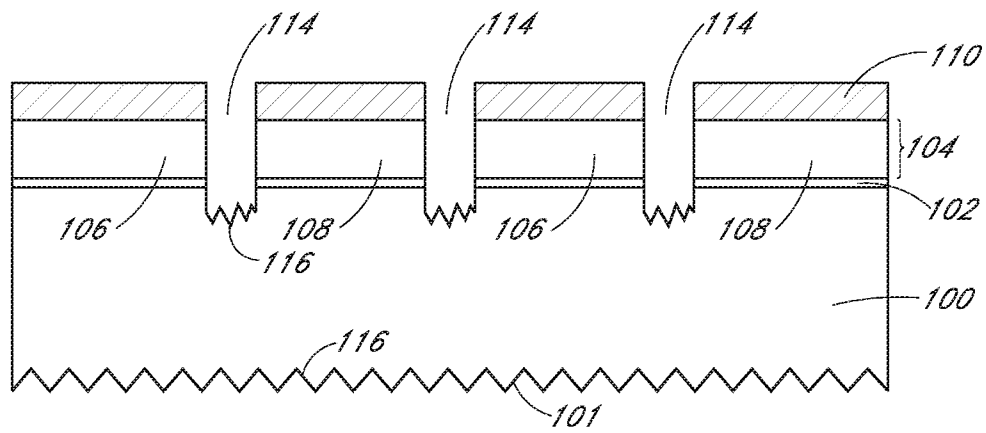


FIG. 1D

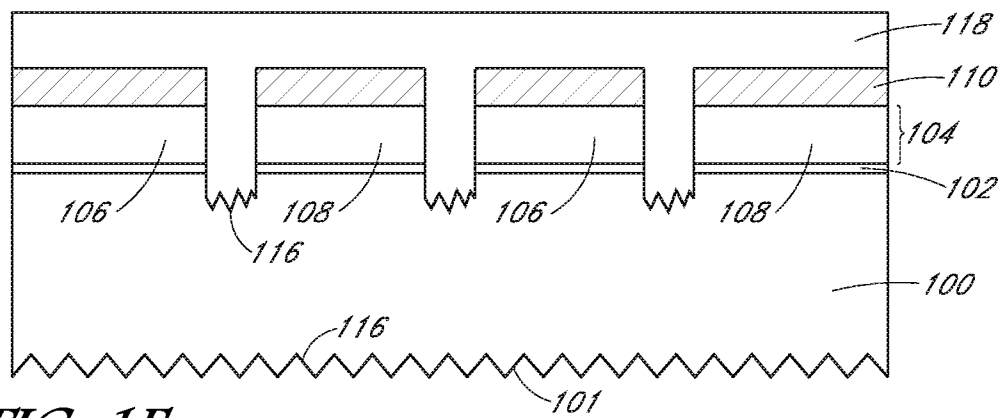


FIG. 1E

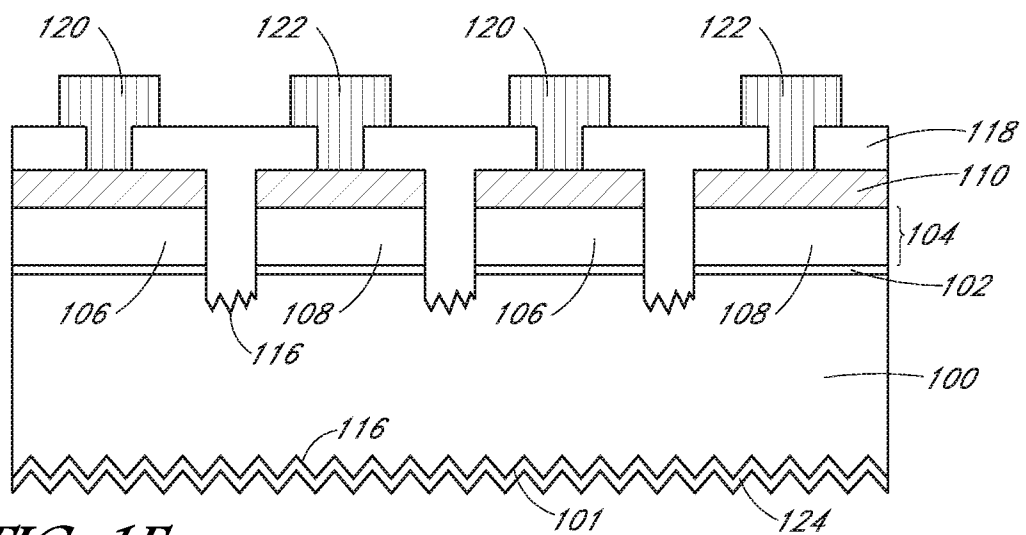
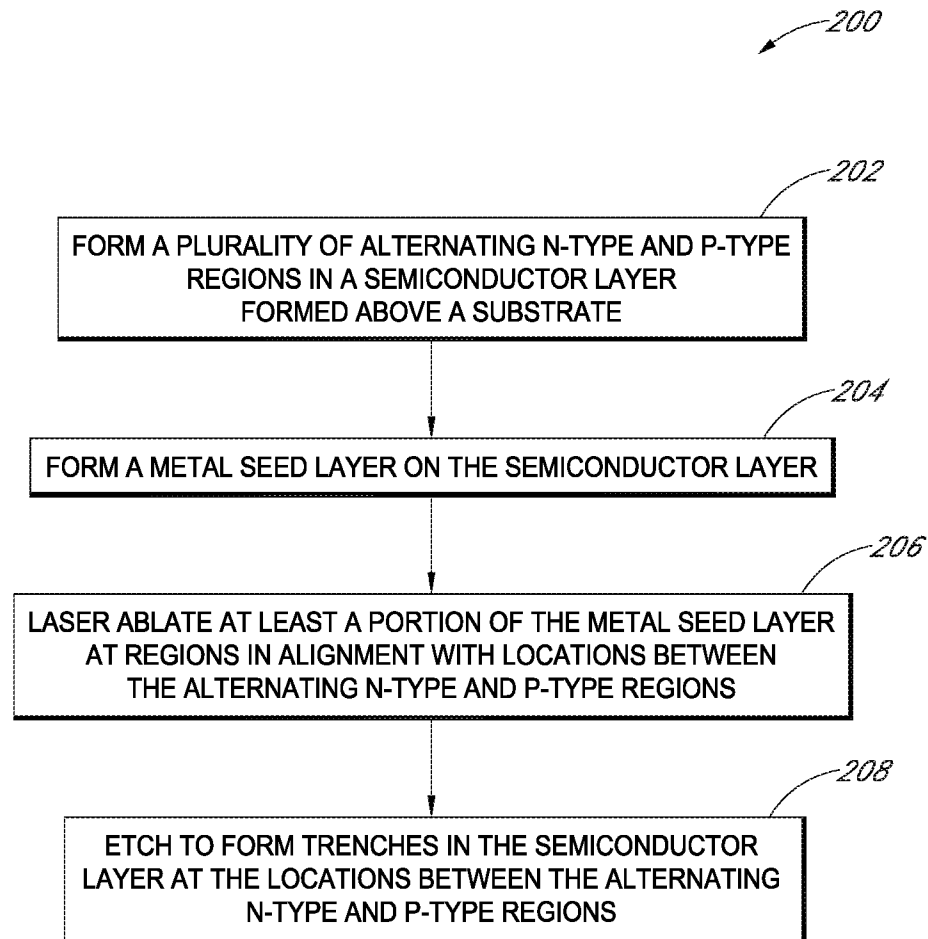


FIG. 1F

4/6

*FIG. 2*

5/6

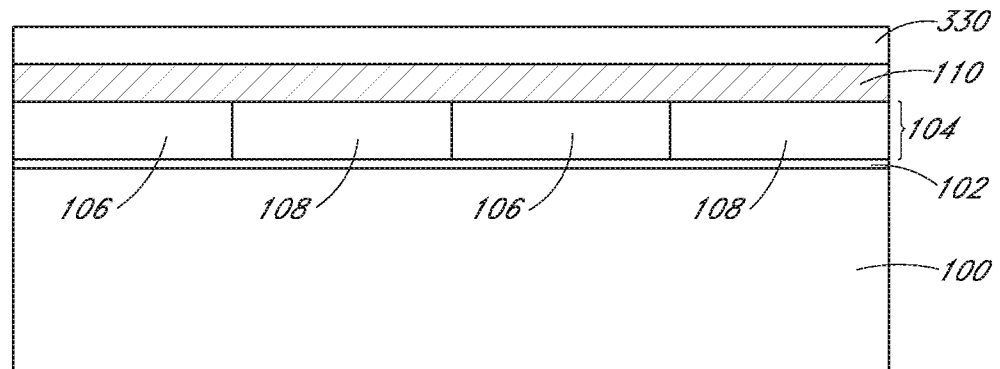


FIG. 3A

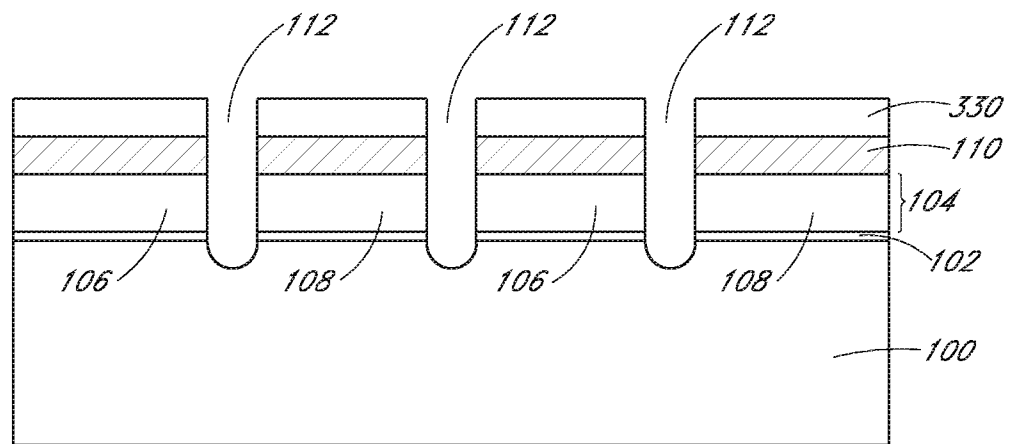


FIG. 3B

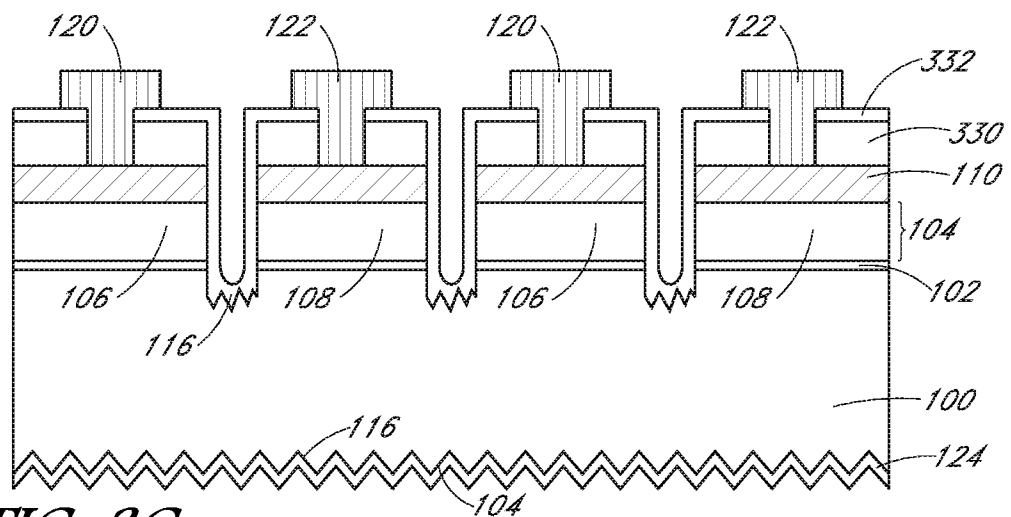


FIG. 3C

6/6

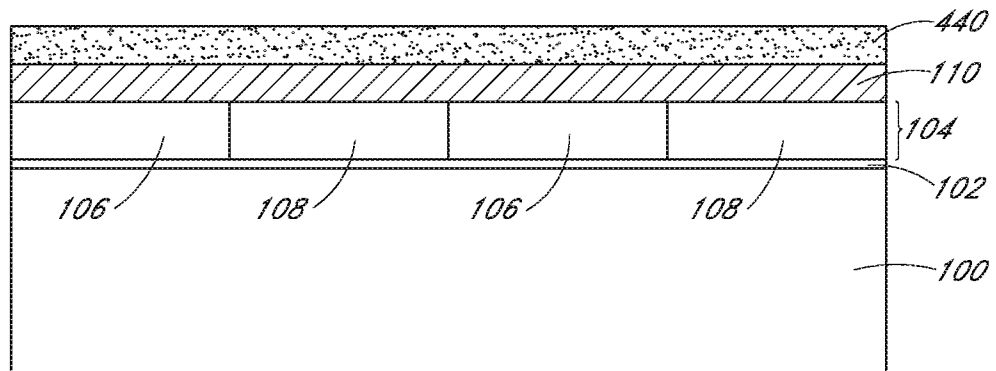


FIG. 4A

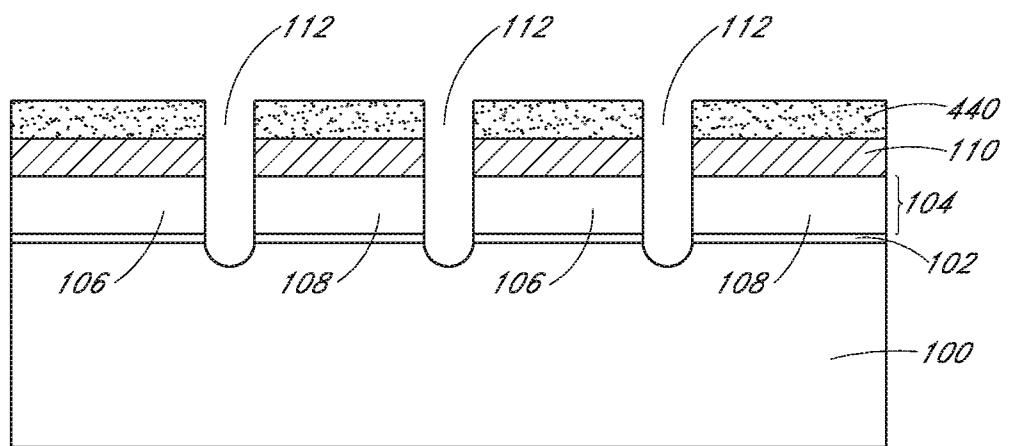


FIG. 4B

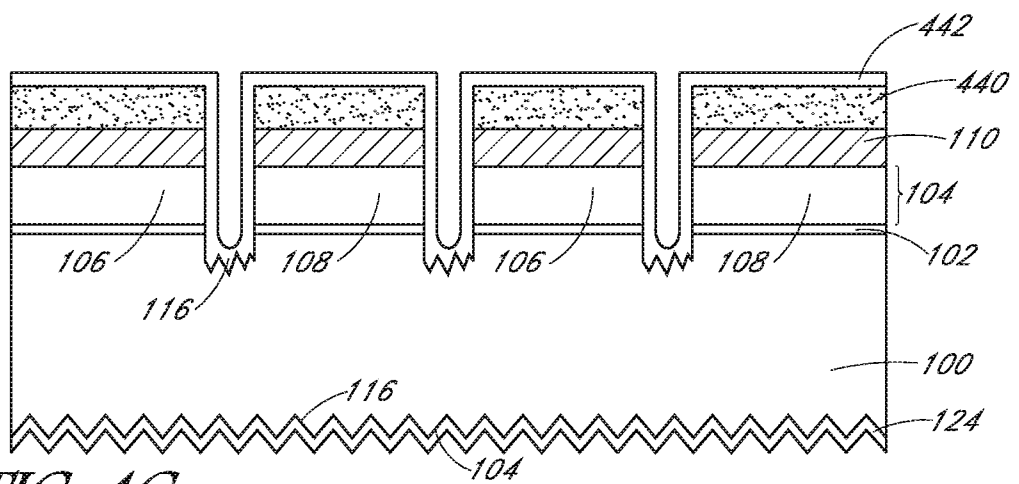


FIG. 4C

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/022334**A. CLASSIFICATION OF SUBJECT MATTER****H01L 31/02(2006.01)i, H01L 31/0256(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 31/02; B05D 5/12; H01L 21/22; H01L 31/0236; H01L 31/04; H01L 31/18; B05D 3/06; H01L 31/00; H01L 21/283; H01L 31/0256

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: solar cell, emitter, metal seed layer, patterning, trench

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2012-0266951 A1 (BO LI et al.) 25 October 2012 See paragraphs [0030]-[0066]; and figures 2A-2I.	1-20
Y	US 2010-0037939 A1 (HANS-JUERGEN EICKELMANN et al.) 18 February 2010 See paragraphs [0020], [0021]; and figures 1A-1J.	1-20
A	US 2010-0124619 A1 (BAOMIN XU et al.) 20 May 2010 See paragraphs [0051]-[0068]; and figures 1-12.	1-20
A	WO 2013-000026 A1 (NEWSOUTH INNOVATIONS PTY LIMITED) 03 January 2013 See page 11, line 20 - page 18, line 5; and figures 1A-2.	1-20
A	US 2010-0139764 A1 (DAVID D. SMITH) 10 June 2010 See paragraphs [0014]-[0033]; and figures 1-12.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 2015 (18.06.2015)

Date of mailing of the international search report

19 June 2015 (19.06.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Do Weon

Telephone No. +82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/022334

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0266951 A1	25/10/2012	CN 103493216 A EP 2702614 A1 EP 2702614 A4 JP 2014-512701 A KR 10-2014-0041494 A TW 201304160 A US 2014-0295608 A1 US 2015-0087100 A1 US 8802486 B2 US 8912038 B2 WO 2012-148523 A1	01/01/2014 05/03/2014 24/09/2014 22/05/2014 04/04/2014 16/01/2013 02/10/2014 26/03/2015 12/08/2014 16/12/2014 01/11/2012
US 2010-0037939 A1	18/02/2010	US 2010-0304519 A1 US 7897434 B2	02/12/2010 01/03/2011
US 2010-0124619 A1	20/05/2010	None	
WO 2013-000026 A1	03/01/2013	TW 201312784 A US 2014-0199806 A1	16/03/2013 17/07/2014
US 2010-0139764 A1	10/06/2010	CN 102239572 A EP 2374160 A1 EP 2374160 A4 JP 05465729 B2 JP 2012-511258 A KR 10-2011-0101180 A US 2012-0276685 A1 US 8242354 B2 US 8647911 B2 WO 2010-065434 A1	09/11/2011 12/10/2011 03/10/2012 09/04/2014 17/05/2012 15/09/2011 01/11/2012 14/08/2012 11/02/2014 10/06/2010