




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : <b>F23D 11/44, 11/46</b>	<b>A1</b>	(11) International Publication Number: <b>WO 91/02925</b> (43) International Publication Date: <b>7 March 1991 (07.03.91)</b>
<p>(21) International Application Number: PCT/US90/04747</p> <p>(22) International Filing Date: 21 August 1990 (21.08.90)</p> <p>(30) Priority data: 396,542 21 August 1989 (21.08.89) US</p> <p>(71) Applicant: ADVANCED MECHANICAL TECHNOLOGY, INC. [US/US]; 151 California Street, Newton, MA 02158-1097 (US).</p> <p>(72) Inventors: GERSTMANN, Joseph ; 16 Tally Ho Lane, Framingham, MA 01701 (US). DEMETRI, Elia, P. ; 39 Independence Drive, Woburn, MA 01801 (US). JACOBS, Jordan, N. ; 7 Robert Road, Randolph, MA 02368 (US). PICKARD, Donald, W. ; 221 South Main Street, Sherborn, MA 01770 (US).</p>	<p>(74) Agents: SMITH, James, M. et al. ; Hamilton, Brook, Smith &amp; Reynolds, Two Militia Drive, Lexington, MA 02173 (US).</p> <p>(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).</p> <p><b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

## (54) Title: VAPORIZING DIESEL BURNER

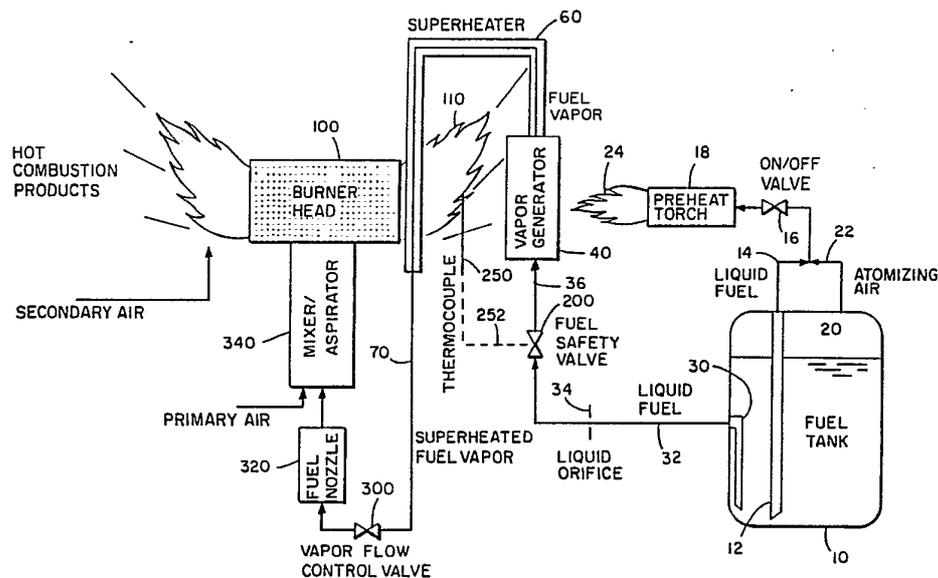

## (57) Abstract

Diesel fuel is vaporized and then burned on a cylindrical screen flame holder (110). The fuel is vaporized in a finned, vertical tube vapor generator (40) and directed through a superheater tube (60) past the flame to a flow control valve (300) and nozzle (320). A flow restriction (34) is provided between a liquid fuel supply and the vapor generator. The flame holder is vertically supported over a mixer (340) and the nozzle. A flame deflector (120) about the flame holder and a reservoir (366) about the nozzle collect fuel condensate during start-up.

## DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

### *FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Fasso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
DE	Germany	LU	Luxembourg	TD	Chad
DK	Denmark			TG	Togo
				US	United States of America

## VAPORIZING DIESEL BURNER

Background of the Invention

This invention relates to burners which utilize a pressurized supply of fuel and which vaporizes the fuel prior to  
05 combustion.

Liquid-fueled burners that do not require any external source of power are in common use as portable heat sources for applications such as campstoves and military field kitchens. Generally such burners store the fuel in a pressurized fuel  
10 tank and vaporize the liquid fuel prior to combustion in order to provide for complete mixing with combustion air and in order to provide a pressurized gas stream to propel the mixture to the burner head. In the past, most such burners utilized highly volatile fuels such as gasoline or kerosine,  
15 since these fuels vaporize at a low temperature, making it easy to heat the vaporizer and maintain the fuel in the vapor state. Operation with less volatile fuels, such as diesel fuel, is far more difficult, since diesel fuel vaporizes at a relatively high temperature, on the order of 600 - 700  
20 degrees Fahrenheit, making it far more difficult to heat the vaporizer and to deliver the fuel to the burner as a vapor. Moreover, at elevated temperatures liquid fuels tend to decompose, resulting in the formation of carbon and tars which foul the vapor passages. Nonetheless, it is highly  
25 desirable to use diesel fuel, since it is much safer than gasoline and is readily available in the military, which uses it as a universal automotive fuel.

Prior-art burners exist that are capable of burning liquid fuels without an external source of power. The vaporized fuel is generally accelerated under pressure in a nozzle, and the resulting fuel vapor jet entrains some or all of the air required for combustion. A common example of this class of burners is the "Coleman Stove", which utilizes a closed fuel tank which is pressurized by pumping air into the fuel tank. The fuel is forced out of the tank by action of the tank pressure and flows through a "generator" in which the fuel is vaporized. The heat necessary for vaporization is provided by a "pre-heat burner" during start-up, and following the pre-heat period, by heat from the main burner. The generator may take many forms, but commonly takes the form of a tube heated on the outside by a preheat burner, and once the main burner is ignited, by the main burner flame. From the generator, the now-vaporized fuel flows through a nozzle in which it accelerates to a high velocity, and then mixes with and entrains air for combustion. The air/fuel mixture then flows to a burner head, which anchors the flame. A fuel valve is generally provided to modulate and/or shut-off the flow of fuel. The fuel valve may control either the liquid fuel or the vaporized fuel.

Other examples of prior-art, non-powered, vaporizing, liquid-fueled burners include:

MSR X/GK campstove (gasoline, kerosine or diesel fuel)

Optimus 199 Ranger (alcohol, gasoline, kerosine)

- Coleman Peak 1 (gasoline or kerosine)  
Optimus III Hiker (gasoline or kerosine)  
U. S. Army M-2 Gasoline Burner Unit (gasoline)  
Haas + Sohn V75/1 Type Multicombustible Burner  
05 (Gasoline, kerosine, diesel fuel)  
Karcher Field Kitchen Burner (Gasoline, kerosine, diesel  
fuel)

The first four prior-art citations are examples of small  
campstoves, typically under 10,000 BTU/hr output, that may  
10 be carried in a back-pack for individual use. The latter  
three citations are examples of field-kitchen burners having  
capacities on the order of 60,000 BTU/hr. It is somewhat  
easier to burn low-volatility fuels in the smaller burners  
since the entire burner and fuel delivery system may be  
15 heated by conduction from the burner head. On account of  
their larger size, it is more difficult to conduct sufficient  
heat throughout the larger burners to prevent fuel vapor from  
condensing in the passages leading from the vaporizer to the  
burner. The present invention is directed towards solving  
20 this problem in larger burners.

Prior-art burners suffer from a number of additional  
deficiencies which the present invention is intended to  
overcome. These include:

Slow Start-Up - Many burners, particularly those of  
25 larger capacity, are slow-to-start because of the large  
mass of their vaporizers.

Large Size and Weight - Some burners are heavy and bulky, which is a disadvantage in a burner intended for field use.

05 Complex and Expensive - Some burners use complex and expensive mechanisms.

Unsafe Operation - Some burners may allow unsafe operation by overheating the fuel tank or burner parts, allowing fuel to drip from the burner, or storing a large volume of vaporized, pressurized fuel.

10 Unstable Operation - Some burners may operate in a pulsating mode or may be subject to flooding during start-up.

15 High Maintenance - Most vaporizing burners are subject to fouling of the vapor passages by tars formed by the fuel. This problem is particularly acute in small vapor passages.

20 Noisy, Dirty Combustion - Many burners produce smoky flames as a result of insufficient combustion air or poor mixing with air or require high air pressure to provide sufficient combustion air, which results in a noisy burner.

Disclosure of the Invention

In accordance with the present invention, liquid fuel is vaporized and then burned on a flame holder of a burner. A vapor generator comprises at least one vertical tube having  
05 fins exposed to a flame on the flame holder. Liquid is vaporized within the vertical tube. A vapor flow control valve is positioned between the vapor generator and the flameholder. Preferably, a liquid flow restrictor is provided between a liquid fuel tank and the vapor generator.

10 Preferably, the flame holder is a cylindrical screen mounted on a vertically oriented fuel and air mixer over a fuel nozzle. A cup is formed about the nozzle to collect any condensed fuel from the mixer. The mixer is preferably of high thermal conductivity material and is heated by the flame  
15 to minimize condensation. A flame deflector surrounds the flame holder and directs the flame upward. The deflector also serves to collect any fuel which condenses at the flame holder during start-up.

A superheater tube carries fuel vapor from the vapor  
20 generator past the flame to the fuel nozzle. Preferably, the superheater connects into a strainer and is easily disconnected for cleaning.

By means of the present invention, a burner is capable of burning less volatile liquid fuels without any external  
25 source of power. The burner can ignite rapidly from a cold initial state and is ready to operate in a short time. It is compact, lightweight, simple and of inexpensive

construction. It is safe and operates in a stable manner under all conditions. Further, it requires little maintenance and operates cleanly and quietly with a low pressure fuel supply.

05 Brief Description of the Drawings

Figure 1 is a schematic illustration of a vaporizing burner embodying the present invention.

Figure 2 is a more detailed schematic illustration of the mixer/aspirator of the burner of Figure 1.

10 Figure 3 is a detailed cross-sectional schematic view of the vapor generator of the burner of Figure 1.

Figure 4 is a side view of the vapor generator of Figure 1.

Figure 5 is a longitudinal-sectional view of a safety valve in the burner of Figure 1.

15 Figure 6a and 6b are cross-sectional and longitudinal-sectional views of the flame control valve of the burner of Figure 1.

Figure 7 is a side view of the mixer, flame holder and vapor generator of the system of Figure 1.

20 Description of the Invention

The principal features of the invention are described in the following figures.

Figure 1 shows a schematic of the burner system. Fuel storage tank 10 contains dip-tube 12 which draws fuel from the bottom of the tank into preheat torch 18 through conduit 14 and shut-off valve 16. Compressed air is drawn from the top space 20 of fuel tank 10 through conduit 22 to mix with the liquid fuel in torch 18. The flame 24 of the preheat torch 18 heats vapor generator 40 to start the main burner 100. Once the vapor generator 40 has been heated to a sufficient temperature, on the order of 700 degrees Fahrenheit, fuel safety valve 200 is opened, admitting liquid fuel to vapor generator 40. Liquid fuel flows from tank 10 through dip tube 30, through conduit 32 and fuel metering orifice 34 to the fuel safety valve 200. Fuel metering orifice 34 limits the rate of fuel flow so that vapor generator 40 will not become flooded with unvaporized fuel. By thus limiting the rate of liquid flow, fuel can be vaporized at a sufficient rate within vaporizer 40 to build a back-pressure which prevents excessive in-flow.

After the fuel safety valve 200 has been opened, vapor flow control valve 300 is opened. This permits fuel vapor to flow from vapor generator 40 through superheater 60 and conduit 70, through vapor flow control valve 300, and into fuel vapor nozzle 320. The vapor issues from vapor nozzle 320 as a high-velocity jet, entraining primary air into mixer/aspirator 340, which delivers the fuel/air mixture to burner head 100. Once ignited by the preheat burner flame 24, the burner flame 110 heats the vapor generator 40 and superheater 60, which in turn heats the fuel vapor flowing within it to a temperature on the order of 1000 degrees Fahrenheit. This superheating compensates for heat loss by

the fuel vapor as it flows through conduit 70, vapor valve 300, and nozzle 320.

In one embodiment, fuel safety valve 200 may be a normally-closed electric solenoid valve powered by a thermocouple 250.

05 To admit fuel to the vapor generator 40, valve 200 is manually kept open until flame 110 or 24 heats thermocouple 250 sufficiently to generate enough power to hold valve 200 in the open position. In the event of a loss of flame for any reason, thermocouple 250 would cool and allow valve 200

10 to close, thereby shutting-off the fuel flow. This arrangement also permits thermal fuses or thermostatic switches to be placed in series with the thermocouple leads 252 to open the circuit if an unsafe temperature is reached.

Figure 2 shows the arrangement of burner 100 and

15 mixer/aspirator 340. Burner head 100 comprises burner screen 110 fitted between top cap 114 and bottom cap 116, and flame deflector 120. Burner screen 110 comprises a cylinder of heat resistant sheet-metal such as stainless steel that is perforated with numerous holes or slots, each having a minor

20 dimension of not more than 0.03 inches and representing an open area of 10% to 20% of the total surface area of the cylinder. Top cap 114 is preferably made of a thin heat-resistant sheet-metal such as stainless steel, and may optionally contain additional burner ports. Bottom cap 116

25 is preferably constructed of a highly conductive metal such as copper which has been plated with nickel to minimize oxidation. Bottom cap 116 is bonded to mixer tube 346, which preferably is similarly constructed of nickel-plated copper. In the preferred embodiment, heat from the burner flame is

conducted by bottom cap 116 and mixer tube 346 down to the inlet 356 of the mixer/aspirator 340. Flame deflector 120 serves to impose a vertically upward component to the primarily radial flow direction of the flame leaving burner screen 110. It also serves to collect any condensation of fuel during startup for subsequent evaporation and burning. Preferably deflector 120 is constructed of heat-resistant sheet-metal such as stainless steel. Mixer/aspirator 340 comprises mixer tube 346 connected to mixer inlet 356 and fuel vapor nozzle 320. Mixer inlet 356 has an open bellmouth end connected to mixer tube 346 and an opposite flat base 366. The sides of inlet 356 contain openings 370 which admit combustion air to the mixer/aspirator 340. Preferably, openings 370 may be adjusted by a sliding or rotary shutter (not shown). Fuel nozzle 320 is fitted and bonded to a hole centered in base 366 to direct the fuel vapor jet 330 along the centerline of mixer tube 346. The vapor jet 330 entrains and induces combustion air to flow into the mixer inlet openings 370 and along mixer tube 346 into burner 100.

Since mixer/aspirator 340 is heated by conduction from burner 100, once the burner has reached a steady operating temperature fuel does not condense within the mixer/aspirator. During start-up any fuel that does condense within the burner 100 or mixer/aspirator 340 is collected within the base 366 of inlet 356. During subsequent operation, that liquid evaporates.

Figure 3 shows the form of vapor generator 40. Vapor generator 40 is placed between burner head 100 and preheat torch 18 in order that it may be heated by the flame of

either. Liquid fuel enters from conduit 36 through inlet manifold 42 which is connected to one or more riser tubes 44. Riser tubes 44 have fins 46 at the top which are positioned to be heated by the flames from both the preheat torch 18 and  
05 the main burner 100. Vaporized fuel exits from the top(s) of riser tube(s) 44 into outlet manifold 48, from which the fuel vapor then flows into superheater 60 (not shown).

Most of the heating of the fuel occurs within the finned section 46 or riser tube(s) 44. A liquid-vapor interface 50  
10 will normally exist within the finned section 46. Below the liquid-vapor interface 50 liquid fuel is heated to its saturation temperature and caused to vaporize and bubble. Above the interface 50 the fuel is mostly in the vapor state, and as a result of the significantly lower coefficient of  
15 heat transfer to the vapor in comparison to the liquid, relatively little heating of the fuel occurs above interface 50.

The elevation of interface 50 within riser 44 is established by a balance between the rate of vaporization and the flow  
20 of vapor out of nozzle 320 (not shown, see Figure 1). If interface 50 is below its equilibrium elevation, less of the interior surface of riser 44 is exposed to liquid, resulting in lower heat input and a correspondingly lower rate of evaporation of fuel. This in turn causes a lower rate of  
25 flow through nozzle 320 and vapor valve 300, which results in a lower back-pressure. If the back-pressure is less than the supply pressure established by the pressure in fuel tank  
10 (not shown), less any pressure drop caused by flow resistance and elevation change, the flow of liquid fuel into

riser 44 will increase, causing interface 50 to rise. This, in turn, will increase the surface of liquid being heated, thus increasing the evaporation rate and re-establishing equilibrium.

- 05 The rate at which interface 50 will rise or fall in response to a perturbation from equilibrium is governed in part by the resistance of orifice 34 (See Figure 1). It has been found that a flow resistance sufficient to limit fuel flow to between twice to six times the normal rate of evaporation  
10 in the vapor generator 40 will prevent flooding or flow oscillation while permitting good modulation of the burner. Moreover, by limiting the maximum diameter of orifice 34 to 0.020 inches, it acts as a flame arrestor, preventing a flashback of flame from entering the fuel tank.
- 15 The use of the vertical vapor generator in combination with the flow-limiting liquid orifice eliminates the problems of flooding and flow oscillations common with other non-powered burners, resulting in a safer, easier-to-operate burner.

Some prior-art generators have sought to solve the problem  
20 of flow oscillation by using a small diameter/volume vapor generator (e.g., 1/4 inch internal diameter), which causes the frequency of flow oscillation to increase to a point at which the oscillation may not be objectionable. However, such vapor generators are highly susceptible to fouling by  
25 the tars which remain after the lighter fuel fractions have evaporated. Riser(s) 44 preferably have an internal diameter between one-half inch to one inch. Diameters smaller than one-half inch may result in premature failure due to the

build-up of tar or carbon, which may block the flow within the vapor generator. Larger diameters result in a larger thermal mass, requiring longer time to preheat the vapor generator.

- 05 Figure 4 shows a preferred embodiment of vapor generator 40. Liquid fuel supply tube 36 is joined to inlet manifold tee 442 by soldering, brazing, welding or similar bonding method. Inlet tubes 410 and 412 are also bonded to manifold 442 and extend into riser tubes 444 through compression fittings 420
- 10 and 430. Compression fittings 420 are fitted to inlet tubes 410 and 412 and are joined to compression fittings 430, which are fitted to riser tubes 444. Riser tubes 444 are joined to finned tubes 450 having fins 446 by a suitable high-temperature method of bonding, such as "micro-brazing" or
- 15 welding. Fins 446 may be machined in tubes 450 or may be stamped out of sheet-metal and brazed to tubes 450. Outlet header 448 may be made out of a closed rectangular tube that is brazed to the top of finned tubes 450 and brazed or welded to the inlet 460 of superheater 60.
- 20 This preferred embodiment provides an economical construction which facilitates cleaning of the interior of the vapor generator by unscrewing the compression fittings 420 and 430. Tubing 36, 410 and 412, and fittings 442 and 420 may be constructed of inexpensive low-temperature materials, such
- 25 as copper or brass, since they are not exposed to high temperature. The remainder of the assembly should be constructed of temperature-resistant materials, such as stainless steel.

Figure 5 shows a cross-sectional view of fuel safety valve 200. Fuel enters through inlet fitting 210 to inlet plenum 220 within housing 230. Valve plug 240 is fitted to shaft 242 which is surrounded by solenoid winding 244. Spring 246 positioned between solenoid winding 244 and plug 240 forces "O" ring 248 contained in plug 240 against valve seat 232 when the solenoid is de-energized, sealing inlet plenum 230 outlet plenum 260 and outlet fitting 262. Valve plunger 270 is used to manually open valve 200 by pushing on push-button against return spring 274. Plunger "O" ring 276 prevents leakage of fuel between plunger 270 and housing 230. Thermocouple 250 is connected through thermocouple lead 252 and connector 254 and feedthrough 256 to solenoid winding 244. Optional series connector 258 has external terminals 259 which provide connection to an external series loop which may contain thermostatically activated fuses or switches to interrupt the circuit between thermocouple 250 and solenoid winding 244.

In operation, after vapor generator 40 has been heated sufficiently by preheat torch 18, push-button 272 is depressed and held in the depressed position, pushing valve plug 240 away from seat 232 until thermocouple 250 is heated sufficiently by the main burner so that solenoid 244 captures shaft 242 and button 272 may be released. In the event of a flameout, thermocouple 250 will cool, thereby reducing its electrical output, de-energizing solenoid 244 and allowing spring 246 to close plug 240. If any optional thermal switches or fuses are used in combination with optional connector 258, any event which causes them to open will also result in closing of the safety valve.

Figures 6A and 6B show one form of a combination vapor flow control valve 300 and fuel vapor nozzle 320. Vaporized fuel enters from superheater outlet conduit 70 through valve inlet 310. Valve stem 350 has male threads 352 which engage female threads 302 in valve body 300 to enable valve tip 340 to seal against valve seat 330 in body 300. Valve stem 350 is sealed in body 300 by packing 354 and packing nut 356. Outlet plenum 370 communicates with chamber 372 into which is screwed vapor nozzle 320, sealed with nozzle gasket 322. Pinion gear 360 is located on valve stem 350 between threads 352 and valve tip 340. Gear 360 engages rack 362 which contains cleanout pin 364. When valve stem 350 is rotated to draw valve tip 340 away from seat 330, gear 360 causes rack 362 to rise. Further opening of the valve causes the cleanout pin 364 in rack 362 to pass through the orifice in vapor nozzle 320, thereby clearing away any debris that may have collected at the orifice.

In a preferred embodiment, cleanout pin 364 may be a twist drill shortened to an appropriate length. The flutes in the twist drill permit vapor to flow through the orifice while the nozzle is being cleaned, thereby permitting the nozzle to be cleaned without extinguishing the main burner.

Additionally, the cleanout pin 364 may be used as a modulating valve, using the nozzle 320 as a secondary valve seat. This can be advantageous when operating the burner at its minimum firing rate, since this causes the nozzle to operate as a variable-area nozzle, maintaining a high vapor velocity through a reduced nozzle cross-sectional area. This

results in greater entrainment of air at a given vapor flow rate than if the vapor were throttled by the main vapor flow control valve at seat 330.

Figure 7 shows an assembly of the vapor generator, vapor flow control valve and burner/mixer. Vapor generator 40 is attached by clamp 140 to bracket 130 which is bonded to deflector 120 of burner head 100. Fins 46 are positioned to be opposite burner screen 110, and tubular superheater 60 is connected to outlet header 48 and coils about burner screen 110 for approximately 180 degrees before bending downward to the vapor flow control valve 300. The body of valve 300 is fitted and bonded to a hole in the base 366 of mixer inlet 356, securely aligning the nozzle 320 with the centerline of mixer tube 346.

In a preferred embodiment, vapor strainer 72 is positioned between superheater 60 and valve 300 to trap any carbon particles that may have been formed in the vapor generator or superheater and which may clog the vapor valve or vapor nozzle. Superheater tube 60 is readily disconnected from strainer 72 for ease of cleaning. Mixer inlet 356 may also be separably attached to mixer tube 346 and fastened by hose clamp 380. Cable 376 attached to tab 374 on rotary shutter 372 may be used to adjust the position of shutter 372 over air slots 370 to alter the ratio of air to fuel.

CLAIMS

1. A vaporizing liquid fuel burner, comprising:
  - a) a pressurized liquid fuel supply;
  - b) a flame holder which receives vaporized  
5 fuel from the pressurized liquid fuel supply;
  - c) a vaporizer comprising unrestricted  
vertical tubes having fins exposed to a flame on  
the flame holder, liquid within portions of the  
tubes being vaporized;
  - 10 d) a liquid flow restriction between the  
liquid fuel supply and the vaporizer; and
  - e) a vapor flow control valve.
2. A fuel burner as recited in Claim 1 wherein the  
vertical tubes of the vaporizer have diameters of  
15 about 1/2 inch or greater.
3. A fuel burner as recited in Claim 1 wherein the  
liquid flow restriction increases flow resistance  
of fuel in the vaporizer such that the flow  
resistance in the vaporizer is about two to six  
20 times greater than the normal rate of evaporation  
of the fuel.
4. A fuel burner as recited in Claim 1 further  
comprising a superheater tube which carries vapor  
from the vaporizer past the flame.
- 25 5. A fuel burner as recited in Claim 4 wherein the  
superheater tube is readily disconnected from the  
assembly.

6. A fuel burner as recited in Claim 4 further comprising a strainer situated between the superheater tube and the vapor flow control valve for straining the vapor.
- 5 7. A fuel burner as recited in Claim 1 further comprising a vapor flow limiting means positioned in series with the liquid flow restriction.
8. A fuel burner as recited in Claim 7 wherein the  
10 vapor flow limiting means comprises a vapor nozzle.
9. A fuel burner as recited in Claim 8 wherein the flame holder is mounted on a vertically disposed mixer over the vapor nozzle.
10. A fuel burner as recited in Claim 9 wherein the  
15 mixer is made of high thermal conductivity material and is heated by the flame.
11. A fuel burner as recited in Claim 10 further comprising a fuel condensate collector formed about the nozzle for collecting fuel condensate.
- 20 12. A fuel burner as recited in Claim 11 wherein the fuel condensate collector is heated through the mixer to evaporate the fuel condensate that the collector collects.
13. A fuel burner as recited in Claim 7 wherein the vapor flow control valve comprises a cleanout pin

5 mounted for reciprocation into and out of the vapor nozzle to clean the vapor nozzle, the pin having helical flutes in the surface thereof to permit continued gas flow during movement of the pin in the vapor nozzle.

14. A fuel burner as claimed in Claim 13 wherein the pin is driven by the drive to a valve member of a flow control valve.
- 10 15. A fuel burner as recited in Claim 1 further comprising a flame deflector about the flame holder which serves to collect any fuel condensate from the outside of the flame holder.

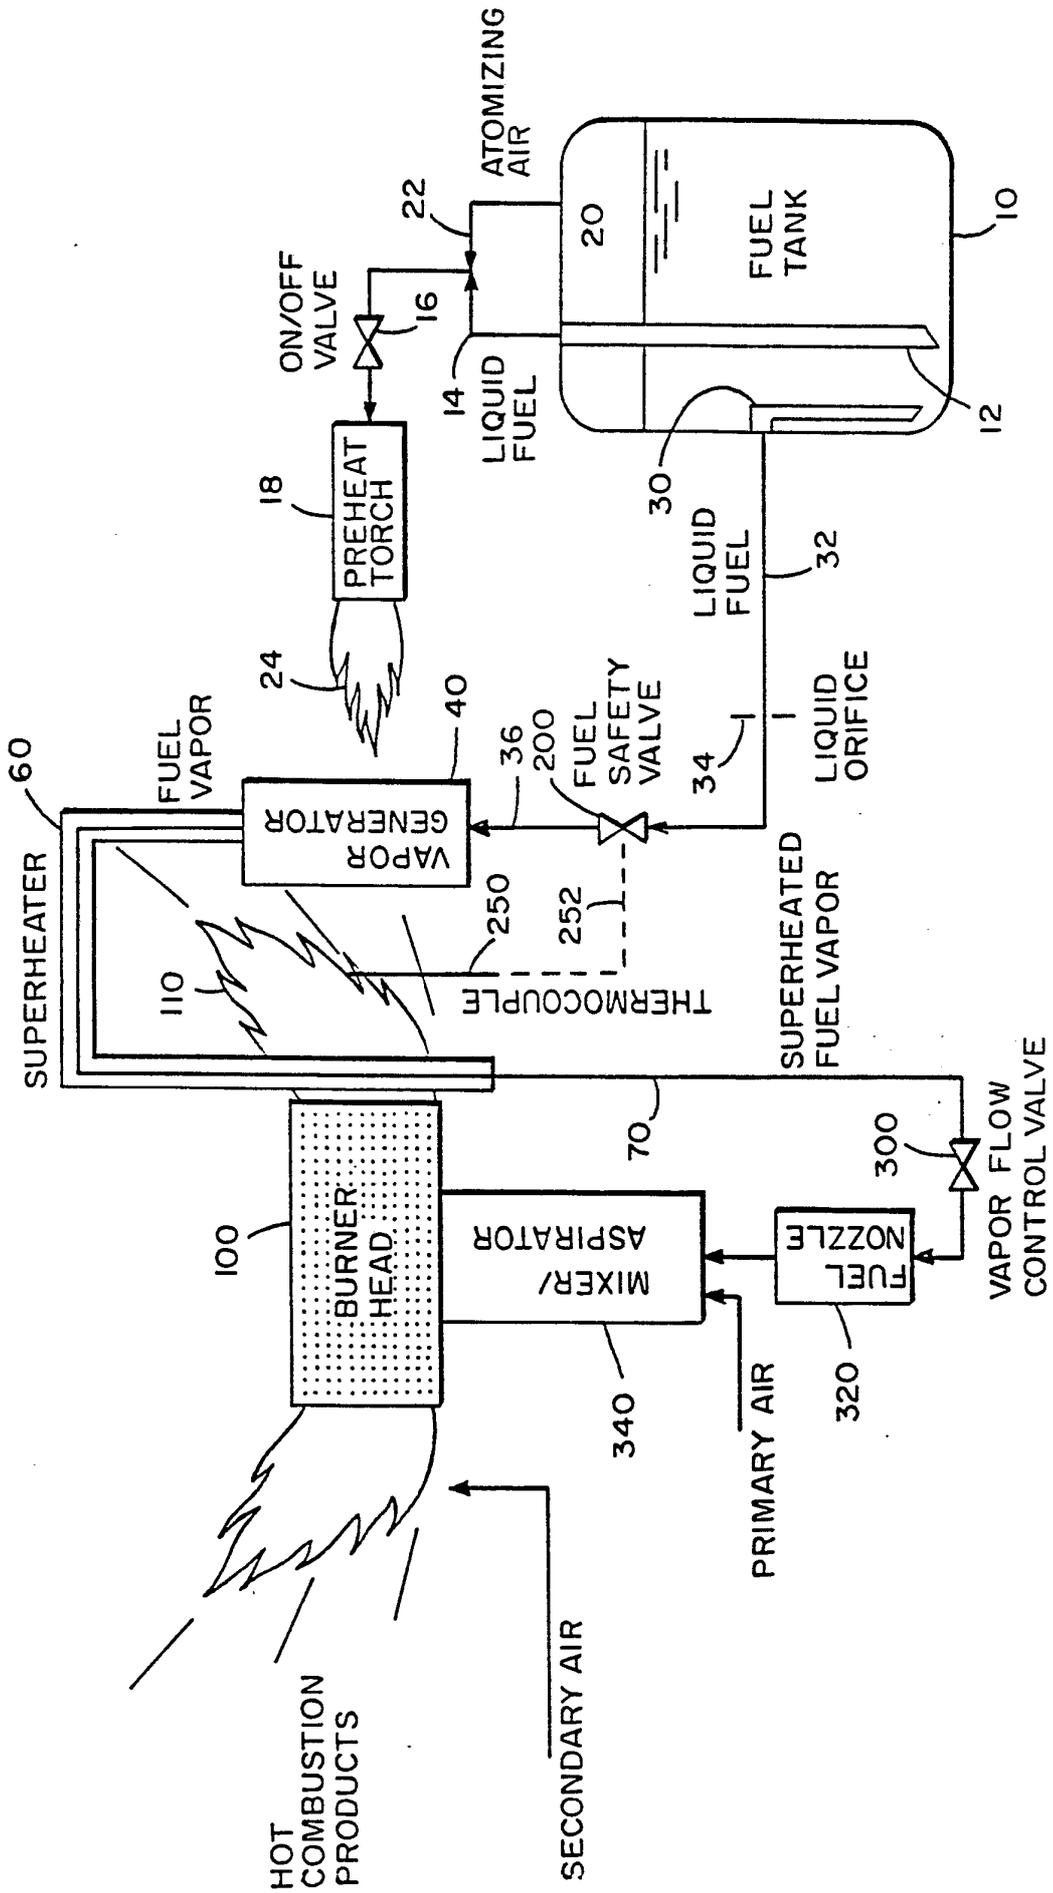


FIG. 1

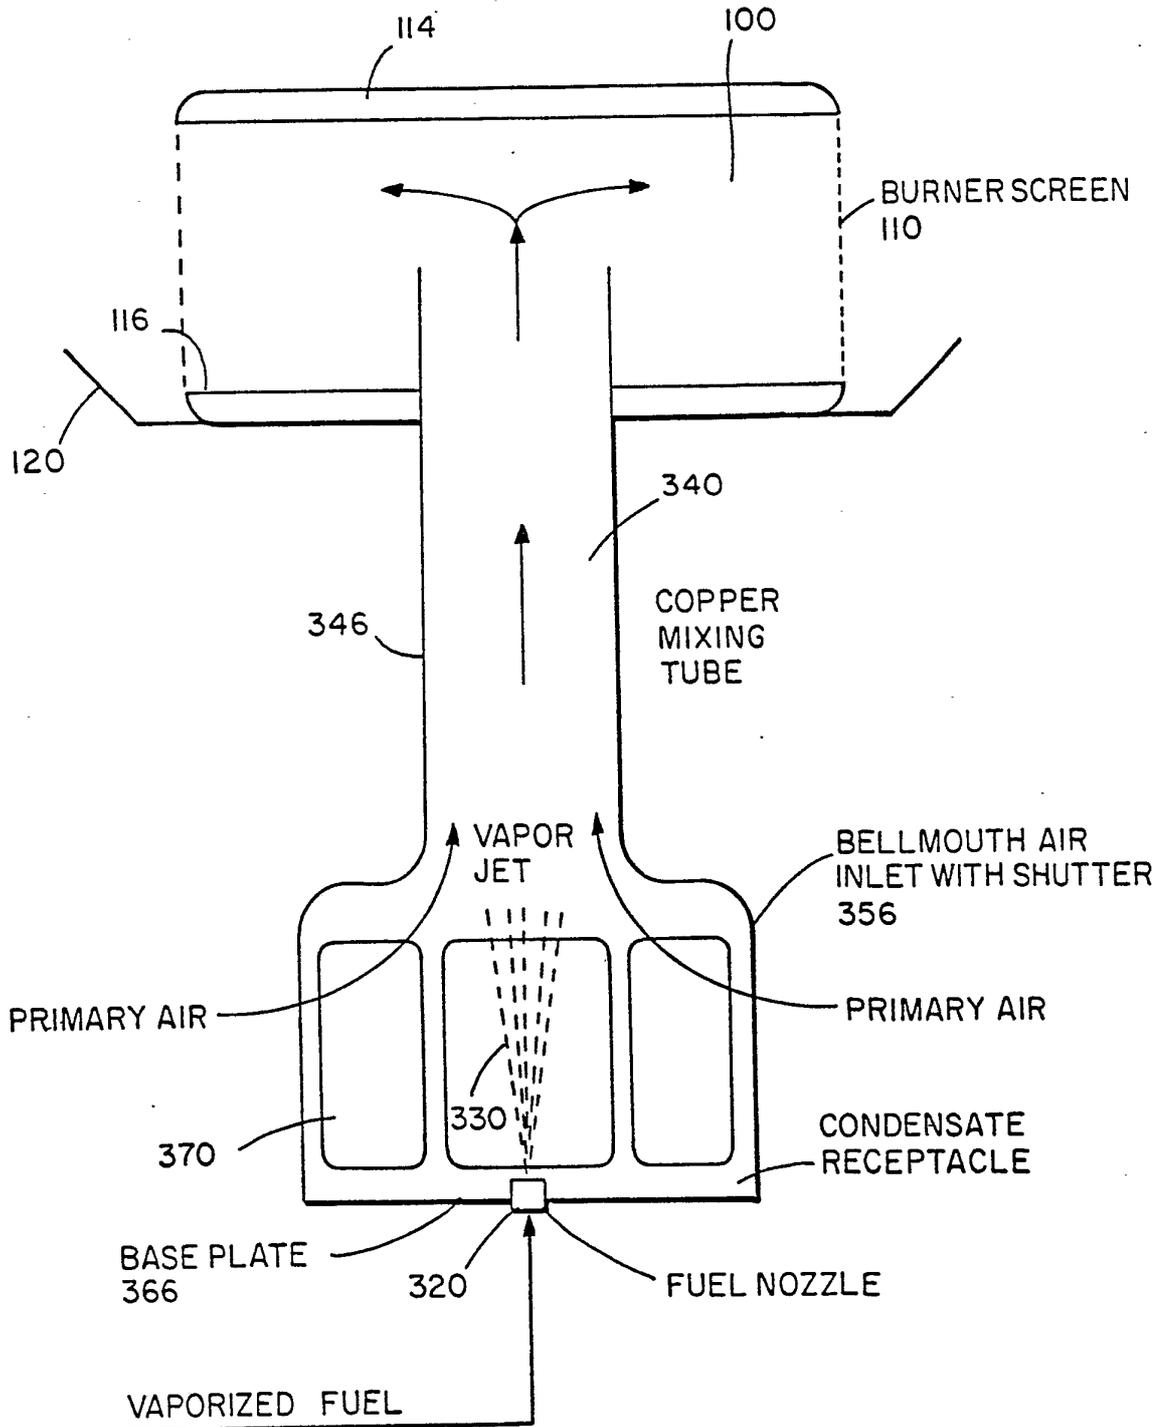


FIG. 2

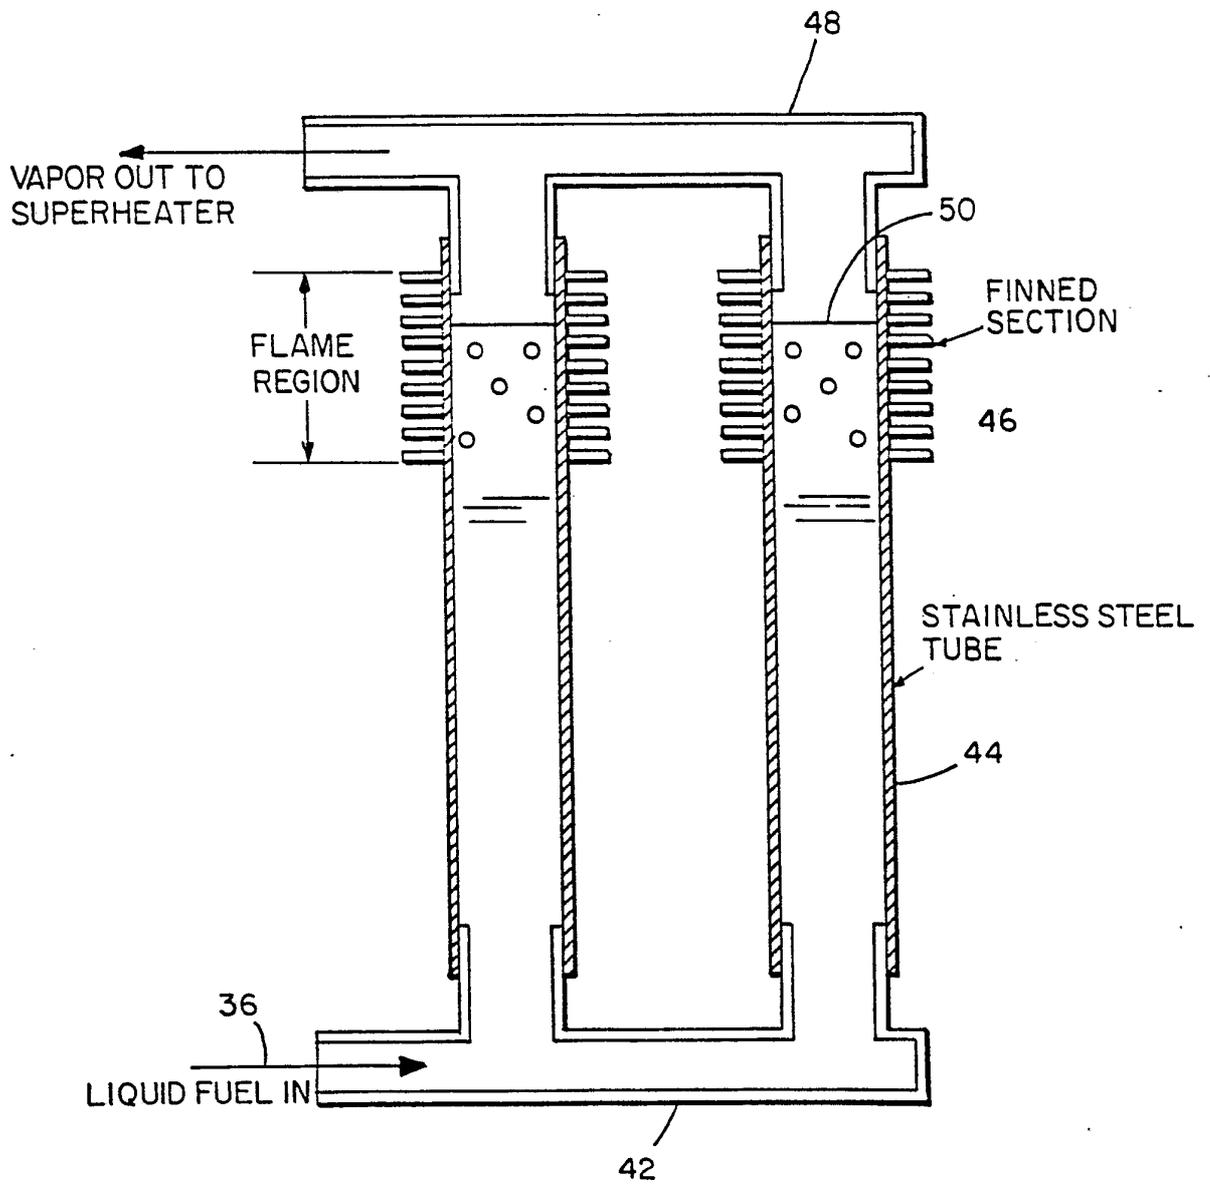


FIG. 3

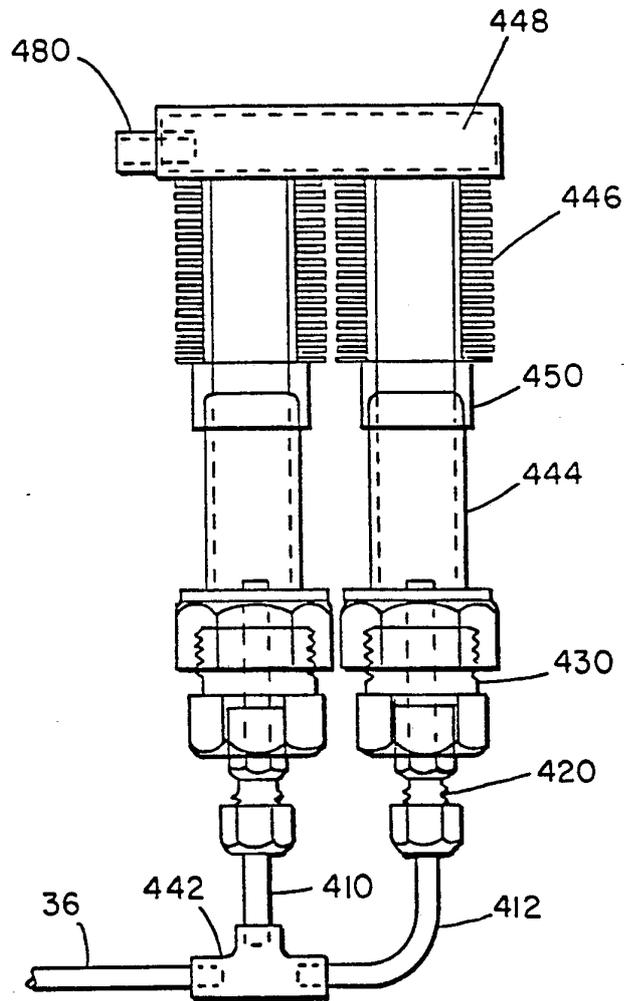


FIG. 4



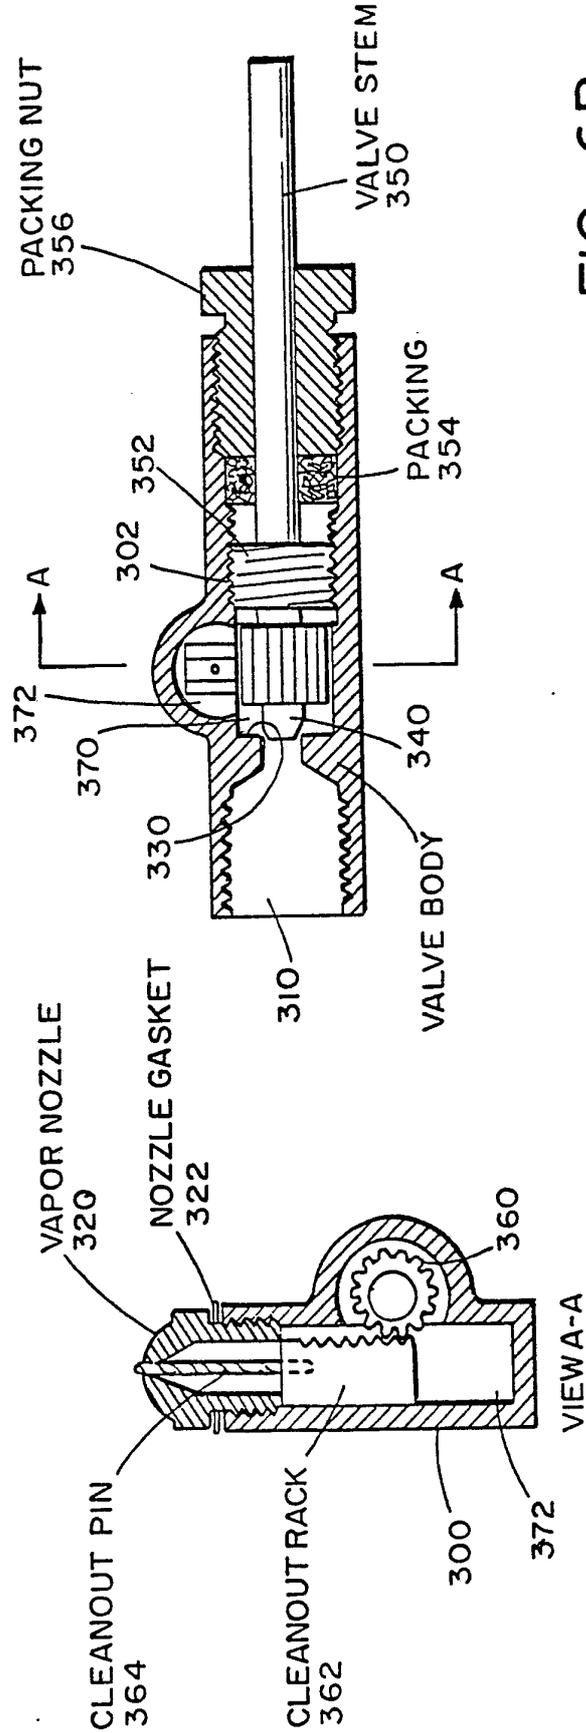


FIG. 6B

FIG. 6A

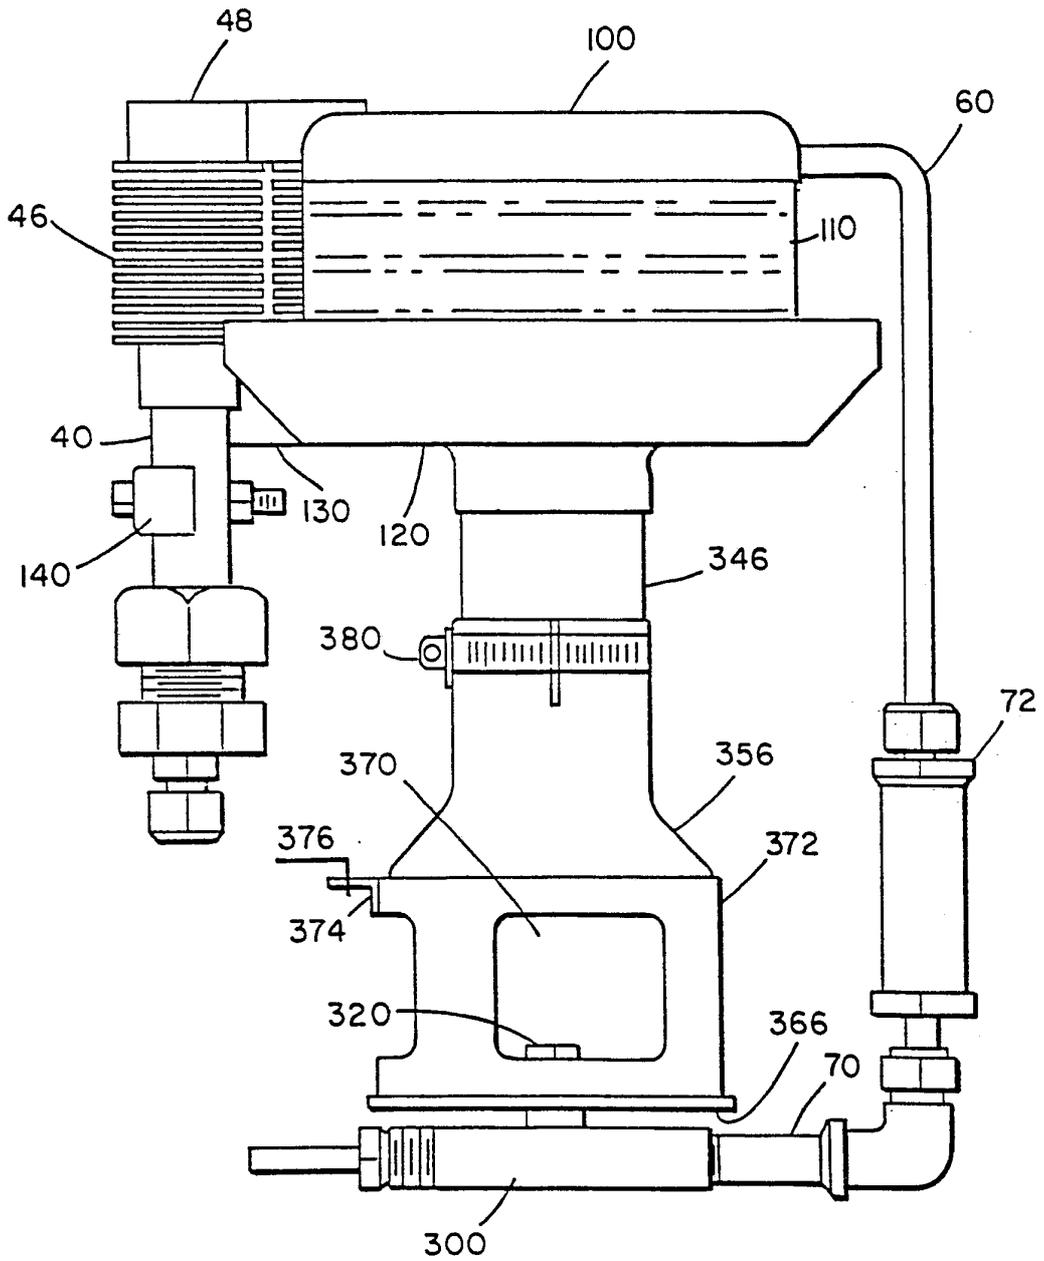


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No PCT/US 90/04747

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup>				
According to International Patent Classification (IPC) or to both National Classification and IPC				
IPC <sup>5</sup> : F 23 D 11/44, F 23 D 11/46				
<b>II. FIELDS SEARCHED</b>				
Minimum Documentation Searched <sup>7</sup>				
Classification System	Classification Symbols			
IPC <sup>5</sup>	F 23 D, F 23 K			
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>				
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>9</sup></b>				
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>		
A	US; A, 2270623 (CAMERTONI) 20 January 1942 see the whole document  --	1,14		
A	DE, C, 523022 (NORDENSSON) 20 April 1931 see page 2, lines 28-89; figure  --	1,9		
A	US, A, 1647732 (HUTCHISON) 1 November 1927 see page 1, lines 37-71,81-102; page 2, lines 2-38,52-57; figures 1,2  --	1,7,8		
A	DE, U, 8805721 (BÜRDE) 18 August 1988 see claims 1,4,5; figures 3,4  --	1,9,10		
./.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"> <sup>10</sup> Special categories of cited documents:                       "A" document defining the general state of the art which is not considered to be of particular relevance                      "E" earlier document but published on or after the international filing date                      "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)                      "O" document referring to an oral disclosure, use, exhibition or other means                      "P" document published prior to the international filing date but later than the priority date claimed                 </td> <td style="width: 50%; border: none;">                     "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                      "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step                      "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.                      "&amp;" document member of the same patent family                 </td> </tr> </table>			<sup>10</sup> Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
<sup>10</sup> Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
<b>IV. CERTIFICATION</b>				
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report			
18th January 1991	31. 01. 91			
International Searching Authority	Signature of Authorized Officer			
EUROPEAN PATENT OFFICE	miss T. MORTENSEN			

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	FR, A, 2254244 (GAZ DE FRANCE) 4 July 1975 see page 2, lines 2-8; page 3, lines 23-35; page 4, lines 25-35; page 5, lines 1-3, 19-35; page 6, lines 1-3; figures 1, 2 --	1
A	DE, C, 943284 (HÄHNEL) 17 May 1956 see page 2, lines 39-65; figure --	6
A	GB, A, 500418 (EKSTRÖM) 9 March 1979 see page 1, lines 9-25; figures 1-7 --	14
A	CH, A, 287381 (HAGER) 1 April 1953 see page 1, lines 59-66; figure --	15
A	US, A, 4720257 (BECKHAM) 19 January 1988 --	
A	CH, A, 186378 (GOLAY) 1 December 1936  -----	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9004747

SA 40999

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 25/01/91  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 2270623		None	
DE-C- 523022		None	
US-A- 1647732		None	
DE-U- 8805721	07-07-88	None	
FR-A- 2254244	04-07-75	None	
DE-C- 943284		None	
GB-A- 500418		None	
CH-A- 287381		None	
US-A- 4720257	19-01-88	JP-A- 63032206	10-02-88
CH-A- 186378		None	

EPO FORM P0479

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82