



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2533891 A1 2005/03/03

(21) 2 533 891

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2004/08/09
(87) Date publication PCT/PCT Publication Date: 2005/03/03
(85) Entrée phase nationale/National Entry: 2006/01/27
(86) N° demande PCT/PCT Application No.: US 2004/025622
(87) N° publication PCT/PCT Publication No.: 2005/019040
(30) Priorité/Priority: 2003/08/12 (10/639,573) US

(51) Cl.Int./Int.Cl. *B65C 9/18* (2006.01),
B65H 35/00 (2006.01), *B65C 11/02* (2006.01),
B41J 15/04 (2006.01)


(71) Demandeur/Applicant:
BRADY WORLWIDE, INC., US

(72) Inventeurs/Inventors:
CARRIERE, RICHARD L., US;
WILKEN, KEVIN L., US

(74) Agent: BCF LLP

(54) Titre : CARTOUCHE D'IMPRIMANTE

(54) Title: PRINTER CARTRIDGE

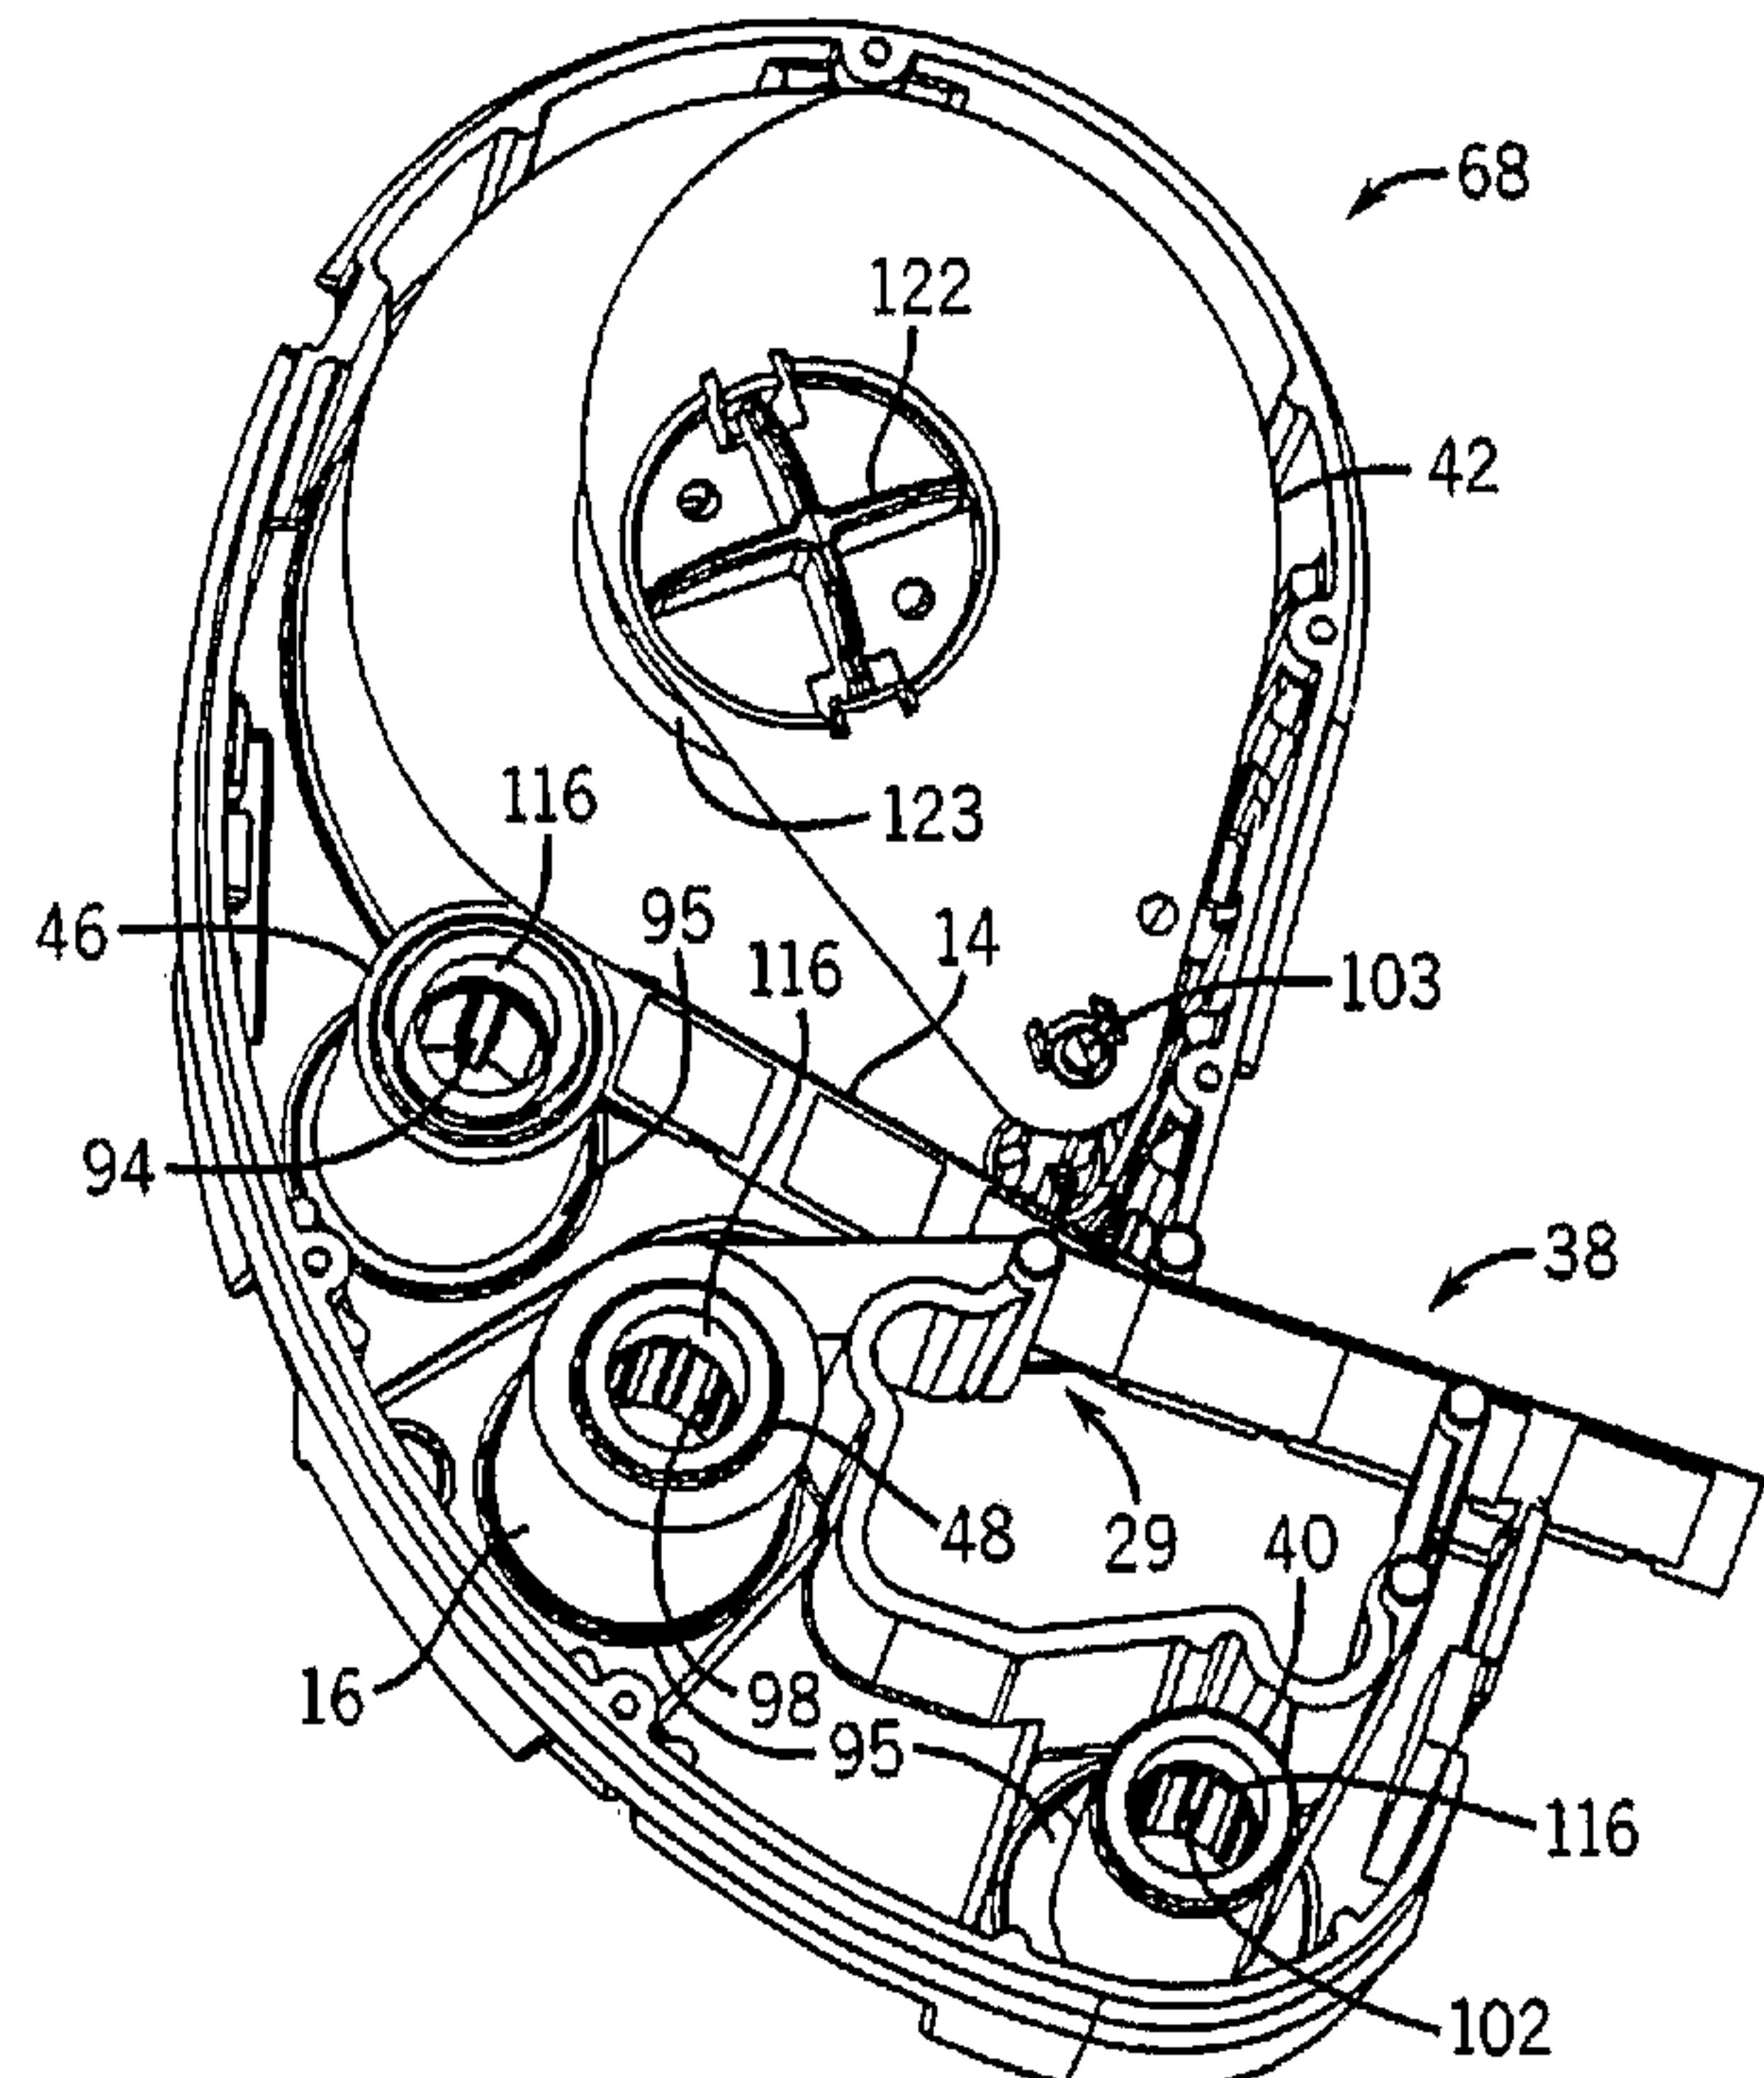

(57) Abrégé/Abstract:

A printer cartridge (12) suitable for use in a cartridge-based printer (10) houses and dispenses a roll of label media (14). The cartridge includes housing (28) having a top wall (30) and a bottom wall (32). A yoke (42) pivotally mounted between the top and bottom walls for pivotal movement about a pivot axis (103) includes a label media supply shaft for holding a roll of label media. The label media supply shaft has a longitudinal axis spaced from, and parallel, to the pivot axis. A label media drive roller (46) is rotatably mounted between the top and bottom walls, and a biasing means (44) biases the yoke (42) toward the label media drive roller to maintain the roll of label media in contact with the label media drive roller (46) and defines beginning of a media path. In one embodiment, the yoke is adjustable to accommodate different label media widths.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/019040 A3

(51) International Patent Classification⁷: **B65C 9/18**,
11/02, B65H 35/00, B41J 15/04

(21) International Application Number:
PCT/US2004/025622

(22) International Filing Date: 9 August 2004 (09.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/639,573 12 August 2003 (12.08.2003) US

(71) Applicant (for all designated States except US): **BRADY WORLDWIDE, INC.** [US/US]; 2221 West Camden Road, P.O. Box 571, Milwaukee, WI 53201-0571 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CARRIERE**,

Richard, L. [US/US]; 727 East Quail Court, Oak Creek, WI 53154 (US). **WILKEN, Kevin, L.** [US/US]; 4635 North 100th Street, Wauwatosa, WI 53225 (US).


(74) Agent: **RADLER, Daniel, G.**; Quarles & Brady LLP, 411 E. Wisconsin Avenue, Milwaukee, WI 53202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PRINTER CARTRIDGE

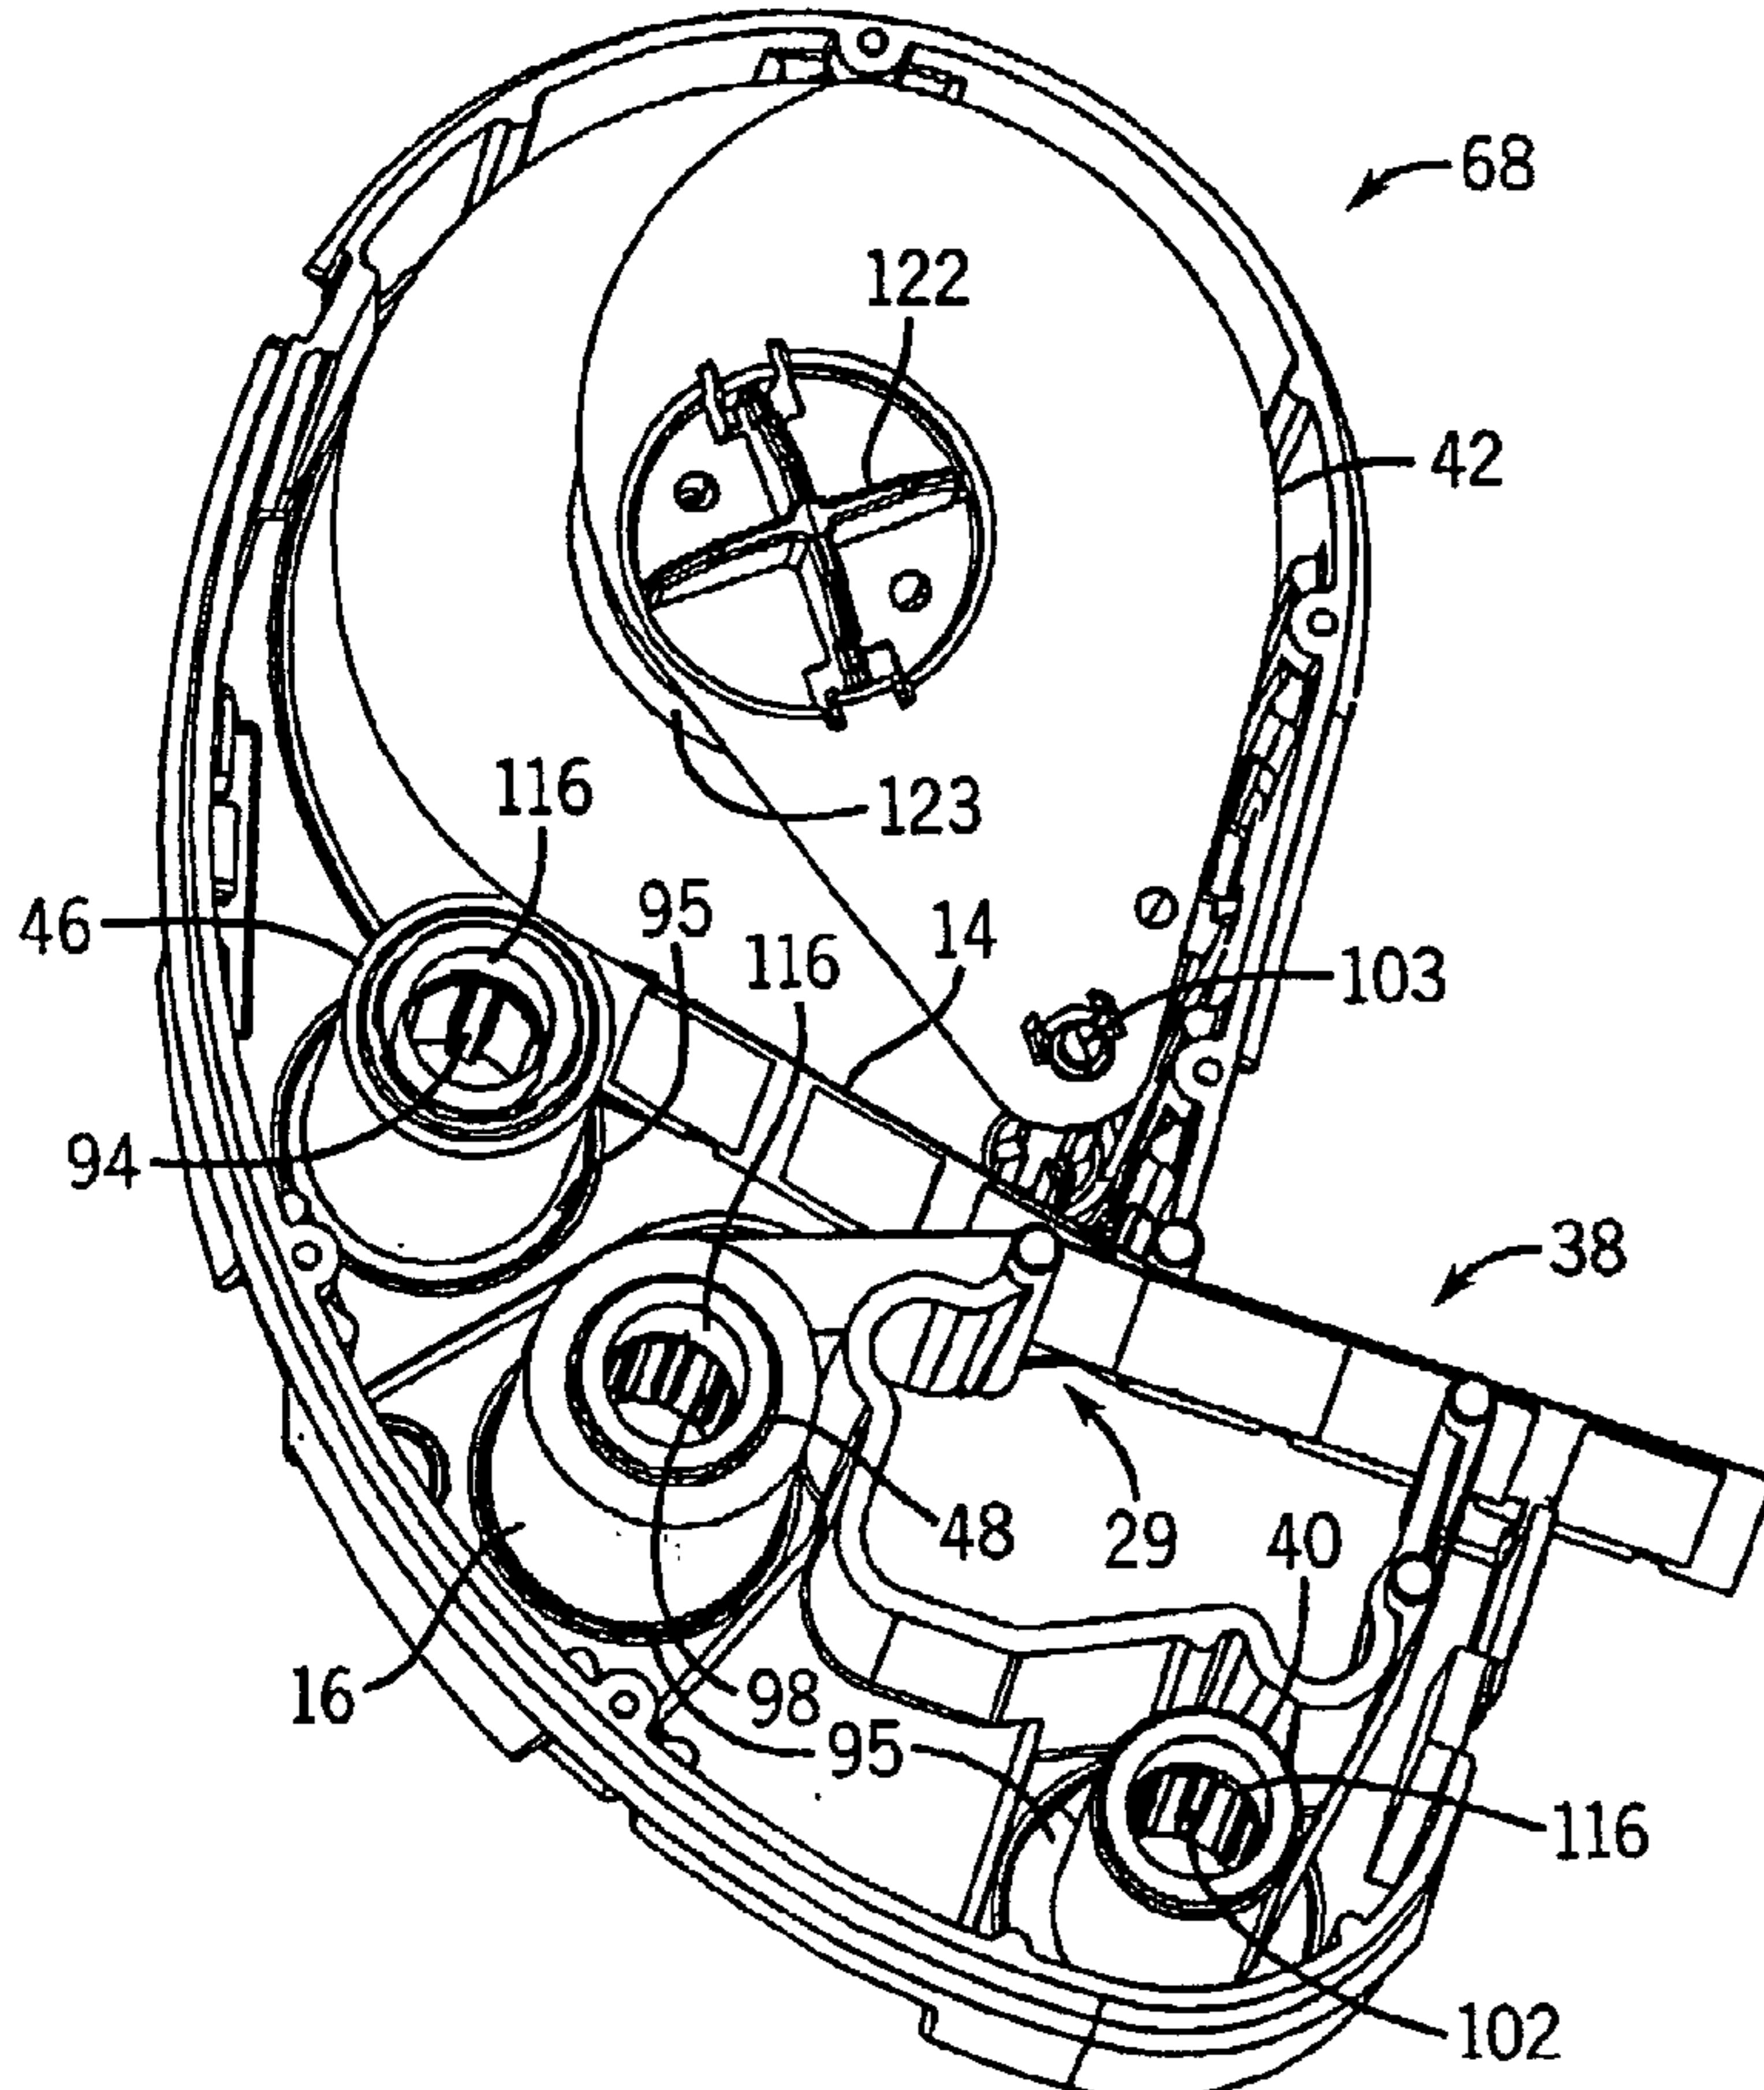

(57) Abstract: A printer cartridge (12) suitable for use in a cartridge-based printer (10) houses and dispenses a roll of label media (14). The cartridge includes housing (28) having a top wall (30) and a bottom wall (32). A yoke (42) pivotally mounted between the top and bottom walls for pivotable movement about a pivot axis (103) includes a label media supply shaft for holding a roll of label media. The label media supply shaft has a longitudinal axis spaced from, and parallel, to the pivot axis. A label media drive roller (46) is rotatably mounted between the top and bottom walls, and a biasing means (44) biases the yoke (42) toward the label media drive roller to maintain the roll of label media in contact with the label media drive roller (46) and defines beginning of a media path. In one embodiment, the yoke is adjustable to accommodate different label media widths.

WO 2005/019040 A3

WO 2005/019040 A3



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report: 14 July 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

PRINTER CARTRIDGE

CROSS REFERENCES TO RELATED APPLICATIONS

[0001] Not Applicable

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] Not Applicable

TECHNICAL FIELD

[0003] The present invention relates to a printer label media cartridge, and more particularly to a cartridge having a pivotally mounted label media spool.

DESCRIPTION OF THE BACKGROUND ART

[0004] There are a number of U.S. patents that disclose electronic apparatus for printing indicia on labels, some of these are restricted to hand held units and others that disclose tabletop units. Hand held label printers, such as disclosed in U.S. Pat. No. 6,113,293, and tabletop printers, such as disclosed in U.S. Pat. Nos. 6,266,075 and 5,078,523, include the same general combination of elements, a print head, means for feeding label media to be printed past the print head, a microprocessor, a read only memory programmed with appropriate instructions to operate the microprocessor, a random access memory, a keyboard with letter, number, and function keys for the entry of alphanumeric information and instructions concerning the indicia to be printed, and a visual display such as a light emitting diode (LED) or liquid crystal display (LCD) unit to

assist the operator in using the printer. In a hand held printer, these components may all be enclosed in a single housing.

[0005] The label media comprises a series of labels that are attached to a carrier strip. The carrier strip is fed through the printer and legends, alphanumeric characters, and other indicia, are printed on the labels. The labels are then removed from the carrier and attached to the objects needing identification. As there are many types of label applications, there are many combinations of labels and carrier strips that provide labels of varying sizes, colors and formats.

[0006] A particular type of print head employs thermal transfer printing technology. Thermal transfer printing uses a heat generating print head to transfer a pigment, such as wax, carbon black, or the like, from a thermal transfer ribbon to a label media. By using digital technology, characters are formed by energizing a sequence of pixels on the print head which in turn melts the wax or other pigment on the ink ribbon transferring the image to the label media.

[0007] In a known thermal transfer printer such as a label printer, label media and ink ribbon are simultaneously fed past the print head by a platen roller in an overlay relationship between the print head and the platen roller. The platen roller is rotatably driven by a drive mechanism that may also rotatably drive ink ribbon take up and supply spools to maintain tension in the ink ribbon.

[0008] In a cartridge-based printing system, such as disclosed in U.S. Pat. No. 6,113,293, it is desirable to have a consistent label media path. In order to accomplish this, many cartridge-based printing systems have the label media path defined by a point

tangent to the outside diameter of a roll of label media. This method, however, presents a problem as the label media is consumed. In particular, as the label media is consumed the diameter of the roll decreases and the beginning point of the label media path changes.

[0009] This problem becomes even more critical if the printing system prints on label media having die cut labels. In order to minimize wasting the die cut labels, it is necessary to feed the label media in a reverse feed direction to align the die cut label with the print head once the previously printed label has been dispensed. The changing beginning point of the label media path caused by the decreasing roll diameter makes it difficult to accurately align the label media with the print head. Therefore, a need exists for a printing cartridge which can be used in a cartridge-based printing system that defines a consistent beginning of the label media path.

[0010] Another problem with cartridge-based printing systems is that the cartridges are typically formed to accommodate a single label media width. As a result, a cartridge manufacturer must maintain an inventory of cartridges for each label media width. Therefore, a need exists for a label media cartridge that can be used for a variety of label media widths.

SUMMARY OF THE INVENTION

[0011] The present invention provides a printer cartridge suitable for use in a cartridge-based printer. The printer cartridge houses and dispenses a roll of label media, and includes a housing having a top wall and a bottom wall. A yoke pivotally mounted between the top and bottom walls for pivotable movement about a pivot axis includes a label media supply shaft for holding a roll of label media. The label media supply shaft

has a longitudinal axis spaced from, and parallel to, the pivot axis. A label media drive roller is rotatably mounted between the top and bottom walls, and a biasing means biases the yoke toward the label media drive roller to maintain the roll of label media in contact with the label media drive roller and define a beginning of a media path. In one embodiment, the yoke is adjustable to accommodate different label media widths.

[0012] A general objective of the present invention is to provide a cartridge that can house a roll of label media and define a consistent beginning of the label media path as the diameter of the roll of label media decreases. This objective is accomplished by providing a cartridge having a pivotally mounted yoke that maintains label media supported by the yoke in contact with a label media drive roller to define a consistent beginning of the label media path.

[0013] Another objective of the present invention is to provide a cartridge that can accommodate label media having different widths. This objective is accomplished by providing a yoke having a movable media guide that accommodates different label media widths.

[0014] The foregoing and other objectives and advantages of the invention will appear from the following description. In the description, reference is made to the accompanying drawings which form a part hereof, and in which there is shown by way of illustration a preferred embodiment of the invention. Such embodiment does not necessarily represent the full scope of the invention, however, and reference is made therefore to the claims herein for interpreting the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Fig. 1 is a perspective view of a hand held label printer incorporating the present invention;

[0016] Fig. 2 is a perspective view of the printer of Fig. 1 with the cartridge and top portion, keyboard, and display removed;

[0017] Fig. 3 is a top perspective view of the cartridge of Fig. 1;

[0018] Fig. 4 is a bottom perspective view of the cartridge of Fig. 1;

[0019] Fig. 5 is a top view of the cartridge of Fig. 1 received in the cartridge receptacle with the top wall of the cartridge removed;

[0020] Fig. 6 is a top perspective view of the base of the cartridge housing of Fig. 3 ;

[0021] Fig. 7 is a top perspective view of the cartridge of Fig. 3 with the cover removed;

[0022] Fig. 8 is a bottom perspective view of the cover of the cartridge housing of Fig. 3;

[0023] Fig. 9 is a bottom perspective view of the cartridge of Fig. 3 with the base removed;

[0024] Fig. 10 is a perspective view of the yoke of Fig. 7;

[0025] Fig. 11 is a perspective view of the first media guide of Fig. 10;

[0026] Fig. 12 is a perspective view of the second media guide of Fig. 10;

[0027] Fig. 13 is a detailed perspective view of the pivot shaft interfacing with the second media guide of Fig. 10; and

[0028] Fig. 14 is a detailed perspective view of the pivot shaft and torsion spring of the first media guide of Fig. 10.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] Referring particularly to Figs. 1-5, a hand held thermal printer 10 employing a preferred embodiment of the present invention includes a molded plastic housing 2 that supports a keyboard 4 on its front surface and a display 6 positioned above the keyboard 4. An opening 8 formed in the housing 2 above the display 6 receives a cartridge 12 containing label media 14 and an ink ribbon 16. The cartridge 12 is inserted through the opening 8 into a cartridge receptacle 18 housed in the printer housing 2. The label media 14 and ink ribbon 16 from the cartridge 12 are threaded through a printer mechanism assembly 20. The printer mechanism assembly 20 includes a print head 22 and a platen roller 24 for printing indicia on labels forming part of the label media 14. The printed labels pass through a cutter mechanism 26 which cuts the label media 14 to separate the printed labels from unprinted labels.

[0030] The label media 14 is known in the art, and generally comprises a carrier web which supports a series of adhesive labels. The size, width, color, and type of web material varies depending upon the particular print application. The label media 14 is dispensed from the cartridge 12, and urged along a web path as it is consumed by the printer 10.

[0031] Referring to Figs. 3-9, the cartridge 12 includes a cartridge housing 28 having a top wall 30 and a bottom wall 32 joined by a periphery wall 34. The periphery wall 34 defines a label media and ink ribbon container for housing the label media and ink ribbon

on spools. The label media 14 and ink ribbon 16 from the cartridge housing 28 pass out of the cartridge housing 28 through an exit slot 29 and into a printing area 38 external to the cartridge housing 28 for engagement with the platen roller 24 and print head 22. The used ink ribbon 16 reenters the cartridge housing 28, and is wound onto an ink ribbon take up spool 40 rotatably mounted in the cartridge housing 28.

[0032] The cartridge housing 28 disclosed herein is formed from a base 68 joined to a cover 70. The base 68 includes the cartridge housing bottom wall 32 and a lower portion 72 of the periphery wall 34. Ribs 74 spaced along the lower portion 72 of the periphery wall 34 include guide holes 76. Each guide hole 76 is formed in the free end of each rib 74 adjacent the free edge of the periphery wall lower portion 72 for receiving guide pins 78 extending from the cover 70. A pair of catches 80 are formed in an outwardly facing surface 82 of the periphery wall lower portion 72 for engaging latches 84 extending from the cover 70 to lock the base 68 and cover 70 together.

[0033] Drive shaft openings 86 formed in the bottom wall 32 receive drive shafts 92, 96, 100 therethrough for driving an ink ribbon supply spool 48, ink ribbon take up spool 40, and a label media drive roller 46 rotatably mounted in the cartridge housing 28. A circular recess 88 is formed around each drive shaft opening 86 in the inwardly facing surface 90 of the bottom wall 32. Each recess 88 receives a drag washer 95 for inducing drag during rotation of the ink ribbon supply spool 48, ink ribbon take up spool 40, and the label media drive roller 46. A smaller opening 99 formed through the bottom wall 32 adjacent the periphery wall lower portion 72 receives one end of a pivot shaft 103 forming part of the yoke 42 supporting the label media 14.

[0034] The cover 70 includes the cartridge housing top wall 30 and an upper portion 104 of the periphery wall 34. Cover ribs 106 spaced along the upper portion 104 of the periphery wall 34 are aligned with the base ribs 74 and include the guide pins 78 received in the guide holes 76 formed in the base ribs 74. Each guide pin 78 extends from each cover rib 106 adjacent the free edge of the periphery wall upper portion 104. The pair of latches 84 extend from the free edge of the periphery wall upper portion 104 for engaging the catches 80 formed in the base 68. An inwardly extending boss 108 formed in the cartridge housing top wall 30 receives the other end of the pivot shaft 103 forming part of the yoke 42.

[0035] First, second, and third cylindrical support columns 110, 112, 114 extend inwardly from the cartridge housing top wall 30. Each support column 110, 112, 114 rotatably supports either the ink ribbon supply spool 48, ink ribbon take up spool 40, or the label media drive roller 46. A coil spring 116 wrapped around each support column 110, 112, 114 urges the respective spool 48, 40 and label media drive roller 46 toward the cartridge housing bottom wall 32 and into engagement with a drag washer 95 received in the respective recess 88.

[0036] Unused ink ribbon 16 is housed in the cartridge housing 28 on the ink ribbon supply spool 48 and, once the ink ribbon 16 travels past the print head 22, is wound onto the ink ribbon take up spool 40. The ink ribbon supply and take up spools 48, 40 are both rotatably supported in the cartridge housing 28 on the second and third columns 112, 114, respectively. The ink ribbon take up and supply spools 40, 48 are selectively rotatably driven by an ink ribbon rewind shaft 100 and ink ribbon unwind shaft 96, respectively,

which form part of a drive mechanism to maintain tension in the ink ribbon 16 in the forward and reverse feed directions.

[0037] The ink ribbon supply spool 48 is rotatably mounted on the second support column 112 between the cartridge housing top and bottom walls 30, 32, and has a roll of ink ribbon 16 wound thereon. In the forward feed direction, the ink ribbon 16 unwinds from the ink ribbon supply spool 48 and passes out of the cartridge 12 with the label media 14 through the printing area 38 between the print head 22 and platen roller 24. The print head 22 engages the ink ribbon 16 to transfer ink on the ink ribbon 16 onto the label media 14. Once the ink has been transferred, the ink ribbon 16 reenters the cartridge 12, and is wound onto the ink ribbon take up spool 40 supported between the top and bottom walls 30, 32.

[0038] The ink ribbon take up spool 40 is rotatably mounted on the third support column 114 between the cartridge housing top and bottom walls 30, 32, and, as described above, winds used ink ribbon 16 thereon in the forward feed direction. In the reverse feed direction, the ink ribbon 16 unwinds from the ink ribbon take up spool 40 and passes out of the cartridge 12 through the printing area 38 between the print head 22 and platen roller 24, and is wound onto the ink ribbon supply spool 48.

[0039] The label media drive roller 46 is rotatably mounted on the first support column 110 between the cartridge housing top and bottom walls 30, 32, and engages the label media 14 to define the beginning of the label media path. The beginning of the label media path is defined as the point of contact between the label media drive roller 46 and the label media 14 on the roll supported by the yoke 42. Preferably, the label media drive

roller 46 is rubber coated, and in a forward feed direction provides a constant tension in the label media 14 between the label media drive roller 46 and the print head 22 and platen roller 24. In a reverse feed direction, a label media drive shaft 92 forming part of the drive mechanism drives the label media drive roller 46 to maintain tension in the label media 14 between the label media drive roller 46 and platen roller 24 and print head 22.

[0040] Each drag washer 95 is received in one of the circular recesses 88 formed around each drive shaft opening 86 of the cartridge housing 28, and frictionally engages one of the ink ribbon supply spool 48, take up spools 40, and label media drive roller 46 to induce a drag, or torque level, on the rotating spools 48, 40 and roller 46 in order to maintain tension in the label media 14 and ink ribbon 16. The coil springs 116 urge the spools 48, 40 and roller 46 against the drag washers 95 to provide the desired drag. The drag can be adjusted to a desired level using methods known in the art, such as texturing the washers, changing the spring constant of the coil springs, and the like, without departing from the scope of the invention. Of course, other methods for inducing drag can be used, such as introducing a drag in the spools and roller through the drive mechanism, frictionally engaging the spools and/or roller with the cartridge, a spring, or other structure, without departing from the scope of the invention.

[0041] The label media 14 engaging the label media drive roller 46 is housed in the cartridge housing 28 in the form of a roll rotatably mounted on the yoke 42. Advantageously, in the embodiment disclosed herein, the yoke 42 is pivotally mounted to maintain a consistent beginning of the label media path as the diameter of the roll of label media 14 decreases. The yoke 42 pivots so that the label media drive roller 46 engages

the roll of label media 14 at a point of tangency to the outside diameter of the roll of label media 14 to provide a constant beginning of the label media path regardless of the roll diameter.

[0042] As shown in Figs. 5-14, the yoke 42 disclosed herein includes first and second label media guides 118, 120 joined by the pivot shaft 103 and label media supply shaft 122. Each end of the pivot shaft 103 is received in either the boss 108 formed in the cartridge housing top wall 30 or the opening 99 formed in the cartridge housing bottom wall 32 to pivotally mount the yoke 42 in the cartridge housing 28. The label media supply shaft 122 mounts the roll of label media 14, either alone, or on a core 123. Advantageously, the label media guides 118, 120 square the label media 14 relative to the cartridge exit slot 29 to prevent the label media 14 from jamming as it exits the cartridge housing 28.

[0043] Preferably, the first label media guide 118 is fixed to, or formed as an integral part of, one end of the pivot shaft 103 and label media supply shaft 122. The second label media guide 120 includes a pivot shaft opening 124 for slidably receiving the pivot shaft 103 and a label media supply shaft opening 126 for slidably receiving the label media supply shaft 122. Advantageously, the second label media guide 120 is slidable along the pivot shaft 103 and label media supply shaft 122 to accommodate rolls of label media 14 having different widths.

[0044] The second label media guide 120 disclosed herein is positionable at a plurality of preset positions for accommodating rolls of label media 14 of predetermined widths. Although providing a yoke 42 having preset positions defining different widths is

preferred, a yoke having infinite adjustability for accommodating any label media width between a minimum and a maximum, such as by sizing the pivot shaft and/or label media supply shaft to frictionally engage the pivot shaft opening and/or label media supply shaft opening, respectively, can be provided without departing from the scope of the invention.

[0045] In the embodiment shown in Figs. 9-14, the preset positions are defined by notches 128 formed in the pivot shaft 103 and label media supply shaft 122. Latches 130 extending from the second label media guide 120 toward the first label media guide 118 engage the notches 128 to fix the second label media guide 120 relative to the first label media guide 118 at the desired preset position. Advantageously, this arrangement simplifies assembly of the cartridge 12 and minimizes the number of parts necessary for different widths of label media 14 because the same yoke 42 can be used to accommodate different label media widths.

[0046] The yoke 42 is pivotally biased by a torsion spring 44 toward the label media drive roller 46 rotatably mounted between the cartridge housing top and bottom walls 30, 32. The torsion spring 44 is wrapped around the pivot shaft 103, and has one end 132 engaging the first label media guide 118 and an opposing end 134 engaging the cartridge housing periphery wall 34 to urge the yoke 42, and thus the roll of label media 14, toward the label media drive roller 46. Advantageously, the torsion spring 44 maintains the label media drive roller 46 in contact with the roll of label media 14 as the diameter of the roll of label media 14 decreases during use. Although a torsion spring is disclosed, any biasing means for biasing the yoke toward the label media drive roller, such as leaf

springs, coil springs, elastomeric members, resilient media guides, or arms, and the like, can be used without departing from the scope of the invention.

[0047] Referring back to Figs. 1-5, the cartridge 12 is received in the cartridge receptacle 18 housed in the printer housing 2. The printer housing 2 is, preferably, formed from at least two portions 50, 52, and houses printer components, such as the cartridge receptacle 18, the keyboard 4, display 6, the cutter mechanism 26, a printed circuit board 54 having printer circuitry, and the like. The opening 8 formed in the housing top portion 50 provides access to the cartridge receptacle 18 for insertion of the cartridge 12 into the cartridge receptacle 18. A slot 56 formed in the housing 2 adjacent the cutter mechanism 26 provides an exit for label media 14 which has passed through the cutter mechanism 26.

[0048] Referring to Figs. 2 and 5 -9, the cartridge receptacle 18 has a periphery wall 58 generally shaped to conform with the cartridge periphery wall 34, and a bottom wall 60 that supports the cartridge 12 therein. The cartridge receptacle periphery wall 58 surrounds the printer mechanism assembly 20 which is fixed in the printer housing 2 relative to the cartridge receptacle 18.

[0049] The printer mechanism assembly 20 fixed relative to the cartridge receptacle 18 in the printer housing 2 includes the pivotable print head 22 and stationary platen roller 24. The print head 22 cooperates with the ink ribbon 16 and the label media 14 such that the print head 22 can print characters or symbols on the label media 14. This is described in greater detail in U.S. Patent No. 5,078,523 which is incorporated herein by reference. The platen roller 24 also forms part of the drive mechanism.

[0050] The drive mechanism drives the label media 14 and ink ribbon 16 past the print head 22, and includes the platen roller drive shaft 62, label media drive shaft 92, ink ribbon rewind drive shaft 100, and ink ribbon unwind drive shaft 96. The drive mechanism selectively drives the rollers 24, 46 and spools 40, 48 to drive and tension the label media 14 and ink ribbon 16 in the forward and reverse feed directions. Preferably, the platen roller 24, label media drive roller 46, ink ribbon supply spool 48, and ink ribbon take up spool 40 are all rotatably driven by a dual feed direction drive mechanism mounted to the bottom of the cartridge receptacle 18, such as disclosed in a copending U.S. Patent Application and designated by Attorney Docket No. 180825.00004. Although the drive mechanism disclosed in the copending patent application is preferred, any drive mechanism known in the art that can feed the label media and ink ribbon in one or more feed directions can be used without departing from the scope of the invention.

[0051] The label media 14 and ink ribbon 16 passing through the printing area 38 are advanced past the print head 22 in the forward feed direction and reverse feed direction by the platen roller 24 which maintains the ink ribbon 16 and label media 14 in close cooperation with the print head 22. The platen roller 24 is mounted on a platen roller drive shaft 62 which is rotatably mounted in the cartridge receptacle 18 by a bracket 66. The print head 22 is pivotally mounted relative to the platen roller 24 in the cartridge receptacle 18 to provide space between the print head 22 and platen roller 24 when threading the label media 14 and ink ribbon 16 therebetween.

[0052] As the label media 14 and ink ribbon 16 are driven in the forward and reverse feed directions by the platen roller 24, tension is maintained in the ink ribbon 16 and label

media 14 by the label media drive shaft 92, ink ribbon rewind drive shaft 100, and ink ribbon unwind drive shaft 96. The label media drive shaft 92, ink ribbon rewind drive shaft 100, and ink ribbon unwind drive shaft 96 are each received through one of the drive shaft openings 86 formed in the cartridge housing bottom wall 32 and into one of the first, second, and third support columns 110, 112, 114. The drive shafts 92, 96, 100 extend through the support columns 110, 112, 114, and engage inner surfaces 94, 98, 102 of, and rotatably drive, the label media drive roller 46, ink ribbon supply spool 48, and ink ribbon take up spool 40, respectively.

[0053] Referring to Figs. 1-14, in use, the cartridge 12 is inserted into the cartridge receptacle 18 with the label media drive shaft 92 received in the label media drive roller 46, the ink ribbon unwind drive shaft 96 received in the ink ribbon supply spool 48, and the ink ribbon rewind drive shaft 100 received in the ink ribbon take up spool 40 to properly position the cartridge 12 in the cartridge receptacle 18 and thread the label media 14 and ink ribbon 16 between the platen roller 24 and print head 22. The print head 22 is then urged toward the platen roller 24 to sandwich the label media 14 and ink ribbon 16 therebetween.

[0054] Once the cartridge 12 is locked in place, the printer 10 is ready to produce printed labels. When printing on the labels, the label media 14 and ink ribbon 16 are fed past the platen roller 24 and print head 22 by the platen roller 24 in the forward feed direction by driving the platen roller 24 in a first direction of rotation. The ink ribbon take up spool 40 is rotatably driven in the first direction of rotation to take up the used ink ribbon 16 fed past the print head 22 and maintain tension in the ink ribbon 16. The label

media drive roller 46 and ink ribbon supply spool 48 are not rotatably driven. The drag induced on the label media drive roller 46 and ink ribbon supply spool 48 by the drag washers 95 creates a tension in the label media 14 and ink ribbon 16 to prevent jams.

[0055] When a desired character is input by an operator or other means, the printer circuitry of the printer 10 energizes pixels on the print head 22 as the label media 14 and ink ribbon 16 advance past the print head 22. The head pixels are variously energized to imprint the character on the label media 14. This is described in greater detail in U.S. Patent No. 5,078,523 which has been incorporated herein by reference.

[0056] As label media 14 is unwound from the roll of label media 14, the diameter of the roll of label media 14 is reduced. Advantageously, the yoke 42 pivots about the pivot axis defined by the pivot shaft 103 in the cartridge housing 28 to maintain the label media in contact with the label media drive roller 46 and define the consistent beginning of the label media path from the roll of label media 14.

[0057] When a label has been printed, the platen roller 24 continues to drive the label media 14 and ink ribbon 16 in the forward feed direction to advance the label for removal by the user, such as by cutting the label media 14 using the cutter mechanism 26. Once the portion of the label media 14 containing the printed label is removed, the remaining label media 14 and ink ribbon 16 are fed in the reverse feed direction by the platen roller 24 to position the next available label in position for printing without wasting the label media 14 and ink ribbon 16.

[0058] The label media 14 and ink ribbon 16 are fed past the platen roller 24 and print head 22 in the reverse feed direction by driving the platen roller 24, label media

drive roller 46, and ink ribbon supply spool 48 in a second direction of rotation. The platen roller 24 drives the label media 14 and ink ribbon 16 past the print head 22 while the ink ribbon 16 is wound onto the ink ribbon supply spool 48 and the label media 14 is urged onto the roll by the label media drive roller 46. The pixels on the print head 22, however, remain deenergized to avoid printing on the label as it is being repositioned for printing. The ink ribbon take up spool 40 is not rotatably driven, and the drag induced on the ink ribbon take up spool 40 by the drag washer 95 creates a tension in the ink ribbon 16 to prevent jams.

[0059] While there has been shown and described what is at present considered the preferred embodiment of the invention, it will be obvious to those skilled in the art that various changes and modifications can be made therein without departing from the scope of the invention defined by the appended claims. For example, the cartridge disclosed herein is for use with a roll of label media, however, any type of media in a roll and useable in a printer can be used without departing from the scope of the invention.

CLAIMS

We claim:

1. A printer cartridge for housing a roll of label media and dispensing the label media from the cartridge, said cartridge comprising:
 - a housing having a top wall and a bottom wall;
 - a yoke pivotally mounted between said top and bottom walls for pivotal movement about a pivot axis, and including a label media supply shaft for holding a roll of label media, said label media supply shaft having a longitudinal axis spaced from and parallel to said pivot axis;
 - a label media drive roller rotatably mounted between said top and bottom walls and engageable with the roll of label media; and
 - a biasing means for biasing said yoke toward said label media drive roller and maintaining the roll of label media in contact with said label media drive roller to define a beginning of a media path.
2. The printer cartridge as in claim 1, in which said yoke includes a media guide supporting one end of said label media supply shaft.
3. The printer cartridge as in claim 2, in which said media guide is axially movable relative to said label media supply shaft.

4. The printer cartridge as in claim 3, in which said media guide is positionable at any one of a plurality of preset positions relative to said media supply shaft.

5. The printer cartridge as in claim 2, in which said yoke includes a pivot shaft defining said pivot axis, and said media guide is axially movable relative to said pivot shaft.

6. The printer cartridge as in claim 5, in which said media guide is positionable at any one of a plurality of preset positions relative to said pivot shaft.

7. The printer cartridge as in claim 1, in which said biasing means is a torsion spring wrapped around said pivot axis.

8. The printer cartridge as in claim 1, including an ink ribbon supply spool and an ink ribbon take up spool supported between said top and bottom walls.

9. The printer cartridge as in claim 8, including a drag washer interposed between at least one end of at least one of said ink ribbon supply spool and said ink ribbon take up spool and at least one of said top and bottom walls.

10. The printer cartridge as in claim 8, including a roll of ink ribbon supported by said ink ribbon supply spool.

11. The printer cartridge as in claim 1, including a roll of label media supported by said label media supply shaft.

12. A printer cartridge for housing a roll of label media, said cartridge comprising:

a housing having a top wall and a bottom wall;
a yoke mounted between said top and bottom walls, and including at least
5 one media guide and a media supply shaft, said media supply shaft having opposing ends
and a longitudinal axis extending between said opposing ends, wherein said media guide
supports one end of said media supply shaft, and said media guide is axially movable
along said longitudinal axis for accommodating media having different widths.

13. The printer cartridge as in claim 12, in which said yoke includes a pivot
shaft for pivotally mounting said yoke between said top and bottom walls for pivotal
movement about a pivot axis.

14. The printer cartridge as in claim 13 in which a media drive roller is rotatably mounted between said top and bottom walls, and a biasing means urges said yoke toward said media drive roller for maintaining the roll of media in contact with said media drive roller to define a beginning of a media path.

15. The printer cartridge as in claim 12, in which said media guide is positionable at any one of a plurality of preset positions relative to said media supply shaft.

16. The printer cartridge as in claim 13, in which said media guide is axially movable relative to said pivot shaft.

17. The printer cartridge as in claim 16, in which said media guide is positionable at any one of a plurality of preset positions relative to said pivot shaft.

18. The printer cartridge as in claim 14, in which said biasing means is a torsion spring wrapped around said pivot axis.

19. The printer cartridge as in claim 12, including an ink ribbon supply spool and an ink ribbon take up spool supported between said top and bottom walls.

20. The printer cartridge as in claim 19, including a drag washer interposed between at least one end of at least one of said ink ribbon supply spool and said ink ribbon take up spool and at least one of said top and bottom walls.

21. The printer cartridge as in claim 19, including a roll of ink ribbon supported by said ink ribbon supply spool.

22. The printer cartridge as in claim 12, including a roll of media supported by said media supply shaft.

23. A printer cartridge for housing a roll of label media and dispensing the label media from the cartridge, said cartridge comprising:

- a housing having a top wall and a bottom wall;
- a yoke pivotally mounted between said top and bottom walls for pivotal movement about a pivot axis, and including at least one media guide and a media supply shaft, said media supply shaft for supporting a roll of media and having a longitudinal axis spaced from, and parallel to, said pivot axis, wherein said media guide supports one end of said label supply spool, and said media guide is axially movable along said longitudinal axis for accommodating media having different widths;
- a media drive roller rotatably mounted between said top and bottom walls, and engageable with the media; and
- a biasing means for biasing said yoke toward said media drive roller and maintaining the roll of media in contact with said media drive roller to define a beginning of a media path.

24. The printer cartridge as in claim 23, in which said media guide is axially movable relative to said label media supply shaft.

25. The printer cartridge as in claim 24, in which said media guide is positionable at any one of a plurality of preset positions relative to said media supply shaft.

26. The printer cartridge as in claim 23, in which said yoke includes a pivot shaft defining said pivot axis, and said media guide is positionable at any one of a plurality of preset positions relative to said pivot shaft.

27. The printer cartridge as in claim 23, in which said biasing means is a torsion spring wrapped around said pivot axis.


28. The printer cartridge as in claim 23, including an ink ribbon supply spool and an ink ribbon take up spool supported between said top and bottom walls.

29. The printer cartridge as in claim 28, including a drag washer interposed between at least one end of at least one of said ink ribbon supply spool and said ink ribbon take up spool and at least one of said top and bottom walls.

30. The printer cartridge as in claim 28, including a roll of ink ribbon supported by said ink ribbon supply spool.

31. The printer cartridge as in claim 23, including a roll of media supported by said media supply shaft.

1 / 8

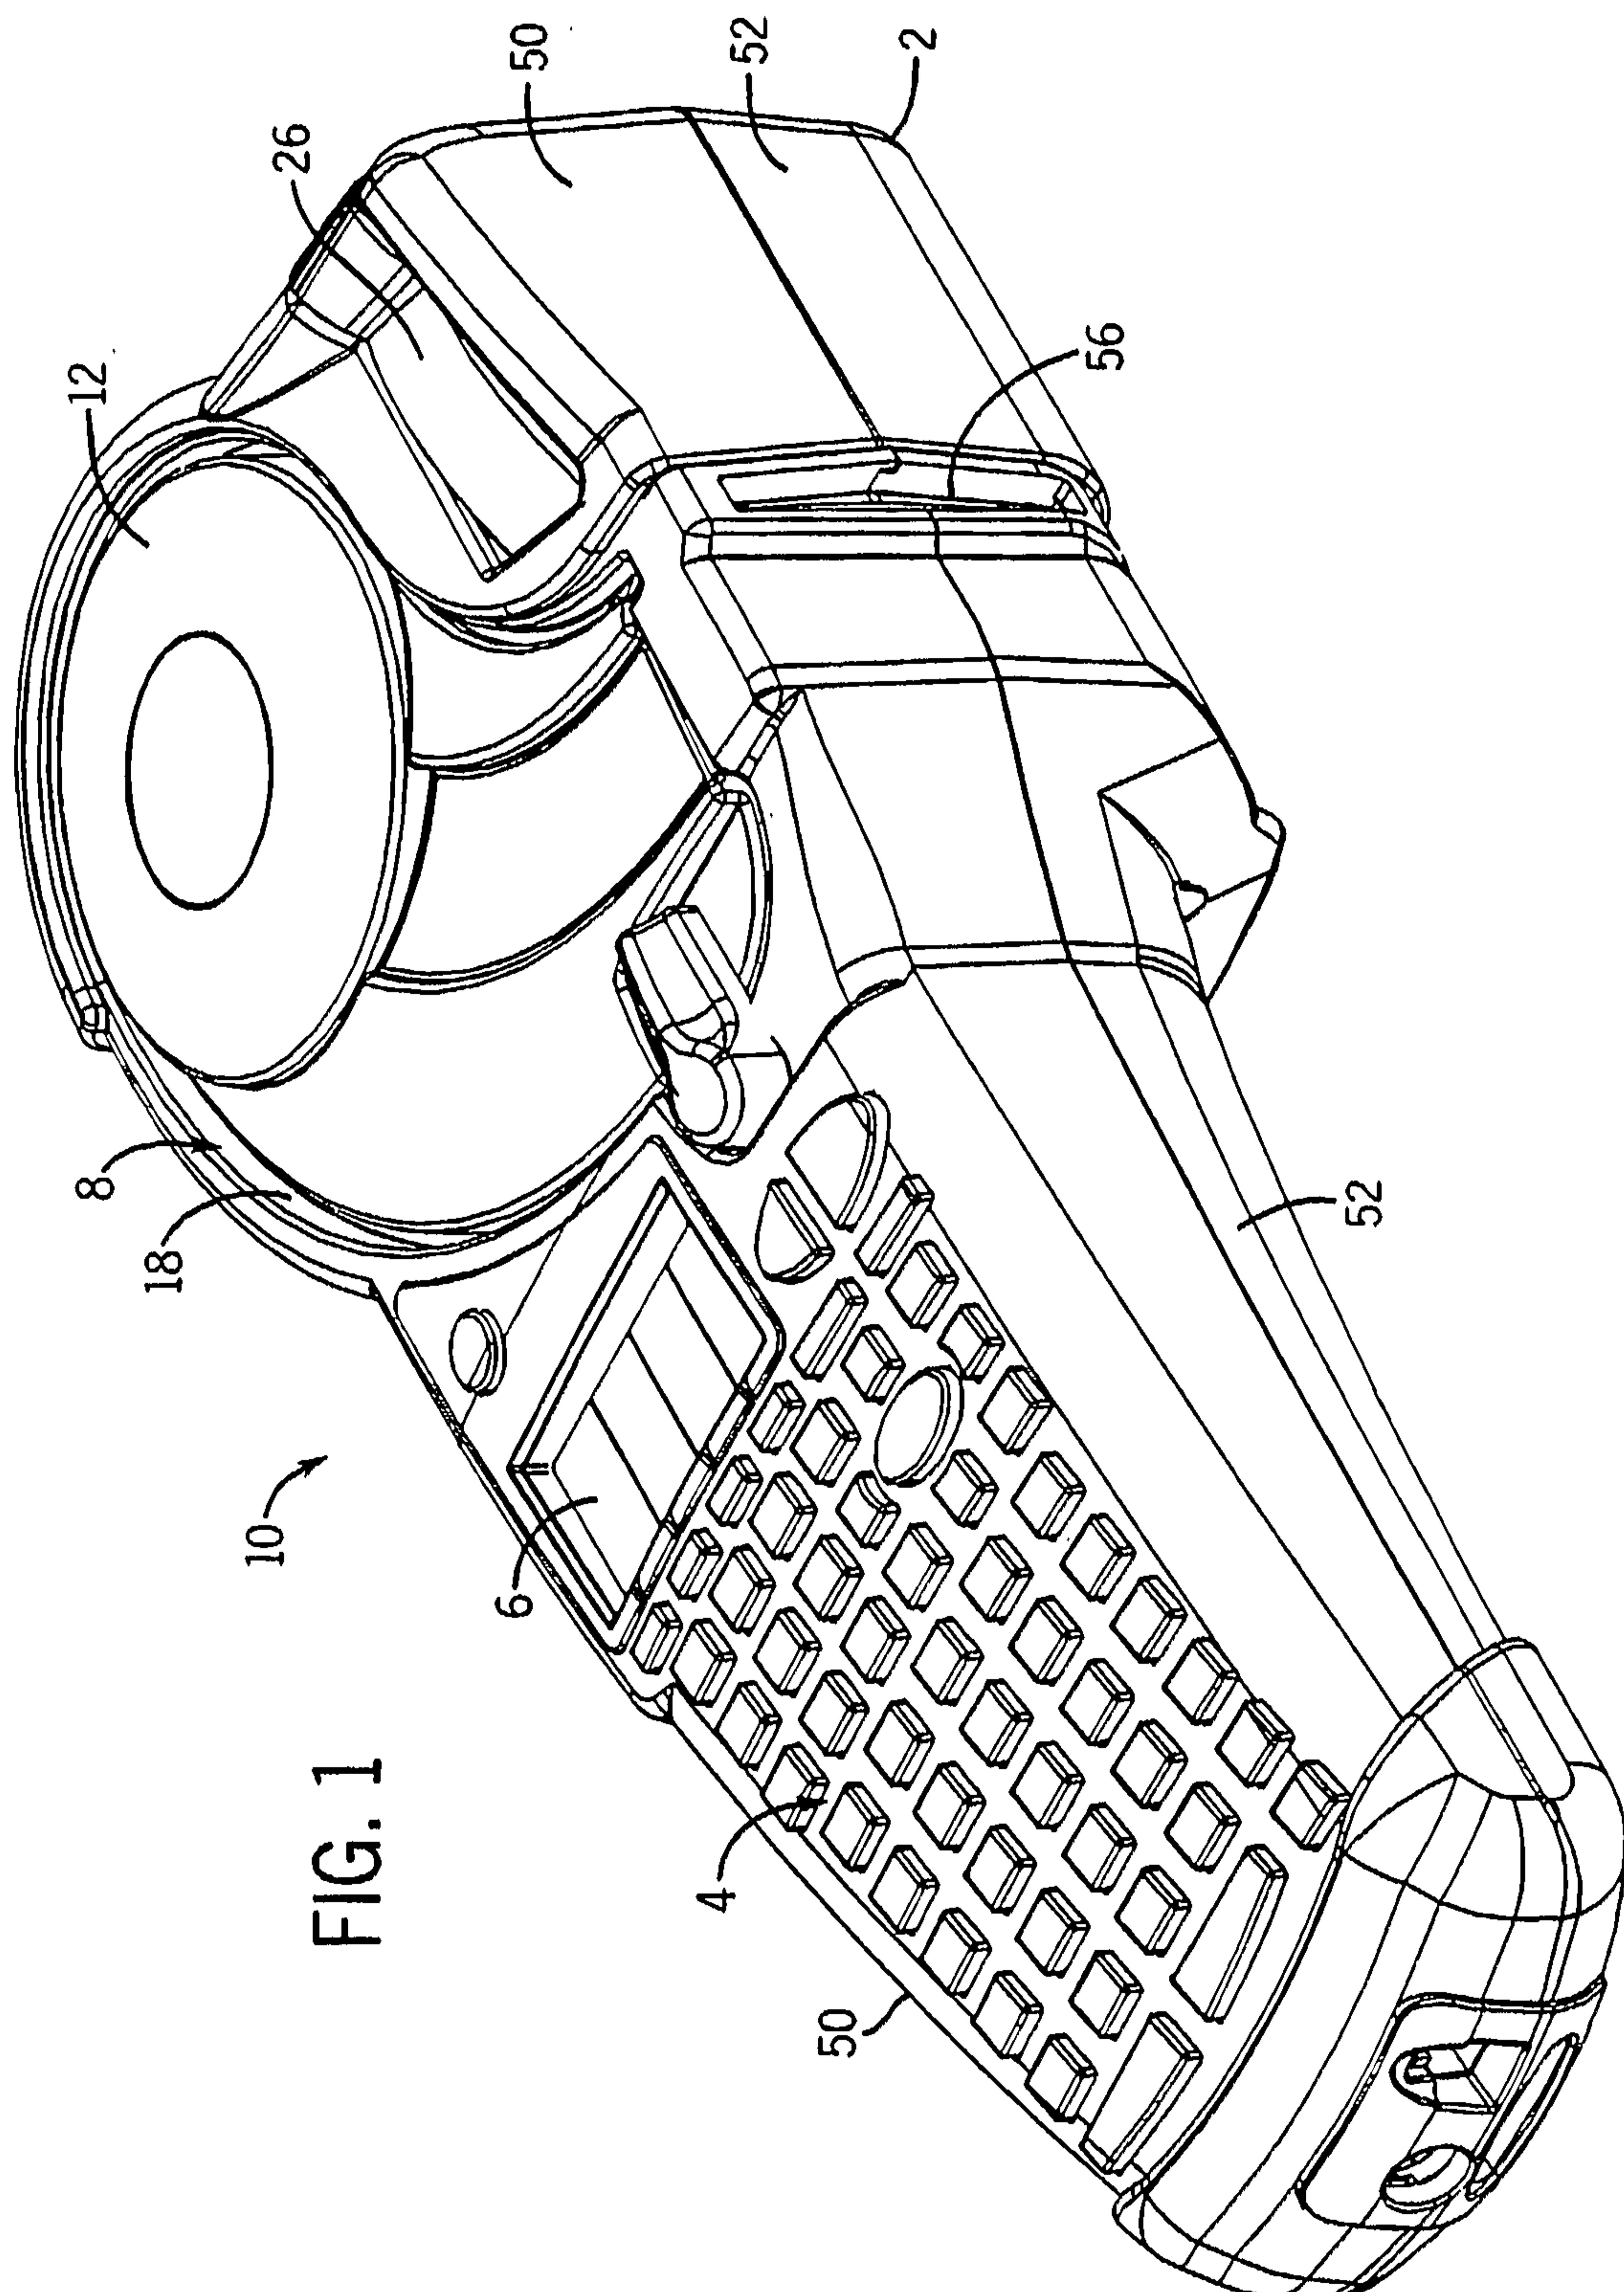

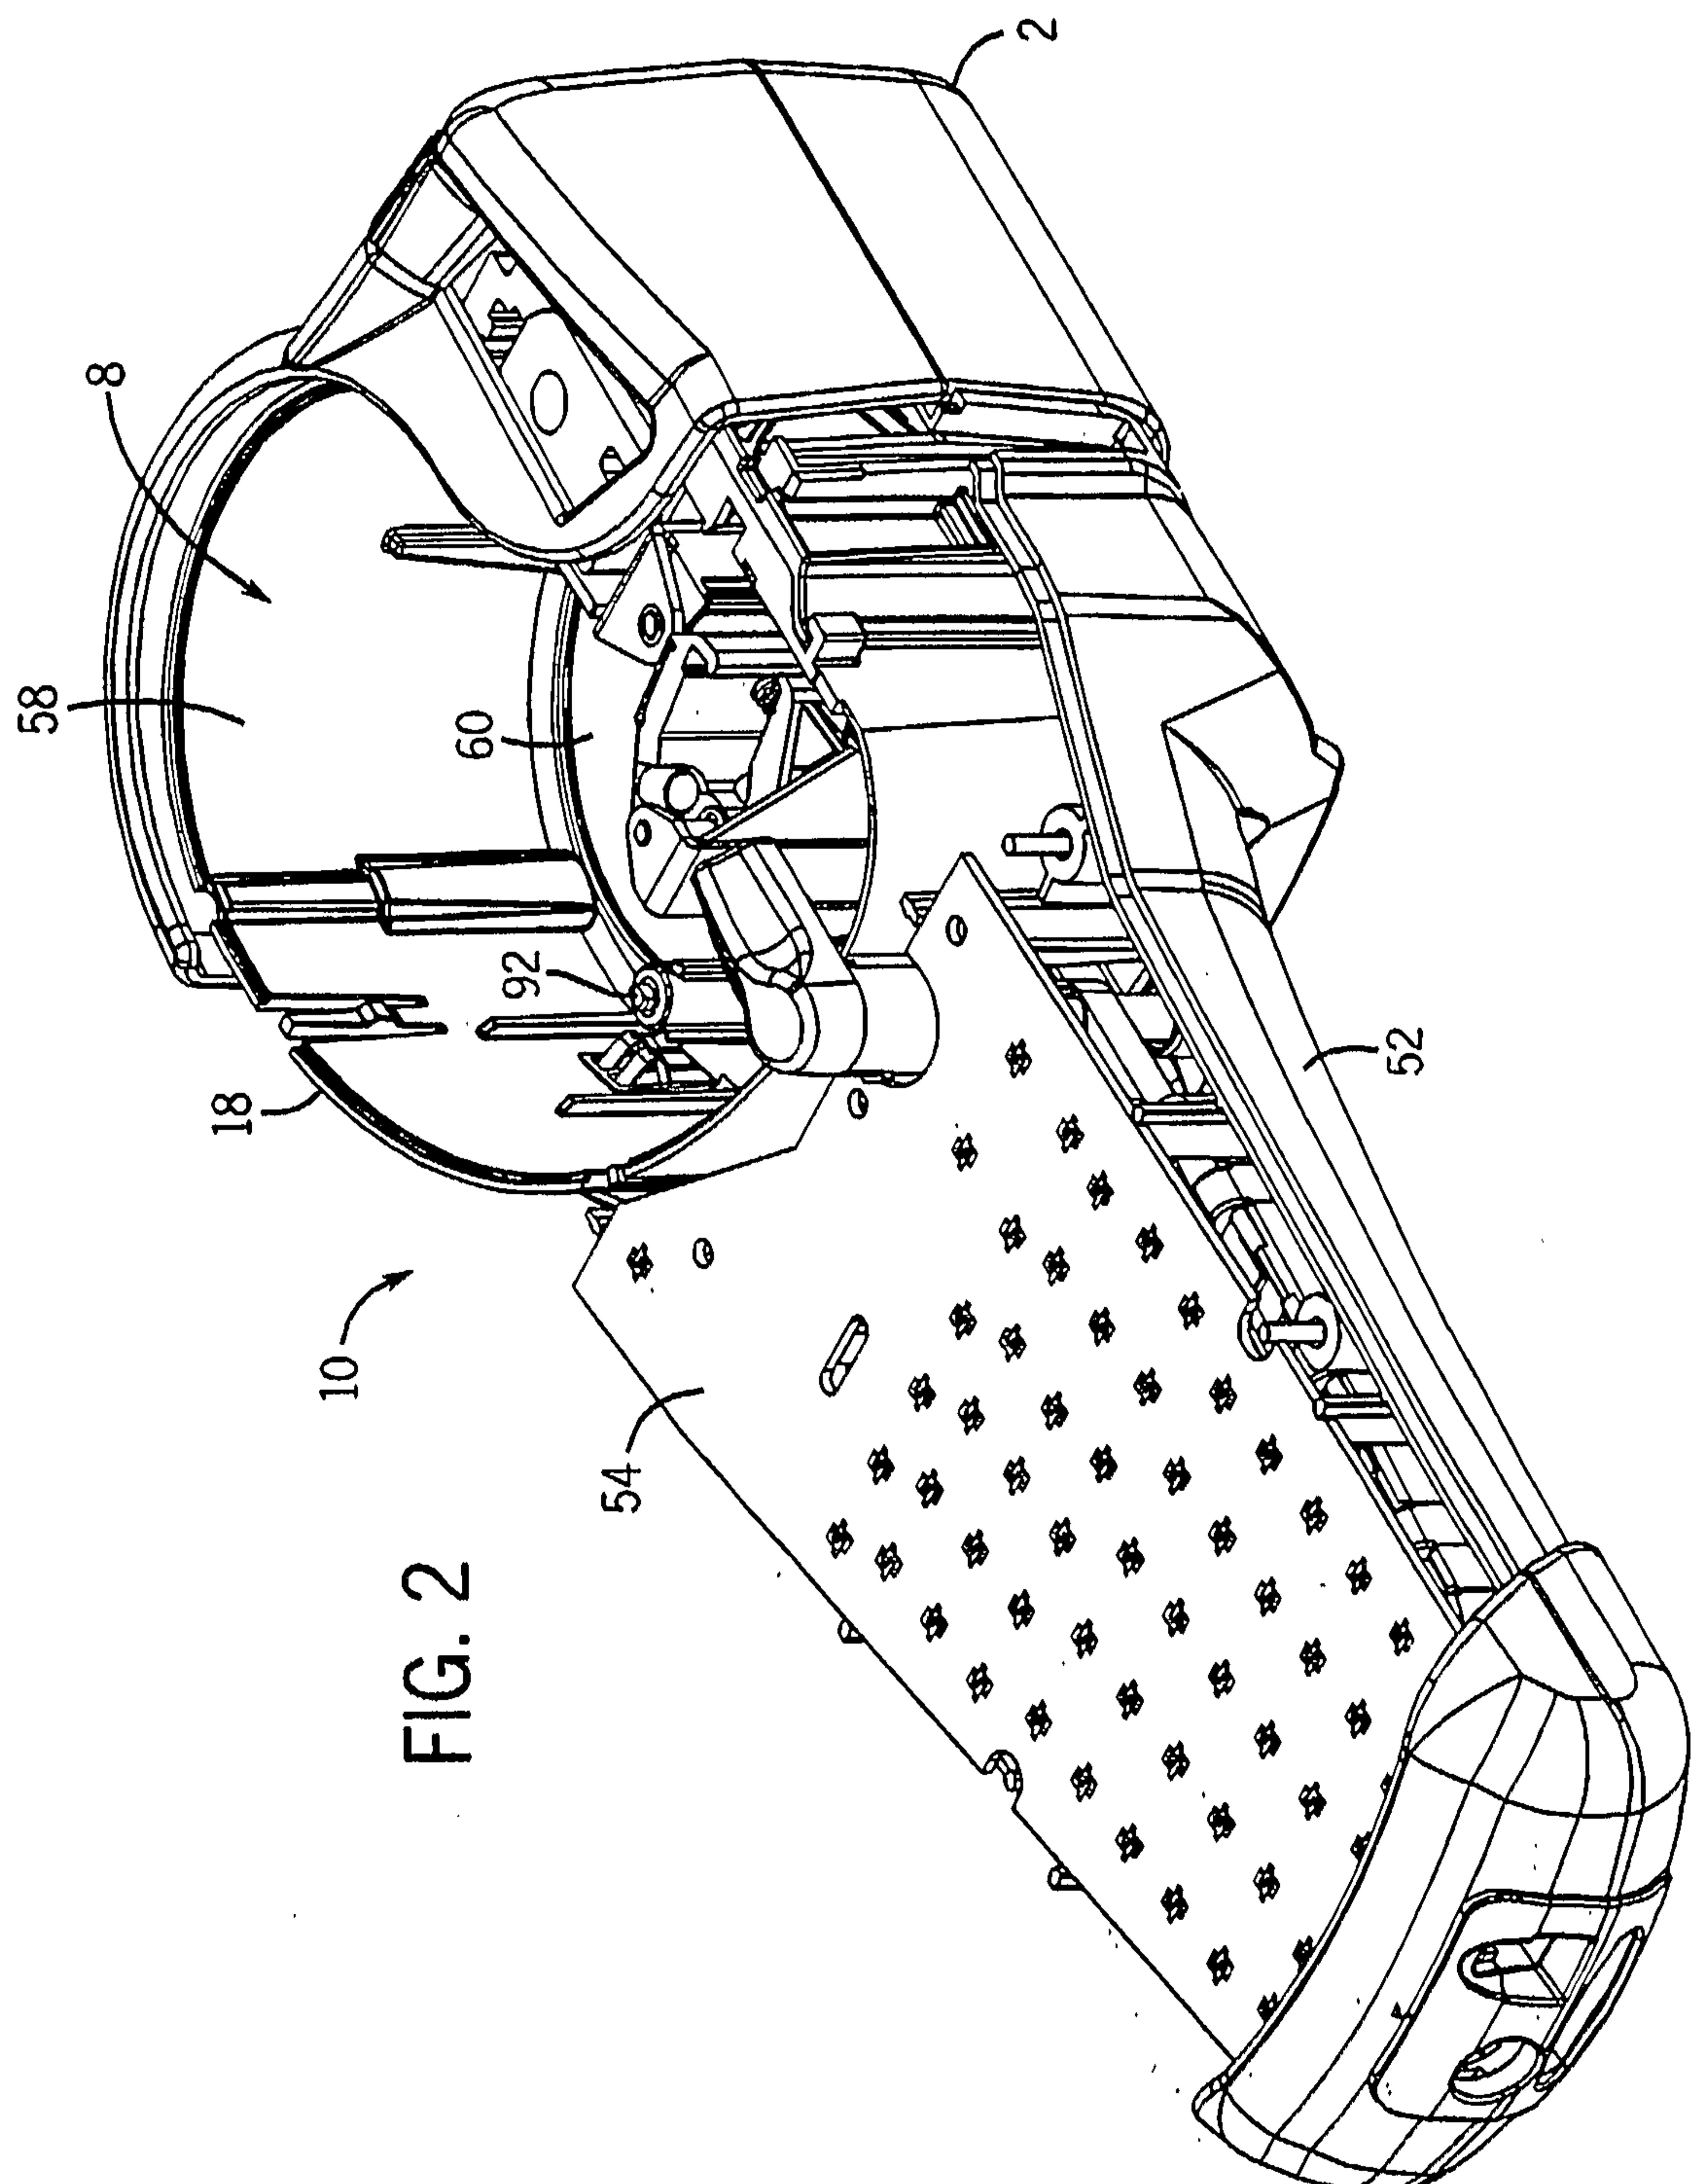


FIG. 3

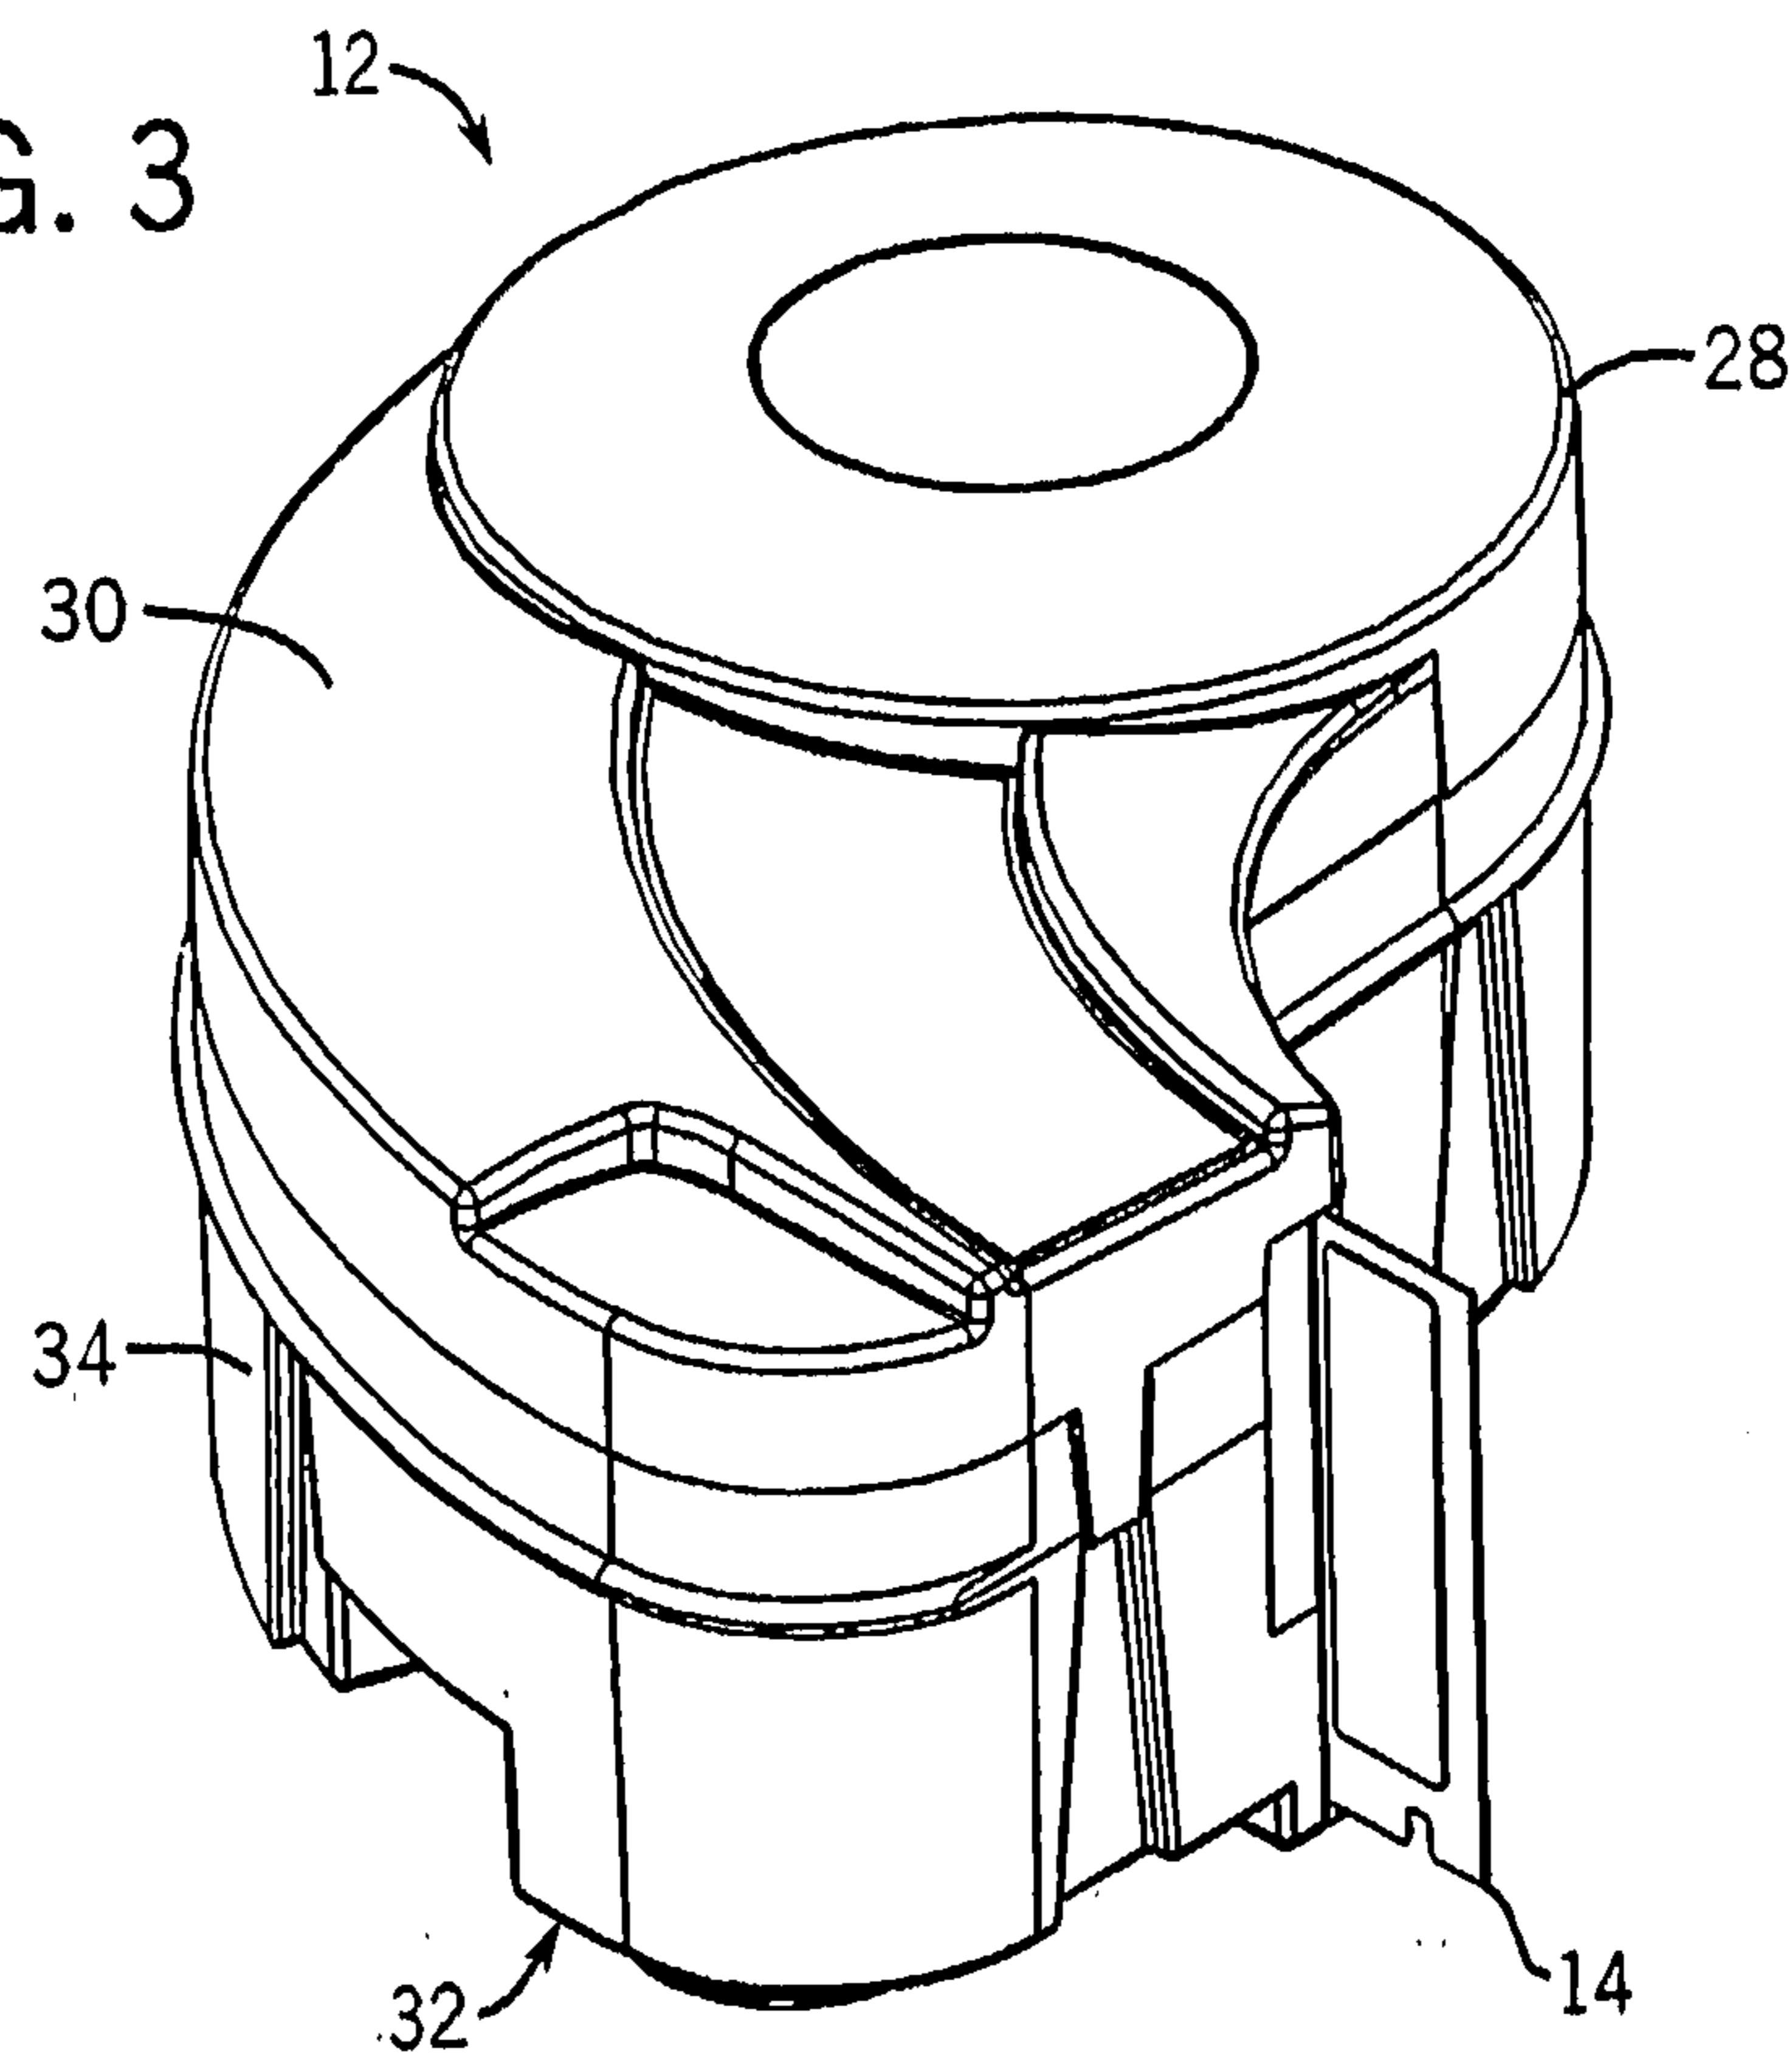


FIG. 4


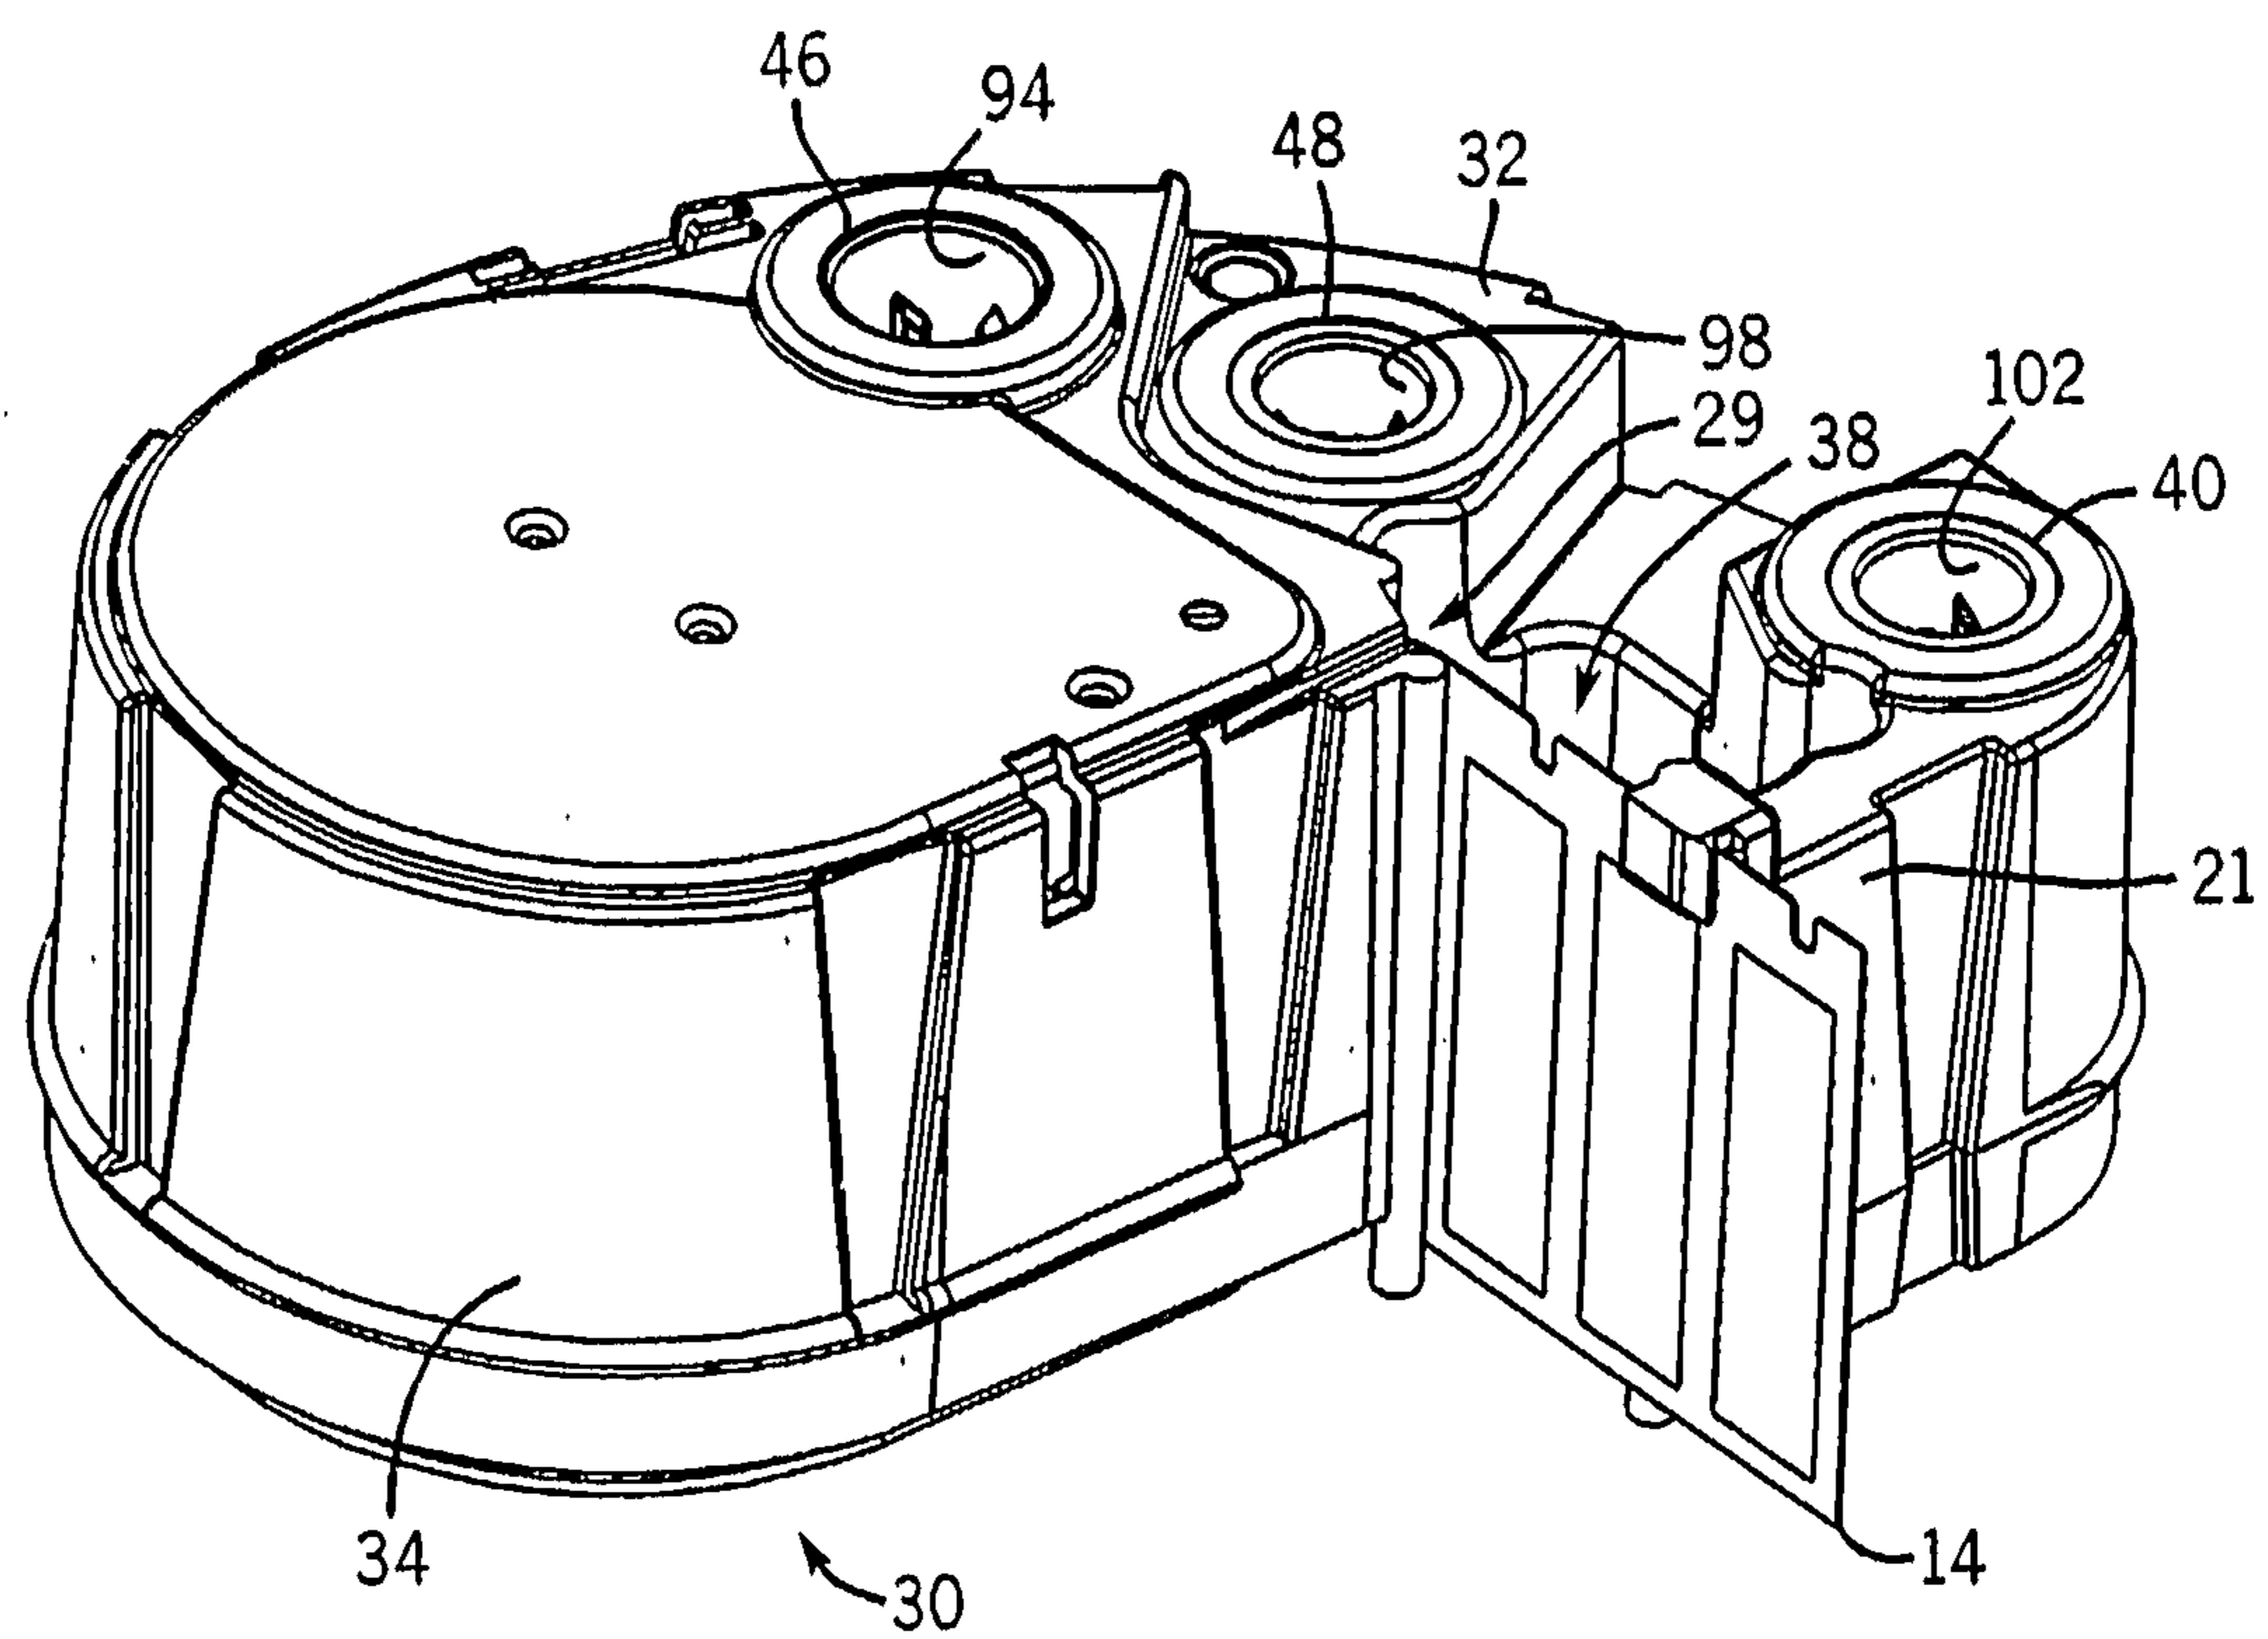


FIG. 5

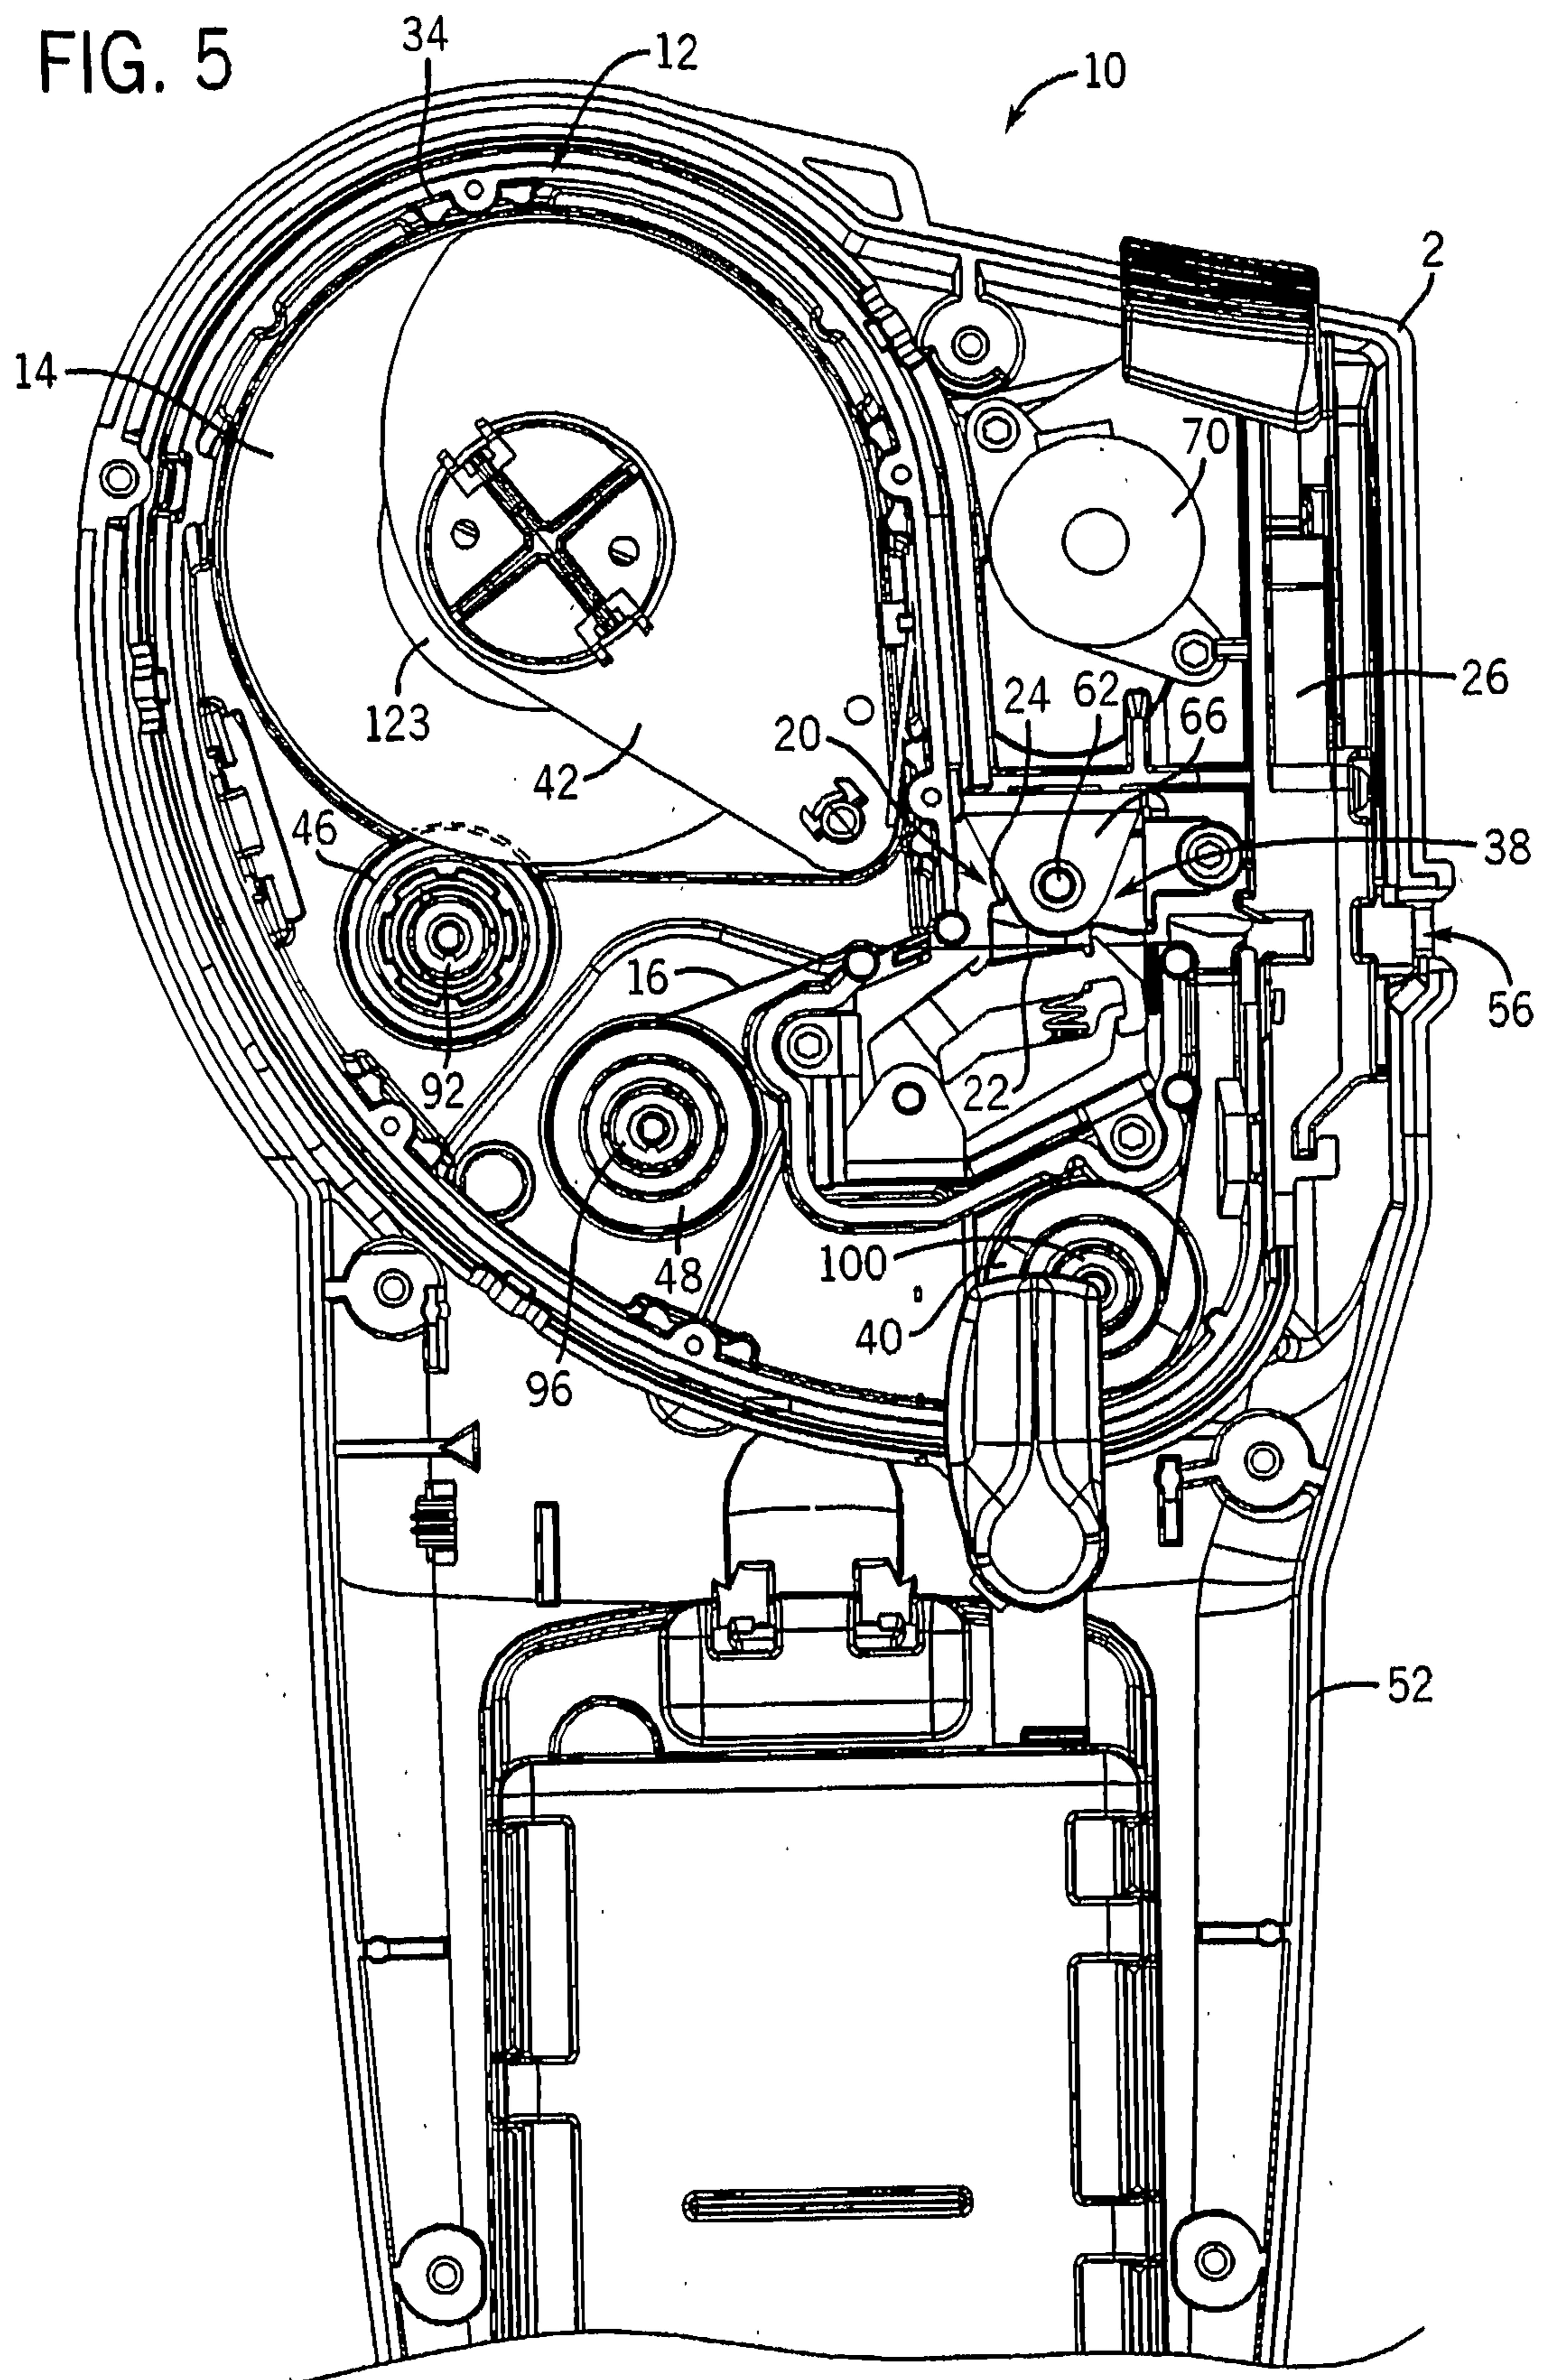

5 / 8

FIG. 6


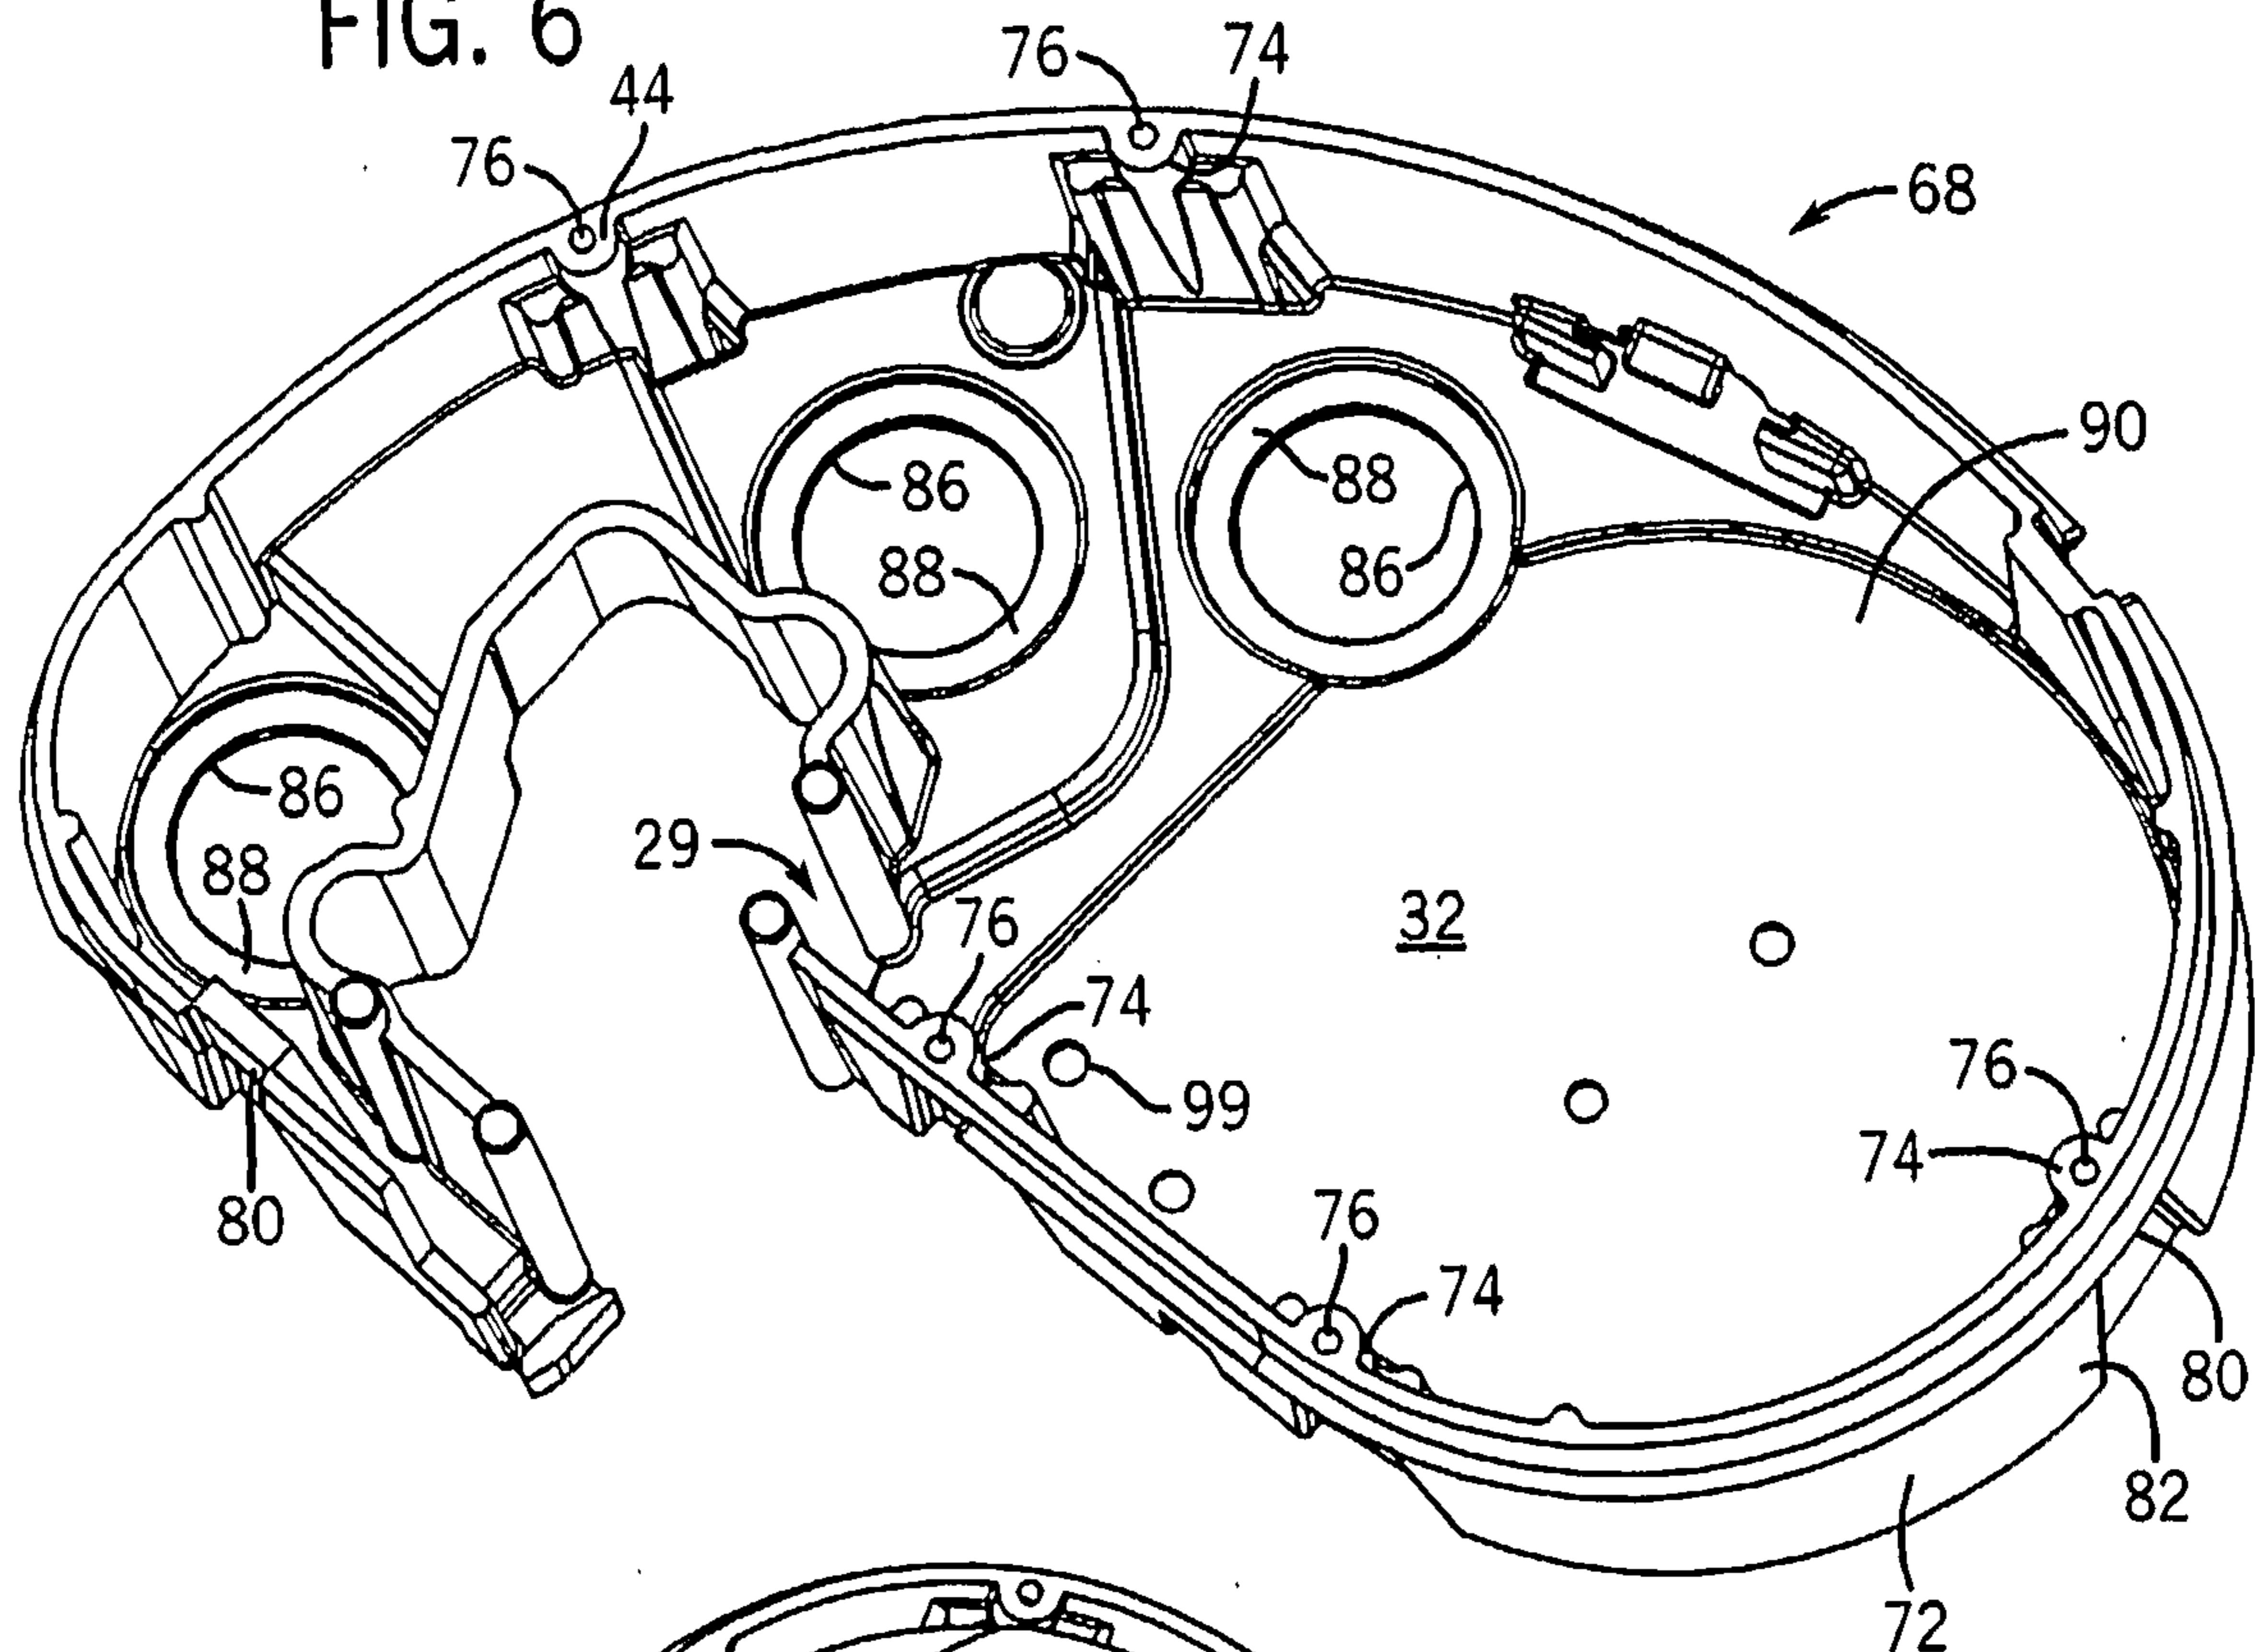


FIG. 7

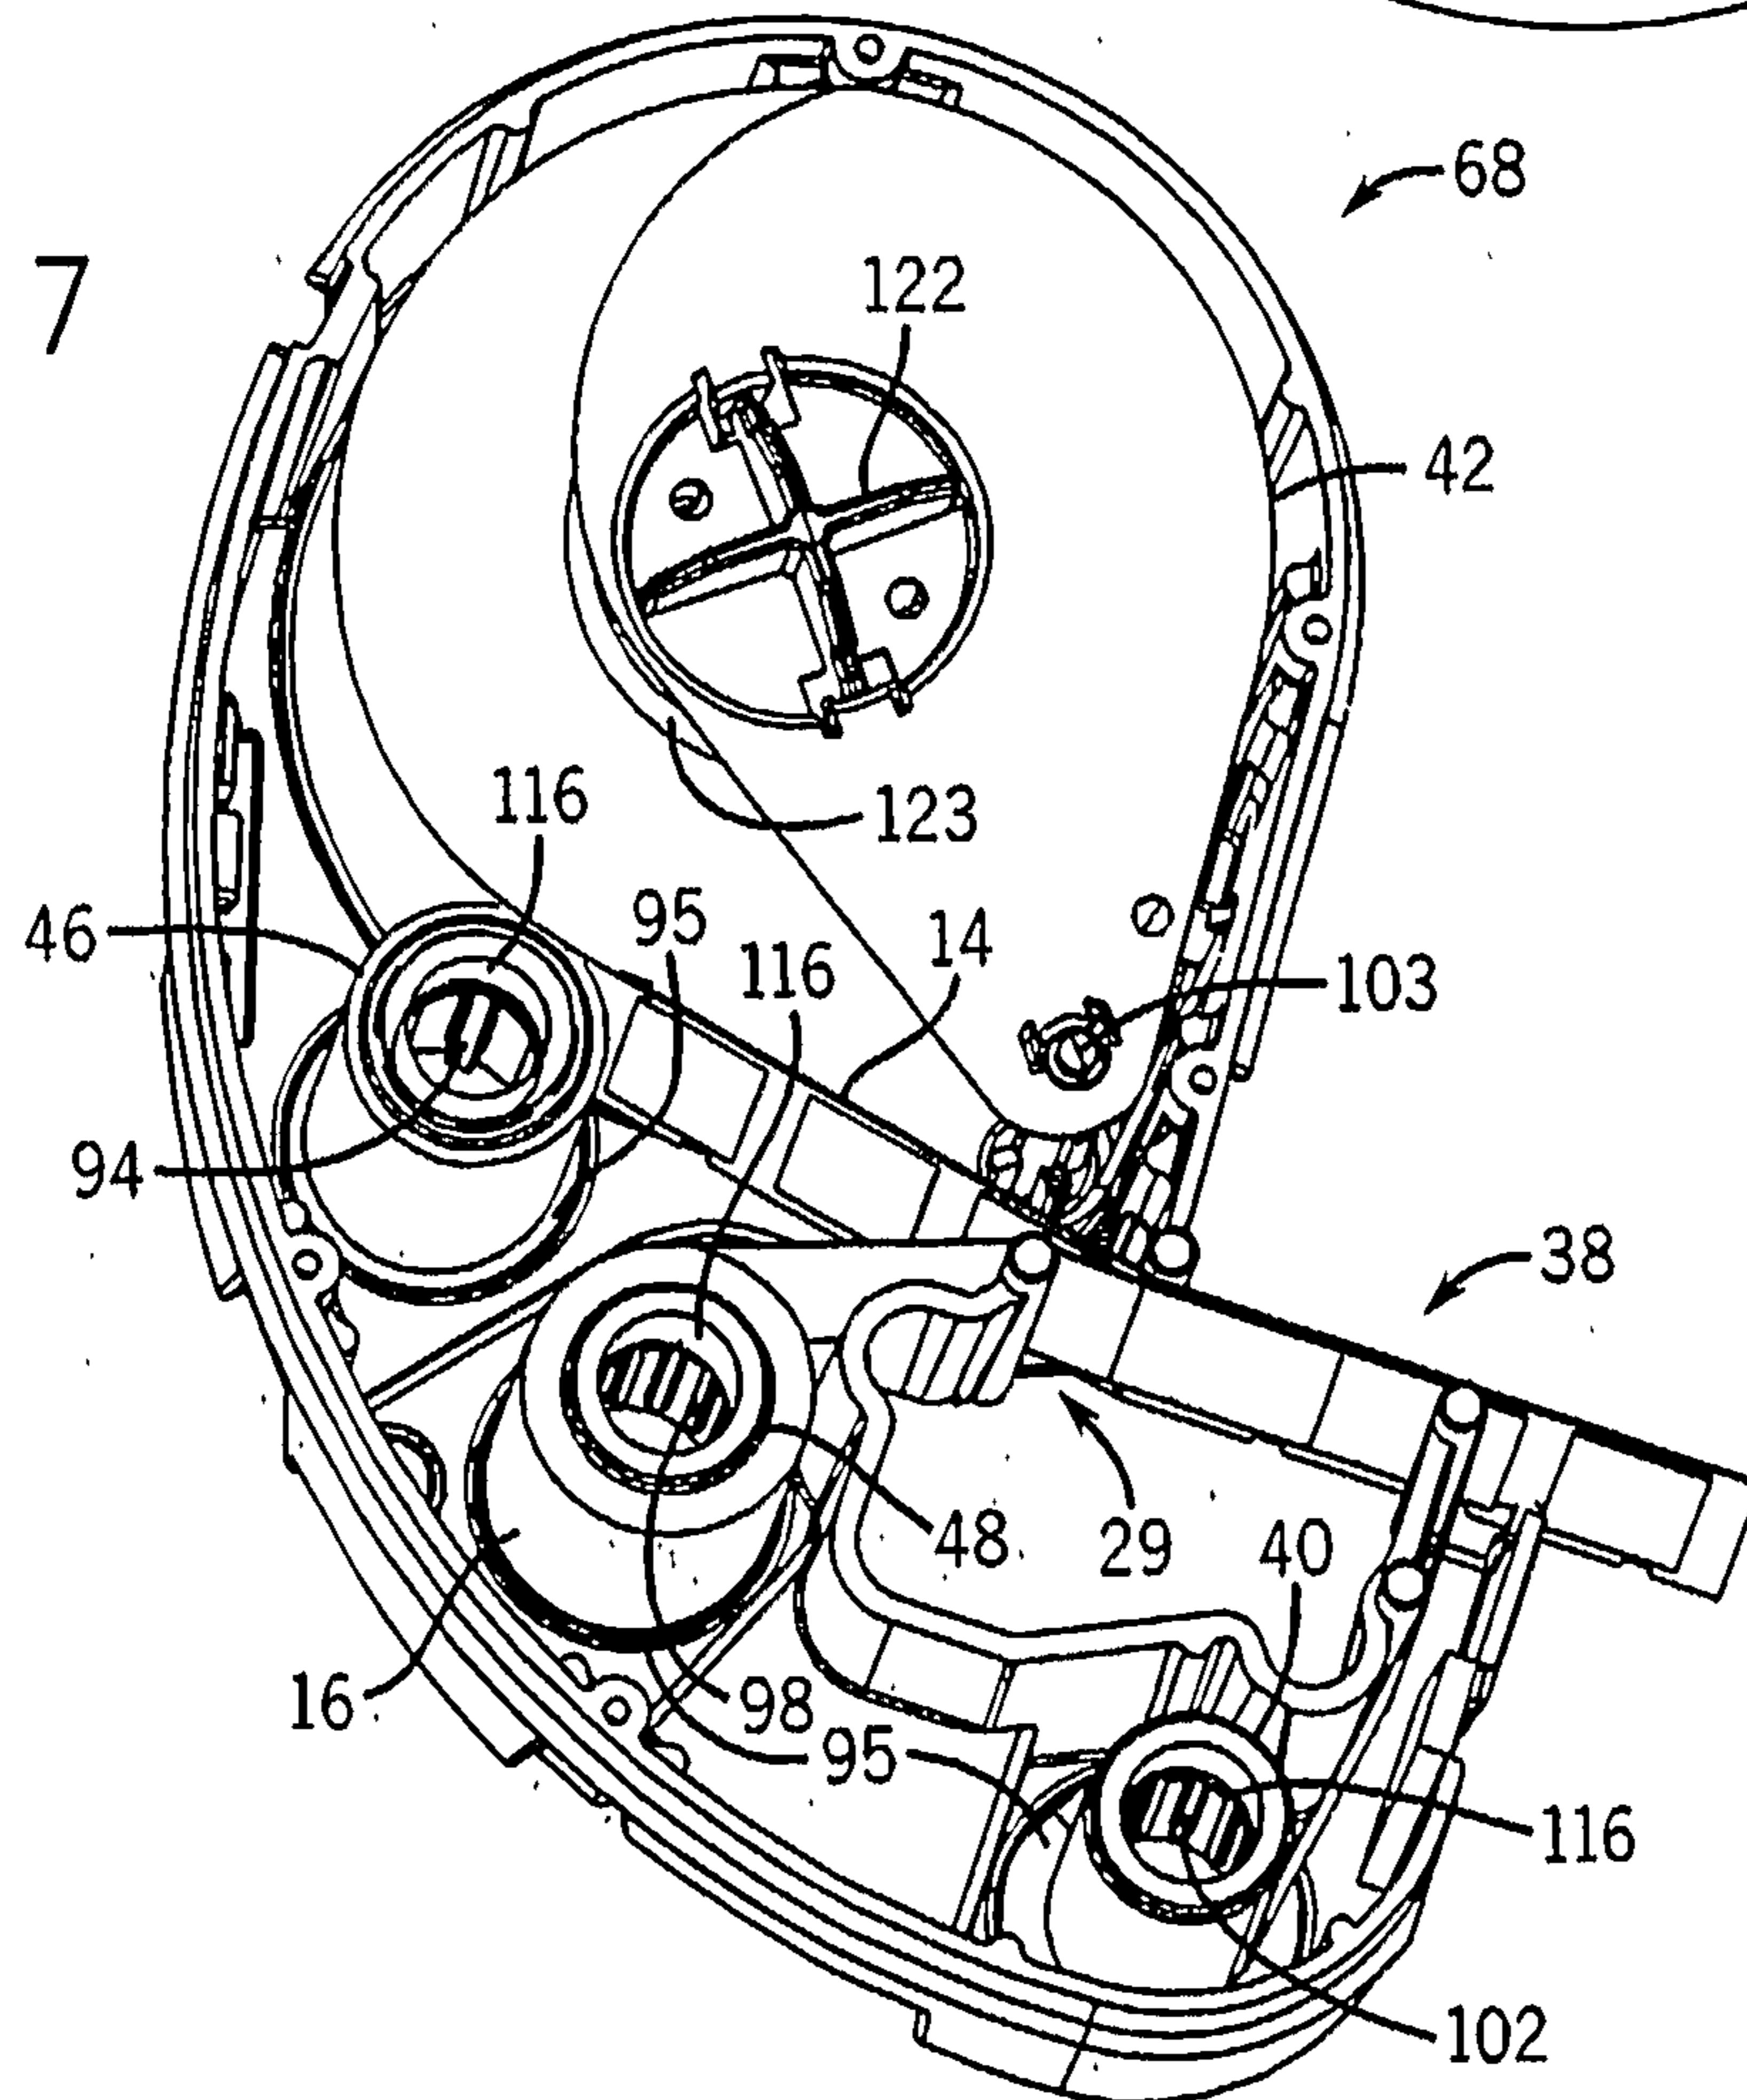

6 / 8

FIG. 8


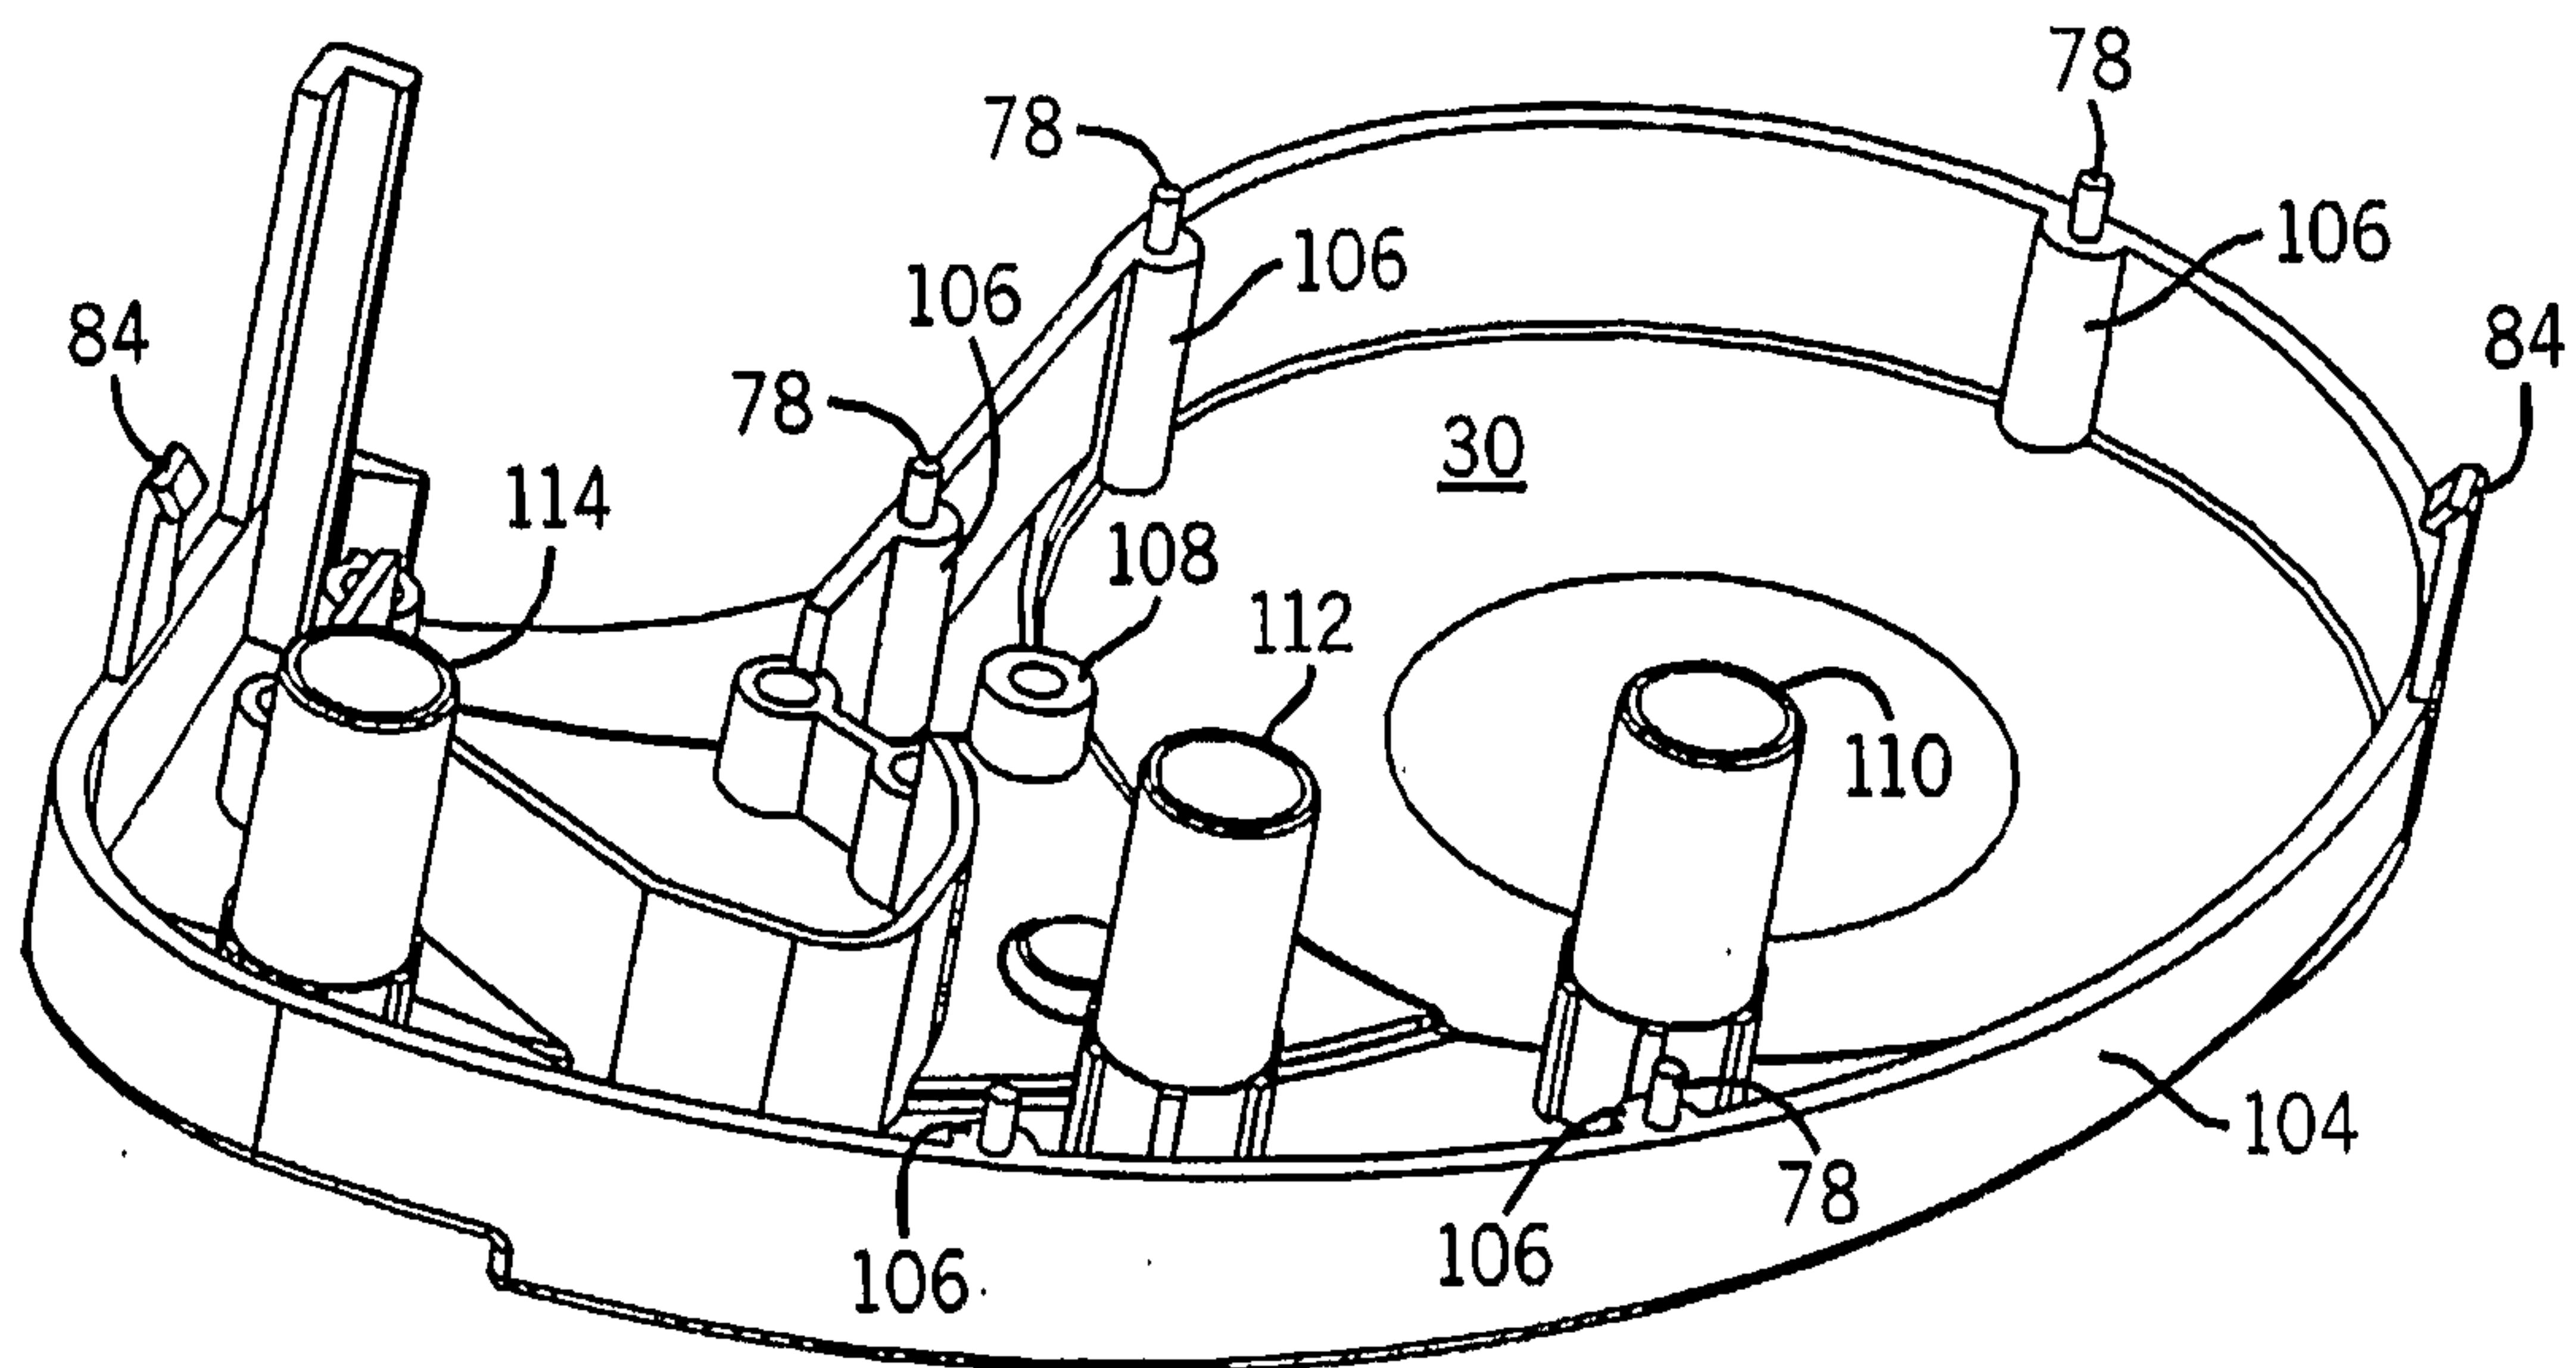


FIG. 9

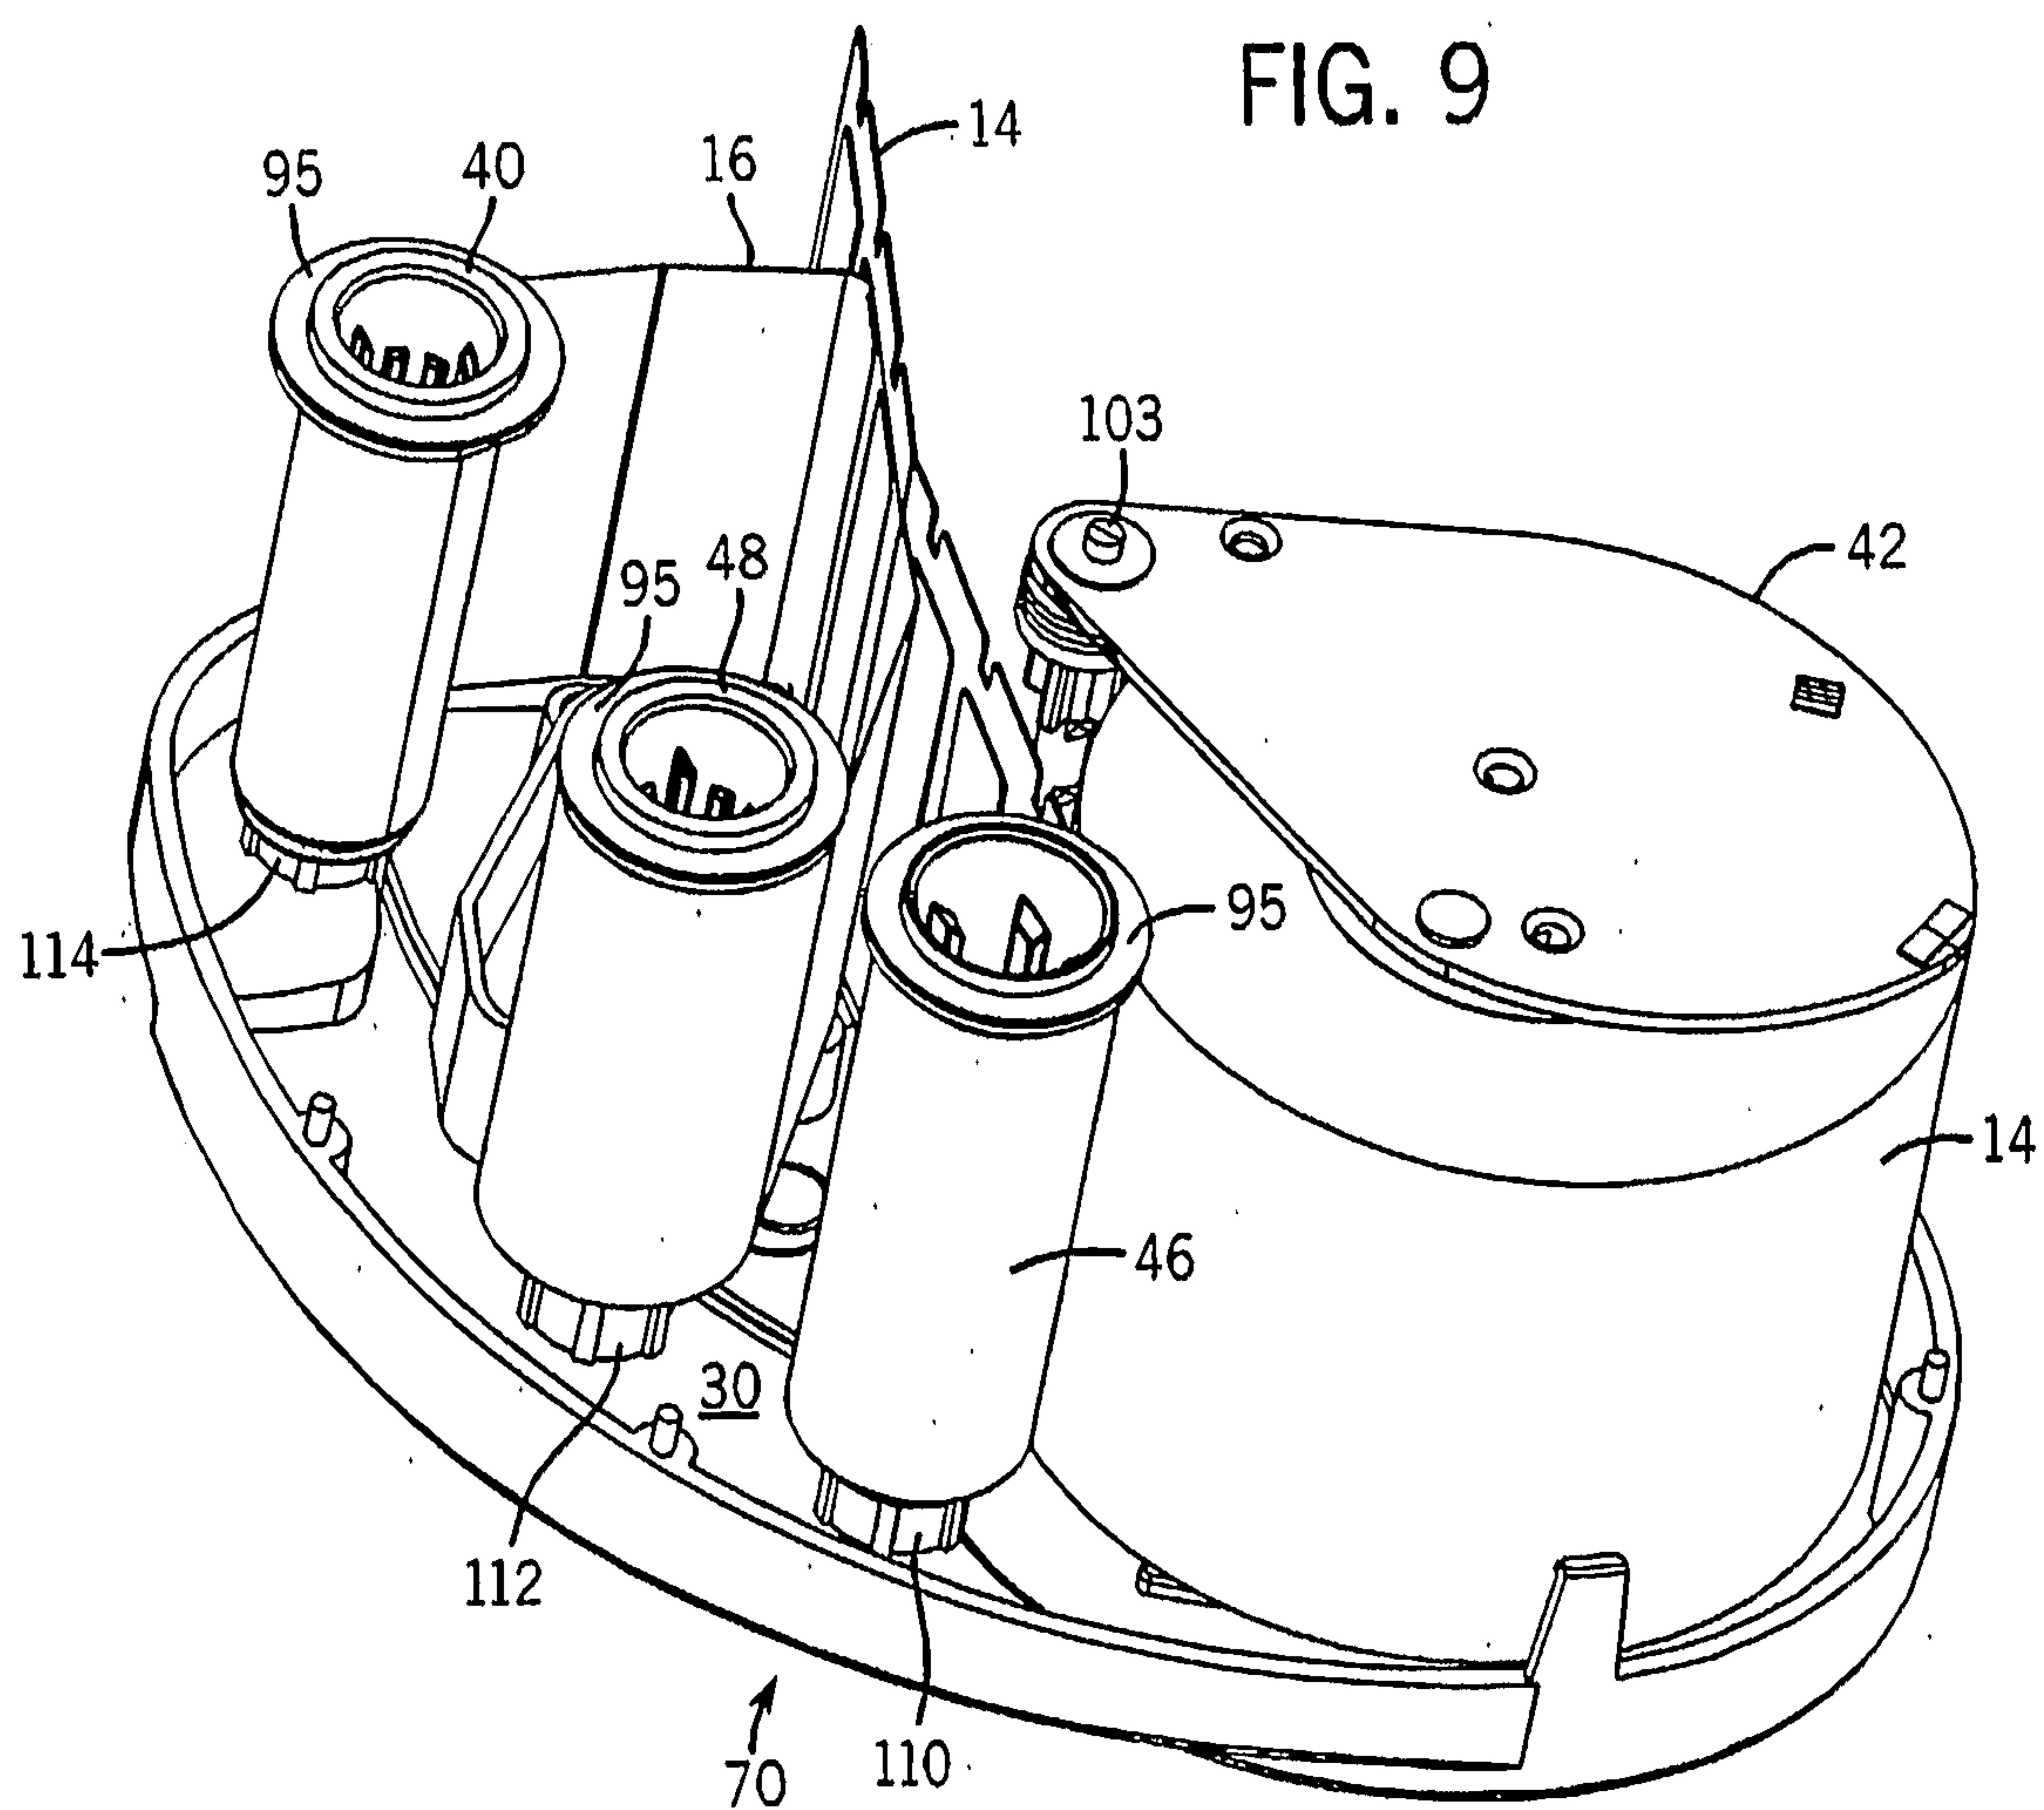

7 / 8

FIG. 10


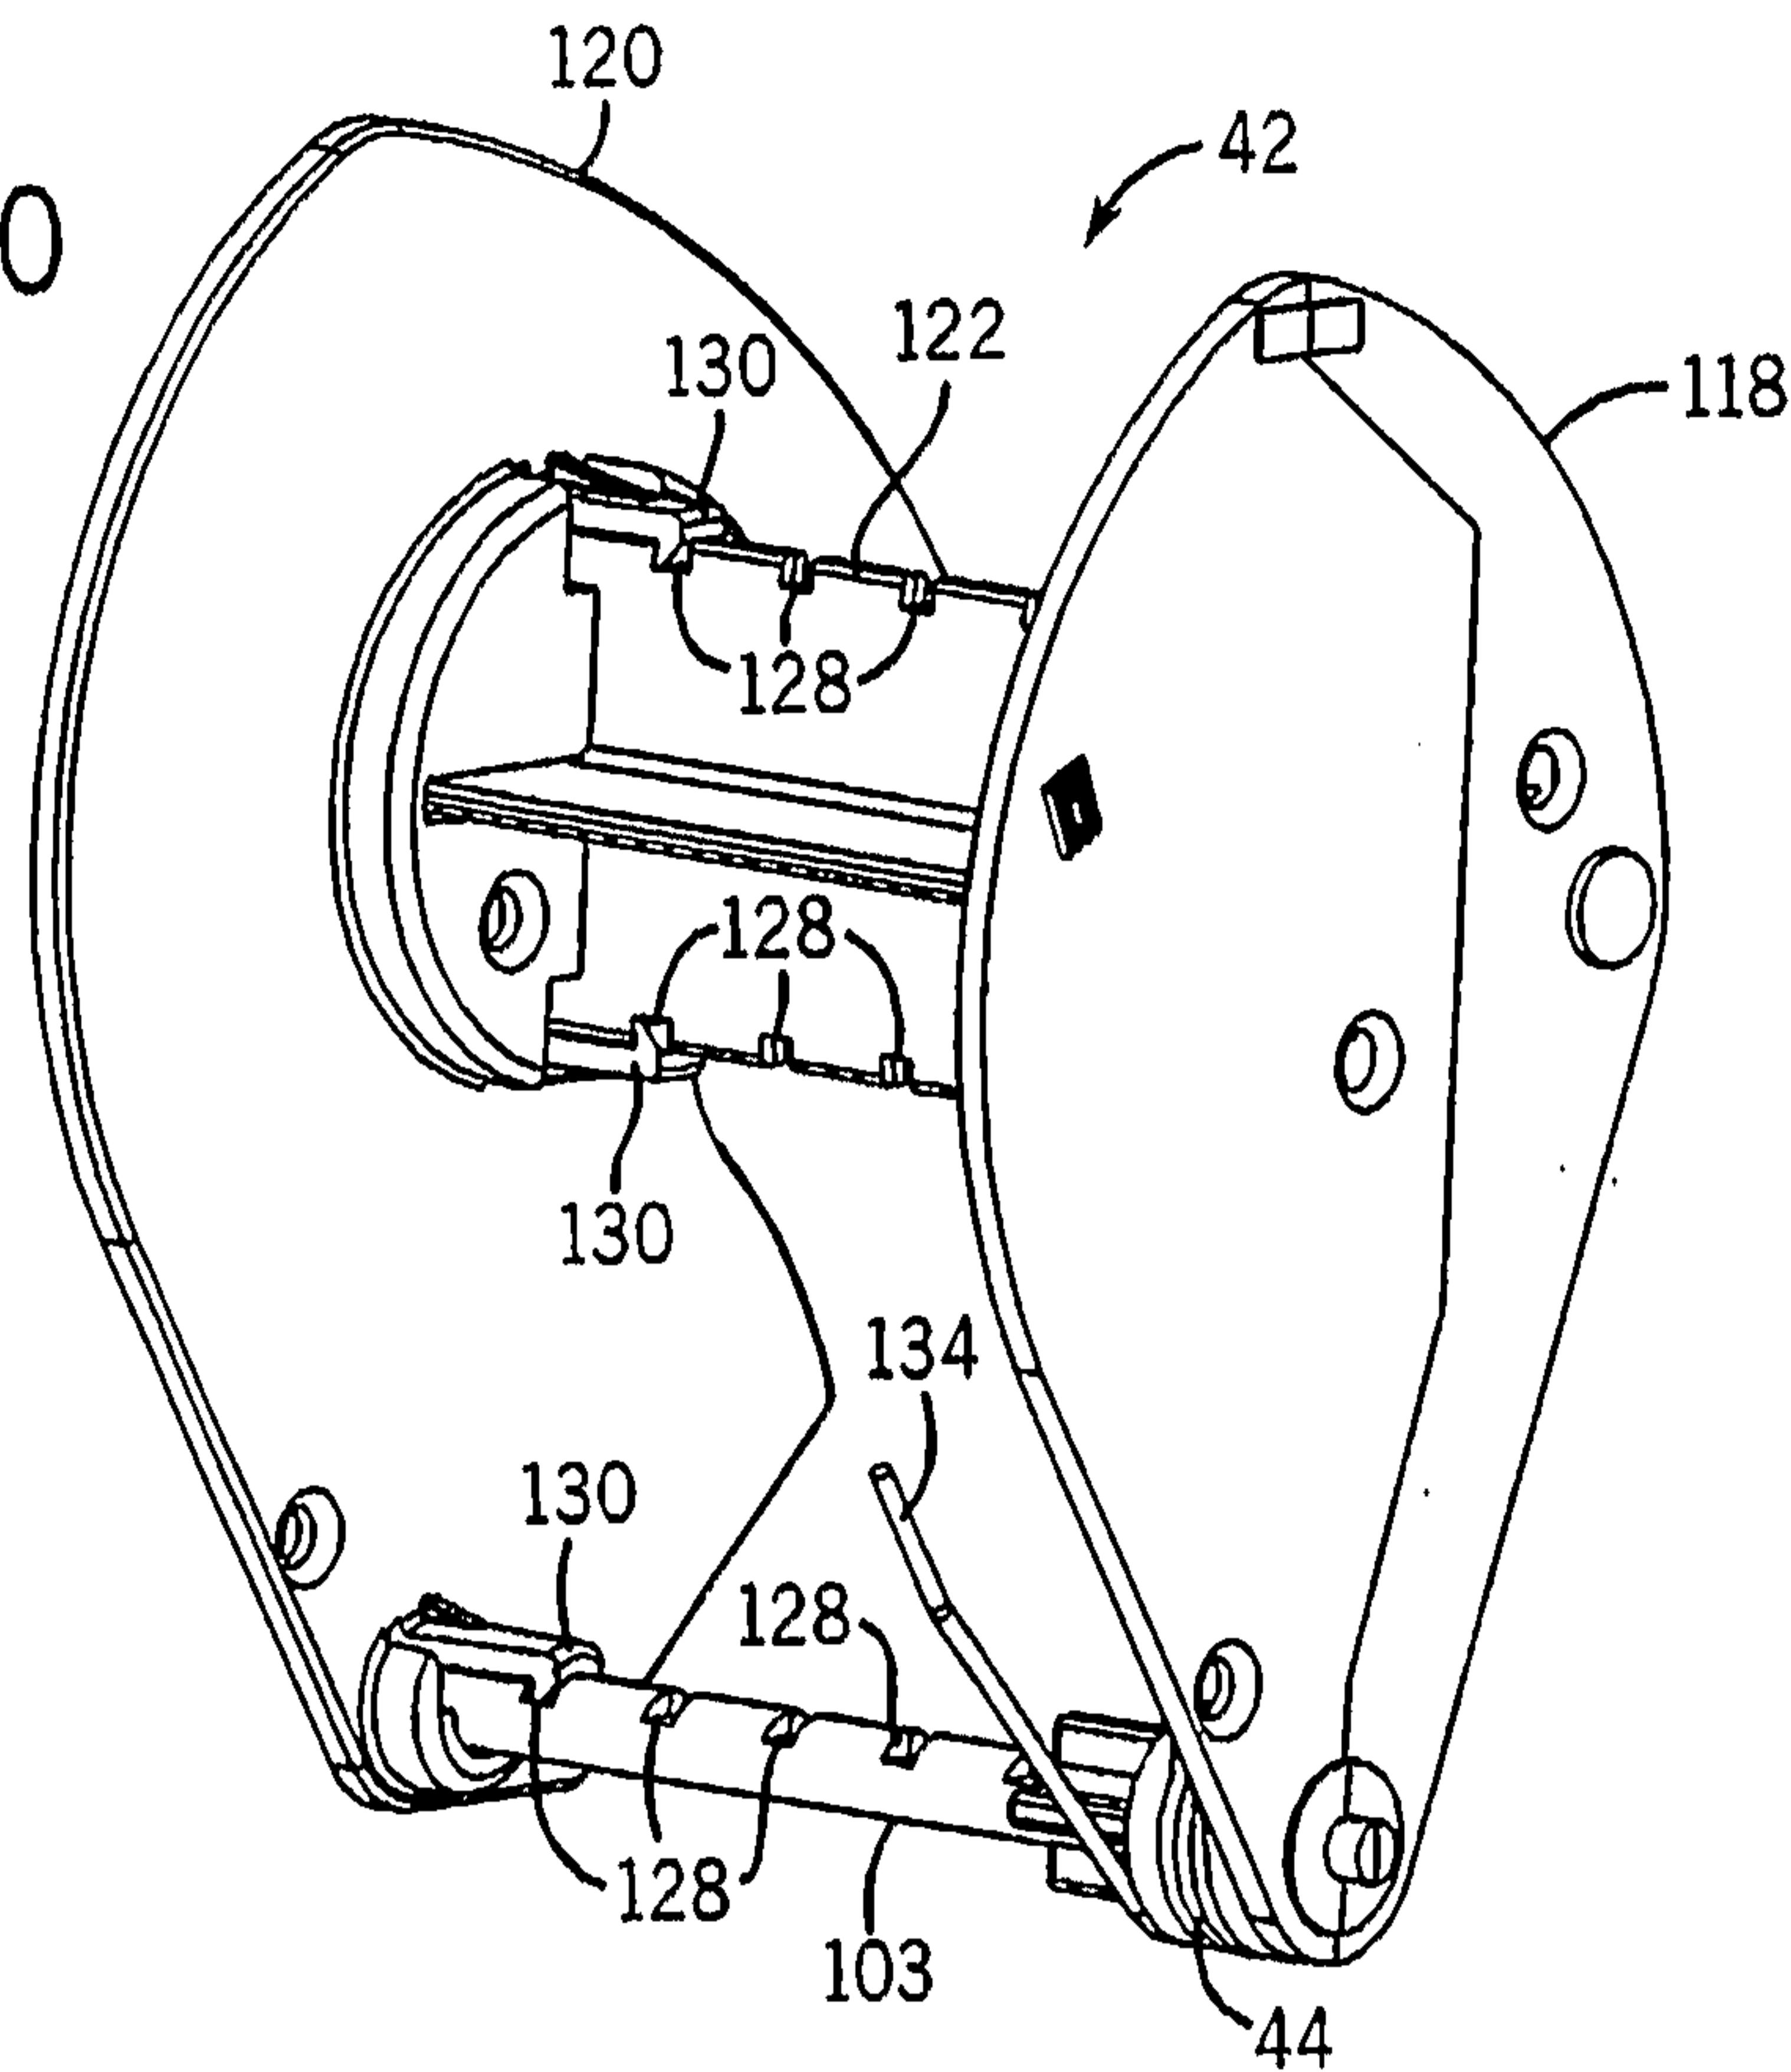


FIG. 11

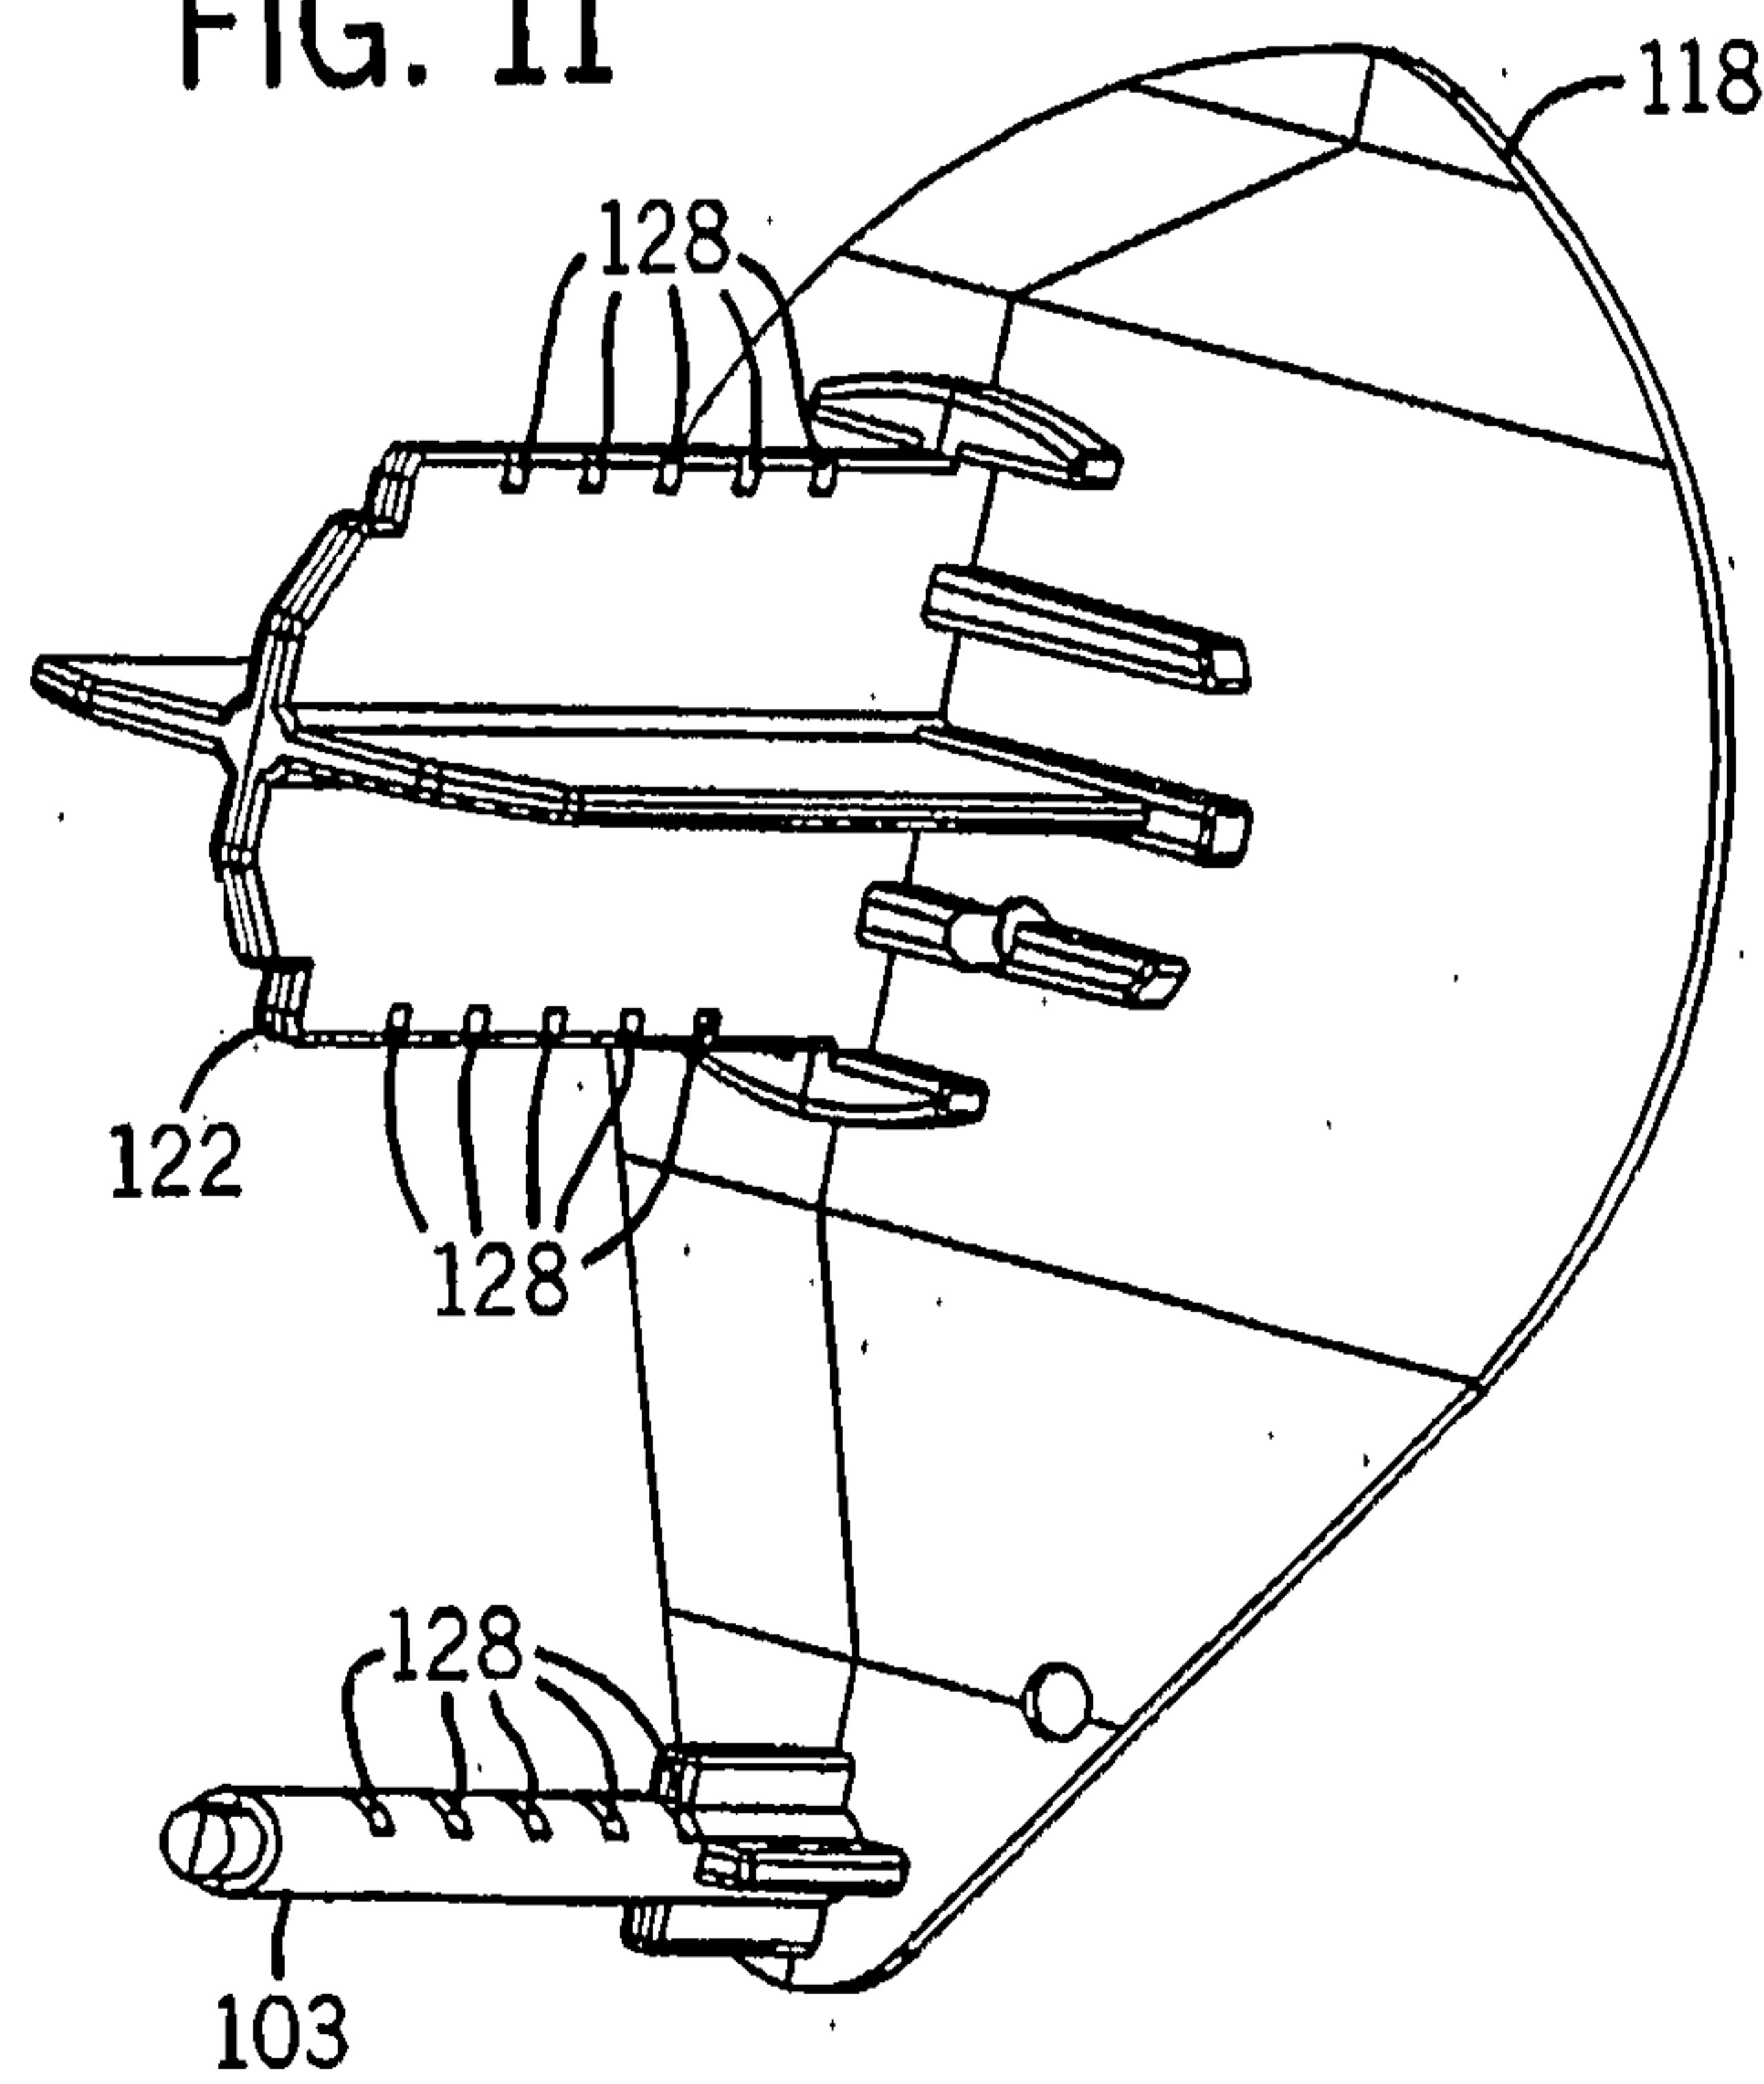

8 / 8

FIG. 12

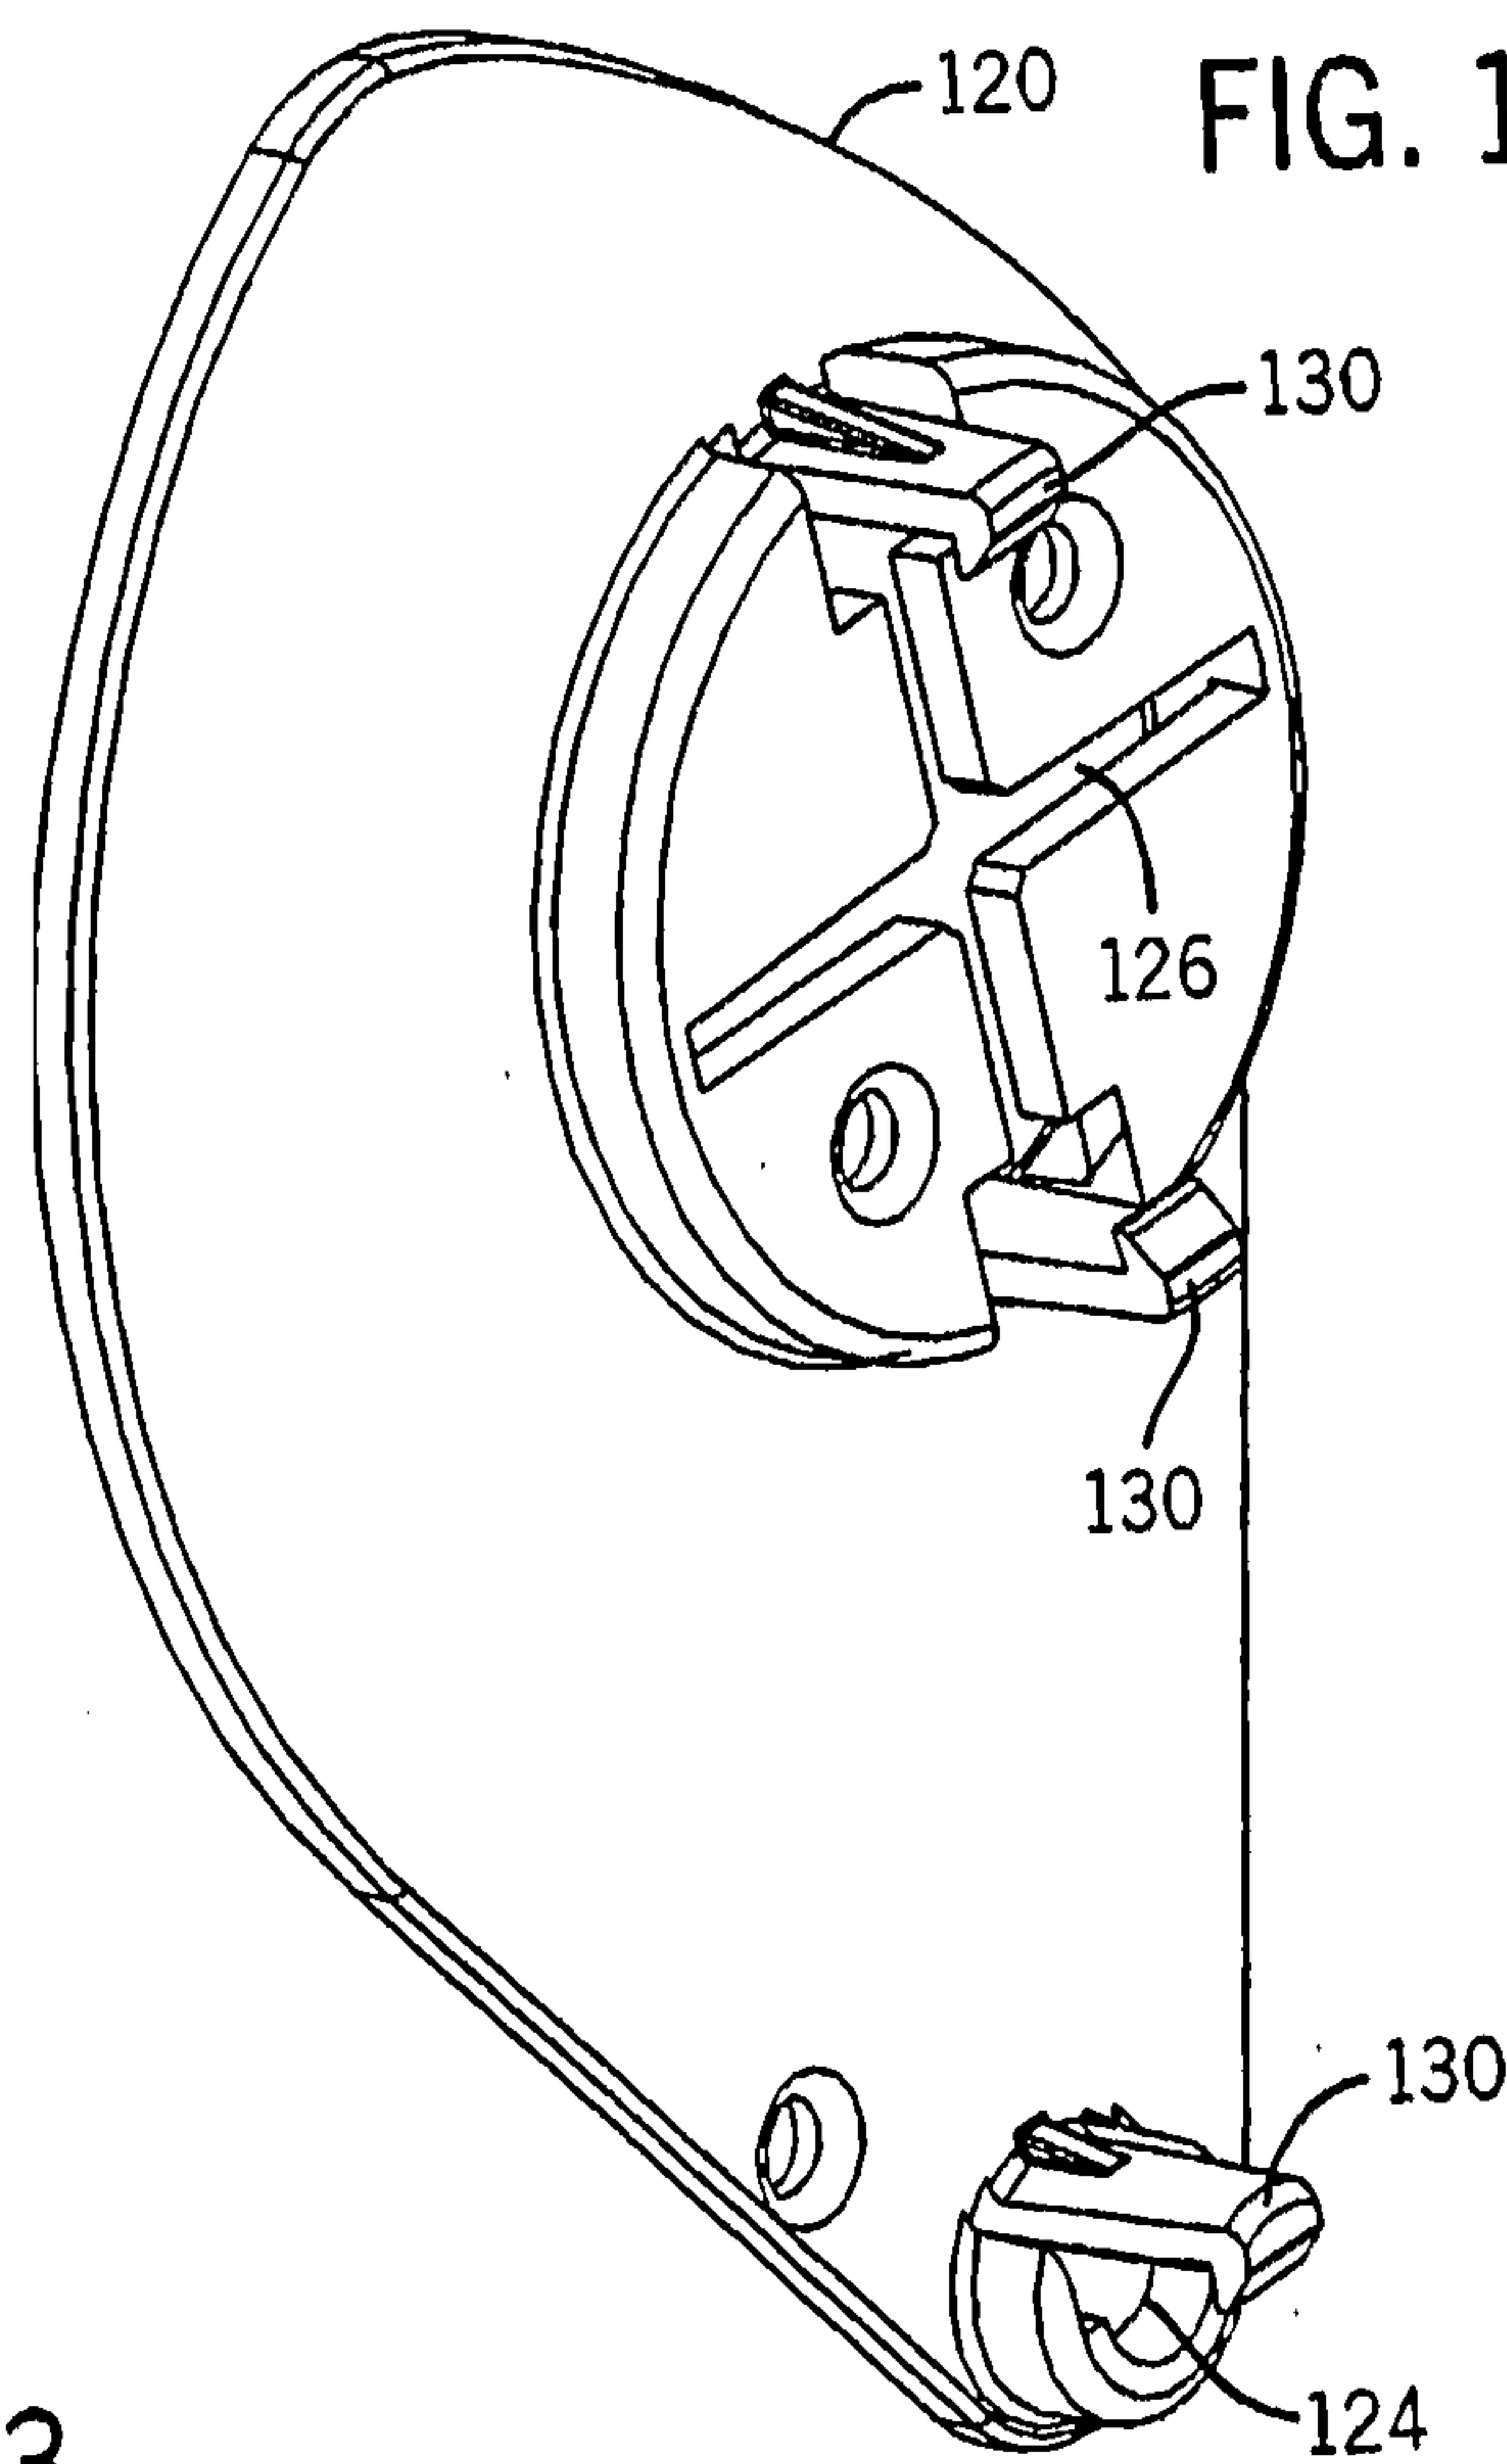


FIG. 13

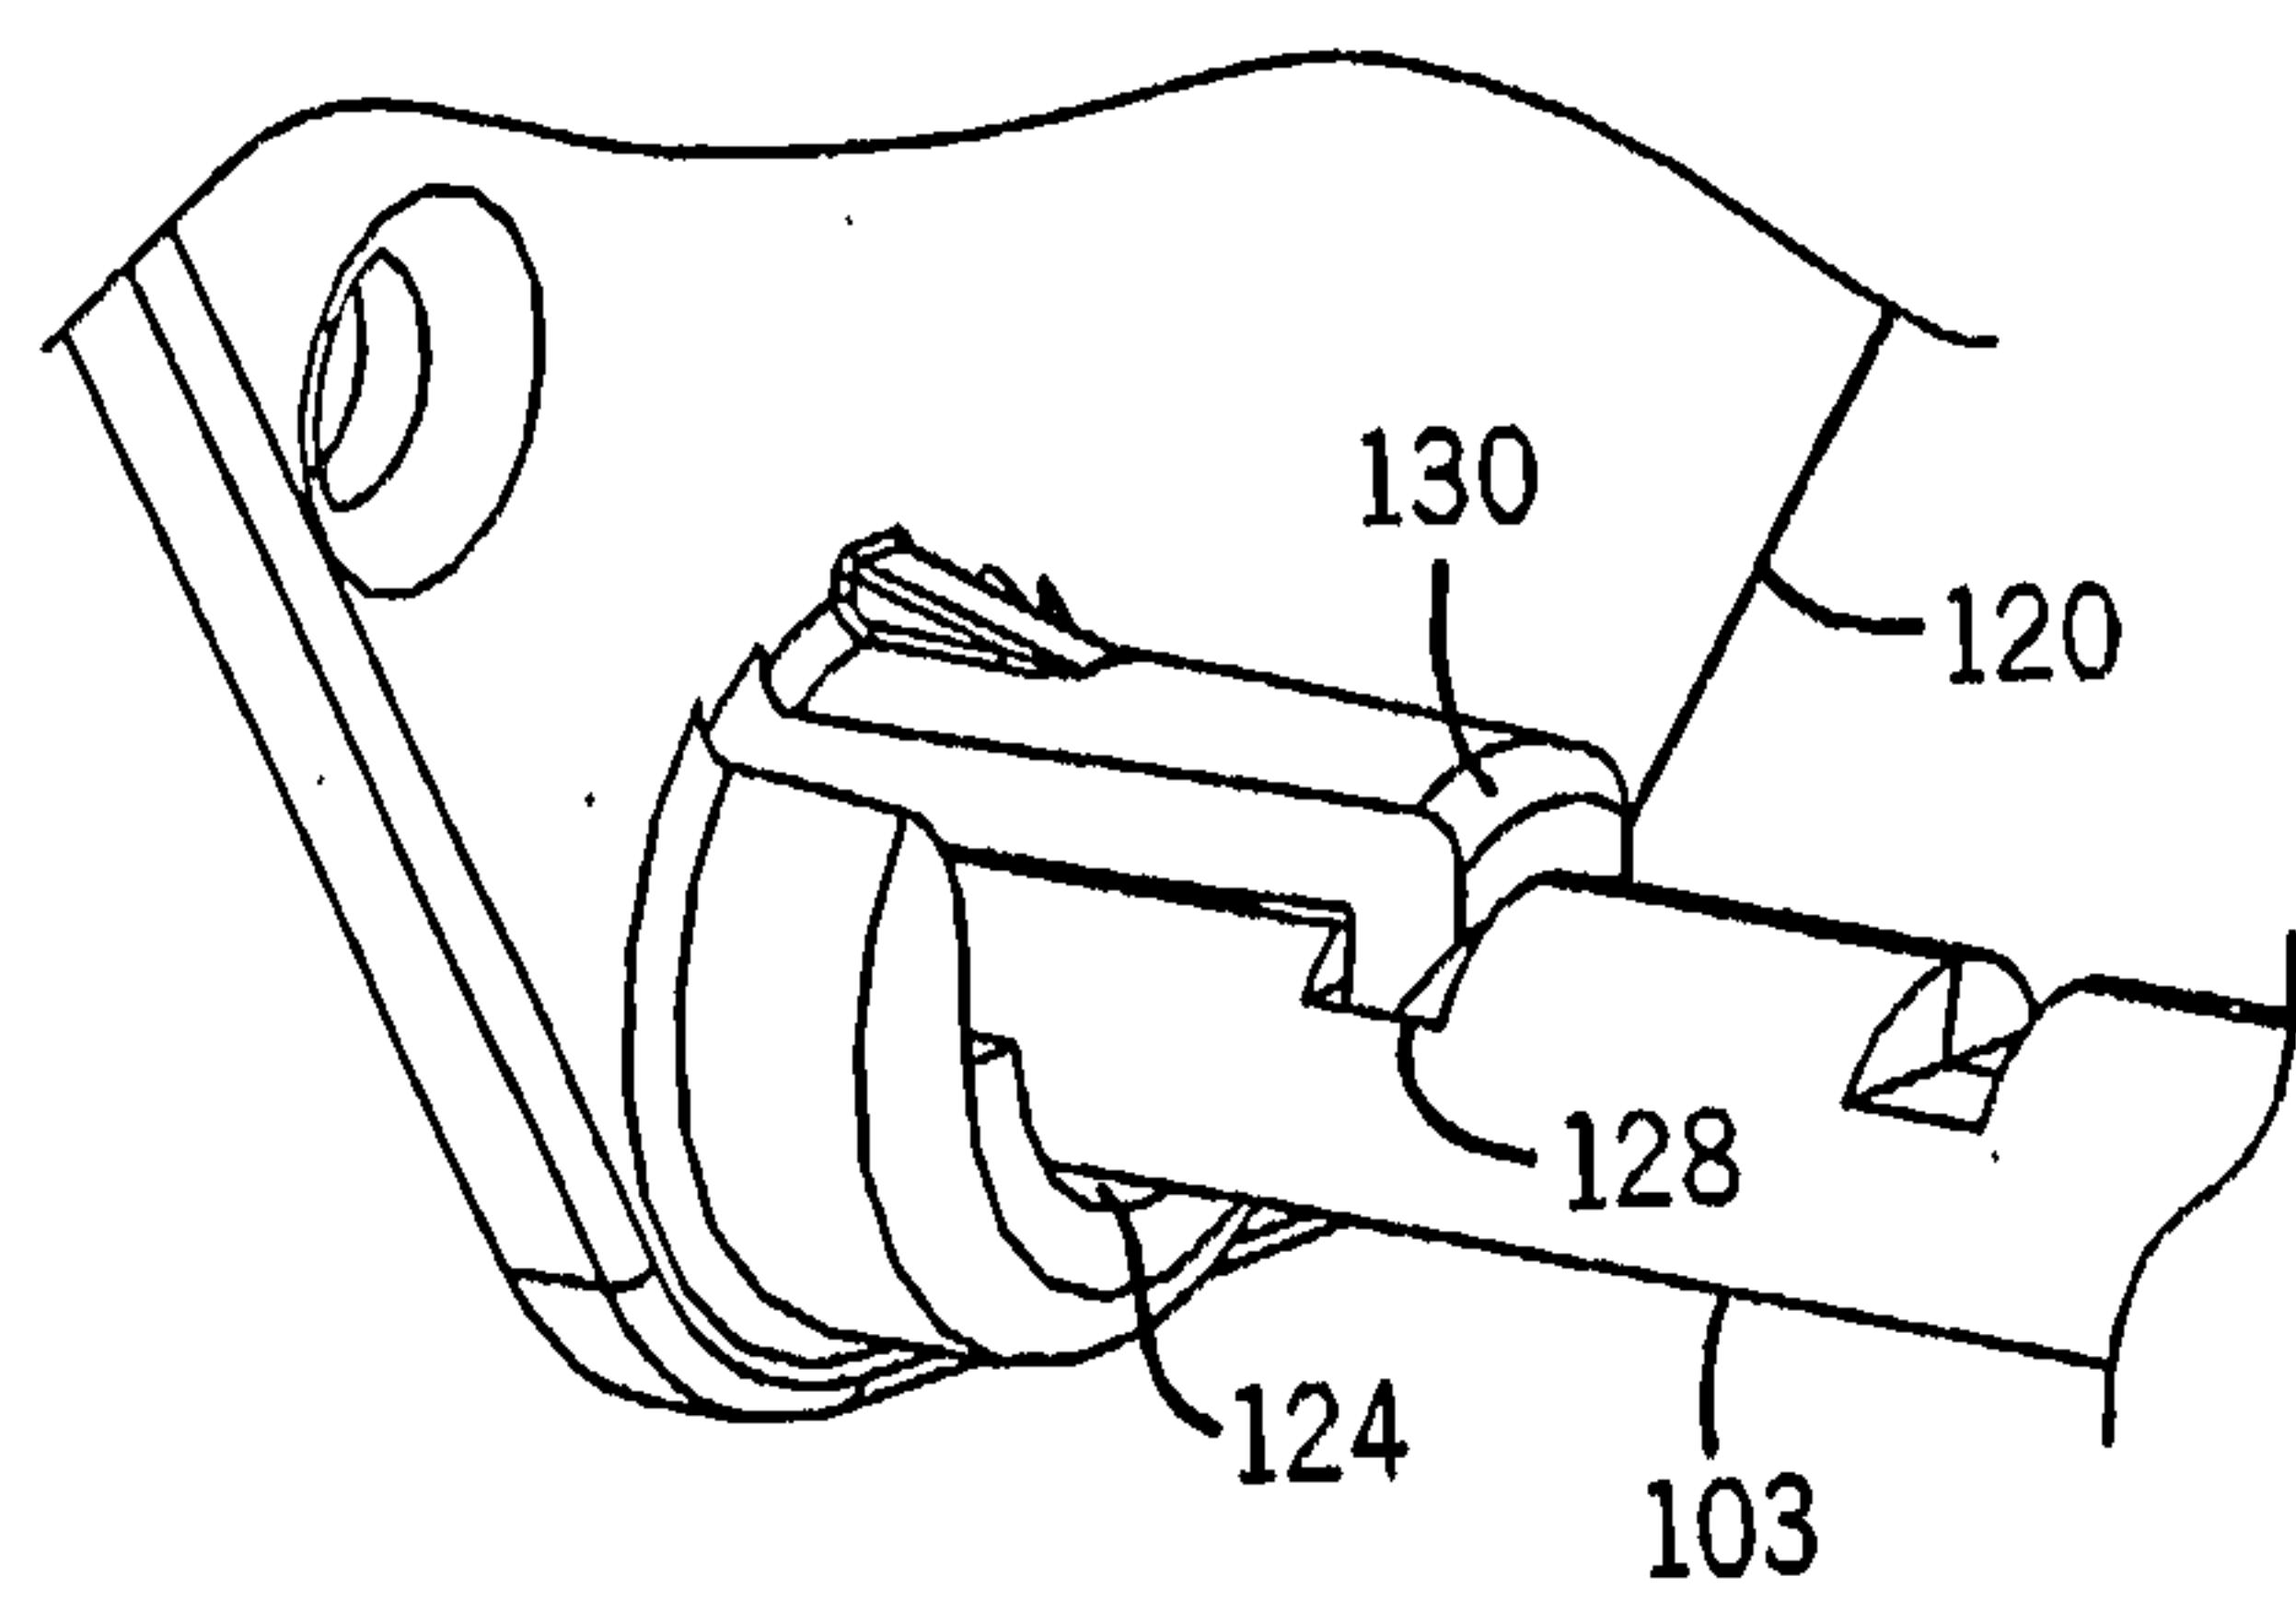


FIG. 14

