




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : G01B 21/04, G06F 3/00, G01B 11/16</p>	A1	<p>(11) International Publication Number: WO 98/41815</p> <p>(43) International Publication Date: 24 September 1998 (24.09.98)</p>					
<p>(21) International Application Number: PCT/CA98/00213</p> <p>(22) International Filing Date: 17 March 1998 (17.03.98)</p> <p>(30) Priority Data:</p> <table border="0"> <tr> <td>2,200,117</td> <td>17 March 1997 (17.03.97)</td> <td>CA</td> </tr> <tr> <td>08/863,063</td> <td>23 May 1997 (23.05.97)</td> <td>US</td> </tr> </table> <p>(71) Applicant (for all designated States except US): CANADIAN SPACE AGENCY [CA/CA]; 6767 Route de l'Aéroport, Saint-Hubert, Quebec J3Y 8Y9 (CA).</p> <p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): DANISCH, Lee [CA/CA]; Measurand Inc., P.O. box 21029, Fredericton, New Brunswick E3B 7A3 (CA).</p> <p>(74) Agent: FRENCH, David, J.; P.O. Box 2486, Station D, Ottawa, Ontario K1P 5W6 (CA).</p>	2,200,117	17 March 1997 (17.03.97)	CA	08/863,063	23 May 1997 (23.05.97)	US	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
2,200,117	17 March 1997 (17.03.97)	CA					
08/863,063	23 May 1997 (23.05.97)	US					

(54) Title: TOPOLOGICAL AND MOTION MEASURING TOOL

(57) Abstract

A position, orientation, shape and motion measuring tool is provided in the form of a flexible substrate with bend and twist sensors distributed along its surface at known intervals. A ribbon-type substrate is preferred. The geometric configuration of the substrate is calculated from inter-referencing the locations and orientations of the sensors based upon the detected bend and twist values. Suitable applications include motion capture for humans for use in animation, six degree of freedom input to a computer, profile measurement and location tracking within a large, singularity-free working space.

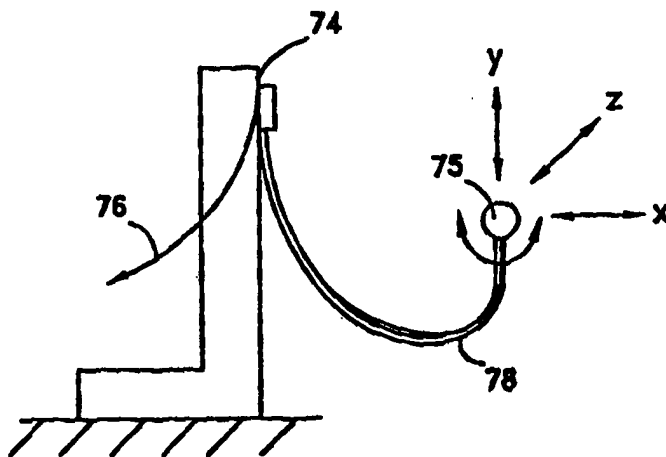

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE: TOPOLOGICAL AND MOTION MEASURING TOOL

FIELD OF THE INVENTION

This invention relates to sensor technology. In particular, the invention relates to measuring the geometric
5 location and configurations of objects in space. The invention is suited to robotic applications and to extracting human geometry and motion.

A preferred application is in the field of animation effected by motion capture of movements by the human body.

10 BACKGROUND TO THE INVENTION

Various technologies have been applied to measure the location, orientation and surface shapes of objects in space.

In the field of robotics it is known to determine
15 the location of a series of rigid, linked elements in space by measuring the angular degree of rotation existing at the various joints joining such linked elements, cf U.S. Patent No. 5,576,727 to Rosenberg et al.

In the field of interfaces between humans and
20 mechanisms, goniometers based upon rotary potentiometers or strain gauges are used to measure the angular relationships between parts of the human body, cf, U.S. Patent No. 5,163,228 to Edwards et al.

U.S. Patent 4,988,981 (Thomas Zimmerman et al) reveals means for sensing body position using flex sensors, including the use of flex sensors carried by a glove. Such gloves have been widely used and reported on. Reported
5 problems include ambiguity of response due to finger motion occurring in multiple degrees of freedom, and other inaccuracies due to fit of the glove to the hand. Similar methods of providing flex sensing in a glove are reported in U.S. Patent 5,097,252 (Y.L. Harvill et al).

10 Slidable linkage flex sensors designed to sense two degrees of freedom of finger joint motion have been described in U.S. Patent No. 5,316,017 (Glenn Edwards et al). The slidable linkage permits the sensor to accommodate for the changing distance between attachment points during flexure.

15 U.S. Patent 5,533,531 (Glenn Edwards et al) addresses separating and identifying motions having multiple degrees of freedom (DOFs) using a multi-DOF contacting sensor: the DOFs are exercised separately in a calibration routine, which provides a mathematical relationship between the outputs
20 of the sensors responding to detected motions which can be used to provide separate DOF signals. A similar method is advanced in U.S. Patent 5,531,257 (Danisch), in which three fiber optic sensors mounted in parallel with their sensing surfaces splayed in separate directions are used for resolving
25 bends in multiple DOFs in a flexing structure. However,

neither reference suggests methods of dealing with twist, which would cause ambiguity or be undetectable in the readings of either of the patented sensor methods. Nor does either patent deal with the problem of determining the complete
5 position and orientation of a longitudinally extended structure based only on measurement of flexure.

Rotations in a flexure include bending that is transverse to the longitudinal extent of the substrate; and twisting that occurs about an axis which is coincident with
10 the longitudinal extent of the substrate. Both types of bending qualify as "flexures".

Twist is usually negligible in sensor structures based on cylinders, rods, and other solids with significant cross-sectional dimensions. However, it can be very
15 advantageous to measure the presence of twist in flat, ribbon-like flexures. Such flexures are very convenient for incorporation in garments.

Virtual Technologies Inc. of Palo Alto California markets an instrumented fabric glove which incorporates bend
20 sensors at the finger joints and other sensors for measuring thumb cross-over, palm arch, wrist flexion and wrist adjunction. The position of the glove and its sensors in space is also measurable by coupling the glove wristband to a 6 degrees-of-freedom space-position tracking mechanism.

An instrumented glove marketed by General Reality Company of San Jose California relies upon fiber optic bend sensors to sense bending at various points on the glove.

In the field of animation motion capture procedures
5 are used to record the positions and movements of the human body. One method has involved visually capturing the locations in space of "target" markers carried on the limbs and bodies of human actors. Another method has been to provide an "exoskeleton" mechanical structure which acts as a
10 mechanism in following, and providing signals for recording, the motions and positions assumed by the human body. Accuracy is then limited by the ability of the exoskeleton to maintain a stable mounting to the body. The penalty of such systems is the constricting and cumbersome nature of mechanical
15 exoskeletons. Also, it is very difficult, if not impossible, to build exoskeletons that permit full limb movement or that can account for all limb rotations and other subtle multiple degree of freedom limb movements. Further, exoskeletons are generally removed a significant distance from the measured
20 surface, leading to their inaccuracy and increased bulk.

Both of the target marker and exoskeleton methods as presently conceived are complex and entail inconveniences in their implementation. A need exists for a light weight, unencumbering, position and motion sensing device that can
25 conveniently track and identify the location and geometric

configuration of objects in space. The invention herein addresses such an objective.

More particularly an object of the present invention is to provide a flexural reference platform equipped with
5 distributed sensors wherein changes in the shape of the platform are sensed by the sensors in such a way that the complete shape of the platform can be found by calculations from the outputs of the sensors.

Another object of this invention is to provide an
10 instrumented, flexible member that is sufficiently compliant to substantially conform to the surface of a curved object and act as a sensor to provide electronically processable data as to the shape of that surface.

A variety of technologies exist for measuring the
15 state of flexure - bend and twist - in an object. A convenient class of technology particularly suited to this objective relies on fiber optics.

U.S. Patent 5,321,257 to Danisch describes a modified optical fiber that is provided with a light absorbent
20 region on a portion of the outer fiber surface whereby the curvature at such modified region may be remotely detected by the change in the overall light transmission capacity of the fiber. This patent depicts the deployment of clusters of modified fibers capable of detecting a bend in three
25 dimensional space (Figure 12).

Patent Co-operation Treaty application
PCT/CA94/00314 (published December 22, 1994 as WO 94/29671)
discloses the use of looped fiber optic light wave guides to
measure curvature. The fiber is looped to provide outgoing
5 and return wave paths that pass through a looped end that
effects a 180 degree bend. The surface of the fiber is
treated adjacent to and within the curvature of the looped
portion to render it absorbent of light. In one configuration
it is the side of the fiber surface lying along the top plane
10 of the looped end that is treated. Once the looped end is so
treated, it is sensitive to its state of curvature when
deflected out of or through the normally flat plane of the
loop. Such flexure can be detected remotely by the change of
intensity in returning light carried by the fiber. This
15 provides a measure of localized curvature in the region of the
loop.

A further paper on this subject by the inventor
herein entitled "Laminated Beam Loops" has been published in
SPIE Vol. 2839, pp. 311-322, 1996. The contents of this
20 paper, the above referenced United States patents and the
published PCT application PCT/CA94/00314 are all adopted by
reference herein.

Looped optical fiber sensors can measure bend and,
in accordance with the invention hereafter described, twist
25 based on the disposition of the loop and the location of the

treated, light absorbing region of the fiber surface adjacent to or within the loop. The sensitive region at the looped end of the fiber can be contained within a running length of on the order of three millimeters to a few centimetres depending
5 on desired sensitivity and the diameter of the fibers. This provides a corresponding span for the sampling of the average state of curvature of the sensing looped end of the optic fiber.

Fiber optic technology is convenient for use in
10 sensors because it is robust, benign and inexpensive. A need exists for a fiber-optic based sensor system that can provide remote information on the locations of objects in space, the shape of surfaces and changes in the shape of surfaces. The present invention addresses such a need.

15 The invention in its general form will first be described, and then its implementation in terms of specific embodiments will be detailed with reference to the drawings following hereafter. These embodiments are intended to demonstrate the principle of the invention, and the manner of
20 its implementation. The invention in its broadest and more specific forms will then be further described, and defined, in each of the individual claims which conclude this Specification.

SUMMARY OF THE INVENTION

In one broad aspect, the invention is a shape and position measuring tool which comprises:

- (1) a flexible substrate having a longitudinal dimension;
 - 5 (2) spaced flexure sensors, attached to and positioned at known flexure sensor spacing intervals along the length of the substrate to provide signals indicating the local state of flexure present in the substrate at the locations where the flexure
10 sensors are attached to the substrate; and
 - (3) sensor data processing means coupled to the bend flexure sensors for receiving signals therefrom and for presenting data on the geometric configuration of the substrate
- 15 wherein the sensor data processing means operates by extrapolating the geometric configuration of the substrate from the flexure signals provided by the flexure sensors and the spacing intervals between such sensors.

This invention works by sampling curvature at
20 multiple, spaced intervals along a supporting substrate which is flexible, and preferably substantially continuous, incompressible and inextensible. This substrate acts as a carrier for the sensors. The Invention relies upon inter-referencing the position of flexure sensors located at known
25 intervals along the supporting substrate with the location of

adjacent sensors so that the location of all sensors with respect to each other is known.

The flexure conditions being measured may include two degrees of flexural freedom, e.g. measuring both bending and the state of twist present in the substrate or bending in separate directions.

Flexure may be measured by twist and bend sensors attached to and positioned at known twist and bend sensor spacing intervals along the length of the substrate. These provide signals indicating the local state of twist and bending present in the substrate at the locations where such sensors are attached to the substrate.

Bend can be measured about either one or two axes that are orthogonal to the longitudinal dimension of the substrate, depending on the nature of the substrate. Thus a rope-like substrate would require that bending be sensed about two such axes, either directly or indirectly.

By providing a substrate which is deformable only in restricted degrees of freedom, the number of sensors required can be reduced. As a preferred configuration, bend and twist sensors may be bonded to a substrate which is in the form of a ribbon. In such case bend sensors are only required for measuring flexure of the ribbon in its permitted bending mode. This reduces the number of bend sensors needed per unit of length.

A ribbon is an article which is substantially limited to bending along its length about axes which are transverse to the longitudinal dimension of the ribbon while the ribbon remains free to twist about such longitudinal
5 dimension. Thus a single bend sensor will suffice to measure bend at a location along a ribbon. To complete the definition of the geometric configuration of a ribbon-like substrate, twist as well must be measured by twist sensors located at known intervals along the longitudinal extent of the length of
10 the ribbon. Such bend and twist sensors may be interspersed with each other or co-located along the ribbon.

When the substrate is of a ribbon-like configuration employing both bend and twist sensors freedom of movement and tracking of the geometric configuration of the ribbon in three
15 dimensional space is nevertheless available. This is because the ability of a ribbon to twist allows portions of the ribbon to be re-oriented in any direction in space.

As an alternate configuration, bend and twist sensors may be coupled along a pliable core or substrate that
20 has two degrees of bending freedom, akin to a rope. In such applications, two bend sensors may be provided for each twist sensor to provide balanced sensing of bend and twist.

This configuration for the invention can also be equivalently implemented by applying an instrumented planar
25 tape of the ribbon-type format to the outside, or inside, of

a cylindrical flexure such as a hose. When a hose-like carrier is employed, sensor communications may pass through the core.

The invention will perform with greater precision if
5 the flexure sensors are mounted along the neutral axis of a carrier substrate. This can be achieved in the case of a ribbon substrate by assembling two substrate portions as a lamination with the sensors contained between the layers. By using ribbon layers of similar flexibility, the sensors will
10 be positioned essentially along the neutral axis.

Bend sensors based on optical fiber technology, and particularly looped-end fibers, are suitable for sampling curvatures at multiple locations, the associated fiber ends all being connectable to a multi-fiber light source, light
15 sensing and signal processing unit. The bend and twist sensors may be based on optical fibers that have been rendered sensitive to their state of curvature by having appropriate, local portions or regions of their outer surfaces rendered absorbent to light passing through such fibers.

20 In the case of a ribbon substrate, the sensors may be based on optical fibers with curvature-sensitized portions that are aligned parallel to the plane of the ribbon at the locations where the treated portions are attached to the substrate.

To measure bend the sensitized portions of a treated fiber optic sensor may be generally aligned to lie across the axis about which bending is to occur, e.g. the axes extending transversely to the length of a ribbon substrate.

5 When looped-ends are employed, the treated, light-absorbing portions of the surfaces of each of the loops may be located either on one half of the loop only, or, if optionally on both halves of the loop, then on the same face of the loop in order to measure bend. By treating both sides, two treated
10 portions of the fiber will be modulating the light transmitted by the fiber based on the same local condition of curvature that each treated portion is experiencing. This will raise the ratio of the "signal" to the background "carrier" of light within the fiber guide.

15 To measure twist a looped sensor whose loop straddles the central longitudinal median line of a ribbon substrate may be conveniently employed: The surface of the optical fiber is treated on half portions, on opposite faces of the loop, the treatment being applied on opposite sides of
20 the median line. The portions of loops so treated and positioned respond inversely to bending, but cumulatively to twisting and therefore measure twist exclusively.

 For looped-end sensors it is not essential that the central, most curved, portion of the loop be treated to render
25 it non-transmissive of light. It is sufficient for the

treated portion to be proximate to the looped end to benefit from the mode filtering effect of the looped end.

For convenience of signal processing, when a ribbon substrate is employed, both twist and bend at a single location can be measured using two bend sensors which may or may not be looped optical fibers. The directions of the treated portions of the respective sensors of the pair are preferably oriented at substantially the same angle off of the longitudinal median line of the ribbon substrate and preferably at 45 degrees to the longitudinal dimension of the substrate. This permits two fibers to be used to measure both bend and twist at a single location by processing their outputs to extract their sum and difference signals as a measure of twist or bend. The referenced angular orientations simplify signal processing. With computational adjustments other angles would still be able to provide both twist and bend values from a splayed pair of sensors. Since the sensors will normally be operated in their linear ranges, the computations normally involve sums and differences of linear equations very amenable to high speed automatic computation.

Although this description concentrates on inextensible ribbon-like flexures with longitudinally distributed sensors, the invention includes structures based on flexures that are not inextensible, not narrow and not planar.

By assembling distributed sets of sensors, flexure sensing regions may be formed not only linearly, as along a supporting rope or ribbon-like substrate, but also over an area using a flexible carrier sheet as the substrate. For instance, a wide planar form can be a lamination in the form of a flexible, planar carrier, such as a rubber and fiber sheet, with sensor groups distributed across its area. The groups can consist of bend and twist sensors, or dual-direction bend sensors, which are able to completely describe the shape of the sheet. Using data on the state of curvature at each sensing region, and knowing the separation between sensors, the signal detection system can construct a depiction of the shape of the carrier. With the carrier sheet placed in contact with a geometric surface of unknown form, the shape of such surface can be measured, at least where the sheet and surface are in contact.

As another instance of non-planar forms, conventional measuring tapes (e.g. for measuring linear distances in carpentry) are of quasiplanar shape, having a continuous transverse bend when axially flat. This gives them greater stiffness, and concentrates axial bends at discrete axial locations unless the tape is constrained on a spool (as when the tape is rewound into its holder). In this latter case transverse bends are eliminated, being transformed into bends along the central axis of the tape. The transversely

bent conventional form would be a possible form for the invention as well.

As another instance of non-planar forms, a cylindrical form of substrate or carrier that resists torsion because of embedded wires or helical ribs may be employed. Such a substrate will bend in 2DOF, without permitting twist. This form could only be used to determine constrained three dimensional locations and 2DOF orientation information.

In all forms, the sensors for bend need not be co-located with the sensors for twist, and bend sensors need not be co-located with their differently oriented bend sensing mates (unless both bend and twist are being measured, as described above). It is sufficient for them to be distributed along the substrate at known intervals that allow the configuration of the substrate to be determined.

Although most references herein have been made to inextensible flexures, extensibility can be allowed to exist in the substrate. Thus, a possible form of the invention could be a stretchable flexure wherein not only bend and possibly torsion are measured but also extension. The degree of extension must be detected to ensure that the spacings between the flexure sensors will be known. Extension sensors could include conductive elastomers sensitive to extension. For convenience and to improve compliance, extension could be

limited to a small increase in length beyond which the flexure becomes functionally inextensible.

While reference is made herein to a "substrate" as a carrier for the flexure sensors, the word "substrate" is not
5 restricted in its meaning to a strict positional relationship with the sensors. While the sensors may be located on an outer surface of the substrate, they may also be embedded or contained within the body of the substrate. It is sufficient for the substrate to serve as a carrier for the sensors,
10 preserving their inter-sensor spacings and their orientations with respect to the body of the substrate.

This shape or profile measuring tool may be coupled over all or part of its extent by constraining means to a portion of a body or object the location, shape or orientation
15 in space of which is to be measured. It is thereby able to provide information indicating the position, shape, orientation and motion of the coupled portion. Such information is obtained from all parts of the sensor including uncoupled portions even though the objective is to acquire
20 data only in respect of the coupled portions.

Because the invention provides locational information along and for its entire length, it is permissible for a portion of the substrate to be uncoupled from the body being measured over parts of its extent. It is sufficient for
25 at least one portion of the sensor to be attached to a body

for the location and orientation of that portion of the body to be determined with respect to a reference point elsewhere on the sensor. "Signature" characteristics of the coupled portions, such as invariant proportional signals between
5 specific sensors, can be used to identify and track the coupled portions.

The invention performs in the same sense that a snake is able to be aware kinaesthetically of the location of its head, and its entire body, with respect to the position of
10 its tail. Every sensor's location, and orientation, can be determined with respect to other sensors by inter-referencing the positions of the intervening sensors.

This capacity to permit portions of this position, orientation and shape measuring tool to be uncoupled along
15 portions of its length from the body or object being measured is especially advantageous when this invention is used to effect motion capture of the human form.

Because of the capacity of the shape measuring tool of the invention to equally track surface segments anywhere
20 along its length, the invention does not require precision location of the instrumented tool with respect to the joints whose angular positions are to be measured. Thus, for example, a loose-fitting, shape measurement glove whose position shifts over a human hand during movement is, if
25 implemented in accordance with the invention, nevertheless

able to provide accurate output signals as to the location and orientations of the various joints of the wearer's hand.

Another potential application of the invention is as a "key board" or device for inputting signals based upon contact and applied pressure. Mounted on a compressible under-support, a ribbon sensor can provide outputs that are indicative of the location of contact, the degree of applied pressure, and provide a third signal according to the amount of twist created. An instrumented planar array positioned over a compressible under-support can provide positional information as to a point of contact in two dimensions. The degree of pressure being applied at a point can provide a further dimension for expression by a user of such "key board".

The foregoing summarizes the principal features of the invention and some of its optional aspects. The invention may be further understood by the description of the preferred embodiments, in conjunction with the drawings, which now follow.

20

SUMMARY OF THE FIGURES

Figure 1 is a schematic of a planar mechanism composed of rotary bending joints and links provided with joint sensors whereby the location in space of the distal end with respect to the base end can be determined;

25

Figure 2 is the mechanism of Figure 1 with an additional rotary-twisting joint present;

Figure 3 is the mechanism of Figure 1 with rotary twisting joints associated with each rotary-bending joint;

5 Figure 4 is the mechanism of Figure 3 with the twisting and bending joints separately disposed within the mechanism;

Figure 5 is a pictorial depiction of a ribbon carrying bend and twist sensors;

10 Figure 6 is a side view of the ribbon of Figure 5 bent into a curve;

Figure 7 is a depiction of a "rope" substrate carrying bend and twist sensors;

15 Figure 8 is a pictorial depiction of a ribbon in space depicting bend and twist;

Figure 9 is a side view of a straight optical fiber with an upper surface treated to absorb light;

Figure 10 is the fiber of Figure 9 in a bent condition;

20 Figure 11 is a plan view of a looped optical fiber with an upper surface treated to absorb light and in planar configuration;

Figure 12 is a side view of Figure 11;

25 Figures 13 and 14 correspond to Figures 11 and 12 with the looped end in a curved configuration;

Figures 15 and 16 are similar to Figures 11 and 12 but with the treated surface present only on half of the loop;

Figure 17 is a right end view of the looped fiber of Figures 15 and 16;

5 Figures 18, 19 and 21 depict the looped fiber of Figures 15, 16 and 17 with treatment of the loops on opposite, opposed sides;

Figure 20 is the looped fiber of Figures 18, 19 and 21 in right end view, in a twisted configuration;

10 Figure 22A illustrates in side view a ribbon in a corrugated formation, resting on a rigid body;

Figure 22B is similar to Figure 22A, but with a second body applying a pressure from above;

15 Figure 22C illustrates a modified form of the ribbon in Figures 22A and 22B, the ribbon of crenulated form;

Figure 22D illustrates, in plan view, a ribbon sensor cut from a flat sheet;

Figure 22E illustrates a serpentine form with thinner hinge sections;

20 Figure 22F is a cross-section through a hinge section, such as on lines A-A or B-B of Figure 22E;

Figure 22G illustrates a sensory ribbon installed in a flexible conduit;

Figure 22H is an end view of the arrangement of Figure 22G;

Figure 23 depicts a single, nested pair of looped sensors on a tape connected to signal processing operational amplifiers to feed a data processing computer and video display;

Figure 24 is a cross-sectional end view through the tape of Figure 23 in the untreated carrier length;

Figure 25 is a cross-sectional end view through the tape of Figure 23 at the treated looped sensor end;

Figure 26 is a pictorial depiction of the sensor of Figure 23 supported by a semi rigid conduit;

Figure 27 is a plan view of a ribbon format sensor with crossed, reflexively operating bend sensors;

Figure 28 is a cross-sectional side view of Figure 27;

Figures 29 and 29A are plan views of half arrays of distributed sensors on ribbon substrates to be placed one over the other to form a laminated sensor;

Figure 30 is a cross-sectional side view of the arrays of Figures 29 and 29a assembled as a laminated sensor;

Figure 31 is a plan view of a ribbon-format sensor with pairs of twin, nested looped sensors deployed in a "Y" configuration;

Figure 32 is a cross-sectional side view of Figure 31;

Figure 33 is a plan view of a ribbon format sensor with pairs of twin, nested looped sensors deployed in an "X" configuration;

Figure 34 is a plan view of a ribbon format sensor with a linear array of twin nested loop sensors;

Figure 35 is a plan view of an assembly of the sensor of Figure 34 to form a planar array;

Figure 36 is a side view of Figure 35;

Figure 37 is a plan view of an assembly of the sensor of Figure 33 to form a planar array;

Figure 38 is a pictorial depiction of a person wearing a ribbon-type sensor to capture motion on a video display; and

Figure 39 is a pictorial depiction, similar to that of Figure 38, with a flexible sensory ribbon wrapped around the arm; and

Figure 40 is a side view of a joystick application of a ribbon-type sensor.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 represents a mechanism 1 in the form of rigid links 2 that are coupled at joints 3 that have parallel axes. This mechanism 1 is therefore free to move or bend in

a single plane. It is anchored to a reference point 4 at one end and may have an end effector 5 at its other end. All of the joints 3 are instrumented to have sensors (not shown) which provide information as to the angular orientation of the joints 3.

It is possible by processing the signals from the sensors and knowing the lengths of each of the links 2 to determine by calculation the distance to and position of the end effector 5 in space with respect to the reference point 4.

In fact, the positions of all joints 3, and locations therebetween on specific links 2, can be calculated by interpolation.

With rigid links and mechanical joints it has not been possible in the past to multiply such elements to a number which is large enough to provide a shape or position measuring tool which has a high capacity for compliance with an irregularly curved surface. Further, the mechanism of Figure 1 is limited to motion in a single plane.

Figure 2 depicts a modified mechanism 22 to that of Figure 1 that contains an additional "twist" joint 6 that also carries a sensor to indicate its rotational position. This twist joint 6 enables the end effector 5 to rotate out of the plane to which the mechanism 1 of Figure 1 is confined, giving it access to a volume of three dimensional space.

Figure 3 shows a generalized expansion of the mechanism 22 of Figure 2 wherein multiple twist joints 6 are provided, shown co-located with bending joints 3, along the length of the modified mechanism 23. Figure 4 shows a similar
5 generalized expansion to provide a mechanism 24 wherein the bend 3 and twist 6 joints are distributed along the length of the mechanism 24 without necessarily being co-located.

The mechanisms of Figures 3 and 4 have the mechanical capability of conforming to some degree to a
10 surface that is curved in three dimensions. However, with the use of rigid links and mechanical joints, such elements could not in the past be multiplied to provide a measuring tool with a high capacity for compliance with a curved surface.

Referring again to Figure 1, it is possible to
15 calculate the location in two dimensions of the end effector 5 and each joint 3 with respect to the reference point 4 using simple geometry based upon the length of each link 2 and the angular setting 26 of each joint 3. Similarly, such parameters can be calculated in three dimensional space for
20 the mechanisms 22, 23, 24 of Figures 2, 3 and 4. To indicate this the symbols for x, y and z coordinates are provided opposite the end effector 5 in each of these Figures.

The invention carries this methodology into effect by providing a flexible substrate 8, 21 to serve as a carrier
25 for a series of flexure-detecting sensors 10, 11 distributed

along its length. This substrate, as shown in Figures 5, 6 may have a reference surface 28 which may be applied against the outer surface of an object to extract a profile therefrom based on signals received from the sensors indicating their
5 angular orientations.

This technique of measuring shape by sampling curvature and twist using a flexible substrate 8 with a reference surface 28 can be applied if the curvatures and twists being measured are not permitted to take on sharp
10 gradients, or if the sensor spacing is sufficiently small to adequately sample the gradients. The spacing and individual range of sensors determines the permissible range of operation for the sensor array.

In Figure 5, a shape and position measuring tool 7
15 is shown that relies upon a flexible substrate 8 shaped in the form of a ribbon 8. A "ribbon" describes herein a body of flexible material that is essentially inextensible, has a longitudinal dimension 12 of considerable length compared to its width 13 and depth 14 and whose width 13 is so much
20 greater than its depth that bending of the body is limited substantially to bending about axes 15, 15a which are transverse to the longitudinal dimension 12 of the ribbon. A ribbon is, however, free to twist. For this reason the transverse bending axes 15, 15a are not necessarily parallel.

Figure 8 depicts a ribbon 8 with arrows indicating both bending and twisting.

In Figure 5 a ribbon substrate 8 has distributed along and attached to its exposed surface 9 a series of bend 5 10 and twist 11 sensors. These are schematically depicted as essentially point objects. In fact, all such sensors 10, 11 are coupled to a signal processing unit (not shown in Figure 5) that receives signals from such sensors 10, 11.

In Figure 6, the ribbon 8 of Figure 5 is shown in a 10 side view when bent within a single plane, without twist being present. The curvature between two points 16, 17 proximate to bend sensors 10 may be approximated as a circular arc 18 about a center 19. This approximation will be sufficient to provide reasonable accuracy if the ribbon 8 bends in a well-behaved 15 manner e.g. if the ribbon 8 has relatively constant thickness 14 and flexing characteristic, and if the sensors 10 are sufficiently dense in their distribution along the substrate 8.

The curvature between points 16 and 17 can be 20 estimated by the state of measured curvature at points 16,17 as measured by the bend sensors 10,10 located at those positions. If these curvatures differ, an average curvature, or a curvature value based upon further adjacent curvature measurements, may be taken as the approximated curvature for 25 the arc 18.

Knowing the value of the curvature of the arc 18 and the arc length, being essentially the separation of the sensors 10 distributed along the ribbon 8, the position of a consecutive point 17 can be calculated with reference to an adjacent point 16. This type of inter-referencing calculation can proceed from a base end of a ribbon 8 to a terminal end. Such a calculation will provide geometric values for the positions of all of the sensors 10, 11 in space, plus by extrapolation for any intermediate locations on the ribbon 8.

The above explanation has been made for simplicity by reference to the bend sensors 10 only. Similar calculations can incorporate data received from the twist sensors 11 to provide geometric data in three dimensional space.

If a flat untwisted section of substrate 8 has two parallel ends, then twist is defined as the angular difference between the ends when a twist is applied. When the substrate 8 is also bent, the twist is interpreted to be the same as that present in, say, a thin cylindrical driveshaft along its long axis, i.e. the twist remains invariant as the shaft is bent. When this happens, the end lines are no longer in parallel planes.

If twist alone is applied to a straight section of the substrate 8, then the twist will not affect the position

of the longitudinal axis line 12 until a section is reached which has a bend.

A model of the substrate's shape may be constructed in a computer, based on the above calculus. A convenient
5 means of presenting the model visually is to draw the arcs in sequence, using small flat sub-arc segments, so that twist is also visible even for straight arc segments. Refinements may be added by use of interpolation, averaging, and other conventional curve fitting techniques.

10 Figure 6 has demonstrated the invention for simplicity by reference to a ribbon substrate 8, as defined above. Figure 7 depicts, for visual impact, a "rope" 20 provided with bend and twist sensors 10, 11 along its entire length. Again, similar calculations based on the signals
15 received from such sensors can calculate the geometric orientation of such a fully flexible substrate in space. While a "rope" 20 is pictorially depicted, in practice the fully flexible substrate 21 could be a length of extruded rubber or flexible polymeric material within which the sensors
20 may be embedded. If this flexure has a hollow core, such core may be used to route the leads carrying signals from the flexure sensors. Another alternative is to "cage" a ribbon-format substrate in a cylindrical tube, such as a longitudinally split corrugated tube used to shield electrical

wire. This constrains to the substrate to be more manageable or "well behaved" when being bent around an object.

A further alternative is to employ a substrate with limited bending freedom as by using a rod with a square cross-
5 section that is treated with transverse grooves to permit bending while retaining a resistance to twisting. With such "mechanical filtering" present, only bend sensors need be employed.

In Figure 6, two bend sensors 10 for every single
10 twist sensor 11 are depicted. This is to ensure that bend in two directions rather than only in a single plane can be detected. While the bend sensors 10 are depicted as being co-located, this is not a necessary requirement. It is sufficient for all sensors 10, 11 to be distributed along the
15 substrate 21 so that their signal values can be combined with the signal values of other sensors to permit calculation of the geometric disposition of the substrate 21.

Sensors suitable for bend and twist measurements include fiber optic bend and strain sensors; conductive
20 elastomer sensors of bend and extension generally referred to as force sensitive resistors (FSRs), bend sensitive resistors (BSRs) and piezoresistive sensors; electrical strain gauges including bonded wire and semiconductor forms; and any other sensors capable of measuring bending, extension, and torsion,
25 including capacitive, magnetic, and piezoelectric methods.

Fiber optic sensors such as those described in U.S. patent 5,321,257 and PCT publication WO 94/29671 (application PCT/94CA/00314) are well suited for this application because these sensors are immune to electromagnetic interference and will function in the neutral axis of a flexure, where there is no strain. The type of fiber optic sensors referred to in these publications can be classified as "Bend Enhanced Fibers".

Bend Enhanced Fiber sensors (BEF) are based on the loss of light from a light guide in a zone where the core/cladding interface has been treated and modified such that light striking the modified zone is lost from the core and does not return. In BEF sensors, a nominally straight fiber is treated on one side so that light loss increases as the light guide bends to make the straight treated zone more convex and decreases as the guide bends the other way.

Straight and bent BEF sensors are respectively shown in Figures 9 and 10. The treated portions on the top surface are shown in black. The geometry is such that the modulation of the intensity of light travelling through the fiber is linear with curvature of the fiber. Output is bipolar about the straight shape. Modulation by curvature in the treated zone has been measured to be 3000 times that produced by curvature of untreated light guides.

In loop sensors, the treatment is on one face of the light guide loop 33 (see Figures 11 and 12), and modulation occurs when the loop 33 is bent out of its plane 34 (see Figures 13 and 14). The treated surface 32 in Figures 11 and 5 13 is shown as shaded. In Figures 12 and 14 it is shown as a darkened line.

Figures 15, 16 and 17 show a looped sensor 35 wherein the treated zone 32 occurs on the portion of the loop 33 leading up to the region of reversing curvature 36. It is 10 not necessary for this reversing region 36 to be treated, although this is optional. As well, the opposite half of the loop 33 may remain untreated.

Throughput and modulation efficiencies are particularly high for loop sensors. The combination of 15 treated zones 32 on the light guide surface and the tight loops is synergistic. A treated zone 32 on top of the light guide emphasizes loss of light in modes that would not pass freely by the nearby tight loop when the loop is straight, so there is little penalty for introducing a tightly curved (and 20 therefore lossy) loop 33 in the light guide. However, when the loop 33 is bent out of its plane, the loss zones interact strongly with modes that would otherwise travel freely around the loop 33, resulting in efficient modulation.

As a further variant on looped sensors, a twist 25 sensor as shown in Figures 18-21 may be formed in a loop 33

having a bisecting, median line 46 by treating loop 33 on only half of each outwardly facing surface portion and doing so on opposite faces 47, on opposite halves of the loop 33. A loop 33 so treated is shown in Figures 19 to 21 with the treated portion 32 shown as being raised for clarity. For Figure 21 the loop 33 is flat. If bent upwardly or downwardly transversely to the median line 46, the treated surfaces 32 will have opposite effects that cancel. Accordingly, bending is not sensed. However, as shown in Figure 20 the loop 33 is twisted about its median line 46, the modulating effects of the treated surface portions 32 are additive, providing an enhanced measurement of twist.

Figure 22A shows a side view of a ribbon 8 in "corrugated" configuration. It has been made so that at rest, with no forces applied, it is bent out of its plane in one degree of freedom, with sinuations that repeat at multiples of the sensor spacing. In this case, the sinuations have the same spatial frequency as the sensor pairs 50, indicated by boxes 51 on opposite sides of the ribbon. The ribbon is resting on a rigid body 52, such that its mean locus, indicated in the side view by the dashed line 53, takes on the shape of the rigid body. The computer image of the ribbon will look like the figure, i.e. a surface that sinuates in space but whose mean position and orientation can be found by

an averaging or spatial filtering process that eliminates the situations, leaving the mean surface.

Figure 22B shows the same corrugated ribbon 8 but now with a second body 54, applying a pressure from above.

5 The computer image will now show a diminution of the situation amplitude in the region of applied pressure, yet still contains information on the shape of the underlying surface, both in the area of applied pressure and beyond the area of applied pressure. For a combined pressure and shape sensor,

10 the sensor spacing implies a minimum spatial frequency that either body may have without its pressure field or shape field causing an error in the measured shape or pressure data. The spatial features of the bodies must have no spatial frequency components greater in frequency than those of the sensor

15 spacing, and the situations must be in phase with the sensor spacings. This rule is analogous to the principles of photography, whereby it is not valid to photograph features in the image plane smaller than the grain size of the photographic emulsion.

20 This demonstrates a method of measuring both pressure and shape using a pre-sinuated sensory ribbon. It should be obvious that situation as shown in the figure is not the only means of obtaining shape and pressure information simultaneously. For instance, the ribbon could have regular

25 variations in twist, or could be crenulated, with stiff 90

degree bends 55 between sensors locations, as shown in Figure 22C in an elevation with height exaggerated. In the case of Figure 22C, pressure will cause an increase in the bending signal from affected sensors, but the mean shape will be
5 unaffected if the spatial frequency restriction is satisfied.

Figure 22D shows a plan view of a ribbon sensor 8 cut from a flat sheet, such that at rest it lies in a plane but is sinuated from side to side in a "serpentine" configuration. The X's 56 show the locations of bend and
10 twist sensing pairs. In some cases it will be sufficient to locate these pairs only at the center of each straight leg, thereby reducing the number of sensors required. Variations on the serpentine form include zig zags and 90 degree turns, resembling triangle and square waveforms respectively. Such
15 forms may be fitted to fabrics or other substrates which may then be curved or bent to make garments, seat covers, or other conformable surfaces. When twisted, the form of Figure 22D will produce bend signals only. When bent along its long axis, twist signals will result. In this respect, it acts as
20 a converse case of a straight ribbon.

Figure 22E shows a serpentine form that is stiff everywhere but at thinner hinge sections 58 designed to permit bending only, without twist. The hinge sections are produced by thinning the substrate as shown in cross section 22F. At
25 the hinge sections are located bend sensors indicated

schematically by the box forms 60. The serpentine form of Figure 22E is a sensor array that uses bend only sensors, yet is capable of transmitting full 3 dimensional information to a computer.

5 Figure 22G shows a side view of a flexible plastic conduit 61 having corrugations in its wall and a slit at the top. A sensory device 62 is installed extending along the conduit, in the slit, extending out of the conduit. The end view of Figure 22H shows the sensory ribbon 63 to the left and
10 a stiffening band 64 of spring steel to the right, both projecting out of the slit in the top of the conduit. Not shown are "O" rings spaced at regular intervals to keep the ribbon and steel band from working out of the conduit when it is bent. The advantage of adding conduit is twofold: it
15 helps to distribute curvature between sensor locations, thus acting as a low pass mechanical filter that minimizes errors due to sharp bending, while allowing overall freedom of bending and twisting; and it allows an easy means of adding or removing stiffening to the ribbon. The ribbon and any
20 stiffener band are held at the slit and at the opposite inner surface of the conduit. They are thus at the neutral axis of the conduit with respect to bends out of the plane of the ribbon, so the force required to bend them is minimal and slippage between the ribbon, band, and conduit are minimized.

The conduit also provides a means of adding wires or hoses to the construction.

Intensity based sensors are attractive for low cost applications because signal processing can be very simple.

5 However, intensity in a light guide can be a function of many things other than the measurand (curvature). Unwanted intensity modulators include:

- Variations in optical connections
- Bending of leads
- 10 - Aging of light source
- Aging of light guides
- Effect of temperature on light sources and detectors.

One technique to reduce balancing requirements between fibers is to form a "lossie" zone, as by abrading or heating a local
15 point in order to adjust the throughput of individual leads.

Looped fiber optic technology overcomes these obstacles by using an optical and electronic bridging technique involving two opposed laminated loops. A standard balanced loop sensor configuration is shown in Figure 23,
20 wherein two "nested" loops 37 are employed.

The four leads 38 are kept parallel and contiguous, arranged in a plane inside sealed laminations, as seen in Figure 24. This reduces the predominant degrees of freedom for lead bending from two to one. One LED light source 40 is
25 used to illuminate both loops, and is controlled through an

integrator 43 to keep the sum of the loop throughputs constant. The controlled throughputs include optical and electronic signals (i.e. LED, light guides, photodiodes, and amplifiers). The constant sum technique for controlling the
5 LED 40 simultaneously overcomes common mode modulations due to aging or temperature effects on optoelectronic devices and light guides, and bending of the leads.

However, the measurand (curvature) is not in common mode because the two loops 37 are treated on opposite,
10 outwardly directed, faces 40,41, as seen in Figure 25, so that a given bend causes throughput to increase in one and decrease in the other. The signals are linear so they may be subtracted in an operational amplifier 42 to yield an output signal linear with curvature and unaffected by common mode
15 errors. Because of the subtraction, the resulting signal is also twice as large as that from a single loop 33.

The resulting complete sensing system amounts to an optoelectronic balanced bridge which produces a high level electrical output using one quad operational amplifier 42.
20 The circuit functions to produce a high level output signal that rejects common mode errors.

A practical low cost sensor may be manufactured by forming nested loops 37 around pins on 1 cm centers, in situ treatment to create loss zones, and in situ application of
25 laminations 39 which hold the loops 37 and leads 38 in plane.

The leads 38 may be laid-out in a slightly sinuous or "wavy" pattern to protect them from tensional stress. Present lead length capacity has been demonstrated at 5.5 meters, but can be expanded. Standard laminations with outer layers of latex 5 rubber, and two part polyurethane core filler 44 between, are 1.2 mm thick x 7 mm wide, and contain 0.5 mm diameter fibers 38 with a polymethylmethacrylate core. Smaller laminations are possible using 0.25 mm diameter fiber 38. The standard, treated, sensitive zone 33 is 12 mm long for 0.5mm fibers and 10 6 mm long for 0.25 mm fibers. A typical sensor is shown in Figure 26.

Twist and bend sensors of the looped type may be nested so that they are intimately co-located along the substrate.

15 While looped sensors have been described in detail, certain advantageous deployment of sensors along a substrate will be depicted in Figures 27-30 using simplified symbols. These "hockey stick" images 50 may be taken as Treated Bend Enhanced Fiber Sensors 51 with reflective ends 52 that act in 20 reflexive mode in the known manner. The "blade" portions 53 of each image 50, are treated and positioned to be sensitive to bending about axes 15 that are at an angle to the blade's length.

In Figure 27 the sensors are laid-out in crossed 25 formats with the sensing portions 53 overlying the median line

54 of the substrate. For clarity the depiction of the leads
55 is broken with the intervening carrier portions omitted.
The signals from each pair of sensors, however, may be fed to
operational amplifiers as described above to extract their
5 sums and differences. If the sensing portions are located on
the same faces (outwardly or inwardly directed) then the sums
of the signals will measure bending and the differences will
measure twist.

While Figures 27 and 28 depict crossed sensor pairs
10 on a single substrate 8, Figures 29 to 30 show two partially
instrumented substrates 8,8a which, when assembled as a
lamination 56 with the sensors in the center, form a sensor
assembly 56 with the sensors effectively embedded within a
collective "substrate", positioned conveniently along the
15 neutral axes of the assembly 56.

Instead of mounting the sensor blades 53 together in
pairs on the substrate 8, half of each pair may be laid-down
initially as shown in Figure 29 and a second nearly identical
substrate with loops as in Figure 29a may be laid over the
20 first. The treated surfaces 53 of Figures 29,29a must be on
opposite faces to achieve the same configuration as Figure 27.
If treated on the same faces in Figures 29,29a the outputs
from the operational amplifier 42 will be reversed in
measuring bend and twist. To add stiffness and prevent one

sensor of a pair from bending the other, a ribbon of rubber, plastic or metal may be placed between the two substrates.

Once the two substrates are assembled, the two may be laminated together to provide dual sets of sensors with all
5 leads exiting at the same end. A side view of the resulting lamination 56 is shown in Figure 30. As an alternative to having the optical fibers directly adjacent to each other the substrates 8, 8a may be connected so that the fibers are on the outside of a common core substrate.

10 If identical half-substrates are built, when assembled the treated surface portions face in opposite, outward directions. Nevertheless, by taking sums and differences of the outputs of respective members of each pair of sensors, twist and bend values are still provided.

15 By bonding the two outer substrates 8 along their edges 57 only, an interior space 58 is formed wherein the leads 55 for each sensor 51 may be routed in a loose form. This provides a tool which is flexible and avoids placing unnecessary stresses on the leads 55 of the sensors.

20 In the same manner as depicted for the reflexive fiber sensor 51, looped sensors 33 may be distributed along a substrate 8. Figures 31 and 33 show two modes for co-locating nested twin looped sensors in pairs that measure bend and twist simultaneously. Figure 32 is a cross-sectional view

through Figure 31 showing raised surfaces 32 where the loops 33 carry treated surface portions 32.

In Figure 31 the loops 33 are separated in a "Y" configuration; in Figure 33 they overlap in an "X" configuration. In both Figures 31 and 33 the median lines 46 of the loops 33 are angled outwardly from the median line 54 of the substrate 8. This angle 59 is preferably equal for sensors 33 on both sides of the substrate 8. This allows both bend and twist values to be obtained by summing and adding outputs. If the angle 59 is 45 degrees, maximum, direct signal strengths corresponding to bend and twist are obtained.

In Figure 34 a string of nested looped sensors 37 are shown linearly deployed on a ribbon substrate 8. Either the nested loops may alternate as bend and twist sensors, or within each nested pair, one sensor may measure bending and the other twist.

Planar arrays 60 of sensors may be assembled by bonding the edges of ribbon substrates 8 together to form a carrier sheet 8a. This is depicted in two different formats corresponding to prior Figures 34 and 33 in the planar arrays 60 of Figures 35 and 37. Alternately, in a manner analogous to that depicted in Figures 29 and 30, sensors may be bonded to two flexible sheets which serve as carriers, and these sheets may be over-laid and bonded to form an instrumented planar shape sensing tool.

This invention has been built and demonstrated in planar tape form with 8 sensor pairs, each pair collectively measuring bend and twist. Loops in fibers of 0.25 mm diameter were formed and treated for bend sensitivity according to the procedures of U.S. patent 5,531,257, Patent Cooperation Treaty application PCT/CA94/00314, and the SPIE Article SPIE Vol. 2839, pp. 311-322, 1996). These were affixed in pairs every 5 cm at 45 degrees to the long axis of a latex substrate 0.32 mm thick, 12 mm wide. The light loss portions of the fibers faced way, i.e. were outwardly directed, from the substrate; the apexes of the loops were approximately 1 mm inside the edge of the substrate. Sensors were in pairs, in crossed form, with facing light loss zones so that the sensitized portion of each loop crossed the axial center of the substrate. The leads of the loops were bent and led axially to beyond the end of each substrate with the leads being no closer than 1 mm to the edge.

During the process, fiber leads (38 in Figure 25) were kept in order in pairs on organizer cards. A fiber from each pair was connected to a light emitting diode (LED) 40. Generally 8 or more fibers 38 can be illuminated by the same LED. The other fiber from each pair was connected to a photodiode 61, one fiber per photodiode. Conventional transimpedance amplifiers 62 converted photodiode current to voltage. These voltages were fed to sum and difference

amplifiers 42 (or may be digitized immediately). Analog sums and differences were digitized and fed to a computer 61 for further processing.

Calibration Procedure

5 The preferred embodiment of the invention consists of pairs of fiber optic sensors operating within ranges for which light intensity throughput of each individual sensor changes linearly with curvature. When the invention is flat (no curvatures are applied), it is desirable to have all of
10 the intensities equal, so that when pair wise sums and differences are taken, all the differences will be the zero, and all the sums will be the same positive value. This reduces computational overhead and ensures minimal interaction between bend and twist outputs.

15 As a convenient method for adjusting the light intensities use of micro-bend fiber optic "resistors" may be made by sandwiching untreated sections of the fibers between layers of metal and blackened elastomer which are resilient but stiff enough to retain an applied bend. For example, a
20 sandwich is made of the following 4 x 20 mm layers: black vinyl tape, black double sided adhesive tape, fiber along the 20 mm dimension at the center, black vinyl tape, 0.010" brass. Optical signals may be routed through fibers contained within these sandwiches and bent to adjust the signals to all take on
25 the lowest value, so that all are equal. This adjustment

method allows repeated reduction and restitution within broad limits, so that adjustment can be quite precise and forgiving of initial errors.

Once the individual sensor values are equal, then
5 the digitized outputs from the light sensors may be conveyed to a computer. An alternative is to first take sums and differences in analog form, and then send these to a computer. For either case, we may now address the calibration of the values representing bends and twists (or bends, bends and
10 twist, in the computer.

Since the preferred embodiment sensors are linear, the sums and differences will be linear also. In order to calibrate the invention, we need only calibrate at two points of each of the bend and twist ranges. A preferred method of
15 calibrating the invention for bend in its ribbon or tape format is to first lay the tape flat and set all the bend values in the computer to zero. Then the invention can be formed into a hoop on a cylindrical mandrel, and gains (multiplicative positive or negative numbers) can be applied
20 to each bend value until all computer bend values are equal to a constant that corresponds to the uniform curvature seen at the circumference of the mandrel. Since no offsets (added or subtracted values) have been applied, the computer "image" of the tape will contain all zeroes when the tape is again laid
25 flat.

In similar fashion, the twist values may first be set to zero with the tape flat, then gains may be applied when the tape is held straight but has a uniform twist applied over its full length by means of a fixture holding the ends at
5 different angles of rotation about the long axis. An example would be mounting the tape axially in a lathe and rotating the lathe head a known amount.

A preferred method of calibrating both twist and bend simultaneously is to first set bend and twist values to
10 zero while the tape is held flat, then to form the tape in a uniform helix around a cylindrical mandrel. Since a helix has a constant curvature and a constant, distributed twist, gains may be applied to all the bends and separately to all the twists to obtain a computer image of the helix.

15 The above mandrel-based calibration procedures may be automated in the computer, since all desired bend and twist values are known a priori from the mandrel information, and do not interact. The procedure is simply one of creating a look-up table of gains such that for each bend signal, the bend
20 signal times its assigned gain equals a constant, and a similar procedure for twists.

For sensors that are not linear, a similar procedure may be used, but more than two points will have to be calibrated, requiring more mandrels and more steps.

25 Accuracy and Precision

Precision (resolution) is defined as what can be resolved over noise, not counting long term drift.

Accuracy is defined as what can be measured to an absolute scale, even in the presence of long term drift.

5 Precision determined from empirical measurement based on prototype versions of the invention has been established as being about 1-3 mm per meter of ribbon substrate length. A precision calculation based on 0.02 deg
10 of resolution for each bend sensor and using 20 pairs of sensors at 5 cm spacing on 1 meter of tape provides a worst case value of 0.35mm, rms = 0.09 mm per meter of tape.

Absolute accuracy, influenced mainly by long term drift, was calculated based on an assumption of 1% drift over 2 months, of a standard sensor. For a 1 meter, 20 pair tape,
15 a worst case error of 0.5 cm/month, and rms value of 1.1 mm/month is obtained. In general, the errors will not add. The error contribution to end point position is greater for segments of tape closer to the fixed reference point.

The invention is depicted in use in a human motion
20 capture application in Figures 38 and 39. In Figure 38 a ribbon-type, tape substrate is mounted along the upper arm 63, forearm 64, and hand 65 of a wearer. The sensor leads 66 terminate in a terminal box 67 mounted conveniently on outer clothing which feeds signals 68 to a computer 69. The
25 instrumented tape is affixed to desired body portions by

adhesive tape 70. No critical attachment points are dictated by the tape, although computational efficiency may be associated with preferred locations.

While the tape is capable of actually measuring the shape of the surface to which it conforms, e.g. the forearm 64, it may suffice to extract only orientations of the limbs for certain segments of the routing of the tape. At the hands 65, data as to shape as well as orientation may be extracted.

Conveniently, loops 71 may be formed at the elbow and wrists from which no data need be collected, other than the locations of the bounding ends of the shape and orientation measuring portions. These disconnected segments 71 may extend freely into space, fully unconstrained. Advantageously, they provide comfort and mobility to the wearer.

Figure 39 shows a sensory ribbon in a conduit, affixed to a person's arm. The configuration and purpose are the same as Figure 38, except that the ribbon and conduit are arranged in a helix form around the arm. The sensing ribbon 8 is flexible, wrapped around the arm, and also having a sensing portion 73 which is attached to at least one finger. Sensor portion 73 detects and provides measurement of the finger movement, for example when actuating a switch. This produces a computer image that follows the surface of the arm, such that the image has some of the elements of a closed

volume. The conduit is not necessary to this configuration, but can reduce the number of sensors required, by smoothing the curves. Not only can a central surface or line representing hinged links to model a "stick figure" of the arm, be derived from the image, but the image can be used to model bulging muscles or other changes linked to volume or shape of the surface. In a similar manner, the helix or other sinuated or serpentine shape could be used to create a volumetric model of other human or animal parts, or of any other physical body. For instance, sensory ribbons can be used to image changes to the torso volume or shape during breathing.

While the terminal box 67 may serve as a reference point for defining position, orientation and shape of measured surfaces in space, any point on the tape can equally serve as the reference point. This may include a bony protrusion on the collar bone or the nape of the neck over which the tape passes. This provides exceptional convenience in motion capture technology since the tape is then referenced to a defined location on the human skeleton.

The output from the computer 69, as with all applications of the invention, can provide a video display 72 of the geometric configuration of the shape measuring tool in space, and of the surface to which it is attached.

As a further example of the use of the invention, Figure 40 depicts a planar axial flexure 78 arranged in an arch or sinuous form, supported by a reference 74 surface at one end and terminating at the free end with a body 75 capable
5 of cartesian positioning and orientation x, y, z location and roll, pitch, and yaw orientations. The terminating body 75 may be a knob with a switch or button that serves as an actuated joy-stick to send positional signals 76 in 6 degrees of freedom to a controlled system, e.g. a robot.

10 CONCLUSION

The foregoing has constituted a description of specific embodiments showing how the invention may be applied and put into use. These embodiments are only exemplary. The invention in its broadest, and more specific aspects, is
15 further described and defined in the claims which now follow.

These claims, and the language used therein, are to be understood in terms of the variants of the invention which have been described. They are not to be restricted to such variants, but are to be read as covering the full scope of the
20 invention as is implicit within the invention and the disclosure that has been provided herein.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY IS CLAIMED ARE AS FOLLOWS:

1. A measuring tool comprising:

5 (1) a flexible substrate capable of bending in least two degrees of freedom;

(2) spaced flexure sensors, coupled to and positioned at known flexure sensor spacing intervals along the substrate to provide flexure signals indicating the local state of flexure present in the substrate in
10 said two degrees of freedom at the locations where the flexure sensors are coupled to the substrate; and

(3) sensor data processing means coupled to the flexure sensors for receiving flexure signals therefrom and
15 for presenting data on the geometric configuration of the substrate in three dimensional space

wherein the sensor data processing means operates by extrapolating the geometric configuration of the substrate from the flexure signals provided by the flexure sensors and
20 the spacings intervals between such sensors.

2. A measuring tool as in claim 1 wherein the flexure sensors comprise twist and bend sensors positioned at known bend and twist sensor spacing intervals along the length of the substrate to provide signals indicating the local state of

bend and twist present in the substrate at the locations where the bend and twist sensors are attached to the substrate.

3. A measuring tool as in claim 2 wherein the shape of the substrate is in the form of a ribbon having a longitudinal
5 dimension, the substrate being substantially limited to bending along its length about axes which are transverse to the longitudinal dimension of the substrate but free to twist.

4. A measuring tool as in claim 3 wherein the bend and twist sensors comprise pairs of bend sensors co-located at
10 locations along the substrate and respectively positioned to measure bending occurring transversely to lines on the ribbon which are respectively oriented outwardly at substantially the same angle from the longitudinal dimension of the ribbon.

5. A measuring tool as in claim 3 wherein the bend and
15 twist sensors comprise optical fibers that have been rendered sensitive to their state of curvature by having treated surface portions of their outer surfaces rendered absorbent to light passing through such fibers.

6. A measuring tool as in claim 5 wherein the optical
20 fibers have reversing loops and the fibers have been rendered

sensitive to their state of curvature in the region of the loops.

7. A measuring tool as in claim 6 wherein the reversing loops of the twist sensors define bisecting median lines, the median lines of the loops being aligned with the longitudinal dimension of the substrate, the loops having outwardly directed surfaces formed parallel to the plane of the substrate, and the treated surface portions being located on the outwardly directed surfaces of the fibers on only opposite halves and opposite, outwardly-directed surfaces of the loops.

8. A measuring tool as in claim 1 wherein:

- (1) the sensors comprise optical fibers that have been rendered sensitive to their state of curvature by having treated surface portions of their outer surfaces rendered absorbent to light passing through such fibers;
- (2) the fibers have reversing loops and the treated surface portions are located in the region of the loops;
- (3) the reversing loops define median lines;
- (4) the loops are mounted in pairs along the substrate, the substrate having a longitudinal dimension and a sensor-carrying surface;

- (5) the planes of the loops are parallel to the surface of the substrate; and
- (6) the median lines of the loops are oriented at substantially 90 degrees to each other and at 45 degrees to the longitudinal dimension of the substrate.

9. A measuring tool as in claims 6, 7 or 8 wherein the loops are mounted in nested pairs, the treated surface portions of the fibers being located at complimentary portions in the region of the loops whereby, when the nested loops undergo a common change in curvature, the intensity of light passing through the respective loops in each pair changes value in opposite directions.

10. A measuring tool as in claim 9 wherein the complimentary portions of the fiber loops rendered sensitive to curvature are respectively positioned on opposite, outwardly directed face surfaces portions of the surfaces of the respective fibers to permit the difference in their outputs to be used as a measure of curvature.

11. A geometric configuration monitoring tool with a shape monitoring reference surface for measuring the relative location and orientation in three dimensional space of a

surface to be measured with respect to a reference location comprising:

(1) a flexible substrate capable of flexure in three dimensional space which carries said shape monitoring reference surface and reference location; and

(2) a plurality of angular displacement sensors spaced at known intervals along said substrate

whereby the position and orientation in three dimensional space of said shape monitoring reference surface with respect to the said reference location is determinable geometrically from the values for angular displacement provided by the angular displacement sensors at their respective locations along said substrate, combined with the values for the intervals separating such sensors.

12. A tool as in claim 11 wherein said angular displacement sensors are bend and twist sensors.

13. A tool as in claim 12 wherein said bend and twist sensors are interspersed with each other.

14. A tool as in claim 12 wherein said bend and twist sensors are co-located with each other.

15. A tool as in claims 12, 13 or 14 wherein said substrate is in the form of a ribbon-like configuration with a longitudinal extent carrying the reference surface on one side, said ribbon-like structure being free along its length
5 to flex about axes that are transverse to its longitudinal extent but resistant to flexure about axes that are perpendicular to the longitudinal extent of the ribbon.

16. A tool as in claims 11, 12, 13 or 14 for measuring the relative location and orientation in space of first and
10 second surfaces to be measured with respect to each other, said tool having:

- (1) a first portion of the shape monitoring reference surface lying for placement adjacent to a first surface to be measured; and
- 15 (2) a second portion of the shape monitoring reference surface lying for placement adjacent to a second surface to be measured,

wherein the first and second portions of the shape monitoring reference surface bound an intermediate portion of the
20 monitoring tool which is free to be unconstrained in space except at its juncture with said first and second portions of the shape monitoring reference surface.

17. A tool as in claims 11, 12, 13 or 14 wherein said substrate is planar, carrying the reference surface on one reference surface side and having bend sensors positioned on the other sensor side of the reference surface.

5 18. A method of detecting and measuring the deflection of a substrate, comprising attaching flexure sensors to said substrate along a path thereon, at predetermined intervals collecting flexure signals from said sensors, and processing said signals to produce data on the geometric configuration of
10 the substrate in three dimensional space, said processing and said signals operating by extrapolating the geometric configuration of the substrate from the flexure signals and the spacing intervals.

19. A method as claimed in claim 18 comprising attaching
15 bend sensors and twist sensors at said predetermined intervals and collecting signals indicative of bending and of twisting of said substrate.

20. A method as claimed in claim 19, the substrate in the form of a ribbon having a longitudinal dimension and
20 limited to bending, along its length, about axes transverse to the longitudinal dimension.

21. A method as claimed in claim 19, said sensors comprising optical fibres rendered sensitive to their state of curvature by having treated surface portions of their outer surfaces rendered absorbent and light passing through the
5 fibers.

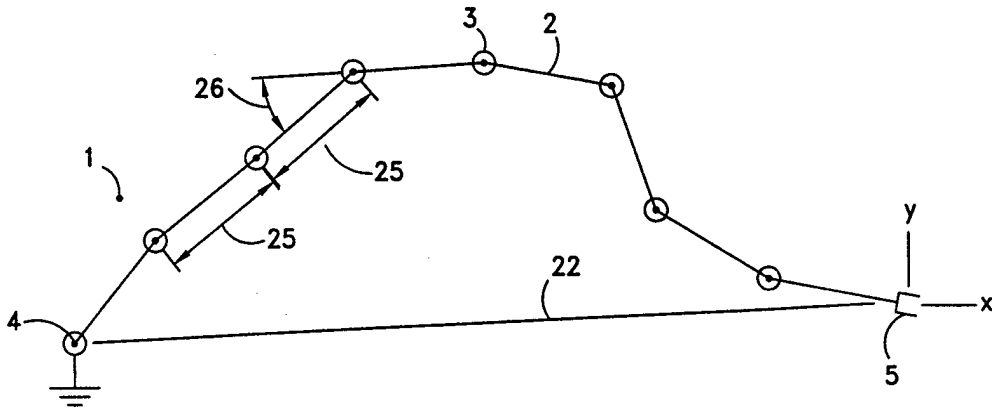


FIG. 1

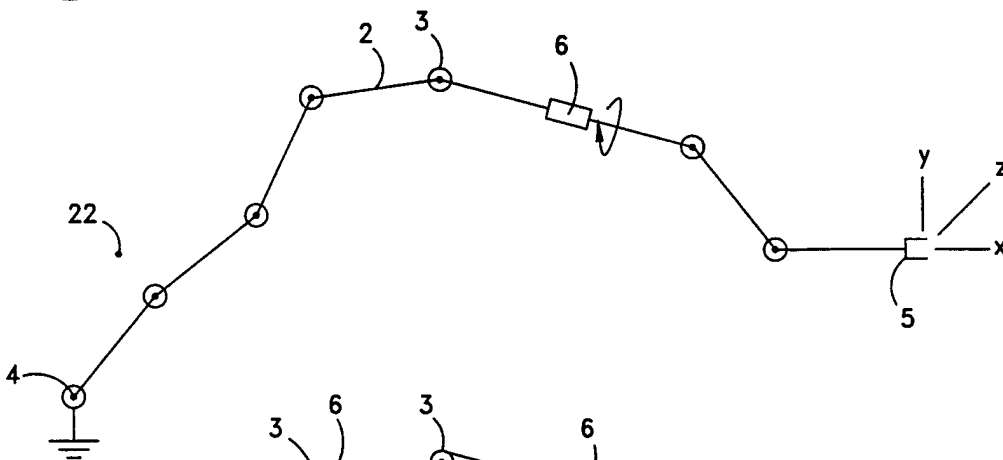


FIG. 2

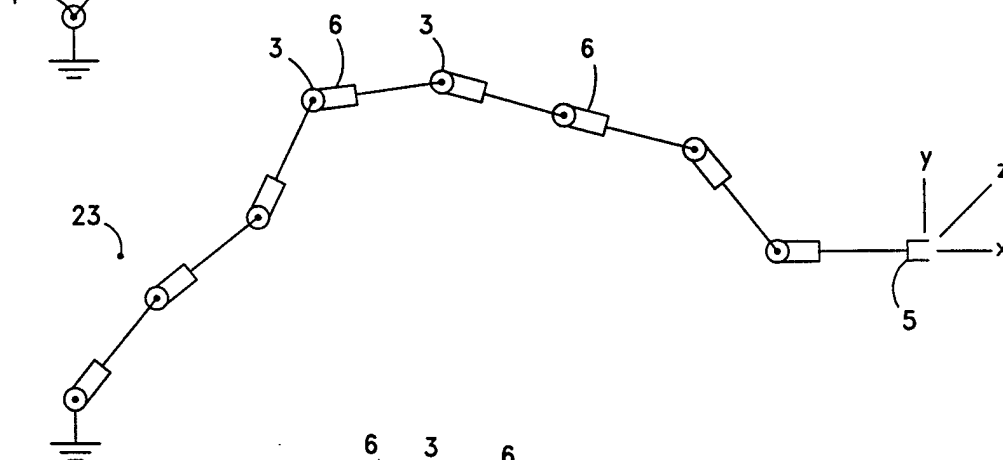


FIG. 3

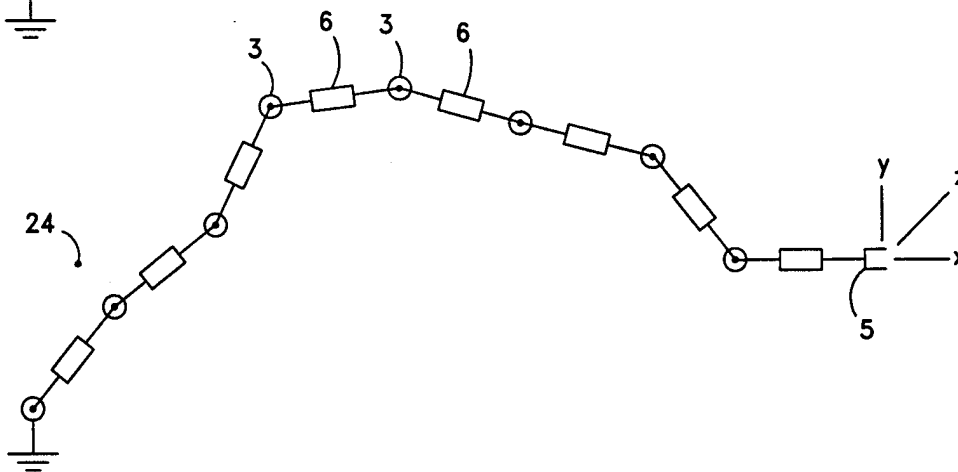


FIG. 4

FIG. 5

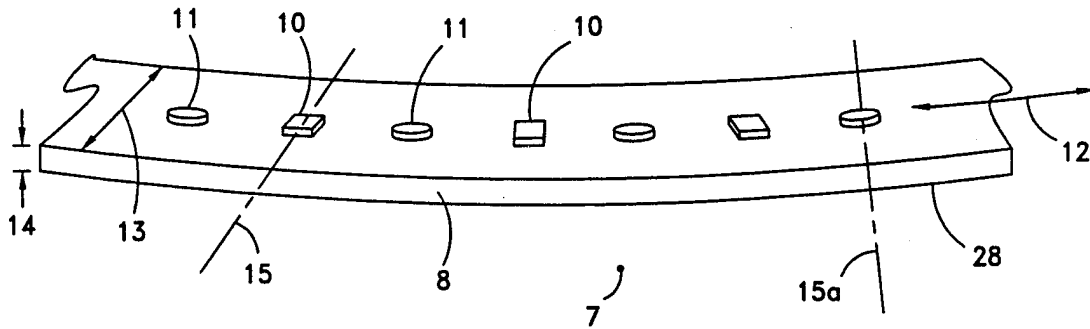


FIG. 6

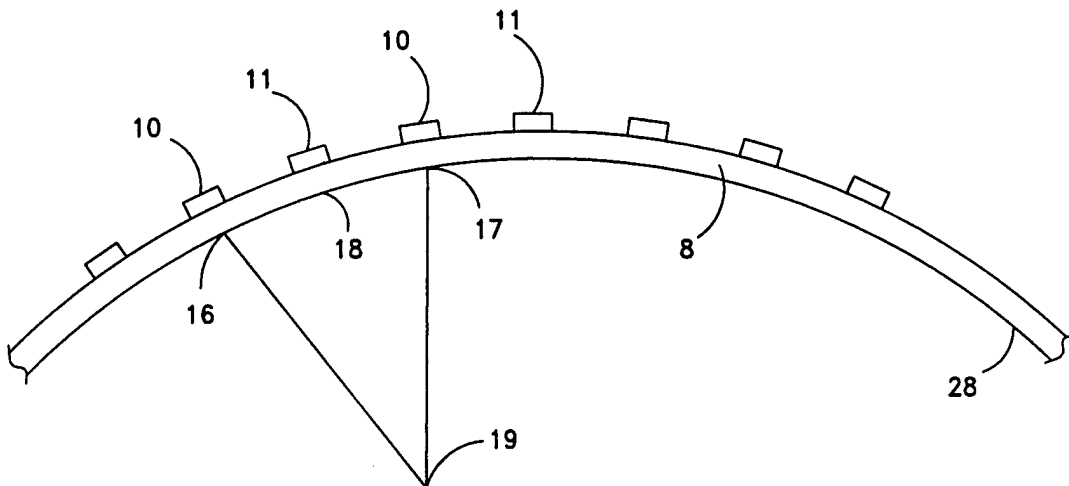


FIG. 7


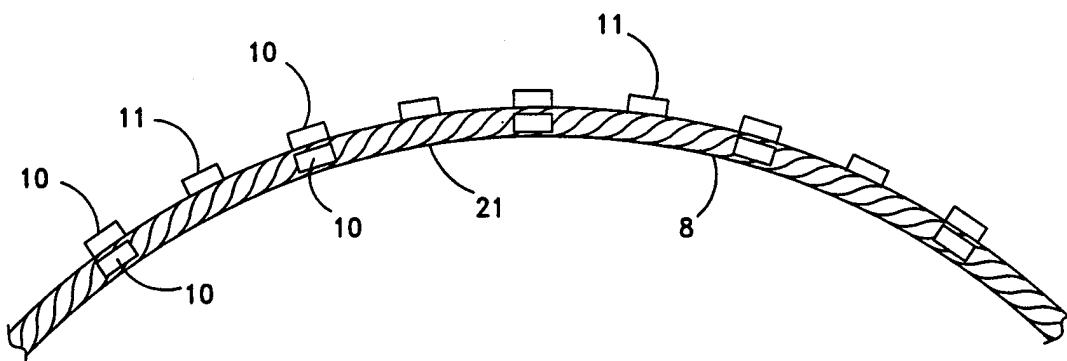


FIG. 8

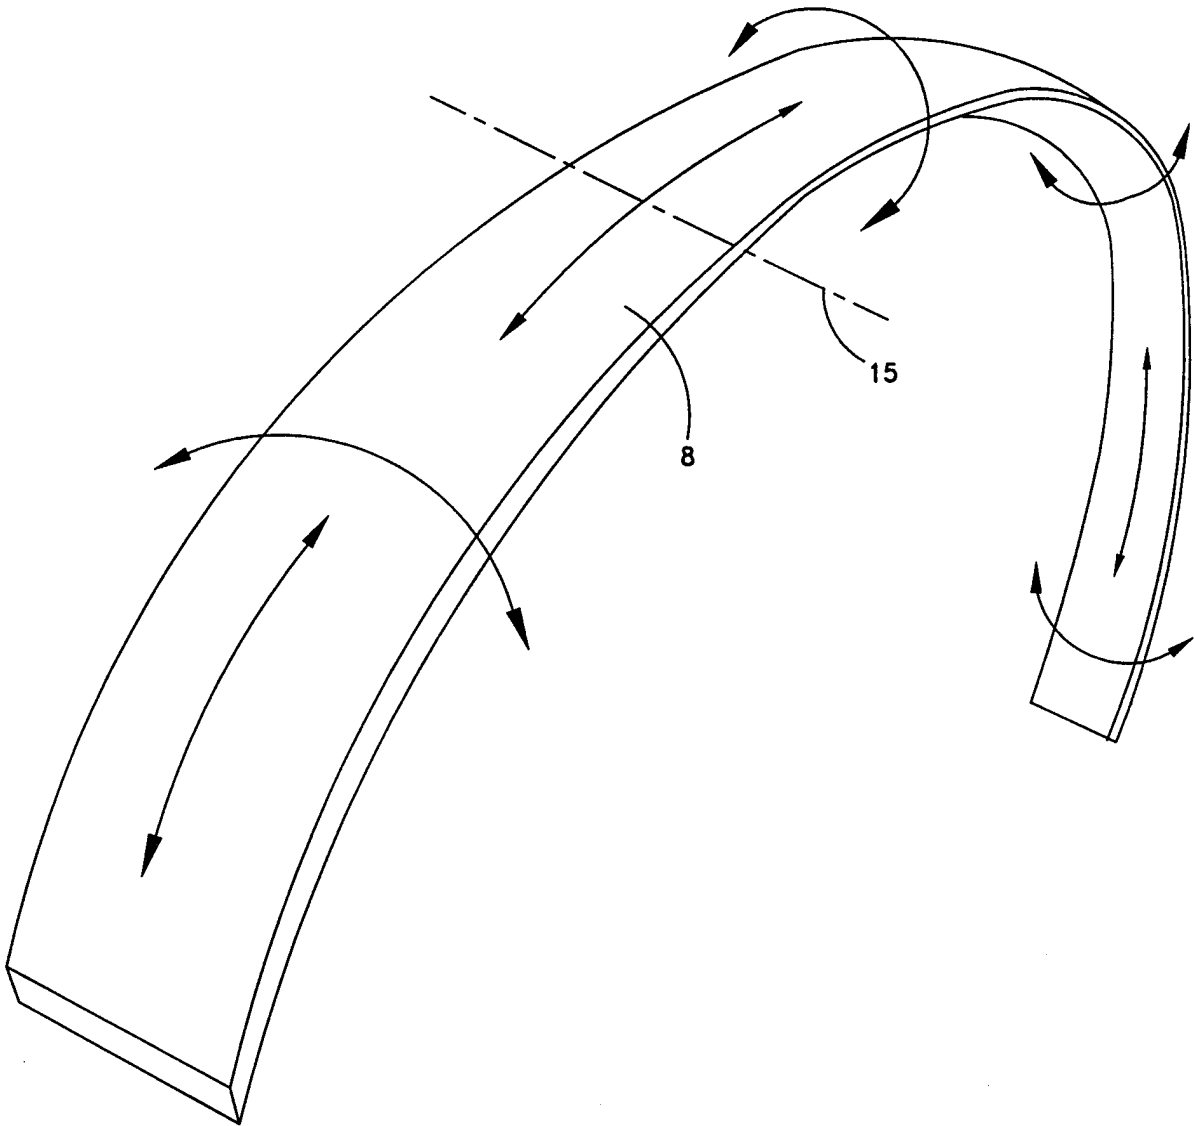

4/15

FIG. 9

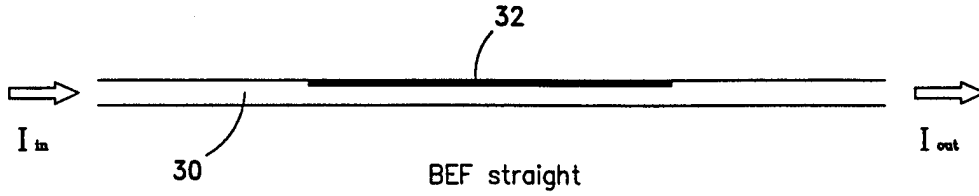


FIG. 10

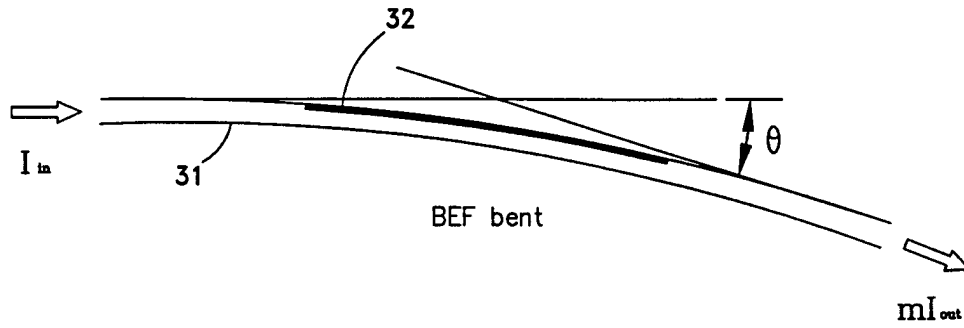


FIG. 11


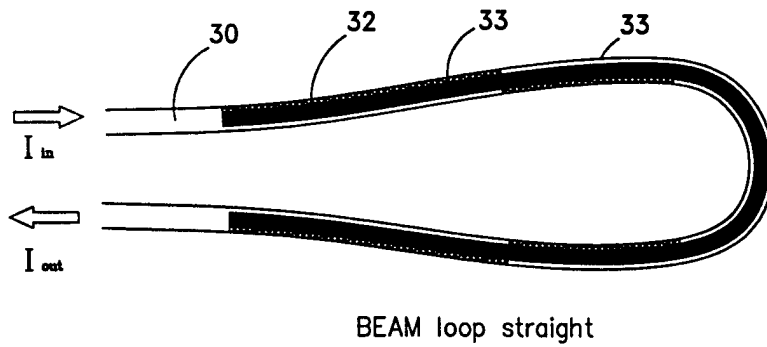


FIG. 12

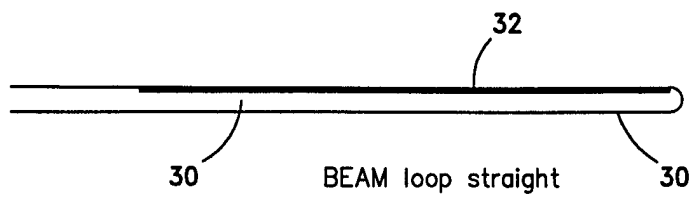

5/15

FIG. 13

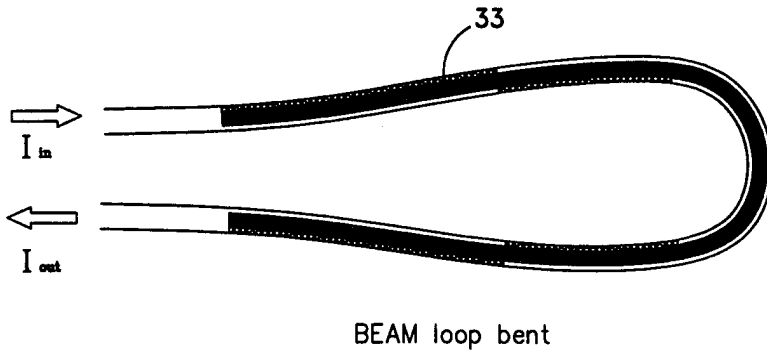


FIG. 14

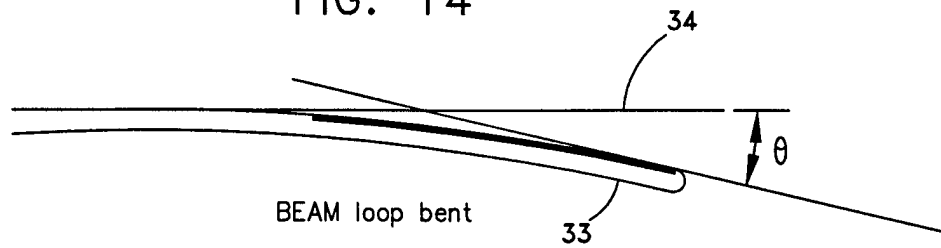


FIG. 15

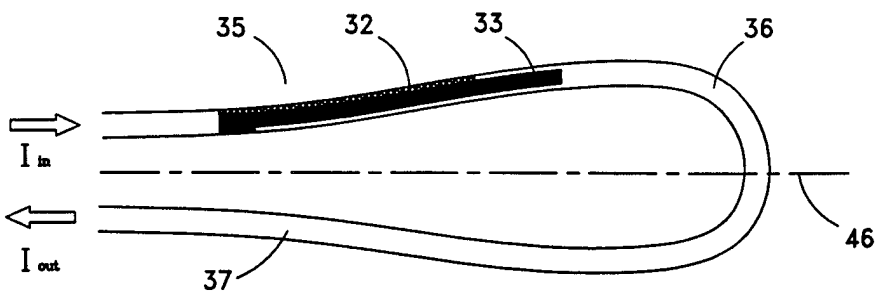


FIG. 16



FIG. 17

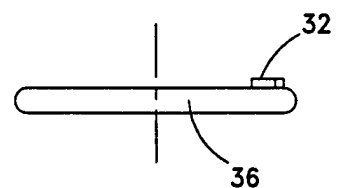


FIG. 18

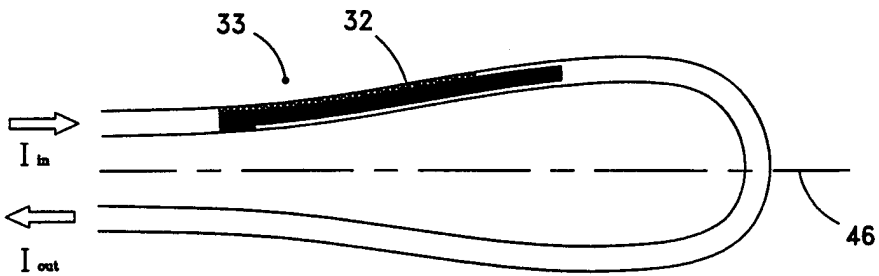


FIG. 19

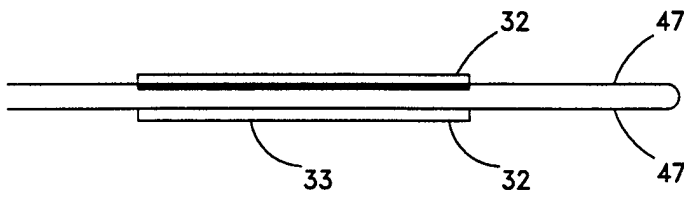


FIG. 21

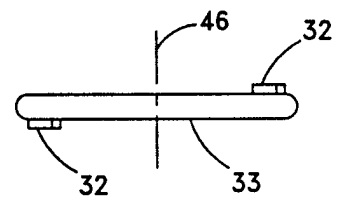


FIG. 20

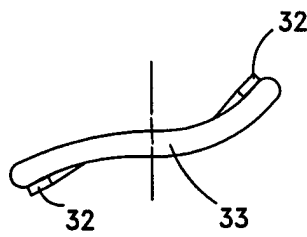


FIG. 22a

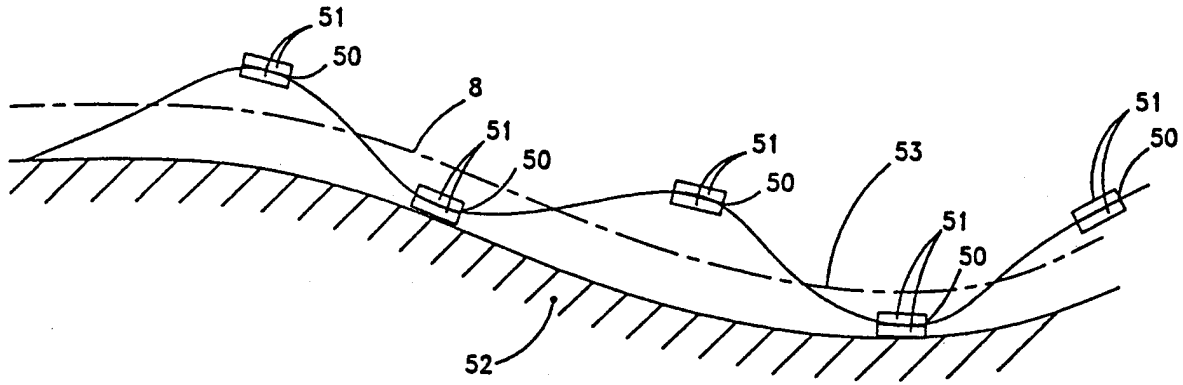


FIG. 22b

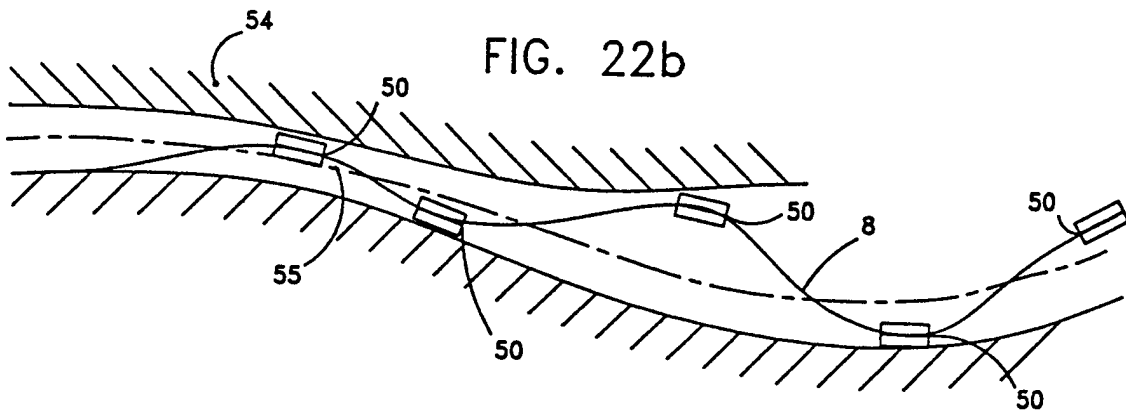


FIG. 22c

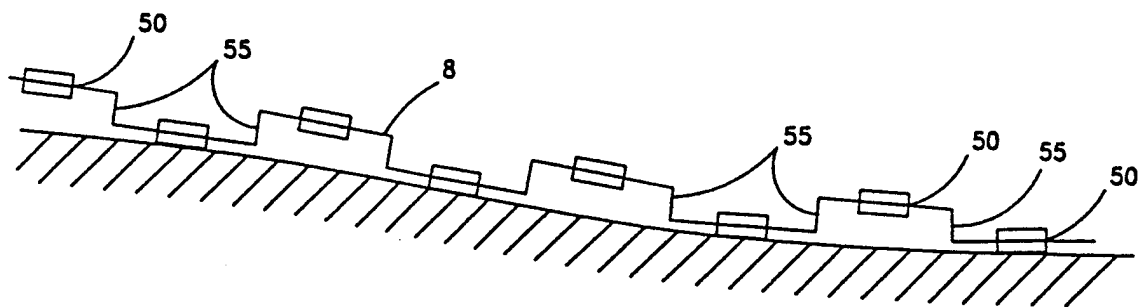


FIG. 22d

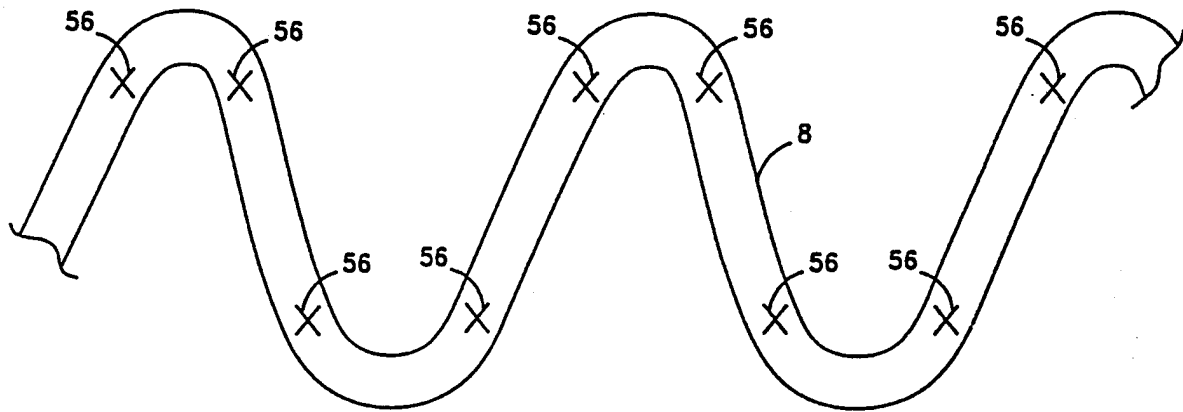


FIG. 22e


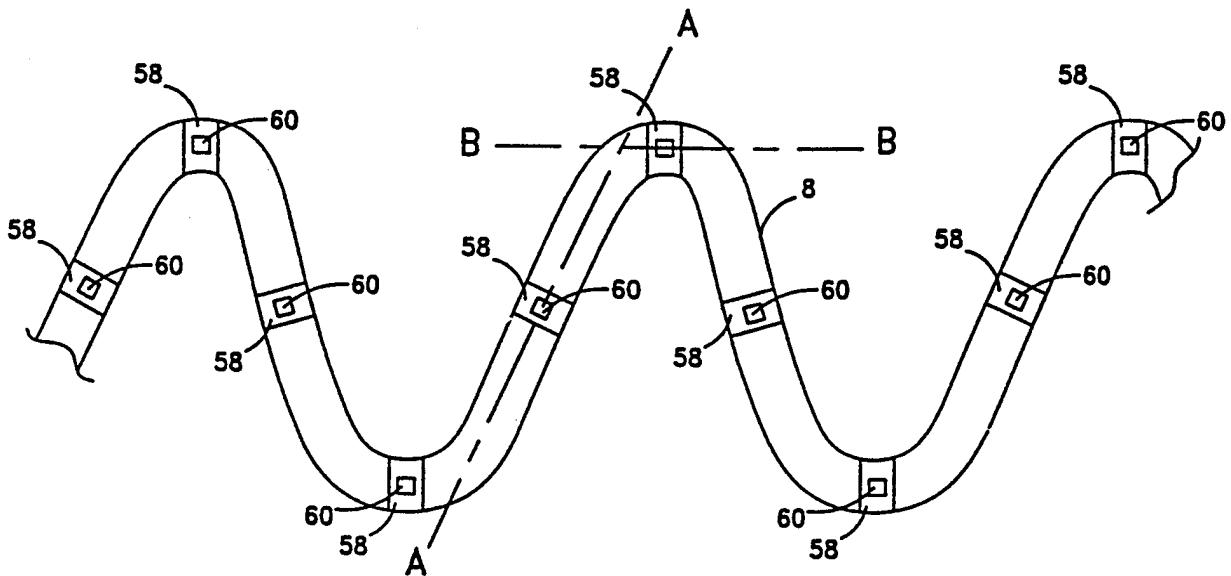


FIG. 22f

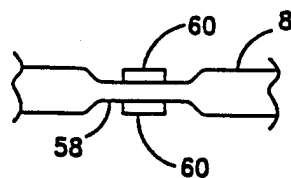

SECTION THRU A-A OR B-B

FIG. 22g

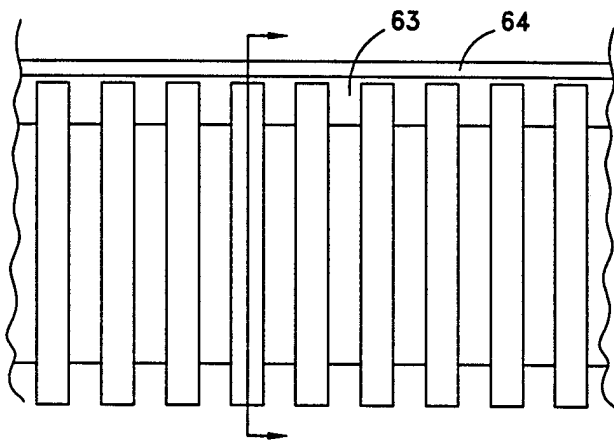


FIG. 22h

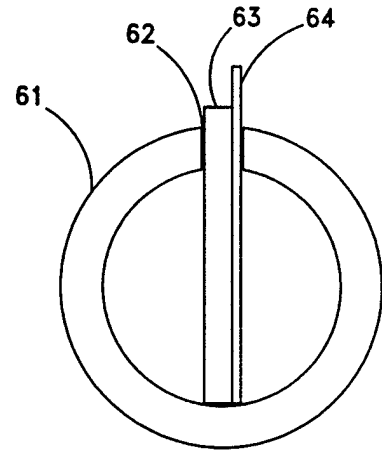


FIG. 23

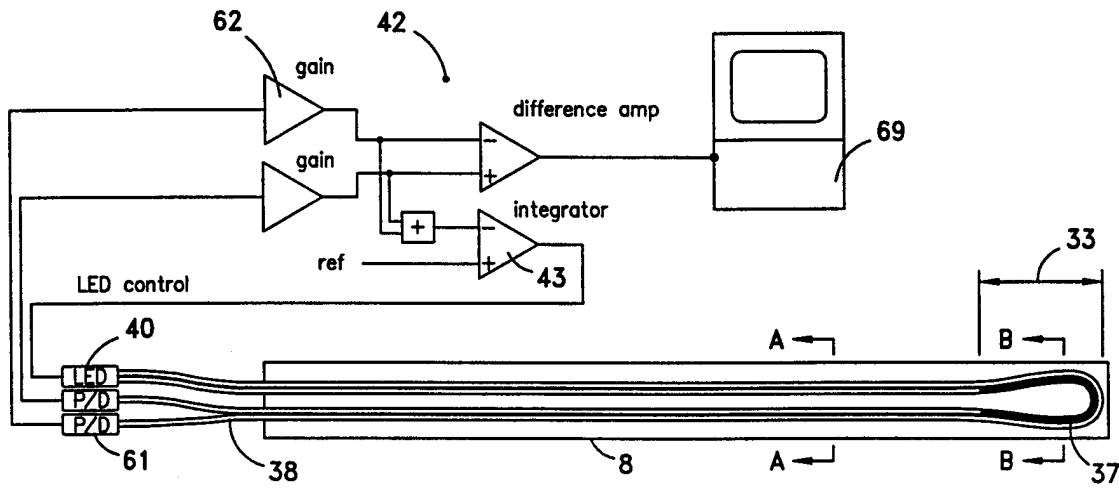


FIG. 24

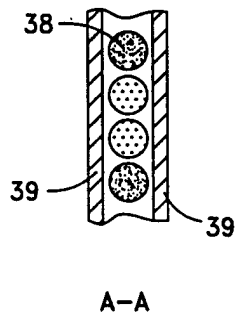


FIG. 25

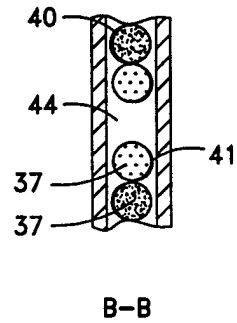


FIG. 26

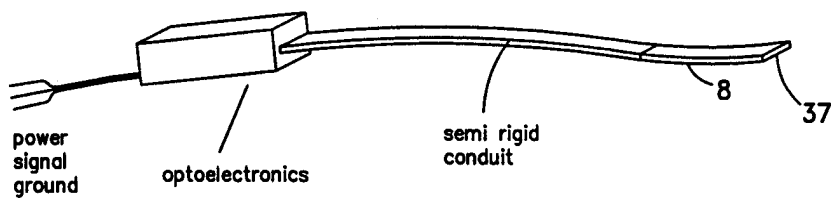


FIG. 27

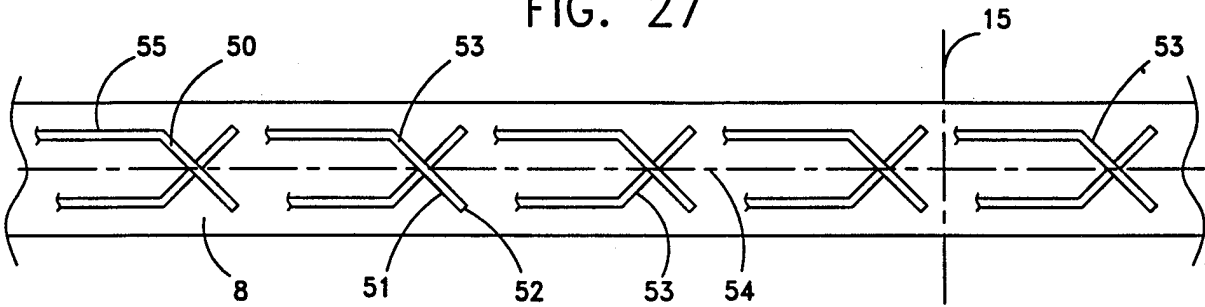


FIG. 28

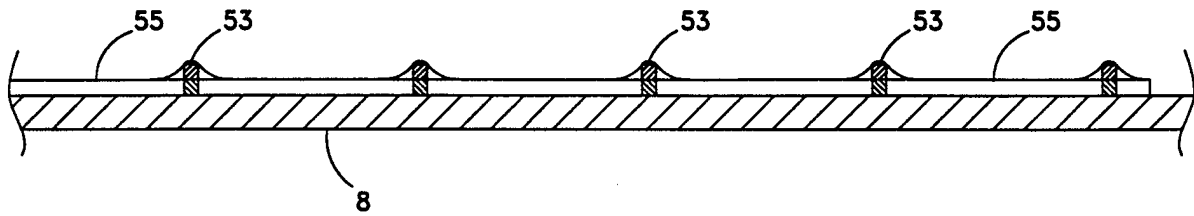


FIG. 29

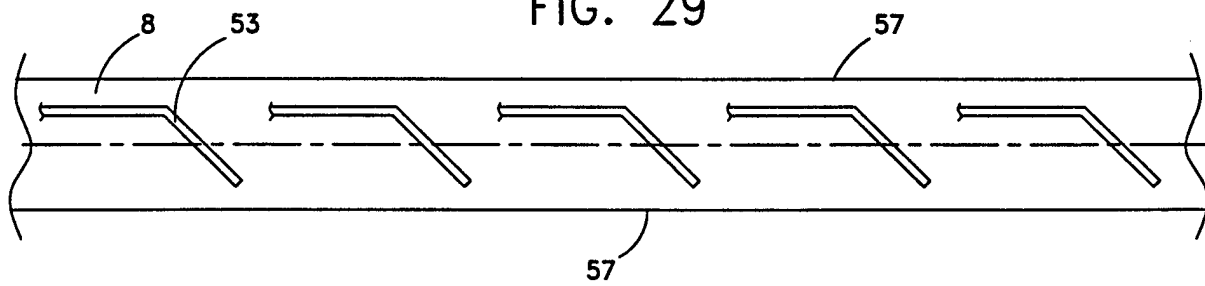


FIG. 29a


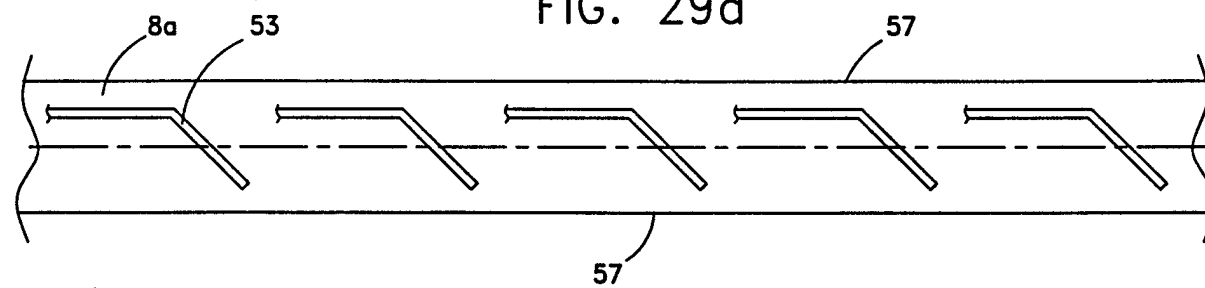


FIG. 30

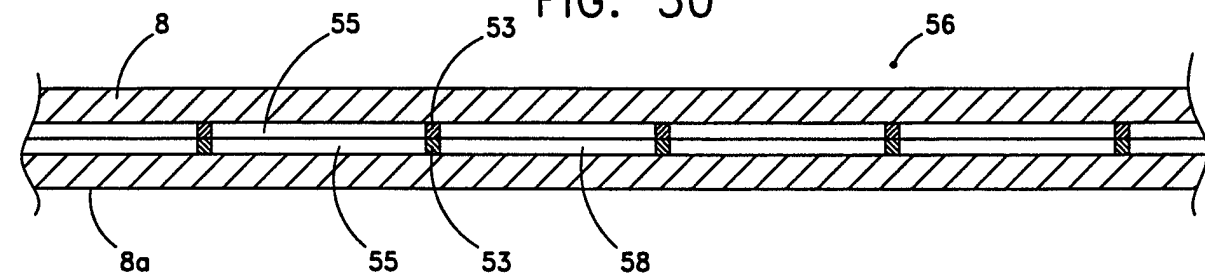

12/15
FIG. 31

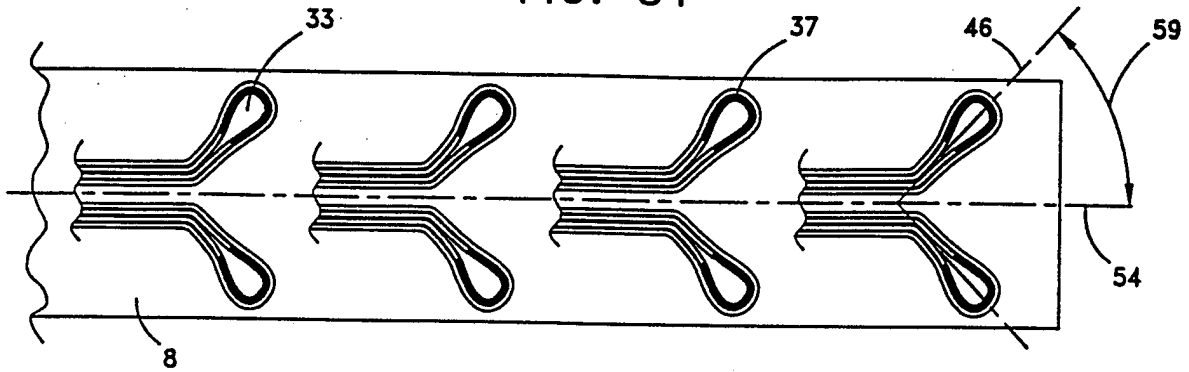


FIG. 32

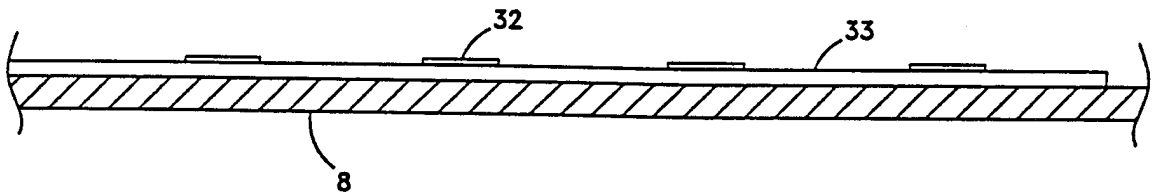


FIG. 33


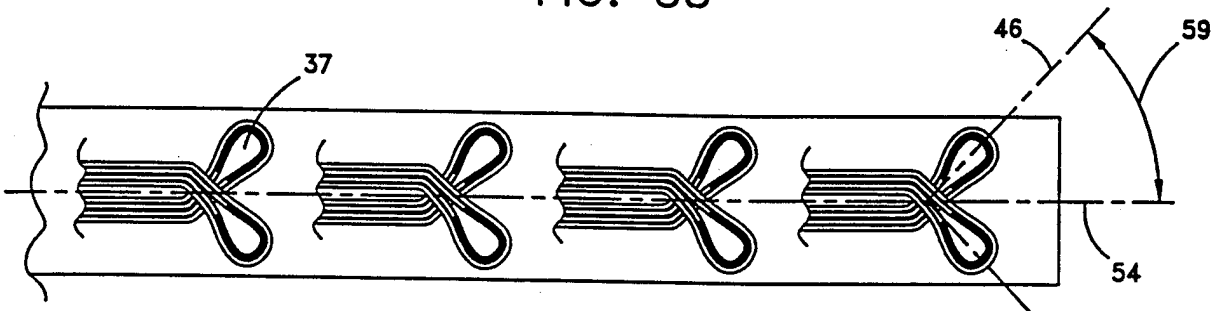


FIG. 34

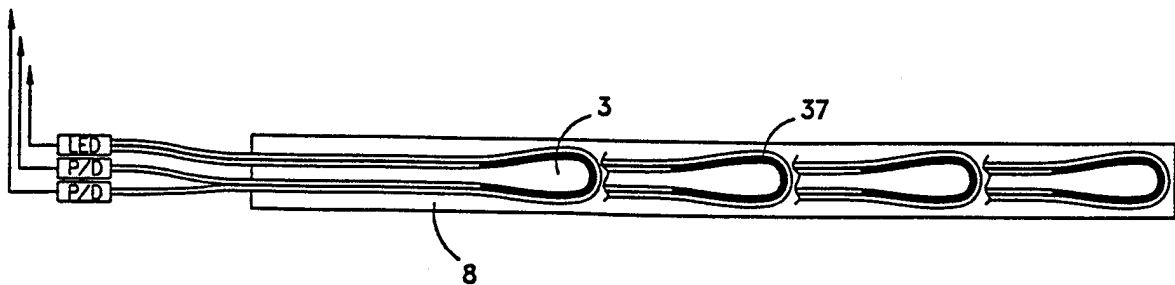

13/15

FIG. 35

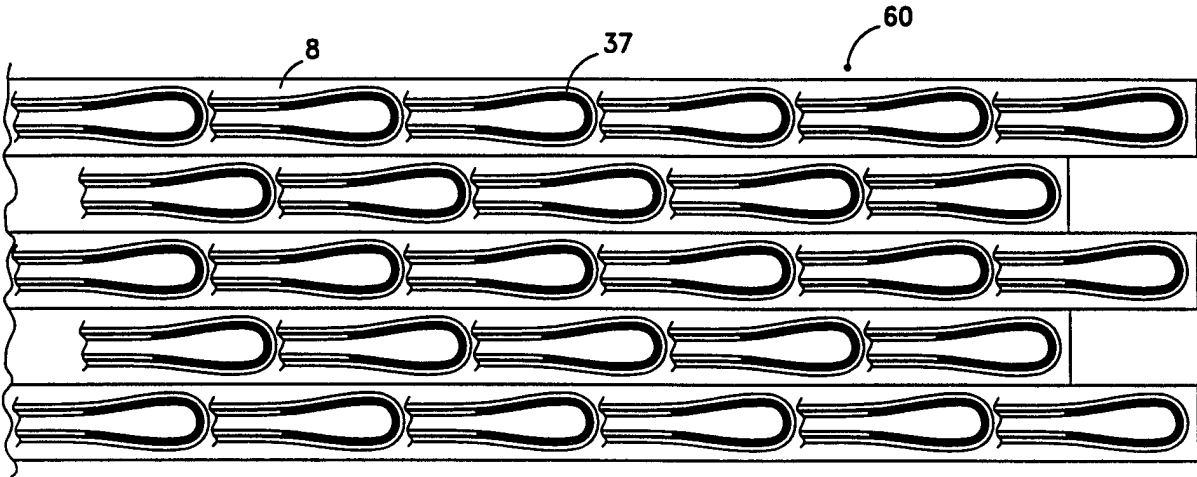


FIG. 36



FIG. 37

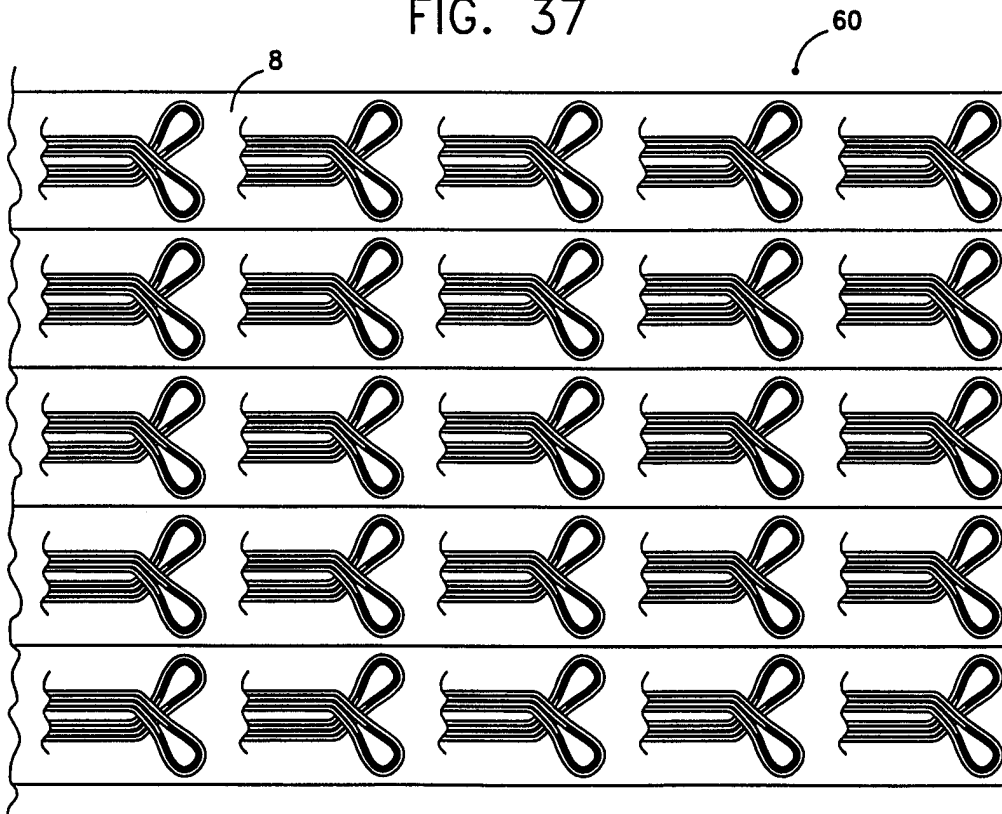
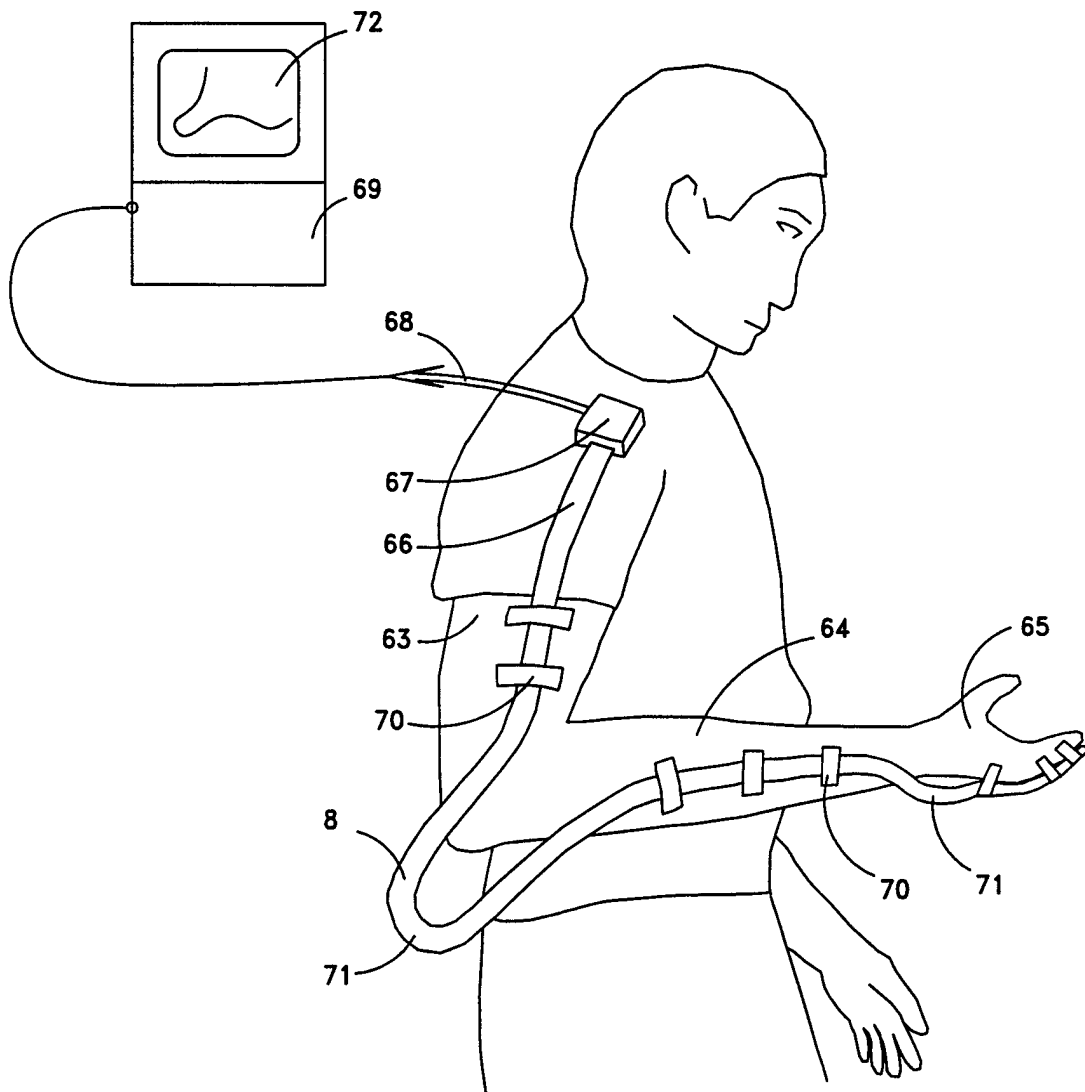


FIG. 38




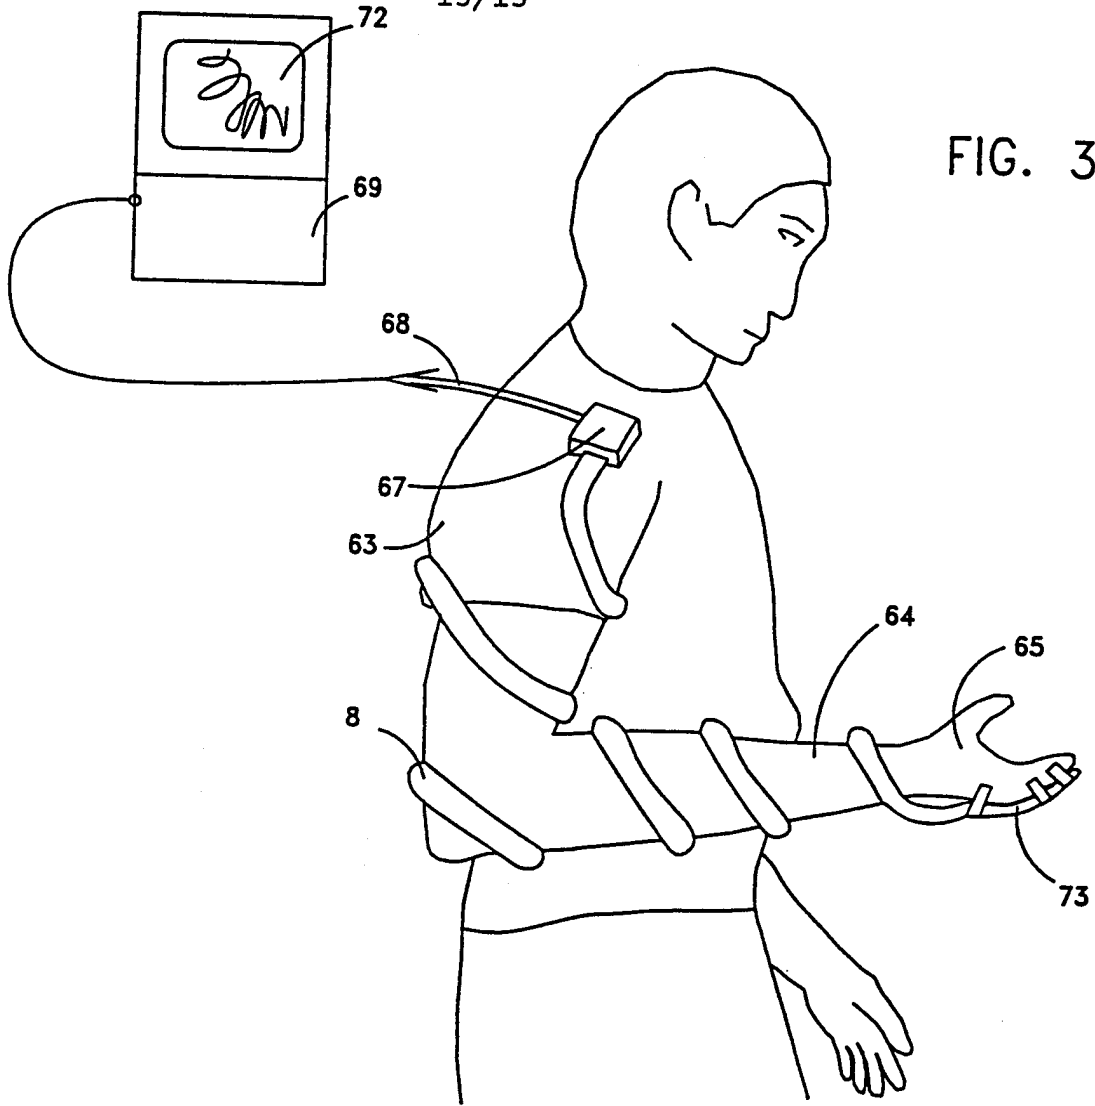


FIG. 39

FIG. 40

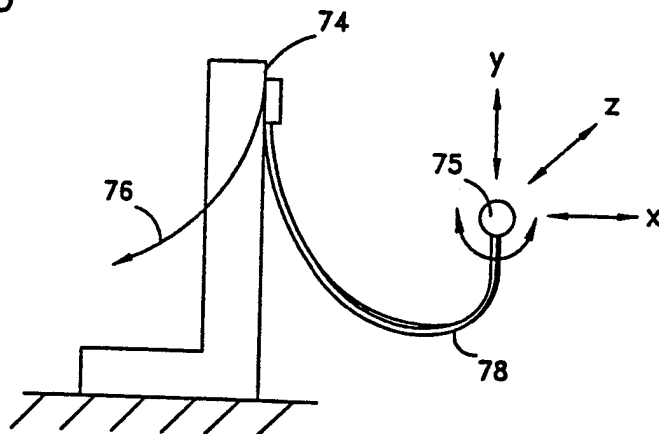

INTERNATIONAL SEARCH REPORT

Inte. l.ional Application No

PCT/CA 98/00213

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01B21/04 G06F3/00 G01B11/16

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01B G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 238 112 A (BRITISH AEROSPACE) 22 May 1991 see page 12 - page 16; figures 4-9	1, 18
Y	---	11
Y	EP 0 615 110 A (INSTITUT FÜR FERTIGUNGSTECHNIK DER TU GRAZ) 14 September 1994 see column 4 - column 5; figures 1,2	11
A	DE 42 40 531 C (HOFMANN FRANK ;HENZ JUERGEN (DE)) 10 February 1994 see page 3; figures 1-6	2, 12-14, 19
A	WO 94 29671 A (DANISCH LEE A) 22 December 1994 cited in the application see abstract; figures 1,4,16,27	5, 6, 8, 21
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

16 June 1998

Date of mailing of the international search report

30/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vorropoulos, G

3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00213

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 570 065 A (PRYOR TIMOTHY R) 11 February 1986 see abstract; figures 3-5 -----	1,11,18
A	EP 0 344 322 A (TSNI GEOLOGORAZVEDOCHNY I TSVE) 6 December 1989 see abstract; figures 1,2 -----	1,11,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 98/00213

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2238112 A	22-05-91	US 5038618 A	13-08-91
EP 615110 A	14-09-94	AT 151869 T DE 59306194 D	15-05-97 22-05-97
DE 4240531 C	10-02-94	NONE	
WO 9429671 A	22-12-94	CA 2098153 A AT 159586 T AU 6967094 A DE 69406447 D DE 69406447 T EP 0702780 A JP 8511343 T US 5633494 A	11-12-94 15-11-97 03-01-95 27-11-97 14-05-98 27-03-96 26-11-96 27-05-97
US 4570065 A	11-02-86	NONE	
EP 0344322 A	06-12-89	SU 1791703 A AU 2620188 A BG 46909 A CN 1033101 A FI 893128 A JP 2501955 T WO 8903972 A US 5040154 A	30-01-93 23-05-89 15-03-90 24-05-89 27-06-89 28-06-90 05-05-89 13-08-91