



(51) International Patent Classification:

B60K 6/365 (2007.10) B60W 10/10 (2006.01)
B60K 6/445 (2007.10) B60W 20/00 (2006.01)
B60K 6/547 (2007.10) F16H 61/04 (2006.01)
B60L 11/14 (2006.01) F16H 61/684 (2006.01)
B60W 10/08 (2006.01)

(21) International Application Number:

PCT/IB2009/000200

(22) International Filing Date:

9 February 2009 (09.02.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2008-044612 26 February 2008 (26.02.2008) JP

(71) Applicant (for all designated States except US): NISSAN MOTOR CO., LTD. [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0023 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): IMAZU, Tomoya [JP/JP]; c/o Nissan Motor Co., Ltd., Intellectual Property Department, 1-1, Morinosatooyama, Atsugi-shi, Kanagawa 243-0123 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: VEHICLE DRIVE APPARATUS

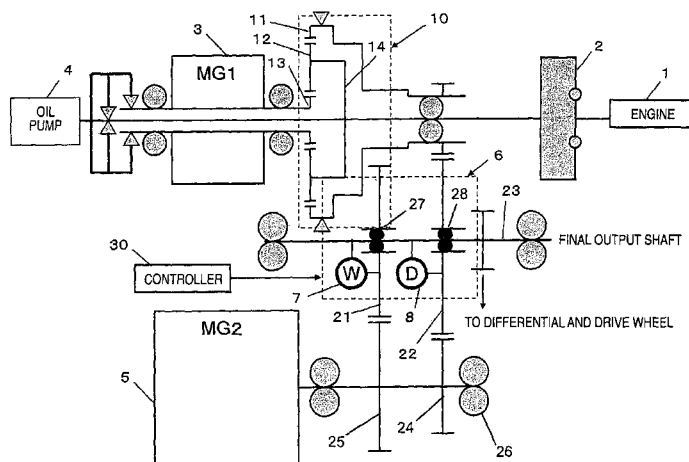


FIG. 1

(57) Abstract: A vehicle drive apparatus is basically provided with a main power source (1), a first motor/generator (3), a second motor/generator (5), a planetary gearset (10) and a step-shifting automatic transmission (6). The planetary gearset (10) is operatively coupled to the main power source (1) and the first motor/generator (3) to rotate an output shaft (23) leading to a drive wheel. The step-shifting automatic transmission (6) connects the planetary gearset (10) and the second motor/generator (5) to the output shaft (23) for selectively changing an output gear ratio from the planetary gearset (10) and the second motor/generator (5). The step-shifting automatic transmission (6) has a plurality of gear positions. The step-shifting transmission includes a dog clutch (8) serving as a holding element for at least one of the gear positions and a frictional holding element (7) as a holding element for at least one other of the gear positions with the frictional holding element (7) at least transmits torque in a slipping state during a shifting operation.

WO 2009/106941 A1

VEHICLE DRIVE APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to Japanese Patent Application No. 2008-044612, filed on February 26, 2008. The entire disclosure of Japanese Patent Application No. 2008-044612 is hereby incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention generally relates to a vehicle drive apparatus configured such that a gear ratio between a main power source and a drive train can be varied in a continuous fashion.

Background Information

[0003] Power distribution mechanism have been proposed in which at least two electric motors, a main power source (e.g., an internal combustion engine), and an output shaft are connected with at least one planetary gearset, and in which a gear ratio between the main power source and a drive wheel can be set in a continuously variable manner. For structural reasons, such a power distribution mechanism typically requires an electric motor that is large in comparison with the main power source. A transmission of a hybrid vehicle disclosed in Japanese Laid-Open Patent Publication No. 2003-127681 solves this problem by employing a mechanical transmission between one of the electric motors and the output shaft of the power distribution mechanism.

[0004] In view of the above, it will be apparent to those skilled in the art from this disclosure that there exists a need for an improved vehicle drive apparatus. This invention addresses this need in the art as well as other needs, which will become apparent to those skilled in the art from this disclosure.

SUMMARY OF THE INVENTION

[0005] It has been discovered that in the structure disclosed in Japanese Laid-Open Patent Publication No. 2003-127681, when the mechanical transmission accomplishes a gear changing function by engaging and disengaging a plurality of multiple disc clutches, a drag loss will incur in holding elements of the drive structure will incur a drag loss occurring in holding elements that are not engaged and a hydraulic pump loss will incur

from generating and maintaining a holding pressure in holding elements that are engaged. Consequently, the total efficiency declines. Meanwhile, if dog clutches are used as holding elements that do not incur such losses, then whenever a gear change operation is executed, it is necessary to temporarily release all of the dog clutches completely at an intermediate stage in order to synchronize the rotation. Consequently, the amount of torque that can be transferred to the vehicle as a drive force is reduced.

[0006] In accordance with a first aspect, a vehicle drive apparatus is provided that comprises a main power source, a first motor/generator, a second motor/generator, a planetary gearset and a step-shifting automatic transmission. The planetary gearset is operatively coupled to the main power source and the first motor/generator to rotate an output shaft leading to a drive wheel. The step-shifting automatic transmission connects the planetary gearset and the second motor/generator to the output shaft leading to the drive wheel for selectively changing an output gear ratio from the planetary gearset and the second motor/generator. The step-shifting automatic transmission has a plurality of gear positions. The step-shifting transmission includes a dog clutch serving as a holding element for at least one the gear positions and a frictional holding element as a holding element for at least one other of the gear positions with the frictional holding element at least transmits torque in a slipping state during a shifting operation.

[0007] These and other objects, features, aspects and advantages of the present invention will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Referring now to the attached drawings which form a part of this original disclosure:

[0009] Figure 1 is a schematic view of a vehicle drive apparatus in accordance with a first embodiment;

[0010] Figure 2 is a velocity diagram (lever analogy diagram) for a situation in which a dog clutch is engaged;

[0011] Figure 3 is a velocity diagram for a situation in which a wet clutch is engaged;

[0012] Figure 4 is a velocity diagram for explaining a control executed when a gear ratio of a transmission of the vehicle drive apparatus is changed;

[0013] Figure 5 is an example of a control block diagram for a case in which rotational speed feedback control is executed;

[0014] Figure 6 is a velocity diagram for a variation of the vehicle drive apparatus according to the first embodiment;

[0015] Figure 7 is a velocity diagram for explaining constituent features of a transmission of a vehicle drive apparatus in accordance with a second embodiment;

[0016] Figure 8 is a velocity diagram for explaining constituent features of a transmission of a vehicle drive apparatus in accordance with a third embodiment; and

[0017] Figure 9 is a velocity diagram for explaining constituent features of a transmission of a vehicle drive apparatus in accordance with a fourth embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018] Selected embodiments of the present invention will now be explained with reference to the drawings. It will be apparent to those skilled in the art from this disclosure that the following descriptions of the embodiments of the present invention are provided for illustration only and not for the purpose of limiting the invention as defined by the appended claims and their equivalents.

FIRST EMBODIMENT

[0019] Referring initially to Figure 1, a schematic view of a vehicle drive apparatus vehicle drive apparatus is illustrated in accordance with a first embodiment. The vehicle drive apparatus is employed in a hybrid vehicle to transmit torque during shifting without causing a loss of the transmission to decline. In this hybrid vehicle, the vehicle drive apparatus includes, among other things, an engine 1, a damper 2, a first motor/generator 3, an oil pump 4, a second motor/generator 5, a transmission 6, a wet clutch 7, a dog clutch 8 and a planetary gearset 10. Output from the engine 1 is distributed to the first motor/generator 3 and to a drive output path by the planetary gearset 10. The second motor/generator 5 uses electric power generated by the first motor/generator 3 to produce an output torque. The output torque of the second motor/generator 5 is combined with the output torque of the planetary gearset 10 and delivered to a final output shaft of the drive train, thereby enabling continuously variable gear shifting. In the illustrated vehicle drive

apparatus, when the dog clutch 8 is engaged, the loss efficiency can be improved in comparison with when the frictional holding element (e.g., the wet clutch 7) is engaged. Also, when the transmission 6 shifts gears, drive torque can be transmitted by putting the frictional holding element (e.g., the wet clutch 7) into a half engaged state as explained below.

[0020] In this illustrated embodiment, a continuously variable gear changing mechanism 20 is formed by the arrangement of the engine 1, the first motor/generator 3 and the second motor/generator 5 with respect to the planetary gearset 10. Specifically, the output of the engine 1 is distributed to the first motor/generator 3 and to the drive output path by the planetary gearset 10, and the output torque of the planetary gearset 10 is combined with the output torque of the second motor/generator 5 to form the continuously variable gear changing mechanism 20.

[0021] The engine 1 serves as a main power source of the hybrid vehicle. The engine 1 is connected to the planetary gearset 10 through the damper 2. The planetary gearset 10 basically includes a ring gear 11, a plurality of planet gears 12, a sun gear 13 and a carrier 14. A crankshaft of the engine 1 is coupled to the carrier 14 of the planetary gearset 10. The carrier 14 supports the planet gears 12, which mesh with the ring gear 11 and the sun gear 13. The first motor/generator 3 is connected to the oil pump 4 and to the sun gear 13 of the planetary gearset 10. The ring gear 11 of the planetary gearset 10 is connected to an idle gear 22. The idle gear 22 is also connected to the second motor/generator 5 through a gear 24. The idle gear 22 is also connected to an idle gear 21 through a gear 25. Torque transmitted to the idle gear 21 or 22 is transmitted to the final output shaft 23 through the transmission 6. The torque transmitted to the final output shaft 23 is then transmitted to a pair of wheels (not shown) through a differential (not shown).

[0022] In the first embodiment, the transmission 6 is a mechanism configured to shift between two gear positions. The wet clutch 7 serves as a holding element for a gear having a smaller gear ratio. The dog clutch 8 serves as a holding element for a gear having a larger gear ratio. The wet clutch 7 is a frictional holding element that can transmit torque in a slipping state. The idle gear 21 is supported on the final output shaft 23 in a freely rotatable fashion through a bearing 27. When the wet clutch 7 is engaged, the idle gear 21 becomes fixedly coupled to the final output shaft 23 so that they rotate as

a unit. The idle gear 22 is supported on the final output shaft 23 in a freely rotatable fashion through a bearing 28. When the dog clutch 8 is engaged, the idle gear 22 becomes fixedly coupled to the final output shaft 23 so that they rotate as a unit. Thus, when the wet clutch 7 is engaged, power from the ring gear 11 is transmitted to the final output shaft 23 through the idle gear 22, the gear 24, the gear 25, the wet clutch 7 and the idle gear 21. Meanwhile, when the dog clutch 8 is engaged, power is transmitted from the ring gear 11 to the final output shaft 23 through the dog clutch 8 and the idle gear 22.

[0023] The final output shaft 23 and other shafts are supported with respect to a vehicle body (not shown) on a plurality of bearings 26.

[0024] A controller 30 executes control of the transmission 6. The details of the control of the transmission 6 will be described later.

[0025] Figures 2 and 3 are velocity diagrams (lever analogy diagrams) indicating the rotational speed (r.p.m.) of each rotational element on a vertical axis. Figure 2 is a velocity diagram for a case in which the dog clutch 8 is engaged. Figure 3 is a velocity diagram for a case in which the wet clutch 7 is engaged.

[0026] In the velocity diagrams, the reference letter V corresponds to the final output shaft 23. The rotational speeds of the engine 1, the first motor/generator 3, and the second motor/generator 5 are in a bound relationship. If any two of the rotational speeds are known, then the third rotational speed is also known. Consequently, in a velocity diagram having the rotational speed of each rotational element indicated on a vertical axis, the three rotational speeds just mentioned lie on a single straight line. A mode in which the dog clutch 8 is engaged is called a low mode. A mode in which the wet clutch 7 is engaged is called a high mode.

[0027] The output rotational speed of the continuously variable gear changing mechanism 20 is reduced by the transmission 6 via either the wet clutch 7 or the dog clutch 8. As described previously, the wet clutch 7 is a holding element provided inside the transmission 6 for selecting the gear having the smaller reduction ratio and the dog clutch 8 is a holding element for selecting the gear having the larger reduction ratio. The controller 30 engages the wet clutch 7 in a half-clutched state when the gear ratio of the transmission 6 is being changed. As a result, a positive torque can be transmitted to the final output shaft 23 through the wet clutch 7.

[0028] Figure 4 is a diagram for explaining the control executed when the gear ratio of the transmission 6 is changed while a positive torque is being outputted from the continuously variable gear changing mechanism 20. As explained previously, the controller 30 engages the wet clutch 7 in a half-clutched state when the gear ratio of the transmission 6 is being changed. When the transmission 6 is shifted to the smaller gear ratio from a state in which the dog clutch 8 is engaged, the wet clutch 7 is engaged in a half-clutched state before the dog clutch 8 is released. Then the dog clutch 8 is released and, afterwards, the engagement force of the wet clutch 7 is increased. Meanwhile, when the transmission 6 is shifted to the larger gear ratio from a state in which the wet clutch 7 is engaged, the engagement force of the wet clutch 7 is first reduced to a half-clutched state. Then the dog clutch 8 is engaged and, afterwards, the engagement force of the wet clutch 7 is decreased to zero.

[0029] Figure 4 is shows the wet clutch 7 in a half-clutched state during shifting of the transmission 6. As indicated with arrows in Figure 4, a force acting to decrease the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 acts on the continuously variable gear changing mechanism side of the wet clutch 7, and a force acting to increase the rotational speed of the final output shaft 23 acts on the final output shaft side of the wet clutch 7. Thus, when the transmission 6 is shifted, a positive torque can be transmitted to the final output shaft 23 through the half-clutched wet clutch 7.

[0030] If the dog clutch 8 is used as the holding element for the gear having the smaller gear ratio and the wet clutch 7 is used as the holding element for the gear having the larger gear ratio, then during shifting of the transmission 6 a torque oriented in the opposite direction, i.e., the direction of reducing the rotational speed, will be transmitted to the final output shaft 23. When the vehicle is actually being driven, it is more important to transmit a torque acting to accelerate the vehicle than a torque acting to decelerate the vehicle. Therefore, it is preferable to use the wet clutch 7 as the holding element for the gear having the smaller gear ratio and the dog clutch 8 as the holding element for the gear having the larger gear ratio.

[0031] A method of controlling the transmission 6 during shifting (with the wet clutch 7 in a half-clutched state) will now be explained with reference to Figure 4. A target

engagement torque T_h of the wet clutch 7 is expressed as shown in the equation (1) below, where the term T_{out} is a final output torque target value, the term T_{out}' is an output torque target value of the continuously variable gear changing mechanism 20, and the term $G_f(H)$ is a reduction ratio of the gear arranged to be selected with the wet clutch 7.

$$T_h = T_{out}/G_f(H) \quad (1)$$

[0032] When the rotational speed of the output shaft of the continuously variable gear changing mechanism is neither increased nor decreased, the target engagement torque T_h equals the output torque target value T_{out}' .

[0033] The engagement torque of the wet clutch 7 is controlled based on the target engagement torque T_h calculated with the equation (1). For example, if the wet clutch 7 is a wet multiple disc clutch, then the engagement force of the clutch is controlled by calculating a clutch closing pressure control value P using the equation (2) shown below.

$$T_h = \mu \times N \times P \quad (2)$$

[0034] In the equation (2), the term μ is a dynamic friction coefficient of the wet clutch 7 and the term N is a number of contacting surfaces.

[0035] When the transmission 6 is shifted, the output torque target value T_{out}' is set to be larger than the target engagement torque T_h of the wet clutch 7 if the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 is to be raised (increased). Meanwhile, the output torque target value T_{out}' is set to be smaller than the target engagement torque T_h of the wet clutch 7 if the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 is to be lowered (decreased). The output torque target value T_{out}' is a function of the output torque T_1 of the first motor/generator 3, the output torque T_e of the engine 1, and the output torque T_2 of the second motor/generator 5 and can be calculated using a known method, e.g., the method presented in Japanese Patent Publication No. 3858885 or the method presented in Japanese Laid-Open Patent Publication No. 2004-308713.

[0036] The continuously variable gear changing mechanism 20 can be controlled with a rotational speed feedback control. Figure 5 is an example of a control block diagram for a case in which rotational speed feedback control is executed. The output torque target value T_{out}' of the continuously variable gear changing mechanism 20 used for the rotational speed feedback control can be expressed with the equation (3) shown below.

$$T_{out}' = K(N_{out}'_{ref} - N_{out}'_{act}) \quad (3)$$

[0037] The value $N_{out}'_{ref}$ is a target value of the rotational speed of the continuously variable gear changing mechanism 20 and is set based on a target rotational speed of the gear position targeted by the shift operation of the transmission 6. The value $N_{out}'_{act}$ is an actual value of the rotational speed of the continuously variable gear changing mechanism 20 and is measured with a rotational speed sensor (not shown). K is a proportional gain for the rotational speed control.

[0038] Figure 6 is a velocity diagram for a variation of a vehicle drive apparatus according to the first embodiment. In the configuration shown in Figures 2 and 3, the output (ring gear 11) of the planetary gearset 10 is connected to the second motor/generator 5 through the transmission 6 and an idle gear. Conversely, in the configuration shown in Figure 6, the second motor/generator 5 has an independent rotary shaft that is separate from the output shaft of the planetary gearset 10. This arrangement can be achieved with, for example, a Ravigneaux planetary gear like that disclosed in Japanese Laid-Open Patent Publication No. 2005-147334.

[0039] In the vehicle drive apparatus according to the first embodiment, at least the two motor/generators 3 and 5, the engine 1 serving as a main power source, and the output shaft are connected with the planetary gearset 10, and the output shaft is connected to a final output shaft 23 through a step-shifting automatic transmission 6 having a plurality of gear positions. The gear ratio between the engine and the final output shaft 23 can be set in a continuously variable fashion, and the step-shifting automatic transmission 6 is provided with the dog clutch 8 serving as a holding element for at least one gear position and the wet clutch 7 configured such that it can transmit torque in a slipping state serving as a holding element for at least one gear position. When the dog clutch 8 is engaged, it is not necessary to operate a power source, i.e., a hydraulic pump, serving to generate an engagement pressure required to engage the wet clutch 7. Thus, the amount of loss is smaller when the dog clutch 8 is engaged than when the wet clutch 7 is engaged.

[0040] In the vehicle drive apparatus according to the first embodiment, when the step-shifting automatic transmission 6 is shifted while power is being transmitted to the final output shaft 23, the wet clutch 7 is controlled to a half-engaged state such that a positive torque can be transmitted to the final output shaft 23 during the shift operation of

the step-shifting automatic transmission 6. As a result, the drive force imparted to the vehicle is not temporarily interrupted when the step-shifting automatic transmission 6 shifts gears and the vehicle behavior exhibited during vehicle acceleration is not degraded.

[0041] Also, in the vehicle drive apparatus according to the first embodiment, when the step-shifting automatic transmission 6 is shifted while power is being transmitted to the final output shaft 23, the wet clutch 7 is controlled to a half-engaged state and a target value for the torque transmitted to the input shaft of the step-shifting automatic transmission 6 is determined based on a gear ratio of the wet clutch 7 and an output torque target value for the vehicle. As a result, the torque transmitted to the input shaft of the step-shifting automatic transmission 6 can be controlled directly and, thus, the step-shifting automatic transmission 6 can be controlled with good precision during shifting.

SECOND EMBODIMENT

[0042] Figure 7 is a diagram for explaining constituent features of a transmission of a vehicle drive apparatus according to a second embodiment. In the vehicle drive apparatus according to the second embodiment, the transmission 6A has the wet clutch 7 and a plurality of dog clutches 81, 82, ..., 8n (where n is a natural number equal to or larger than 3). In other words, the transmission 6A has (n + 1) gears of different gear ratios.

[0043] The wet clutch 7 is a holding element for the gear having the smallest reduction ratio. The dog clutch 81 is a holding element for the gear having the largest gear ratio and the dog clutch 82 is a holding element for a gear having a smaller gear ratio than the gear corresponding to the dog clutch 81. The dog clutch 8n is a holding element for the gear having the smallest gear ratio among the gears that can be selected with the dog clutches. However, the gear corresponding to the dog clutch 8n has a larger gear ratio than the gear arranged to be selected with the wet clutch 7.

[0044] The operation of switching from engagement of a dog clutch to engagement of the wet clutch 7 is the same as in the first embodiment. When the transmission 6 shifts between dog clutches corresponding to different gear ratios, the wet clutch 7 is engaged in a half-clutched state before the currently engaged dog clutch is released. After the wet clutch 7 is put into a half-clutched state, the currently engaged dog clutch is released completely before engaging the dog clutch corresponding to the targeted gear. After the dog clutch corresponding to the targeted gear is engaged, the wet clutch 7 is released.

[0045] In the vehicle drive apparatus according to the second embodiment, the transmission 6A is provided with the wet clutch 7, which serves as a holding element for one gear and the dog clutches 81, 82, ..., 8n, which serve as holding elements for two or more gears. When a dog clutch is engaged, it is not necessary to operate a power source, i.e., a hydraulic pump, serving to generate an engagement pressure required to engage the wet clutch 7. Thus, the amount of loss is smaller when a dog clutch is engaged than when the wet clutch 7 is engaged.

THIRD EMBODIMENT

[0046] Figure 8 is a diagram for explaining constituent features of a transmission of a vehicle drive apparatus according to a third embodiment. In the vehicle drive apparatus according to the third embodiment, the transmission 6B has the wet clutch 7, a plurality of dog clutches 82, ..., 8n (where n is a natural number equal to or larger than 3), and a one-way clutch 90. The transmission 6B is basically the same as the transmission 6A shown in Figure 8, except that the dog clutch 81 of the transmission 6A has been replaced with the one-way clutch 90. Thus, the one-way clutch 90 serves as the holding element for the gear having the largest gear ratio of the transmission 6B.

[0047] The one-way clutch 90 engages when the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 is higher than the rotational speed of the final output shaft 23. Once engaged, the one-way clutch 90 disengages when the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 becomes lower than the rotational speed of the final output shaft 23.

[0048] In other words, when the rotational speed of the output shaft of the continuously variable gear changing mechanism 20 rises and becomes higher than the rotational speed of the final output shaft 23, the one-way clutch 90 engages such that output torque from the continuously variable gear changing mechanism 20 is transmitted to the final output shaft 23. By using the one-way clutch 90 instead of a dog clutch as the holding element for the gear having the largest gear ratio, the loss efficiency can be improved because the loss that would occur when operating the dog clutch is avoided.

[0049] Also, when the one-way clutch 90 engages such that the output torque from the continuously variable gear changing mechanism 20 is transmitted to the final output shaft 23, the transmission 6B is automatically put into a state in which drive power is

transmitted using the gear having the largest reduction ratio. Consequently, the drive force shock that occurs due to a rotational speed difference when a dog clutch is engaged can be reduced.

FOURTH EMBODIMENT

[0050] Figure 9 is a diagram for explaining constituent features of a transmission of a vehicle drive apparatus according to a fourth embodiment. In the vehicle drive apparatus according to the fourth embodiment, the transmission 6C has the wet clutch 7, a plurality of dog clutches 81, 82, ..., 8n (where n is a natural number equal to or larger than 3), and a one-way clutch 90. The one-way clutch 90 is connected in parallel with the dog clutch 81, which is a holding element for the gear having the largest gear ratio.

[0051] When only a one-way clutch 90 is provided as a holding element for the gear having the largest gear ratio as in the third embodiment, it is not possible to back the vehicle by transmitting negative torque from the continuously variable gear changing mechanism 20 to the final output shaft 23 through the one-way clutch 90 so as to rotate the final output shaft 23 in a reverse direction.

[0052] In the vehicle drive apparatus according to the fourth embodiment, the dog clutch 81 and the one-way clutch 90 are provided in a parallel arrangement as holding elements for the gear having the largest gear ratio. The one-way clutch 90 is engaged to transmit a positive drive force to the final output shaft 23 when the gear having the largest reduction ratio in the transmission 6C is used to drive the vehicle forward, and the dog clutch 81 is engaged to transmit a negative drive force when the gear having the largest reduction ratio is used to drive the vehicle in reverse. As a result, the loss resulting from connecting a dog clutch can be reduced when a positive drive force is transmitted, and a negative drive force can be transmitted through the dog clutch 81 when the vehicle is driven in reverse.

[0053] In the vehicle drive apparatus according to the fourth embodiment, a dog clutch 81 is provided as a holding element for the gear having the largest gear ratio and a one-way clutch 90 is provided in parallel with the dog clutch 81. As a result, the same effects as a vehicle drive apparatus according to the third embodiment can be obtained and, additionally, the ability to transmit a negative drive force can be obtained.

GENERAL INTERPRETATION OF TERMS

[0054] In understanding the scope of the present invention, the term “comprising” and its derivatives, as used herein, are intended to be open ended terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but do not exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The foregoing also applies to words having similar meanings such as the terms, “including”, “having” and their derivatives. Also, the terms “part,” “section,” “portion,” “member” or “element” when used in the singular can have the dual meaning of a single part or a plurality of parts.

[0055] While only selected embodiments have been chosen to illustrate the present invention, it will be apparent to those skilled in the art from this disclosure that various changes and modifications can be made herein without departing from the scope of the invention as defined in the appended claims. For example, although in the embodiments a wet clutch is used as the frictional holding element, an electromagnetic clutch or any other type of holding element can be used so long as it can transmit torque in a slipping state. In addition in Figures 7 to 9, the transmission is depicted as having $(n + 1)$ gears of different gear ratios (where n is a natural number equal to or larger than 3). However, it is acceptable for the value of n to be 2 ($n = 2$) and, in the configurations shown in Figures 8 and 9, it is acceptable for the transmission to have two gears. When the transmission shown in Figure 8 is configured as a two-gear transmission, the one-way clutch 90 is provided with respect to the gear having the largest gear ratio and the wet clutch 7 is provided with respect to the gear having the smallest gear ratio. Also in Figure 5, a proportional control is presented as an example of a rotational speed feedback control. However, it is also acceptable to use a PI control (combination of a proportional control and an integral control) or a PID control (combination of a proportional control, an integral control, and a derivative control).

[0056] Moreover, components that are shown directly connected or contacting each other can have intermediate structures disposed between them, unless otherwise indicated. The functions of one element can be performed by two, and vice versa. The structures and functions of one embodiment can be adopted in another embodiment. It is not necessary for all advantages to be present in a particular embodiment at the same time. Every feature which is unique from the prior art, alone or in combination with other features, also

should be considered a separate description of further inventions by the applicant, including the structural and/or functional concepts embodied by such feature(s). Thus, the foregoing descriptions of the embodiments according to the present invention are provided for illustration only, and not for the purpose of limiting the invention as defined by the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A vehicle drive apparatus comprising:
 - a main power source;
 - a first motor/generator;
 - a second motor/generator;
 - a planetary gearset operatively coupled to the main power source and the first motor/generator to rotate an output shaft leading to a drive wheel; and
 - a step-shifting automatic transmission connecting the planetary gearset and the second motor/generator to the output shaft leading to the drive wheel for selectively changing an output gear ratio from the planetary gearset and the second motor/generator, the step-shifting automatic transmission having a plurality of gear positions;
 - the step-shifting transmission including a dog clutch serving as a holding element for at least one the gear positions and a frictional holding element as a holding element for at least one other of the gear positions such that the frictional holding element at least transmits torque in a slipping state during a shifting operation.

2. The vehicle drive apparatus recited in claim 1, wherein
 - the dog clutch is engaged to establish the one of the gear positions, which has a larger gear ratio of the gear positions with respect to the other of the gear positions being established by engagement of the frictional holding element.

3. The vehicle drive apparatus recited in claim 2, further comprising
 - a one-way clutch arranged in parallel with the dog clutch and is engaged when a rotational speed from the planetary gearset is higher than a rotational speed of the output shaft leading to the drive wheel.

4. The vehicle drive apparatus recited in claim 1, wherein the frictional holding element is engaged to establish the other of the gear positions, which has a smaller gear ratio of the gear positions with respect to the one of the gear positions being established by engagement of the dog clutch.

5. The vehicle drive apparatus recited in claim 1, wherein the step-shifting automatic transmission has at least three of the gear positions, with the dog clutch serving being engaged to establish the one of the gear positions which is other than a gear position having a largest gear ratio and a gear position having a smallest gear ratio.

6. The vehicle drive apparatus recited in claim 1, wherein a control device operatively coupled to the frictional holding element to selectively control the frictional holding element to a half-engaged state when the step-shifting automatic transmission is shifted under a condition in which power is transmitted to the output shaft leading to the drive wheel.

7. The vehicle drive apparatus recited in claim 6, wherein the control device is further configured to determine a target value for a torque transmitted to an input shaft of the step-shifting automatic transmission based on a gear ratio of the frictional holding element and an output torque target value for the output shaft leading to the drive wheel.

8. The vehicle drive apparatus recited in claim 6, wherein the control device is further configured to execute a rotational speed feedback control of at least one of the first and second motor/generators.

9. The vehicle drive apparatus recited in claim 1, wherein the dog clutch is engaged to establish the one of the gear positions, which has a largest gear ratio of the gear positions.

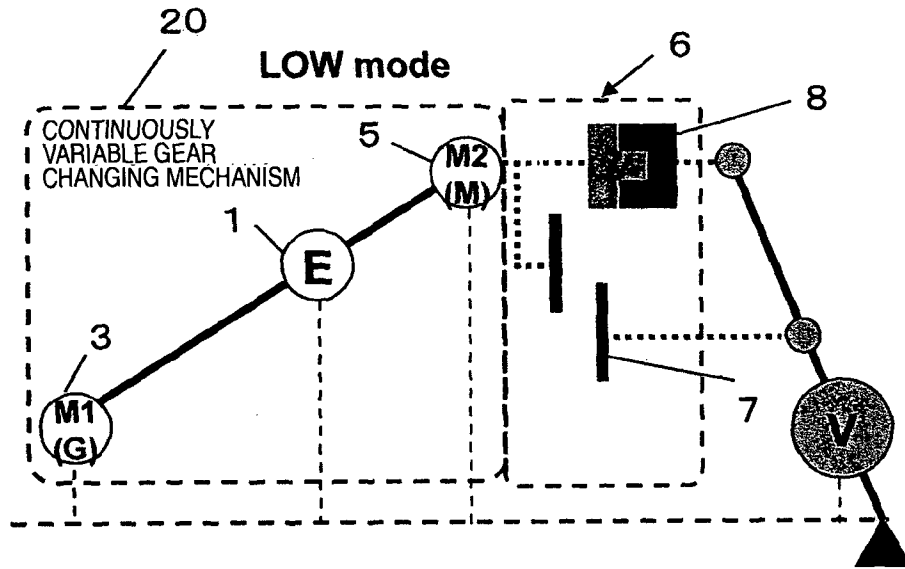


FIG. 2

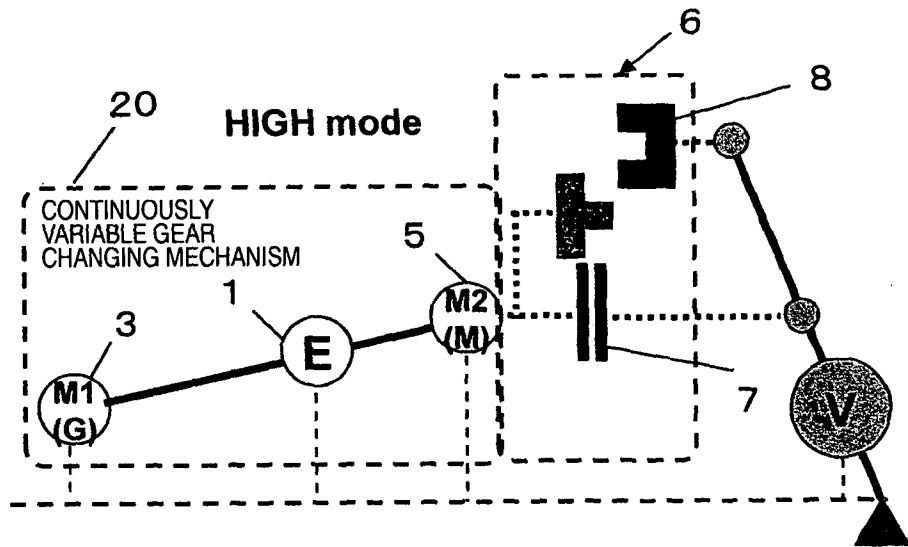


FIG. 3

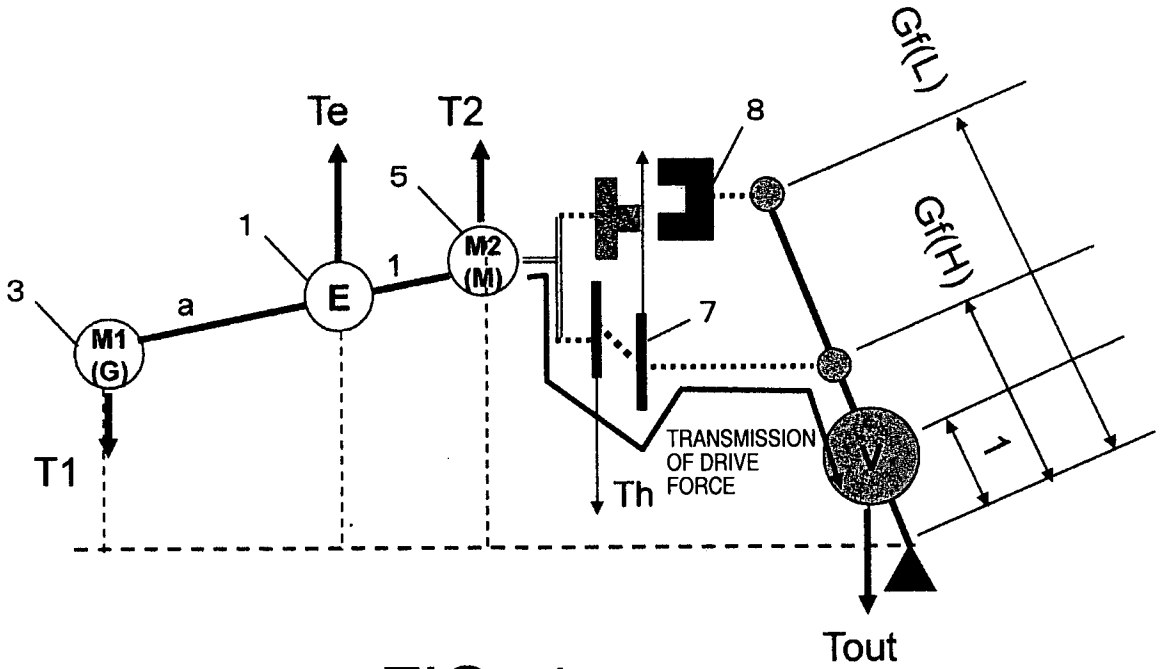


FIG. 4

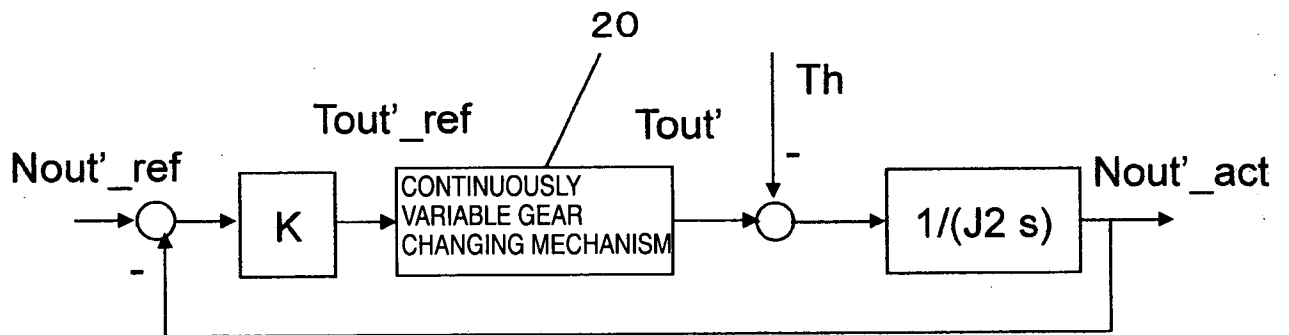


FIG. 5

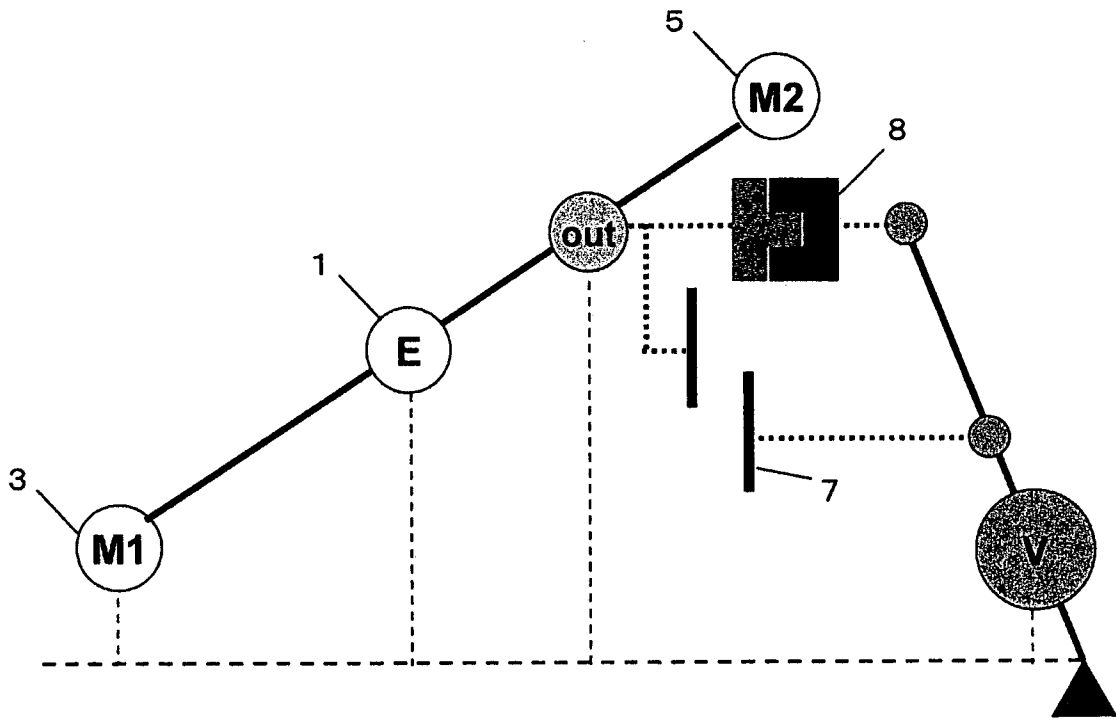


FIG. 6

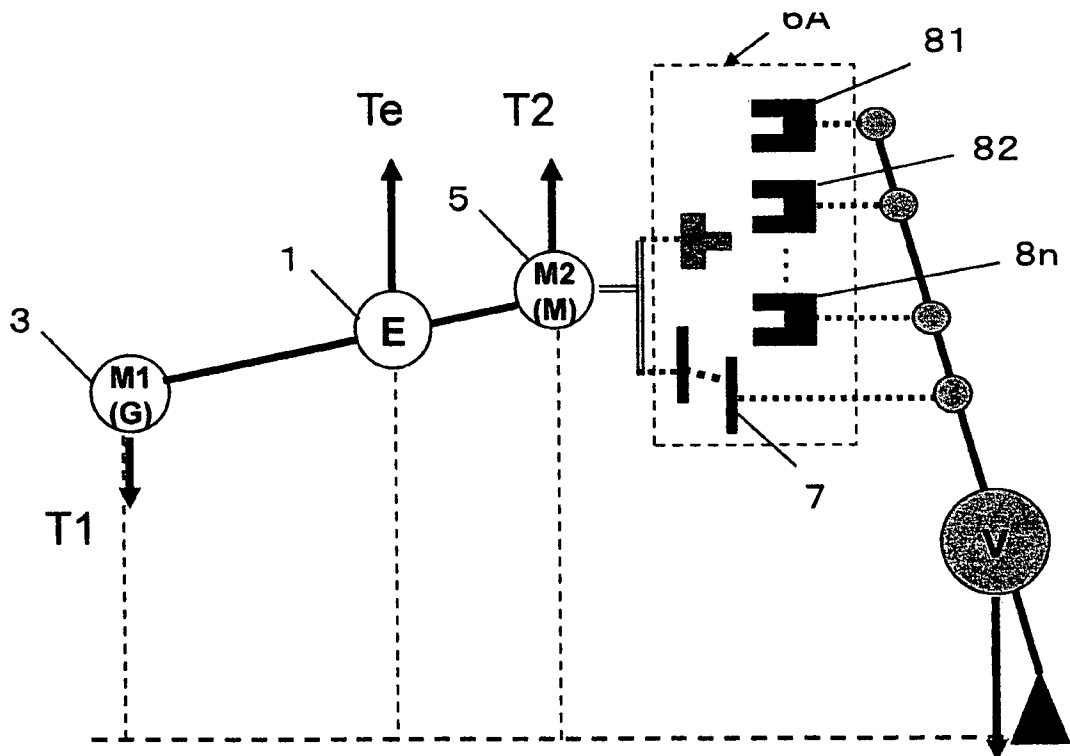


FIG. 7

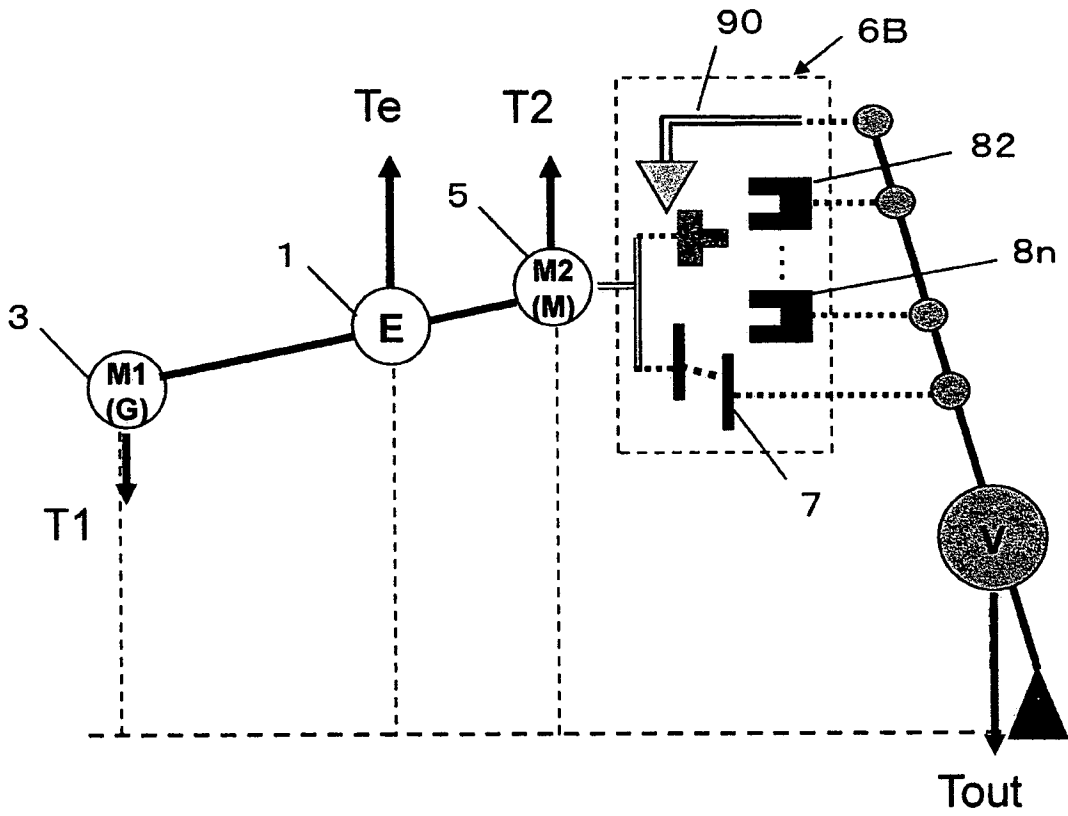


FIG. 8

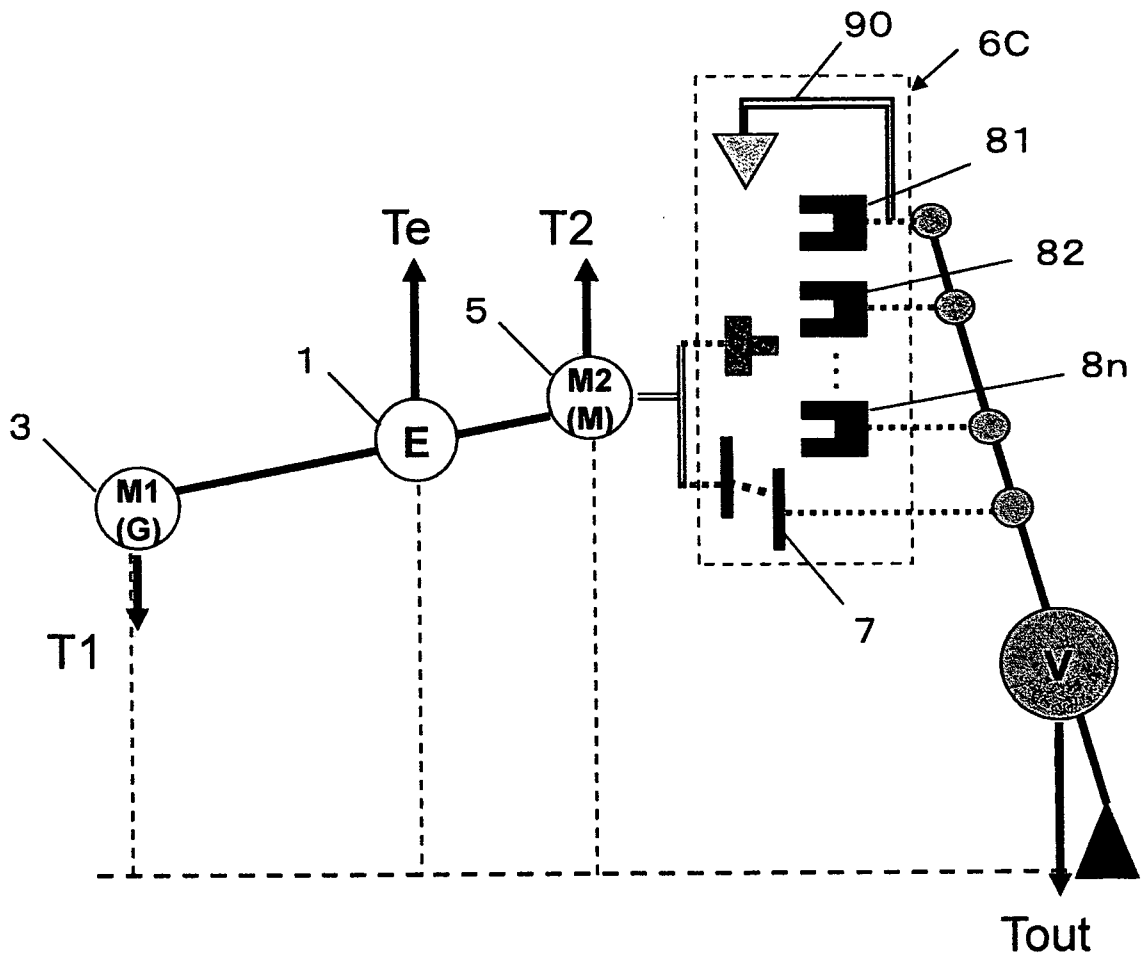


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2009/000200

A. CLASSIFICATION OF SUBJECT MATTER		
Int.Cl. See extra sheet		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Int.Cl. B60K6/365, B60K6/445, B60K6/547, B60L11/14, B60W10/08, B60W10/10, B60W20/00, F16H61/04, F16H61/684		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Published examined utility model applications of Japan 1922-1996 Published unexamined utility model applications of Japan 1971-2009 Registered utility model specifications of Japan 1996-2009 Published registered utility model applications of Japan 1994-2009		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2003-127681 A (TOYOTA JIDOSHA KABUSHIKI KAISHA) 2003.05.08, paragraph 0024, Fig 5 & US 2003/0078134 A1 & DE 60214104 T2 & CA 2406817 A1 & ES 2269583 T3 & CN 1413855 A & KR 2003-0033971 A	1-9
Y	JP 2000-301959 A (HITACHI, LTD.) 2000.10.31, claims 1,2, paragraph 0036, Fig 4 & US 6341541 B1 & DE 10019597 A1	1-9
Y	JP 2000-6676 A (HONDA MOTOR CO., LTD.) 2000.01.11, paragraph 0033, Figs 4,5 (Family:none)	3,5
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search 11.05.2009		Date of mailing of the international search report 26.05.2009
Name and mailing address of the ISA/JP Japan Patent Office 3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan		Authorized officer Tsuda, Shingo Telephone No. +81-3-3581-1101 Ext. 3328
		3J 3430

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2009/000200

CLASSIFICATION OF SUBJECT MATTER

B60K6/365 (2007. 10) i, B60K6/445 (2007. 10) i, B60K6/547 (2007. 10) i,
B60L11/14 (2006. 01) i, B60W10/08 (2006. 01) i, B60W10/10 (2006. 01) i,
B60W20/00 (2006. 01) i, F16H61/04 (2006. 01) i, F16H61/684 (2006. 01) n