



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2239449 C 2002/05/21

(11)(21) **2 239 449**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 1996/12/05
(87) Date publication PCT/PCT Publication Date: 1997/06/12
(45) Date de délivrance/Issue Date: 2002/05/21
(85) Entrée phase nationale/National Entry: 1998/06/03
(86) N° demande PCT/PCT Application No.: JP 1996/003560
(87) N° publication PCT/PCT Publication No.: 1997/020883
(30) Priorité/Priority: 1995/12/05 (07-339851) JP

(51) Cl.Int.⁶/Int.Cl.⁶ C08J 9/26, B01D 71/26, C08J 5/18,
C08J 9/00, C08L 23/04, H01M 2/16
(72) Inventeurs/Inventors:
KONDO, Takahiko, JP;
HASEGAWA, Takuya, JP
(73) Propriétaire/Owner:
ASAHI KASEI KABUSHIKI KAISHA, JP
(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : FILM MICRO-POREUX EN POLYETHYLENE A FAIBLE TEMPERATURE DE FUSION
(54) Title: POLYETHYLENE MICROPOROUS FILM HAVING LOW FUSING TEMPERATURE

(57) **Abrégé/Abstract:**

A microporous polyethylene membrane which is made from a linear ethylene copolymer having a melt index (MI) of less than 0.1 and a propylene unit content of 0.1 to 4 mole % and which has a fusing temperature of lower than 136 °C; and another microporous membrane which is made from a mixture that comprises a linear ethylene copolymer having a melt index (MI) of less than 0.1 and a propylene unit content of 0.1 to 4 mole % and a high-density polyethylene having a comonomer unit content of less than 0.1 mole % and that has a weight-average molecular weight of 250000 to 700000 and a propylene unit content of 0.1 to 4 mole % and which has a fusing temperature of lower than 136 °C.





PCT

特許協力条約に基づいて公開された国際出願

(51) 国際特許分類6 C08J 9/26, 9/00, H01M 2/16	A1	(11) 国際公開番号 WO97/20883 (43) 国際公開日 1997年6月12日(12.06.97)
(21) 国際出願番号 PCT/JP96/03560 (22) 国際出願日 1996年12月5日(05.12.96) (30) 優先権データ 特願平7/339851 1995年12月5日(05.12.95) JP (71) 出願人 (米国を除くすべての指定国について) 旭化成工業株式会社 (ASAHI KASEI KOGYO KABUSHIKI KAISHA)[JP/JP] 〒530 大阪府大阪市北区堂島浜1丁目2番6号 Osaka, (JP) (72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 長谷川卓也(HASEGAWA, Takuya)[JP/JP] 近藤孝彦(KONDO, Takahiko)[JP/JP] 〒233 神奈川県横浜市港南区大久保3-36-5 Kanagawa, (JP) (74) 代理人 弁理士 浅村 皓, 外(ASAMURA, Kiyoshi et al.) 〒100 東京都千代田区大手町2丁目2番1号 新大手町ビル331 Tokyo, (JP)		(81) 指定国 AU, CA, CN, JP, KR, RU, US, 欧州特許 (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). 添付公開書類 国際調査報告書
(54)Title: MICROPOROUS POLYETHYLENE MEMBRANES HAVING LOW FUSING TEMPERATURES (54)発明の名称 低いヒューズ温度を有するポリエチレン微多孔膜 (57) Abstract A microporous polyethylene membrane which is made from a linear ethylene copolymer having a melt index (MI) of less than 0.1 and a propylene unit content of 0.1 to 4 mole % and which has a fusing temperature of lower than 136 °C; and another microporous membrane which is made from a mixture that comprises a linear ethylene copolymer having a melt index (MI) of less than 0.1 and a propylene unit content of 0.1 to 4 mole % and a high-density polyethylene having a comonomer unit content of less than 0.1 mole % and that has a weight-average molecular weight of 250000 to 700000 and a propylene unit content of 0.1 to 4 mole % and which has a fusing temperature of lower than 136 °C.		

(57) 要約

メルトインデックス (MI) が 0.1 未満、プロピレン単位含量が 0.1 ~ 4 モル%である線状共重合ポリエチレンからなり、ヒューズ温度が 136 °C 未満であるポリエチレン微多孔膜。メルトインデックス (MI) が 0.1 未満、プロピレン単位含量 0.1 ~ 4 モル%の線状共重合ポリエチレンとモノマー単位含量 0.1 モル%未満の高密度ポリエチレンとの混合物であって、該混合物の重量平均分子量が 25 ~ 70 万であり、プロピレン単位含量が 0.1 ~ 4 モル%である上記混合物からなり、かつヒューズ温度が 136 °C 未満であるポリエチレン微多孔膜。

情報としての用途のみ

PCTに基づいて公開される国際出願をパンフレット第一頁にPCT加盟国を同定するために使用されるコード

AL	アルバニア	EE	エストニア	LR	リベリア	RU	ロシア連邦
AM	アルメニア	ES	スペイン	LS	レソト	SD	スーダン
AT	オーストリア	FI	フィンランド	LT	リトアニア	SE	スウェーデン
AU	オーストラリア	FR	フランス	LU	ルクセンブルグ	SG	シンガポール
AZ	アゼルバイジャン	GA	ガボン	LV	ラトヴィア	SI	スロヴェニア
BB	バルバドス	GB	イギリス	MC	モナコ	SK	スロヴァキア共和国
BE	ベルギー	GE	グルジア	MD	モルドバ	SN	セネガル
BF	ブルキナ・ファソ	GH	ガーナ	MG	マダガスカル	SZ	スワジランド
BG	ブルガリア	GN	ギニア	MK	マケドニア旧ユーゴスラ	TD	チャード
BJ	ベナン	GR	ギリシャ	UA	ウクライナ	TG	トーゴ
BR	ブラジル	HU	ハンガリー	ML	マリ	TJ	タジキスタン
BY	ベラルーシ	IE	アイルランド	MN	モンゴル	TM	トルクメニスタン
CA	カナダ	IS	アイスランド	MR	モリタニア	TR	トルコ
CF	中央アフリカ共和国	IT	イタリア	MW	マラウイ	TT	トリニダード・トバゴ
CG	コンゴ	JP	日本	MX	メキシコ	UA	ウクライナ
CH	スイス	KE	ケニア	NE	ニジェール	UG	ウガンダ
CI	コート・ジボアール	KG	キルギスタン	NL	オランダ	US	米国
CM	カメルーン	KP	朝鮮民主主義人民共和国	NO	ノルウェー	UZ	ウズベキスタン共和国
CN	中国	KR	大韓民国	NZ	ニュージーランド	VN	ヴェトナム
CZ	チェッコ共和国	KZ	カザフスタン	PL	ポーランド	YU	ユーゴスラビア
DE	ドイツ	LI	リヒテンシュタイン	PT	ポルトガル		
DK	デンマーク	LK	スリランカ	RO	ルーマニア		

DESCRIPTION

POLYETHYLENE MICROPOROUS FILM HAVING LOW FUSE TEMPERATURE

Technical Field

This invention relates to a polyethylene microporous film, a separator composed thereof and a battery in which the same is used as a battery separator.

5 Background Art

Polyethylene microporous films are used in micro filtration membranes, battery separators, condenser separators and the like. Among these uses, the use as a battery separator, particularly a separator for lithium
10 ion cell, requires that the polyethylene microporous film exerts, in addition to general physical properties such as mechanical strength and film permeability, a so-called "fuse effect" such that when the inner part of the battery is overheated, the separator fuses to form a
15 film, which covers the electrode, thereby cutting off the electric current to secure the safety of battery.

In the case of a polyethylene microporous film, it is known that the fuse temperature, namely the temperature at which the fuse effect is exerted, is about
20 130 to 150°C. Even when the inner part of a battery is overheated by any cause, the microporous film fuses upon reaching the fuse temperature to form a film with which the electrode is covered, so that the passage of ions is cut off and the cell reaction is stopped. However, when

the temperature elevation is very rapid, the temperature in the inner part of battery is further elevated even after the polyethylene microporous film has fused, and consequently the film is broken, which causes a short in the battery in some cases, so that the development of a polyethylene microporous film having a lower fuse temperature has become a problem.

For example, JP-A-5-25,305 and JP-A-2-21,559 disclose a method for lowering the fuse temperature of a film by blending into an ultrahigh molecular weight polyethylene (UHMWPE) a branched, low-density polyethylene (LDPE) or a linear, low-density polyethylene (LLDPE). According to this method, the fuse temperature of the film can be expected to be lowered to some extent. On the other hand, however, the melt index (MI) is 0.1 to 100 which is very high as compared with UHMWPE and HDPE, so that there have been problems such as the mechanical strength and permeability of film are deteriorated, and when the amount of LDPE and LLDPE added is increased the film is not made porous. Moreover, the above method has had a problem in film productivity, such as at least one hour being required for dissolving the polymer by heating because UHMWPE having a low dissolvability is used as the essential component.

The object of this invention is to solve the above-mentioned problems and provide a polyethylene microporous film which is excellent in mechanical strength, permeability and productivity and has a low

fuse temperature.

The present inventors have examined a linear copolymeric polyethylene having a much higher molecular weight than LLDPE which has been used in the prior art.

5 As a result, it has been found that a linear copolymeric polyethylene can be made porous even when used alone and a polyethylene microporous film produced therefrom has a high strength and a low fuse temperature, which compares quite well with the prior art. However, such a film has
10 not had a sufficient permeability for using as a separator as compared with a film produced from HDPE having a high molecular weight.

Therefore, a further examination has been made on the kind of a comonomer to be introduced as a
15 monomeric unit into the linear copolymeric polyethylene, and the present inventors have surprisingly found that a microporous film composed of a linear copolymeric polyethylene in which propylene is used as the comonomer (referred to hereinafter as the C3 copolymer in some
20 cases) is smaller in shrinkage than a microporous film composed of a copolymer in which butene-1 is used as the comonomer (referred to hereinafter as the C4 copolymer in some cases) and a microporous film composed of a copolymer in which other α -olefins are used, and has a
25 sufficient permeability for using a separator.

The reason why the C3 copolymer specifically imparts a high porosity to the film has not been clarified, but it is considered that the methyl group which is

the side chain of the C3 copolymer is easily incorporated into the crystals of the polymer as compared with an ethyl group and butyl group, so that it could be possible that the C3 copolymer has a crystalline structure close
5 to HDPE in spite of being a copolymer, and exhibits a higher permeability than copolymers in which other comonomers are used such as the C4 copolymer.

Further, the present inventors have made extensive research to achieve a higher permeability and
10 have consequently found that when the C3 copolymer is not used alone but used in admixture with a high density polyethylene, a higher permeability is obtained simultaneously with the same fuse temperature, and based on this knowledge, they have succeeded in producing a bat-
15 tery having more improved discharge characteristics and safety.

Disclosure of Invention

The first mode of this invention is a polyethylene microporous film which is composed of a linear
20 copolymeric polyethylene having a melt index of less than 0.1 and a propylene unit content of 0.1 to 4 mol % and which has a fuse temperature of less than 136°C.

The second mode of this invention is a polyethylene microporous film which is composed of a mixture
25 of a linear copolymeric polyethylene having a melt index of less than 0.1 and a propylene unit content of 0.1 to 4 mol % and a high density polyethylene having a comonomer

unit content of less than 0.1 mol %, the above mixture having a weight average molecular weight of 250,000 to 700,000 and a propylene unit content of 0.1 to 4 mol % and which has a fuse temperature of less than 136°C.

5 The third mode of this invention is a separator composed of the above-mentioned polyethylene microporous film.

 The fourth mode of this invention is a battery in which the above-mentioned separator is used as a
10 battery separator.

Best Mode for Carrying Out the Invention

 The melt indexes (MI) of the C3 copolymer and the mixture of the C3 copolymer and a high density polyethylene are less than 0.1, preferably less than 0.07 and
15 more preferably less than 0.05. When the MI is 0.1 or more, it is difficult to make the film porous. As the C3 copolymer having such an MI and the above mixture, those having a weight average molecular weight of 200,000 to 4,000,000, preferably 250,000 to 700,000, and more
20 preferably 250,000 to 500,000 are mentioned.

 When the C3 copolymer is used alone, the weight average molecular weight thereof is 200,000 to 700,000, preferably 250,000 to 600,00, and more preferably 250,000 to 500,000.

25 The propylene unit content of the C3 copolymer is 0.1 to 4 mol %, preferably 0.2 to 3 mol %, and more preferably 0.5 to 2 mol %, based on the ethylene unit.

When the propylene unit content is less than 0.1 mol % based on the ethylene unit, the lowering of the fuse temperature is insufficient, and when it exceeds 4 mol %, the crystallinity is lowered too much and it becomes
5 difficult to make the film porous.

The density of the C3 copolymer is 0.85 to 0.97, preferably 0.90 to 0.96, and more preferably 0.92 to 0.95.

The C3 copolymer used in this invention can be
10 produced by various known methods. For example, it can be produced by polymerization using a chromium compound-supported catalyst or magnesium compound-containing Ziegler catalyst as disclosed in JP-B-1-12,777.

Furthermore, in this invention, by mixing the
15 above C3 copolymer with a high density polyethylene having a comonomer unit content of less than 0.1 mol % (referred to hereinafter as HDPE in some cases), the relation between permeability and fuse temperature can be improved more than when the C3 copolymer is used alone.
20 The reason therefor has not be clarified; however, it is considered that when a mixture having a lowered comonomer concentration is used, which is prepared by uniformly dispersing the C3 copolymer having a high comonomer concentration in a high density polyethylene having a
25 high porousness to dilute it, the relation between porousness and fuse effect can be better improved than when a C3 copolymer having the same comonomer concentration as the above mixture is used alone.

The weight average molecular weight of HDPE which can be mixed is 100,000 to 4,000,000, preferably 200,000 to 1,000,000, and more preferably 250,000 to 700,000.

5 The proportion of the C3 copolymer contained in the mixture is 1% to 100%, preferably 5% to 90%, and more preferably 10% to 80%. When the proportion of the C3 copolymer is less than 1%, it is difficult to obtain a sufficiently low fuse temperature.

10 The weight average molecular weight of the mixture is 250,000 to 700,000, preferably 250,000 to 700,000, and more preferably 250,000 to 500,000.

 The propylene unit content of the C3 copolymer can be selected from the range of from 0.1 to 4.0 mol %; however, it is preferable to set, in anticipation of
15 dilution with HDPE, a higher propylene unit content than when it is used alone.

 An explanation is made below of the present process for producing the polyethylene microporous film.

20 The polyethylene microporous film is produced by dissolving polyethylene at a temperature not lower than its melting point in a solvent called a plasticizer, cooling the resulting solution to a temperature not higher than its crystallization temperature to produce a
25 polymer gel, subjecting the polymer gel to film-formation (film-forming step), stretching the film obtained (the stretching step) and thereafter removing the plasticizer (the plasticizer-removing step).

The plasticizer referred to herein means an organic compound capable of forming a uniform solution of polyethylene at a temperature not higher than the boiling point of the plasticizer, and as specific examples thereof, there are mentioned decalin, xylene, dioctyl phthalate, dibutyl phthalate, stearyl alcohol, oleyl alcohol, decyl alcohol, nonyl alcohol, diphenyl ether, n-decane, n-dodecane, paraffin oil and the like. Among them, paraffin oil, dioctyl phthalate and decalin are preferred. The proportion of the plasticizer in the polymer gel is not particularly limited; however, it is 20% to 90%, preferably 50% to 70%. When the proportion of the plasticizer is 20% or less, it is difficult to obtain a microporous film having an appropriate porosity, and when it is 90% or more, the viscosity of a hot solution is lowered, which makes the continuous formation of a sheet difficult.

Hereinafter, the process for producing the polyethylene microporous film is divided into the film-forming step, the stretching step and the plasticizer-removing step and each is explained separately.

[Film-forming step]

The film-forming step is not particularly limited; however, for example, a sheet having a thickness of several tens of μm to several mm can be formed by feeding a linear copolymeric polyethylene powder and a plasticizer to an extruder, kneading the two at a temperature of about 200°C , and thereafter casting the

mixture from a usual hanger coat die onto a cooling roll.

In carrying out this invention, an ultrahigh molecular weight polyethylene is not used as the essential component unlike prior techniques, so that no particular heating and dissolving equipment is required, a homogenous sheet can be prepared very simply by only feeding a polyethylene and a plasticizer to an extruder. [Stretching step]

Subsequently, the sheet obtained is stretched at least monoaxially to form a stretched film. The stretching method is not particularly limited; however, a tentering method, a rolling method, a calendering method and the like can be used. Among them, simultaneous, biaxial stretching by a tentering method is preferred. The stretching temperature is a temperature ranging from room temperature to the melting point of the polymer gel, preferably 80 to 130°C, and more preferably 100 to 125°C. The stretching ratio is 4 to 400 times, preferably 8 to 200 times, and more preferably 16 to 100 times, as an areal ratio. When the stretching ratio is not more than 4 times, the strength as a separator is insufficient, and when it is not less than 400 times, not only is the stretching difficult, but also such adverse effects as the porosity of the microporous film obtained is low, and the like, tend to result.

[Plasticizer-removing step]

Subsequently, a microporous film is obtained by removing the plasticizer from the stretched film. The

method of removing the plasticizer is not particularly limited. For example, when paraffin oil or dioctyl phthalate is used as the plasticizer, it is sufficient to extract the same with an organic solvent such as

5 methylene chloride, methyl ethyl ketone or the like. However, the solvent can be sufficiently removed by heating and drying the microporous film obtained at a temperature not higher than the fuse temperature thereof. Moreover, when, for example, a low-boiling point compound

10 such as decalin or the like is used as the plasticizer, the solvent can be sufficiently removed by only heating and drying the microporous film at a temperature not higher than the fuse temperature thereof. In any case, it is preferable to remove the plasticizer while

15 restraining the film by fixing the film or the like.

In order to improve permeability and enhance dimensional stability, the polyethylene microporous film obtained by the above-mentioned production process is, if necessary, subjected to heat treatment at a temperature

20 not higher than the fuse temperature.

[Physical properties]

The thickness of the microporous film is 1 to 500 μm , preferably 10 to 200 μm , and more preferably 15 to 50 μm . When the film thickness is less than 1 μm , the

25 mechanical strength of the film is not sufficient, and when the film thickness is more than 500 μm , it becomes difficult to miniaturize and save weight in the battery.

The porosity, which is used as a measure of

porousness, and the gas transmission rate, which is used as a measure of permeability, are affected by the conditions in the plasticizer-removing step, so that in this invention, they are evaluated by numerical values
5 obtained when the removal of plasticizer is effected by extraction with methylene chloride at ordinary temperature in the non-restraint state.

The porosity in this invention is 20 to 80%, preferably 35 to 50%. When the porosity is less than
10 20%, the permeability is not sufficient and when it is more than 80%, no sufficient mechanical strength is obtained.

The gas transmission rate in this invention is 10 sec to 6,000 sec, preferably 50 sec to 4,000 sec, and
15 more preferably 100 sec to 2,000 sec. When the gas transmission rate is more than 6,000 sec the permeability is not sufficient, and when the gas transmission rate is less than 10 sec the pore diameter is too large, so that the above gas transmission rate is not desirable.

20 The diameters of pores in the microporous film are 0.001 to 0.3 μm , preferably 0.005 to 0.1 μm , and more preferably 0.01 to 0.05 μm . When the pore diameter is less than 0.001 μm , the permeability is not sufficient and when the pore diameter is more than 0.3 μm , cutting-
25 off of electric current due to the fuse effect occurs late and besides a short circuit due to precipitated dendrites and degraded active substances is feared, so that a film having such fine pores is not suited for use

as a battery separator.

This invention is further explained in more detail below by Examples, in which "part" is "part by weight" in all appearances.

5 The methods of testing the characteristics shown in the Examples are as follows:

(1) Film thickness

Determined by use of a dial gauge (Ozaki Seisakusho: PEACOCK No. 25).

10 (2) Porosity

A sample of 20-cm square was cut from a micro-porous film and the volume and weight thereof were determined, after which the porosity was calculated from the results obtained using the following equation:

15 Porosity (%) = $100 \times [\text{volume (cm}^3\text{)} - \text{weight (g)}] / 0.95 / \text{volume.}$

(3) Sticking strength

Using a KES-G5 handy compressive tester manufactured by Katotech, a sticking test was conducted using
20 a pin having a tip curvature radius of 0.5 mm at a sticking speed of 2 mm/sec and the maximum sticking load was determined as the maximum sticking strength (g). Also, a value obtained by multiplying the sticking strength by a value of 25 (μm)/film thickness (μm) was determined as a
25 25 μ-reduced sticking strength.

(4) Gas transmission rate

Measured by a Gurley densometer according to JIS-P-8117. Also, a value obtained by multiplying the

gas transmission rate by a value of 25 (μm)/film thickness (μm) was determined as a 25- μ reduced gas transmission rate.

(5) Pore diameter

5 1) SEM method: Measured by a scanning type electron microscope.

2) Gas transmission method: The pore diameter of a microporous film can be calculated from porosity and gas transmission rate using the following equation by
10 assuming the Kundsén flow in the determination of gas transmission rate:


$$\text{Pore diameter } (\mu\text{m}) = 189 \times \tau^2 / \{\text{porosity } (\%) \times 25\text{-}\mu \text{ reduced gas transmission rate (sec)}\}$$

wherein the flexing rate τ of pore was made 2.0 as to all
15 microporous films.

(6) Comonomer unit content

The comonomer unit content (mol %) is determined by multiplying by 100 the quotient obtained by dividing the mole-reduced amount (A) of the integral
20 value of signal strengths due to the comonomer unit by the sum of (A) and the mole-reduced amount (B) of the integral value of signal strengths due to ethylene unit in the ^{13}C -NMR spectrum.

For example, when propylene is used as the
25 comonomer, in the following structure model:

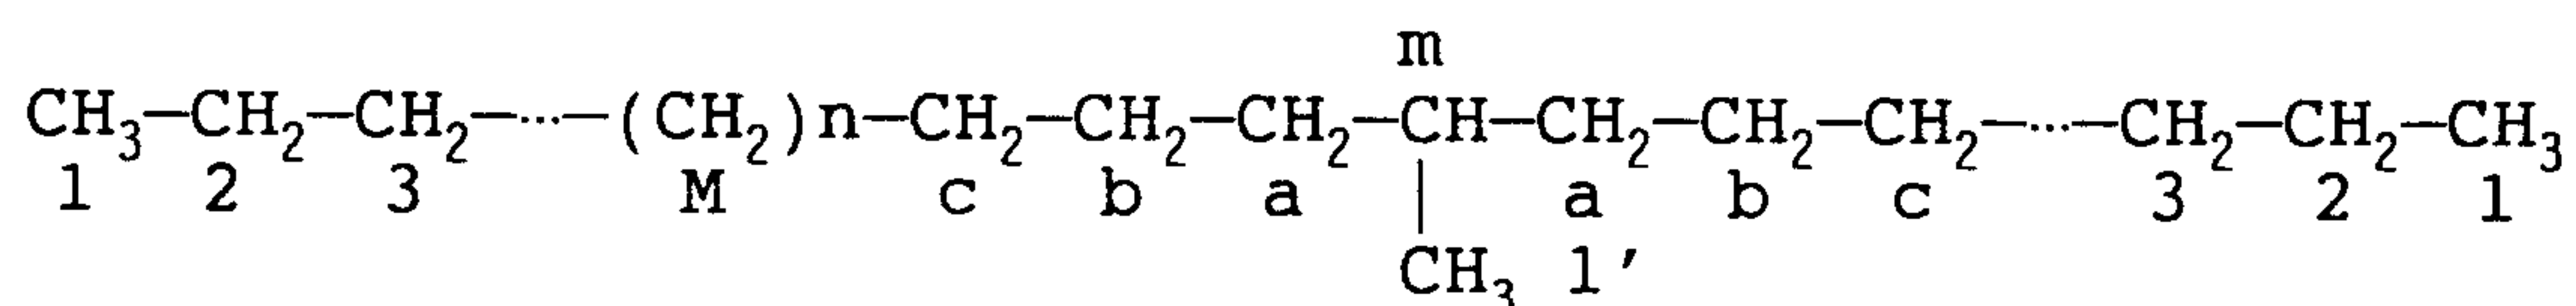

wherein I_1 , I_1' , I_2 , I_3 , I_a , I_b , I_c , I_m and I_M represent the respective signal intensities resulting from the corresponding carbons in the ^{13}C -NMR spectrum,

Comonomer unit content (mol %) = $(A)/[(A) + (B)] \times 100$

5 wherein $(A) = (I_1' + I_m + I_a/2)/3$

$(B) = (I_1 + I_2 + I_3 + I_M + I_a/2 + I_b + I_c)/2.$

Therefore, the signal numbers I_1 , I_2 and I_3 resulting from the terminal carbons are neglected and the above equation is arranged to obtain the following equation:

10 Comonomer unit content (mol %) = $I_m/[I_m + (I_M + 5I_m)/2] \times 100.$

(7) Melt index

The melt index measured based on JIS K-7210 at a temperature of 190°C under a load of 2.16 kg and was
15 made MI. Incidentally, when MI becomes about less than 0.01 which is enough smaller than 0.1, variation tends to be caused in the measurement of MI, so that when the comparison of melt indexes is effected in more detail, HMI obtained by measurement under a load of 21.6 kg can be
20 used together with the usually used MI (load: 2.16 kg).

(8) Fuse temperature

An electrolyte solution prepared by adding lithium borofluoride to a mixed solvent of propylene carbonate and butyrolactone (volume ratio = 1 : 1) so
25 that the concentration became 1.0 M was used to impregnate therewith a polyethylene microporous film cut to a diameter of 16 mm, and this film was nipped by two sheets of a nickel-made electrode under a pressure of 20 kg/cm²

and the impedance variation when the temperature was elevated from room temperature at a rate of 20°C/min was measured under the conditions of 1 V and 1 kHz. In this measurement, the temperature at which the impedance
5 reached 1,000 Ω was determined as the fuse temperature.

(9) Overcharge test

A lithium ion cell was produced by using as a positive electrode a sheet obtained by mixing LiCoO_2 used as a positive active material, graphite and acetylene
10 black used as conducting agents and fluororubber used as a binding agent, at a weight ratio of LiCoO_2 : graphite : acetylene black : fluororubber = 88 : 7.5 : 2.5 : 2, mixing dimethylformamide with the resulting mixture to prepare a paste, coating this paste on an Al foil and
15 then drying the same; as a negative electrode a sheet obtained by mixing dimethylformamide with a mixture of needle cokes : fluororubber = 95 : 5 weight ratio to prepare a paste, coating this paste on a Cu foil and then drying the same; and an electrolyte solution prepared by
20 adding lithium borofluoride to a mixed solvent of propylene carbonate and butyrolactone (volume ratio = 1 : 1) so that the concentration became 1.0 M. This cell was charged at 4.2 V for 5 hours, and then further over-charged at constant current. The internal temperature of
25 the cell was elevated by the overcharge and when the temperature reached the fuse temperature of a sample the electric current was cut off. Samples on which current return was not caused for at least 10 minutes thereafter

were evaluated as "0". Incidentally, the present test is an accelerated test, so that the test was conducted in such a state that a safety device with which the actual battery was provided such as PTC device or the like was
5 removed.

Example 1 (this invention)

Using a batch system melt kneading machine (Toyo Seiki: Laboplastomill), 40 parts of a C3 copolymer (density: 0.934, propylene unit content: 0.7 mol %) having an MI of 0.016, an HMI of 0.60 and a weight average molecular weight of 430,000, 60 parts of paraffin oil (Matsumura Sekiyu Kenkyusho: P350P) and 0.5 part of a thermal stabilizer (Ciba Geigy: Irganox 245) were kneaded at 200°C at 50 rpm for 10 minutes. The resulting mixture
15 was molded by a heated press at 200°C and thereafter cooled by a water-cooled press to prepare an original sheet having a thickness of 1,000 µm. This original sheet was stretched 6 x 6 times at 115°C by use of a simultaneous biaxial stretching machine (Toyo Seiki), and
20 thereafter, the paraffin oil was removed by extraction with methylene chloride. Physical properties of the film obtained are shown in Table 1.

Example 2 (this invention)

In the same manner as in Example 1, except that
25 a C3 copolymer (density: 0.929, propylene unit content: 1.6 mol %) having an MI of 0.017, an MHI of 0.42 and a

weight average molecular weight of 420,000 was used, a polyethylene microporous film was prepared. Physical properties of the film obtained are shown in Table 1.

Example 3 (this invention)

5 In the same manner as in Example 1, except that a C3 copolymer (density: 0.931, propylene unit content: 1.9 mol %, provided measured by an IR spectrum) having an MI of less than 0.01, an HMI of 1.58 and a weight average molecular weight of 330,000 was used, a polyethylene
10 microporous film was prepared. Physical properties of the film obtained are shown in Table 1.

Example 4 (this invention)

 In the same manner as in Example 1, except that a C3 copolymer (density: 0.930, propylene unit content:
15 1.8 mol %, provided measured by an IR spectrum) having an MI of less than 0.01, an HMI of 0.72 and a weight average molecular weight of 420,000 was used, a polyethylene microporous film was prepared. Physical properties of the film obtained are shown in Table 1.

20 Example 5 (this invention)

 In the same manner as in Example 1, except that a C3 copolymer (density: 0.933, propylene unit content: 1.6 mol %, provided measured by an IR spectrum) having an MI of less than 0.01, an HMI of 0.65 and a weight average
25 molecular weight of 480,000 was used, a polyethylene

microporous film was prepared. Physical properties of the film obtained are shown in Table 1.

Example 6 (this invention)

In the same manner as in Example 1, except that
5 a C3 copolymer (density: 0.929, propylene unit content:
1.9 mol %, provided measured by an IR spectrum) having an
MI of less than 0.01, an HMI of 0.46 and a weight average
molecular weight of 520,000, a polyethylene microporous
film was prepared. Physical properties of the film
10 obtained are shown in Table 1.

Example 7 (comparison)

In the same manner as in Example 1, except that
a C4 copolymer (density: 0.928, butene unit content: 1.3
mol %) having an MI of 0.013, an HMI of 0.54 and a weight
15 average molecular weight of 400,000 was used, a poly-
ethylene microporous film was prepared. Physical
properties of the film obtained are shown in Table 1.

Example 8 (comparison)

In the same manner as in Example 1, except that
20 40 parts of a high density polyethylene (density 0.956,
comonomer unit content: 0.0 mol %) having an MI of 0.025,
an HMI of 2.33 and a weight average molecular weight of
250,000 and 60 parts of paraffin oil (Matsumura Sekiyu
Kenkyusho: P350P) were used, a polyethylene microporous
25 film was prepared. Physical properties of the film

obtained are shown in Table 1.

Example 9 (comparison)

The same method as in Example 1, except that
LLDPE (density: 0.917) having an MI of 0.4 was used and
5 the extraction was conducted in the restraint state, was
tried; however, the appearance of the film was transpar-
ent and no microporous film was obtained.

Example 10 (comparison)

The same method as in Example 1, except that 40
10 parts of LDPE (density: 0.917) having an MI of 0.3 and 60
parts of paraffin oil (Matsumura Sekiyu: P350P) were
used, was tried; however, the original sheet had too low
a strength to be stretched.

Example 11 (this invention)

15 A polyethylene microporous film was prepared in
the same manner as in Example 1, except that 6 parts of a
C3 copolymer (density: 0.929, propylene unit content: 1.6
mol %, provided measured by an IR spectrum) having an MI
of 0.017 and a weight average molecular weight of
20 420,000, 34 parts of a high density polyethylene (densi-
ty: 0.956, comonomer unit content: 0.0 mol %) having a
weight average molecular weight of 250,000 and 60 parts
of paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were
used and the stretching temperature was 120°C. Using the
25 film obtained, the melt index (HMI) and propylene unit

content of its polyethylene were measured. As a result, the HMI was 1.43 and the propylene unit content was 0.5 mol % (measured by an IR spectrum). Physical properties of the film obtained are shown in Table 2.

5 Example 12 (this invention)

A polyethylene microporous film was prepared in the same manner as in Example 1, except that 12 parts of a C3 copolymer (density: 0.929, propylene unit content: 1.6 mol %, provided measured by an IR spectrum) having an
10 MI of 0.017 and a weight average molecular weight of 420,000, 28 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000 and 60 parts of paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were
15 used and the stretching temperature was 120°C. Using the film obtained, the melt index (HMI) and propylene unit content of its polyethylene were measured. As a result, the HMI was 1.46 and the propylene unit content was 0.8 mol % (measured by an IR spectrum). Physical properties
20 of the film obtained are shown in Table 2.

Example 13 (this invention)

A polyethylene microporous film was prepared in the same manner as in Example 1, except that 20 parts of a C3 copolymer (density: 0.929, propylene unit content:
25 1.6 mol %, provided measured by an IR spectrum) having an MI of 0.017 and a weight average molecular weight of

420,000, 20 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000 and 60 parts of a paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were used and the stretching temperature was 120°C. Using the film obtained, the melt index (HMI) and propylene unit content of its polyethylene were measured. As a result, the HMI was 0.96 and the propylene unit content was 0.9 mol % (measured by an IR spectrum). Physical properties of the film obtained are shown in Table 2.

Example 14 (this invention)

A polyethylene microporous film was prepared in the same manner as in Example 1, except that 20 parts of a C3 copolymer (density: 0.925, propylene unit content: 1.9 mol %, provided measured by an IR spectrum) having a weight average molecular weight of 830,000, 20 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000 and 60 parts of a paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were used. Using the film obtained, the melt index and propylene unit content of its polyethylene were measured. As a result, the MI was less than 0.01, the HMI was 1.26 and the propylene unit content was 1.6 mol % (measured by an IR spectrum). Physical properties of the film obtained are shown in Table 2.

Example 15 (this invention)

A polyethylene microporous film was prepared in the same manner as in Example 1, except that 20 parts of a C3 copolymer (density: 0.925, propylene unit content: 1.9 mol %, provided measured by an IR spectrum) having a weight average molecular weight of 830,000, 20 parts of a high density polyethylene (density: 0.962, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 140,000 and 60 parts of a paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were used. Using the film obtained, the melt index and propylene unit content of its polyethylene were measured. As a result, the MI was 0.019, the HMI was 3.26 and the propylene unit content was 1.8 mol % (measured by an IR spectrum). Physical properties of the film obtained are shown in Table 2.

Example 16 (Comparison)

The same method as in Example 1, except that 20 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000, 20 parts of LLDPE (density: 0.917) having an MI of 0.4 and 60 parts of a paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were used and the stretching temperature was 120°C, was tried; however, the film obtained was transparent and no microporous film was obtained.

Example 17 (comparison)

The same method as in Example 1, except that 20 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000, 20 parts of LDPE (density: 0.917) having an MI of 0.3 and 60 parts of paraffin oil (Matsumura Sekiyu Seisakusho: P350P) were used and the stretching temperature was 120°C, was tried; however, the film obtained was transparent and no microporous film was obtained.

Example 18 (this invention)

Using a 35-mm twin-screw extruder, there were kneaded 20 parts of a C3 copolymer (density: 0.929, propylene unit content: 1.6 mol %, provided measured by an IR spectrum) having an MI of 0.017 and a weight average molecular weight of 420,000, 20 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having a weight average molecular weight of 250,000, 60 parts of paraffin oil (Matsumura Sekiyu Seisakusho: P350P) and 0.1 part of an antioxidant (Ciba Geigy: Irganox 245) at 200°C and then cast onto a cooling roll adjusted to a temperature of 30°C from a hanger coat die having a lip space of 1,550 µm to prepare an original sheet having a thickness of 1,550 µm. This original sheet was continuously stretched 7 x 7 times at 120°C using a simultaneous biaxial stretching machine and then subjected to extraction with methylene chloride to remove

the paraffin oil, thereby obtaining a continuous film. Using the film obtained, the melt index (HMI) and propylene unit content of its polyethylene were measured. As a result, the HMI was 0.96 and the propylene unit
5 content was 0.9 mol % (measured by an IR spectrum). Using this, a spiral lithium cell was prepared and subjected to an overcharge test. The results are shown in Table 3.

Example 19 (comparison)

10 In the same manner as in Example 18, except that 40 parts of a high density polyethylene (density: 0.956, comonomer unit content: 0.0 mol %) having an MI of 0.025, an HMI of 2.33 and a weight average molecular weight of 250,000 was used, a continuous film was ob-
15 tained. The results are shown in Table 3.

Table 1

	Example 1 (this invention)	Example 2 (this invention)	Example 3 (this invention)
Film thickness (μm)	23	21	27
Porosity (%)	39	27	31
Pore diameter SEM method (μm) Gas transmission method	0.01 0.015	0.01 0.007	- 0.005
Sticking strength (g/25 μ)	720	700	450
Gas transmission rate (sec/25μ)	1260	4000	4730
Fuse temperature (°C)	135	127	126
Remarks	C3	C3	C3

- to be cont'd -

- cont'd -

Example 4 (this invention)	Example 5 (this invention)	Example 6 (this invention)	Example 7 (compari- son)	Example 8 (compari- son)	Example 9 (compari- son)	Example 10 (compari- son)
24	24	24	25	22	-	-
30	31	27	16	45	-	12
- 0.005	- 0.008	- 0.008	0.01 0.002	0.01 0.037	-	-
560	580	610	640	520	-	410
5500	3030	4100	21000	450	-	-
129	133	129	120	137	-	-
C3	C3	C3	C4	HDPE	HDPE LLDPE 50%	HDPE LDPE 50%

Table 2

	Example 11 (this invention)	Example 12 (this invention)	Example 13 (this invention)
Film thickness (μm)	23	24	18
Porosity (%)	43	41	36
Pore diameter SEM method (μm) Gas transmission method	0.01 0.036	0.01 0.032	0.01 0.028
Sticking strength (g/25 μ)	510	480	530
Gas transmission rate (sec/25μ)	490	570	760
Fuse temperature (°C)	135	134	132
Remarks	HDPE C3 15%	HDPE C3 30%	HDPE C3 50%

- to be cont'd -

- cont'd -

Example 14 (this invention)	Example 15 (this invention)	Example 16 (comparison)	Example 17 (comparison)
27	25	-	12
32	34	-	-
- 0.009	- 0.010	- -	- -
760	670	-	410
2500	2200	-	-
133	133	-	-
HDPE C3 50%	HDPE C3 50%	HDPE LLDPE 50%	HDPE LDPE 50%

Table 3

	Example 8 (this invention)	Example 19 (comparison)
Film thickness (μm)	26	29
Porosity (%)	40	48
Pore diameter (μm) SEM method Gas transmission method	0.01 0.021	0.01 0.033
Sticking strength (g)	560	620
Gas transmission rate (sec)	920	480
Fuse temperature ($^{\circ}\text{C}$)	132	137
Overcharge test 2A 3A	O O	× ×
Remarks	HDPE C3 50%	HDPE

Industrial Applicability

The polyethylene microporous film of this invention is excellent in mechanical strength, transparency and productivity and simultaneously has a low fuse temperature, and therefore, particularly when it is used as a separator for battery such as lithium ion cell or the like, a battery having a high reliability can be prepared.

CLAIMS

1. A polyethylene microporous film which is composed of a linear copolymeric polyethylene having a melt index (MI) of less than 0.1, a propylene unit content of 0.1 to 4 mol % and a density of 0.85 to 0.97 and which has a fuse temperature of less than 136°C, a thickness of 1 to 500µm, a porosity of 20 to 80%, a diameter of pores of 0.001 to 0.3 µm and a gas transmission rate of 10 to 6,000 sec.
2. The polyethylene microporous film according to Claim 1, wherein the above linear copolymeric polyethylene has a weight average molecular weight of 250,000 to 700,000.
3. The polyethylene microporous film according to Claim 2, wherein the above linear copolymeric polyethylene has a weight average molecular weight of 250,000 to 500,000.
4. A polyethylene microporous film which is composed of a mixture of a linear copolymeric polyethylene having a melt index (MI) of less than 0.1, a propylene unit content of 0.1 to 4 mol % and a density of 0.85 to 0.97 and a high density polyethylene having a comonomer unit content of less than 0.1 % and a weight-average molecular weight of 100,000 to 4,000,000, said mixture having a melt index (MI) of less than 0.1, a propylene unit content of 0.1 to 4 mol % and a density of 0.85 to 0.97 and which has a fuse temperature of less than 136°C, a thickness of 1 to 500µm, a porosity of 20 to 80%, a diameter of pores of 0.001 to 0.3 µm and a gas transmission rate of 10 to 6,000 sec.

5. The polyethylene microporous film according to Claim 4, wherein the above mixture has a weight average molecular weight of 250,000 to 700,000.

6. The polyethylene microporous film according to Claim 4, wherein the above mixture has a weight average molecular weight of 250,000 to 500,000.

7. A separator composed of the polyethylene microporous film according to any one of Claims 1 to 6.

8. A battery in which the polyethylene microporous film according to any one of Claims 1 to 6 is used as a battery separator.