



- (51) **International Patent Classification:**
H05K 7/20 (2006.01) G06F 1/20 (2006.01)
- (21) **International Application Number:**
PCT/US20 14/0440 12
- (22) **International Filing Date:**
25 June 2014 (25.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/839,412 26 June 2013 (26.06.2013) US
61/839,414 26 June 2013 (26.06.2013) US
- (71) **Applicant: MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (72) **Inventor; and**
- (71) **Applicant : WANHA, Christopher, D.** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (74) **Agent: MORELLA, Timothy, M.;** Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

WO 2014/210105 A1

(54) **Title:** GANGED SHIELDING CAGE WITH THERMAL PASSAGES

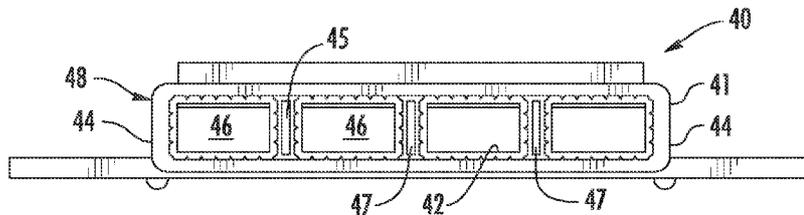


FIG. 3

(57) **Abstract:** A ganged shielding cage with improved heat transfer capabilities is disclosed. The cage has a plurality of module-receiving openings, or bays arranged in serial, widthwise order. Each such opening is separated from an adjacent opening by an inter-vening wall that defines, at least partially, a continuous passage, extending lengthwise and communicating with the front and rear portions of the cage. This passage permits air flow to occur between adjacent openings of the cages and between adjacent modules held thereby.

GANGED SHIELDING CAGE WITH THERMAL PASSAGES**CROSS REFERENCE TO RELATED APPLICATION**

5 [0001] The Present Disclosure claims priority to United States Provisional Patent Application No. 61/839,412, entitled "Ganged Shielding Cage With Thermal Passages," and filed 26 June 2013 with the United States Patent And Trademark Office. The content of this Application is incorporated in its entirety herein.

10 [0002] The Present Disclosure also claims the benefit of U.S. Provisional Patent Application No. 61/839,414 (Molex Docket No. B2-023 US PRO), entitled "Thermal Interposer Suitable For Electronic Modules," filed on the same day as the priority claim listed above, the content of which is hereby incorporated herein.

15 [0003] Finally, the Present Disclosure also claims the benefit of Co-Pending Patent Cooperation Treaty Patent Application No. _____ (Molex Docket No. B2-023 WO), entitled "Thermal Interposer Suitable For Electronic Modules," filed on the same day as the Present Disclosure, the content of which is hereby incorporated herein.

BACKGROUND OF THE PRESENT DISCLOSURE

[0004] The Present Disclosure relates, generally, to shielding cages utilized with electronic modules, and, more particularly, to cages with improved heat transfer capabilities.

20 [0005] Electronic modules are typically used to interconnect various electronic devices, such as servers and routers and the like. The modules are part of a cable assembly that utilizes multi-conductor wires terminated to modules at each end of the cable. The modules typically contain circuit boards to which the conductors of the cables are terminated, and these circuit boards have contact pads arranged on them in a pattern to mate with an opposing mating, 25 receptacle connector. These receptacle connectors are mounted to a circuit board and are enclosed by a conductive, usually metal cage that defines a hollow passage, or bay, into which a module is inserted to complete a connection between the cable wires and the circuits on the circuit board.

30 [0006] In order to maintain high density of electrical circuits, the electronic devices in which modules are used typically utilize multiple port, or bay, shielding cages, commonly referred to in the art as "ganged" cages. These ganged cages can be in a single row format, with multiple ports arranged in only one row, extending in the widthwise direction. Alternatively, they may be in a multiple row format, each row containing an equal number of ports. Heat

generated during the operation of these modules presents a problem in that ways must be used to dissipate the heat. In ganged shielding cages, single-thickness sheet metal dividers are used as interior walls of the cage and the modules abut these walls on both sides thereof. Ganged cages have been known to use heat sinks attached to either the top surfaces of the cages themselves, or extend through openings in the cage top surfaces into contact with the top surfaces of the modules.

[0007] In any event, it is desired to improve the thermal transfer capabilities of ganged cages, without excessively increasing their dimensions, so that a desired electrical circuit density is achieved in the devices in which the cages and modules are used. It is also desired that any improved shielding cage have one or more heat transfer paths extending perpendicular to the contact surfaces of any heat sinks utilized in conjunction with the cages.

[0008] The Present Disclosure is therefore directed to an improved shielding cage with thermal transfer capabilities particularly suitable for ganged cage applications, and which provides at least one additional heat transfer path in addition to any heat transfer path defined by a heat sink associated therewith.

SUMMARY OF THE PRESENT DISCLOSURE

[0009] Accordingly, there is provided a ganged shielding cage suitable for high speed data transfer applications which has beneficial and improved heat transfer capabilities.

[0010] In accordance with a first embodiment, a ganged shielding cage assembly may be provided in a die-cast, or other one-piece format. The cage has a plurality of openings defined therein, each opening extending lengthwise between opposing front and rear ends of the assembly. Furthermore, the openings are arranged side-by-side, or adjacent order. In this regard, the individual openings are separated from each other by an intervening wall member. In instances where the cage assembly is die-cast, the wall member is a hollow, elongated member containing a lengthwise passage extending between front and back ends, which communicates with the exterior of the assembly. This passage provides a means for a coolant to flow through the assembly in a location between modules. The dimensions of the cage openings are such that the sides of the modules contact the wall members so heat may be transferred via the contact.

[0011] In another embodiment, the wall member may be formed from a sheet metal blank folded over itself to define a hollow space between adjacent sides thereof. The blank may include spacer members in the form of tabs that are stamped in them and bent toward each

other to define the spacing desired for the air channel. In 1x4 ganged cage arrangements, three of the ports may be separated by the aforementioned air channels and the last port may be speared from adjacent ports by a single sheet metal wall. In such an arrangement, the benefits of increased cooling are obtained and a reduced pitch between cages is possible.

5 [0012] In yet another embodiment, a press fit thermal interposer may be provided with side supports that serve to not only space the thermal interposer vertically, but also serve to define a separation between adjacent ports.

[0013] These and other objects, features and advantages of the Present Disclosure will be clearly understood through a consideration of the following detailed description.

10

BRIEF DESCRIPTION OF THE FIGURES

[0014] The organization and manner of the structure and operation of the Present Disclosure, together with further objects and advantages thereof, may best be understood by reference to the following Detailed Description, taken in connection with the accompanying Figures,

15 wherein like reference numerals identify like elements, and in which:

[0015] Figure 1 is a perspective view of a shielding cage assembly of known construction with a heat sink member attached to the top portion thereof;

[0016] Figure 2 is a front elevational view of the shielding cage assembly of Fig. 1;

20 [0017] Figure 3 is a front elevational view perspective view of a shielding cage assembly constructed in accordance with the principles of the Present Disclosure;

[0018] Figure 4 is a rear elevational view of the shielding cage assembly of Fig. 3;

[0019] Figure 5 is a the same as Fig. 3, but with the heat sink member oriented so that the heat dissipating fins thereof are longitudinally disposed on the shielding cage body, or parallel to the module-receiving openings of the cage body;

25 [0020] Figure 6 is a perspective view of a intervening wall member formed from a piece of sheet metal to define an interior passage in the wall member;

[0021] Figure 7 is a sectional view of the shielding cage assembly of FIG. 3, looking down into the interior of the cage body;

30 [0022] Figure 7A is an enlarged detail view of the opening of the intervening wall member that defines a heat transfer passage in the form of a slot;

[0023] Figure 7B is an enlarged detail view of the opening of the intervening wall member that defines a heat transfer passage that has a plurality of openings communicating therewith;

[0024] Figure 8 is a perspective view of a thermal interposer with support legs structured to fit into a cage body opening and form a pair of passages alongside any module inserted therein; and

[0025] Figure 9 is an enlarged detail view of a portion of the front end of the thermal interposer of Fig. 8.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] While the Present Disclosure may be susceptible to embodiment in different forms, there is shown in the Figures, and will be described herein in detail, specific embodiments, with the understanding that the Present Disclosure is to be considered an exemplification of the principles of the Present Disclosure, and is not intended to limit the Present Disclosure to that as illustrated.

[0027] As such, references to a feature or aspect are intended to describe a feature or aspect of an example of the Present Disclosure, not to imply that every embodiment thereof must have the described feature or aspect. Furthermore, it should be noted that the description illustrates a number of features. While certain features have been combined together to illustrate potential system designs, those features may also be used in other combinations not expressly disclosed. Thus, the depicted combinations are not intended to be limiting, unless otherwise noted.

[0028] In the embodiments illustrated in the Figures, representations of directions such as up, down, left, right, front and rear, used for explaining the structure and movement of the various elements of the Present Disclosure, are not absolute, but relative. These representations are appropriate when the elements are in the position shown in the Figures. If the description of the position of the elements changes, however, these representations are to be changed accordingly.

[0029] Fig. 1 illustrates a conventional shielding cage assembly 20 that has a die cast cage body, or housing 21, a sheet metal base 22, an external heat sink member 23 on its top and a plurality of interior walls 24 that divide the cage into a plurality of module-receiving bays, or passages 25. The interior walls 24 are formed from sheet metal blanks and are inserted into the cage assembly 20. A gasket 26 is provided that encircles the front of the cage assembly 20 and which provides EMI protection when the cage is mounted to a circuit board 30 and a bezel, or cover plate (not shown) is attached to the cage assembly 20.

[0030] As illustrated in Fig. 2, the cage assembly 20 includes solid interior walls 24 which, as noted above, may be formed as inserts from sheet metal, or they may be an integral part of the cage body 21 when it is of die cast construction. Sheet metal gaskets 31 with a plurality of spring fingers 32 are provided and are attached to the top and bottom 33, 34 edges of each such cage bay. Similar gaskets 35, 36 are also provided that engage the interior walls and side walls, respectively, so that the spring fingers 32 attached thereto project into the interior of the cage bays 25 so as to make contact with the housing of any module inserted therein.

[0031] Fig. 3 is a front elevational view of a shielding cage assembly 40 constructed in accordance with the principles of the Present Disclosure. The cage assembly 40 includes a die-cast cage body 41 that has a defined bottom and rear wall 42 and 43, side walls 44 and interior walls 45. The interior walls 45 separate the cage into a plurality of lengthwise module-receiving bays 46. In one important aspect, the interior walls 45 of the cage assembly are provided with a thickness sufficiently large that they can accommodate (or define) a heat transfer passage 47 that extends longitudinally therein from the front end 48 of the cage body to the rear end 49 thereof. These passages 47 communicate with the exterior of the cage. The heat transfer passages 47 thereby define a series of fluid channels that are interposed between the module-receiving bays 46 and the modules inserted therein. The fluid channels convey an appropriate cooling fluid, such as air, water or oil, depending on the cooling system utilized, through the cage assembly from front to back to provide additional cooling.

[0032] A heat sink member 50 is attached to the top of the cage body and the heat sink member 50 has a heat transfer surface on its bottom that either contacts the tops of any module inserted into any of the module-receiving bays 46. The heat sink member 50 may include a plurality of vertical heat-dissipating fins 52 that may be oriented either perpendicular to the bays 46 as illustrated in Fig. 3, or parallel as illustrated in Fig. 8. Heat is transferred from the modules to the heat sink member 50 by way of the contact that occurs between the two elements. Similarly, the modules of the system are inserted into their respective bays 46 so that the sides of the modules contact the opposing surfaces of the interior walls 45 of the cage assembly. Air, or another selected cooling fluid, is passed through the heat transfer passages 47 at a temperature lower than the operating temperature of the modules. The contact of the cooling fluid with the walls that define the heat transfer passages 47, or the modules themselves will convey the heat into the heat transfer passages 47 and out of the cage assembly.

[0033] As illustrated in Figs. 7, 7A and 7B, the openings of the heat transfer passages 47 may take the form of slots 54, which is particularly suitable for use in die-cast cage structures, or as illustrated in Fig. 7B, they may take the form of circular bores, or holes 55. Preferably, holes 55 are located on the front, or outward, face of the cage, while slots 54 may be located on the rear face between each port, or may be on the front of the cage. In any event, the size of the openings should be sufficiently large to permit reliable cooling air flow, whether the system is under pressurized cooling, or not. Fig. 6 illustrates another embodiment of an interior wall member 60 for use with cooling systems of the Present Disclosure. This interior wall member 60 in this embodiment is formed out of a sheet metal blank 61 and is shown as bent over upon itself to define a spacing, or heat transfer passage 62 disposed between two sides 64, 65 of the interior wall member 60. With such a structure, the module to module spacing of the cage assembly may be reduced as compared with a die-cast cage structure. One or more ends of such the interior wall member 60 may have an end cap or the like with the cooling openings, such as the slots 54 or bores 55 depicted in Figs. 7A-B, disposed therein.

[0034] Figs. 8-9 illustrate another embodiment of an insert member 70 used to define the cooling passages. Such a member is a thermal interposer 72, the details of which are disclosed in more detail in the Co-Pending U.S. Provisional Patent Application, indicated in Paragraph 0001, above. The interposer 72 has a base, or body portion 71 with a series of upraised lugs 73 that engage slots in the heat sink member 50 which is applied to the top of the cage assembly, and a series of downwardly depending contact arms 74 that extend into the module bay and make contact with the top surface of the module inserted therein. It should be noted that the path formed by contact arms 74, body portion 71 and lugs 73 conducts heat to the heat sink. The interposer 72 is provided with a pair of leg members 75 preferably spaced away from the module and which are bent from the interposer base in an inverted U-shape 77 to define additional potential cooling passages 76 that run lengthwise proximate to the intersection of the interposer base 71 and each leg member 75. The leg members 75 may further include a bent portion 78 disposed in a portion thereof that extends in an offset manner from the longitudinal extent of the leg members 75. In this manner, a spacing is created between the sides of a module inserted into the bay (or the interposer leg members) and the interior walls of the cage assembly. Openings are preferably formed as part of the bent portion to facilitate sufficient fluid passage through the spacing.

[0035] While a preferred embodiment of the Present Disclosure is shown and described, it is envisioned that those skilled in the art may devise various modifications without departing from the spirit and scope of the foregoing Description and the appended Claims.

CLAIMSWHAT IS CLAIMED IS:

5 1. A shielding cage assembly with improved thermal transfer characteristics, the assembly comprising:

 a cage body, the cage body including a plurality of walls defining at least two adjacent openings in the cage body, the openings extending lengthwise therewithin between opposing front and rear ends of the cage body and being separated by and partly defined by
10 an intervening wall; and

 each opening being dimensioned to receive an electronic module therein such that sidewalls of two adjacent electronic modules inserted into the openings are in heat transfer proximity to the intervening wall;

 wherein the intervening wall includes a heat transfer passage therein, the heat
15 transfer passage defining a lengthwise space between the two adjacent electronic modules, the heat transfer passage permitting cooling fluid flow therethrough.

 2. The shielding cage assembly of Claim 1, further including a heat sink member configured to fit on top of the cage body.

20

 3. The shielding cage assembly of Claim 2, wherein the heat sink member includes a plurality of upraised fins spaced apart from each other, the fins extending perpendicularly to the cage body openings and the heat transfer passage.

25

 4. The shielding cage assembly of Claim 2, wherein the heat sink member has a plurality of upraised fins spaced apart from each other, the fins extending parallel to the cage body openings and the heat transfer passages.

 5. The shielding cage assembly of Claim 1, wherein the cage body is die-cast
30 from a conductive material.

 6. The shielding cage assembly of Claim 5, wherein the intervening wall is formed as part of the cage body.

7. The shielding cage assembly of Claim 5, wherein the intervening wall includes a wall member separate from the cage body, which is inserted into the cage body.

5 8. The shielding cage assembly of Claim 7, wherein the wall member includes two leg members interconnected by an interposer body that defines a contact surface interposed between a module inserted into the module-receiving bay and an exterior heat sink.

10 9. The shielding cage assembly of Claim 11, wherein one of the leg members includes a least one bend therein that directs a portion of the leg member away from a side surface of a module inserted into the cage assembly to define a space therebetween.

15 10. The shielding cage assembly of Claim 5, wherein the heat transfer passage includes a plurality of longitudinal bores spaced apart from each other, disposed at ends of the heat transfer passage.

20 11. The shielding cage assembly of Claim 5, wherein the heat transfer passage includes a single slot disposed at each end thereof.

25 12. The shielding cage assembly of Claim 5, further including second cage body openings defined by the cage body walls, the second openings being separated from each other and the openings by second intervening walls, each second wall member including a heat transfer passage disposed therein.

30 13. The shielding cage assembly of Claim 1, wherein the intervening wall member is formed from a piece of sheet metal folded over upon itself to define an inverted U-shaped configuration with an interior passage.

35 14. The shielding cage assembly of Claim 13, wherein the intervening wall member includes a plurality of bores disposed therein along at least one end thereof.

15. A shielding cage assembly with improved thermal transfer characteristics, comprising:

a cage body, the cage body including a plurality of walls defining a plurality of module-receiving openings in the cage body, the openings extending lengthwise
5 therewithin between opposing front and rear ends of the cage body and configured to receive single electronic modules therein, the openings being separated from each other by intervening wall portions and extending lengthwise between the front and rear ends such that sidewalls of two adjacent electronic modules inserted into the openings make heat transfer
10 including a heat transfer passage disposed therein, the heat transfer passage defining a lengthwise passage between the two adjacent electronic modules between the front and rear ends of the shielding cage assembly and permitting cooling fluid flow therethrough.

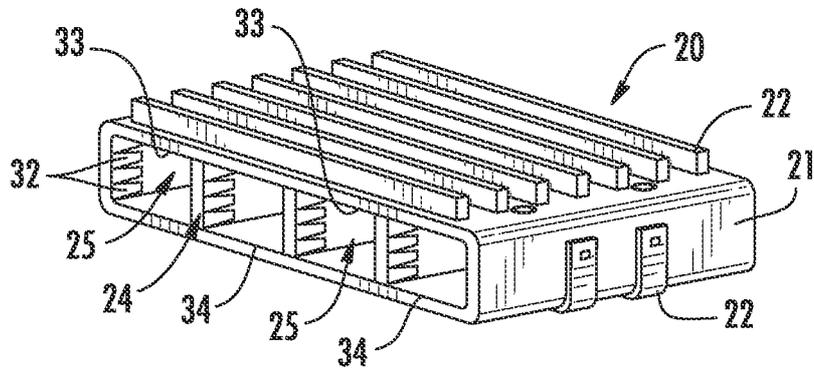


FIG. 1
(PRIOR ART)

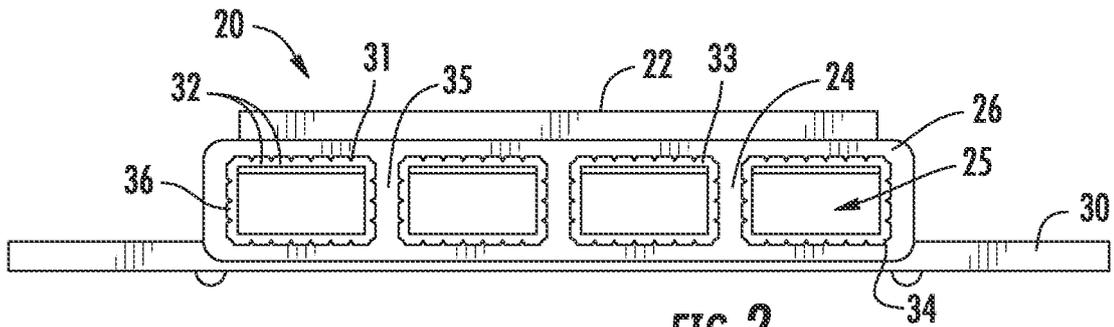


FIG. 2
(PRIOR ART)

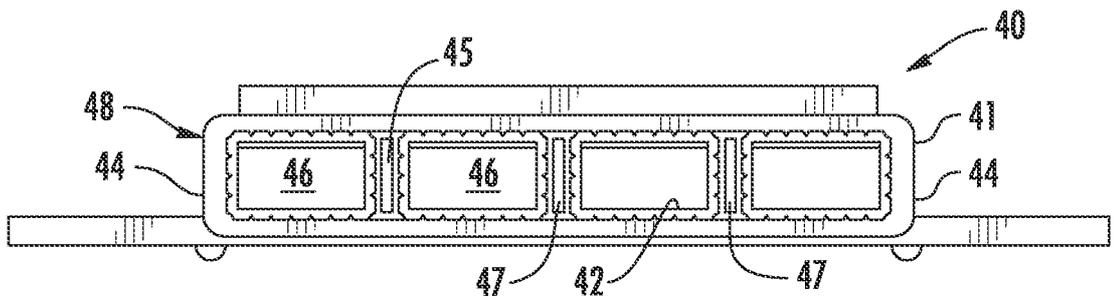


FIG. 3

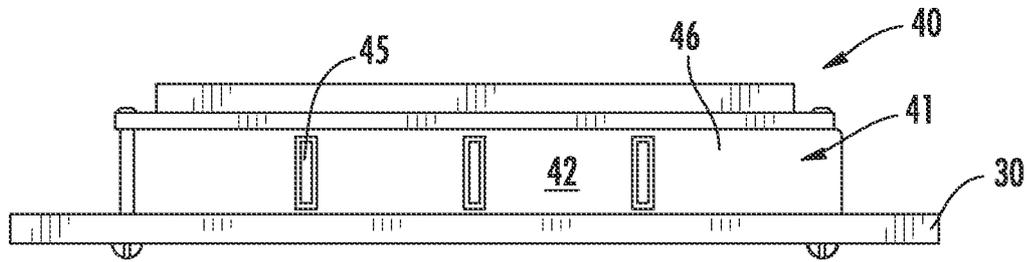


FIG. 4

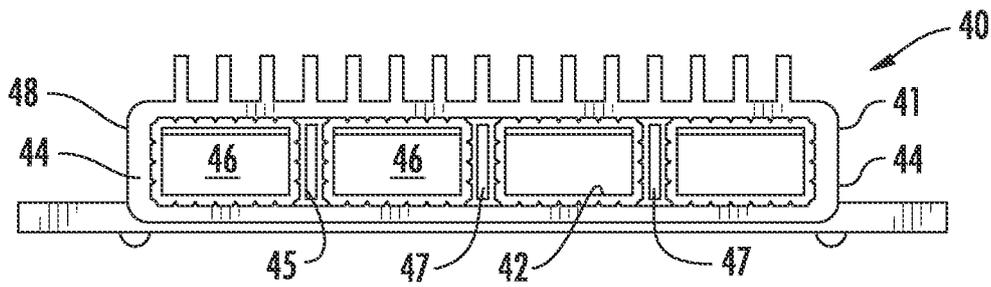


FIG. 5

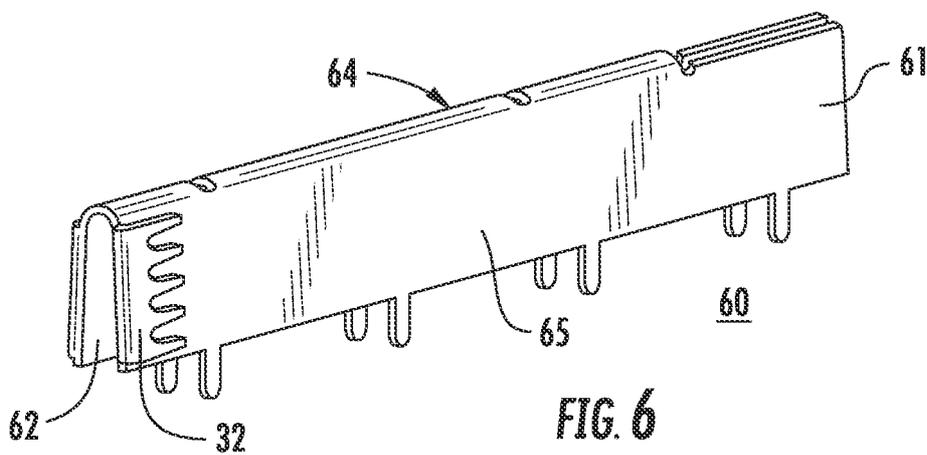


FIG. 6

3/3

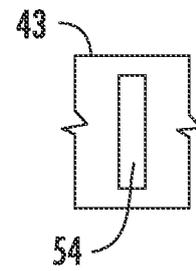
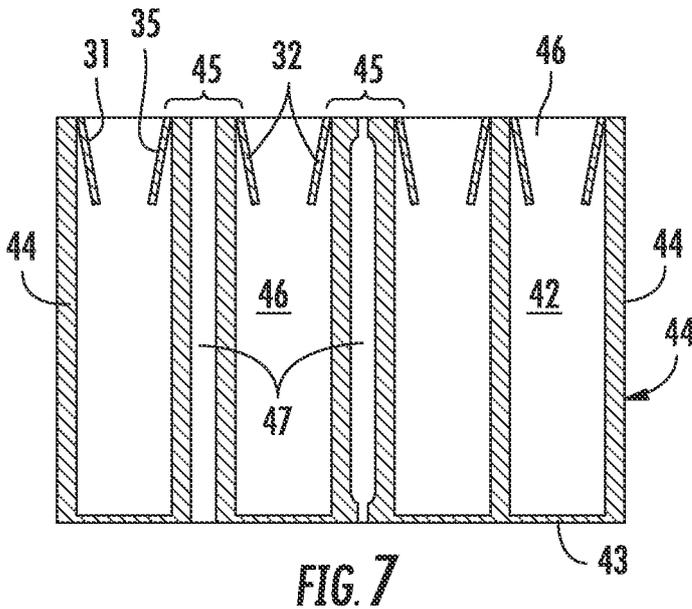


FIG. 7A

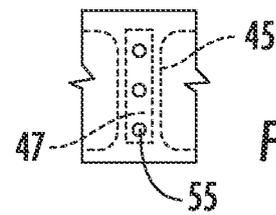


FIG. 7B

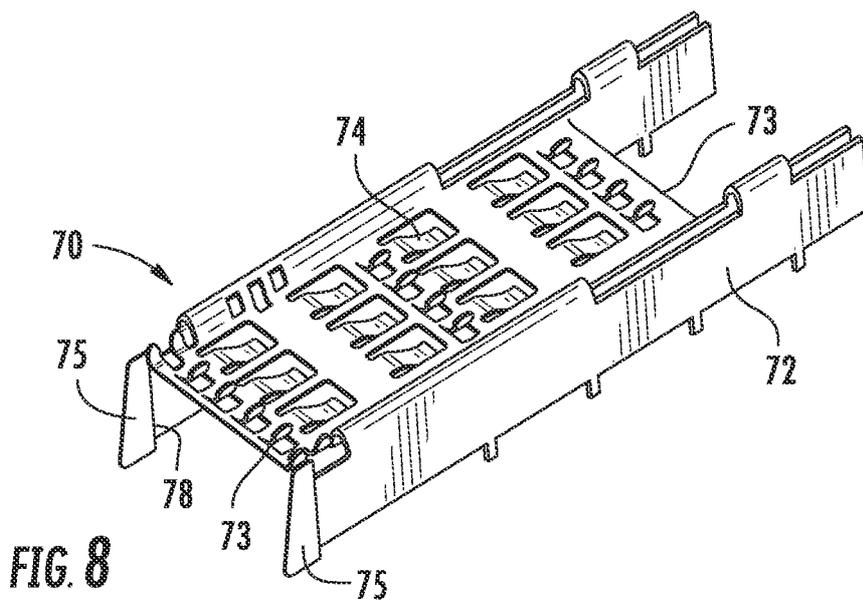


FIG. 8

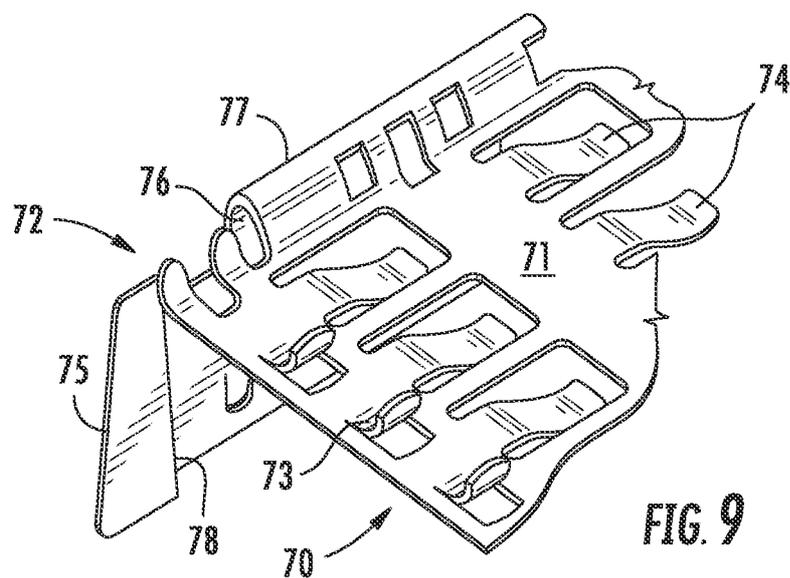


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/044012**A. CLASSIFICATION OF SUBJECT MATTER****H05K 7/20(2006.01)i, G06F 1/20(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05K 7/20; H01L 23/44; H04B 10/02; H01L 23/16; G06F 1/16; G06F 1/20

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: shielding, cage, thermal transfer, intervening wall, passage

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008-0285236 A1 (MICHAEL J. PHILLIPS et al.) 20 November 2008 See abstract, paragraphs [0019]-[0042], claims 1-3, 6 and figures 1-7.	1-15
A	US 6141211 A (MIKE T. STRICKLER et al.) 31 October 2000 See column 2, line 50 - column 5, line 21, claims 1-2, 4-5 and figures 1-6.	1-15
A	EP 580412 A1 (BRITISH AEROSPACE PUBLIC LIMITED COMPANY) 26 January 1994 See column 2, line 54 - column 4, line 56, claim 1 and figures 1-4.	1-15
A	US 5006925 A (MARK F. BREGMAN et al.) 09 April 1991 See column 3, line 18 - column 5, line 16, claim 1 and figure 1.	1-15
A	US 2008-0062640 A1 (WILLIAM JAMES ANDERL et al.) 13 March 2008 See paragraphs [0035]-[0042], [0045]-[0048], claim 1 and figures 1-2, 6.	1-15

I Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 2014 (14.10.2014)

Date of mailing of the international search report

15 October 2014 (15.10.2014)

Name and mailing address of the ISA/KR




International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer

KTM, Sung Gon

Telephone No. +82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
us 2008-0285236 AI	20/11/2008	CN 101330173 A CN 101330173 B US 7764504 B2	24/12/2008 22/08/2012 27/07/2010
us 6141211 A	31/10/2000	None	
EP 580412 AI	26/01/1994	GB 9215442 DO JP 06-177570 A	02/09/1992 24/06/1994
us 5006925 A	09/04/1991	EP 0429759 AI EP 0429759 BI JP 03-173199 A JP 08-034284 B2 JP 2117321 C	05/06/1991 26/10/1994 26/07/1991 29/03/1996 06/12/1996
us 2008-0062640 AI	13/03/2008	us 2002-0131122 AI us 2006-0098924 AI us 2009-087188 AI us 7073960 B2 us 7314318 B2 us 7458733 B2	19/09/2002 11/05/2006 02/04/2009 11/07/2006 01/01/2008 02/12/2008