Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2622792 A1 2009/09/27

(21) 2 622 792

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(22) Date de dépôt/Filing Date: 2008/03/27


(41) Mise à la disp. pub./Open to Public Insp.: 2009/09/27

(51) Cl.Int./Int.Cl. *E03C 1/04* (2006.01),
A47K 1/04 (2006.01), *F16B 2/12* (2006.01)

(71) Demandeur/Applicant:
JOURA, DILPREET, CA

(72) Inventeur/Inventor:
JOURA, DILPREET, CA

(54) Titre : PINCE DE FIXATION AUTOVERROUILLABLE POUR EVIER EN ACIER INOXYDABLE
(54) Title: STAINLESS STEEL SINKS MOUNTING CLIP WITH SELF LOCKING

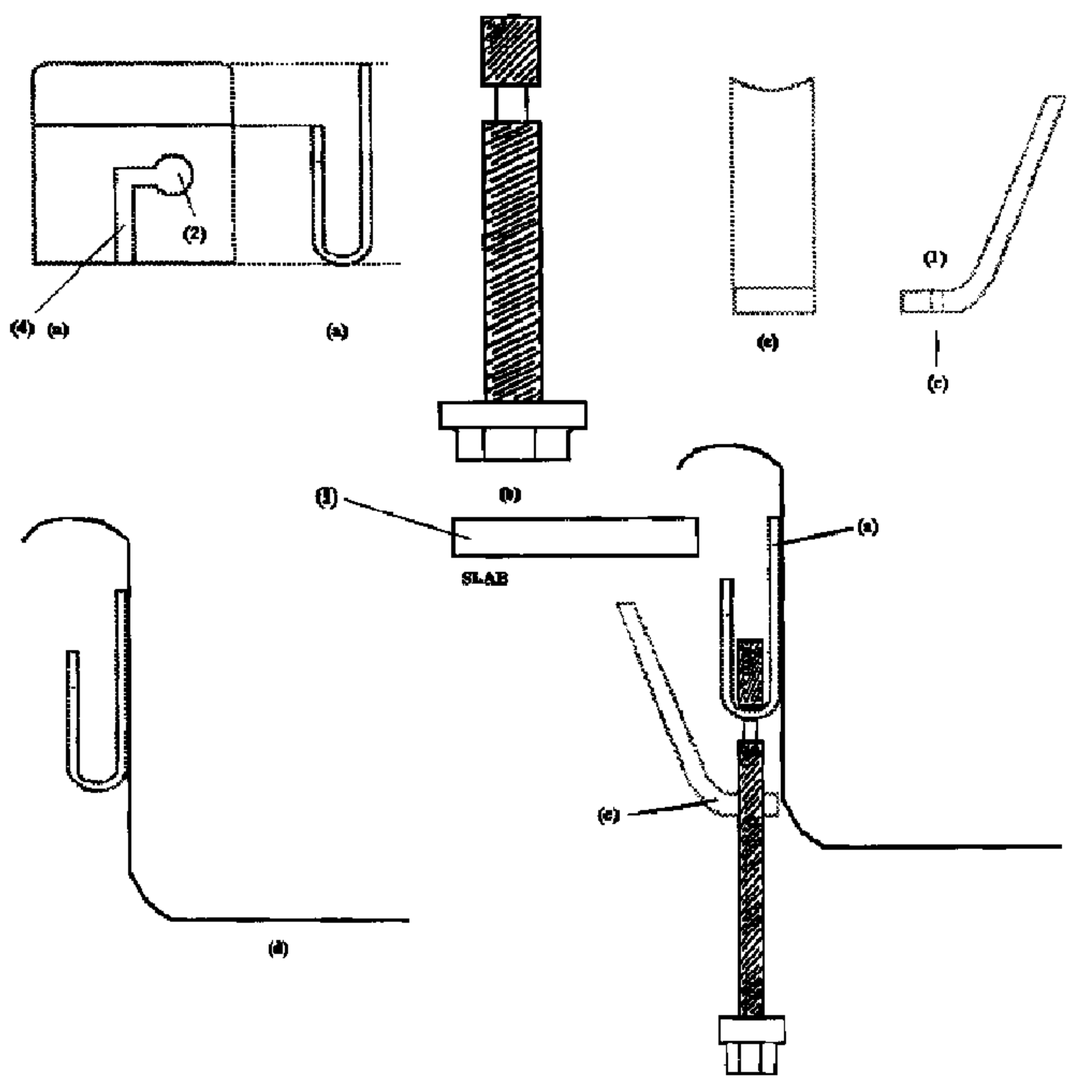

Mounting Systems comprises of theses components:-

1. **Bracket**
2. **Tightening Bolt with hexagonal head having slots for screw drivers**
3. **Clamping strip.**

Lining the mounting Systems


Bracket (a) is tack welded with the bowl as shown in diagram (d). Bolt (b) is screwed in clamping strip (c) at (1) as shown. Bolt (b) is inserted in bracket (a) at (2) and upto position no (3) of the bolt.Then the bolt is slided down the slit(4) as shown in figure (5) when the moved clockwise the clamping strip will move up and touch the lower surface of the top slab (1).On tightening the bolt the bolt the flenge of the sink will firmly rest on the top of the slab


Description


Mounting system comprises of these components


- Bracket
- Tightening Bolt with hexagonal head having slots for screw drivers
- Clamping strip


Bracket (a) is tach welded with the bowl as shown in drawing 1 diagram (d). Bolt (b) is screwed in clamping strip (c) at (1) as shown. Bolt (b) is inserted in bracket (a) at (2) {and locks in such a way that it cannot come out on its own it has to slide towards (2)} and up to position no 3of the bolt. Then the bolt slides down the slit (4) as shown in figure 5 when the bolt is moved clockwise the clamping strip will move up and touch the lower surface of top slab (1). On tightening the bolt, sink flange will firmly rest on the top of the slab

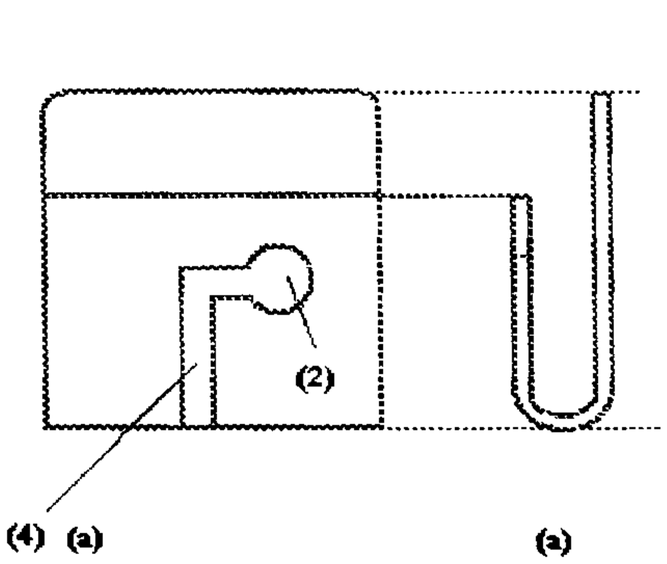


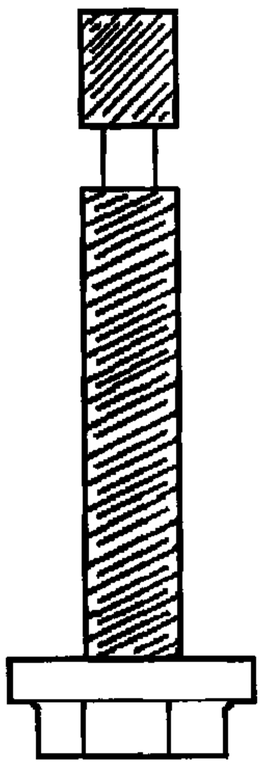


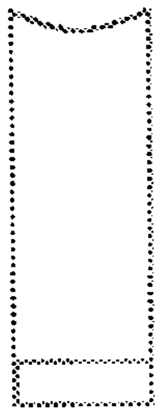

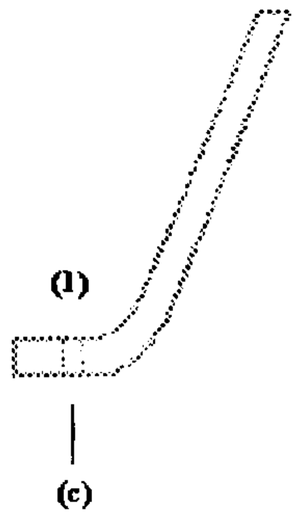

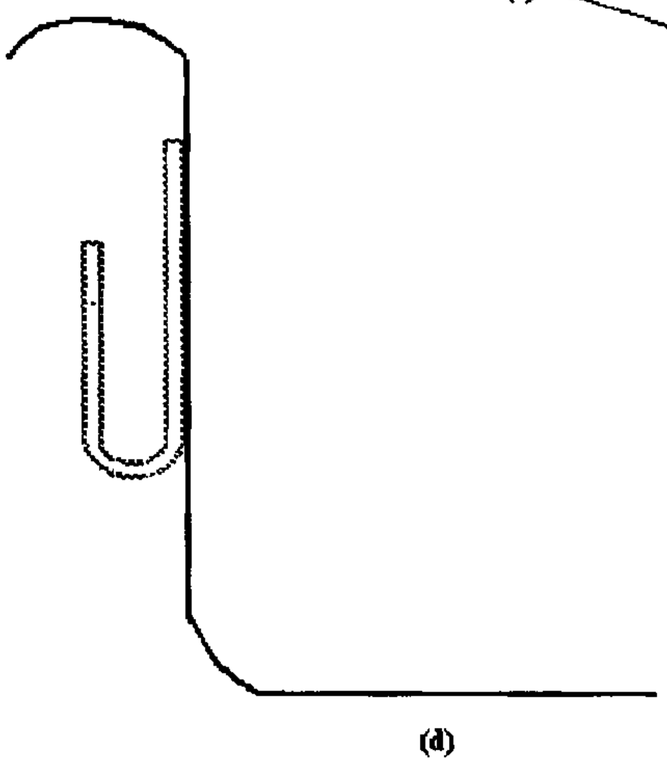

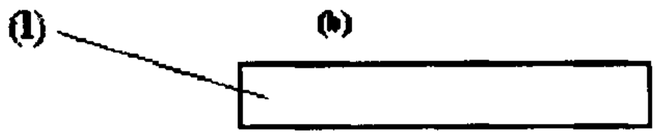

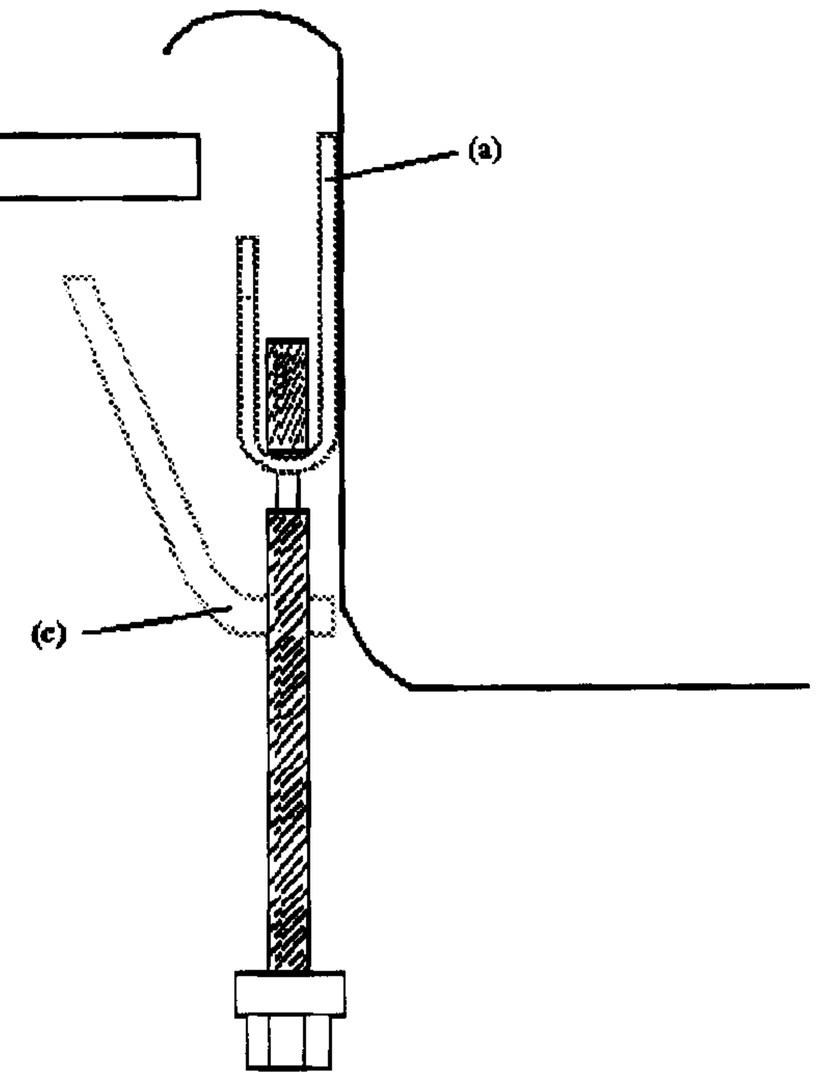


Mounting Systems comprises of theses components:-


1. **Bracket**
2. **Tightening Bolt with hexagonal head having slots for screw drivers**
3. **Clamping strip.**

Lining the mounting Systems


Bracket (a) is tach welded with the bowl as shown in diagram (d). Bolt (b) is screwed in clamping strip (c) at (1) as shown. Bolt (b) is inserted in bracket (a) at (2) and upto position no (3) of the bolt.Then the bolt is slided down the slit(4) as shown in figure (5) when the moved clockwise the clamping strip will move up and touch the lower surface of the top slab (l).On tightening the bolt the bolt the flenge of the sink will firmly rest on the top of the slab

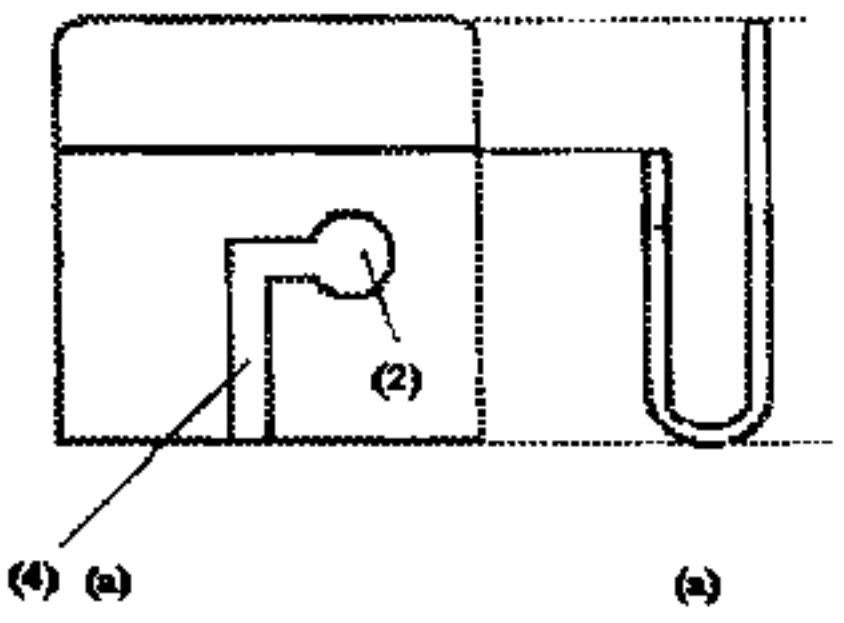

(a)

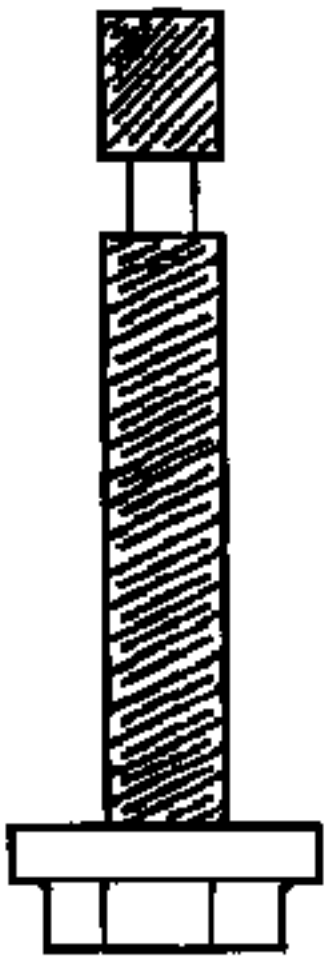



(b)

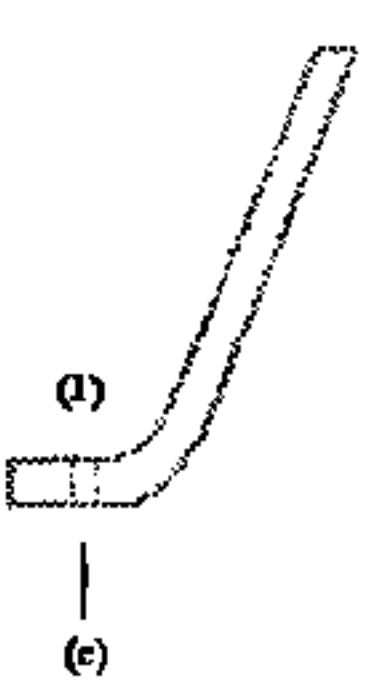




(c)

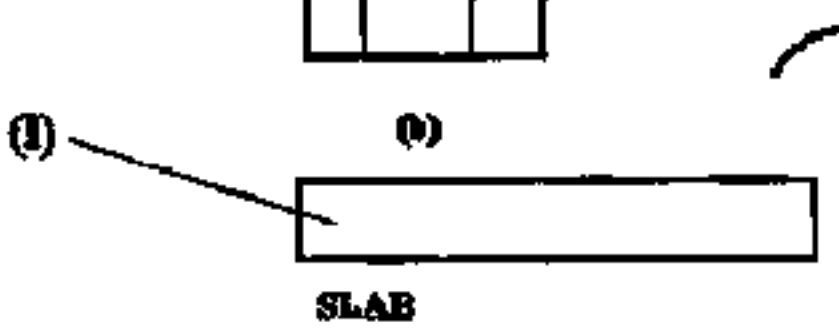

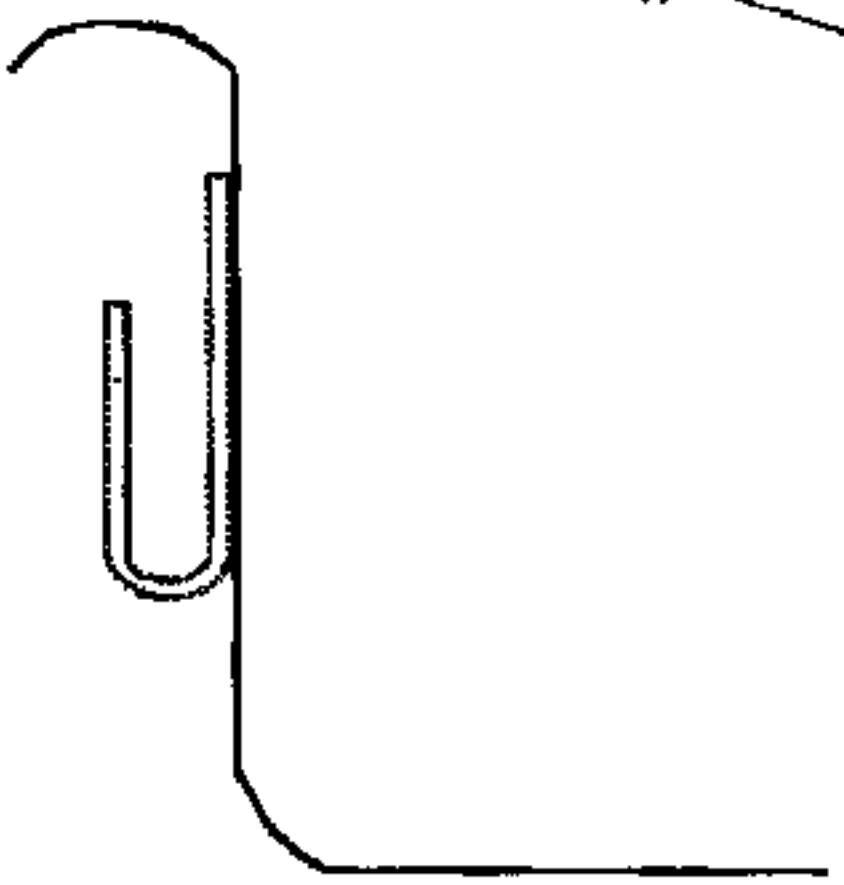

(d)

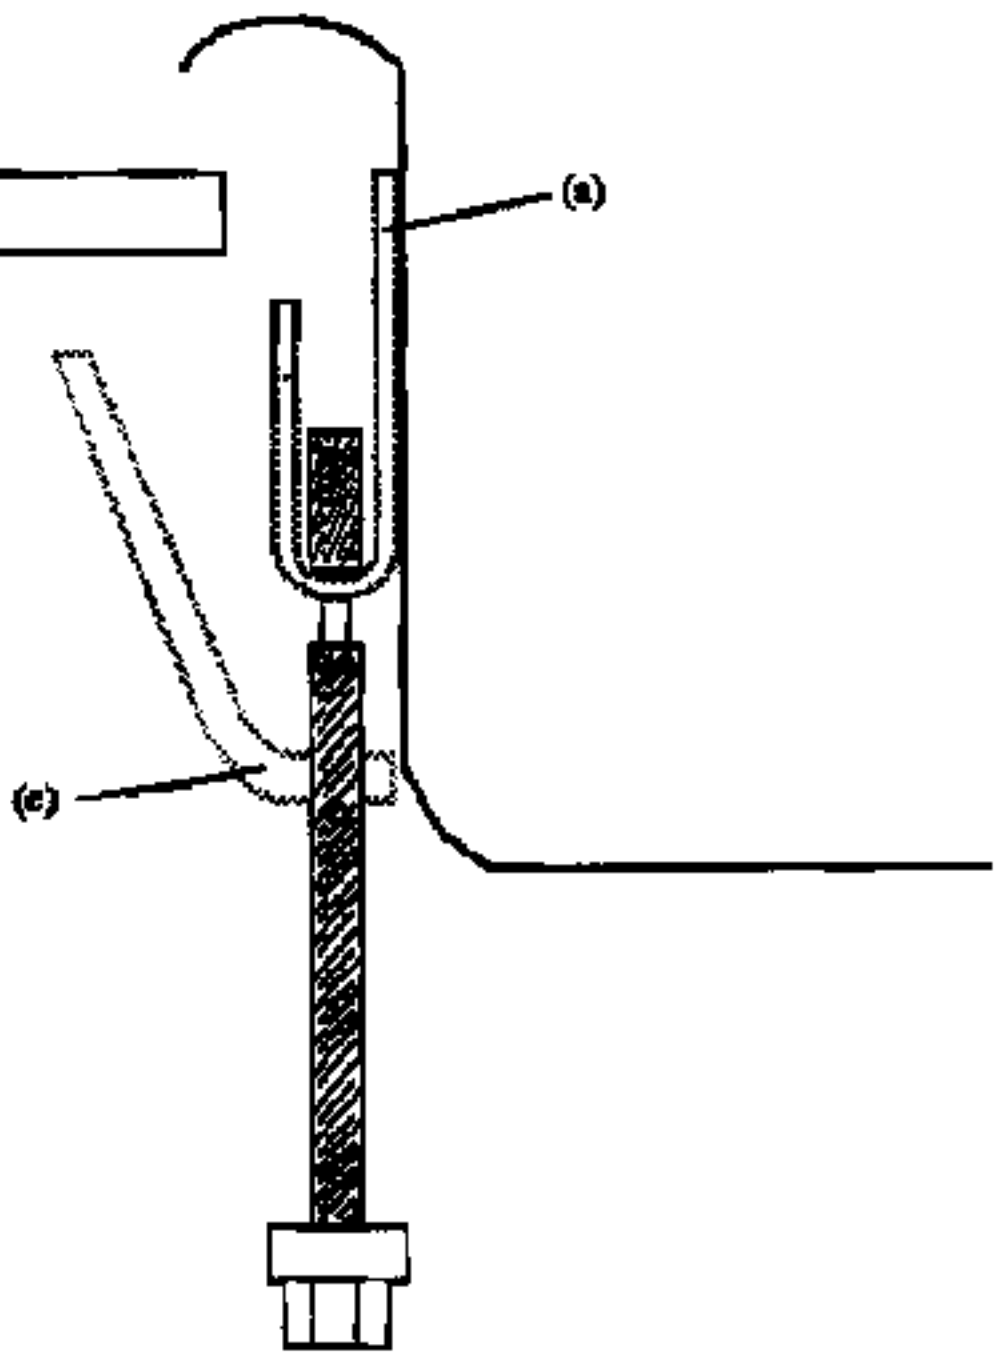

Mounting Systems comprises of theses components:-

1. **Bracket**
2. **Tightening Bolt with hexagonal head having slots for screw drivers**
3. **Clamping strip.**

Lining the mounting Systems

Bracket (a) is tack welded with the bowl as shown in diagram (d). Bolt (b) is screwed in clamping strip (c) at (1) as shown. Bolt (b) is inserted in bracket (a) at (2) and upto position no (3) of the bolt.Then the bolt is slided down the slit(4) as shown in figure (5) when the moved clockwise the clamping strip will move up and touch the lower surface of the top slab (1).On tightening the bolt the bolt the flenge of the sink will firmly rest on the top of the slab