



- (51) **International Patent Classification:**
G10K 11/178 (2006.01) *A47G 9/10* (2006.01)
- (21) **International Application Number:**
PCT/US2016/047515
- (22) **International Filing Date:**
18 August 2016 (18.08.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/830,765 20 August 2015 (20.08.2015) US
- (71) **Applicant: DREAMWELL, LTD.** [US/US]; 2215-B Renaissance Drive, Suite 12, Las Vegas, Nevada 89119 (US).
- (72) **Inventors: DEFRANKS, Michael S.;** 2117 Kodiak Drive N.E., Atlanta, GA 30345 (US). **HUGHES, Charles E.;** 2130 Shadwell Court, Gastonia, NC 28056 (US). **RUBIN, Stuart F.;** 3937 West Ash Lane, Orange Village, OH 44122 (US).
- (74) **Agent: HAGERTY, Peter;** Cantor Colburn LLP, 20 Church Street, 22nd Floor, Hartford, Connecticut 06103 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** PILLOW SET WITH SNORING NOISE CANCELLATION

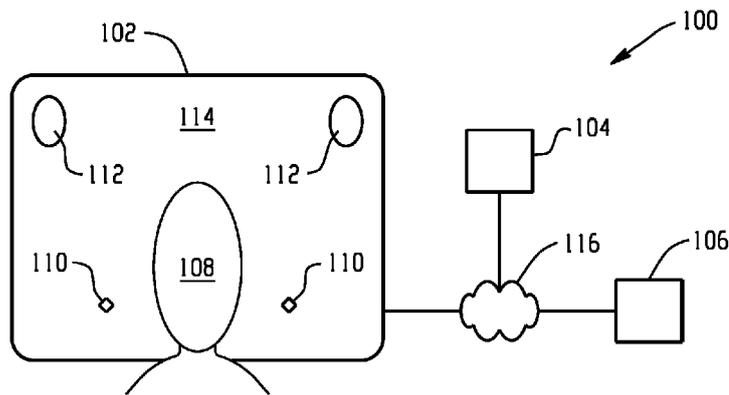


Fig. 1

(57) **Abstract:** Active noise control systems, devices, and methods are disclosed herein. Anti-snoring systems can include a first pillow unit having at least one error microphone and at least one speaker, at least one reference microphone configured to capture sound produced proximate to the at least one reference microphone, and a control unit operatively coupled to the first pillow unit and the at least one reference microphone. In some aspects, the control unit can be configured to produce an anti-noise in the at least one speaker disposed in the first pillow unit by processing signals received from the at least one error microphone and the at least one reference microphone using gated dynamic adjustments such that the anti-noise cancels any sound produced proximate to the at least one reference.



PILLOW SET WITH SNORING NOISE CANCELLATION

BACKGROUND

[0001] The present disclosure generally relates to noise cancelling devices, systems, and methods, specifically to anti-snoring systems and methods producing anti-noise.

[0002] Low-frequency noise pollution, such as that caused by snoring, has long been a bane of people sleeping in proximity to one another, such as when sleepers share a bed, room, or are seated in close proximity to one another in transportation settings such as on an airplane. Additionally, other ambient noise such as sirens, traffic, crying babies, and televisions can cause disruptions in sleeping. Snoring, in particular is credited with sleep disruption of a significant portion of sleepers.

[0003] Snoring is an acoustic phenomenon generated by vibrating tissue structures due to obstruction in the upper airway during sleep, and is a prominent problem in modern society. Some references, including the U.S. National Commission on Sleep Disorders Research, estimate that about 74 million Americans snore every night, and about 38% of Americans are disturbed by snoring and suffer from daytime fatigue. The intermittent nature of snoring can disrupt the sleep of the snorer's bed partner, causing stress and social nuisance. The sleep disruption has been linked to excessive daytime sleepiness of the snorer and their bed partner. This can result in loss of productivity in the work environment and lead to occupational accidents, or even reduce one's ability to safely operate a car. As mentioned, snore sounds are typically generated by vibrations of the soft palate during sleep and often are nonstationary, intermittent, complex sounds having a transient nature and high short-term sound levels. Additionally, frequency content of snore sounds can change abruptly. As such, actively modeling and canceling snore sounds is difficult.

[0004] For low-frequency snoring and other environmental noise, passive methods such as earmuffs or earplugs are either ineffective or uncomfortable to wear during sleep. Several noise cancellation methods have been developed to reduce the noise of snoring utilizing active noise control (referred to herein as "ANC"). These ANC systems are typically based on the principle of super positioning opposing phased sounds to attenuate low-frequency primary (unwanted) noise. That is, ANC systems typically generate a secondary noise of the same magnitude but opposite polarity as the noise sought to be cancelled. As used herein, this

secondary noise of the same magnitude but opposite polarity is referred to as “anti-noise.” By ANC, the anti-noise and the unwanted noise are both canceled out or their sound pressure level (SPL) is greatly reduced.

[0005] For example, ANC systems for abating snoring and other environmental noises have been disclosed. For example, U.S. Patent No. 8,325,934 to Kuo et al. entitled “Electronic pillow for abating snoring/environmental noises, hands-free communications, and non-invasive monitoring and recording” describes such systems and is incorporated herein by reference in its entirety. Additional systems are described by Sen M. Kuo, et al., in “Active snore noise control systems,” which is published in the January–February, 2008 issue of Noise Control Engineering Journal, volume 56(1), which is incorporated herein by reference in its entirety. These systems, however, suffer from several drawbacks, including, among other things, anti-noise speakers that are mounted in less-than-ideal positions as well as the need to have pillows and other bedding units hard-wired to external system components and even other pillows and bedding units. Moreover, ANC systems typically implement dynamic adjustments of anti-noise. These prior art dynamic adjustments cause the systems to converge toward ineffective ANC at least because the dynamic adjustments fail to properly account for periods where no ambient noise is detected, such as in between snores.

[0006] Accordingly, there remains a need for improved systems, devices, and methods of abating snoring and other environmental sounds in a sleeping system.

SUMMARY

[0007] Active noise control systems, devices, and methods are disclosed herein. In some aspects, an anti-snoring system is disclosed. For example, the anti-snoring system can include a first pillow unit having at least one error microphone and at least one speaker and at least one reference microphone configured to capture sound produced proximate to the at least one reference microphone. The anti-snoring system can also include a control unit operatively coupled to the first pillow unit and the at least one reference microphone such that it receives a signal from the at least one error microphone disposed in the first pillow unit and the at least one reference microphone. Moreover, the control unit can be configured to produce an anti-noise in the at least one speaker disposed in the first pillow unit by processing the signals received from the at least one error microphone and the at least one reference microphone using gated dynamic

adjustments such that the anti-noise cancels any sound produced proximate the at least one reference microphone.

[0008] In other aspects, anti-snoring systems can include a first pillow unit comprising at least one error microphone and at least one speaker, and a second pillow unit comprising at least one error microphone and at least one speaker. Anti-snoring systems disclosed herein can also include at least one reference microphone configured to capture sound produced proximate to at least one of the first pillow unit and the second pillow unit, and a control unit operatively coupled to the first pillow unit, second pillow unit, and the at least one reference microphone such that it receives a signal from the at least one error microphone in the first pillow, the at least one error microphone in the second pillow, and the at least one reference microphone. In some aspects, the control unit can be configured to produce an anti-noise in the at least one speaker disposed in the first pillow unit by processing the signals received from the at least one error microphone in the first pillow and the at least one reference microphone such that the anti-noise cancels any sound produced proximate the at least one reference microphone.

[0009] Also disclosed herein are methods of cancelling sounds. Such methods, for example, include a method of canceling snoring that can include sensing a reference noise with a reference microphone and outputting a reference noise signal to a control unit, sensing an error noise level with an error microphone that is disposed proximate a user's ear and outputting an error noise signal to the control unit, and determining an anti-noise to cancel the reference noise by processing the reference noise signal and the error noise signal using gated dynamic adjustments. The methods can also include producing the anti-noise using at least one speaker that is proximate the user's ear such that the reference noise is cancelled.

[0010] The above described and other features are exemplified by the accompanying drawings and detailed description.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0011] This disclosure will be more fully understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

[0012] FIG. 1 is a perspective view of an asymmetric anti-snoring device;

[0013] FIG. 2 is a schematic view of a symmetric anti-snoring device; and

[0014] FIG. 3 is a block diagram of a control unit.

DETAILED DESCRIPTION

[0015] Certain exemplary aspects will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the devices, systems, methods, and/or kits disclosed herein. One or more examples of these aspects are illustrated in the accompanying drawings. Those skilled in the art will understand that the devices, systems, methods, and/or kits disclosed herein and illustrated in the accompanying drawings are non-limiting and exemplary in nature and that the scope of the present invention is defined solely by the claims. The features illustrated or described in connection with any one aspect described can be combined with the features of other aspects. Such modification and variations are intended to be included within the scope of the present disclosure.

[0016] Further in the present disclosure, like-numbered components generally have similar features, and thus each feature of each like-numbered component is not necessarily fully elaborated upon. Additionally, to the extent that linear or circular dimensions are used in the description of the disclosed systems, devices, and methods, such dimensions are not intended to limit the types of shapes that can be used in conjunction with such systems, devices, and methods. A person skilled in the art will recognize that an equivalent to such linear and circular dimensions can be determined for any geometric shape. Sizes and shapes of the systems and devices, and the components thereof, can depend at least on the size and shape of the components with which the systems and devices will be used, and the methods and procedures in which the systems and devices will be used.

[0017] Noise canceling systems have been developed for use in various applications. For example and without limitation, anti-noise producing systems and devices can be utilized to cancel unwanted ambient noise in a variety of settings. For example, bedding, pillows, headrests, and other devices that are capable of producing anti-noise can be implemented to cancel ambient noise while a user is sleeping. By way of example, pillows may include anti-noise producing components so as to cancel ambient noise such as snoring sounds produced by a bed or roommate. Alternatively, head rests or other seating components, such as those found on airplanes, trains, or buses, can be configured with anti-noise components so as to cancel ambient noise, including talking, snoring, engine noise, announcements, sirens, or any other unwanted ambient noise so as to provide a quiet seating and sleeping environment for passengers.

[0018] The systems and methods described herein can be used in asymmetric systems—

systems with only one reference microphone unit—or in symmetric systems—systems having more than one reference microphone unit. In at least one aspect, the systems and devices described herein can be employed in a complementary (*i.e.*, symmetric) system such that the system includes a pair of pillow units or other bedding units such that each unit cancels out the sound produced by the user of the other unit. For example, in many applications, a pair of sleepers in a bed will produce noise during the night, *i.e.*, both sleepers snore and not just one. In such scenarios, a complementary system can be employed to cancel out the noise created by each sleeper as opposed to just one. Generally, Fig. 1 illustrates an asymmetric system and Fig. 2 illustrates a complementary system. Such complementary systems, such as that shown in Fig. 2, can include wireless coupling between the complementary pillow units.

[0019] FIG. 1 illustrates an asymmetric anti-snoring system 100 having a first pillow unit 102, a control unit 104, and at least one reference microphone 106. In some aspects, the asymmetric anti-snoring system 100 can be configured to produce anti-noise such that user 108 is not disturbed by ambient environmental noise such as snoring.

[0020] In some aspects, the first pillow unit 102 is a pillow configured for use by a sleeping user 108 in a bed. In other aspects the pillow unit 102 can be any head-rest unit configured to provide support to the user's head. As such, the first pillow unit 102 can be formed of any known material including a variety of fabrics, leathers, cotton fiber, polyester fiber, rayon fiber, lyocell fiber, polyurethane foam, viscoelastic polyurethane foam, down, goose-down, or any other suitable materials.

[0021] The first pillow unit 102, in some aspects, has at least one error microphone 110 and at least one speaker 112. The at least one error microphone can be positioned on or in the pillow unit 102 such that the at least one error microphone is in proximity to the user's 108 ears. Moreover, the at least one speaker can be positioned on or in the pillow unit 102 such that sound emitted from the at least one speaker is easily heard by the user 108. In some aspects, the at least one speaker can also be positioned so that it is not easily heard by persons outside of the area proximal to the sleeping surface 114 of the pillow unit 102, although in some aspects the at least one speaker can be heard by a person outside of the area proximal to the sleeping surface 114 such as the sleeping partner lying in the same bed as the user 108.

[0022] The system 100 further includes a control unit 104 operatively coupled to the first pillow unit 102 and the at least one reference microphone 106 such that it receives a signal from

the at least one error microphone 110 disposed in the first pillow unit 102 and the at least one reference microphone 106. As shown, the control unit 104 can be connected via an operative coupling 116. As will be discussed in more detail below, the control unit 104 can be configured to produce an anti-noise in the at least one speaker 112 disposed in the first pillow unit 102 by processing the signals received from the at least one error microphone 110 and the at least one reference microphone 106 using gated dynamic adjustments such that the anti-noise cancels any sound produced proximate the at least one reference microphone 106.

[0023] The anti-snoring system 100 can also include at least one reference microphone 106 that is configured to capture sound produced proximate to the at least one reference microphone 106. As used herein, “microphone” means any sensor that is capable of detecting a sound. In some aspects, the sound can be a snoring sound made by a snorer within audible proximity to user 108. In other aspects, the sound can be any unwanted environmental sound. In some aspects, more than one pillow unit can be implemented. Such systems are referred to herein as symmetric systems. The at least one reference microphone 106, 206a, 206b can be positioned in any manner that is suitable to provide causality for the signal processing and operation of the ANC system and generates an audio signal that is sufficiently representative of the acoustical signal to be cancelled by the ANC system. A person of ordinary skill will appreciate, however, that it is not always true that the closer the reference microphone is to the noise source, the better the performance.

[0024] As is shown in FIG. 2, for example, an anti-snoring system 200 includes a first pillow unit 202 that is operatively coupled to a control unit 204 and a second pillow unit 218 that includes at least one reference microphone 206a disposed on or in the second pillow unit 218. As shown, the at least one reference microphone 206a can be disposed on or in the second pillow unit 218 such that the reference microphone 206a can detect a snore sound produced by a user 220 of the second pillow unit 218. In some aspects, the first pillow unit 202 can also include at least one reference microphone 206b. The at least one reference microphone 206b can be disposed on or in the first pillow unit 202 such that the at least one reference microphone 206b can detect a snore sound produced by a user 208 of the first pillow unit 202.

[0025] An electronic data path between a snorer’s pillow and the partner pillow can exist to facilitate ANC processing. As mentioned, in some aspects, the system can use a simple wired path or can include wireless connections. For example, as shown in FIGS. 1–2, the operative

coupling 116, 216 can be any coupling that is effective to transmit signals between the inputs and outputs of the control unit, which can include a wired, wireless coupling, or both. In some aspects, as shown in FIG. 2, the operative coupling 216 between the first pillow unit 202, second pillow unit 218, control unit 204, the at least one reference microphone 206a, 206b can be a wired connection. In other aspects, the system can incorporate a wireless link, such as an RF link, between the system components. For example, the operative coupling 216 between the first pillow unit 202, second pillow unit 218, control unit 204, the at least one reference microphone 206a, 206b, the at least one error microphones 210, and/or the at least one speakers 212, can be a wireless connection. Any suitable wireless communication hardware and protocol can be employed including radio frequency (“RF”), Bluetooth, wireless personal area networks or wireless local area networks utilizing dedicated microwave, modulated laser light, cellular networks, or any other wireless communication protocol. Moreover, in some aspects, a wireless link can add delay to the system. For example delay can be imposed by the wireless system such as in data packetizing, wireless protocols, and/or encoding/decoding. This delay, however, can be compensated for digitally in the ANC processing algorithm within the control unit, up to a small limiting amount. In some aspects, the delay imposed by the wireless system cannot be in excess of a value that would require the ANC system to operate in a causal manner.

[0026] The control unit 104, 204 can include a signal processing unit for sending and receiving signals as well as processing and analyzing signals. The control unit 104, 204 can include various processing components. These components can include, but are not limited to, a power supply, signal amplifiers, at least one computer processor, memory, input and output channels, digital signal processing unit (“DSP”), and/or wireless transmitters and receivers, such as an RF transmitter/receiver. In some aspects, the control unit can be wirelessly coupled to the first bedding unit and the reference unit. As such, the control unit can be any external computing device, including but not limited to bedding control systems such as adjustable and/or hospital bed control systems, smart phones, tablets, and/or personal computers.

[0027] As mentioned, the control unit can include a power supply. The power supply can be any suitable power supply including either AC or DC sources. For example, in some embodiments, the power supply can be any of a battery, an AC cord configured to plug in to an AC socket or a DC socket such as a socket that is disposed directly on a bedding unit, inductive

coupling sources such as QiTM produced by Wireless Power Consortium, and/or any other power source.

[0028] As shown in FIG. 3, in some aspects, an example control unit 304 can include at least one input channel 332. In some aspects, the number of input channels 332 can be equal to the total number of error microphones and reference microphones in the anti-snore system. The input channels 332 can be analog, and can include signal conditioning circuitry, a preamplifier 334 with adequate gain, an anti-aliasing low pass filter 336, and an analog-to-digital converter (ADC) 338. The input channels 332 can receive signals (or noise) from the error microphones and the reference microphones.

[0029] In some aspects, the control unit 304 can have at least one output channel 340. The number of output channels 340 can be equal to the number of speakers 112, 212 in the anti-snoring system. The output channels 340 can be analog, and can include a digital-to-analog converter (DAC) 342, smoothing (reconstruction) low pass filter 344, and power amplifier 346 to drive the at least one speaker. The output channels 340 can send a signal to the speakers 112, 212 to make sound, such as the desired anti-noise sound.

[0030] A digital signal processing unit (DSP) 348 generally includes a processor with memory. The DSP receives signals from the input channels 332 and sends signals to the output channels 340. The DSP can also interface (i.e. input and output) with other digital systems 350, such as, but not limited to, audio players for entertainment, digital storage devices for sound recording and phone interfaces for hands-free communications.

[0031] The DSP can also include an algorithm(s) for processing signals for operation of the anti-snoring system. The algorithm(s) can, for example, control interactions between the at least one error microphone 110, 210, the at least one speaker 112, 212, and the at least one reference microphone 106, 206a, 206b. In some aspects, the algorithm can be at least one of (a) multiple-channel broadband feedforward active noise control for reducing noise, (b) adaptive acoustic echo cancellation for hands-free communication, (c) signal detection to avoid recording silence periods and sound recognition for non-invasive detection, or (d) integration of active noise control and acoustic echo cancellation. Each of these algorithms are described more fully in U.S. Patent No. 8,325,934 to Kuo et al. entitled "Electronic pillow for abating snoring/environmental noises, hands-free communications, and non-invasive monitoring and recording," which is incorporated herein by reference in its entirety. The DSP can also include

other functions such as non-invasive monitoring using microphone signals and an alarm to wake the user up or call caregivers for emergency situations.

[0032] In use, the control unit 304, using the DSP 348, can be configured to further process the input signals using a variety signal processing techniques in order to produce the appropriate anti-noise output signal to be transmitted to the at least one speaker in either the first or second pillow units in such a manner as will avoid improper processing and/or will aid in system functionality. For example, processing methods can be implemented in the DSP 348, as is described below, that limit the improper convergence of the ANC anti-noise signal. By way of example only and without limitation, signal processing methods can include gated dynamic adjustment, primary path training, ultrasonic primary path training, secondary path training, adaptive step size filtering, and automatic gain control. Additionally, auxiliary supplemental audio and sleep analysis functionality can be utilized. Each of these example processing methods and functions is described below.

Gated Dynamic Adjustments

[0033] In some aspects, the system can include dynamic adjustment of the adaptive filter. In some prior art applications, the filter is constantly adjusting regardless of whether there is a snore event, silence, or some non-snore sound. This continuous adjustment can lead to a convergence on non-optimal ANC; that is, dynamic adjustments when snores are not occurring can cause the system to improperly adjust, gradually converging toward an ineffective ANC.

[0034] In some aspects, a gated dynamic adjustment algorithm or scheme can be used to better adjust during periods of no snoring. “Gated dynamic adjustment” as defined herein means that rather than constantly or continuously adapting a dynamic filter, adjustments to the dynamic filter are dependent on the presence of snoring sounds within certain SPL limits. Using gated dynamic adjustment, a noise gate controlled by the reference microphone can turn the adjustment on when the sound level at the reference microphone exceeds a certain threshold. When the sound is below the threshold, the adjustments are frozen. In this manner, when a new snore event occurs, the adjustments are “ready” and at or near the proper level.

[0035] Detection of the snore may be more than simply detecting sound above a threshold. Digital pattern recognition on the reference microphone signal may intelligently

determine if the sound is actually a snore or some spurious sound. The adjustments only take place for actual snores or other identifiable, undesirable sounds.

[0036] In some aspects, a more complex gate arrangement utilizing “fuzzy logic” controls can be used. Rather than turning the adjustment gate on or off, the fuzzy logic algorithm allows the adjustment control to be partially on following a non-linear function. For example, detecting a quiet snore with low confidence may open the adjustment gate a small amount, but a loud snore may open the gate fully. Multiple inputs other than the simple sound level at the microphone may be inputs to the fuzzy logic system including ambient noise at the reference mic and error mics, confidence in the snore detection, and accelerometers in the snorer's pillow. Fuzzy logic has been shown to be an effective means of controlling non-linear systems which cannot be fully quantified.

Primary Path Training

[0037] In a symmetrical system, or in systems employing an additional speaker placed in the snorer's pillow, “primary path training” may be employed. The distance between the at least one reference microphone in the snorer's pillow, and the at least one error microphone in the partner's pillow is defined herein as the “primary path.” In some aspects, it can be advantageous to the signal processing to train the system to account for this primary path distance and transmission characteristics, for example to avoid delays associated with the sound traveling the primary path distance. “Primary path training” as used herein is defined as processing a signal received in an error microphone and a reference microphone to account for the distance between the at least one error microphone and the at least one reference microphone. In some aspects, primary path training is accomplished by transmitting a controlled test signal—white or pink noise, for example—from the snorer's speaker and analyzing the received controlled test signal in the error microphones in the partner's pillow and the reference microphone in the snorer's pillow. For example, as shown in FIG. 2, the control unit 204 causes a test signal to play from at least one speaker 212 in the second pillow unit 218. The control unit 204 then analyzes the test signal detected in the at least one error microphone 210 in the first pillow unit 202 and the at least one reference microphone 206a in the second pillow unit 218. In this way, the primary path is quantified and a filter is synthesized. This primary path filter supplements the dynamic filter in the ANC algorithm to achieve closer to ideal cancellation. In some systems, a “secondary

path” is trained. That is, a controlled test signal is transmitted from the speakers in a pillow unit to the error microphones within the same a pillow unit. By measuring the response at the error microphones, the acoustic system (speakers, acoustic path, error microphones) is quantified and a filter response is synthesized. This filter response is used to compensate for the non-ideal system response when calculating ANC anti-noise signals.

Ultrasonic Primary Path Training

[0038] In some aspects, an inherent constraint to the ANC system is that the primary path distance between the snorer and the at least one error microphone is variable. Primary path training as described above can compensate for this primary path distance but if the primary path changes after training—such as if a sleeping person moves his or her pillow in the night—the primary path training can require adjusting. In some aspects, though, the primary path can be repeatedly trained, for example at least to measure the distance of the primary path, by transmitting an ultrasonic signal between the snorer's pillow and the error microphones. Even as the partners sleep, training can take place as the signal is above the range of human hearing. By transmitting and receiving this ultrasonic signal, the distance of the primary path can constantly or periodically be monitored supplementing the ANC processing computations. In some aspects, ultrasonic primary path training can utilize speakers and microphones having sufficient response capabilities at ultrasonic frequencies and can also include high sampling rate to digitize the ultrasonic signals and present them to a DSP for analysis & processing.

Adaptive Step Size, μ (μ)

[0039] In some aspects, it may be possible to vary the step size, μ (μ), of the adaptive filter (W) to optimize the rate of convergence. Such a process is referred to as “adaptive step size” herein. A relationship between the maximum value of the step size and the length of the adaptive filter may be developed in order to help maintain the stability of the ANC system. In some aspects, the product of the step size and the length of the adaptive filter should be examined and not allowed to exceed a predefined value.

[0040] A criterion may be developed to help select the best step size of the adaptive filter to maximize the noise cancellation for a broad range of sound pressure levels (SPL). This criterion would be based on the SPL of the residual noise remaining in the “quiet zone” (around

the error microphones & sleep partner's ears) when the ANC is active. This has the benefit of taking the actual SPL of the remaining noise into account for the selection of the step size. This criterion can also be useful for optimizing other parameters of the ANC system.

Automatic Gain Control

[0041] In many audio systems there is a large potential dynamic range in the input signals. That is, the difference between the quietest meaningful sound and the loudest can be quite large. This presents a challenge to both the analog electronics (microphones, pre-amplifiers, analog-to-digital-converters, digital-to-analog converters) and digital processing (limited range in fixed-point and to a lesser extent floating-point math). For example, if the input signals are generally quiet, it is natural to have high-gain amplifiers, but if a loud sound suddenly occurs, the systems may “clip,” distorting the signal, corrupting or losing information. Conversely, if the gain is set to accommodate the loudest signals, very quiet sounds can be lost in the noise floor of the electronics.

[0042] Anti-snore systems can optionally include an automatic gain control (AGC) circuit at one or more points in the audio signal path. As defined herein, “automatic gain control” means a processing algorithm or circuit that provides a controlled signal amplitude at its output, based on the amplitude in the input signal. In this way, the overall dynamic range of the system is increased. In some aspects, during the presence of loud inputs, the gain is lowered. The software is aware of the gain setting and can compensate digitally during processing and the reverse can be true for quiet input signals.

Auxiliary Supplemental Audio

[0043] In some aspects, anti-snoring systems can optionally include inputs for auxiliary supplemental audio, *i.e.*, sounds which are intended to be heard, rather than canceled out. For examples, sleep sounds (nature sounds, waves, binaural beats, etc.) can be superimposed with the ANC output on the speaker. Music, television, telephone, or public address audio can also be played by the at least one speaker disposed within either the first or second pillow units or bedding units. In some aspects, the control unit can be operatively coupled to the desired sound producing device, such as a cell phone, television, or public address system such as on an airplane. In some aspects, the control unit can be configured to cease ANC processing during the

playback of auxiliary supplemental audio or alternatively can superimpose the auxiliary supplemental audio over the anti-noise produced.

Sleep Analysis

[0044] In addition to the error and reference microphones, other sensors can be included in the pillows including accelerometers, thermometers, pressure sensors, heart rate monitors, respiration rate monitors, and any other sensor. These sensors for both the snorer and partner can be used to analyze the sleep state, quality, and quantity of the user's sleep. In some aspects, this data can be transmitted to a computer or smartphone for analysis and snoring may be correlated to the sleep disturbance of the partner. Through analysis of this data, the effectiveness of the snore cancellation and other measures to improve sleep, can be tracked, quantified, and optimized.

[0045] In some aspects, a person of ordinary skill will understand that in some ANC systems, the algorithms used to generate anti-noise, such as those described herein, can be sensitive to the input signal's power (or magnitude). If the power of the input signal in certain frequency ranges—for example, less than 100 Hz—has low power either because of the signal itself, the primary path, secondary path, and/or also the frequency response of the microphones or loudspeakers, the convergence of the adaptive filter can be affected and the filter can even diverge in some aspects. As is described below, the primary path and secondary paths of the ANC system, the frequency response of microphones, and the speakers can affect the effectiveness of noise cancellation in certain frequency regions, or maybe the feedback from secondary speaker to the reference sensor. Moreover, as will be appreciated by a person of ordinary skill in the art, the frequency response of system components, such as the at least one error microphone, the at least one response microphone, and the at least one speaker is related to the performance of the ANC system. As such, in some aspects, system components having a desirable response can be included.

[0046] Additionally, with respect to sampling frequency and high frequency noises, ANC works well for low frequency noise, for example noise that is generally less than or equal to about 1,000 Hz. In some aspects, ANC can be paired with noise filters configured for high frequency noise, such as noise that is greater than about 1,000 Hz. For example, passive noise controls, including but not limited to noise blocks and noise absorbing foams, can be used. In

some aspects, the sampling frequency (or “Fs”) can be about 2 kHz and the cut-off frequency of anti-aliasing filters can be approximately 800 Hz, although it will be appreciated that any suitable Fs and cut-off frequencies can be utilized.

[0047] Moreover, electronic latency or processing time can be optimized in any given ANC system. Latency can be related to software—for example, processing methods—and the processor’s clock speed. In some aspects, sampling frequency and down sampling processing can relate to latency. For example, processes used for buffering samples and down sampling can cause delay. In some aspects, it will be appreciated by a person of ordinary skill in the art that input signals can be processed sample by sample, as opposed to block by block, to limit latency.

[0048] With respect to the above description, it is to be realized that the optimum composition is to include variations in components, materials, size, shape, form, function, and manner of operation, assembly and use, are deemed readily apparent to one skilled in the art, and all equivalent relationships to those illustrated in the examples and described in the specification are intended to be encompassed. Therefore, the foregoing is considered as illustrative only. Further, various modifications may be made without departing from the scope thereof, and it is desired, therefore, that only such limitations shall be placed thereon as are set forth in the appended claims.

CLAIMS

What is claimed is:

1. An anti-snoring system, comprising:
 - a first pillow unit having at least one error microphone and at least one speaker;
 - at least one reference microphone configured to capture sound produced proximate to the at least one reference microphone; and
 - a control unit operatively coupled to the first pillow unit and the at least one reference microphone such that it receives signals from the at least one error microphone disposed in the first pillow unit and the at least one reference microphone, and the control unit being configured to produce an anti-noise in the at least one speaker disposed in the first pillow unit by processing the signals received from the at least one error microphone and the at least one reference microphone using gated dynamic adjustments such that the anti-noise cancels any sound produced proximate the at least one reference microphone.
2. The anti-snoring device of claim 1, wherein the controller is wirelessly coupled to the first pillow unit and the at least one reference microphone.
3. The anti-snoring device of claim 1, wherein the controller is wirelessly coupled to the first pillow unit and the at least one reference microphone using a wireless RF link.
4. The anti-snoring device of claim 1, wherein the first pillow unit includes at least one reference microphone configured to capture sound produced proximate to the at least one reference microphone disposed in the first pillow unit.
5. The anti-snoring device of claim 1, wherein the at least one reference microphone is disposed in a second pillow unit.
6. The anti-snoring device of claim 5, wherein the second pillow unit further comprises at least one error microphone and at least one speaker.
7. The anti-snoring device of claim 1, wherein the control unit further processes the signals using secondary path training.
8. The anti-snoring device of claim 1, wherein the control unit further processes the signals using primary path training.
9. The anti-snoring device of claim 1, wherein the control unit further processes the signals using ultrasonic primary path training.

10. The anti-snoring device of claim 1, wherein the control unit further processes the signals using adaptive step size filtering.
11. The anti-snoring device of claim 1, wherein the control unit further processes the signals using automatic gain control.
12. The anti-snoring device of claim 1, wherein the control unit further processes the signals using auxiliary supplemental audio.
13. The anti-snoring device of claim 1, wherein the control unit further processes the signals using sleep analysis.
14. The anti-snoring device of claim 1, wherein processing the signals received from the at least one error microphone in the first pillow unit and the at least one reference microphone further comprises using at least one of primary path training, ultrasonic primary path training, adaptive step size filtering, automatic gain control, auxiliary supplemental audio, and sleep analysis.
15. The anti-snoring device of claim 5, wherein the control unit is disposed within the first pillow unit or the second pillow unit.
16. An anti-snoring system, comprising:
 - a first pillow unit comprising at least one error microphone and at least one speaker;
 - a second pillow unit comprising at least one error microphone and at least one speaker;
 - at least one reference microphone configured to capture sound produced proximate to at least one of the first pillow unit and the second pillow unit;
 - a control unit operatively coupled to the first pillow unit, second pillow unit, and the at least one reference microphone such that it receives signals from the at least one error microphone in the first pillow unit, the at least one error microphone in the second pillow unit, and the at least one reference microphone, and the control unit being configured to produce an anti-noise in the at least one speaker disposed in the first pillow unit by processing the signals received from the at least one error microphone in the first pillow unit and the at least one reference microphone such that the anti-noise cancels any sound produced proximate the at least one reference microphone.

17. The anti-snoring system of claim 16, wherein the control unit is further configured to produce an anti-noise in the at least one speaker disposed in the second pillow unit by processing the signals received from the at least one error microphone in the second pillow unit and the at least one reference microphone using gated dynamic adjustments such that the anti-noise cancels any sound produced proximate the at least one reference microphone.
18. The anti-snoring system of claim 16, wherein the control unit processes the signals using gated dynamic adjustments.
19. The anti-snoring system of claim 16, wherein the control unit further processes the signals using primary path training.
20. The anti-snoring system of claim 16, wherein the control unit further processes the signals using ultrasonic primary path training
21. The anti-snoring system of claim 16, wherein the control unit further processes the signals using adaptive step size filtering.
22. The anti-snoring system of claim 16, wherein the control unit further processes the signals using automatic gain control.
23. The anti-snoring system of claim 16, wherein the control unit further processes the signals using auxiliary supplemental audio.
24. The anti-snoring system of claim 16, wherein the control unit further processes the signals using sleep analysis.
25. The anti-snoring system of claim 16, wherein processing the signals received from the at least one error microphone in the first pillow unit and the at least one reference microphone further comprises using at least one of primary path training, ultrasonic primary path training, adaptive step size filtering, automatic gain control, auxiliary supplemental audio, and sleep analysis.
26. The anti-snoring system of claim 16, wherein the at least one reference microphone is disposed in at least one of the first pillow unit and the second pillow unit.
27. The anti-snoring system of claim 16, wherein the control unit is disposed within the first pillow unit or second pillow unit.

28. The anti-snoring system of claim 16, wherein the control unit is a smart phone, watch, body-worn computer, pad device, tablet device, or any other self-contained computer processing device on which software can be loaded and executed.
29. The anti-snoring system of claim 16, wherein the at least one error microphone in a first pillow unit can also be used as the at least one reference microphone for generating the anti-noise signal that is produced by the least one speaker in a second pillow unit.
30. The anti-snoring system of claim 29, wherein multiple error microphones are used in a first pillow unit and the signals from each of the multiple error microphones are analyzed to determine which one is best suited to use as the reference signal on which the generated anti-noise that is to be produced by the at least one speaker in the second pillow unit should be based.
31. A method of canceling snoring, comprising:
 - sensing a reference noise with a reference microphone and outputting a reference noise signal to a control unit;
 - sensing an error noise level with an error microphone that is disposed proximate a user's ear and outputting an error noise signal to the control unit;
 - determining an anti-noise to cancel the reference noise by processing the reference noise signal and the error noise signal using gated dynamic adjustments; and
 - producing the anti-noise using at least one speaker that is proximate the user's ear such that the reference noise is cancelled.
32. The method of claim 30, wherein determining an anti-noise to cancel the reference noise by processing the reference noise signal further comprises utilizing at least one of primary path training, ultrasonic primary path training, adaptive step size filtering, automatic gain control, auxiliary supplemental audio, and sleep analysis.
33. The method of claim 31, wherein the primary path training includes transmitting an ultrasonic signal between a speaker disposed near the reference source and the error microphone that is disposed proximate the user's ear.
34. The method of claim 30, wherein the reference noise is a snoring sound.
35. The method of claim 30, wherein the control unit is wirelessly coupled to at least one of the reference microphone, the error microphone, and the at least one speaker.

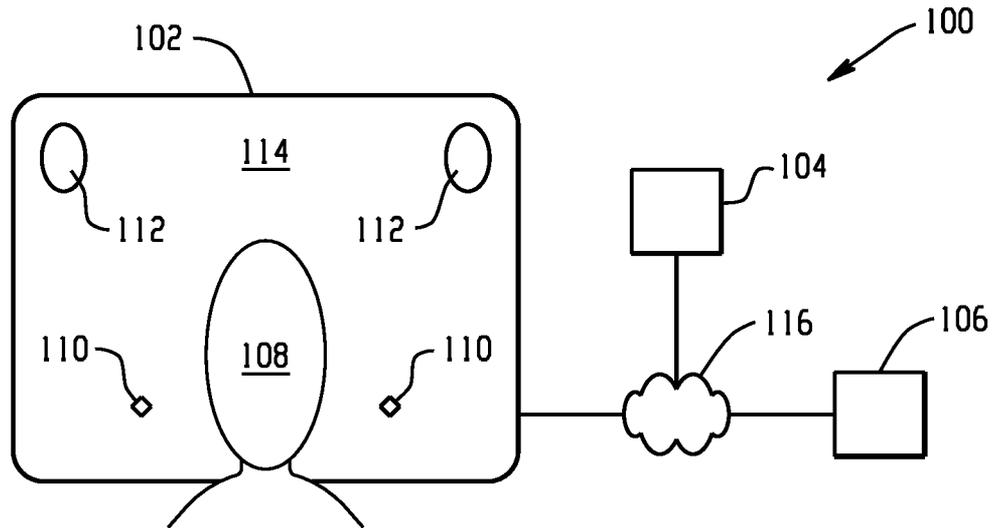


Fig. 1

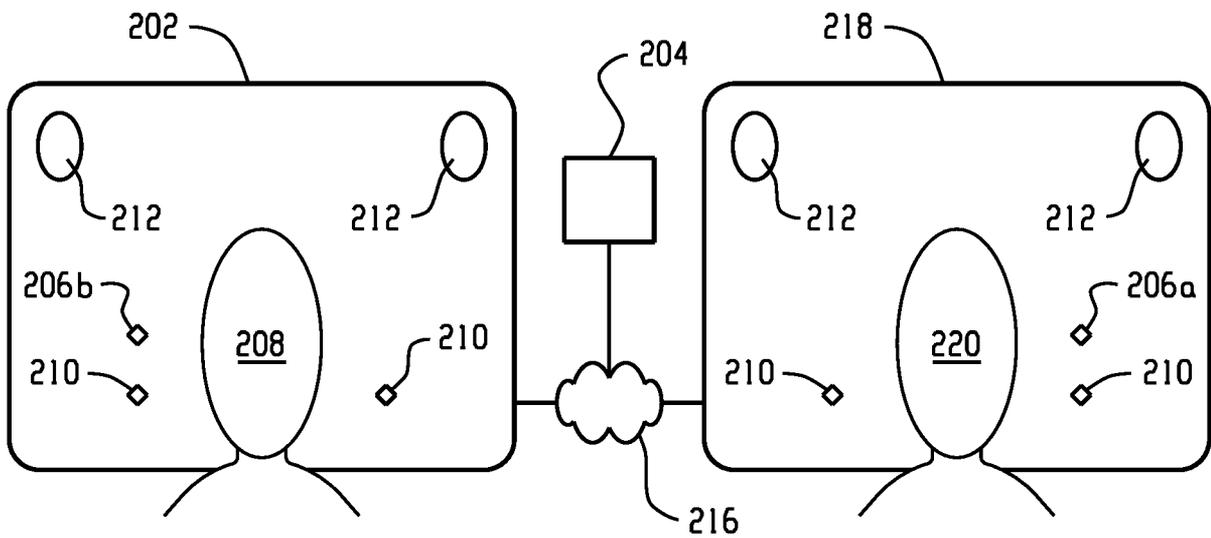


Fig. 2

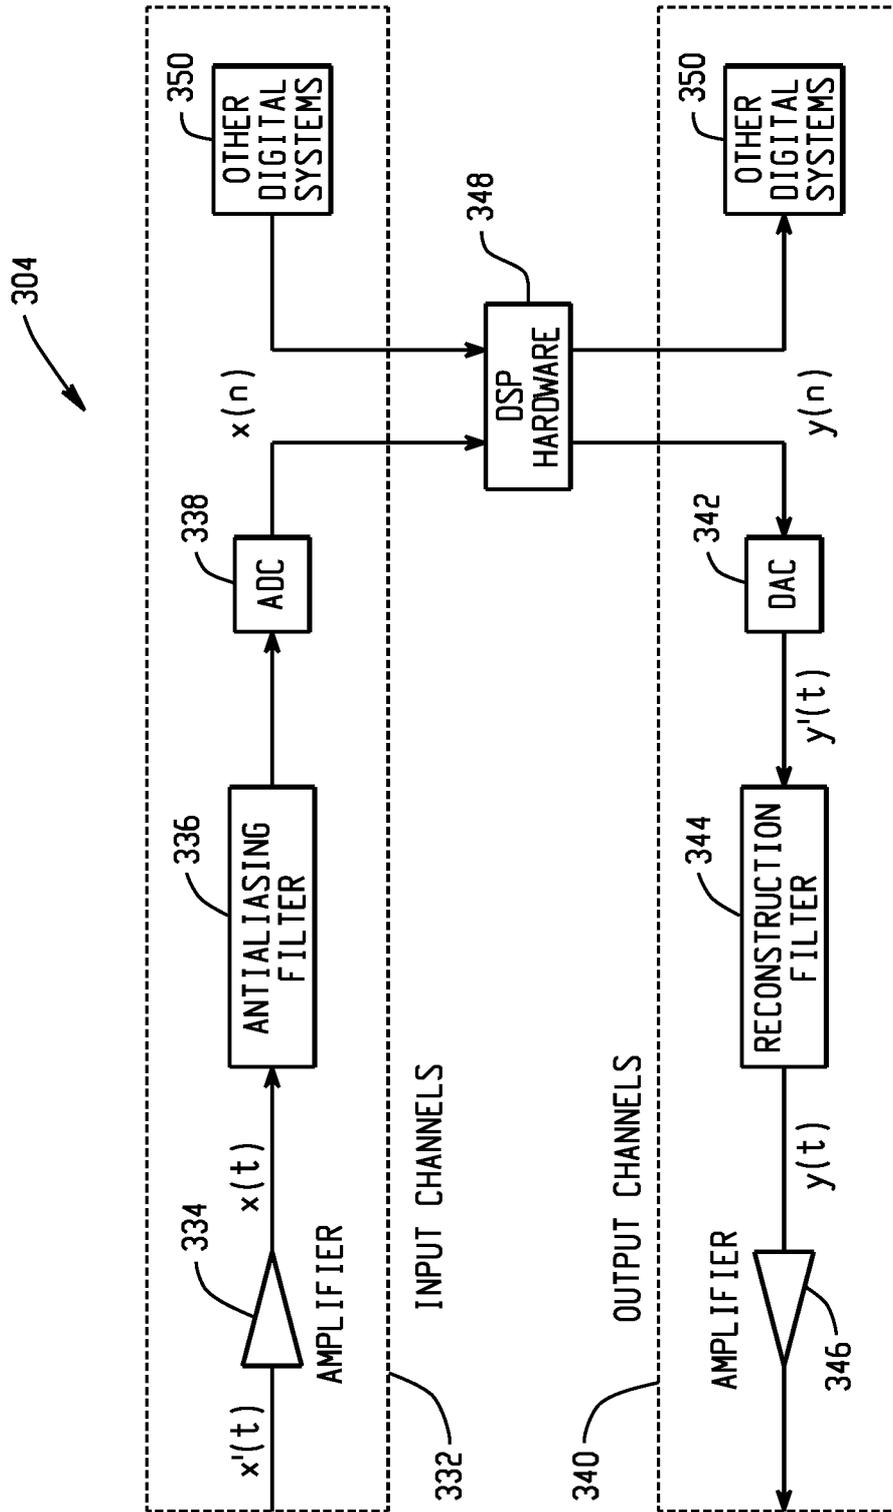


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/047515

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/047515

A. CLASSIFICATION OF SUBJECT MATTER
INV. G10K11/178 A47G9/10
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G10K A47G
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 8 325 934 B2 (KUO SEN M [US]) 4 December 2012 (2012-12-04) cited in the application figures 2,4,5 paragraphs [0011] - [0017] paragraphs [0037], [0038] -----	1-15, 31-35
Y	US 2007/076896 A1 (HOSAKA RIKA [JP] ET AL) 5 April 2007 (2007-04-05) paragraphs [0005], [0009] -----	1-8, 10-15, 18,31-35
X	WO 2011/015979 A2 (KONINKL PHILIPS ELECTRONICS NV [NL]; BOOIJ PAUL S [NL]; VAN LEEST ADRI) 10 February 2011 (2011-02-10)	16-19, 21-30
Y	figures 2,3 page 9, line 22 - page 11, line 1 ----- -/--	18,20

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 18 November 2016	Date of mailing of the international search report 25/11/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Parmentier, H�el�ene

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/047515

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004/234080 A1 (HERNANDEZ WALTER C [US] ET AL) 25 November 2004 (2004-11-25) figure 1 paragraphs [0006] - [0012] paragraph [0031] -----	9,20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/047515

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 8325934	B2	04-12-2012	EP 2217113 A1	18-08-2010
			JP 5406996 B2	05-02-2014
			JP 2011505912 A	03-03-2011
			JP 2013157988 A	15-08-2013
			US 2009147965 A1	11-06-2009
			US 2013070934 A1	21-03-2013
			WO 2009073671 A1	11-06-2009

US 2007076896	A1	05-04-2007	JP 4742226 B2	10-08-2011
			JP 2007093962 A	12-04-2007
			US 2007076896 A1	05-04-2007

WO 2011015979	A2	10-02-2011	CN 102473406 A	23-05-2012
			EP 2462585 A2	13-06-2012
			JP 5771205 B2	26-08-2015
			JP 2013501946 A	17-01-2013
			KR 20120054036 A	29-05-2012
			US 2012163626 A1	28-06-2012
			WO 2011015979 A2	10-02-2011

US 2004234080	A1	25-11-2004	NONE	

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-35

Anti-snoring system and method comprising a pillow with an error microphone and a speaker, a control unit being configured to produce an anti-noise using gated dynamic adjustments

1.1. claims: 16-30

Anti-snoring system comprising a first and a second pillow, each pillow comprising an error microphone and a speaker
