



(51) International Patent Classification:

F21 V33/00 (2006.01) F21Y 101/02 (2006.01)  
F21 V23/00 (2015.01)

(21) International Application Number:

PCT/CN20 15/075464

(22) International Filing Date:

31 March 2015 (31.03.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2014 10135703.5 4 April 2014 (04.04.2014) CN

(71) Applicant: **SENGLED OPTOELECTRONICS CO., LTD** [CN/CN]; Minhe Economical Zone, Wuzhen, Tongxiang, Jiaxing, Zhejiang 314501 (CN).

(72) Inventors: **WANG, Xia**; Minhe Economical Zone, Wuzhen, Tongxiang, Jiaxing, Zhejiang 314501 (CN). **SHEN, Jinxiang**; Minhe Economical Zone, Wuzhen, Tongxiang, Jiaxing, Zhejiang 314501 (CN). **ZHENG, Jianbing**; Minhe Economical Zone, Wuzhen, Tongxiang, Ji-axing, Zhejiang 314501 (CN).

(74) Agent: **HANGZHOU FENGHE PATENT ATTOR-NEYS OFFICE CO., LTD**; B Room, 8th/F, B Building, YaoJiang International Tower, 100 MoGanShan Road, Gongshu, Hangzhou, Zhejiang 310005 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: WIRELESS SPEAKER SYSTEM AND WIRELESS DATA TRANSMISSION METHOD

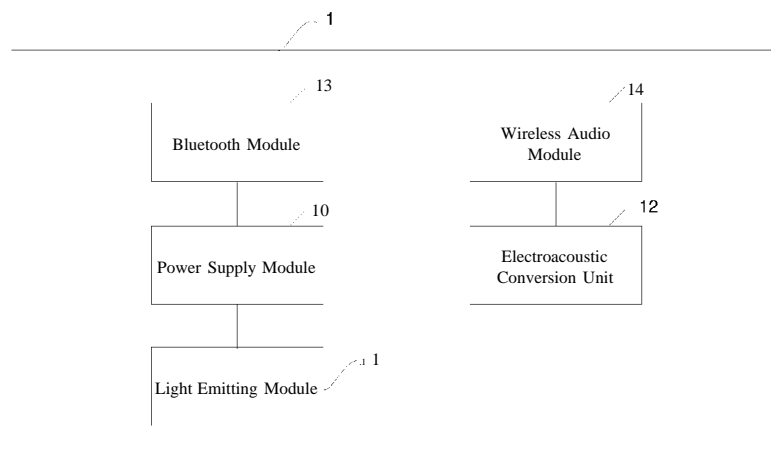


FIG. 1

(57) Abstract: A wireless speaker system includes at least one main LED lighting device (1), at least one auxiliary LED lighting device (2) and a smart terminal (3). The main LED lighting device (1) included a Bluetooth module (13) and a wireless audio module (14). The auxiliary LED lighting device (2) includes a wireless audio module (14). The smart terminal (3) is configured to send data to the main LED lighting device (1) through a Bluetooth protocol. The wireless audio module (14) in the main LED lighting device (1) transmits the data to the auxiliary LED lighting device (2). The auxiliary LED lighting device (2) sends feedback data to the smart terminal (3) through the main LED lighting device (1).



# WIRELESS SPEAKER SYSTEM AND WIRELESS DATA TRANSMISSION METHOD

## Technical Field

- [1] The present disclosure generally relates to the field of light emitting diode (LED) lighting technology and wireless speaker technology and, more particularly, relates to a wireless speaker system and a wireless data transmission method.

## Background Art

- [2] LED lighting may generally provide advantages in energy conservation, environmental protection, controllable lighting, solid state lighting, and long operational lifetime. LED lamps thus have been widely used in various areas for public, commercial, and/or indoor lighting.
- [3] For example, a wireless speaker system can be combined with an LED lighting device. Through Bluetooth technology, a smart terminal can share an audio signal to the LED lighting device having a Bluetooth module to play the audio. However, in an existing system of the wireless speakers combining with the LED lighting devices, when playing the audio signal, a specified wireless transmitter needs to be added to control and send the audio signal. The wireless transmitter may be large and expensive, which would not be suitable to be used with smart terminals, such as mobile phones. The compatibility of such devices is poor and they are unable to adapt to more applications. In addition, the existing wireless speaker system often only includes a single LED lighting device and can only play in mono. Therefore, a stereo wireless speaker system may not meet a user's needs.
- [4] The disclosed wireless speaker systems and wireless data transmission methods are directed to solve one or more problems set forth above and other problems.

## Disclosure of Invention

### Solution to Problem

### Technical Solution

- [5] One aspect of the present disclosure includes a wireless speaker system. The system includes at least one main light emitting diode (LED) lighting device including a Bluetooth module and a wireless audio module. The system also includes at least one auxiliary LED lighting device including a wireless audio module. Further, the system includes a smart terminal configured to send data to the main LED lighting device through a Bluetooth protocol, such that the wireless audio module in the main LED lighting device transmits the data to the auxiliary LED lighting device, and the auxiliary LED lighting device sends feedback data to the smart terminal through the

main LED lighting device.

[6] Another aspect of the present disclosure includes a wireless data transmission method between a smart terminal and an LED lighting device including a main LED lighting device having address information and at least one auxiliary LED lighting device having address information. The method includes the smart terminal sending data to the main LED lighting device, such that the main LED lighting device confirms the address information and sends the data to the corresponding auxiliary LED lighting device based on the address information. The method also includes the smart terminal receiving feedback data sent by the main LED lighting device and feedback data that is sent by the auxiliary LED lighting device and transmitted through the main LED lighting device.

[7] Another aspect of the present disclosure includes a wireless data transmission method using at least one main LED lighting device and at least one auxiliary LED lighting device. The method includes the main LED lighting device receiving data sent from a smart terminal through a Bluetooth module. The method also includes the main LED lighting device sending the data from the smart terminal to the auxiliary LED lighting device through a wireless signal. Further, the method includes the main LED lighting device transmitting feedback data from the auxiliary LED lighting device to the smart terminal.

[8] Other aspects of the present disclosure can be understood by those skilled in the art in light of the description, the claims, and the drawings of the present disclosure.

### **Brief Description of Drawings**

#### **Description of Drawings**

[9] The following drawings are merely examples for illustrative purposes according to various disclosed embodiments and are not intended to limit the scope of the present disclosure.

[10] Figure 1 illustrates a schematic diagram of an exemplary main LED lighting device consistent with the disclosed embodiments;

[11] Figure 2 illustrates a schematic diagram of an exemplary auxiliary LED lighting device consistent with the disclosed embodiments;

[12] Figure 3 illustrates a structure diagram of an exemplary wireless speaker system consistent with the disclosed embodiments; and

[13] Figure 4 illustrates a flow chart of an exemplary process for wireless data transmission between a smart terminal and an LED lighting device consistent with the disclosed embodiments.

[14] Reference Sign List:

[15] Main LED lighting device 1, Auxiliary LED lighting device 2, Smart terminal

3,Power supply module 10,Light emitting module 11,Electroacoustic conversion unit 12,Bluetooth module 13,Wireless audio module 14;

### **Mode for the Invention**

#### **Mode for Invention**

- [16] Reference will now be made in detail to exemplary embodiments of the disclosure, which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.
- [17] Figure 1 illustrates a schematic diagram of an exemplary main LED lighting device consistent with the disclosed embodiments. Figure 2 illustrates a schematic diagram of an exemplary auxiliary LED lighting device consistent with the disclosed embodiments. As shown in Figure 1 and Figure 2, the LED lighting device includes a main LED lighting device 1 and an auxiliary LED lighting device 2. Similar to the structure of conventional LED lamps, the main LED lighting device and the auxiliary LED lighting device include a power supply module 10 and a light emitting module 11 connected to the power supply module, respectively. The power supply module and the light emitting module are configured to provide a power source for the LED lighting device. In addition, the main LED lighting device and the auxiliary LED lighting device also include an electroacoustic conversion unit 12, respectively.
- [18] The difference between the main LED lighting device and the auxiliary LED lighting device is that the main LED lighting device includes a Bluetooth module 13 and a wireless audio module 14, whereas the auxiliary LED lighting device only includes the wireless audio module 14. The Bluetooth module 13 in the main LED lighting device can communicate with a smart terminal 3 using a Bluetooth protocol. The wireless audio module 14 in the main LED lighting device 1 can communicate with the wireless audio module 14 in the auxiliary LED lighting device 2. The wireless audio module 14 in the main LED lighting device 1 is configured to receive an audio signal or a control signal through the Bluetooth module 13, convert and send the audio signal or the control signal to the wireless audio module 14 in the auxiliary LED lighting device 2.
- [19] Figure 3 illustrates a structure diagram of an exemplary wireless speaker system consistent with the disclosed embodiments. As shown in Figure 3, the wireless speaker system includes at least one main LED lighting device 1, at least one auxiliary LED lighting device 2, and a smart terminal 3. The main LED lighting device 1 establishes a connection with the smart terminal 3 through the Bluetooth module 13. Data sent by the smart terminal 3 is transmitted to the main LED lighting device. Then, the data is transmitted to the auxiliary LED lighting device 2 through the main LED lighting device 1. The auxiliary LED lighting device 2 sends feedback data to the smart

terminal 3 through the main LED lighting device 1. The data transmitted between the smart terminal 3 and the main LED lighting device 1 includes audio data and control data. The audio data is transmitted through Advanced Audio Distribution Profile (A2DP). This profile defines how multimedia audio can be streamed from one device to another over a Bluetooth connection. The control data is transmitted through Serial Port Profile (SPP).

[20] The main LED lighting device 1 and the auxiliary LED lighting device 2 form a multichannel wireless speaker system through their respective wireless audio module 14, such that a multi-channel audio signal can be played through the LED lighting device.

[21] In an exemplary embodiment, the wireless speaker system includes seven auxiliary LED lighting devices 2. The number of the auxiliary LED lighting devices can be configured according to needs. For example, multiple LED lighting devices are used to form a wireless speaker system with 2.0, 2.1, 4.1, 5.1, 7.1 sound channels.

[22] In addition, the smart terminal 3 may be one of a mobile phone, a tablet personal computer (PC), a desktop computer, an Ultrabook, a smart TV and a cloud server.

[23] Figure 4 illustrates a flow chart of an exemplary process for wireless data transmission between a smart terminal and an LED lighting device consistent with the disclosed embodiments. The LED lighting device includes a main LED lighting device and at least one auxiliary LED lighting device. Each LED lighting device has its own address information. As shown in Figure 4, the process includes the following steps.

[24] Step 1: the smart terminal sends data to the main LED lighting device; and the main LED lighting device confirms the address information and sends the data to the corresponding auxiliary LED lighting device based on the address information.

[25] Step 2: the smart terminal receives feedback data sent by the main LED lighting device and feedback data sent by the auxiliary LED lighting device and transmitted through the main LED lighting device.

[26] Comparing to existing technologies, in the present embodiment, the Bluetooth module 13 is only placed in the main LED lighting device 1, but not placed in the auxiliary LED lighting device 2. Further, the bandwidth of the wireless audio transmission from the main LED lighting device to the auxiliary LED lighting device is exclusive audio transmission bandwidth, which minimizes alterations to the original signals and improves transitions between the audio channels.

[27] In various embodiments, the main LED lighting device can be configured as one single device. For example, the at least one power supply unit, the wireless audio module, the electroacoustic conversion unit, and the LED lighting module, can be integrated into the one LED lighting device to form the single device. Accordingly, the multifunctional speaker system can include a plurality of the LED lighting devices each configured as one single device.

- [28] In an exemplary LED lighting device, the electroacoustic conversion unit can be integrated together with the driver circuit of the LED power supply module to save space and to reduce wire loss of a distributed design. In one embodiment, to ensure wireless audio module functions as the wireless transceiver module as desired, an embedded antenna can be included in the integrated LED lighting device. The embedded antenna can be configured to fit a shape of the lamp body of the LED lighting device without increasing the size of the resultant device and to maintain the design of the resulting device.
- [29] Note that, the term "comprising", "including" or any other variants thereof are intended to cover a non-exclusive inclusion, such that the process, method, article, or apparatus containing a number of elements also include not only those elements, but also other elements that are not expressly listed; or further include inherent elements of the process, method, article or apparatus. Without further restrictions, the statement "includes a ....." does not exclude other elements included in the process, method, article, or apparatus having those elements.
- [30] The embodiments disclosed herein are exemplary only. Other applications, advantages, alternations, modifications, or equivalents to the disclosed embodiments are obvious to those skilled in the art and are intended to be encompassed within the scope of the present disclosure.

## **Industrial Applicability**

### **Industrial Applicability And Advantageous Effects**

- [31] Without limiting the scope of any claim and/or the specification, examples of industrial applicability and certain advantageous effects of the disclosed embodiments are listed for illustrative purposes. Various alternations, modifications, or equivalents to the technical solutions of the disclosed embodiments can be obvious to those skilled in the art and can be included in this disclosure.
- [32] A wireless speaker system includes at least one main light emitting diode (LED) lighting device including a Bluetooth module and a wireless audio module. The system also includes at least one auxiliary LED lighting device including the wireless audio module. Further, the system includes a smart terminal. The main LED lighting device is wirelessly connected to the smart terminal through the Bluetooth module. Data sent by the smart terminal is transmitted to the main LED lighting device, and then the data is transmitted to the auxiliary LED lighting device through the Bluetooth module in the main LED lighting device. The auxiliary LED lighting device sends feedback data to the smart terminal through the main LED lighting device.
- [33] Comparing to existing technologies, the Bluetooth module is only set in the main LED lighting device, whereas the Bluetooth module is not set in the auxiliary LED

lighting device. The frequencies of the wireless audio transmissions from the main LED lighting device to the auxiliary LED lighting device are for exclusive audio transmission. This improves the originality of the audio signals and transitions between the audio channels.

[34] In some embodiments, the smart terminal may control the lighting and the audio of the LED lighting devices together. For example, a user may select a lighting color for one audio file. The smart terminal may send the audio data and the control data to the main LED lighting device. The main LED lighting device may then transmit the audio data and control data to the auxiliary LED lighting devices. The LED lighting devices may provide the lighting specified in the control data and may play the audio data. In some embodiment, the smart terminal may also use a software application to control the lighting so that the LED lighting devices may "pulse" the lighting with the audio rhythms, or change colors or brightness when certain audio data are being played.

[35] In some embodiments, the LED lighting devices may include one or more sensors for detecting objects or movements of objects in a room. The main LED lighting device may receive data from the sensors directly or through the auxiliary LED lighting devices. For example, in a room using multiple LED lighting devices to implement a wireless multifunctional audio system, the sensors integrated in the LED lighting devices may detect the position and movements of the a person in the room. The audio system may then adjust the LED lighting device(s) close to the person and the LED lighting device(s) far away from the person accordingly to various algorithms to better broadcast the audio signals. For example, the main LED lighting device may amplify certain frequency bands close to the person. In another example, the main LED lighting device may also adjust the lighting (e.g., dimming) in the LED lighting devices far away from the person. The main LED lighting device may also receive instructions from the smart terminal to adjust the characteristics of the lighting (color, brightness, color temperature, etc.) or audio (volume, amplifying certain frequency ranges, etc.) in certain positions.

[36] In some embodiments, an RF module may be added to the LED lighting device. The RF module may enable users to control the LED lighting device remotely, such as switching the device on/off, adjusting light and sound settings, etc. The RF module may also connect the LED lighting device to the internet to stream music online.

## Claims

[Claim 1]

1. A wireless speaker system, comprising:  
at least one main light emitting diode (LED) lighting device including a Bluetooth module and a wireless audio module;  
at least one auxiliary LED lighting device including a wireless audio module; and  
a smart terminal configured to send data to the main LED lighting device through a Bluetooth protocol, wherein the wireless audio module in the main LED lighting device transmits the data to the auxiliary LED lighting device, and the auxiliary LED lighting device sends feedback data to the smart terminal through the main LED lighting device.
2. The system according to claim 1, wherein the data transmitted between the smart terminal and the main LED lighting device includes audio data and control data.
3. The system according to claim 2, wherein the audio data is transmitted through Advanced Audio Distribution Profile (A2DP).
4. The system according to claim 2, wherein the control data is transmitted through Serial Port Profile (SPP).
5. The system according to claim 1, wherein the smart terminal is one of a mobile phone, a tablet personal computer, a desktop computer, an Ultrabook, a smart TV and a cloud server.
6. A wireless data transmission method using at least one main LED lighting device and at least one auxiliary LED lighting device, comprising:  
receiving, by the main LED lighting device, data sent from a smart terminal through a Bluetooth module;  
sending, by the main LED lighting device, the data from the smart terminal to the auxiliary LED lighting device through a wireless signal;  
and  
transmitting, by the main LED lighting device, feedback data from the auxiliary LED lighting device to the smart terminal.
7. The method according to claim 6, wherein the data transmitted between the smart terminal and the main LED lighting device includes audio data and control data.
8. The method according to claim 6, wherein the audio data is transmitted through Advanced Audio Distribution Profile (A2DP).



9. The method according to claim 8, wherein the control data is transmitted through Serial Port Profile (SPP).

10. An LED lighting and audio system, comprising:

at least one main light emitting diode (LED) lighting device including an LED lighting module and a Bluetooth module and a wireless audio module;

at least one auxiliary LED lighting device including an LED lighting module and a wireless audio module; and

a smart terminal configured to send data to the main LED lighting device through a Bluetooth protocol to control lighting and audio, wherein the wireless audio module in the main LED lighting device transmits the data to the auxiliary LED lighting device, and the auxiliary LED lighting device sends feedback data to the smart terminal through the main LED lighting device.

11. The system according to claim 10, wherein the data transmitted between the smart terminal and the main LED lighting device includes audio data and control data.

12. The system according to claim 10, wherein the smart terminal controls brightness of the main LED lighting device and the auxiliary LED lighting device.

13. The system according to claim 11, wherein the smart terminal controls audio of the main LED lighting device and the auxiliary LED lighting device.

14. The system according to claim 10, wherein the smart terminal controls the lighting and audio in response to the feedback data received from the main LED lighting device and the auxiliary LED lighting device.

15. The system according to claim 10, wherein the audio data is transmitted through Advanced Audio Distribution Profile (A2DP).

16. The system according to claim 10, wherein the control data is transmitted through Serial Port Profile (SPP).

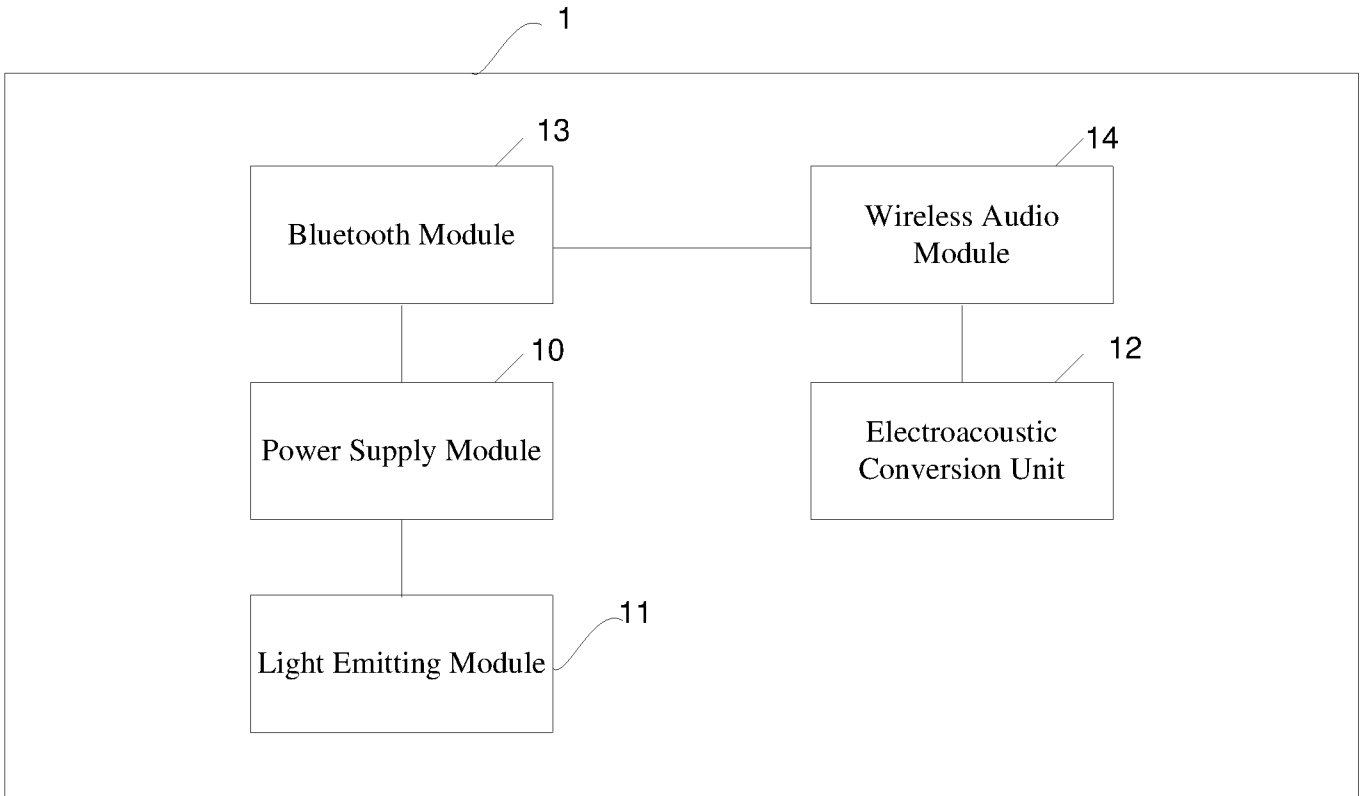


FIG. 1

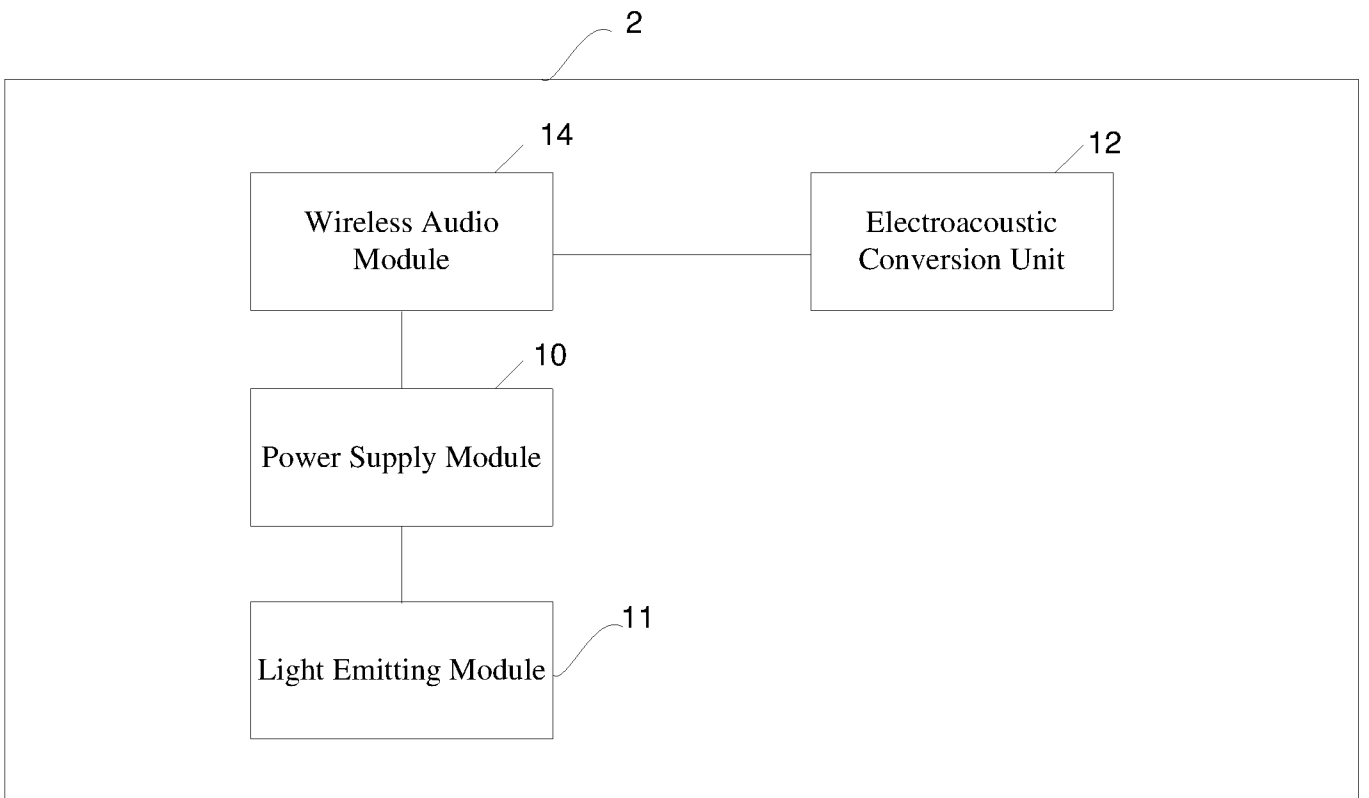


FIG. 2

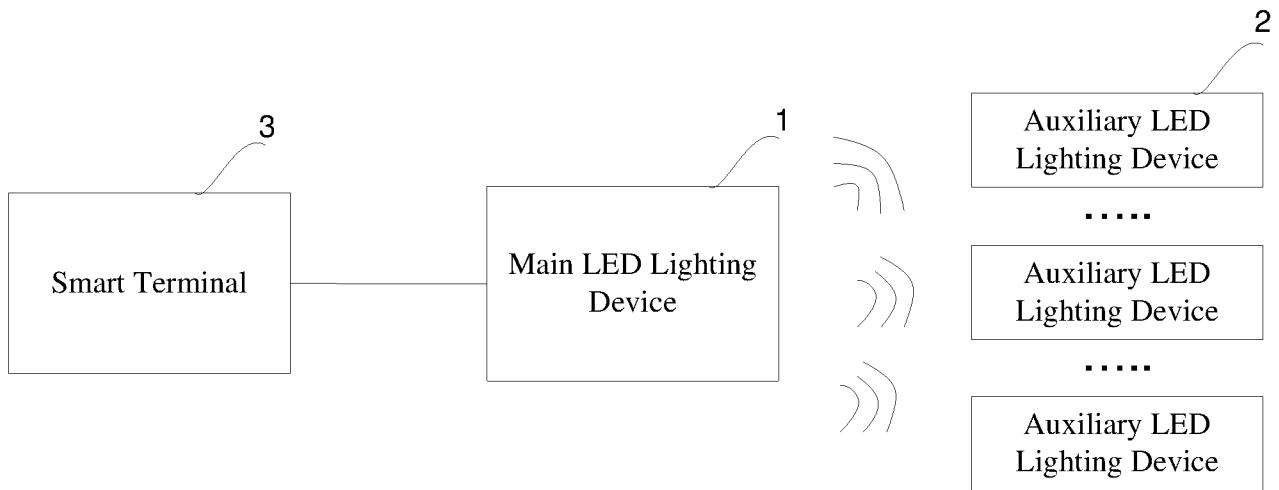


FIG. 3

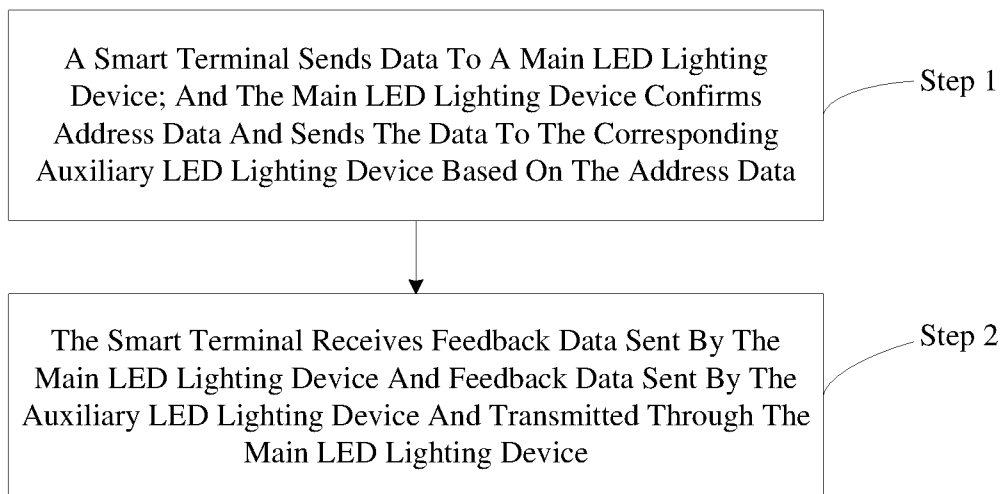


FIG. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/075464

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
F21V 33/00(2006.01)i; F21V 23/00(2015.01)i; F21Y 101/02(2006.01)n		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
F21		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
CPRSABS, CNABS, CNKI, TWABS, DWPI, SIPOABS: LED, wireless+, speaker+, sound+, box+, bluetooth+		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 103925583 A (SHENGDI OPTOELECTRONIC TECHNOLOGY CO LTD) 16 July 2014 (2014-07-16) description, paragraphs [0005]-[0035], figures 1-3	1-16
Y	CN 202172486 U (ZHU, DEYE ET AL.) 21 March 2012 (2012-03-21) description, paragraphs [0004]-[0030], figure 3	1-16
Y	CN 103697354 A (SHENGDI OPTOELECTRONIC TECHNOLOGY CO LTD) 02 April 2014 (2014-04-02) description, paragraph [0012]	1-16
Y	CN 102724609 A (SHENZHEN FENDA TECHNOLOGY CO LTD) 10 October 2012 (2012-10-10) description, paragraphs [0007]-[0030], figure 1	1-16
Y	CN 203395663 U (CHEN, HAIBING) 15 January 2014 (2014-01-15) description, paragraph [0009]	1-16
<b>I</b> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents:		
“A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
“E” earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
“O” document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family	
“P” document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
28 May 2015	08 June 2015	
Name and mailing address of the ISA/CN	Authorized officer	
STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088, China	XIAO,Yuan	
Facsimile No. (86-10)62019451	Telephone No. (86-10)62085587	

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2015/075464**

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	103925583	A	16 July 2014	None			
CN	202172486	U	21 March 2012	None			
CN	103697354	A	02 April 2014	None			
CN	102724609	A	10 October 2012	CN	102724609	B	24 September 2014
CN	203395663	U	15 January 2014	None			