



(22) Date de dépôt/Filing Date: 2003/07/15

(41) Mise à la disp. pub./Open to Public Insp.: 2005/02/25

(45) Date de délivrance/Issue Date: 2007/10/02

(51) Cl.Int./Int.Cl. *B65G 15/58* (2006.01),
B65G 43/08 (2006.01)


(72) Inventeur/Inventor:
SHERWOOD, BERNARD J., CA

(73) Propriétaire/Owner:
SHERWOOD, BERNARD J., CA

(74) Agent: EGGINS, DOUGLAS W.

(54) Titre : CONVOYEUR A BANDE A AIR ASPIRE

(54) Title: VACUUM BELT CONVEYOR SYSTEM

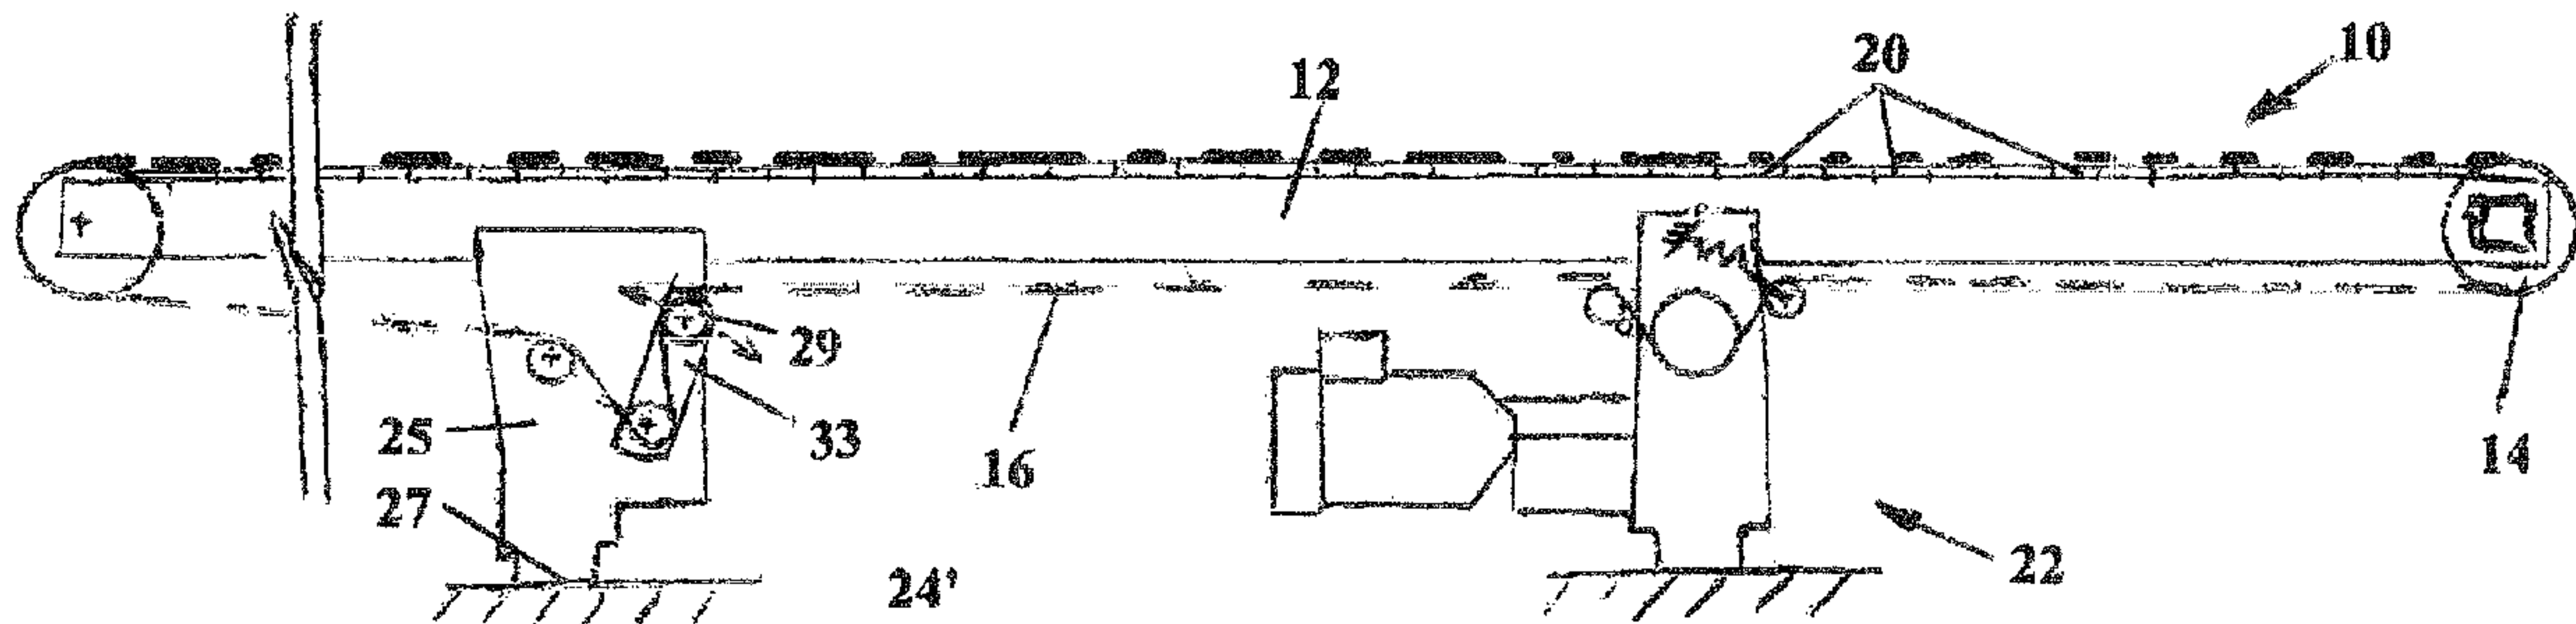

(57) Abrégé/Abstract:

A modular pneumatic transfer system for belt conveyors has a series of individual plastic transfer blocks over which the belt rides. Used as a transfer vacuum system, each transfer block is part of a self-contained suction module, each module incorporating a low pressure air jet serving as a reaction sensing means to determine the presence of an overlying article; a multi-stage air-driven venturi, operating as an air ejector, provides high vacuum in the suction block; and a pneumatic control actuated by the sensing means activates the venturi and applies the vacuum to the respective block. This suction at the block, is applied to perforations in the belt causing "draw-down" of the sensed object onto the belt, for transfer thereby. The blocks may also be used as air cushion modules, in a supporting mode. The belt drive synchronous motor is located in the conveyor mid-section, with belt position relative to workstations located alongside the belt being determined by the motor controller, for instance, a synchronous electric motor, for accurate stop/start operation of the conveyor (including reversal) in relation to the adjoining work stations. Direct drive of the transfer belt can be provided, using a toothed transfer belt. A number of such conveyors can operate side by side, driven by a shared splined drive shaft. The guide rolls of the system may be of plastic, having the support bearings set into the roll end or ends, for low cost replacement of the roll. The extruded beam on which the transfer blocks are carried contains four large bore service galleries from which high pressure and low pressure air are supplied to the system.



ABSTRACT

A modular pneumatic transfer system for belt conveyors has a series of individual plastic transfer blocks over which the belt rides. Used as a transfer vacuum system, each transfer block is part of a self-contained suction module, each module incorporating a low pressure air jet serving as a reaction sensing means to determine the presence of an overlying article; a multi-stage air-driven venturi, operating as an air ejector, provides high vacuum in the suction block; and a pneumatic control actuated by the sensing means activates the venturi and applies the vacuum to the respective block. This suction at the block, is applied to perforations in the belt causing "draw-down" of the sensed object onto the belt, for transfer thereby. The blocks may also be used as air cushion modules, in a supporting mode. The belt drive synchronous motor is located in the conveyor mid-section, with belt position relative to workstations located alongside the belt being determined by the motor controller, for instance, a synchronous electric motor, for accurate stop/start operation of the conveyor (including reversal) in relation to the adjoining work stations. Direct drive of the transfer belt can be provided, using a toothed transfer belt. A number of such conveyors can operate side by side, driven by a shared splined drive shaft. The guide rolls of the system may be of plastic, having the support bearings set into the roll end or ends, for low cost replacement of the roll. The extruded beam on which the transfer blocks are carried contains four large bore service galleries from which high pressure and low pressure air are supplied to the system.

VACUUM BELT CONVEYOR SYSTEM

BACKGROUND OF THE INVENTION

This invention is directed to a belt conveyor system, and in particular to a conveyor system incorporating a vacuum belt for effecting the pneumatic transfer of articles.

Belt conveyors for transferring articles are widely used in industry, including incorporation as integral parts of production lines, for a wide range of products.

Such production lines frequently have work stations at spaced intervals, at which the conveyor is required to stop, to enable working upon the conveyed article. In such instances the precise monitoring of the displacement of the conveyor belt along its path and the lateral, horizontal positioning of the conveyed articles becomes very important.

Present systems, which monitor travel of the conveyor belt for such location purposes by encoding the revolutions of the driving motor, and which drive from an end roller, suffer from inaccuracy, due to belt slippage which generates discrepancies between rotation of the driving motor and the actual travel of the belt.

Inconsistencies in belt tension, with consequent variations in the rates of belt slippage, exacerbate this problem.

Certain types of article, for example lightweight articles having relatively large surface areas, such as plastic sheets, sheets of thin metal, cardboards, including cardboard blanks and blocks generally have smooth, low friction surfaces that make their transfer and handling most difficult. In some instances, such problems are accentuated, due to the relative fragility of the articles, or other factors such as a susceptibility to becoming marked on their surfaces, as a consequence of transfer to or passage along a conveyor, including encounter with hard stops and position sensing mechanical feelers.

The use of pneumatic transfer with conveyor systems is well known, and widely practiced, both in regard to belt conveyors and for agricultural purposes, such as the blowing of grain along pipes.

In the case of belt conveyors with pneumatic transfer many existing systems are characterized by their use of wide-area suction chambers, with associated unduly large air-mass displacement requirements, in the form of generated vacuum, or of compressed air. The response times of such systems is unduly slow, while the necessary air displacement is large, and excessive forces may be generated against system components, including the associated friction drag upon the belt.

In other systems, the large size of certain vacuum system components necessitates unduly large belt turning radii, with correspondingly large end pulleys and related space requirements.

It should be noted that the size of a conveyor system per se, both in height and width, can bear significant economic implications, with down-sizing being most desirable. This has particular bearing on the size and location of the necessary ancillary systems associated with the conveyor.

The driving systems for conveyors usually employ a chain or other transmission acting upon the end roller of the conveyor, usually at the oncoming end. Certain disadvantages associated with these earlier arrangements include unsatisfactory frictional tractive effort between the pulley and the belt, due to the limited (180 degree or less) wrap of the belt on the pulley, and shortage of space at the conveyor end, where the motor and reduction gear are located. Also, this type of system limits and complicates the belt tensioning

arrangements, as tractive transfer at the pulley is dependent upon the extent of belt wrap about the pulley, and upon belt tension.

Inadequate belt tensioning also results in excessive lost motion when the drive is reversed in order to reverse the conveyor. This exacerbates the problems encountered in achieving accurate registry of the conveyor with the associated workstations to which delivery is being made.

The handling of ferritic sheet-metal production lines has involved magnetic conveyors, which employ magnets to secure the sheet to the conveyor. There is a requirement to handle sheets of different thickness, and to permit precise manipulation of them for purposes such as the welding together of two adjoining sheets of different thickness, to form welded blanks for automotive stampings, for which operations the characteristics of magnetic attachment are not well suited.

Magnetic conveyors are also ineffective for handling aluminum or stainless steel sheet, plastic, glass, paper and cardboard, etc.

SUMMARY OF THE INVENTION

The present invention provides a modular pneumatic belt transfer system for conveyors, the conveyor system consisting of a plurality of individual vacuum blocks, over which a perforated conveyor belt runs.

This invention shares a number of common elements with my earlier sytem, as disclosed in my United States patent No. 6,481,565 (referred to below as "my patent"), as is evidenced in certain of the present illustrations.

In my improved system the vacuum blocks are moulded in high density polyethylene plastic, to provide a significantly improved low friction, light weight, low cost belt

support surface.

The aligned vacuum blocks occupy the top of a hollow beam that extends the length of the conveyor, the interior of which provides both high and low pressure air passageways and vacuum exhaust return passages to receive, contain and dispose of contaminants sucked from the material being transported

The subject modular system incorporates a vacuum block for operation with a belt conveyor, the system incorporating a non-wearing, air driven, reaction sensing means to determine the presence of an article upon the conveyor above the block; air-driven vacuum generation means; and a pneumatic control actuated by the sensing means to operate the vacuum generation means, to apply vacuum by way of the suction block, to that section only, through the perforated belt to the over-lying section of the conveyor, in response to the sensed presence of an object upon that section of the conveyor.

In my patent embodiment, air regulators are incorporated into the supply circuit of the reaction sensing means, to improve the accuracy and reliability of the system, and enhance the overall operation and efficiency of the system.

In another present embodiment, the use of a different beam section, having significantly larger auxiliary passages that form a portion of the beam section, which passages provide high pressure and low pressure air service for the transfer system, serves to enhance system air flow and capacity characteristics, to thereby obviate the use of the above-mentioned regulators.

The top profile of the vacuum blocks also is modified in one embodiment, for use with a positive drive, toothed transfer belt; and molded plastic blocks provide significant cost and performance benefits over the teflon-coated metal blocks, disclosed in my patent.

The vacuum generation means consists of a multi-stage air-driven venturi, having a high pressure air jet or jets discharging through convergent-divergent nozzles, serving as an air ejector, when energised by the triggering of an object-sensing jet, to thereby provide a source of high volume air flow, generating a correspondingly rapid rate of air exhaustion building to a high vacuum, which is applied to the vacuum block of the sensor-activated module.

In one embodiment, each module may have its respective vacuum generator. However, it will be understood that a larger capacity vacuum generator may be used to service a number of modules, the respective object-sensing sensors being used to switch the vacuum to the related module.

The object-sensing means consists of low pressure air jet means having an escape flow path immediately adjacent an edge of the conveyor belt, the partial blocking of which flow path by the presence of an overlying object causes a build-up in back-pressure in the air supply circuit of the sensor, sufficient to actuate an air servo-valve, thereby admitting supply air to the air displacement (vacuum generation) means. This action causes rapid displacement of air from the vacuum block, and applies suction to the block, which suction is transferred through the perforated belt to the overlying object, causing it to be drawn down to the belt, for transfer and delivery by the belt.

In the preferred system embodiment the subject vacuum blocks are each part of an individual module, each module being essentially self contained, with its own object-sensing means and associated air displacement unit. This gives huge savings in air consumption, as only the needed modules are turned on. This enables the provision of exceedingly compact system elements, the modular nature of which enable the provision

of conveyors of virtually any desired length.

The vacuum blocks are selectively located to provide a desired object-sensing and air displacement pattern in conjunction with the adjoining, superposed perforated conveyor belt.

In some embodiments the low pressure sensing jet is incorporated with the vacuum block. However it will be understood that this is not imperatively the case, as the sensor may be physically located independently of the vacuum block.

The vacuum blocks are of generally small size, in the case of my earlier apparatus disclosed in my patent being made of hardened, Teflon (T.M.) coated aluminum, and being further characterized by having a shallow top groove for passage of a conveyor belt therealong. The belt fits closely in the groove, the groove sides serving to guide the belt in its passage along the beam, and to complement the sealing of the belt to the block with substantially no increase in wear or drag upon the belt or the block.

My vacuum blocks are now of moulded high density polyethylene which results in cost savings and significantly reduced friction between the belt and the blocks, with a consequent reduction in the power required to drive the belt. Also, machining is less costly.

In the case of a present embodiment using a positive-drive belt incorporating teeth, akin to existing practice for automotive timing belts, having twin tooth sets located on the undersides of the outer edges of the belt, the vacuum blocks have a top surface with upstanding shoulders, the inner edges of which form an effective air seal, in cooperation with the adjacent edges of the belt.

Inboard of the vacuum block side shoulders, the top of the block is recessed to

accommodate the toothed drive portions of the belt, the surfaces of which do not contact the block.

The system low pressure sensing jets are located in a shoulder portion of the block, outboard of the belt toothed portions.

In most instances of use of the present system, the articles being conveyed overhang the sides of the narrow conveyor belt, so that the sensing jets are readily activated by the presence of the overhanging articles.

In the direct drive belt embodiment, the block vacuum passages are located centrally of the block mid-section. The belt mid-section which over-rides the block air passages includes laterally extending open channels in its upper face, to which channels vacuum is transferred from the block

The conveyor has a series of the subject vacuum blocks mounted in mutual, substantially end-to-end relation upon the hollow beam, which extends the length of the conveyor, with respective segment portions of the beam interior serving as air passages for the conveyor air system.

In operation, a respective suction block only comes into operation when the belt portion passing over that block is carrying something that obstructs the sensor so as to actuate the air servo, thus energizing the air transfer means, which in this case operate as vacuum generation means, thereby applying suction to the associated block.

The surface of the suction block of one embodiment has discrete, longitudinally extending air-way grooves positioned laterally directly below the longitudinal axes along which the vertical apertures of the belt are located. This directs the suction applied to the block directly to the belt apertures, and thus minimizes the suction force acting upon the

belt, per se; while also minimizing the interior air space, and the associated mass air displacement required to effect vacuum at the belt upper surface.

The block module thus provides an extremely rapid suction response to operation of the object-sensor, with correspondingly rapid operation of the air transfer means

Accordingly, it will be appreciated that the reaction forces generated between the belt and the vacuum block consist normally of only the load applied by the belt and its superimposed load; and that the addition of suction forces acting upon the belt occurs only when the sensor of a selected block is activated by the presence of a superimposed load object upon the belt, whereby the respective individual block system is energized, and suction is applied to the block, causing draw-down to the belt of the overlying object. Thus, the major reactive forces brought into play by operation of the block under vacuum, are between the belt upper surface and the overlying object. In this way, the gross frictional drag between the block and the belt is minimized.

In my patented system the novel belt drive arrangement includes an electric drive motor driving a reduction gear, the output of which is transferred by a toothed belt to the conveyor belt-driving friction pulley. In the present invention, a synchronous motor can be used, which imparts more accurate positioning control to the system, and can dispense with the need of a location encoder, as previously used.

A pair of guide pulleys on opposite sides of the drive pulley provide a deep, variable draw of the conveyor belt about the drive pulley, by controlling the extent of belt wrap about the drive pulley.

The variable guide pulley may have an adjustable loading spring, to promote consistent conveyor belt tension and drive-pulley contact pressure, and may include a pulley

position indicator.

The conveyor belt drive and tensioning unit, which operates on the return run of the conveyor belt, is preferably located intermediate the ends of the conveyor section, thus enabling the use of smaller conveyor end rolls, while locating the belt drive away from the conveyor loading area, into a less vulnerable and more accessible location.

In this arrangement, wherein the "usual" chain drive to one of the end rolls is not used, conveyor belt backlash is virtually eliminated, so that in the event of reversing the conveyor there is no lost motion, due to belt slack and/or gear back-lash.

This facilitates accurate "station-keeping" in relation to adjusting and maintaining the stopping and starting of the conveyor in step with the work stations, by the operation of the location encoder, which is driven off the conveyor belt end pulley, or simply by operation of a synchronous driving motor or other precision drive when such is installed. In the present invention the drive motor is preferably a synchronous machine, thereby enabling precise speed and rotation control, for belt station keeping.

In many instances the style of motor, its manufacturer, and the controller to be used is specified by the customer. As an example, in the case of ABB (Aktiegesellschaft Brown Boveri), that company would provide both motor and controller.

In a second embodiment of the present invention the transfer belt includes a pair of toothed (cogged) drive surfaces on the flanks of its inner face, akin to automotive timing belt structures, by which the conveyor is positively driven/reversed, through a toothed pulley.

The oncoming and off-going pulleys of the conveyor may be correspondingly toothed, so that the teeth of the belt do not impede the operation of the conveyor. The top surface of

the vacuum blocks may be profiled with a relieved passage on each side of a central vacuum zone, to accommodate the tooth portions of the belt, the blocks having raised outer shoulder portions forming an air seal with the outer edge portions of the positive-drive belt.

The conveyor has supporting foot brackets, and side brackets that are attached to the sides of, and support the conveyor beam, such that the conveyor is supported on the foot brackets, which are secured to the floor, or a supporting framework.

Alternatively, the side brackets may be suspended from an overhead framework .

The conveyor drive assembly may be integrated with the support system.

An integrated conveyor system may consist of a central motor driving a number of conveyors by way of a transversely extending splined shaft, thus providing a flexible arrangement for the lateral repositioning of the respective conveyors anywhere along the length of the shaft.

In such an arrangement, each conveyor drive can be connected to the splined shaft through a clutch, which allows respective conveyors to be disengaged from the drive shaft when not needed.

The modular vacuum blocks can also be utilized as blower blocks, wherein, upon the sensing of an object above the block, the servo-valve admits air to the block at a predetermined pressure above atmospheric, to serve as a supporting air cushion for the sensed object. One example of this aspect of the modular block might be a conveyor system having a pair of spaced outer belts running on "vacuum" for the transfer of objects such as large steel sheets, wherein the system includes a number of modular "pressure" blocks located intermediately of the two outer belts, being equipped with the air sensor,

and being supplied with air under pressure, in the presence of a sensed load, and serving as air-cushion blocks, over which the load rides.

The upper surface of these blocks would be substantially level with the top surface of the two outer belts, such that, upon the approach of a transported sheet, the outer suction blocks associated with the two conveyor belts would be actuated to apply suction to the overlying sheet, to hold it to the conveyor belts. Meanwhile, the intermediate blower blocks would serve as support slippers, over which the transported sheet would ride upon the individual air cushions of the respective blower blocks.

Owing to the individual sensing jets of both the suction and the blower block modules, air consumption is minimized, as air pressure is applied to each of the multi-stage vacuum-creating ejectors and to each blow block only when the presence of the transported sheet is sensed in the immediate vicinity of the respective block.

On passage of the transported sheet or other article beyond any one of the respective blocks, the respective high pressure or ejector air supply is terminated. Thus, highly efficient utilization of air is achieved.

As mentioned above, if a sheet requires to be transferred laterally, relative to the conveyor belt, at a selected work station, by admitting pressure air to the relevant block or blocks over which the sheet lies, such lateral transfer can be more readily effected.

BRIEF DESCRIPTION OF THE DRAWINGS

Certain embodiments of the invention are described by way of illustration, without limitation thereto other than as set forth in the accompanying claims, reference being made to the accompanying drawings, wherein:

Figure 1 is a side elevation of the static elements of a belt conveyor in accordance with the present invention, the belt run path being represented by a chain-dotted line;

Figure 2 is a perspective view of a subject first conveyor block module, and a portion of a perforated conveyor belt adjacent thereto, for a first embodiment of the present invention;

Figure 3 is a plan view of the conveyor block module of the Figure 2 embodiment;

Figure 4 is a transverse section of the block module, taken at 4-4 of Figure 3;

Figure 4A is a section view similar to Figure 4 (to a different scale), showing a toothed belt embodiment in mounted relation upon a related block module;

Figure 5 is a perspective view of a first embodiment conveyor belt drive assembly;

Figure 5A is an end section of a toothed belt embodiment upon a cogged end pulley;

Figure 6 is a side view of a conveyor support pedestal and belt drive assembly of the Figure 5 embodiment;

Figure 6A is a side view of the conveyor belt drive assembly of a second, toothed belt embodiment;

Figure 6B is a detail of Figure 6A;

Figure 6C is a side view of the rear support pedestal and the primary belt tensioner;

Figure 7 is an end section of a first embodiment beam portion of a conveyor;

Figure 7A is an end section of a second embodiment beam portion of a conveyor;

Figure 8 is a schematic side, elevational view of a portion of a conveyor, with the associated air transfer equipment of the module.

Figure 8A is a view similar to Figure 8, of an embodiment having the beam section of

Figure 7A, and a modified sensor air supply, without a regulator valve;

Figure 9 is a plan view of a portion of a toothed conveyor belt embodiment;

Figure 10 is a perspective view of a portion of a toothed conveyor belt embodiment; and,

Figure 11 is a perspective view of the Figure 10 embodiment in an inverted condition.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figure 1, the conveyor, 10 has an extended beam 12 of extruded aluminum section, a first embodiment being typically an 80 x 80 m.m section (see Figures 7 & 8) that runs the length of the conveyor 10. A second embodiment of a beam section is shown in Figure 7A (to a smaller scale).

An on-going end roll 14 and an off-going end roll 14' are mounted at the ends of the beam 12, about which rolls 14, 14' an endless perforated conveyor belt 16 is trained (see Figures 5 and 6).

A location encoder 15 is driven by one of the end rolls, illustrated for the ongoing roll. A series of vacuum blocks 20 extend the length of the conveyor 10, being mounted upon the beam 12.

A belt drive 22 is located beneath the beam 12, in supporting relation therewith, being positioned in the mid-section of the conveyor 10, in spaced relation from the end rolls. The belt 16 is entrained with the belt drive 22.

The other end of the conveyor 12 is supported (see Figures 1 and 6C) by a primary belt tension adjuster 24', which has a single side bracket 25 supporting the conveyor 12, securing it by a foot bracket 27 attached to the floor or frameworks.

The roll 29 of adjuster 24' is rotatably mounted in cantilevered relation from a pivotal arm 33, carried on the side bracket 25, leaving the roll 29 fully accessible at its free end, to

facilitate removal and replacement of the belt 16. The intermediate (bottom roller) is similarly cantilevered, being rotatably mounted coaxially with the pivot axis of arm 33. An adjustable turn-buckle 31, acting upon the pivotal arm 33, serves to provide primary tension to the belt 16, by way of adjusting the length of the turn-buckle 31, so as to reposition the roll 29.

Referring to Figures 2, 3, and 4, the vacuum block 20 is of shallow construction, having a pair of shoulders 23, 23' that border a wide, shallow passage 24 extending the length of the block 20, along which the belt 16 passes.

A series of shallow grooves 26 (illustrated as being two in number) extend almost the full length of the block 20, the ends of which grooves terminate adjacent the ends of the block 20.

The grooves 26 are laterally spaced within the passage 24 in precise coincidence with the apertures 26' of the belt 16, on passage of the belt 16, moving longitudinally thereover.

The belt 16 serves to seal-off the grooves 26, such that the transfer of air (or vacuum) is directly between the grooves 26 and the apertures 26', while the belt serves to seal off both lateral and longitudinal air leakage.

In the case of the Figure 4A toothed (cogged) belt embodiment, the vacuum blocks 20' have two axial recesses flanking a central land. The recesses accommodate the downwardly depending toothed portions of the belt, being laterally bounded by shoulder portions of the block that the belt edges are closely adjacent to, thus sealing the system against undue air leakage.

A low-pressure sensing jet 30 is located adjacent one edge of the vacuum block 20'. The blocks 20, 20' have a through hole 28 at each end, for securing T-bolt screws 30'

that engage the top surface of beam 12 (see Figure 7A).

Reverting to Figures 2 and 3, a vertical jet aperture 30, located on the active side of the transfer block 20, extends through the thickness of the block 20, for the passage of a low-pressure, article-sensing air jet, directed upwardly along the active edge of the belt 16.

A transverse air passage 32 at the mid point of the block 20 connects by way of apertures 34 with the grooves 26 for the transfer of air therethrough, in either direction, depending on the role served by the block 20, for the application of vacuum or positive air pressure. Turning to Figure 5, the belt drive 22 has a pair of bracket plates 40 for attachment to the sides of the beam 12, by which the beam 12 is supported, and mounted upon base flange 41.

A synchronous electric motor 42, or other selected prime mover, driving through reduction gearbox 44, drives the belt drive pulley 46, 46' by way of a toothed belt 48.

A conveyor belt guide pulley 50 is located at the oncoming side of the belt drive pulley 46, 46', with an adjustable, spring loaded pulley 47 (see Figures 6 and 6A) at the offgoing side of pulley 46, 46', providing a deep draw to the belt 16, 16', about the driving pulley 46, 46'. A compression spring 49 loads the guide pulley 47 towards the drive pulley 46, to control the contact pressure of the respective belts 16, 16' against the respective drive pulley 46, 46'.

The vertical locator of the pulley 47 is spring loaded such that the tension of the belt 16, 16' is accommodated, together with the extent of the wrap of belt 16, 16' about the respective pulley 46, 46'.

Figure 5A shows a direct drive, toothed belt 16' in relation to an ongoing (or off-going) roller 14, having a toothed (splined, or cogged) profile to accept the tooth portions 25

located on the outboard portions of the belt 16'.

All idler rollers, including the end rollers 14, 14', 14'' are of plastic, and have bearings 35 in pressed relation therein, providing for low cost, rapid roller replacement.

. In the case of the Figure 6 embodiment, the pressure of the belt 16 against the rubber covered roll 46 can be accurately controlled.

Figure 6C shows in greater detail the turn-buckle 31 of the belt primary tension adjuster 24'. The pivot arm 33 is concentrically mounted with the axis of rotation of the lower guide roll

Referring to Figure 8, a portion of conveyor belt 16 is shown passing over a series of vacuum blocks 20, the blocks 20 being mounted upon a support beam 12. The beam 12 may be of extruded aluminum, having a cross-section as shown in Figure 7, with a large, centrally located main chamber 71 and bordering small bore service galleries 73.

The square profile has two recesses 75 along each face, for the insertion of T-bolts 77, for attachment purposes, one of which is shown partially inserted, prior to its rotation to engage the bolt head with the adjacent recess shoulders. An alternative mode of making such attachment is the use of threaded nut plates 77' (shown in Figure 7A)

One or more service galleries 73 may receive and supply service air, as by way of inlet 62, at about 80 psi. Another service gallery may supply air at 10 psi for sensor operation, another being placed under vacuum, to provide vacuum service, while the main chamber 71 is used as an atmospheric vent in the subject application.

Two of the galleries 73 are shown having drilled and tapped (threaded) access for connector nipples 62', one being shown, by means of which connection is made to the respective galleries. Two-piece threaded couplers with elastomeric sealing washers are

preferably used, enabling rapid connection and disconnection by hand. One such coupler is shown in Figure 8A, providing connection of ejector 80 with connector 85.

Air at supply pressure is applied to a pressure regulator 64 by way of connector 66, from gallery 73, and supplied to a back-pressure sensing valve 68, by way of connector 70.

A pressure regulator 64, used with the Figure 7 embodiment, has outlet 72, supplying air at reduced pressure to a connector 74, which connects to the inlet 76 of transfer block 20, to supply the vertical jet aperture 30' (Figure 2) with low pressure air at 10 psi as an object sensing jet.

The Figure 7A embodiment does not require the use of a pressure regulator, owing to the evident greater capacity of the large bore high and low pressure air and the vacuum galleries, which serves to stabilize the low pressure air and vacuum supply, respectively.

This Figure 7A embodiment has a single recess 75 along each face, to contain nut-bars 77', which are threaded to receive bolts or studs in attached relation therewith.

Reverting to Figure 8, the outlet 72 also connects with the back-pressure sensing valve 68, supplying low pressure air to it. Operation of the valve 68, by creation of back-pressure at the nozzle 30', serves to admit supply air at high pressure by way of supply outlet 78 to the multi-stage vacuum-creating ejector 80,. Operation of the ejector 80 applies high vacuum by way of outlet 82 to the air passage 32 of the related transfer block 20 (see Figures 2 and 3). This vacuum is transferred to the upper surface of the belt 16 (see above), to act upon any body that may be present there.

The exhaust air from the ejector 80 together with air drawn through the belt 16 and the block 20 passes by way of connector 85 to the main chamber 71 of the beam 12.

The chamber 71 of the beam 12 has an atmospheric exhaust drain 88, set low in the chamber, to vent air, together with any carry-over of liquid contaminants drawn down through the system, such as surface oils from off the underface of steel sheet being transferred by the system.

When the system is operating, with the the belt 12 being driven by the motor, low pressure air is supplied to the object sensing jet aperture 30'. An approaching object, supported on the belt 12, and approaching the subject block 20 intercepts the low pressure jet from the sensor aperture 30' of that block 20, generating back pressure that is sensed by and operates upon the valve 68. This same action takes place when a sheet is placed upon the conveyor.

Operation of the valve 68 admits air to the ejector 80 by way of the connector 78.

Operation of the ejector 80 applies suction to the vacuum outlet 82, and thence to the air passage 32 of the block 20. The vacuum is transferred through the belt apertures 16' to the upper surface of the belt 16, to those portions of the belt as it passes over the subject transfer block 20.

When the low pressure sensing jet is no longer affected, due to passage therepast of that portion of the belt 16 carrying the previously sensed object, the back-pressure in the valve 68 drops, thus interrupting the supply of high pressure air to the ejector 80, which ceases operation, thus ending the vacuum regime for that block 20. Activity would normally then transfer to the adjoining block 20, in the path of the belt 16, with a repeat of the sensing and vacuum-generation activity of the respective associated system.

Turning to the Figure 7A beam embodiment, a larger section is employed, having a large, centrally located main chamber 71' and large bore bordering service galleries 73'.

The square beam profile has a recess along each face, for the insertion of T-bolts 77 or nut-bars 77' for attachment purposes, as referred to, above

One or more service galleries 73' may receive and supply service air and/or vacuum, as in the case of the Figures 7 and 7A embodiments, while the main chamber 71' is used as an atmospheric vent in the subject alternative application.

I have found that the Figure 7A beam extrusion embodiment constitutes a stiffer structure, while its large bore corner galleries provide greater reserve volume in relation to both high and low pressure air, such that in the Figure 8A embodiment, which incorporates the Figure 7A beam section, no low pressure regulators of the type present in the first embodiment sensor circuit are required.

In the case of the Figure 8A embodiment, having the larger section service galleries 73' referred to above with regard to Figure 7A, and the regulator 64 being dispensed with, air (at low pressure – about 10 psi) is supplied from one of the four service galleries 73' by way of connector 66 to the back pressure sensing valve 68.

Outlet 66 is connected to a low pressure air supply gallery 73', to provide sensor air to the low pressure side of the pressure sensing valve 68, and to the nozzle 30' of the associated vacuum block.

Operation of the improved system is similar to that of the system shown in Figure 8. Referring to Figures 9, 10 and 11, it will be seen that the belt 16 has a row of through apertures located on its main axis, which apertures extend through the thickness of the belt, each emerging at a shallow transverse suction slot in the upper face of the belt (see also Figure 4A).

Figure 11 shows the underface of the belt, with its two rows of cog-like teeth projecting

from the inner face of the belt, having the through apertures located centrally therebetween.

CLAIMS

1. A conveyor system having an endless belt travelling in a loop having an upper, working belt portion, and a lower, return belt portion; guide rolls adjacent the ends of said working and return belt portions; belt driving means located between said guide rolls having a toothed driving roll located within said loop receiving said belt in driving relation therewith, an oncoming guidance roll, an offgoing guidance roll, and guidance roll positioning means for positioning at least one said guidance roll in selective positioned relation with said belt and said driving roll, to substantially control the wrap and load transfer between said belt and said driving roll, wherein said driving roll includes at least one annulus of gear teeth in engaged driving relation with said belt, said belt having projecting tooth portions on the belt inner face in engaging relation with said gear teeth of said driving roll
2. The conveyor system as set forth in Claim 1, said upper working belt portion being located adjacent at least one work station, for transfer of articles therebetween; said belt driving means including motor means in driving relation with said rotatable toothed drive means; and motor control means for precisely rotating said motor to drive said belt in predetermined precise stopping relation with said work station, to enable accurate transfer of a said article.
3. The conveyor system as set forth in Claim 1, said belt passing in guided relation over an end roll; said roll having a plastic body of substantially cylindrical form, with bearing means at each end of said roll, pressed within the roll end.

4. The conveyor system as set forth in Claim 1, wherein said belt driving means includes a synchronous electric motor, to enable precise direct control of the location of said belt, relative to work stations located beside said belt.

5. The conveyor system as set forth in Claim 1, said belt passing over vacuum blocks, said blocks being of high density plastic, and having a plurality of air passages in predetermined, patterned relation at a surface of the block; and a pair of raised shoulder portions in mutually spaced relation, flanking said patterned air passages.

6. The conveyor system as set forth in Claim 1, said belt having a mid-section with through perforations, said projecting tooth portions on said belt inner face being located outboard of said belt mid section.

FIG 1

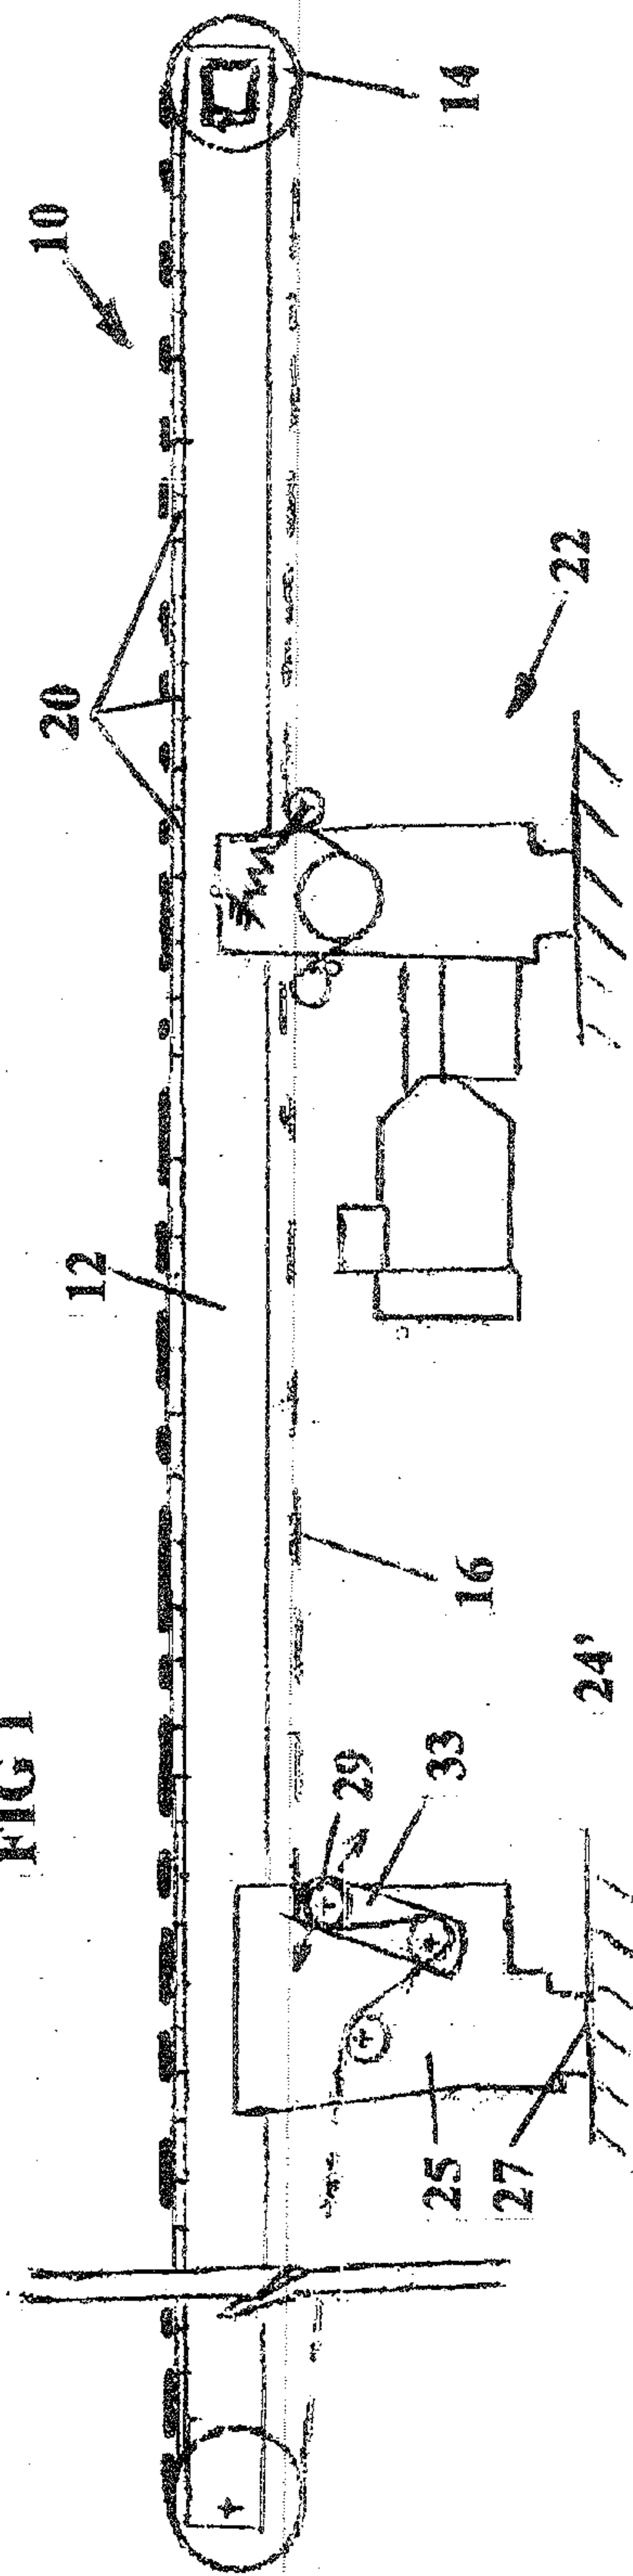


FIG 2

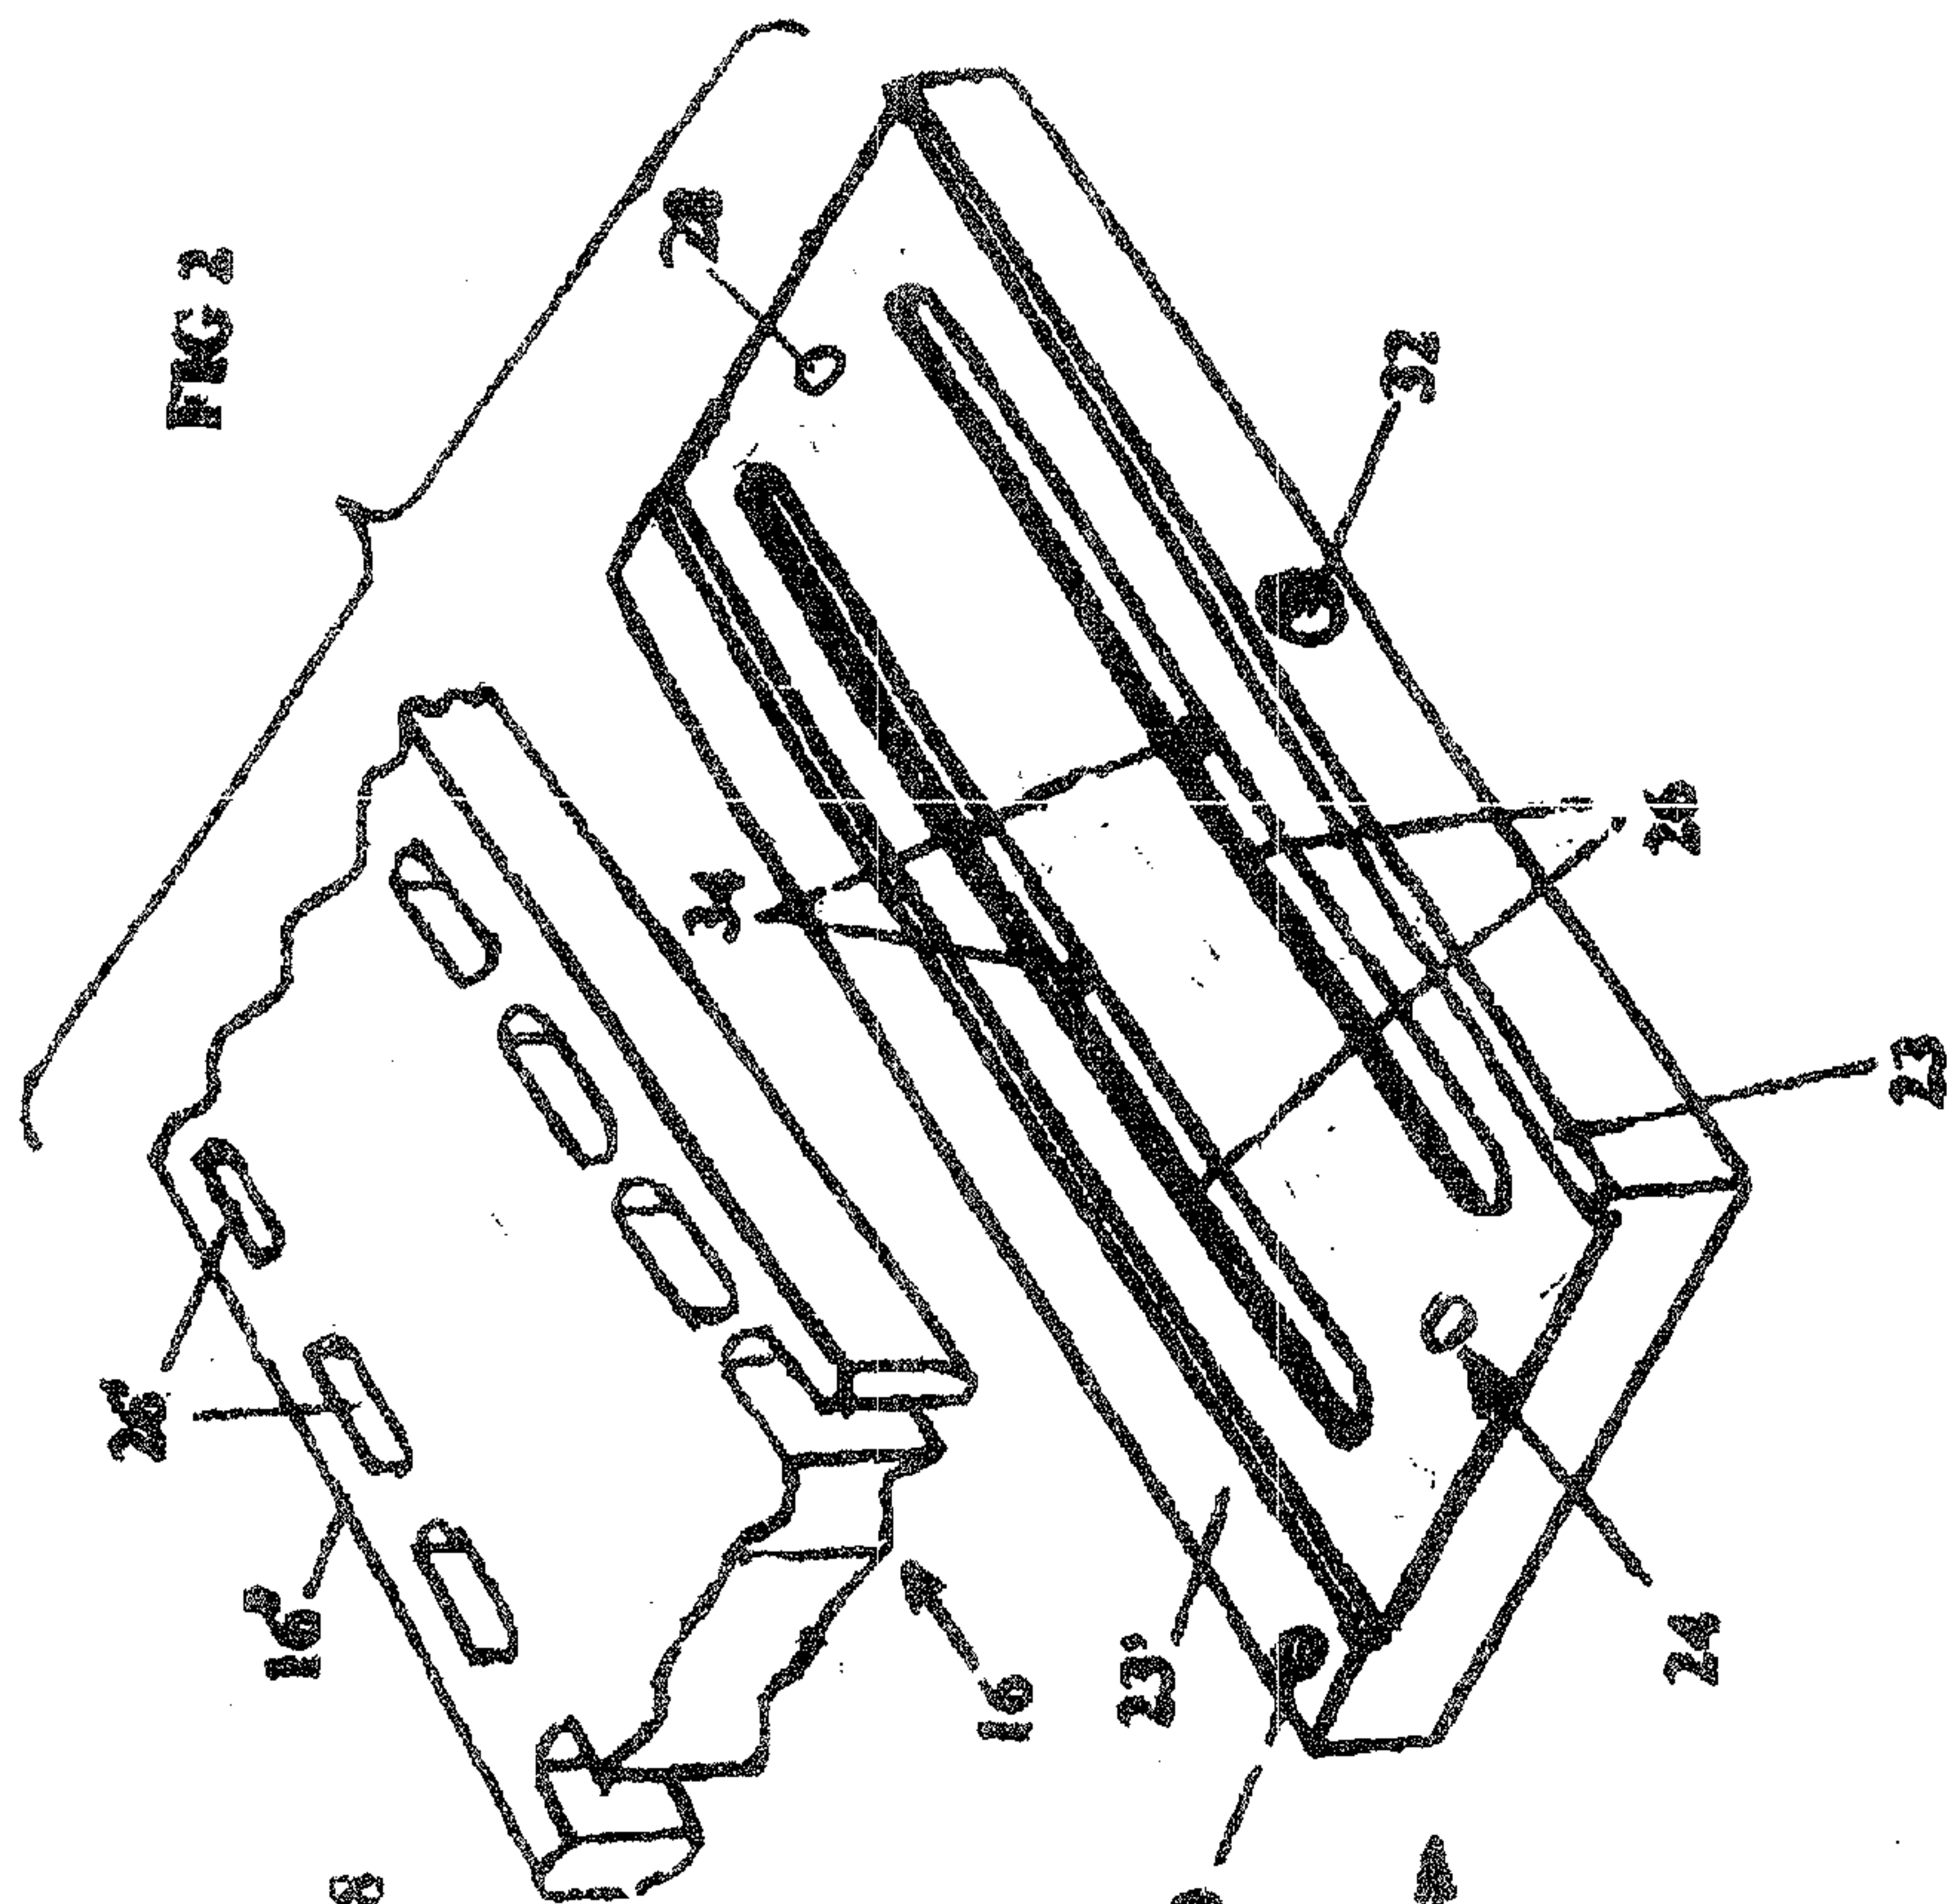


FIG 3

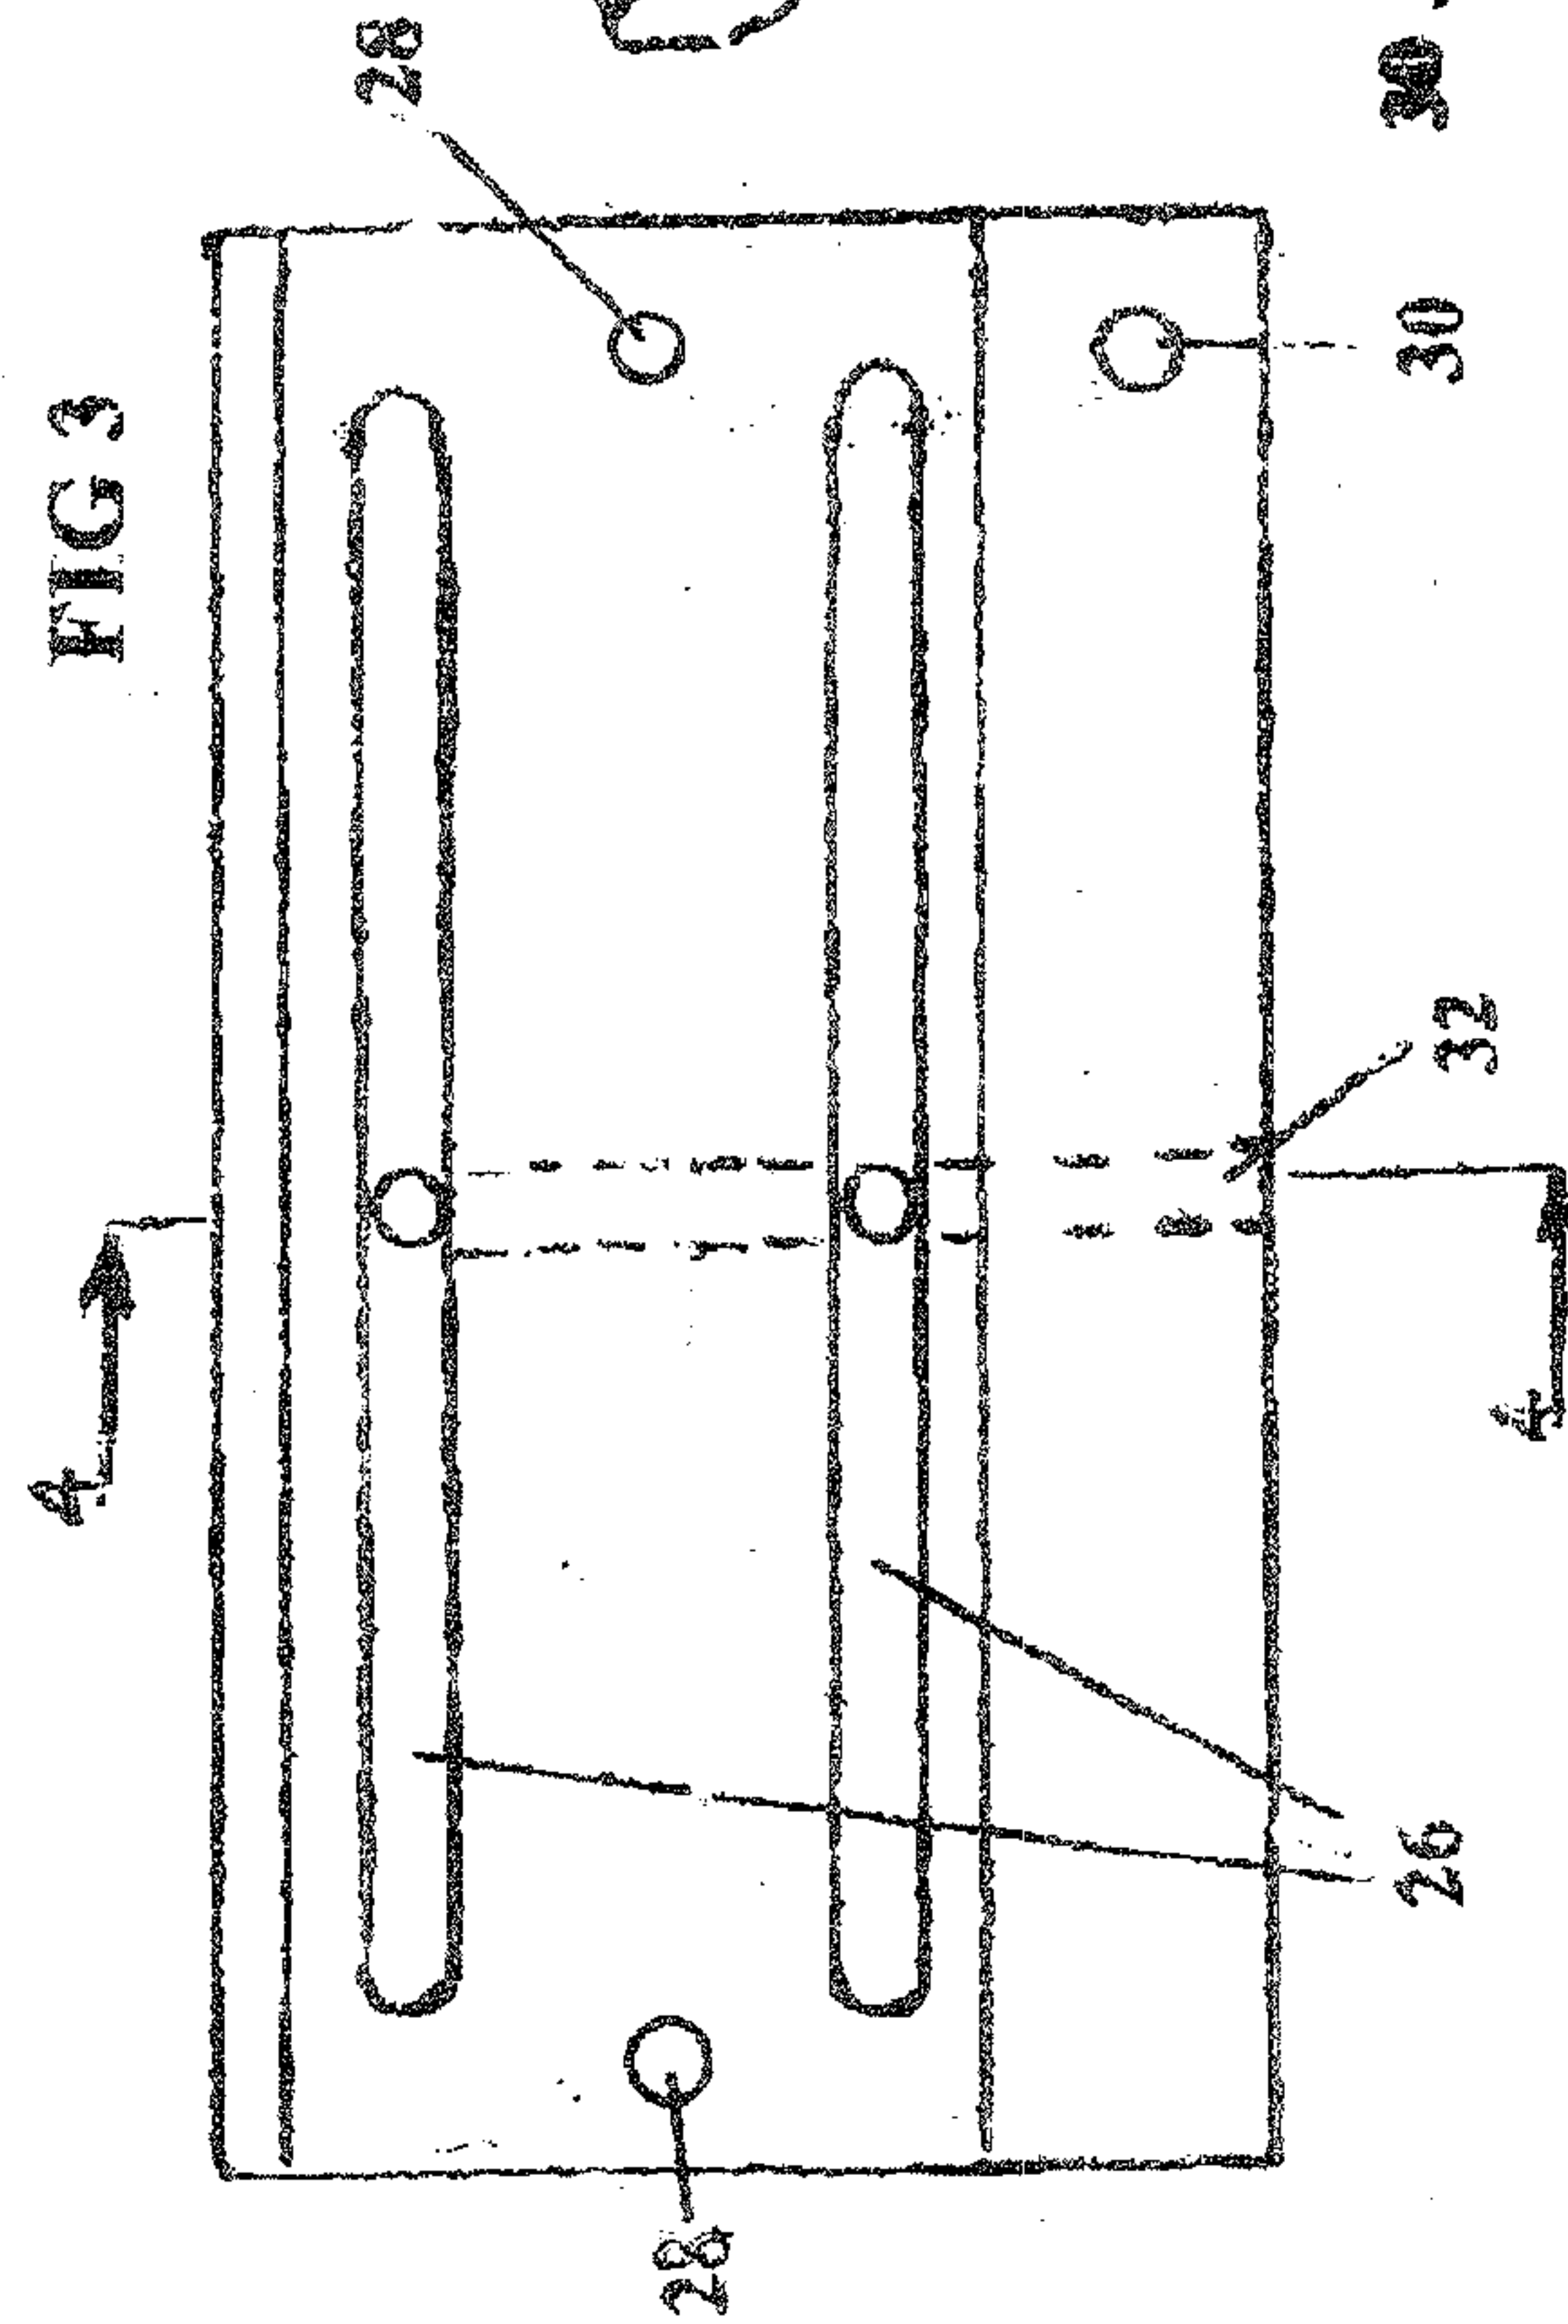
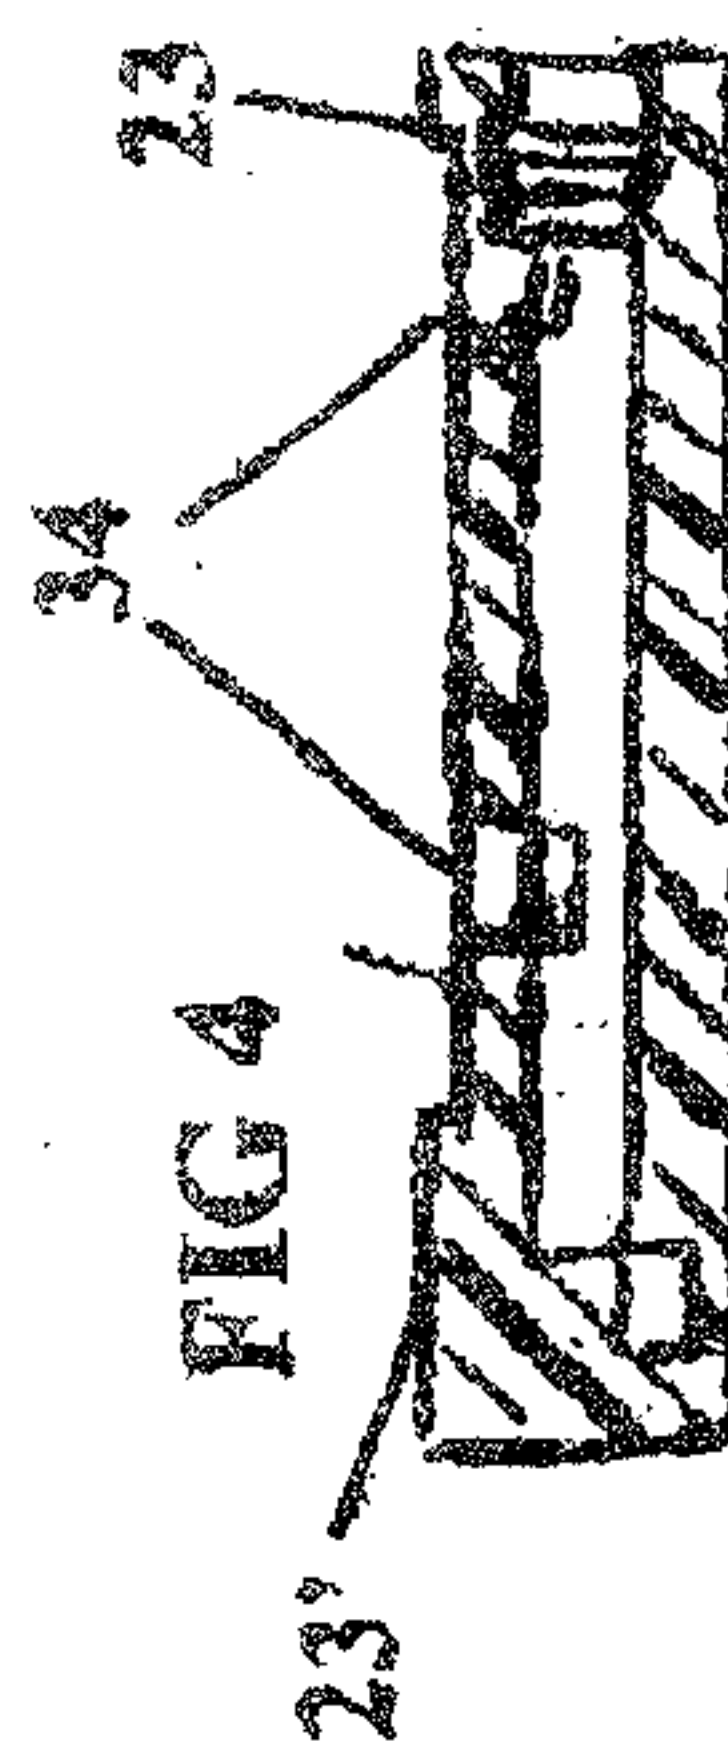


FIG 4



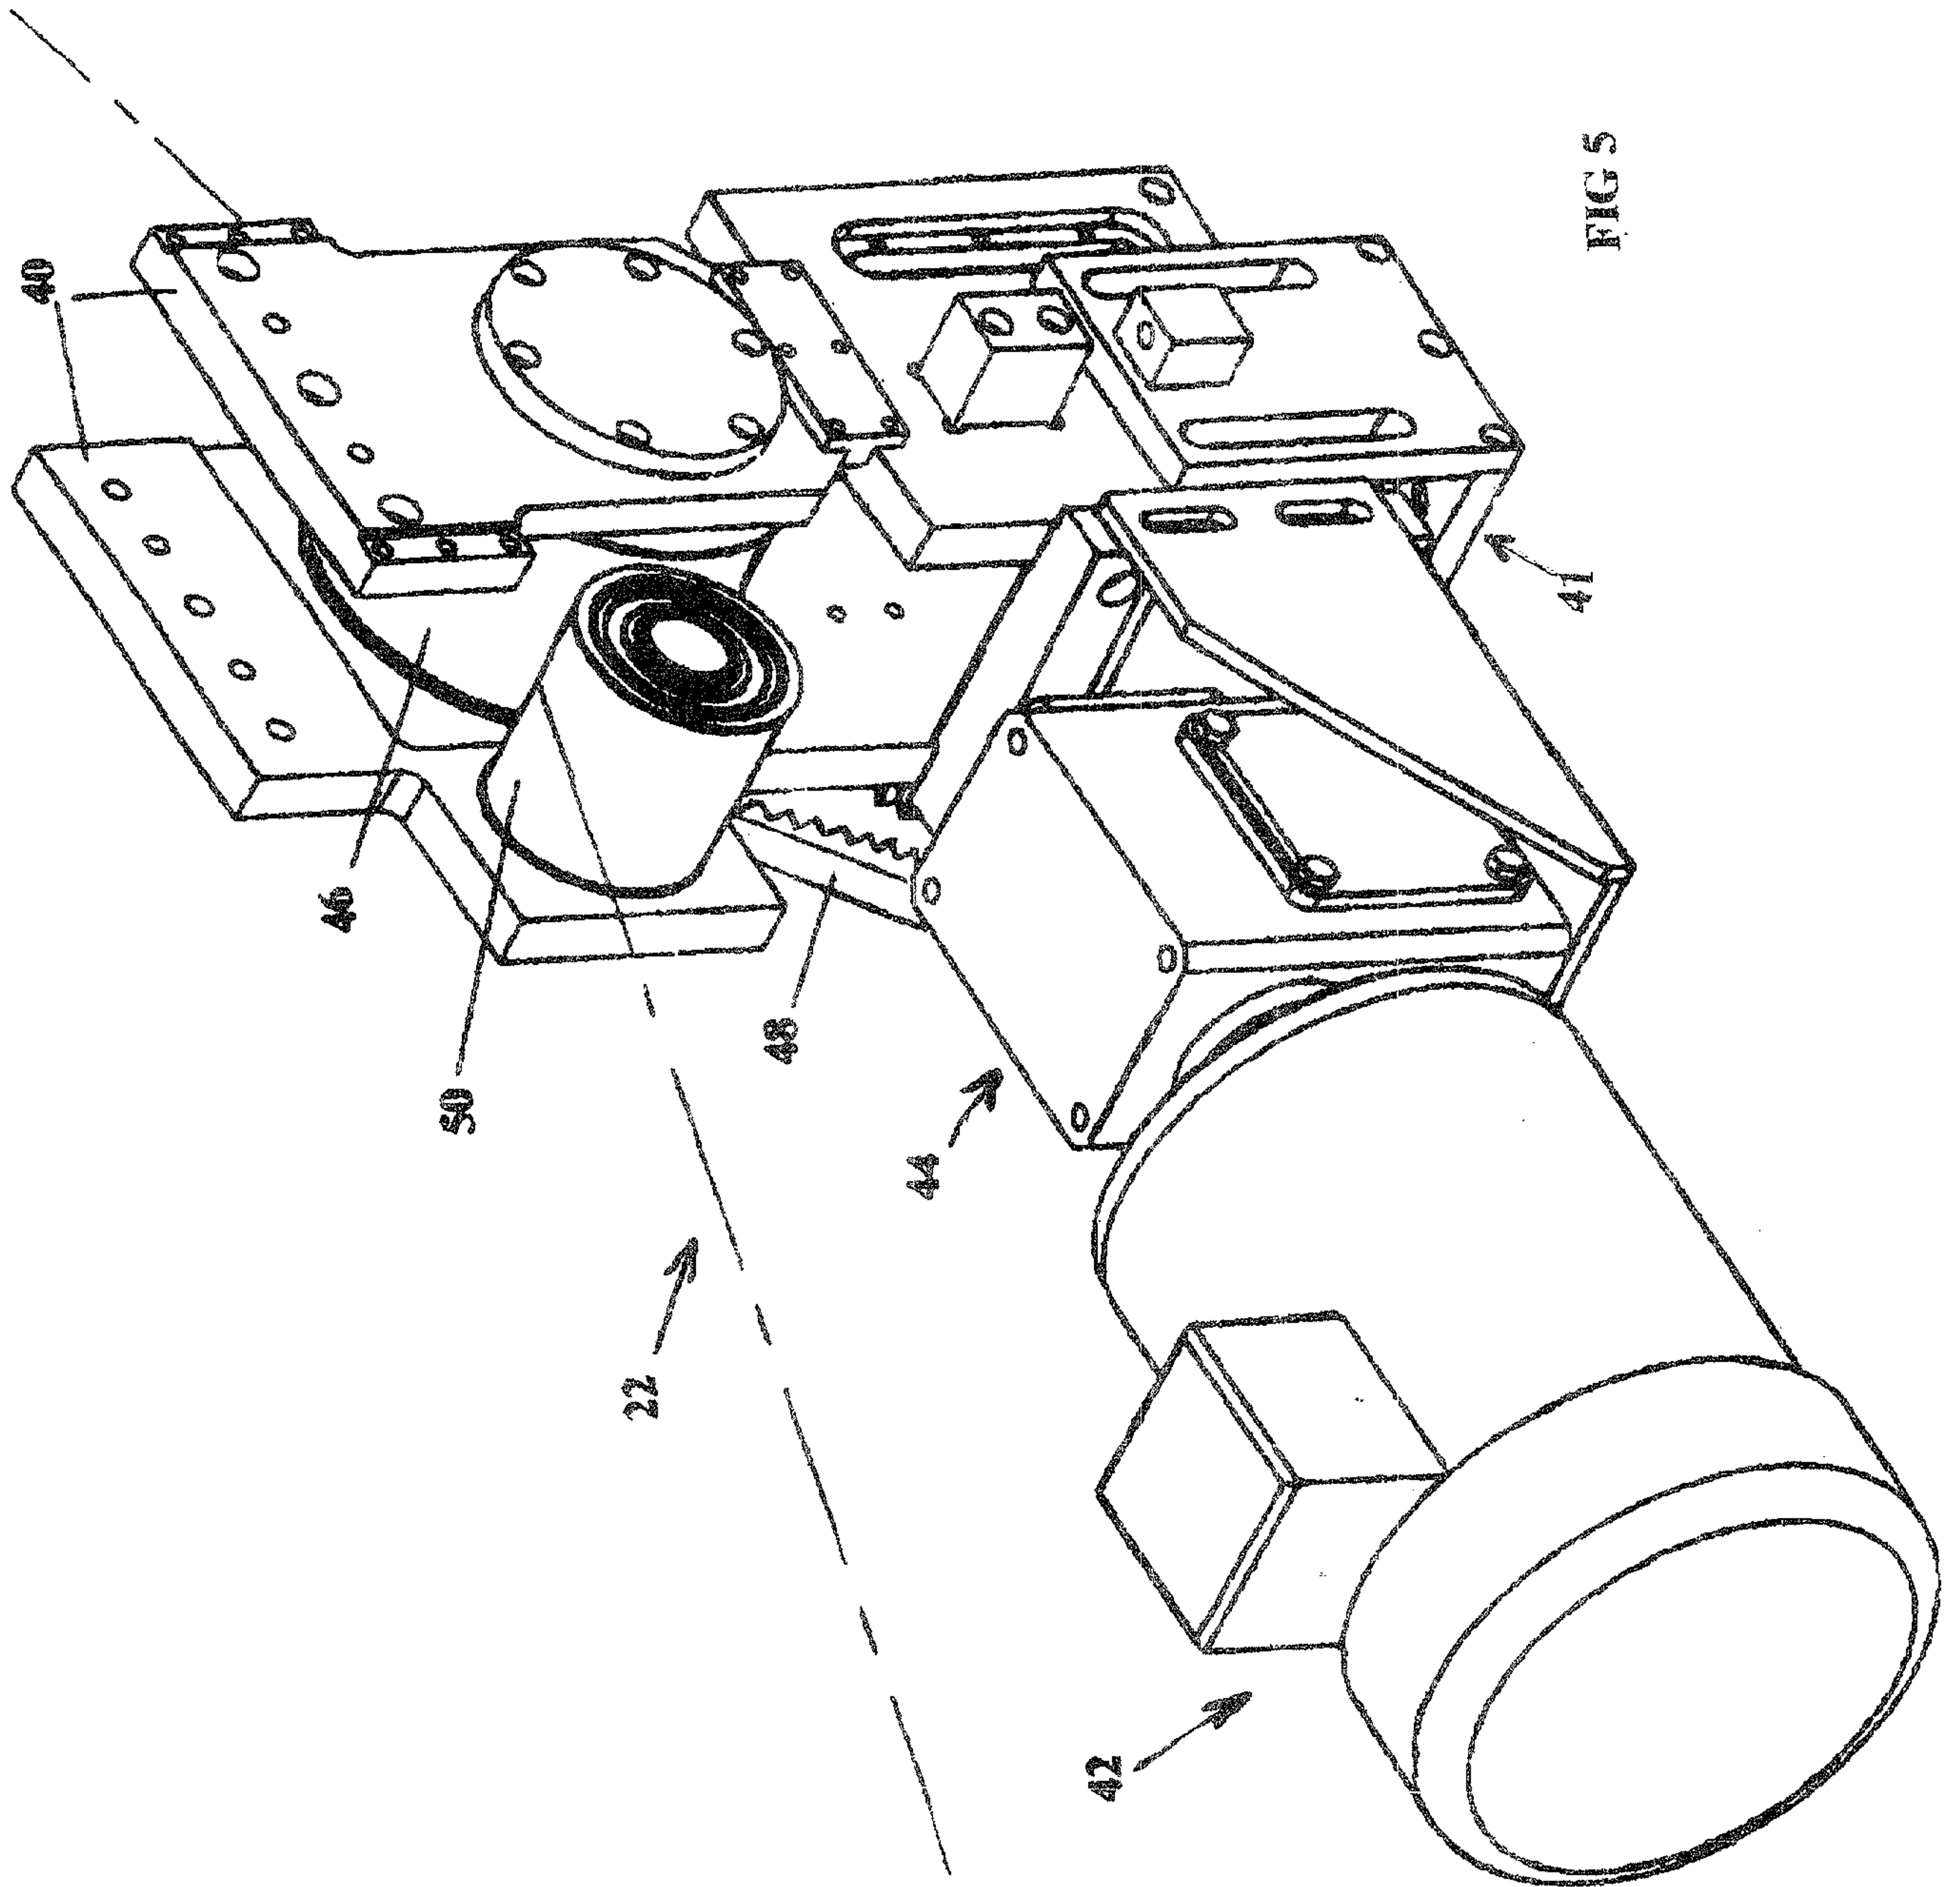


FIG 5

FIG 5A

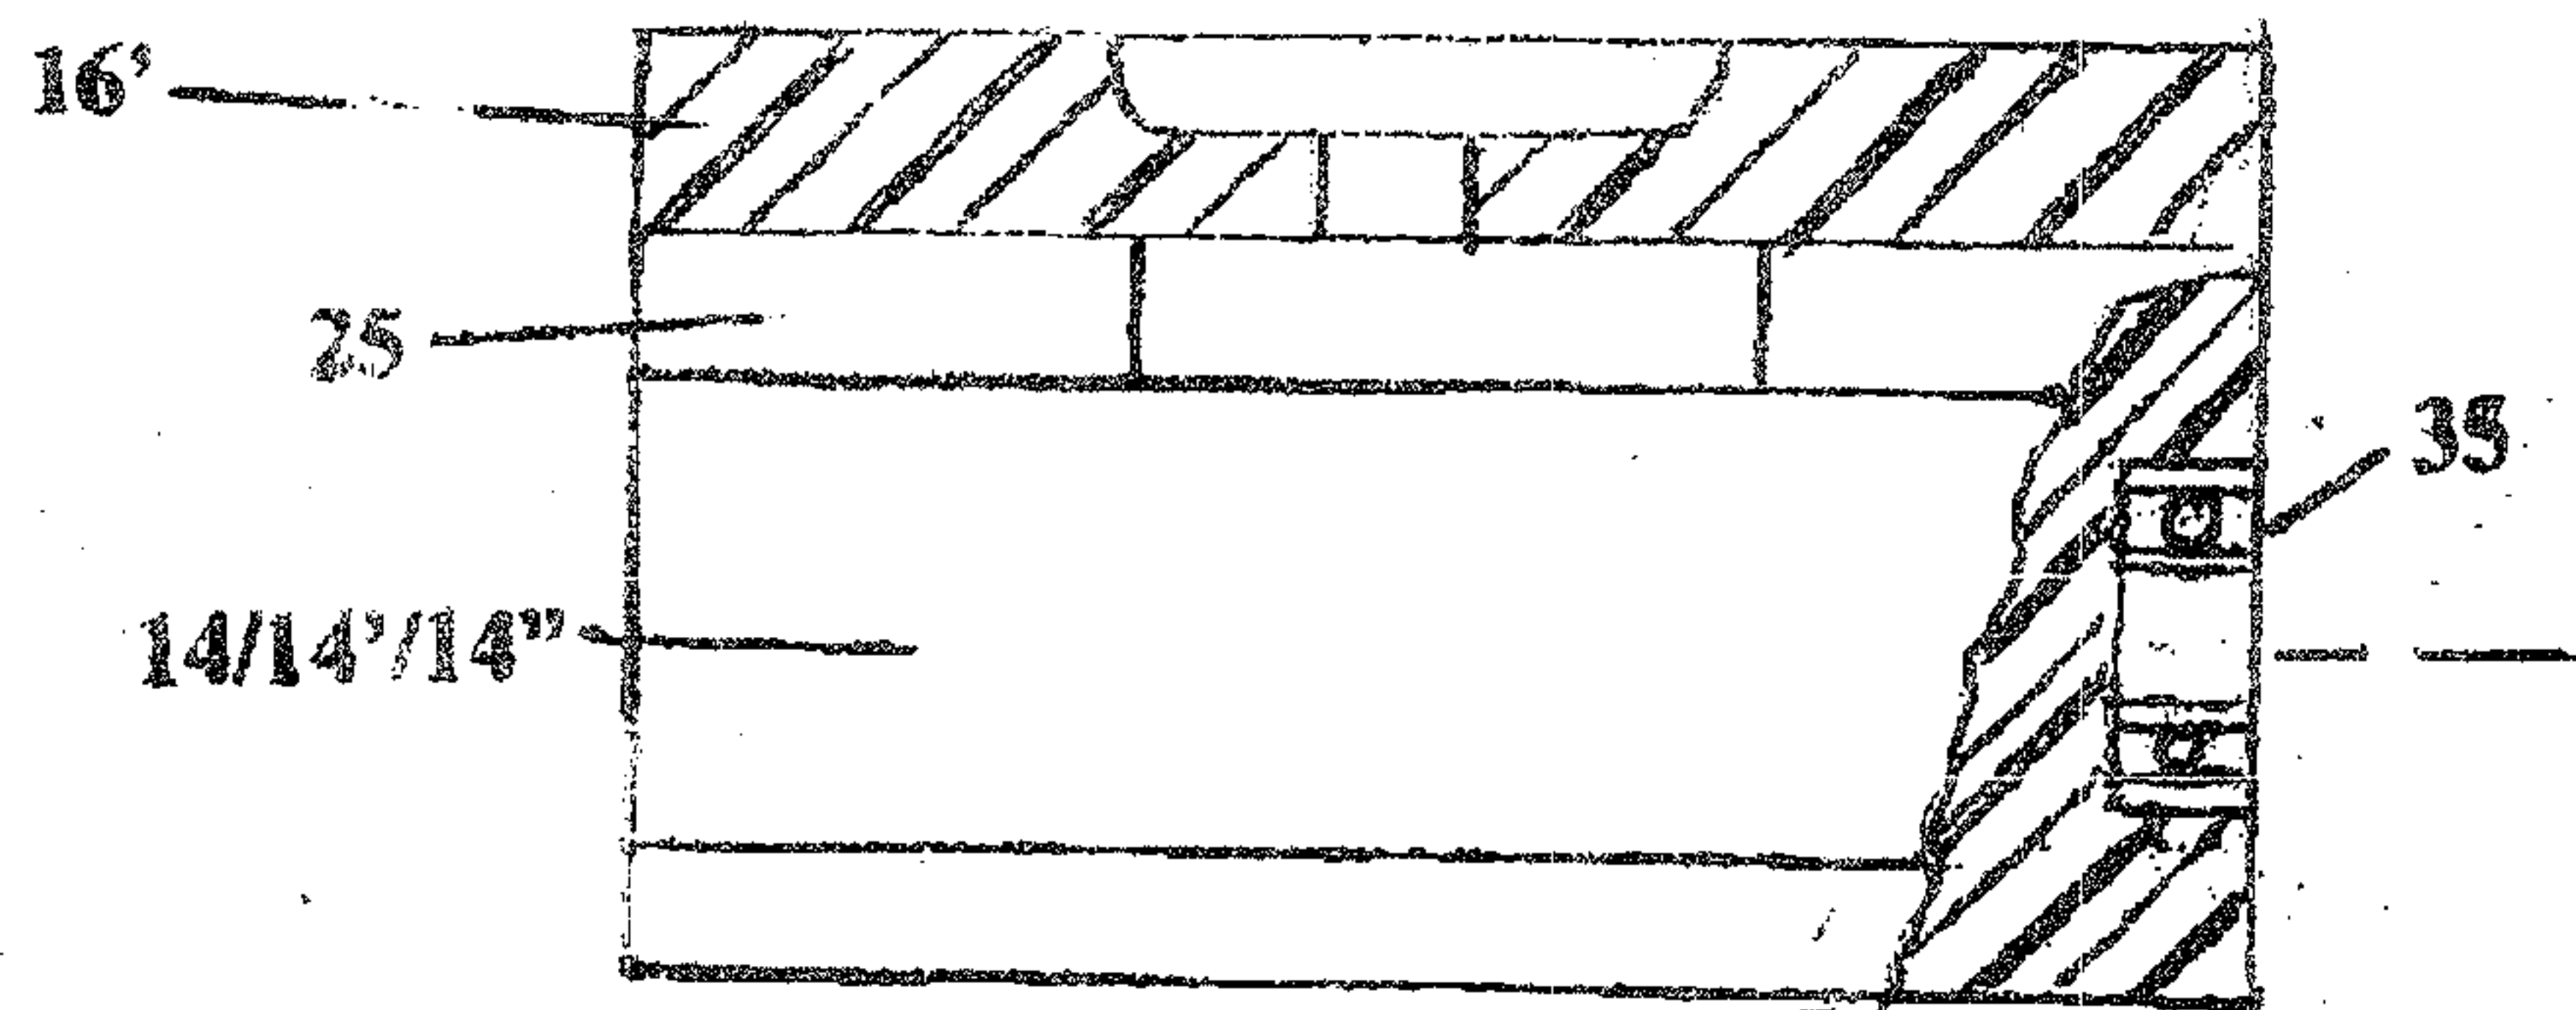


FIG 4A

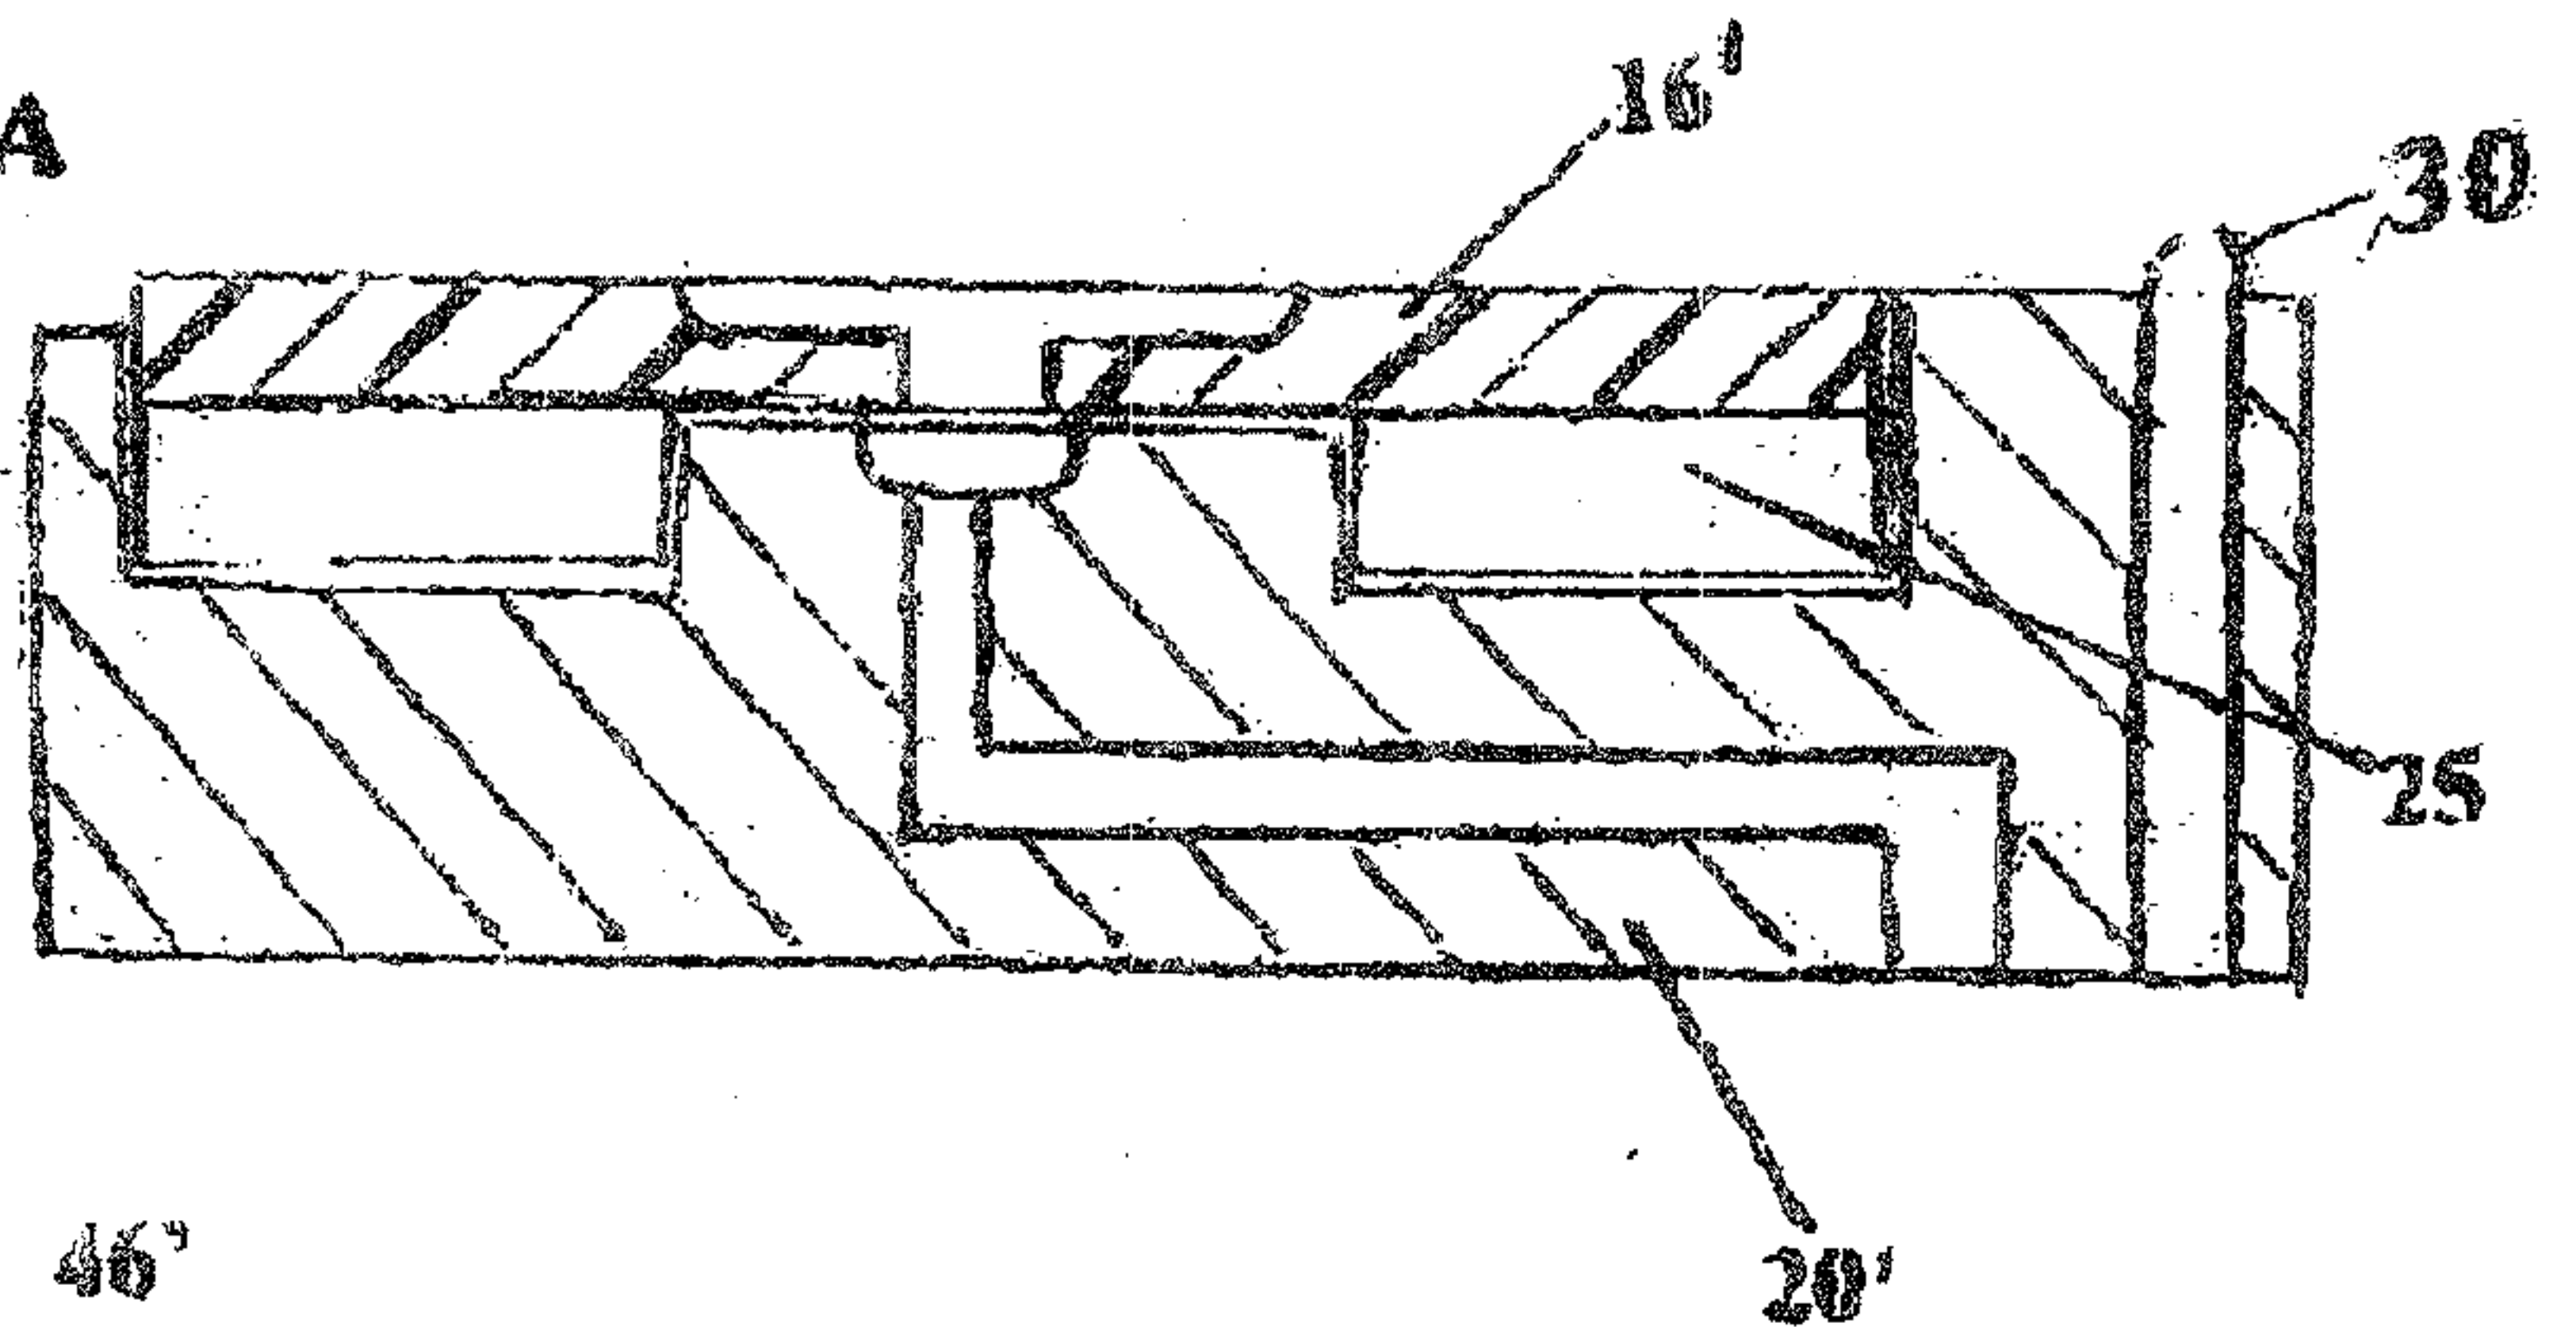


FIG 6B

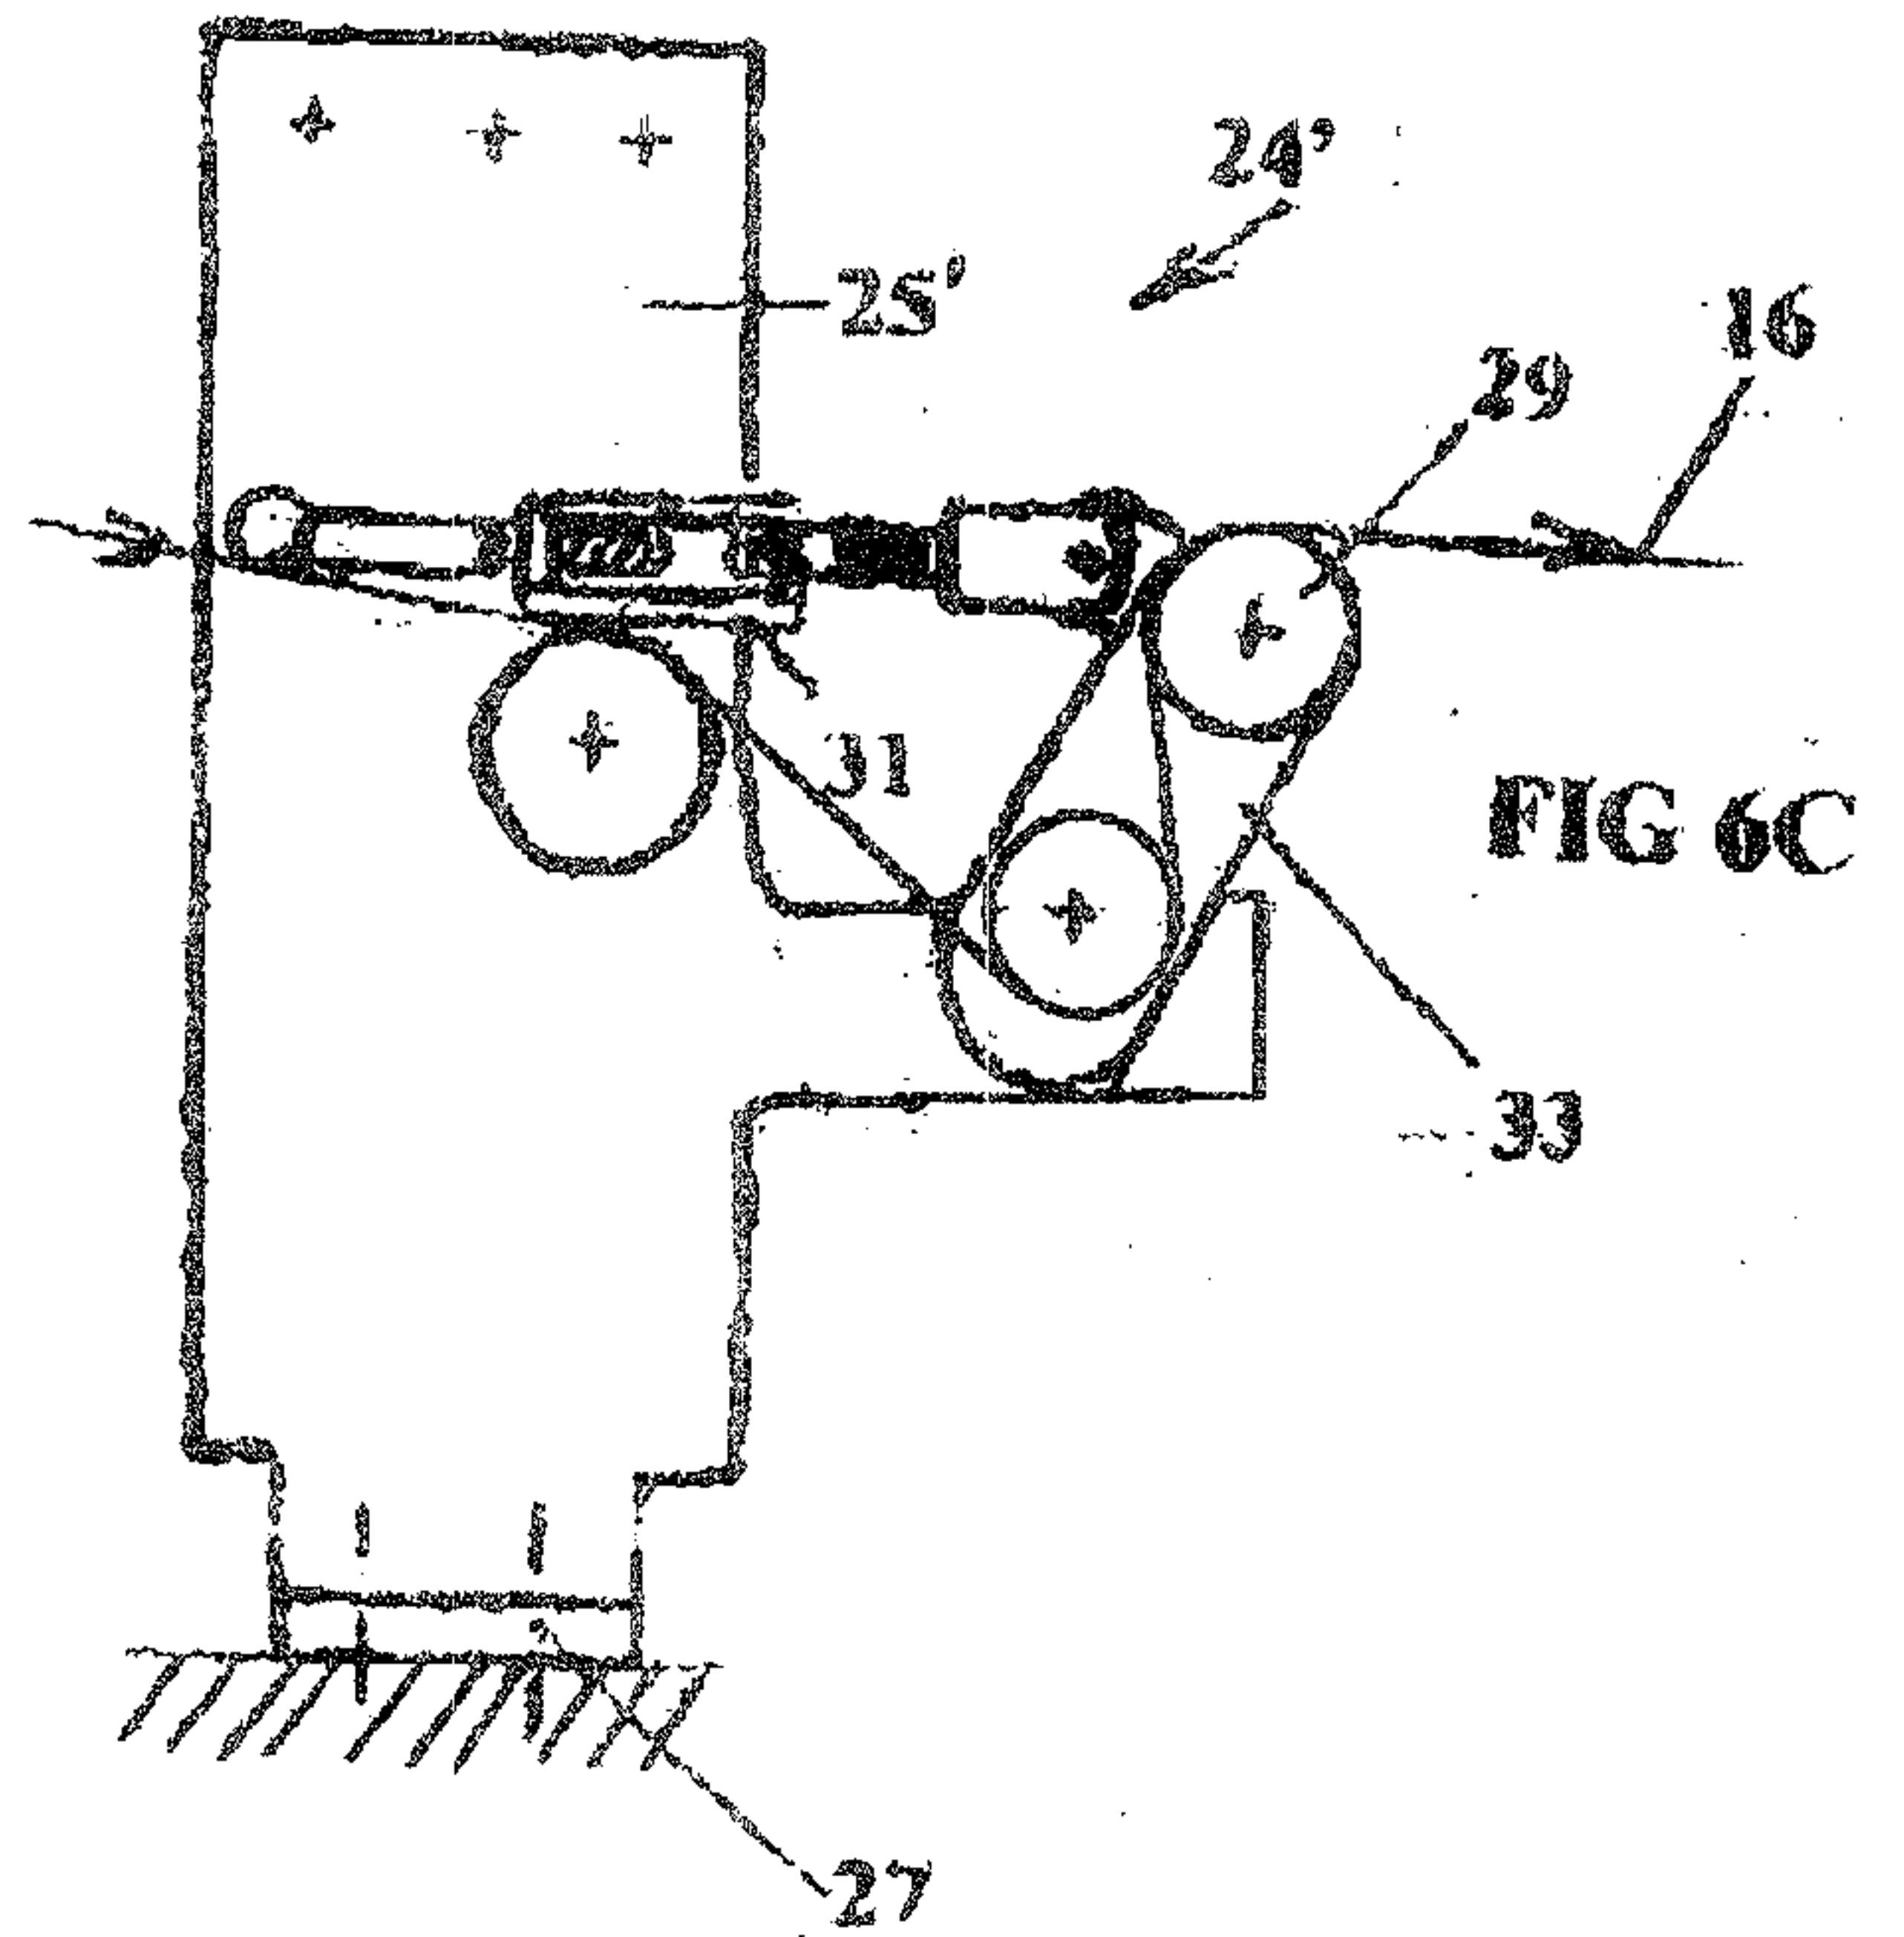
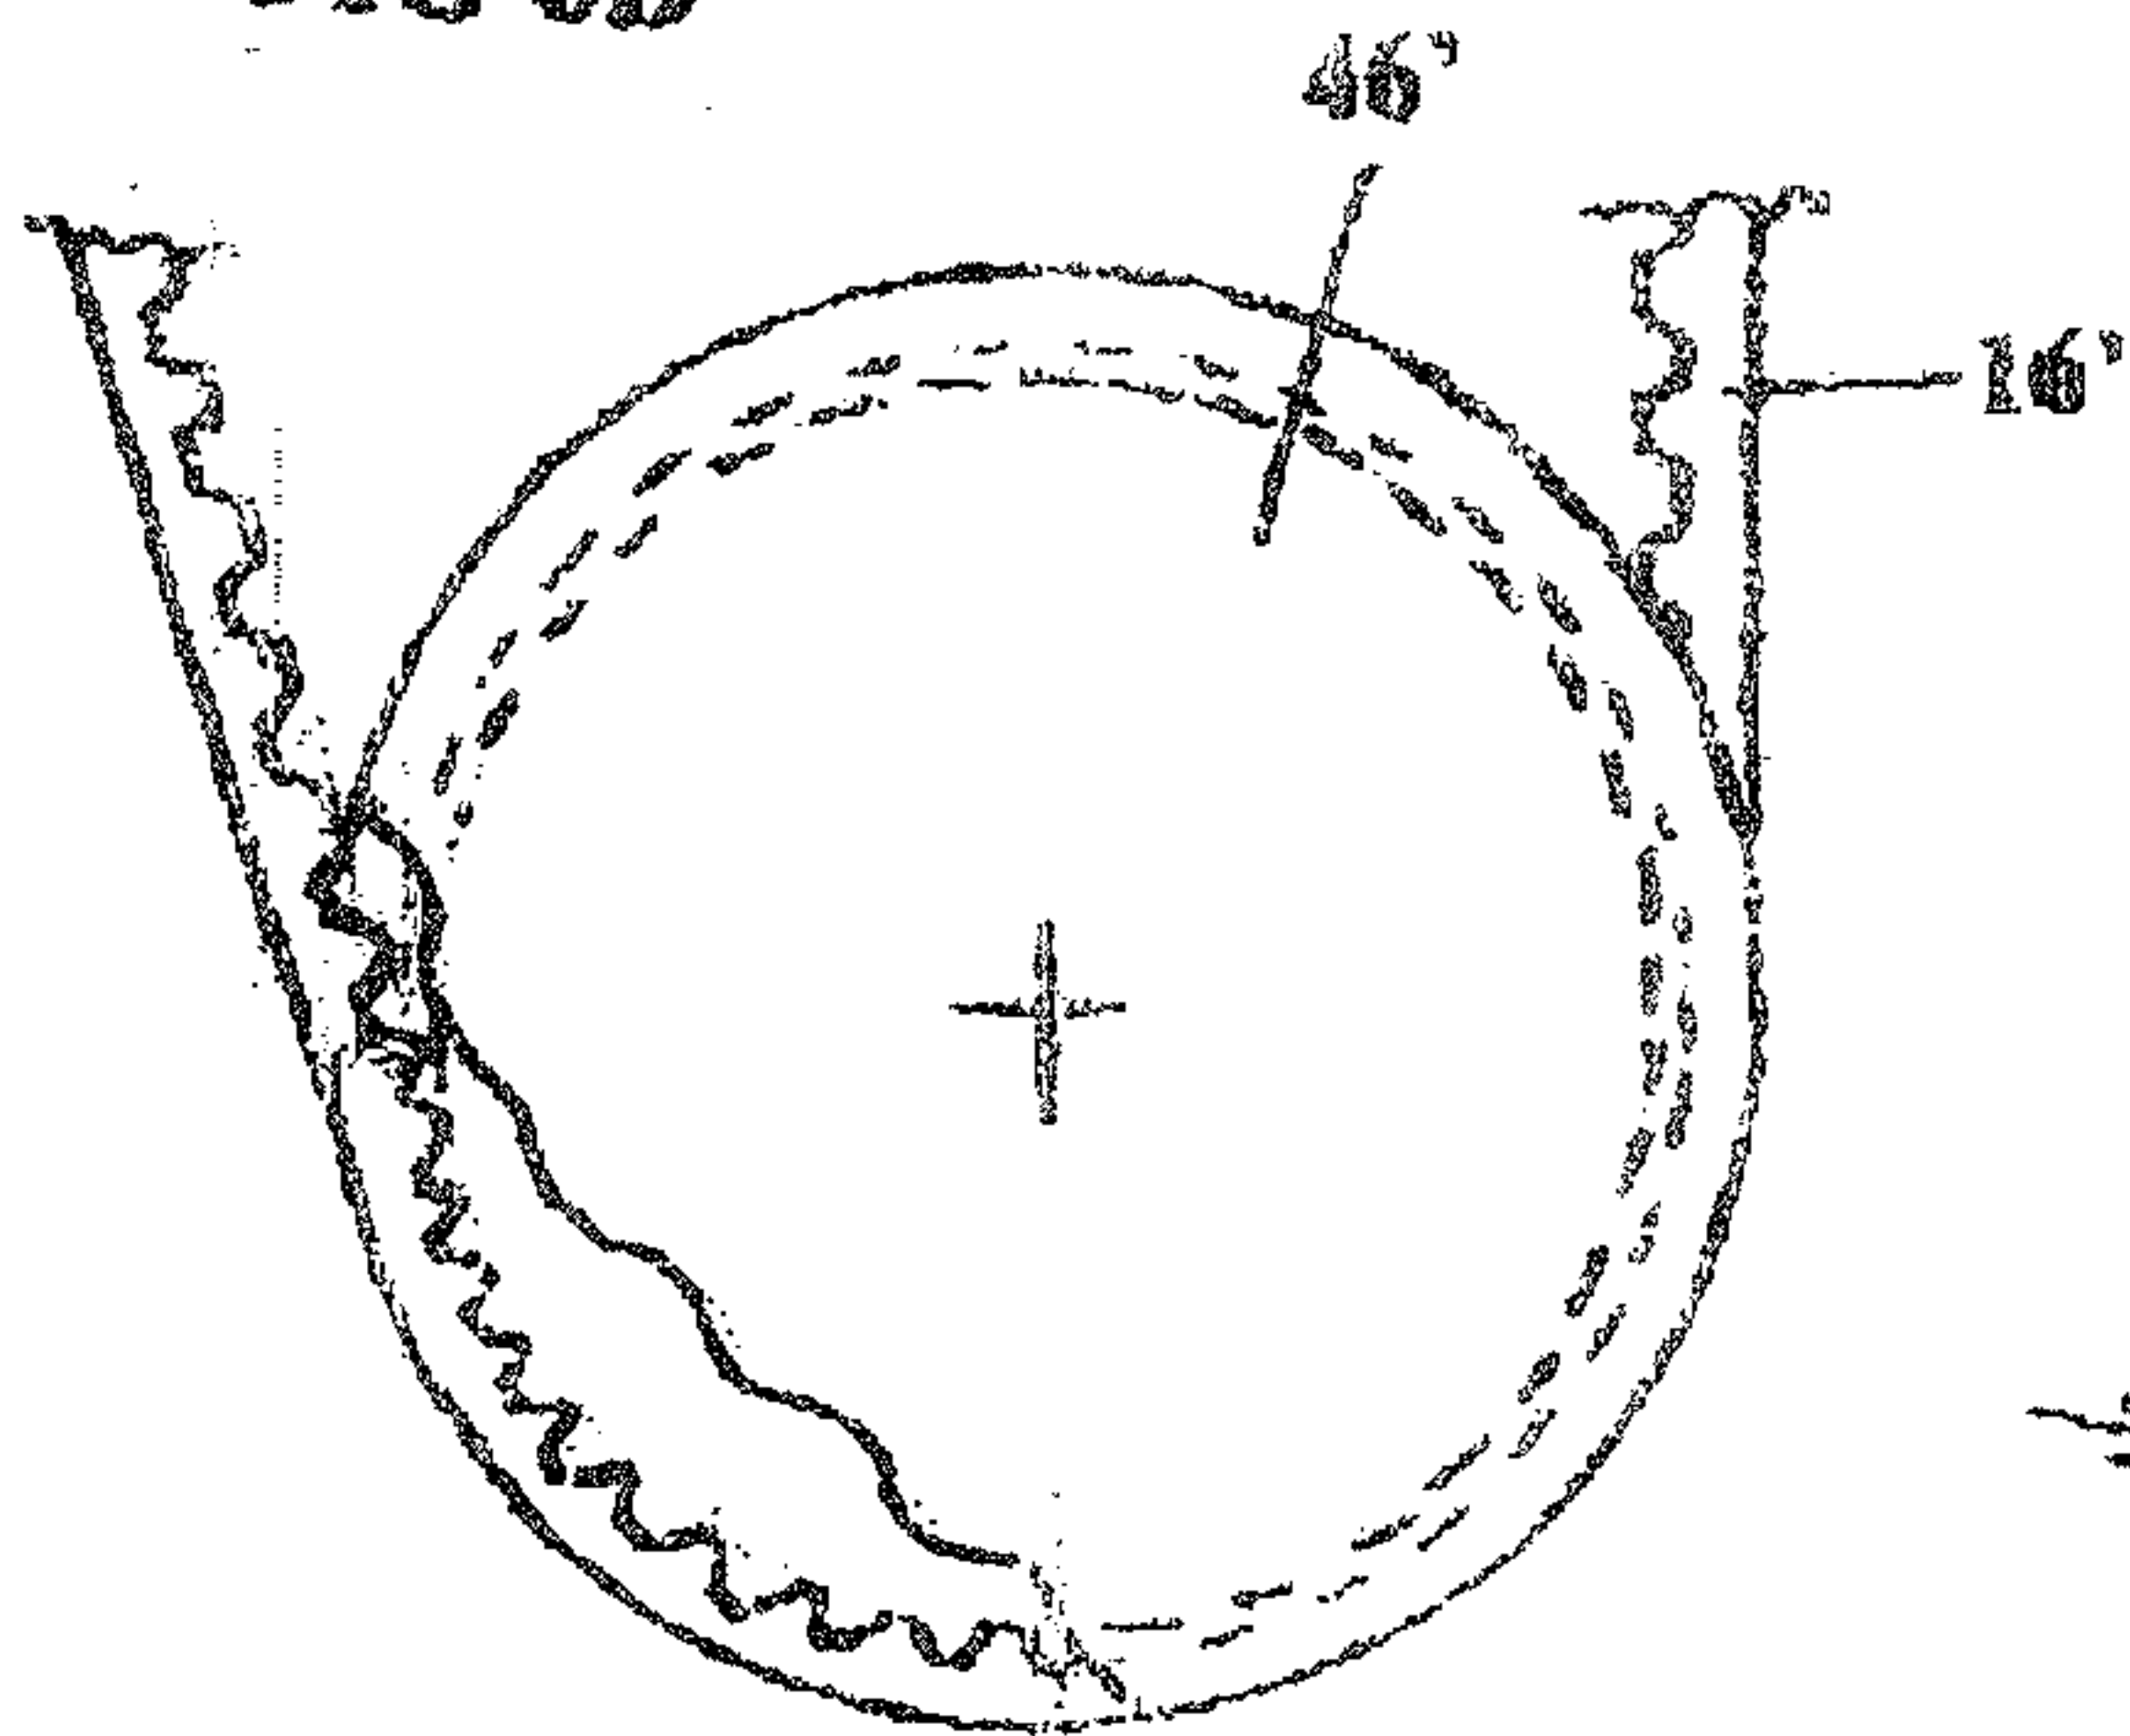


FIG 6A

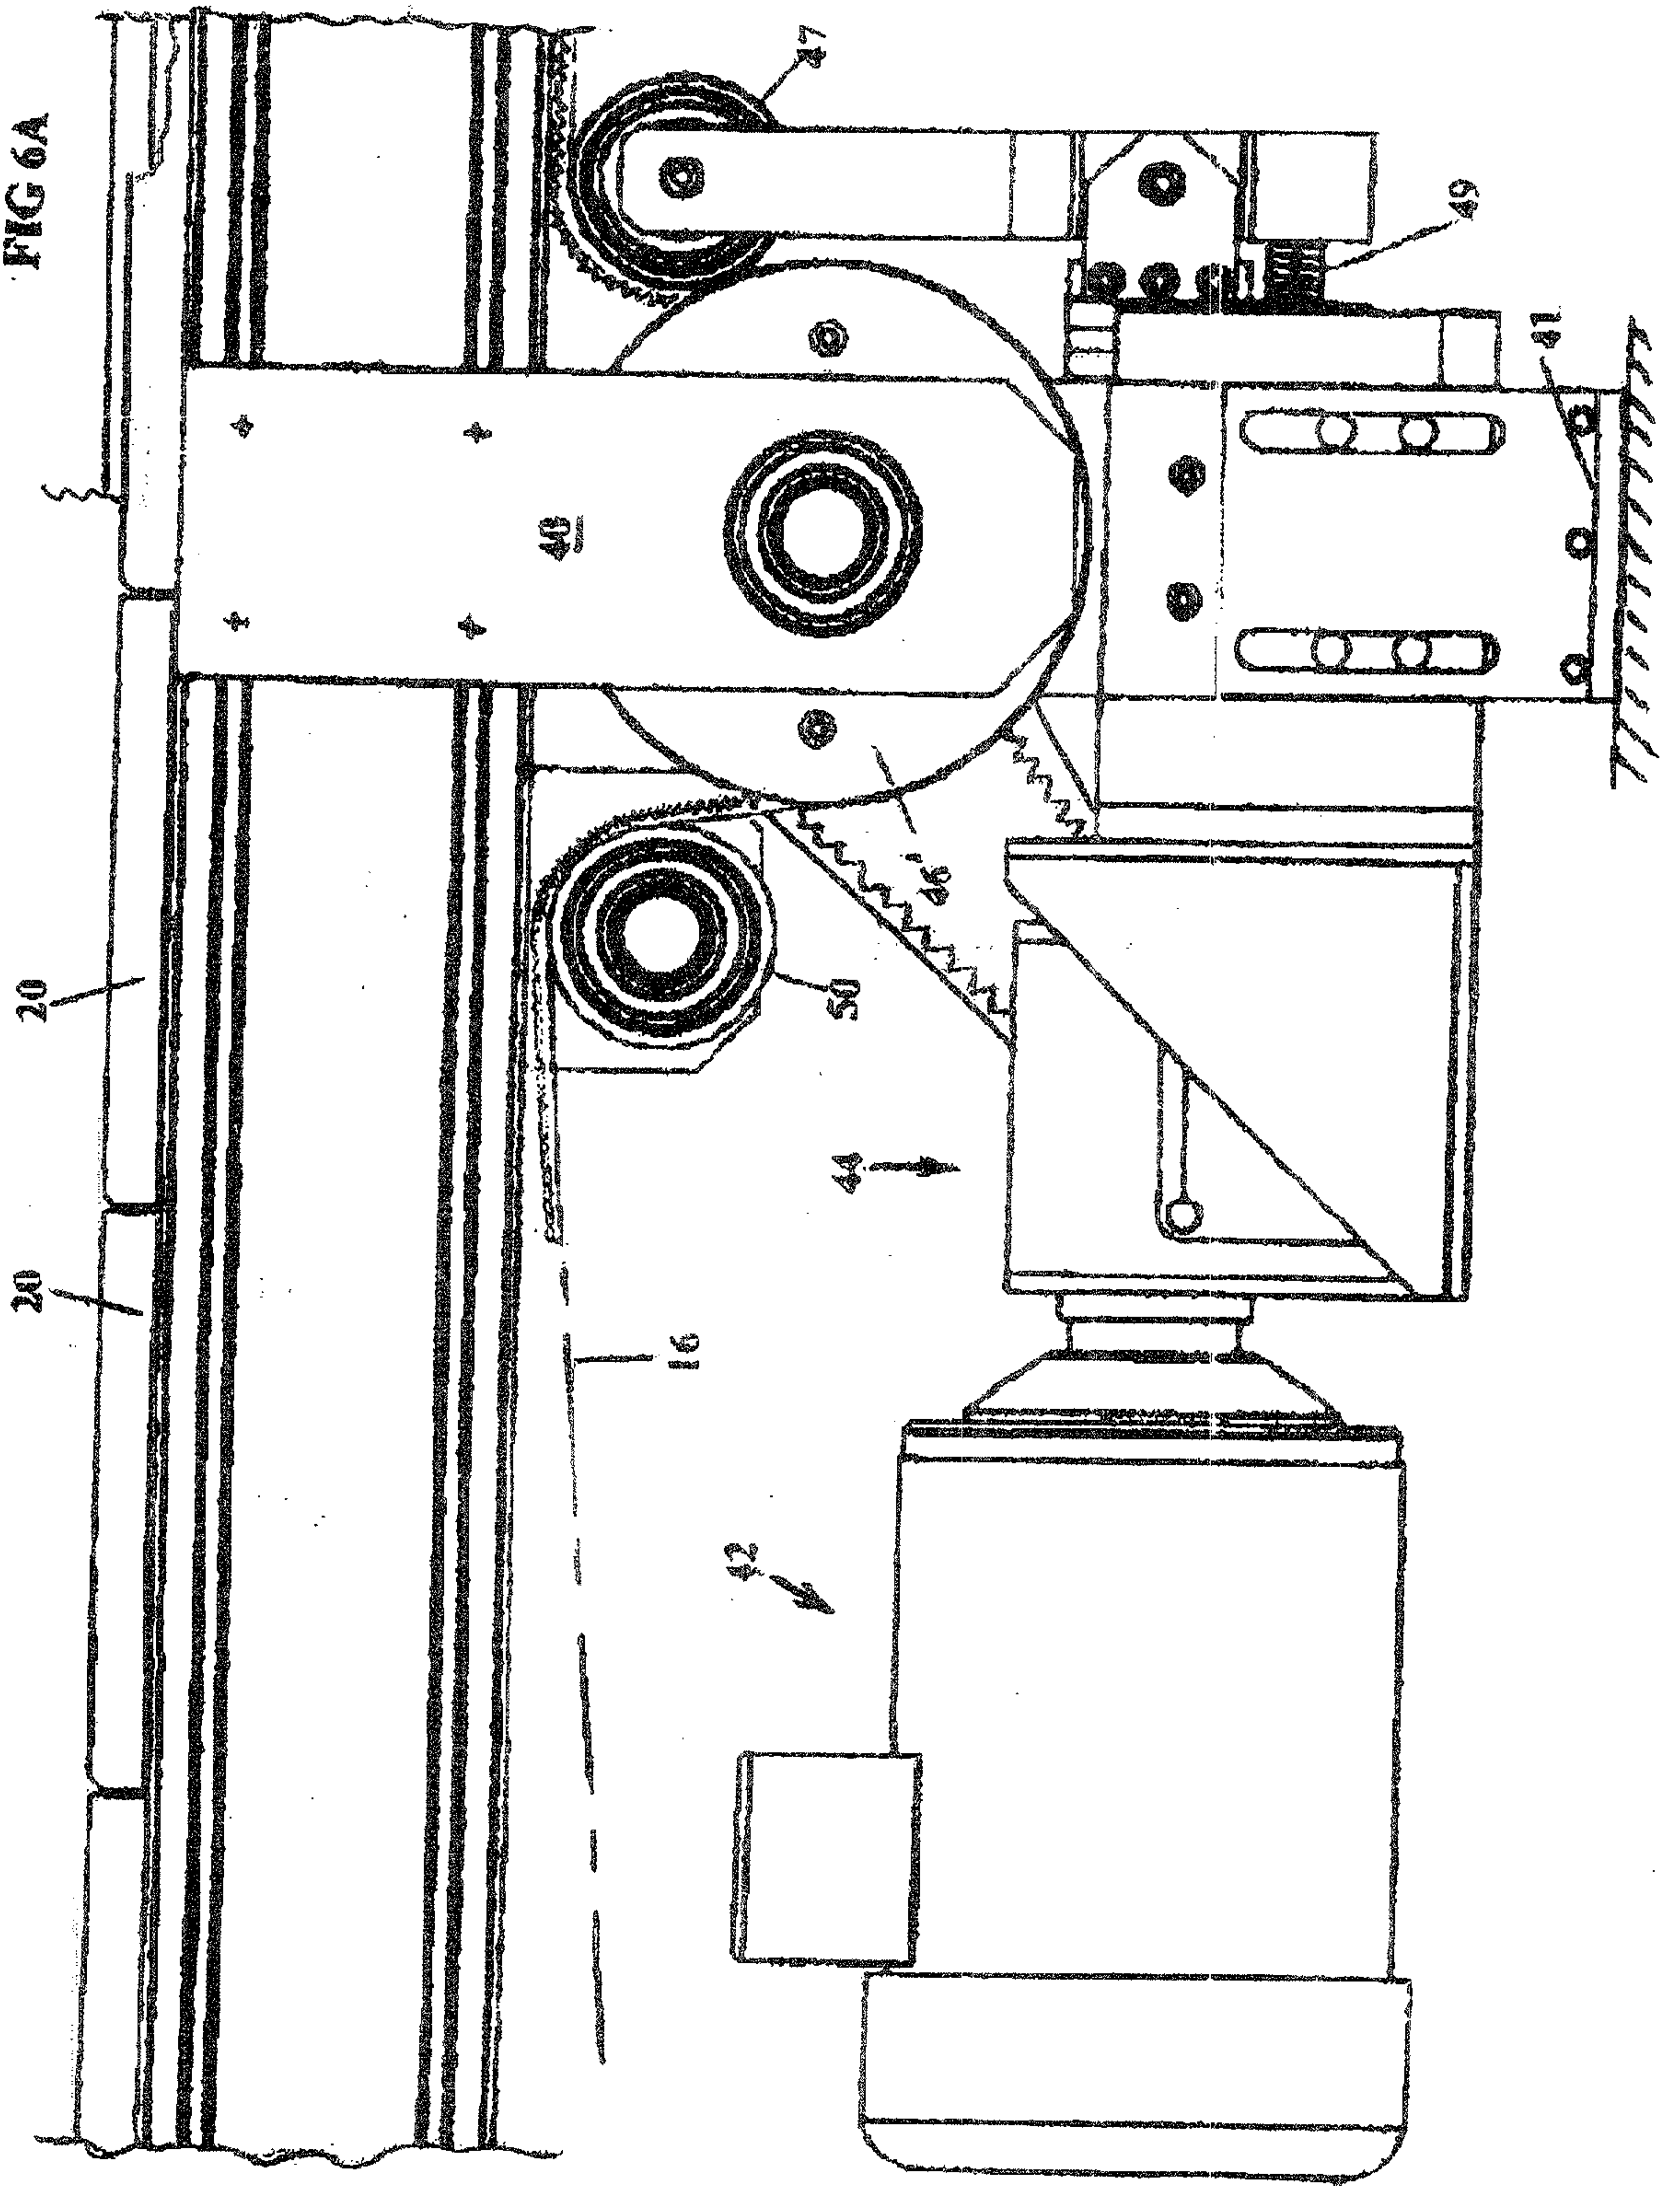


FIG 7

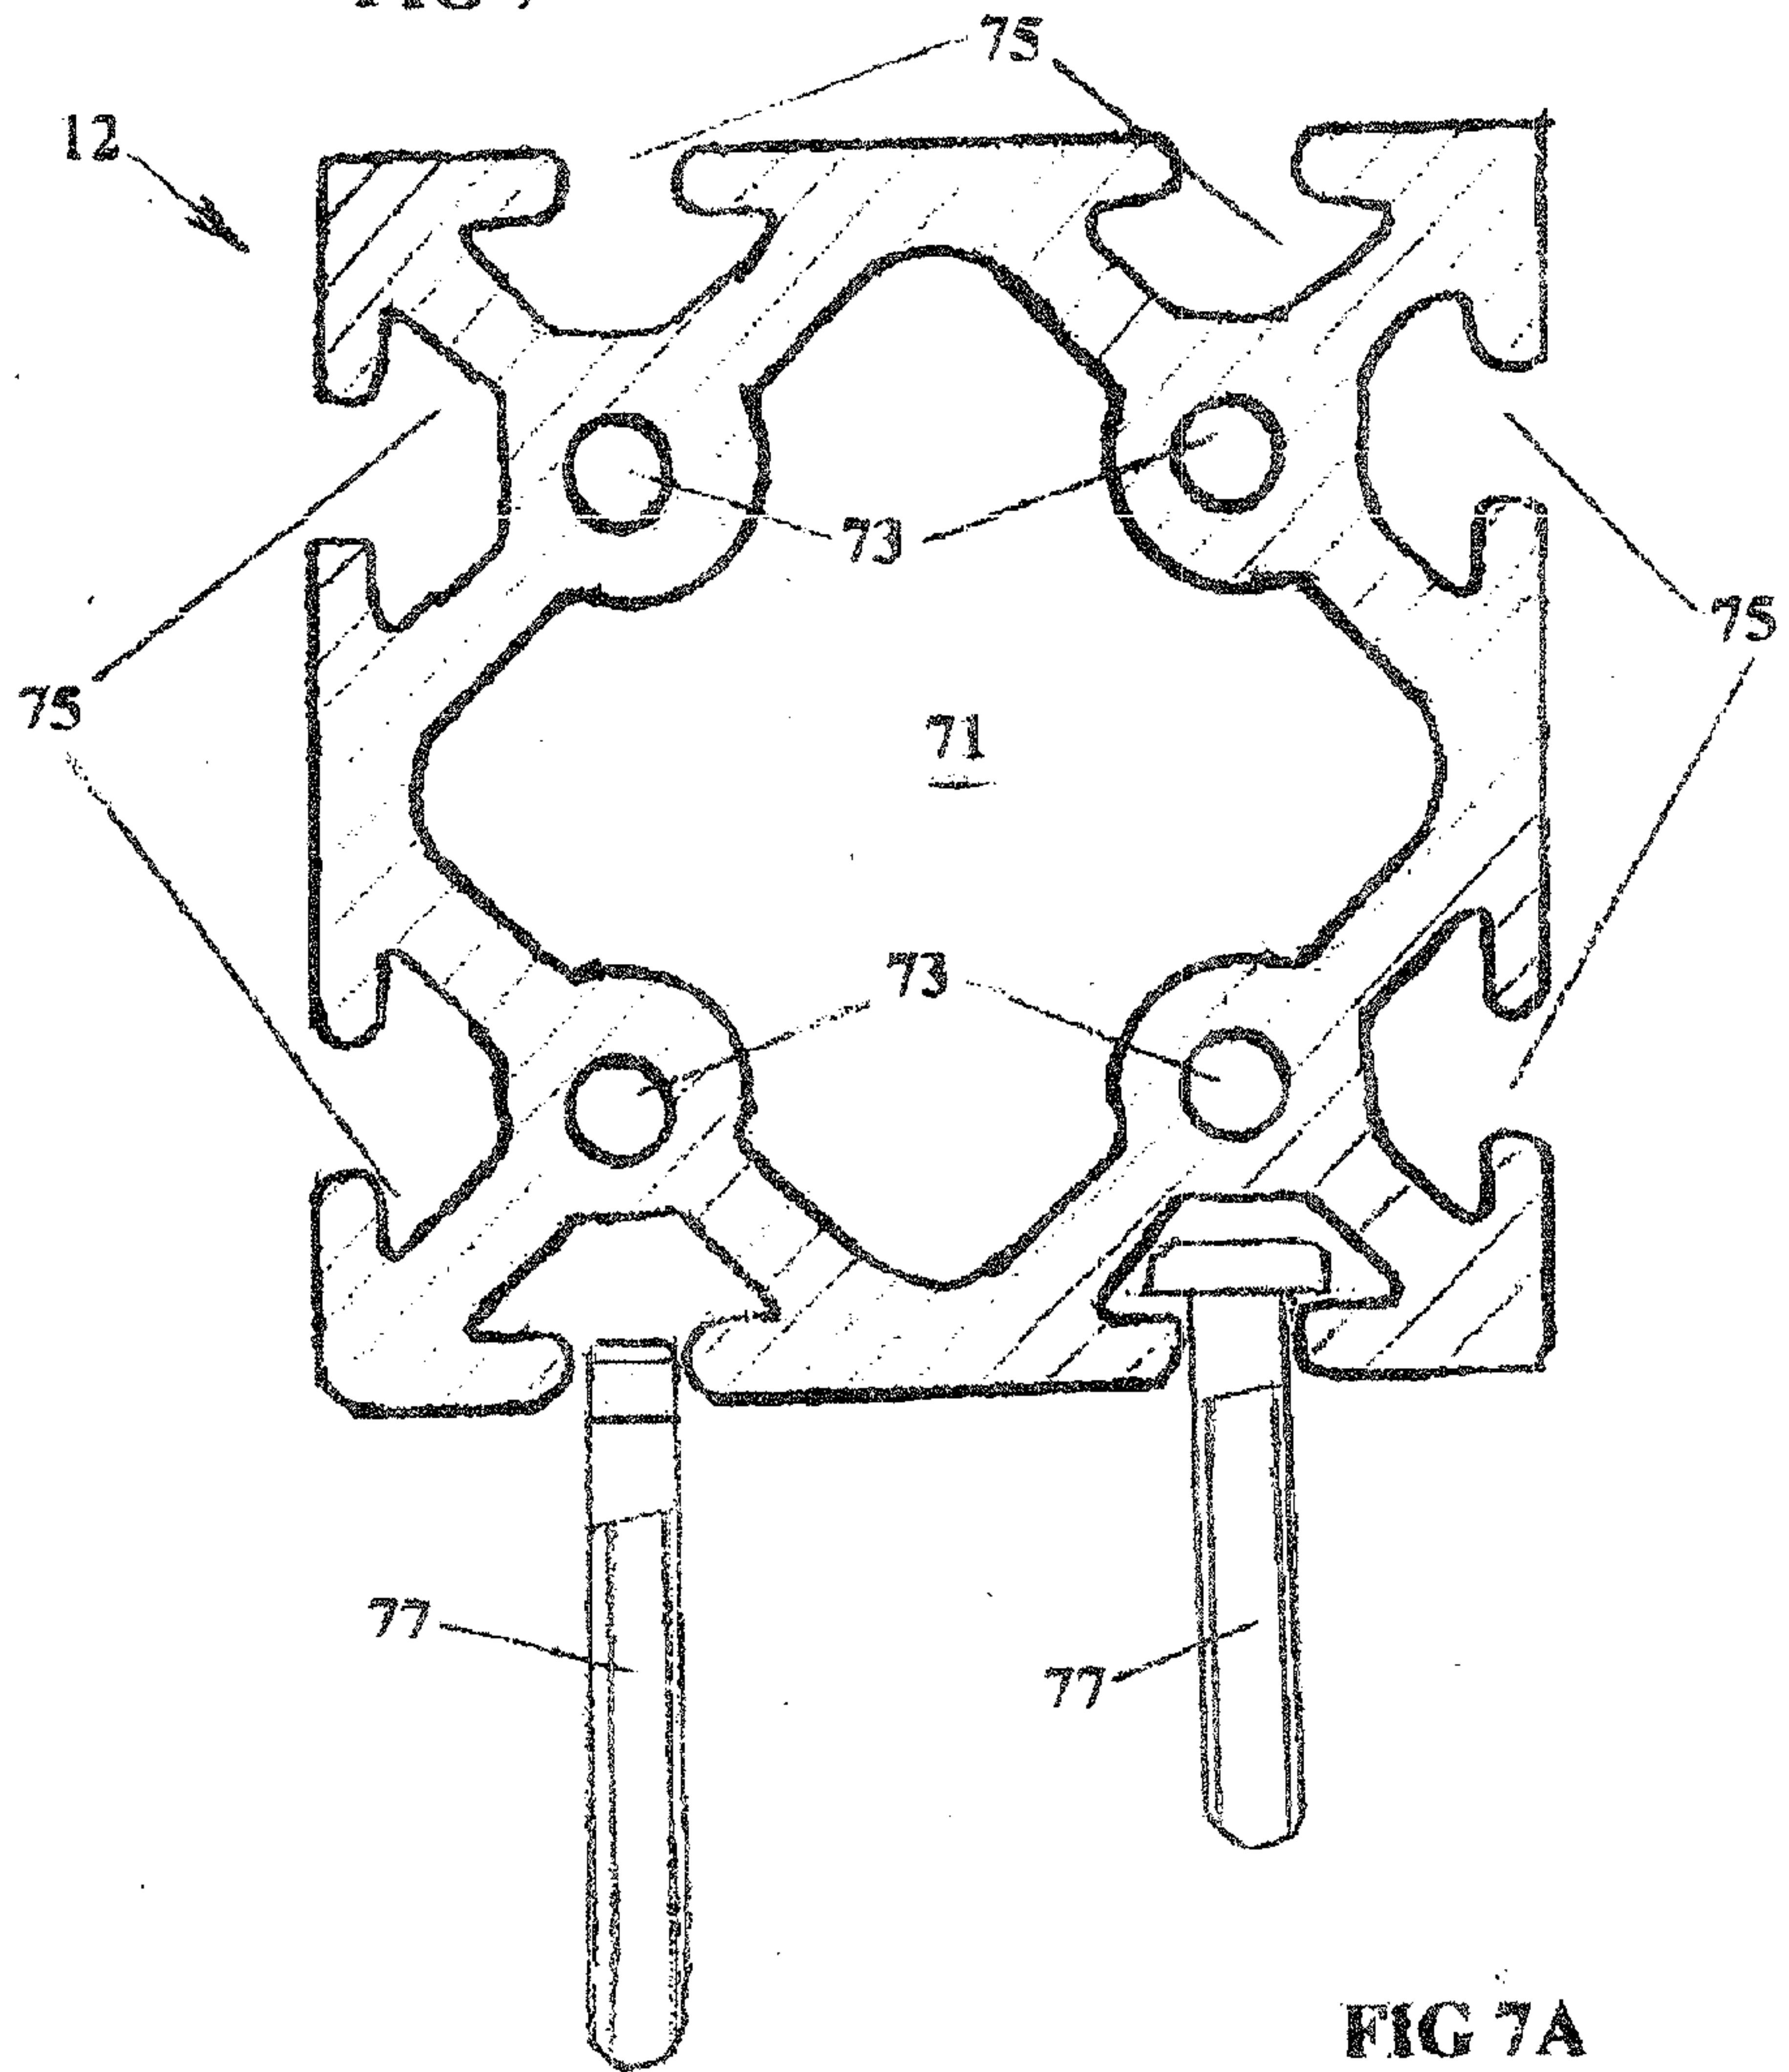


FIG 7A

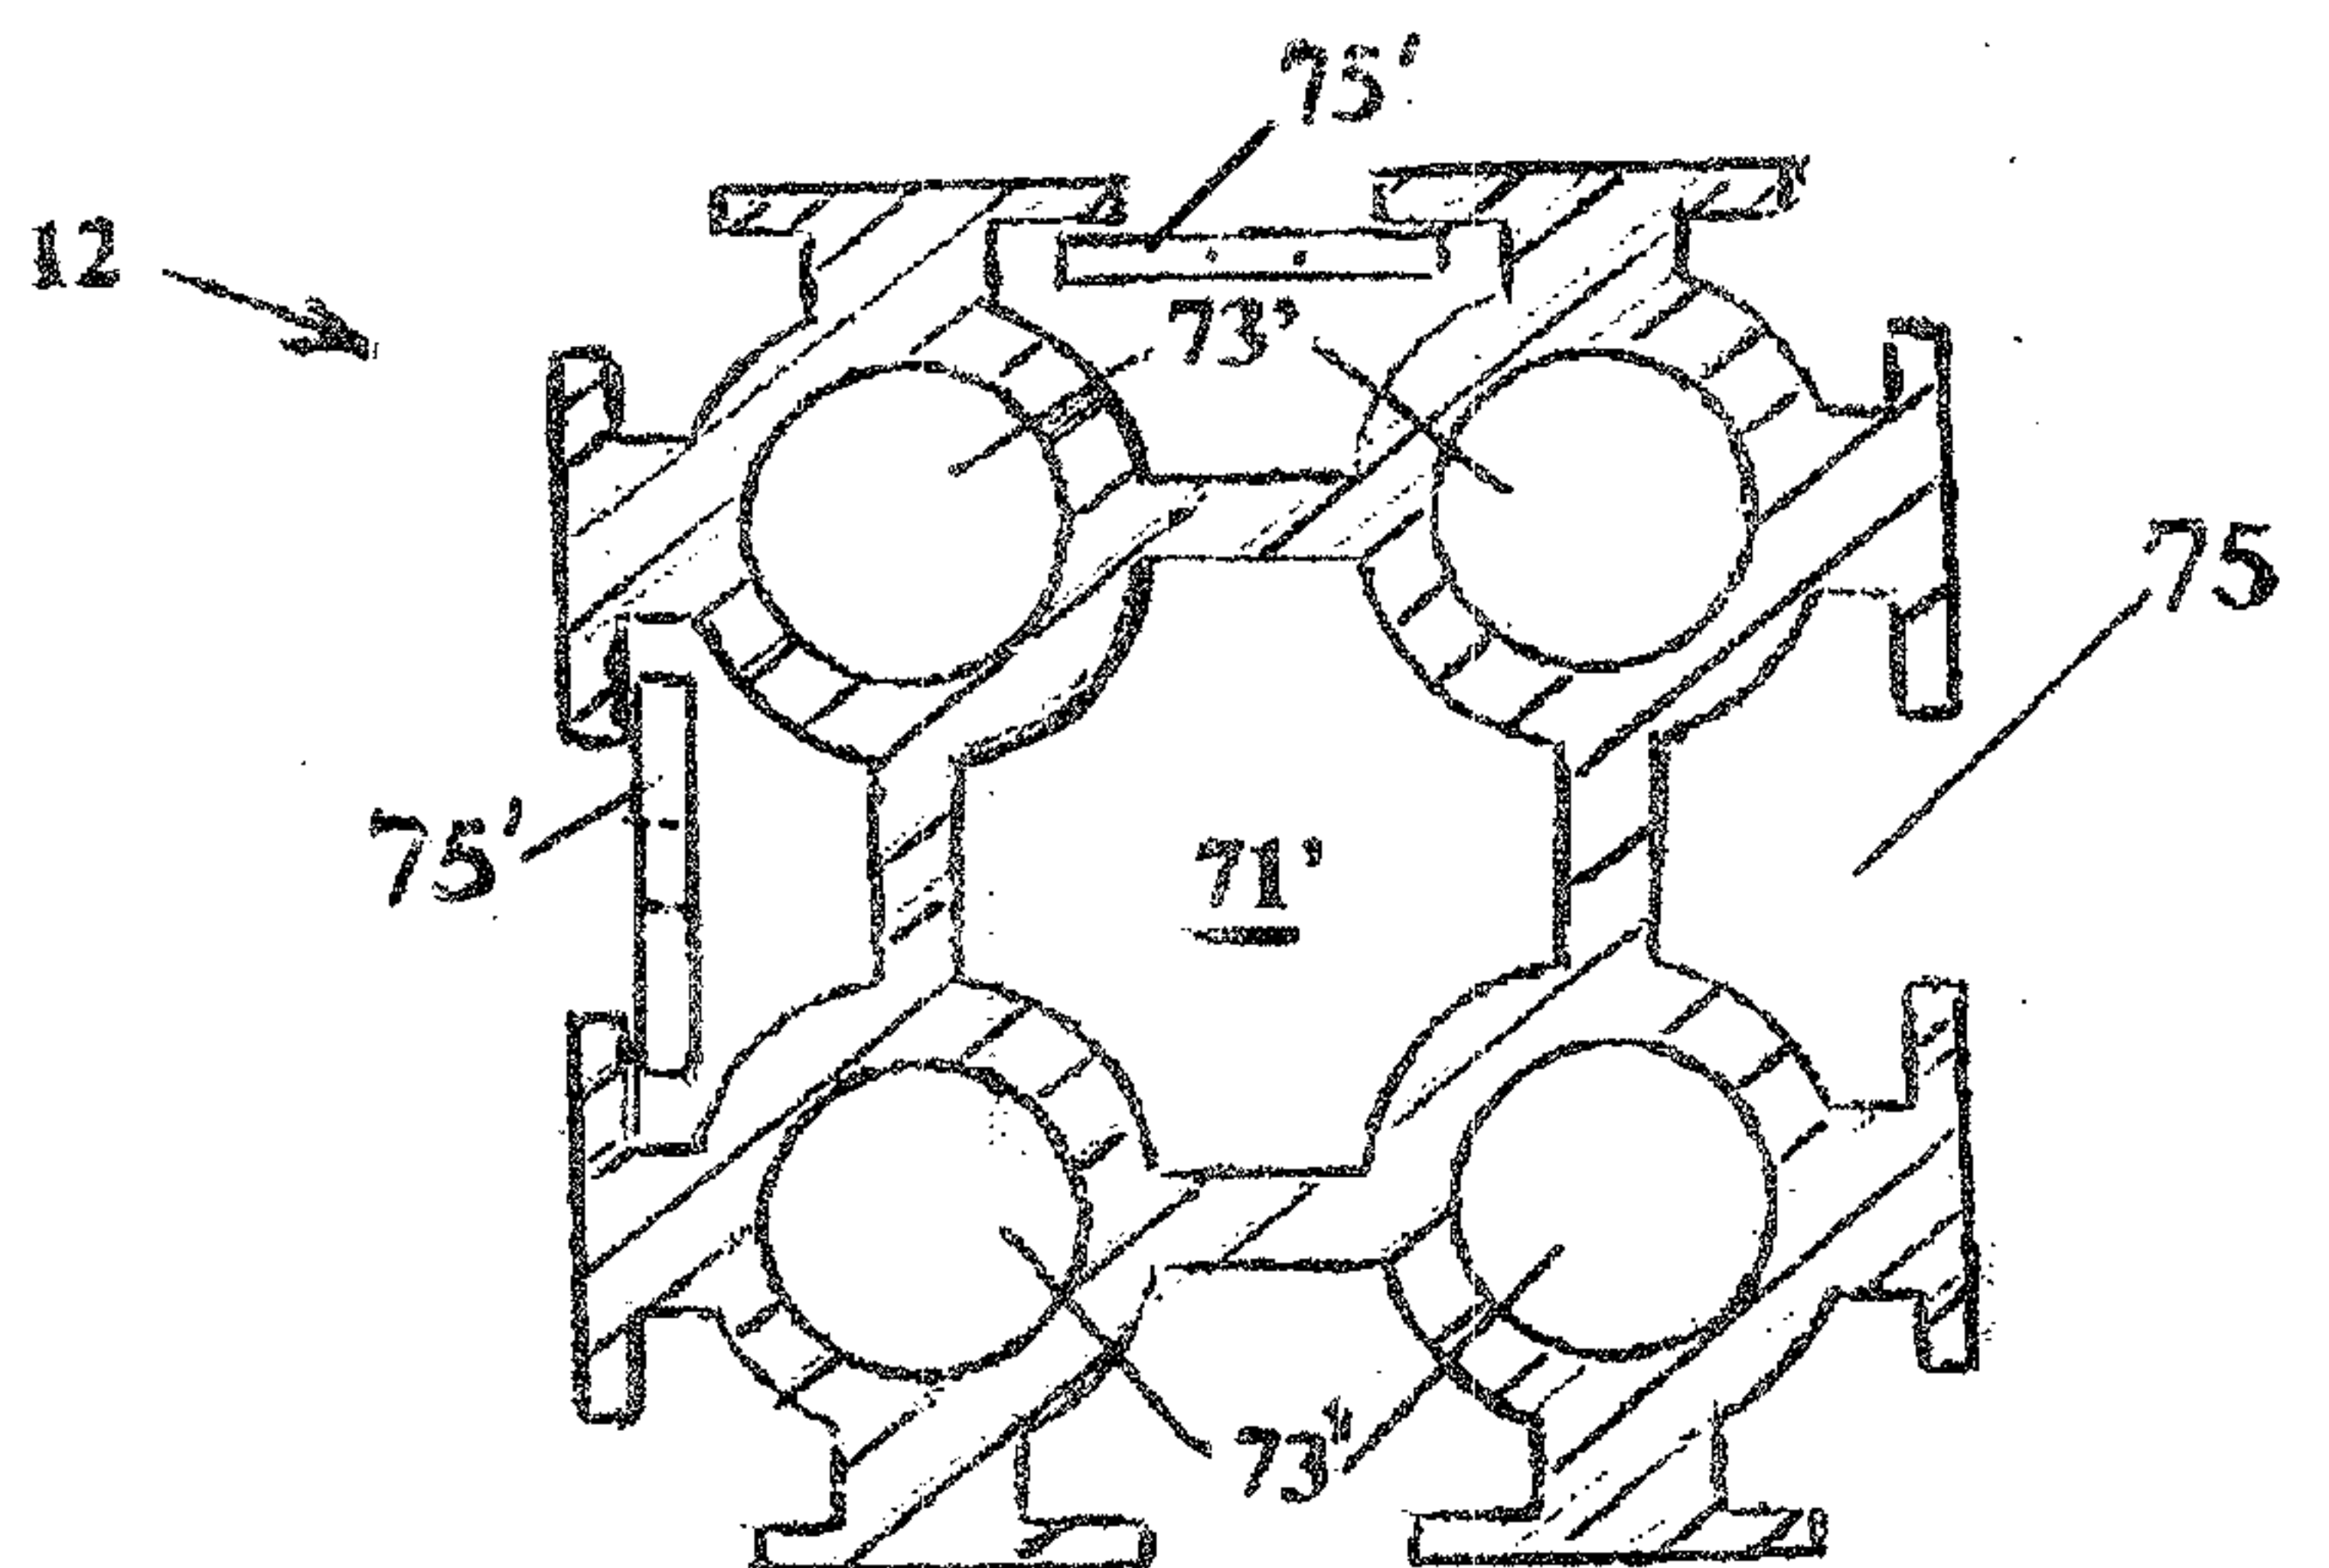


FIG 8

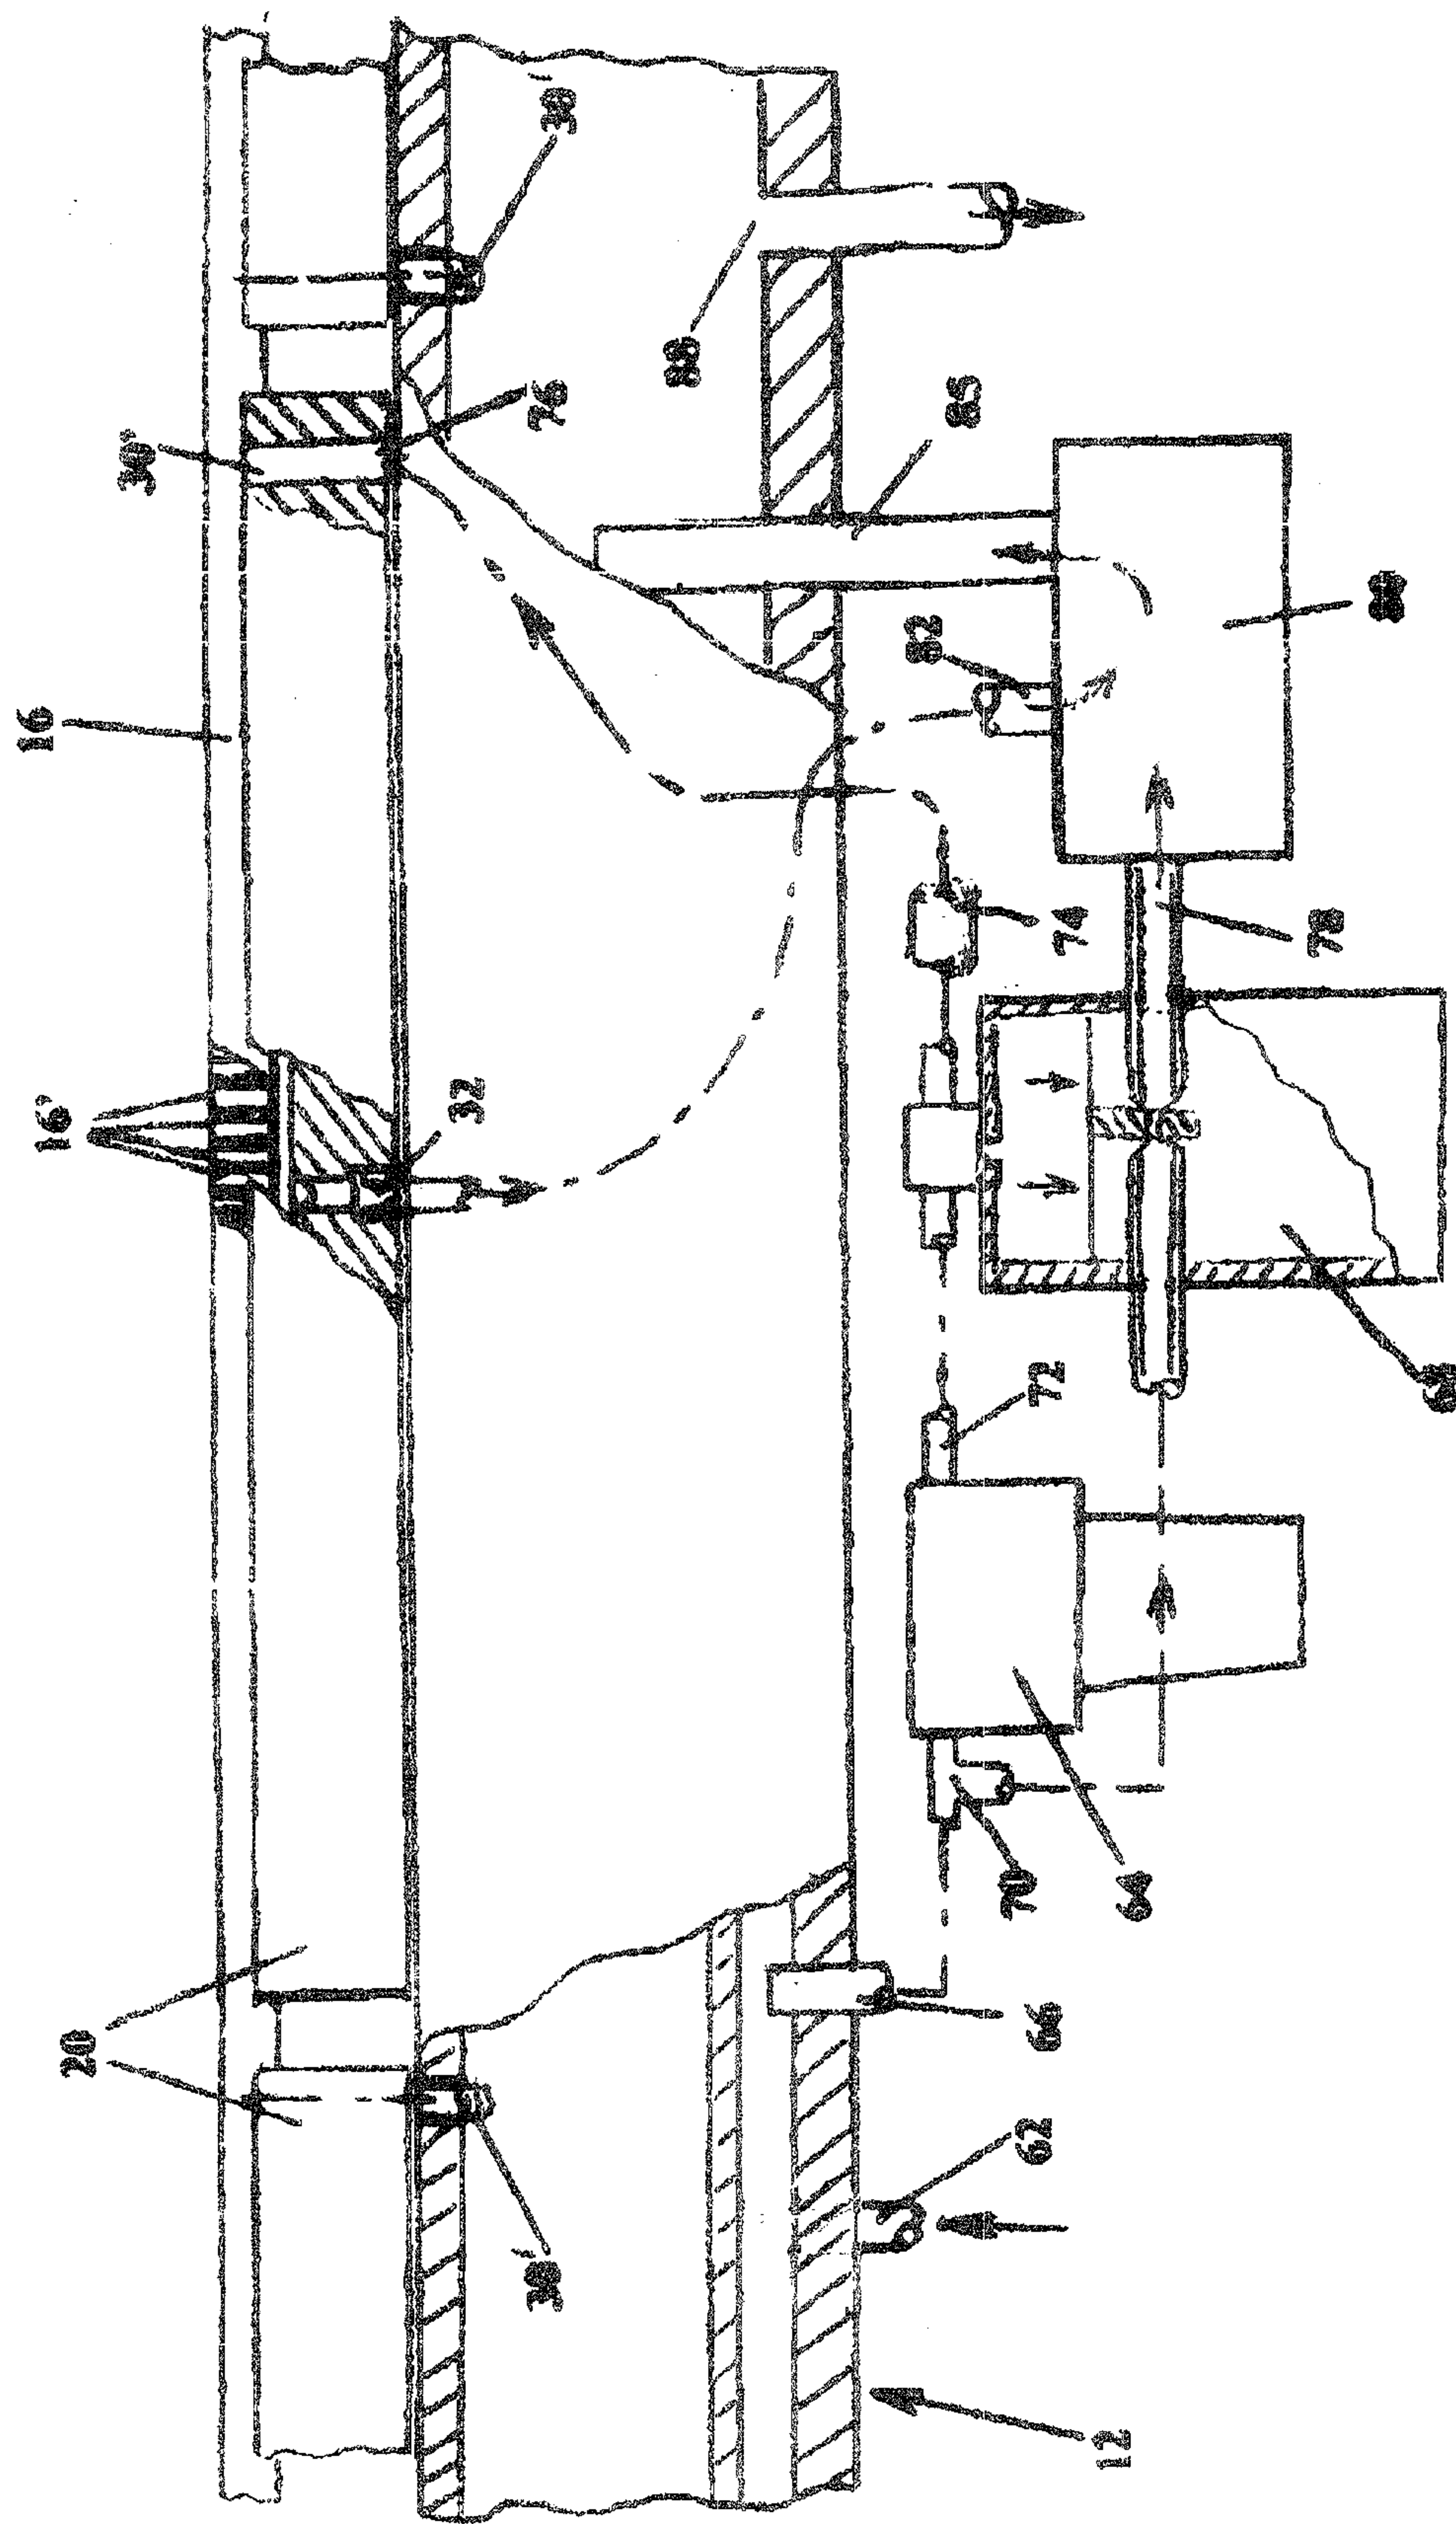


FIG 8A

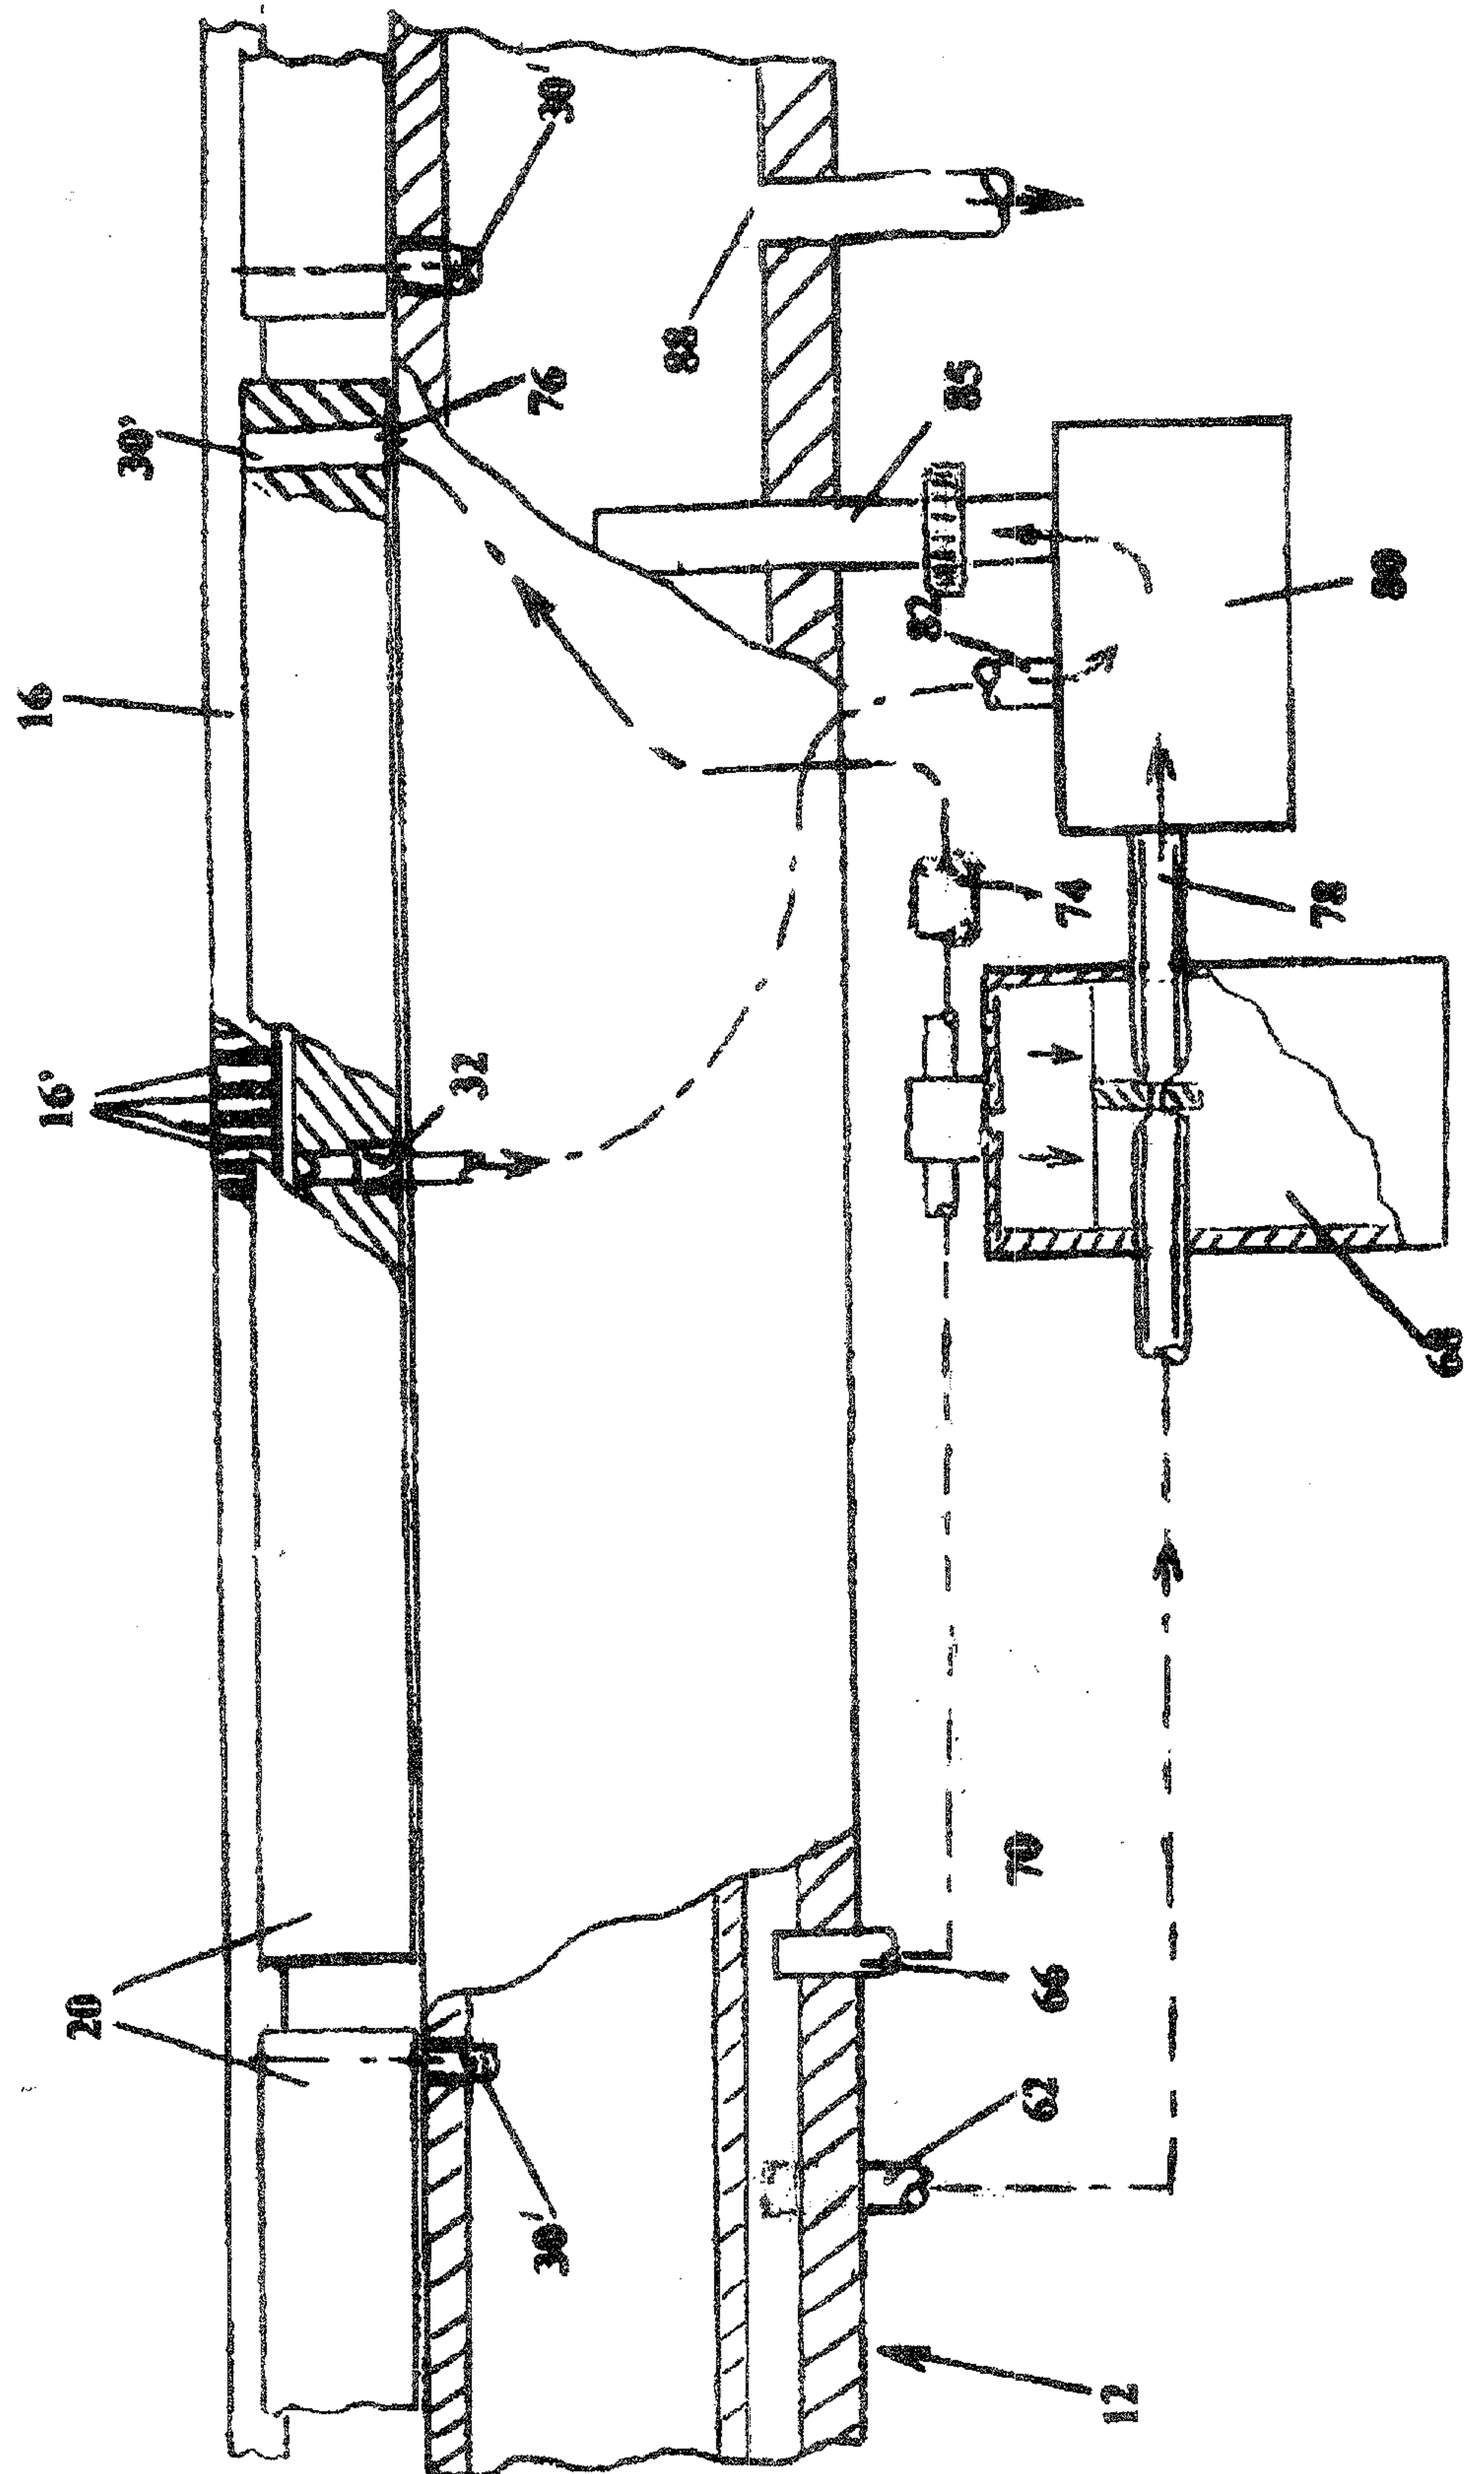


FIG 9

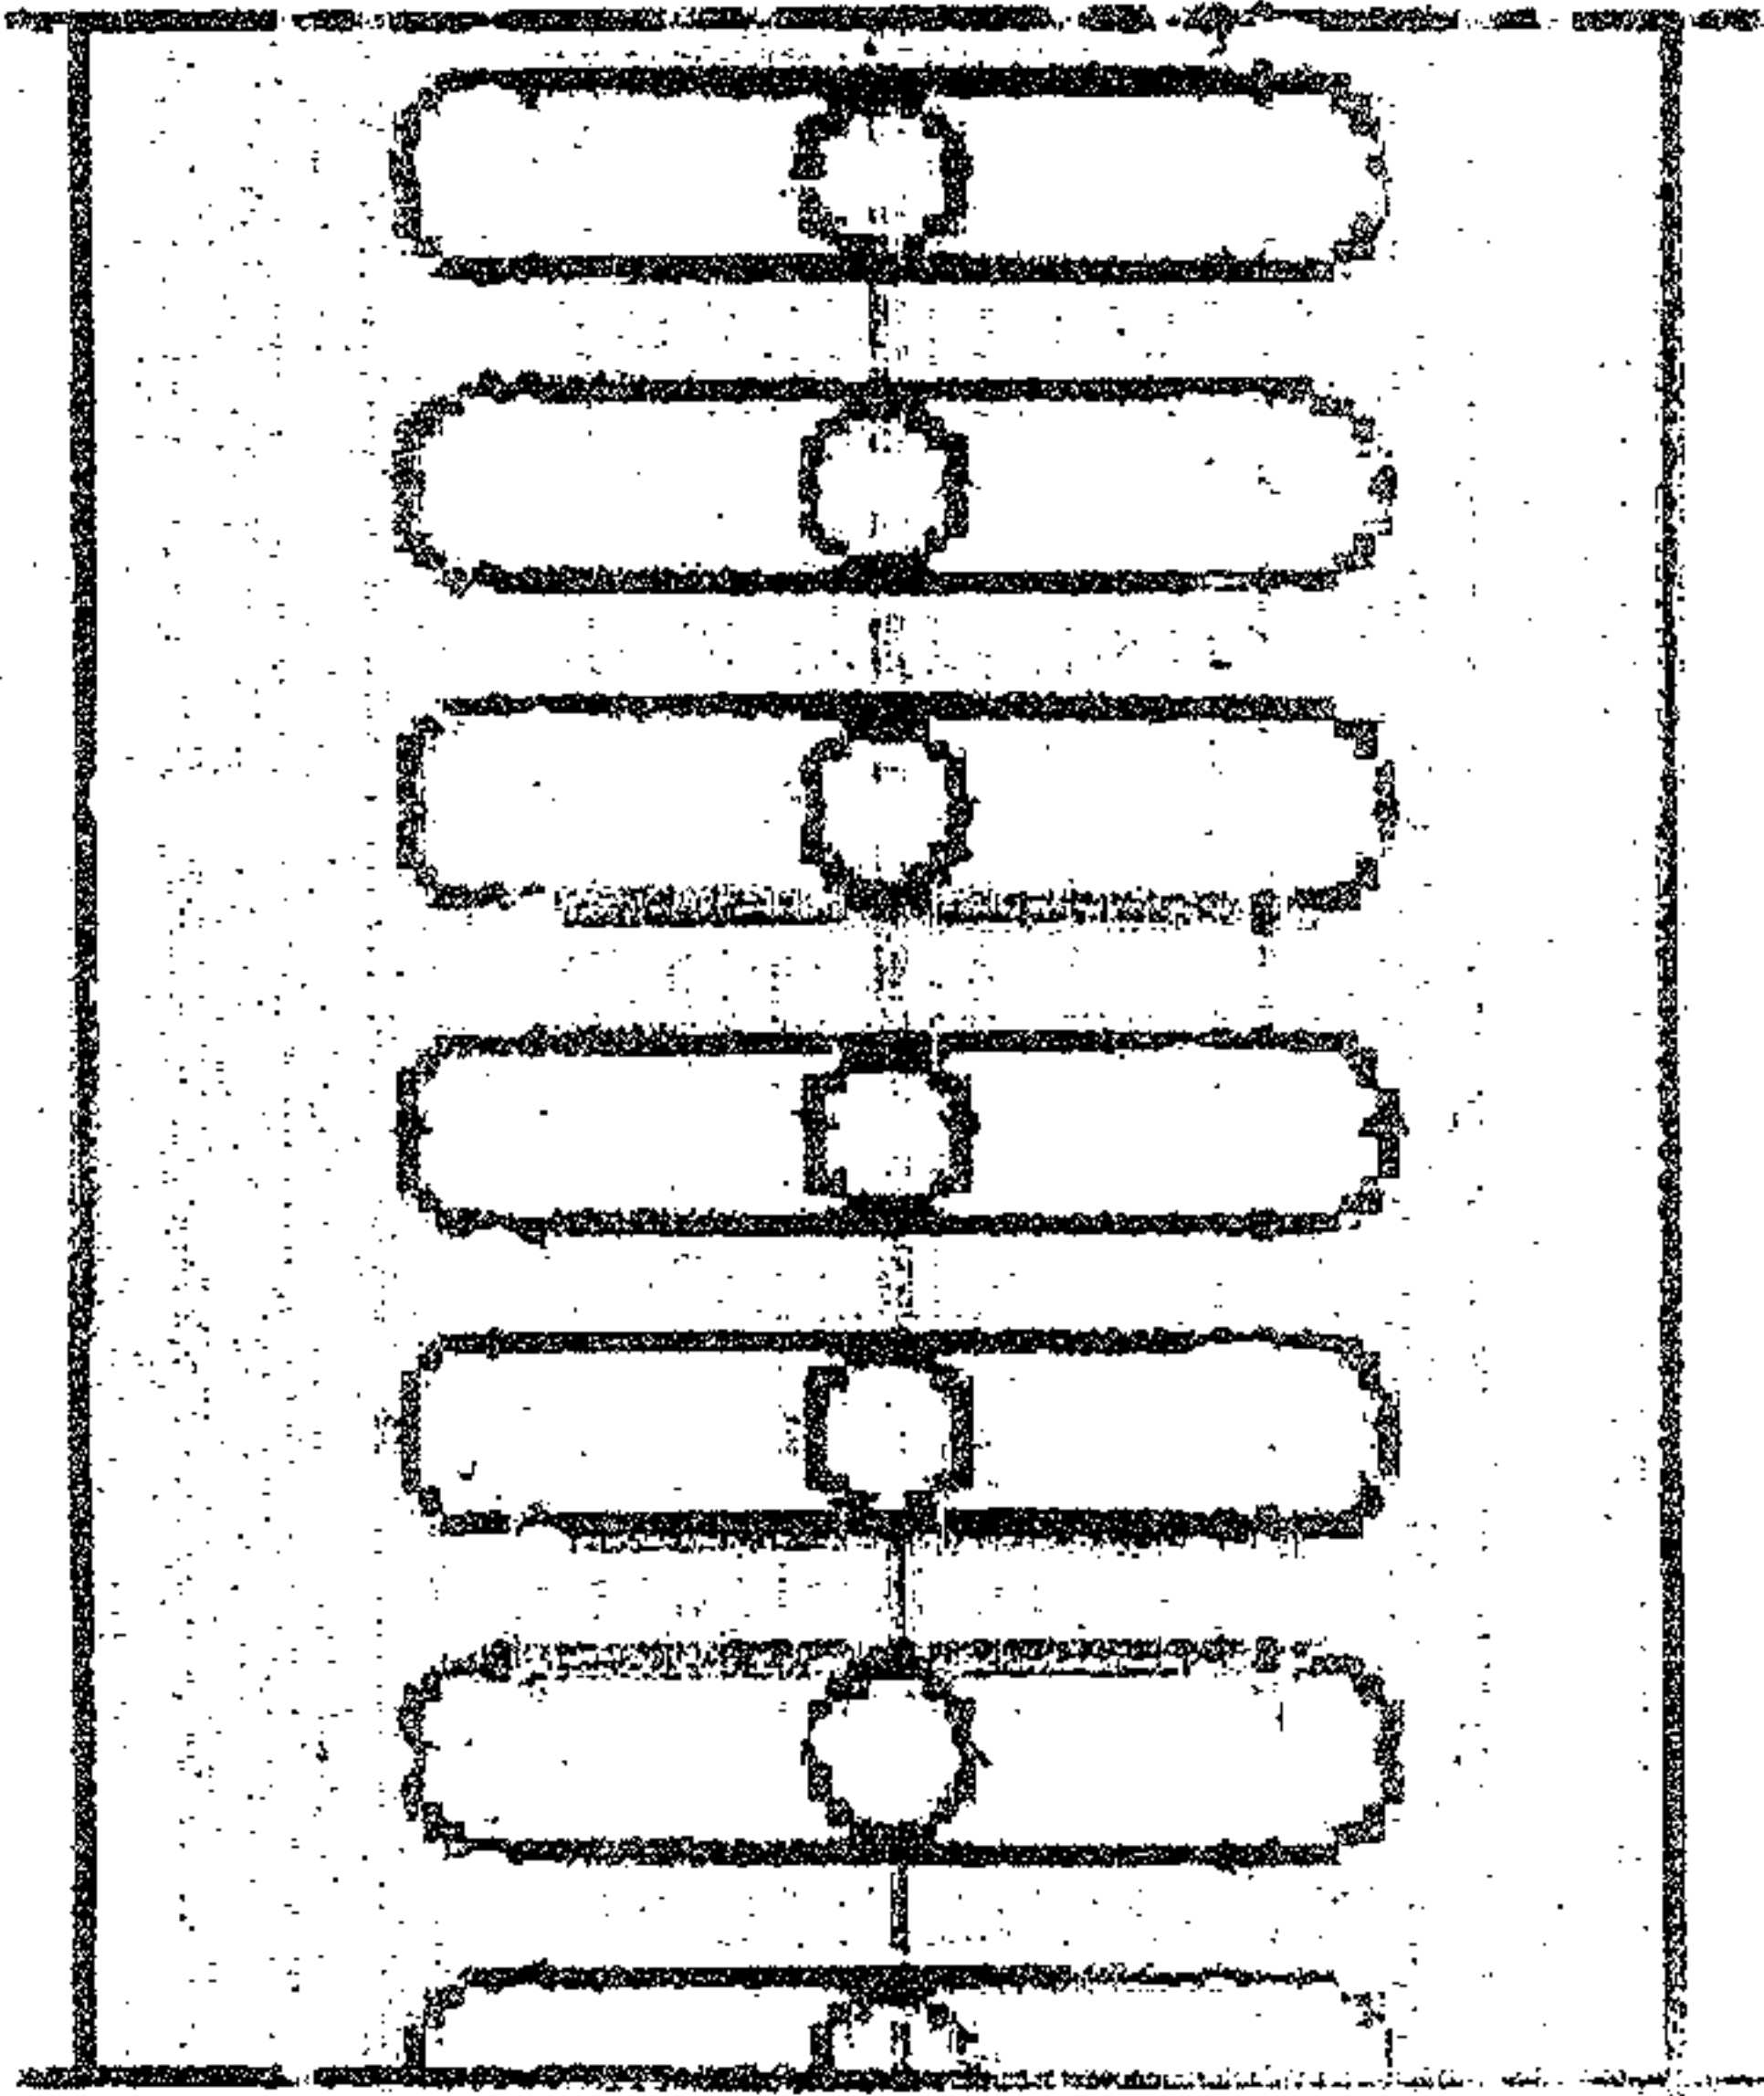


FIG 10

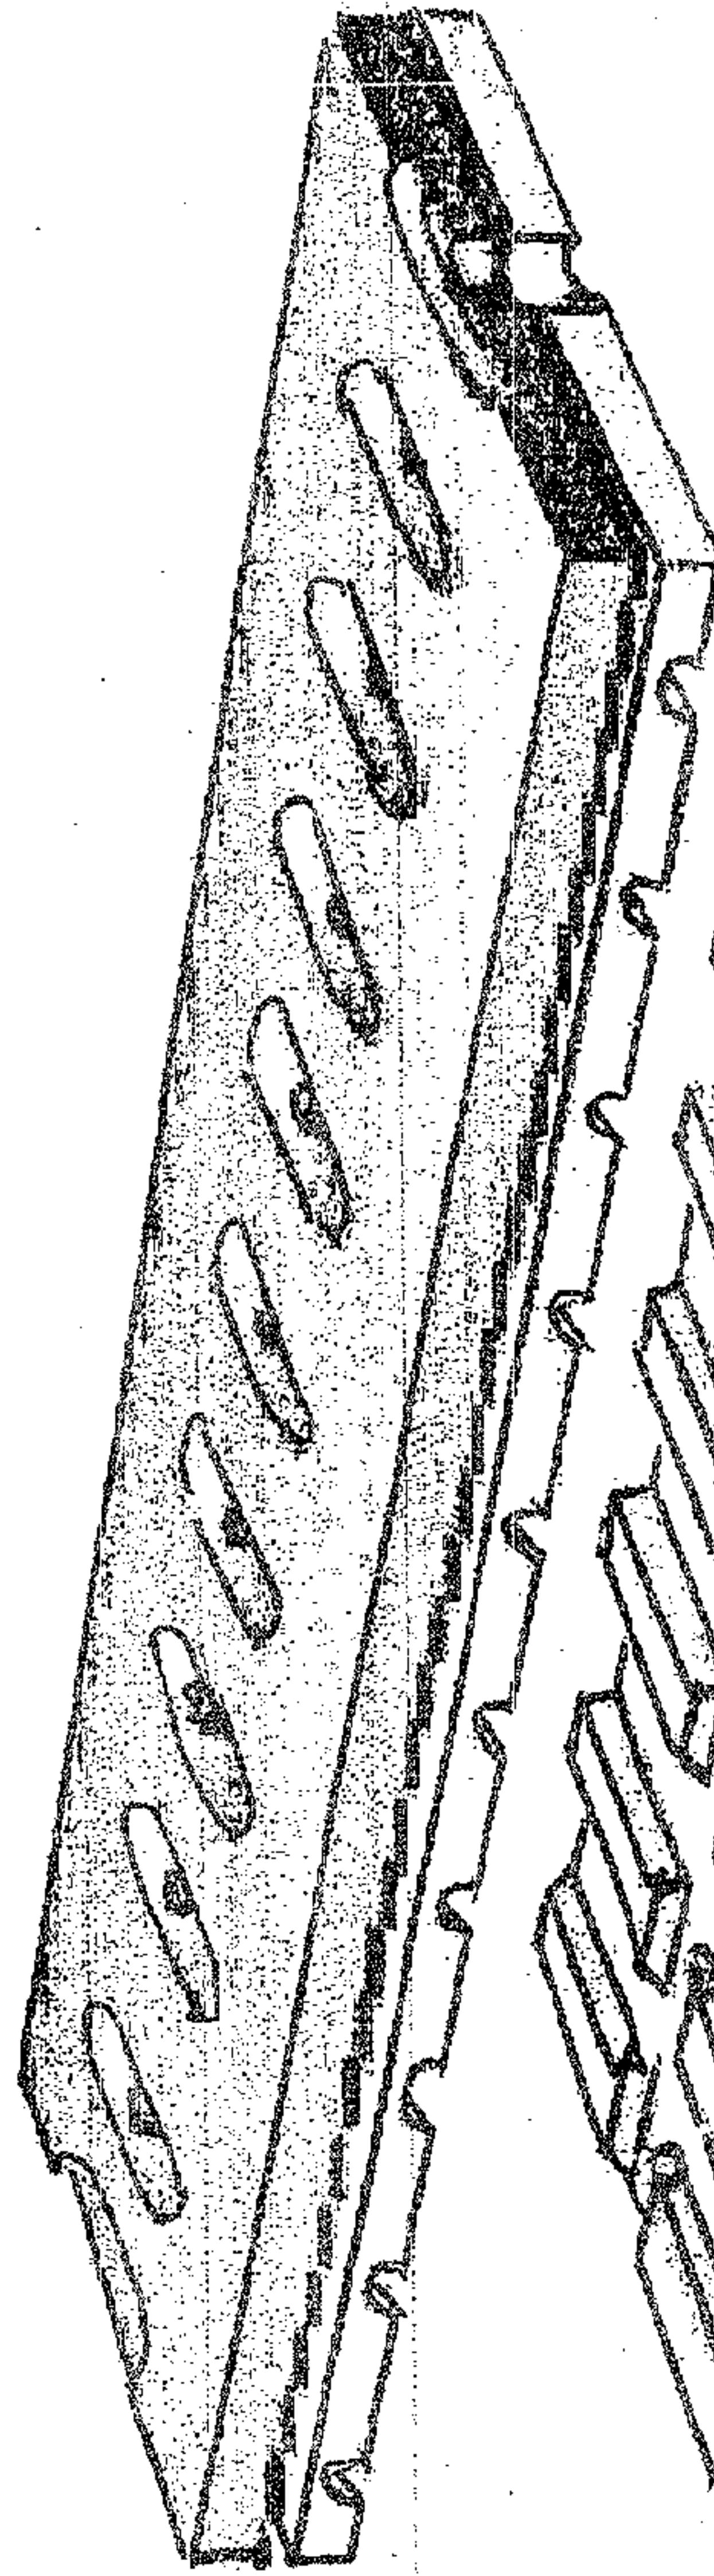


FIG 11

