



(51) International Patent Classification:

H01M 4/505 (2010.01) *H01M 4/1391* (2010.01)
H01M 4/525 (2010.01) *H01M 4/04* (2006.01)
H01M 10/05 (2010.01)

(21) International Application Number:

PCT/IB2015/001766

(22) International Filing Date:

15 July 2015 (15.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicants: **TOYOTA MOTOR EUROPE NV/SA** [BE/BE]; Avenue du Bourget 60, B-1140 Brussels (BE). **CENTRE NATIONAL DE LA RECHERCHE SCIENTIFIQUE** [FR/FR]; 3, rue Michael Ange, F-75016 Paris (FR).

(72) Inventors: **YOSHIDA, Jun**; 21, rue Cornac, F-33000 Bordeaux (FR). **DELMAS, Claude**; Résidence Club, 19 rue Portugal, F-33600 Pessac (FR). **GUIGNARD, Marie**; 30, rue Tamatave, F-33600 Pessac (FR). **CARLIER-LARREGARAY, Dany**; 7, Rue Paul Painlevé, F-33600 Pessac (FR).

(74) Agents: **HART-DAVIS, Jason** et al.; Cabinet Beau de Loménie, 158, rue de l'Université, 75340 Paris Cedex 07 (FR).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))



WO 2017/009681 A1

(54) Title: SODIUM LAYERED OXIDE AS CATHODE MATERIAL FOR SODIUM ION BATTERY

(57) Abstract: The present invention relates to a mixed oxide of sodium and transition metals having the formula (1) : $\text{Na}_x[\text{Mn}_a\text{Ni}_b\text{CO}_c]\text{O}_{2+y}$, wherein: $0.5 \leq x \leq 0.9$, $-0.1 \leq y \leq 0.1$, $a + b + c = 1$, $4a + 2b + 3c = 4 - x + 2y$, $0 < c \leq 0.5$ The present invention further relates to a process for producing such a mixed oxide, a positive electrode comprising such a mixed oxide and a sodium ion secondary battery comprising such a positive electrode.

Sodium layered oxide as cathode material for sodium ion battery

Field of the Invention

The present invention relates to a mixed oxide of sodium and transition metals, in particular a mixed oxide composition with manganese (Mn), nickel (Ni) and cobalt (Co) as well as sodium (Na). This mixed oxide of sodium and transition metals can be used as a positive electrode active material, in particular as a positive electrode active material in a sodium battery.

Technological Background to the Invention

Sodium ion batteries are favourable candidates *inter alia* for future hybrid and electric vehicles because of the low material price of sodium and high energy density, beyond that available for lithium ion batteries. Sodium layered oxides (Na_xMO_2 , M: Transition metal) can be used as materials for the positive electrode in view of their high capacity and ion diffusivity, leading to high energy and power batteries.

JP-2002-220231 discloses a layered sodium - cobalt - manganese oxide having a uniform composition and a single crystal for a lithium ion secondary battery. The oxide has the formula $\text{Na}_x\text{Co}_y\text{Mn}_{1-y}\text{O}_2$ ($0.6 \leq x \leq 0.8$, $0.4 \leq y \leq 0.6$). The materials prepared do not include Ni (nickel).

WO 2014/132174 discloses a doped sodium manganese cathode material for a sodium ion battery with the formula Na_xMO_2 wherein $\text{M} = \text{Mn}_{1-y-z}\text{Li}_y\text{A}_z$, $0.66 \leq x \leq 0.95$, $y < 0.33$, $z < 0.2$, $\text{A} = \text{Ti, Fe, Ni, Mg, Co}$. A number of Na-Li-Mn multi-cation compositions were investigated.

US 2012/0183837 discloses materials suitable for use as a cathode in a sodium electrochemical cell or battery, the electrode comprising a layered material of formula $\text{Na}_c\text{Li}_d\text{Ni}_e\text{Mn}_f\text{M}_z\text{O}_b$, wherein M comprises one or more metal cations, $0.24 \leq c/b \leq 0.5$, $0 < d/b \leq 0.23$, $0 \leq e/b \leq 0.45$, $0 \leq f/b \leq 0.45$, $0 \leq z/b \leq 0.45$, the combined average oxidation state of the metal components (i.e.,

$\text{Na}_c\text{Li}_d\text{Ni}_e\text{Mn}_f\text{M}_z$) is in the range of about 3.9 to 5.2, and b is equal to $(c+d+Ve+Xf+Yz)/2$, wherein V is the average oxidation state of the Ni, X is the average oxidation state of the Mn, and Y is the average oxidation state of the M in the material.

JP-2012-250895 discloses a sodium-containing composite metal oxide having a layered crystal structure suitably used as an electrode active substance for a sodium secondary battery. The method for manufacturing an inorganic material includes converting at least a part of a lithium-containing composite metal oxide represented by $\text{Li}_a\text{A}_b\text{M}_c\text{O}_d$ to a sodium-containing composite metal oxide having a layered crystal structure by an electrochemical treatment, wherein a is at least one element selected from the group consisting of Na and K; M is at least one transition metal element; $0 < a \leq 1.5$, $0 \leq b < 1.5$, $0 < c \leq 3$, $0 < d \leq 6$ and $0 < a+b \leq 1.5$.

There is an ongoing need in this field to provide composite metal oxides for sodium batteries which enable excellent and durable electrochemical properties, such as high cyclability.

Summary of the Invention

The present invention, in one aspect, is directed to a mixed oxide of sodium and transition metals having the formula (1):



wherein:

$$0.5 \leq x \leq 0.9$$

$$-0.1 \leq y \leq 0.1$$

$$a + b + c = 1$$

$$4a + 2b + 3c = 4 - x + 2y$$

$$0 < c \leq 0.5$$

In advantageous embodiments, $0.60 \leq x \leq 0.80$, and more preferably $0.65 \leq x \leq 0.75$.

In advantageous embodiments, $c > 0.30$, more preferably $c \geq 0.40$, and still more preferably $c \geq 0.45$.

In advantageous embodiments, $a \leq 0.55$, and more preferably $a \leq 0.45$.

In advantageous embodiments, $b \leq 0.25$, and more preferably $b \leq 0.15$.

In another aspect, the present invention is related to a process for producing a mixed oxide of sodium and transition metals as defined above, said process comprising the steps of:

(a) preparing an aqueous Solution 1 containing a mixture of soluble salts of Mn, Ni and Co;

(b) preparing an aqueous Solution 2 containing a soluble sodium source;

(c) introducing Solutions 1 and 2 simultaneously into a receiving vessel to induce precipitation, wherein the receiving vessel is preferably provided in advance with water;

(d) recovering the precipitate obtained in step (c), and optionally washing it with distilled water;

(e) drying the precipitate obtained through step (d);

(f) combining, in an inert atmosphere, the dried material obtained through step (e) with a further source of sodium in an amount enabling the required stoichiometry for a final composition according to formula (1) of claim 1 to be reached;

(g) calcining the mixture obtained through step (f) for a temperature of at least 700°C and at most 1000°C , preferably at least 800°C and at most 900°C , for a time of at least 1 hour and at most 24 hours, preferably at least 3 hours and at most 12 hours.

Brief Description of the Figures

Figure 1 presents schematic images of crystal structures for P2 and O3 phases for layered Na_xMO_2 .

Figure 2 provides a schematic view of the co-precipitation method in a preferred method of synthesis of mixed oxides of the invention.

Figures 3(a) to 3(e) show X-ray diffraction (XRD) patterns for illustrative exemplary compositions tested experimentally by the present inventors.

Figure 4 is a schematic cross-sectional diagram showing an embodiment of a sodium secondary battery.

Detailed Description of the Invention

In the present invention, a mixed oxide of sodium and transition metals has been developed, and in particular a mixed oxide composition with manganese (Mn), nickel (Ni) and cobalt (Co) as well as sodium (Na). Such a composition with three transition metals can advantageously be used as a positive electrode (cathode) active material in a sodium ion battery, and is considered to deliver excellent electrochemical properties in such a situation compared to mixed oxides with only one or two (transition) metals.

The P2 structure is one of the crystal structure types for a layered oxide. Layered Na_xMO_2 (M: transition metal) are classified into several groups denoted by "letter" and "number" like "P2" or "O3", shown in Figure 1. The letter P or O refers to the site environment of sodium with oxygen (P: prismatic or O: octahedral) and the number indicates the number of MO_2 slabs within the hexagonal cell. For instance, in the P2 type structure, at the heart of the present invention, sodium ions are in trigonal prismatic sites between two MO_2 slabs. The higher ion diffusivity in the trigonal prismatic environment vs. octahedral one is considered to be due to a large diffusion pass for sodium ions. Moreover, oxygen stacking in the P2 phase is very different from the spinel phase which causes battery decay in a high voltage charge process (Na^+

deintercalation). The P2 phase never converts to the spinel phase even though a high amount of Na⁺ intercalates/deintercalates. Based on the high diffusivity and structural stability, P2 type layered oxides are preferred in the present invention.

The P2 structure is sensitive to the sodium amount in the composition. The particular range is $0.5 \leq x \leq 0.9$, preferably $0.6 \leq x \leq 0.8$. If the sodium amount is below or above the limits indicated, the material may convert to unwanted crystal structures such as the O3 phase and/or impurities such as NiO. Therefore, the limitation of sodium amount plays an important role when one wishes to synthesize a P2 structure.

Transition metals in the composition compensate for electron charge during charge and discharge processes. For instance, in the charge process, the electrons are extracted from the positive electrode material and flow to the external circuit. It results in an oxidation of the transition metal ions. Therefore, for the charge compensation, sodium ions are extracted from the inter slab space and move through the electrolyte to the negative electrode where sodium metal is formed.

In the synthesis method of mixed oxide materials of the invention, in principle all of the soluble salts of Co, Ni and Mn can be used. Preferably, nitrates, sulfates, chlorides and acetates of Co, Ni and Mn may be used. For the sodium sources, in principle any soluble sodium compound can be used. Preferred Na materials include sodium carbonate, sodium hydroxide, sodium acetate, sodium nitrate. Sodium carbonate is advantageously used in both steps (b) and (f) of the claimed process.

A schematic view of an illustrative and non-limiting example of a synthesis method of mixed oxide materials of the invention is shown in Figure 2. Two solutions, one made of $\text{Co}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ and $\text{Mn}(\text{NO}_3)_2 \cdot 4\text{H}_2\text{O}$, and another one made of Na_2CO_3 , were simultaneously dropped into a beaker provided with distilled water (about 500 ml of distilled water, for example, in an

illustrative laboratory-scale process). In effect, in this synthesis, it is preferable that water, such as distilled water, be present in advance in the receiving vessel prior to the addition of soluble salts of Co, Ni and Mn on the one hand, and soluble salts of sodium on the other hand. Co-precipitation is preferably carried out using a syringe pusher.

Throughout the co-precipitation, a pH in the region of 7 is maintained without the use of any buffer. An appropriate range of temperature during the reaction is at least 30 °C and at most 80 °C, and an appropriate stirring rate is of at least 500 rpm and at most 800 rpm.

The precipitate formed in the co-precipitation step is typically washed with distilled water, for example 5 times, and then dried, for example at 80°C for two days. The dried powder thus obtained can be mixed with Na₂CO₃ in a glove box filled under argon to reach the required stoichiometry for a final Na_{0.7}[MnNiCo_x]O₂ composition. The mixture can then be calcined, for example at 900 °C for 12 hours in air. Finally, it may be quenched in air down to room temperature.

The Na-Mn-Ni-Co mixed oxide material provided by this invention can be advantageously used as a positive electrode active material in a sodium battery. The sodium battery may be either a primary battery or a secondary battery. Using a sodium secondary battery by way of illustration, a description is given below of a sodium battery which uses the positive electrode active material provided by this invention.

Figure 4 is a schematic cross-sectional diagram showing an embodiment of a sodium secondary battery. As shown in Figure 4, the sodium secondary battery 8 generally has a structure in which an electrolyte layer 3 is disposed between a negative electrode 1 and a positive electrode 2. The negative electrode 1 has a negative electrode active material layer 4 containing a negative electrode active material, and a negative electrode current collector 5 which carries out charge collection for the negative electrode active material

layer 4. The positive electrode 2 has a positive electrode active material layer 6 containing a positive electrode active material, and a positive electrode current collector 7 which carries out charge collection for the positive electrode active material layer 6.

In the following paragraphs, each element of battery structure is explained.

The negative electrode contains a negative electrode active material capable of the insertion and extraction of sodium ions. The negative electrode generally has a negative electrode active material layer which includes at least a negative electrode active material. Where necessary, it may also have a negative electrode current collector which carries out charge collection for the negative electrode active material layer.

Illustrative examples of the negative electrode active material include hard carbon, Na metal and tin.

The negative electrode active material layer may contain only a negative electrode active material or may, in addition to the negative electrode active material, contain also a binder, a conductive material, an electrolyte and the like. For example, in cases where the negative electrode active material is in the form of a sheet or foil, it may be rendered into a negative electrode layer which contains only the negative electrode active material. On the other hand, in cases where the negative electrode active material is in the form of a powder, it may be rendered into a negative electrode layer which includes a binder in addition to the negative electrode active material.

Illustrative examples of the binder include polyvinylidene fluoride (PVdF), polytetrafluoroethylene (PTFE) and styrene-butadiene rubber (SBR). Illustrative examples of the conductive material include carbon materials such as carbon black, activated carbon, carbon fibers (e.g., carbon nanotubes, carbon nanofibers), and graphite.

The positive electrode contains a positive electrode active material

capable of the insertion and extraction of sodium ions. The positive electrode generally has a positive electrode active material layer which includes at least a positive electrode active material. Where necessary, it may also have a positive electrode current collector which carries out charge collection for the positive electrode active material layer.

The positive electrode active material used may be the above-described positive electrode active material of the invention or may be a positive electrode active material produced by the production method of the invention.

As with the negative electrode active material layer, the positive electrode active material layer may contain only a positive electrode active material or may, in addition to the positive electrode active material, contain also a conductive material, a binder, an electrolyte, an electrode catalyst and the like. Because materials similar to those in the negative electrode active material may be used as the conductive material and binder in the positive electrode active material, descriptions of these are omitted below.

In the case of both the negative electrode active material layer and the positive electrode active material layer, the electrode active material layer may be formed by using any suitable coating method, such as dip coating, spray coating, roll coating, doctor blade coating, gravure coating or screen coating, to coat, dry, and optionally roll, slurries containing the respective materials.

The positive electrode current collector and the negative electrode current collector are not subject to any particular limitations with regard to material, structure or shape, provided they are materials which have the desired electron conductivity and which do not give rise to alloying reactions with sodium ion in the environment within the battery.

Illustrative examples of the material making up the positive electrode current collector include metal materials such as stainless steel, nickel, aluminum, iron, titanium and copper, carbon materials such as carbon fibers and carbon paper, and ceramic materials having a high electron conductivity,

such as titanium nitride. It is possible for the battery case to serve also as the positive electrode current collector.

Illustrative examples of the material making up the negative electrode current collector include copper, stainless steel, nickel and aluminum. It is possible for the battery case to serve also as the negative electrode current collector.

The positive electrode current collector and the negative electrode current collector may each be in the form of, for example, a sheet, foil or mesh. Of these, a mesh is preferred.

The electrolyte layer includes at least an electrolyte which enables the conduction of sodium ions between the positive electrode and the negative electrode. An organic electrolyte, a polymer electrolyte or a solid electrolyte may appropriately be used in the batteries using the cathode material of the present invention, based on mixed Na-Mn-Ni-Co oxides.

The electrolyte should be one having sodium ion conductivity and is exemplified by electrolyte solutions, gel-like electrolytes obtained by the gelation of an electrolyte solution with a polymer or the like, and solid electrolytes.

Examples of electrolyte solutions having sodium ion conductivity include electrolyte solutions obtained by dissolving a sodium salt in an aqueous solvent or a nonaqueous solvent.

Illustrative examples of non-aqueous solvent include, but are not particularly limited to, cyclic carbonates such as propylene carbonate (PC), ethylene carbonate (EC) and fluoroethylene carbonate (FEC), cyclic esters such as γ -butyrolactone (GBL), and acyclic carbonates such as dimethyl carbonate (DMC), diethyl carbonate (DEC) and ethyl methyl carbonate (EMC). These non-aqueous solvents may be used singly or two or more may be used in combination. Alternatively, a nitrile compound having a CN group bonded to the end of an acyclic saturated hydrocarbon compound may be used in admixture

with a non-aqueous solvent. By adding a nitrile compound to a non-aqueous solvent-type electrolyte solution, there can be obtained a stable non-aqueous solvent-based electrolyte solution which is stable and does not decompose even in a high potential region.

Illustrative examples of the sodium salt include, but are not particularly limited to, NaPF_6 , NaBF_4 , NaClO_4 , NaCF_3SO_3 , $(\text{CF}_3\text{SO}_2)_2\text{NNa}$, $\text{NaN}(\text{FSO}_2)$ and $\text{NaC}(\text{CF}_3\text{SO}_2)_3$. These sodium salts may be used singly, or two or more may be used in combination. NaPF_6 , which is stable also at high potentials, is especially preferred.

No particular limitation is imposed on the concentration of the sodium salt in the non-aqueous electrolyte solution.

The non-aqueous electrolyte solution may also be used following gelation by the addition of a polymer. The method of gelating the non-aqueous electrolyte solution is exemplified by a method that involves adding a polymer such as polyethylene oxide (PEO), polyacrylonitrile (PAN), PVdF or polymethyl methacrylate (PMMA) to a non-aqueous electrolyte solution.

In cases where an electrolyte solution is used as the electrolyte, insulation between the positive electrode and the negative electrode can be achieved by disposing an insulating porous body as a separator between the positive electrode and the negative electrode, and impregnating the separator with the electrolyte solution. The separator is exemplified by porous membranes such as polyethylene porous membranes and polypropylene porous membranes; and nonwoven fabrics such as resin nonwoven fabrics and glass fiber nonwoven fabrics.

The battery case used to house the negative electrode, the electrolyte layer and the positive electrode may be one having a common shape, such as a coin-like, flat plate-like, tubular or laminate-type battery case.

In batteries having a construction in which laminates of a positive electrode, an electrolyte layer and a negative electrode disposed in this order

are repeatedly stacked in multiple layers, from the standpoint of safety, separators composed of an insulating material can be provided between the adjoining positive and negative electrodes. Illustrative examples of such separators include porous membranes such as polyethylene porous membranes and polypropylene porous membranes; and nonwoven fabrics such as resin nonwoven fabrics and glass fiber nonwoven fabrics.

In addition, terminals serving as connectors to the exterior can be provided on the current collectors for the respective electrodes.

Within the practice of the present invention, it may be envisaged to combine any features or embodiments which have hereinabove been separately set out and indicated to be advantageous, preferable, appropriate or otherwise generally applicable in the practice of the invention. The present description should be considered to include all such combinations of features or embodiments described herein unless such combinations are said herein to be mutually exclusive or are clearly understood in context to be mutually exclusive.

Examples

Table 1 below presents compositions obtained by the co-precipitation method described above and represented schematically in Figure 2.

Table 1

Composition	Phase	Cycle retention
$\text{Na}_{0.7}\text{Mn}_{0.7}\text{Ni}_{0.3}\text{O}_2$	P2	78
$\text{Na}_{0.7}\text{Mn}_{0.55}\text{Ni}_{0.25}\text{Co}_{0.2}\text{O}_2$	P2	90
$\text{Na}_{0.7}\text{Mn}_{0.5}\text{Ni}_{0.2}\text{Co}_{0.3}\text{O}_2$	P2	90
$\text{Na}_{0.7}\text{Mn}_{0.45}\text{Ni}_{0.15}\text{Co}_{0.4}\text{O}_2$	P2	94
$\text{Na}_{0.7}\text{Mn}_{0.40}\text{Ni}_{0.10}\text{Co}_{0.5}\text{O}_2$	P2	96

The structure of these samples were evaluated X-ray diffraction (XRD). XRD patterns were recorded on a diffractometer (D5000, Bruker or Enpyrean Panalytical) equipped with a Cu target. These results are given Figures 3 (a) – (e). All the samples were identified as having a P2 structure without any other crystal phases or impurities. Cell parameter refinements were performed using LeBail method in FullProf program. A summary of cell parameter data is given in Table 2.

Table 2

Composition	A_{hex} (Å)	C_{hex} (Å)	Figure
$\text{Na}_{0.7}\text{Mn}_{0.7}\text{Ni}_{0.3}\text{O}_2$	2.8874 (1)	11.142 (1)	3a
$\text{Na}_{0.7}\text{Mn}_{0.55}\text{Ni}_{0.25}\text{Co}_{0.2}\text{O}_2$	2.8765 (1)	11.053 (1)	3b
$\text{Na}_{0.7}\text{Mn}_{0.5}\text{Ni}_{0.2}\text{Co}_{0.3}\text{O}_2$	2.8696 (1)	11.096 (1)	3c
$\text{Na}_{0.7}\text{Mn}_{0.45}\text{Ni}_{0.15}\text{Co}_{0.4}\text{O}_2$	2.8545 (1)	11.056 (1)	3d
$\text{Na}_{0.7}\text{Mn}_{0.40}\text{Ni}_{0.10}\text{Co}_{0.5}\text{O}_2$	2.8501 (1)	10.997 (1)	3e

It can be seen that the a parameter decreases with increasing Co ratio. The a parameter is strongly related to transition metal radii in the ab plane. The ionic radius Co^{3+} (0.52 Å) is much smaller than for Ni^{2+} (0.69 Å). Therefore, it is assumed that the increase of Co ratio leads to a decrease of the a parameter. In short, this result shows that it is possible to accomplish the exchange between Co and Ni without any unwanted crystal phases or impurities.

The mixed oxides prepared and studied by X-ray diffraction were then tested as cathode active materials. For electrochemical testing, a positive electrode was prepared using a mixture containing 88 wt. % of the active material, 10 wt. % of carbon black as electronic conductor and 2 wt. % of polytetrafluoroethylene (PTFE) as binder. The electrolyte was 1 M NaPF_6 in propylene carbonate with 2 wt.% of fluoroethylene carbonate (FEC) as additive. Electrochemical properties were evaluated in the galvanostatic mode using

VMP-3 (Bio logic). Galvanostatic performances were evaluated at a current rate of C/20 in a range between 1.5 V and 4.3 V. All the cell voltages are given vs. Na⁺/Na redox couple. Cycle performance was evaluated in 10 cycles. The exact cycle retention values are shown in Table 1 above. As mentioned before, the cyclability improved considerably with higher levels of Co. In particular, at Co=0.5, the cycle retention indicates 96 % (improvement 18%). It is believed that the stability of P2 phase at high voltage (above 4.0 V) becomes higher. In fact, the phase transition from P2 to another similar phase would occur above 4.0 V. Such a phase transition may be correlated with low cyclability in the case of compositions having only one or two transition metal cations. Co = 0.5 with Mn and Ni leads to very high cyclability.

Claims

1. Mixed oxide of sodium and transition metals having the formula (1):



wherein:

$$0.5 \leq x \leq 0.9$$

$$-0.1 \leq y \leq 0.1$$

$$a + b + c = 1$$

$$4a + 2b + 3c = 4 - x + 2y$$

$$0 < c \leq 0.5$$

2. Mixed oxide according to claim 1, wherein $0.60 \leq x \leq 0.80$, and preferably $0.65 \leq x \leq 0.75$.
3. Mixed oxide according to claim 1 or 2, wherein $c > 0.30$, preferably $c \geq 0.40$, and more preferably $c \geq 0.45$.
4. Mixed oxide according to any of claims 1 to 3, wherein $0.35 \leq a \leq 0.55$, and preferably $0.40 \leq a \leq 0.45$.
5. Mixed oxide according to any of claims 1 to 4, wherein $0.05 \leq b \leq 0.25$, and preferably $0.10 \leq b \leq 0.15$.
6. Process for producing a mixed oxide of sodium and transition metals according to any of claims 1 to 5, comprising the steps of:
- (a) preparing an aqueous Solution 1 containing a mixture of soluble salts of Mn, Ni and Co;

- (b) preparing an aqueous Solution 2 containing a soluble sodium source;
- (c) introducing Solutions 1 and 2 simultaneously into a receiving vessel to induce precipitation, wherein the receiving vessel is preferably provided in advance with water;
- (d) recovering the precipitate obtained in step (c), and optionally washing it with distilled water;
- (e) drying the precipitate obtained through step (d);
- (f) combining, in an inert atmosphere, the dried material obtained through step (e) with a further source of sodium in an amount enabling the required stoichiometry for a final composition according to formula (1) of claim 1 to be reached;
- (g) calcining the mixture obtained through step (f) for a temperature of at least 700°C and at most 1000 °C, preferably at least 800 °C and at most 900°C, for a time of at least 1 hour and at most 24 hours, preferably at least 3 hours and at most 12 hours.

7. Process according to claim 6, wherein the transition metal salts recited in step (a) include nitrates.
8. Process according to claim 6 or 7, wherein the sodium source recited in steps (b) or (f) includes sodium carbonate (Na_2CO_3).
9. A positive electrode for a sodium ion secondary battery comprising the mixed oxide of sodium and transition metals according to any of claims 1 to 5.
10. A sodium ion secondary battery having the positive electrode for a sodium ion secondary battery according to claim 9, a negative electrode having a negative electrode active material, and an electrolyte.

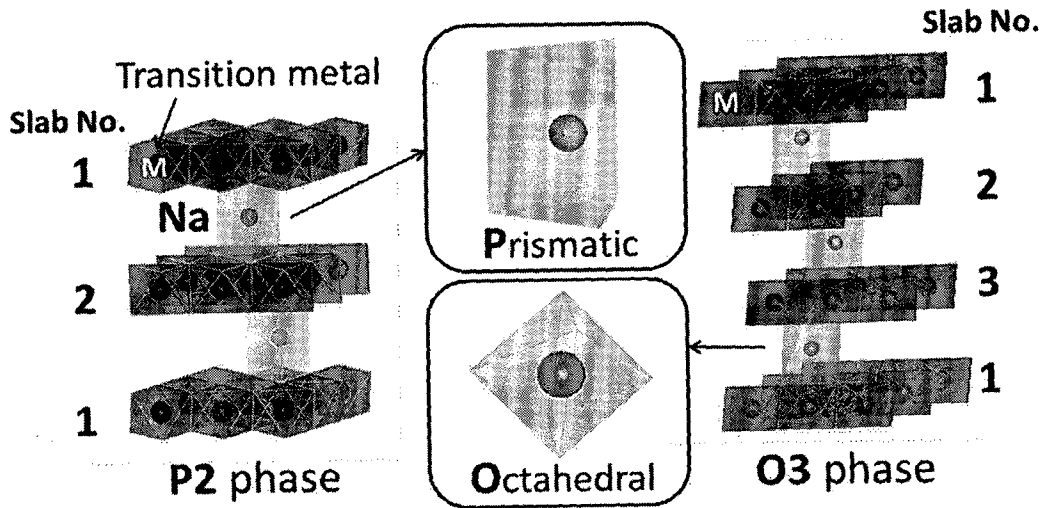


Figure 1

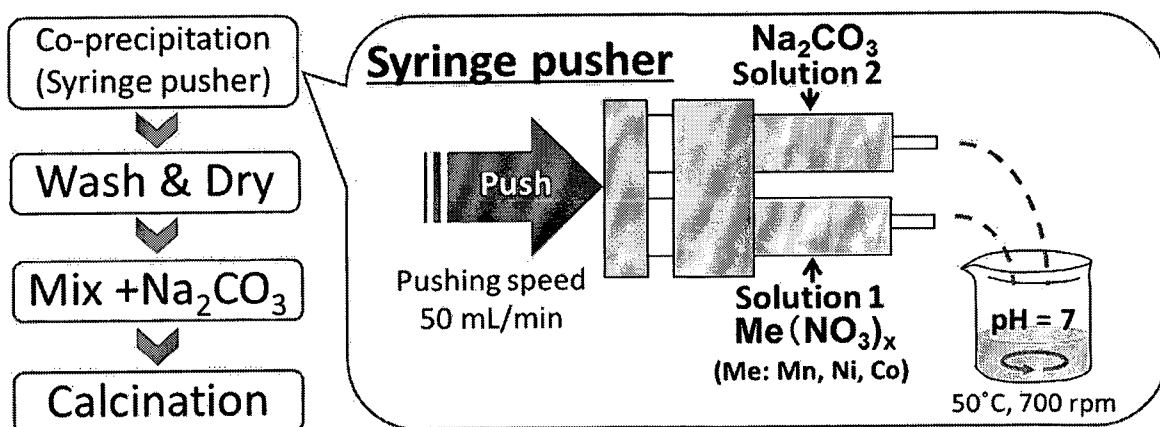


Figure 2

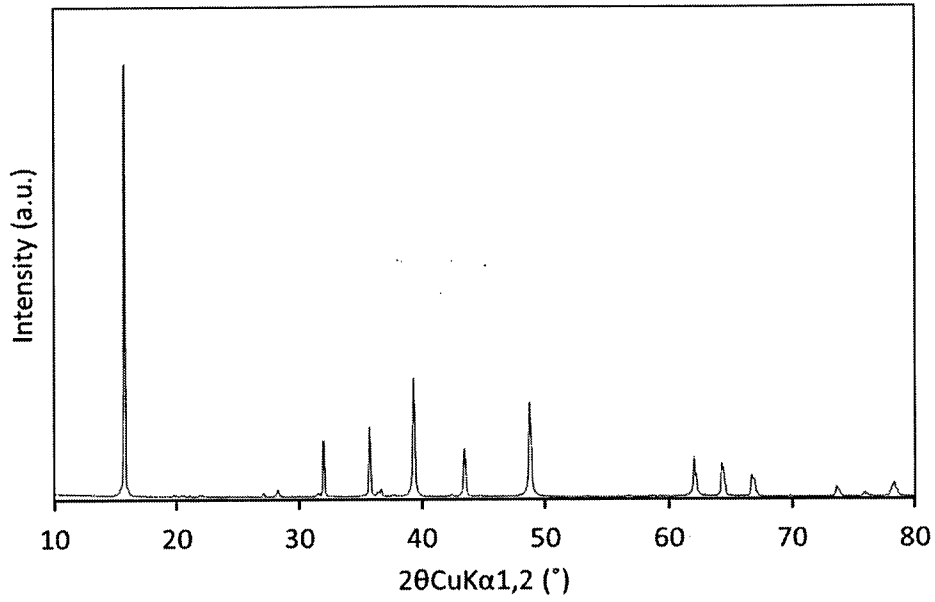


Figure 3a

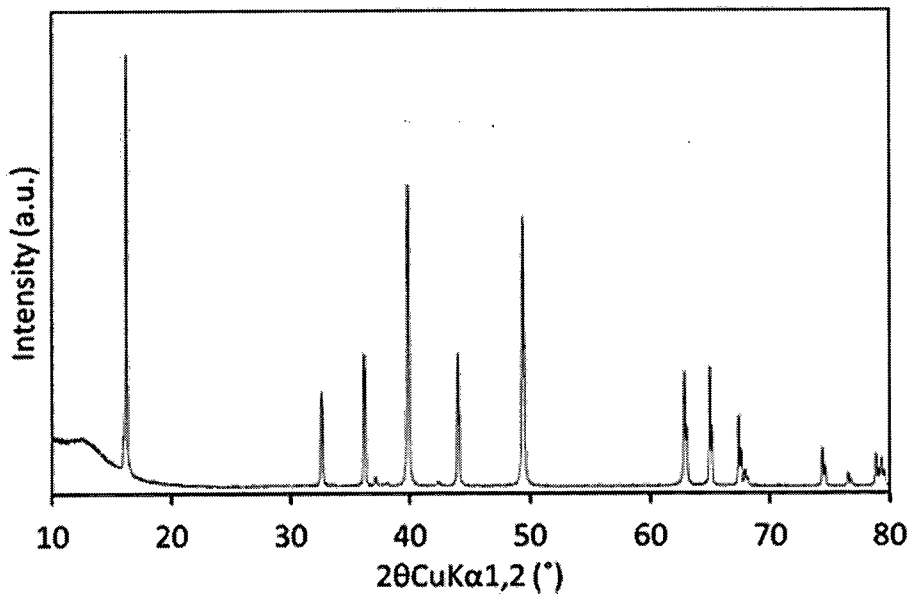


Figure 3b

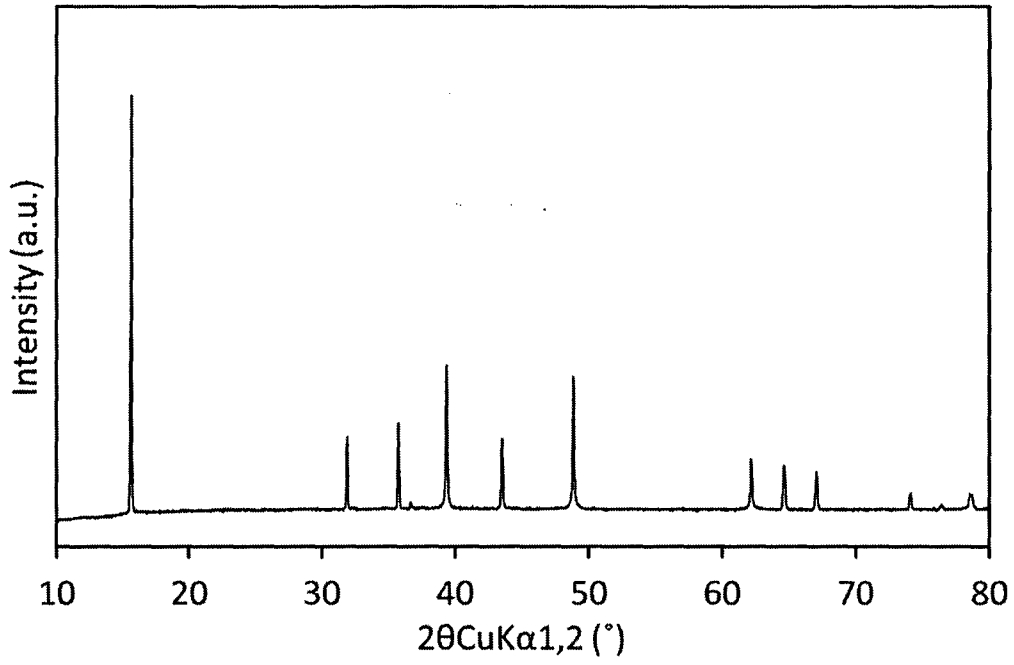


Figure 3c

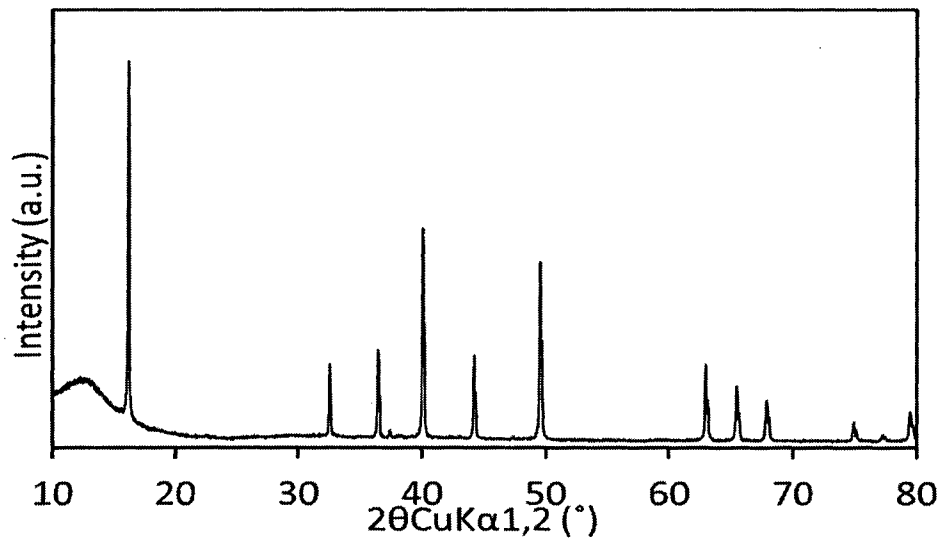


Figure 3d

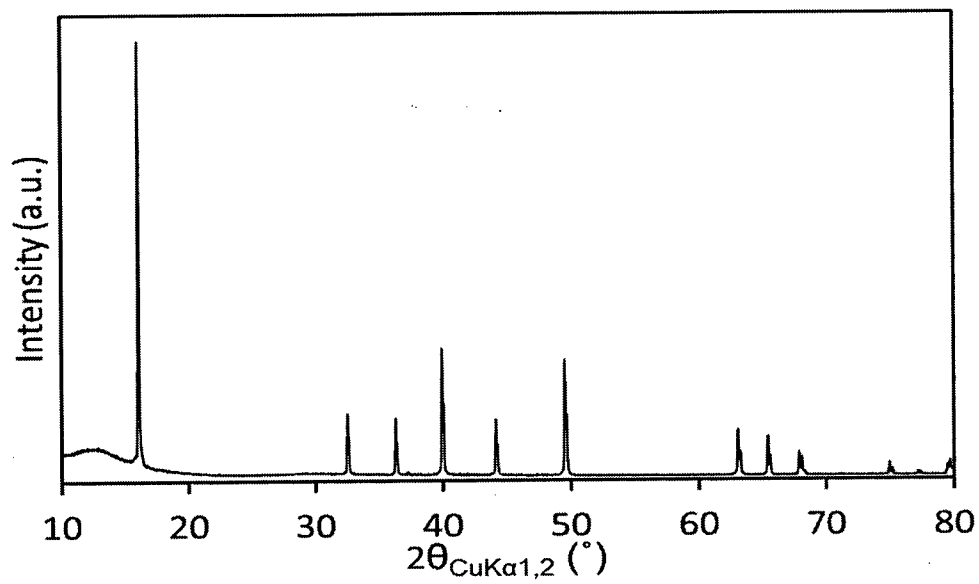


Figure 3e

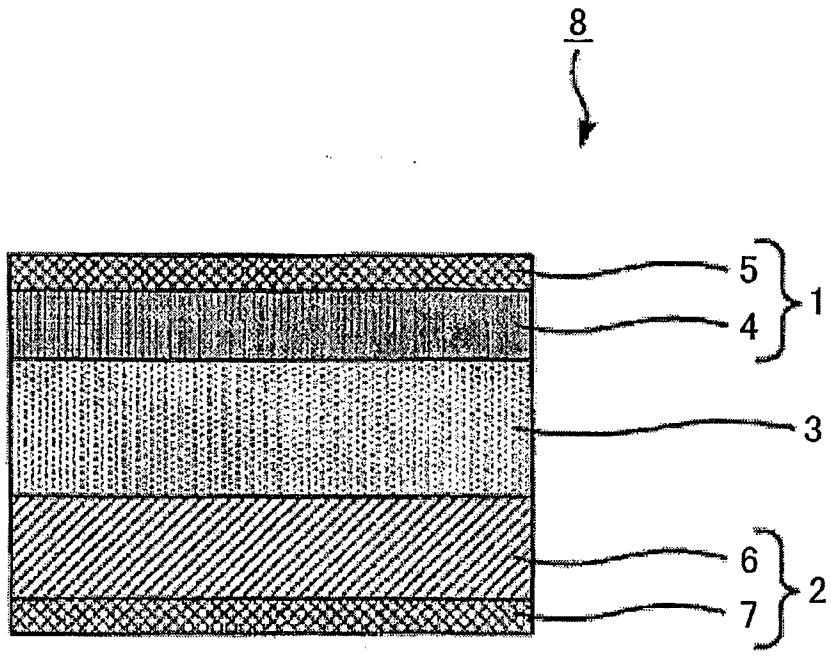


Figure 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2015/001766

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H01M4/505 H01M4/525 H01M10/05
 ADD. H01M4/1391 H01M4/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	US 2008/118829 A1 (NANNO TETSUO [JP]) 22 May 2008 (2008-05-22) page 8, paragraph 0116	1,3,5 6-10 2,4
X Y A	----- EP 2 139 058 A1 (SANYO ELECTRIC CO [JP]) 30 December 2009 (2009-12-30) abstract page 9; table 2	1-3,9,10 6-8 4,5
X Y A	----- WO 2015/097950 A1 (SANYO ELECTRIC CO [JP]) 2 July 2015 (2015-07-02) abstract page 16, paragraph 0060	1,3,4,9, 10 6-8 2,5
X Y	----- JP 2010 129509 A (SANYO ELECTRIC CO) 10 June 2010 (2010-06-10) abstract	1-5,9,10 6-8
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 10 March 2016	Date of mailing of the international search report 21/03/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Kelly, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2015/001766

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2002 220231 A (NAT INST FOR MATERIALS SCIENCE; JAPAN STORAGE BATTERY CO LTD; TODA KOG) 9 August 2002 (2002-08-09) cited in the application	6-10
A	abstract paragraphs [0020] - [0021] -----	1-5
A	US 2014/349177 A1 (CHUNG KYUNG YOON [KR] ET AL) 27 November 2014 (2014-11-27) page 2, paragraph 0033-0045 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2015/001766

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 2008118829	A1	22-05-2008	NONE	

EP 2139058	A1	30-12-2009	AT 544188 T	15-02-2012
			CN 101573813 A	04-11-2009
			EP 2139058 A1	30-12-2009
			JP 4827931 B2	30-11-2011
			KR 20090096534 A	10-09-2009
			US 2010104944 A1	29-04-2010
			WO 2008081839 A1	10-07-2008

WO 2015097950	A1	02-07-2015	NONE	

JP 2010129509	A	10-06-2010	JP 5405091 B2	05-02-2014
			JP 2010129509 A	10-06-2010

JP 2002220231	A	09-08-2002	NONE	

US 2014349177	A1	27-11-2014	KR 20140138474 A	04-12-2014
			US 2014349177 A1	27-11-2014
