



(11) **EP 3 750 449 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

24.07.2024 Bulletin 2024/30

(51) International Patent Classification (IPC):
A47B 91/02 ^(2006.01)

(52) Cooperative Patent Classification (CPC):
A47B 91/028

(21) Application number: **20189775.8**

(22) Date of filing: **27.02.2017**

(54) **COMPACT FRONT REGULATION SYSTEM FOR LEVELING FEET FOR FURNITURE**

KOMPAKTES FRONTREGELUNGSSYSTEM FÜR STELLFÜSSE FÜR MÖBEL

SYSTÈME DE RÉGLAGE AVANT COMPACT POUR METTRE DE NIVEAU DES PIEDS DE MEUBLES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **09.03.2016 IT UA20161495**

(43) Date of publication of application:
16.12.2020 Bulletin 2020/51

(60) Divisional application:
24166382.2 / 4 364 613

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
17707315.2 / 3 426 093

(73) Proprietor: **LEONARDO S.r.l.**
22060 Figino Serenza (CO) (IT)

(72) Inventor: **CATTANEO, Carlo**
22060 Figino Serenza (CO) (IT)

(74) Representative: **Dragotti & Associati S.R.L.**
Via Nino Bixio, 7
20129 Milano (IT)

(56) References cited:
WO-A1-2010/020633 AU-A1- 2009 227 484

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a compact front regulation system for leveling feet for furniture.

[0002] The invention is particularly suitable for effecting the adjustment of rear feet applied to the bottom of the furniture, such as for example in kitchen bases, where the distance between the bottom and the floor is minimum and limited, with difficulty in having front access to the rear feet of the system.

[0003] Various leveling systems are known which, however, involve the provision and assembly of specific transmission rods and adjustment of the rear feet.

[0004] Due to the minimum distance between the bottom of the furniture and the floor, in fact, it is impossible to act with precision and rapidity using a screwdriver or tool that reaches the rear feet. The considerable distance and minimum space available create difficulty in having access to the holes or regulation devices of the rear feet. This leads to the necessity of having guides and extension rods controlled by a screwdriver or similar tool that are guided towards the specific seat of the rear foot. This difficulty is overcome by the provision of transmission rods, for example inside specific guides constrained to the bottom of the furniture, as described for example in EP 2839761.

[0005] These transmission rods are consequently suitably supported in specific separate tubular elements, fixed to the bottom of the furniture, which keep them guided in position and which enable the rear feet to be regulated with a normal screwdriver or tool.

[0006] The presence of separate supports entails that, in order to be installed and reach the feet, these must be arranged tilted with respect to both the actuation and foot, creating difficulty in actuation.

[0007] Alternatively, feet arranged in plaques or connections for supporting the feet are currently provided, wherein said plaques are provided with specific passages and housings specifically destined for housing the above-mentioned transmission rods towards the rear feet, as disclosed for example in Italian patent application MI2011A001872.

[0008] If in this case, the separate supports of the transmission rods are eliminated, the supporting plaques of the front feet must in any case provide passages and housings for the transmission rods.

[0009] Furthermore, the distances necessary for the arrangement of the various parts, not always the same depending on the application, must also be envisaged.

[0010] The elements involved are therefore not only connections or plaques for supporting the feet, but also transmission rods that entail both production and assembly costs.

[0011] Consequently, in the current art, either numerous elements are necessary for forming and actuating the regulation system of the rear feet, or complex plaques or connections must be provided for supporting the front feet with relative rods positioned in the same in order to

eliminate the supports of the transmission rods.

[0012] It should also be taken into account that not all adjustable feet provide for these separate connection plaques, but an integrated connection may be provided and consequently the adjustment should be effected in the presence of any type of foot used.

[0013] AU 2009227484 A1 and WO 2010/020633 relate to regulation systems for leveling feet and actuated with the presence of elongated rods positioned beneath the furniture to intervene on the rear feet.

[0014] The general objective of the present invention is to provide a front regulation system for rear leveling feet for furniture that is particularly simplified with respect to the currently known systems.

[0015] A further objective of the present invention is to provide a front regulation system for rear leveling feet for furniture in which the space beneath the bottom of the furniture is extremely limited with serious access difficulties.

[0016] Another objective of the invention is to provide a regulation system that is suitable for the various configurations of the rear feet used for leveling the furniture.

[0017] Yet another objective is to provide a front regulation system for rear leveling feet for furniture which does not provide any transmission rod for actuating the regulation of the rear feet of the furniture.

[0018] A further objective of the invention is to provide a regulation system for rear feet used for leveling furniture that is particularly compact and minimizes the elements forming it.

[0019] The above objectives are achieved by a system having the characteristics specified in the enclosed claim 1 and subclaims.

[0020] The structural and functional characteristics of the invention, and its advantages with respect to the known art, can be clearly understood from the following description, referring to the enclosed drawings, that illustrate various embodiment examples of the invention itself.

[0021] In the drawings:

- figure 1 is a perspective view illustrating a first example of a compact front regulation system for leveling feet for furniture not produced according to the present invention with an integrated connection to the rear foot provided with a regulation mechanism;
- figure 2 is a perspective view, with some exploded feet, illustrating an example of a regulation system not according to the invention with a rear foot separated from the connection containing a regulation mechanism, and a front foot, also separated from the connection, with direct regulation by rotation;
- figures 3 to 7 are enlarged views of a single rear foot of figure 2 showing it in a perspective view, in a raised view, in a plan view from above and two sectional views;
- figure 8 is a perspective view, with some exploded feet, illustrating a further example of a regulation sys-

tem not according to the present invention similar to that of figure 2;

- figure 9 is a perspective view, with some exploded feet, illustrating a first example of a regulation system according to the invention similar to that of figure 2 with extension rods for the rear foot, and figure 9a is a sectional view of a detail of the system of figure 9;
- figure 10 is a perspective view, with some exploded feet, illustrating a further example of a regulation system according to the invention similar to that of figure 2, and figure 10a is a sectional view of a detail of the system of figure 10;
- figures 11 to 14 are enlarged views of a single front foot of figure 10 showing it in a perspective view, raised view, plan view from above and sectional view;
- figures 15 and 16 are perspective views illustrating further examples of a regulation system according to the invention with rear and front feet separated from the connection and both provided with a regulation mechanism and figures 15a and 16a are sectional views of a detail of the system of figures 15 and 16.

[0022] With reference in general to the drawings, it can be seen that the figures partially illustrate a piece of furniture M, for example a piece of kitchen furniture (base), wherein, in the example shown, shoulders 11 (sides) terminate in correspondence with a bottom 12, i.e. they do not reach the floor (not shown).

[0023] In other embodiments, the shoulders 11 can reach the floor and the bottom 12 can be at a greater height with respect to the edge of the shoulders 11 that are resting on the floor.

[0024] As already indicated, in this type of furniture, the space beneath the bottom must be completely free and it may be impossible to have front access to the adjustable rear feet due to the limited distance between the floor and bottom of the furniture.

[0025] The bottom 12 is destined, in correspondence with the corners with groups of holes (not shown), facing downwards, for the fixing of feet. More specifically, figure 1 shows how, in a first example, front feet 13 are fixed to the bottom 12, which are adjusted directly by rotating an adjustable lower part 14 with respect to an upper integrated connection 15. Rear feet 16, in an upper connection 17 of the same, contain a regulation mechanism in height (not shown and known *per sé*) accessible from the outside and which act on a lower supporting part 18 of the foot for adjusting its height.

[0026] According to the compact front regulation system of the present invention, the front feet 13 are provided with a pass-through hole 20 formed from one side to the other in the upper integrated connection 17. The pass-through hole 20 is preferably produced according to a central axial direction in the above-mentioned connection 17. The rear feet 16 in their upper connection 17 also provide a central hole 21 which gives access and drives

the internal regulation mechanism in height (not shown).

[0027] In this way, in order to effect the adjustment, a tip of a long-stemmed screwdriver 22 or similar tool is simply first passed into the pass-through hole 20 formed in the upper integrated connection 15 of the single front foot 13. Said tip is then inserted into the hole 21 of the single rear foot 16 in the upper connection 17 and this drives the regulation mechanism in height of the rear foot 16.

[0028] The provision of a pass-through hole 20 in the single integrated upper connection 15 of the single front foot 13 represents a guide and provides a safe and correct support for the tip of the long-stemmed screwdriver 22 or similar tool towards the rear foot. This simplifies every adjustment operation of the rear foot also in extremely restricted spaces.

[0029] This provision also allows the elimination of any additional element that serves to guarantee the correct direction or orientation of the screwdriver towards the rear foot, that must be present in the known additional systems in the form of a guide or the like, fixed to the bottom of the furniture.

[0030] The adjustment of the front feet 13 is then effected in the usual way, using a common screwdriver 23 inserted in grooves 24 of the lower adjustable part 14 with respect to an integrated upper connection 15 by means of rotation.

[0031] Figure 2 shows a regulation system not according to the invention, in which the same elements have the same reference numbers.

[0032] In a perspective view applied beneath a bottom 12, in fact, plaques or connections 25 are positioned, the same for all four feet, separate and insertable in the same, i.e. two front feet 26 and two rear feet 27.

[0033] Each front foot 26 has an upper part 28 which can be inserted in a housing 29 of the plaque 25, and a lower part 30 adjustable in height by means of rotation, as seen for the example of figure 1 with the help of a screwdriver 23.

[0034] It should be noted that, according to the invention, the upper part 28 of the front foot 26 has a pass-through hole 41 from one side to the other in its part that is inserted in the plaque 25. Said pass-through hole 41 is aligned with a pass-through hole 42 from one side to the other formed in the body of the plaque 25 close to the housing 29 of the foot 26 (in the example of figure 2 the left front foot of the piece of furniture). It should also be noted that a further pass-through hole 43 is also provided, formed in the body of the plaque 25 at 90° with respect to the previous hole, when the same plaque 25 is assembled on an opposite edge of the furniture M for housing the opposite front right foot.

[0035] Rear feet 27 equipped with a regulation mechanism are also provided. Figures 3 to 8 illustrate an example of this type of rear foot 27 which shows the relation between an upper part 44 and a lower part 45 of the rear foot 27. It is in fact provided that a casing in two half-shells 31, 32 be positioned in a body of the upper part

44 in an axial pass-through hole 46 (vertical in the figures), said casing containing a pinion-toothed crown bevel. A pinion 33 is rotatably positioned inside a hole 34 formed in one of the two half-shells 31, which is aligned with a horizontal holing 35 of the body of the upper part 44. The pinion 33 engages with a toothed crown 36, formed as head of a threaded screw 37, and rotatable in a seat 38 formed in the two coupled half-shells 31 and 32. The threaded screw 37 is in turn positioned in a threaded axial hole 39 and inside a tubular element 40 integral with the lower part 45 of the rear supporting foot 27 on a floor. This lower part 45 of the foot 27 is arranged sliding and adjustable in height with respect to the upper part 44.

[0036] These components so to speak define a leveling group which cooperates in correctly positioning the piece of furniture with respect to the floor or supporting surface by acting on the rear foot 27.

[0037] The hole 35 of the body of the upper part 44 of the rear foot 27 is positioned aligned with the pass-through hole 43 provided in the plaque 25 positioned at the rear for housing the left rear foot in figure 2.

[0038] The rear foot 27 is housed in the housing 29 of the plaque 25 so that the hole 35 is aligned with the hole 43 of the plaque 25. In this way, the tip of a long-stemmed screwdriver 22 or similar tool inserted in the hole of the plaque 25 is inserted in the hole 35 of the rear foot 27 and drives the regulation mechanism of the rear foot 27 itself so as to actuate a regulation in height of the rear foot 27. The same occurs identically and symmetrically for the right rear foot 27 which is shown exploded in figure 2.

[0039] Figure 8 is a perspective view, with some exploded feet, which illustrates a further example of a regulation system not according to the invention similar to that of figure 2. This further example, where the same elements have the same reference numbers, provides, as a variant, that the plaque 25 does not have pass-through or actuation holes of the regulation mechanism.

[0040] The pass-through hole 41, in fact, passes from one side to the other in the front foot 26, in a lower area with respect to that in which it passed in the example of figure 2. More specifically, it passes beneath an abutment flange 47 with respect to the plaque 25 which determines the correct positioning of the front foot 26 or rear foot 27 as preferred, in the respective housing 29 of the plaque 25. Said abutment flange 47 was also present in the example of figure 2 in which the pass-through hole 41 of the front foot 26 was positioned above the same and above the hole 35 of the rear foot 27.

[0041] In this way, with the formation of the holes 35 and 41 beneath the abutment flange 47, there is no need for making holes in the plaques 25.

[0042] The regulation of the rear feet 27 is effected as for the first embodiment example shown in figure 1 with the introduction of the tip of the long-stemmed screwdriver 22 or similar tool, in the hole 41 of the front foot 26, beneath the flange 47, and with the subsequent adjust-

ment action through the hole 35, beneath the flange 47, in the rear foot 27.

[0043] Figure 9 is a perspective view, with some exploded feet, which illustrates a further example of a regulation system according to the invention. This embodiment has the same numbers for the same elements and is similar to that of figure 2 with the provision of an extension rod or transmission rod 48 for actuating the rear foot 27. The transmission rod 48 has an end seat 49 for a tip of a screwdriver 123 having a hexagonal tip for hexagonal seats.

[0044] Said transmission rod 48 is passed through a pass-through hole 42 of the plaque 25 to be positioned in the hole 43 to actuate the regulation mechanism of the rear foot 27. Figure 9a is a sectional view of a detail of the system of figure 9 in correspondence with the front foot 26.

[0045] In this case, it can be seen how the upper part 28 of the front foot 26 has a pass-through groove 41' in its part that is inserted in the plaque 25.

[0046] The transmission rod 48 is blocked in said pass-through groove 41' to allow the adjustment of the rear foot 27.

[0047] The embodiment illustrated in figures 10 and 10a has the same numbers for the same elements and is similar to that illustrated in both figures 2 and 9.

[0048] Unlike figure 2, in fact, it has grooves 41' as in figure 9 instead of holes 41.

[0049] Furthermore, the holes 42 and 43 provided in the plaques 25 are pass-through holes from one side to the other for the passage of a tip of a long-stemmed screwdriver 22 or similar tool for the adjustment of the rear foot 27. The tip or stem of the screwdriver 22 therefore also passes through the grooves 41' of the front feet 26.

[0050] Figures 11 to 14 show the front foot 26 provided with grooves 41' in the upper part 28 of its body.

[0051] Finally, unlike what has so far been illustrated and described, figures 15, 15a, 16 and 16a show embodiments of regulation systems according to the invention with rear and front feet separated from the connection or plaque 25 and both provided with a regulation mechanism. Also in this case, the same elements of the system have the same reference numbers.

[0052] In some respects, these examples are similar to those described and illustrated in figures 9, 9a and 10, 10a, except for the fact indicated above, that the front feet are also provided with an internal regulation mechanism in height.

[0053] With respect to the example of figures 15, 15a, it can be seen that the difference with respect to figures 9, 9a consists in the fact that front feet 127 are modeled on the feet 27 illustrated in figures 3 to 7 with an upward extension of their upper part 44. A groove 141' is formed therein, in which transmission rods 48 are housed and pass, actuated by a screwdriver 123.

[0054] The regulation mechanism of the foot is actuated through the hole 35 underlying the groove 141'.

[0055] Furthermore, the hole 35 of the rear foot 27 allows the adjustment of said foot.

[0056] It can also be seen that a hole 42', 43' must be produced in the plaques 25, under the holes 42, 43 for the passage of the screwdriver 123 which effects the adjustment of the front foot 127.

[0057] With respect to the examples of figures 16, 16a, it can be seen that there is no constructive difference with respect to the example illustrated in figures 15, 15a except that the transmission rods have been eliminated.

[0058] In this case, the actuation of the rear feet is effected directly by means of the screwdriver 22, whereas the actuation of the front feet is effected with the screwdriver 123 having a hexagonal tip which passes into the underlying holes 42'.

[0059] It can thus be seen that the tip of the screwdriver 22 previously described for the actuation of the rear foot 27 is housed and passes in the aligned grooves 141'.

[0060] The groove 141' is therefore superimposed with respect to the actuation hole 35 of the mechanism of the foot.

[0061] In conclusion therefore, the system according to the present invention solves the problems arising from the known systems used.

[0062] Furthermore, the regulation systems for the rear feet are advantageously and significantly simplified by providing a compact front regulation.

[0063] The provision of a pass-through hole in general in the connection or even in the body of the foot provides a guide and safe and correct support for the tip of the long-stemmed screwdriver 22 or similar tool that actuates the adjustment of the rear foot. In this way, all regulation operations of the rear foot are simplified even in extremely restricted spaces.

[0064] This provision also allows the elimination of any additional element that serves to guarantee the correct direction or orientation of the screwdriver that must be present in the known additional systems in the form of a guide or the like, fixed to the bottom of the furniture.

[0065] The adjustment of the front feet is then effected in the usual way, using a common screwdriver.

[0066] In the embodiment examples of the invention illustrated in the figures, the furniture M is provided with a pair of front feet and a pair of rear feet. The principles of the invention, however, can also be applied to a piece of furniture M equipped with only one front foot and one rear foot, consequently also to a piece of furniture M equipped with at least one front foot and at least one rear foot.

[0067] Furthermore, as can be clearly seen in the figures, the openings of the inlet holes of the screwdriver or similar maneuvering tool are flared in order to facilitate the rapid and correct introduction of the tool itself.

[0068] Finally, in the text, the term "foot" may be used for indicating the foot alone, or the foot and its connection to the bottom of the furniture, whether said connection be integrated (in one piece) with the foot itself, or separate from the same.

[0069] The objectives mentioned in the preamble of the description have therefore been achieved.

[0070] The protection scope of the present invention is defined by the enclosed claims.

Claims


1. A compact front regulation system for leveling feet for furniture (M) with a bottom (12) and shoulders (11), of the type comprising, in combination: a pair of front feet (26, 127) and a pair of rear feet (27), wherein said pair of rear feet (27) comprises a regulation mechanism in height which is accessible from outside the pair of rear feet (27) and can be maneuvered by means of a tool (22, 48, 123), wherein said pair of front feet (26, 127) provides a pass-through hole (41', 141', 42, 43) for the passage from one side to the other of a stem of said regulation tool of said pair of rear feet (27), wherein said pass-through hole act as a support and guide for said stem of said tool (22, 48, 123) towards said pair of rear feet (27), wherein connections (25) are provided which can be applied beneath said bottom (12), said connections (25) receive said front feet (26, 127) and said rear feet (27) that can be inserted in the connections (25), wherein said pass-through hole of each of said front feet (26, 127) for said regulation tool (22, 48, 123) of the rear feet (27) is produced as a first pass-through hole (42) in each of said connections (25), and in the form of a pass-through groove (41', 141') in each of said front feet (26, 127), wherein each of said connections (25) provides a second pass-through hole (43), produced in the body of each connection (25) at 90° with respect to said first pass-through hole (42) in correspondence with an edge of said connection (25).
2. The system according to claim 1, **characterized in that** a hole (35) aligned with a regulation mechanism inside the foot, is produced beneath said pass-through groove (141') of said front foot (127).
3. The system according to claim 1, **characterized in that** said front foot (26) is regulated directly by rotating an adjustable lower part (14) of said front foot (26).
4. The system according to one or more of the previous claims, **characterized in that** said front foot (127) provides a regulation mechanism inside the foot.
5. The system according to one or more of the previous claims, **characterized in that** a return rod (48) is positioned in said first pass-through hole (42) of said connection (25).

Patentansprüche

1. Kompaktes vorderes Regulierungssystem für Nivellierfüße für Möbel (M) mit einem Boden (12) und Schultern (11), von dem Typ, die in Kombination umfasst: ein Paar von vorderen Füßen (26, 127) und ein Paar von rückwärtigen Füßen (27), wobei das Paar von rückwärtigen Füßen (27) einen Regulierungsmechanismus in der Höhe umfasst, der von außerhalb des Paares von rückwärtigen Füßen (27) zugänglich ist und mittels eines Werkzeugs (22, 48, 123) manövriert werden kann, wobei das Paar von vorderen Füßen (26, 127) ein Durchgangsloch (41', 141', 42, 43) für den Durchgang von einer Seite zur anderen eines Schafts des Regulierungswerkzeugs des Paares von rückwärtigen Füßen (27) vorsieht, wobei das Durchgangsloch als eine Stütze und Führung für den Schaft des Werkzeugs (22, 48, 123) in Richtung des Paares von rückwärtigen Füßen (27) wirkt, wobei Verbindungen (25) vorgesehen sind, die unter dem Boden (12) angebracht werden können, wobei die Verbindungen (25) die vorderen Füße (26, 127) und die rückwärtigen Füße (27), die in die Verbindungen (25) eingesetzt werden können, aufnehmen, wobei das Durchgangsloch jedes der vorderen Füße (26, 127) für das Regulierungswerkzeug (22, 48, 123) der rückwärtigen Füße (27) als ein erstes Durchgangsloch (42) in jeder der Verbindungen (25) und in der Form einer Durchgangsnut (41', 141') in jedem der vorderen Füße (26, 127) hergestellt ist, wobei jede der Verbindungen (25) ein zweites Durchgangsloch (43) vorsieht, das in dem Körper jeder Verbindung (25) unter 90° in Bezug auf das erste Durchgangsloch (42) in Übereinstimmung mit einem Rand der Verbindung (25) hergestellt ist.
2. System nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Loch (35), das mit einem Regulierungsmechanismus innerhalb des Fußes ausgerichtet ist, unter der Durchgangsnut (141') des Vorderfußes (127) hergestellt ist.
3. System nach Anspruch 1, **dadurch gekennzeichnet, dass** der Vorderfuß (26) direkt durch Drehen eines einstellbaren unteren Teils (14) des Vorderfußes (26) reguliert wird.
4. System nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Vorderfuß (127) einen Regulierungsmechanismus innerhalb des Fußes vorsieht.
5. System nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** eine Rückholstange (48) in dem ersten Durchgangsloch (42) der Verbindung (25) positioniert ist.

Revendications

1. Système de réglage avant compact pour mettre à niveau des pieds pour meubles (M) avec un fond (12) et des épaules (11), du type comprenant, en combinaison : une paire de pieds avant (26, 127) et une paire de pieds arrière (27), dans lequel ladite paire de pieds arrière (27) comprend un mécanisme de réglage en hauteur qui est accessible de l'extérieur de la paire de pieds arrière (27) et peut être manœuvré au moyen d'un outil (22, 48, 123), dans lequel ladite paire de pieds avant (26, 127) fournit un trou traversant (41', 141', 42, 43) pour le passage d'un côté à l'autre d'une tige dudit outil de réglage de ladite paire de pieds arrière (27), dans lequel ledit trou traversant sert de support et de guide pour ladite tige dudit outil (22, 48, 123) vers ladite paire de pieds arrière (27), dans lequel des connexions (25) sont prévues qui peuvent être appliquées sous ledit fond (12), lesdites connexions (25) reçoivent lesdits pieds avant (26, 127) et lesdits pieds arrière (27) qui peuvent être insérés dans les connexions (25), dans lequel ledit trou traversant de chacun desdits pieds avant (26, 127) pour ledit outil de réglage (22, 48, 123) des pieds arrière (27) est produit comme un premier trou traversant (42) dans chacune desdites connexions (25), et sous la forme d'une rainure traversante (41', 141') dans chacun desdits pieds avant (26, 127), dans lequel chacune desdites connexions (25) fournit un second trou traversant (43), produit dans le corps de chaque connexion (25) à 90° par rapport audit premier trou traversant (42) en correspondance avec un bord de ladite connexion (25).
2. Système selon la revendication 1, **caractérisé en ce qu'un** trou (35) aligné avec un mécanisme de réglage à l'intérieur du pied, est produit sous ladite rainure traversante (141') dudit pied avant (127).
3. Système selon la revendication 1, **caractérisé en ce que** ledit pied avant (26) est régulé directement en faisant tourner une partie inférieure réglable (14) dudit pied avant (26) .
4. Système selon une ou plusieurs des revendications précédentes, **caractérisé en ce que** ledit pied avant (127) fournit un mécanisme de réglage à l'intérieur du pied.
5. Système selon une ou plusieurs des revendications précédentes, **caractérisé en ce qu'une** tige de retour (48) est positionnée dans ledit premier trou traversant (42) de ladite connexion (25).

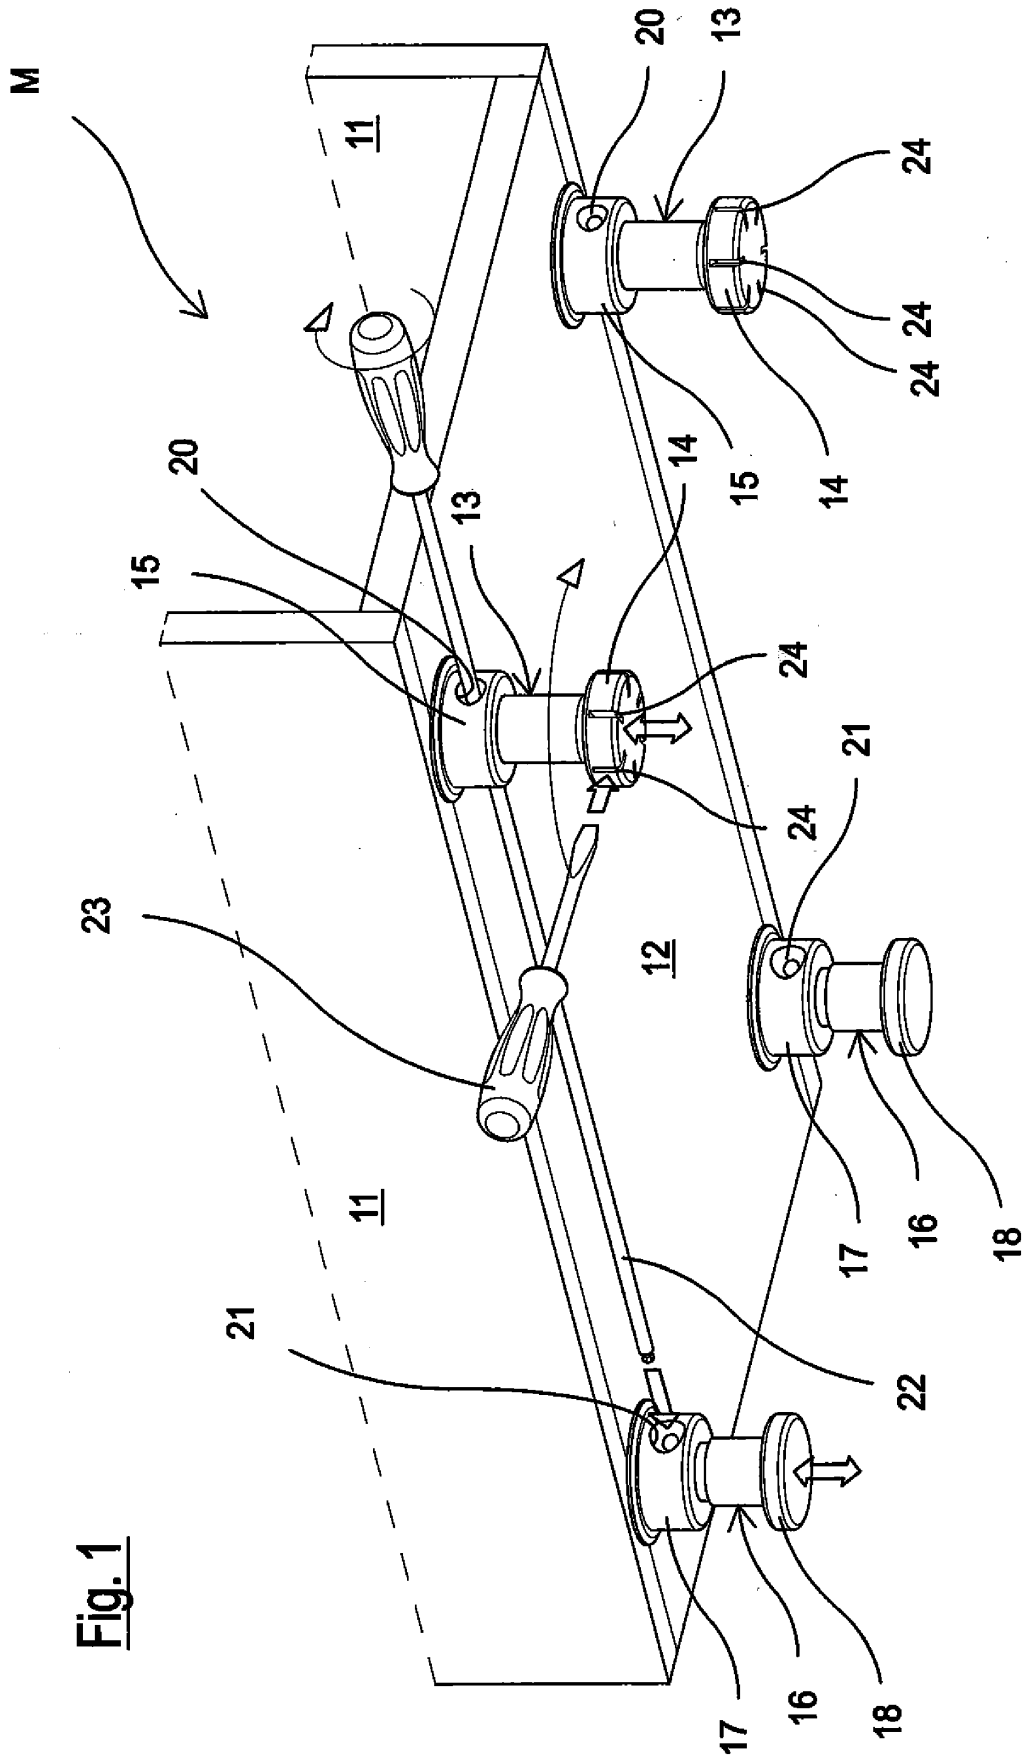

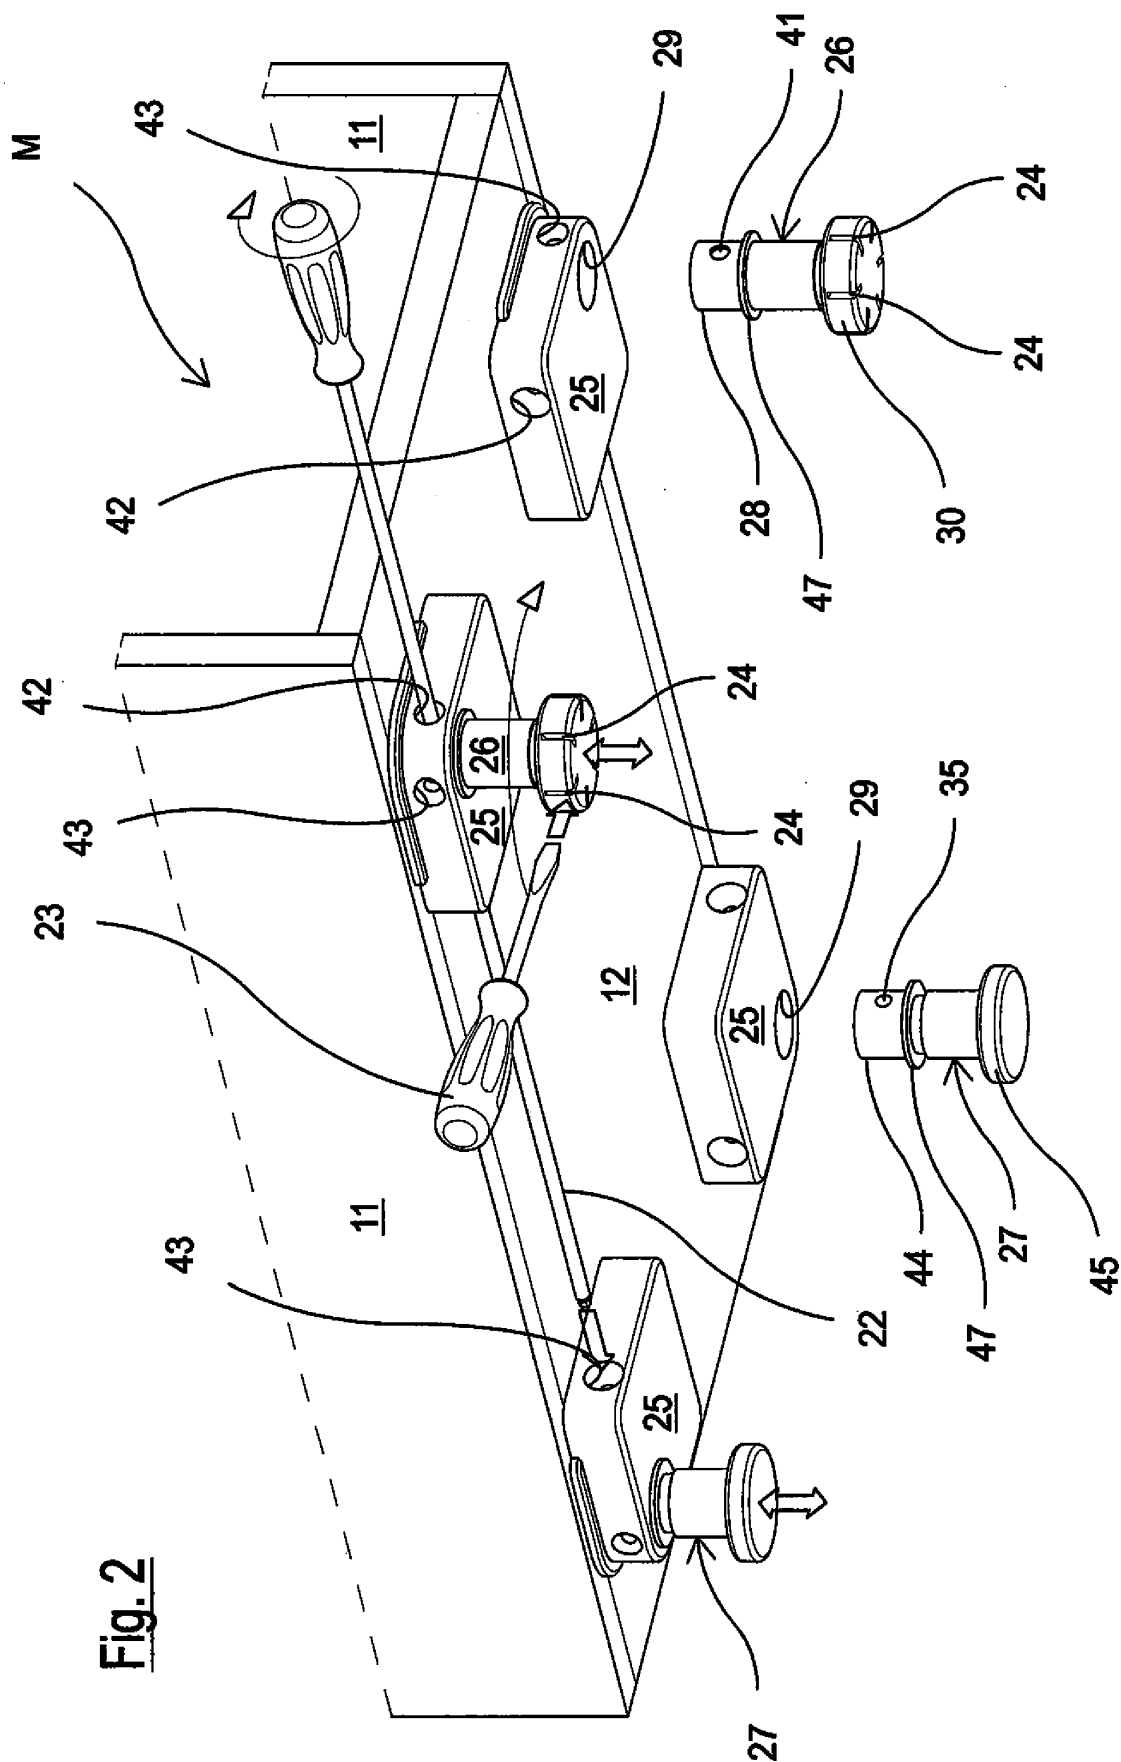
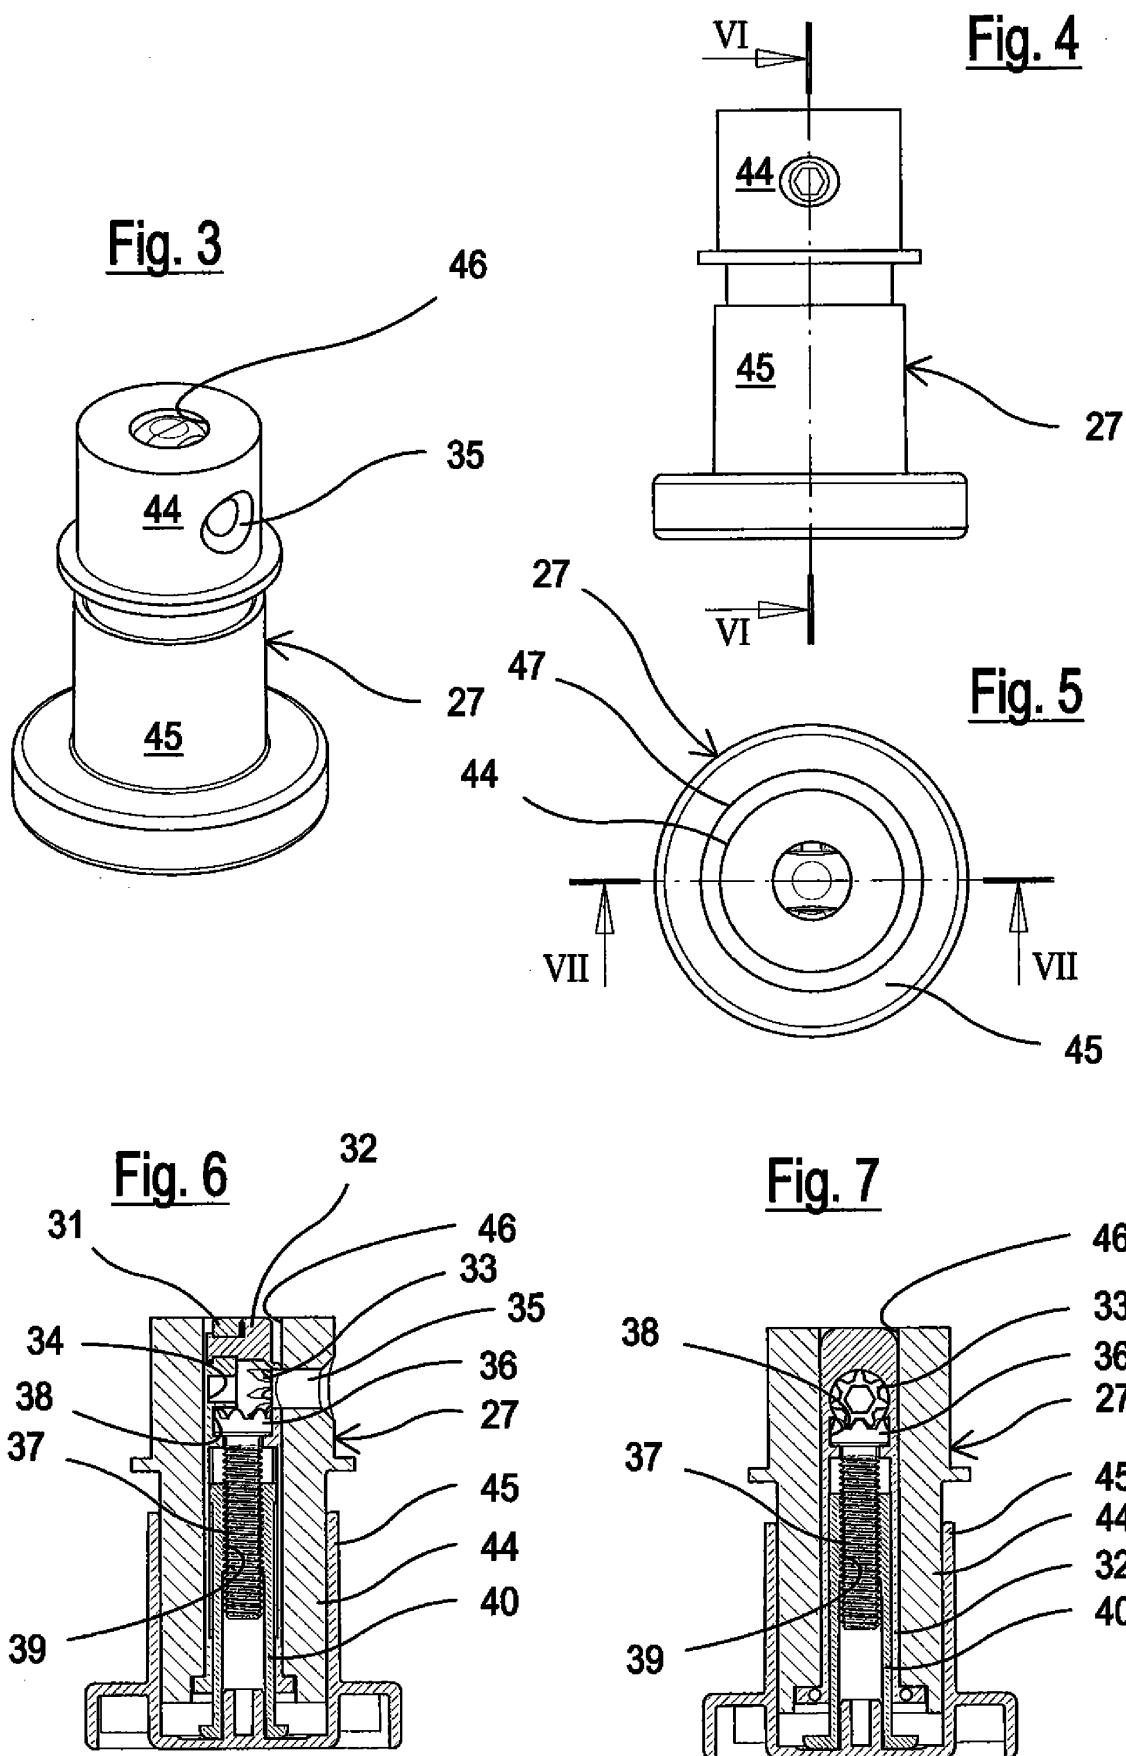


Fig. 2



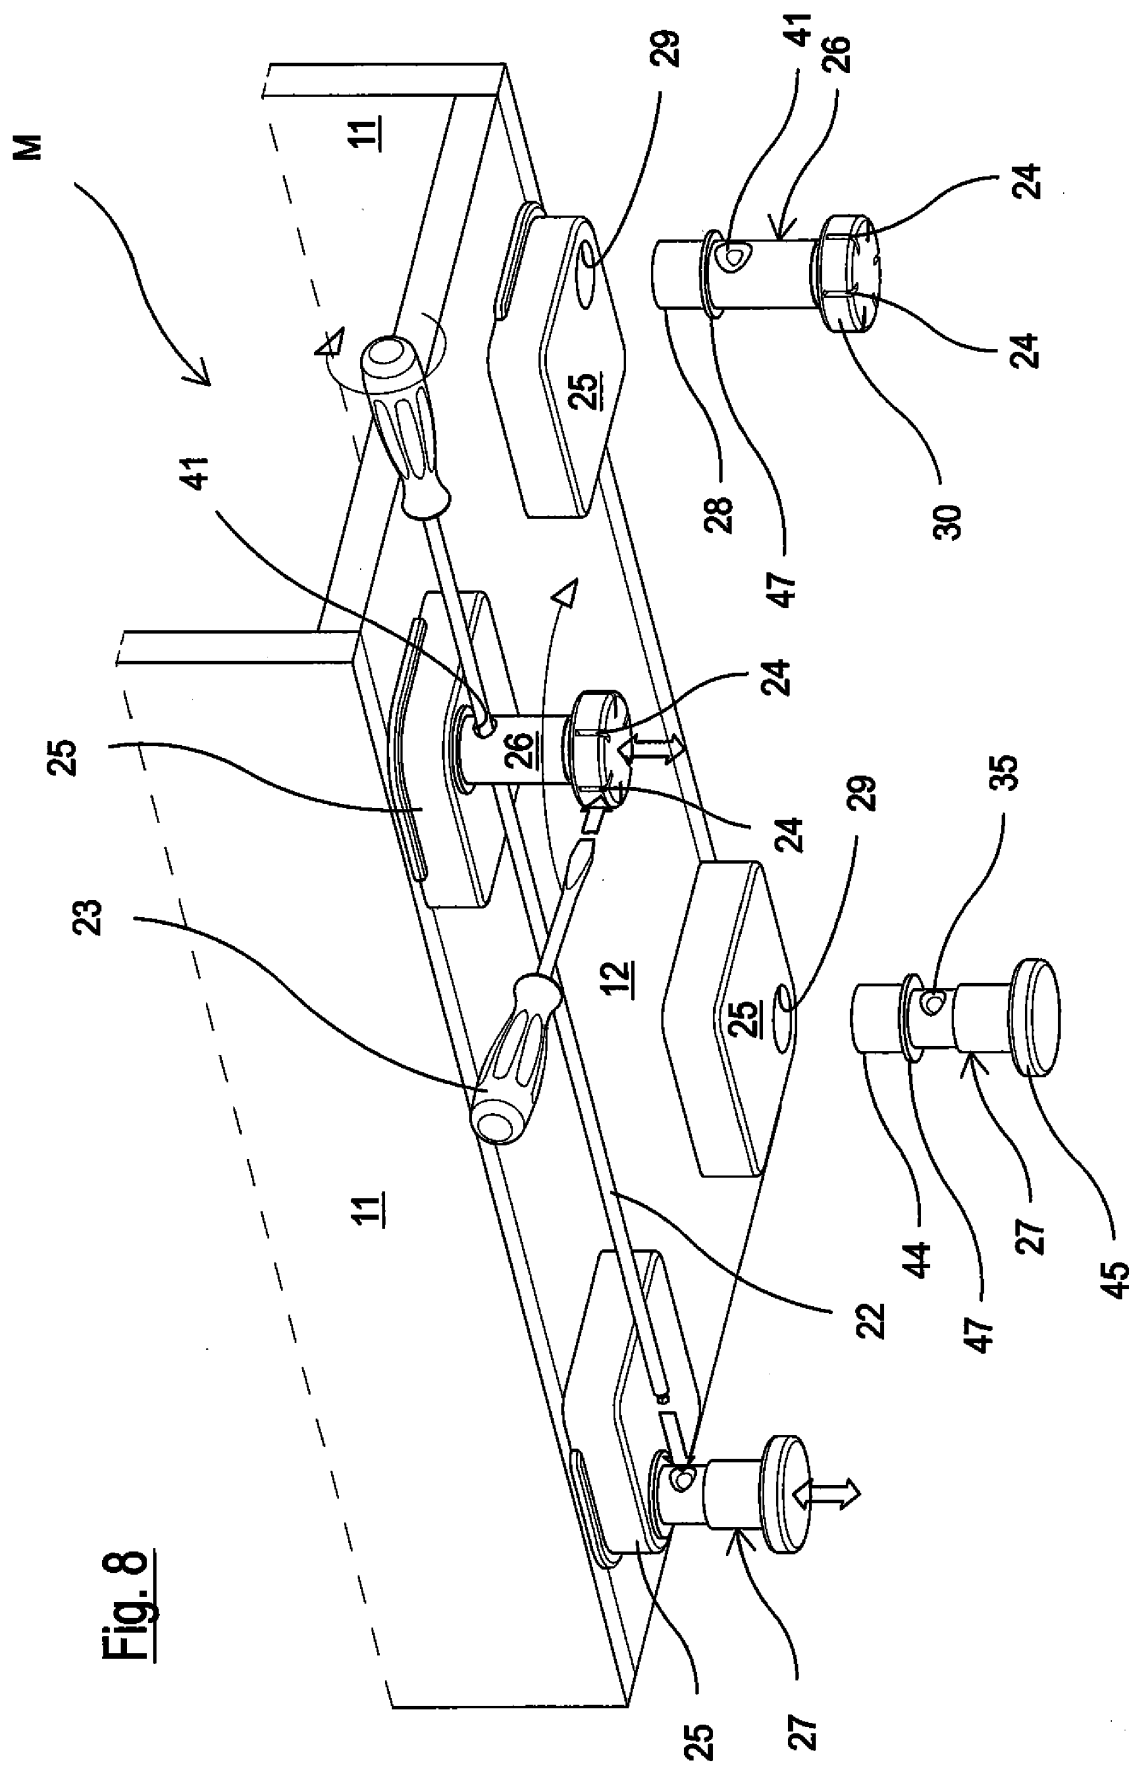


Fig. 9a

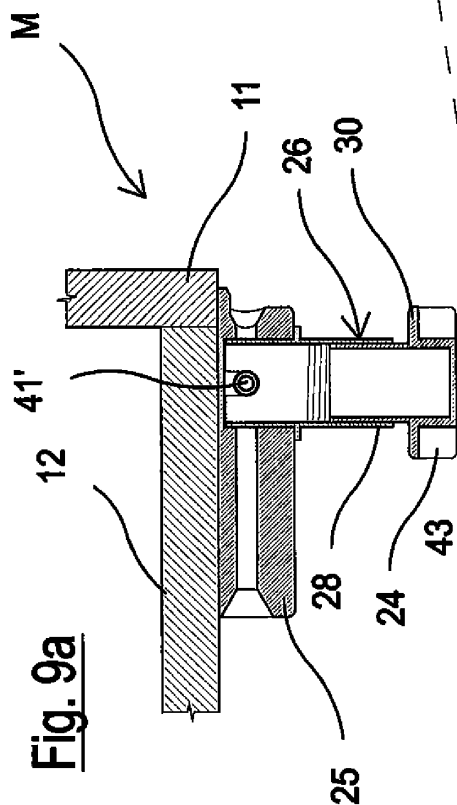
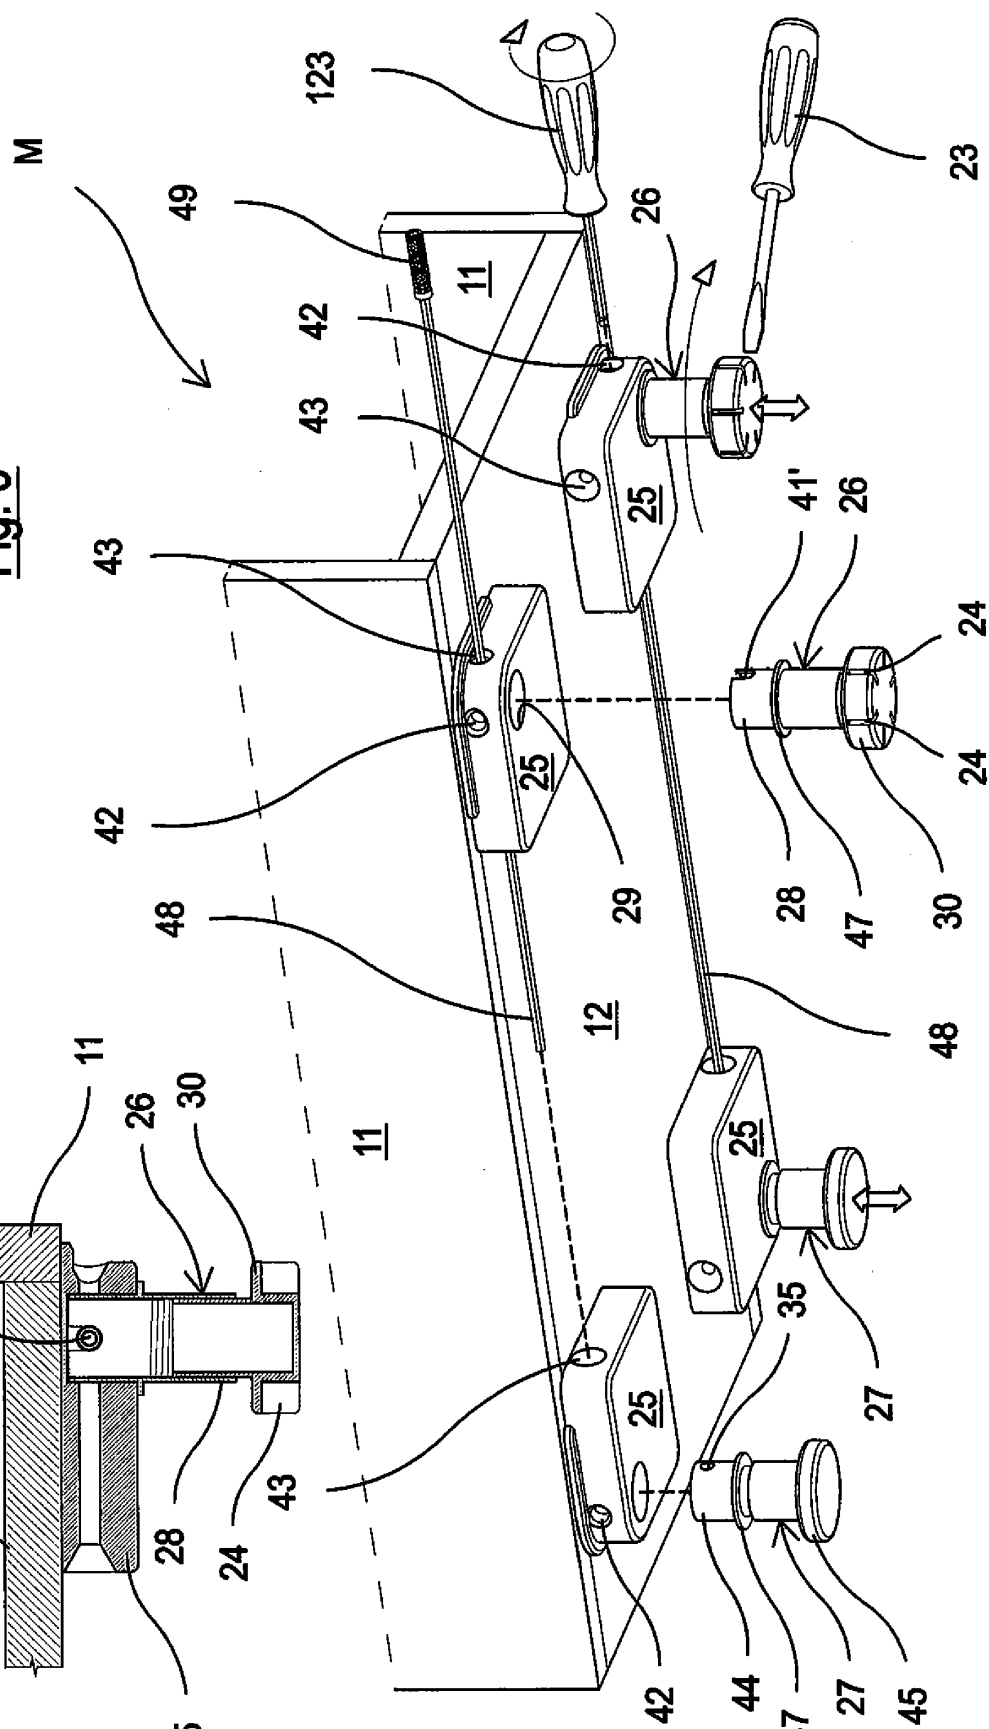
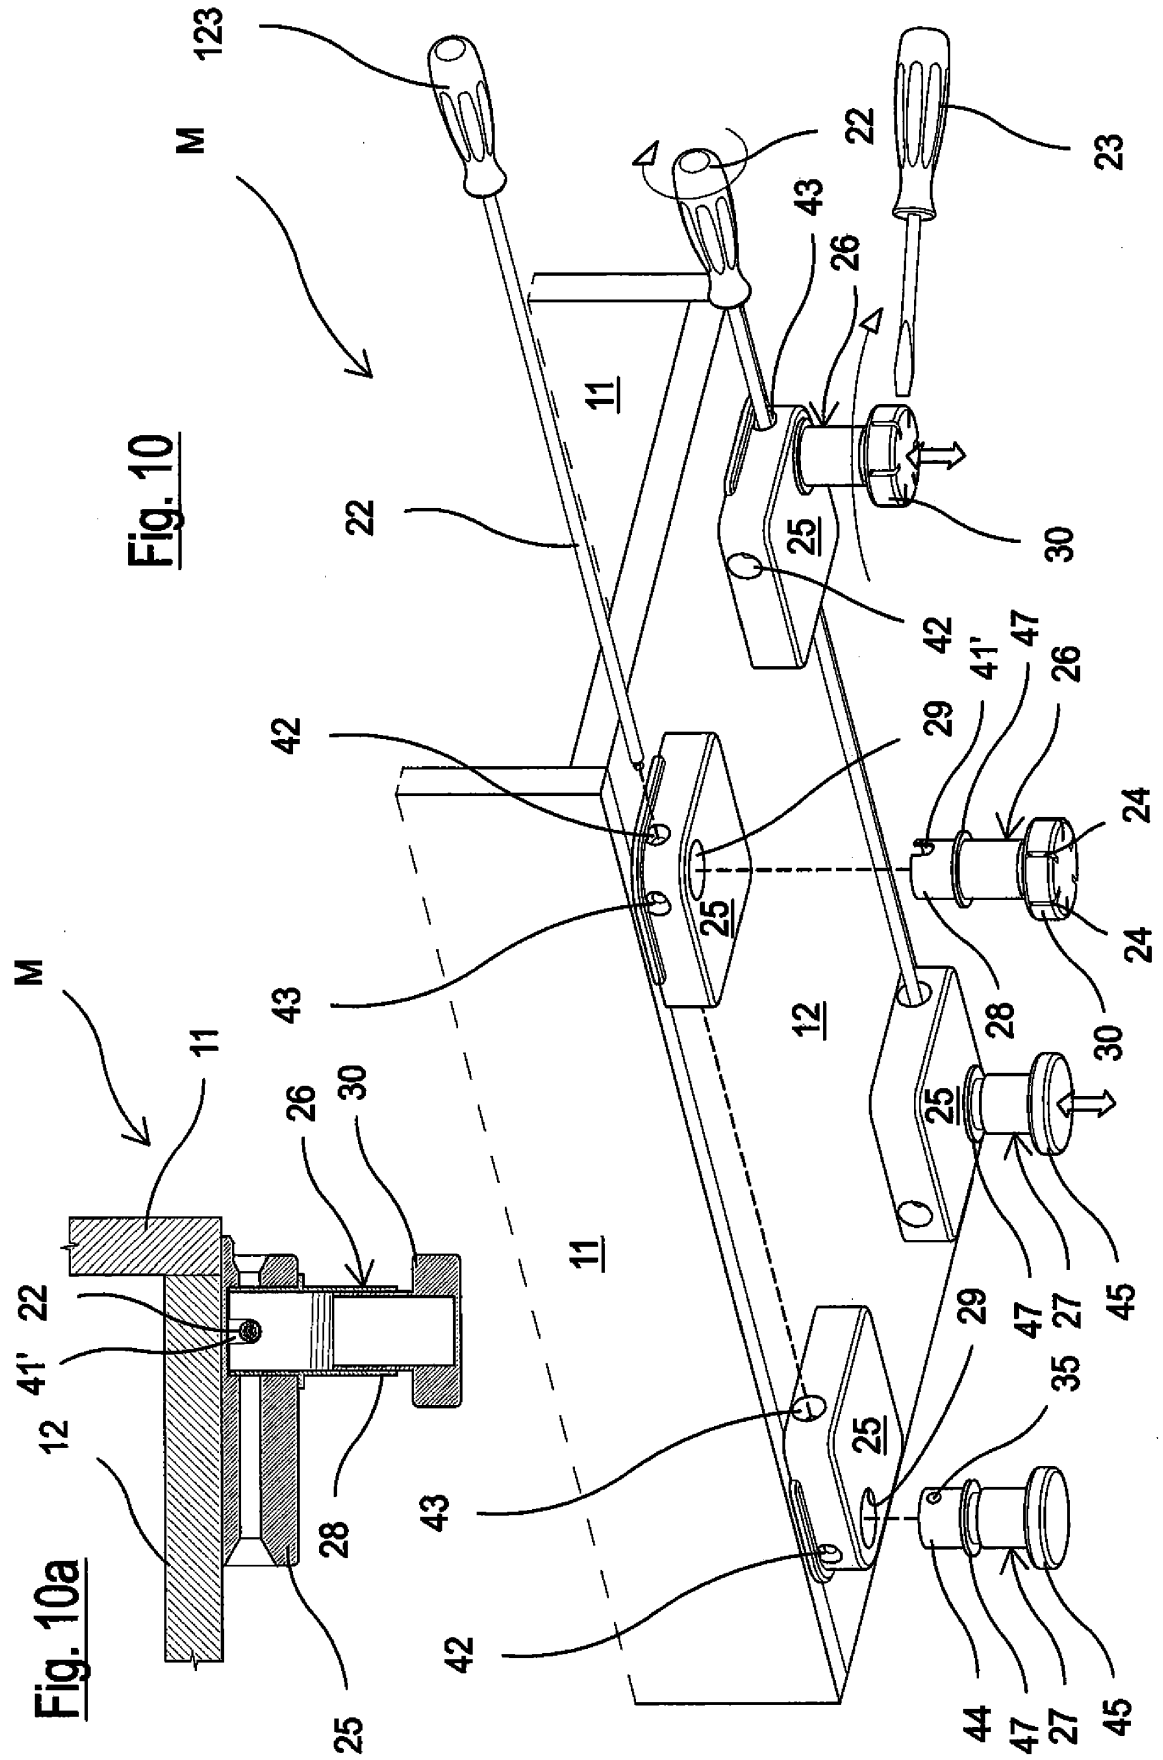


Fig. 9





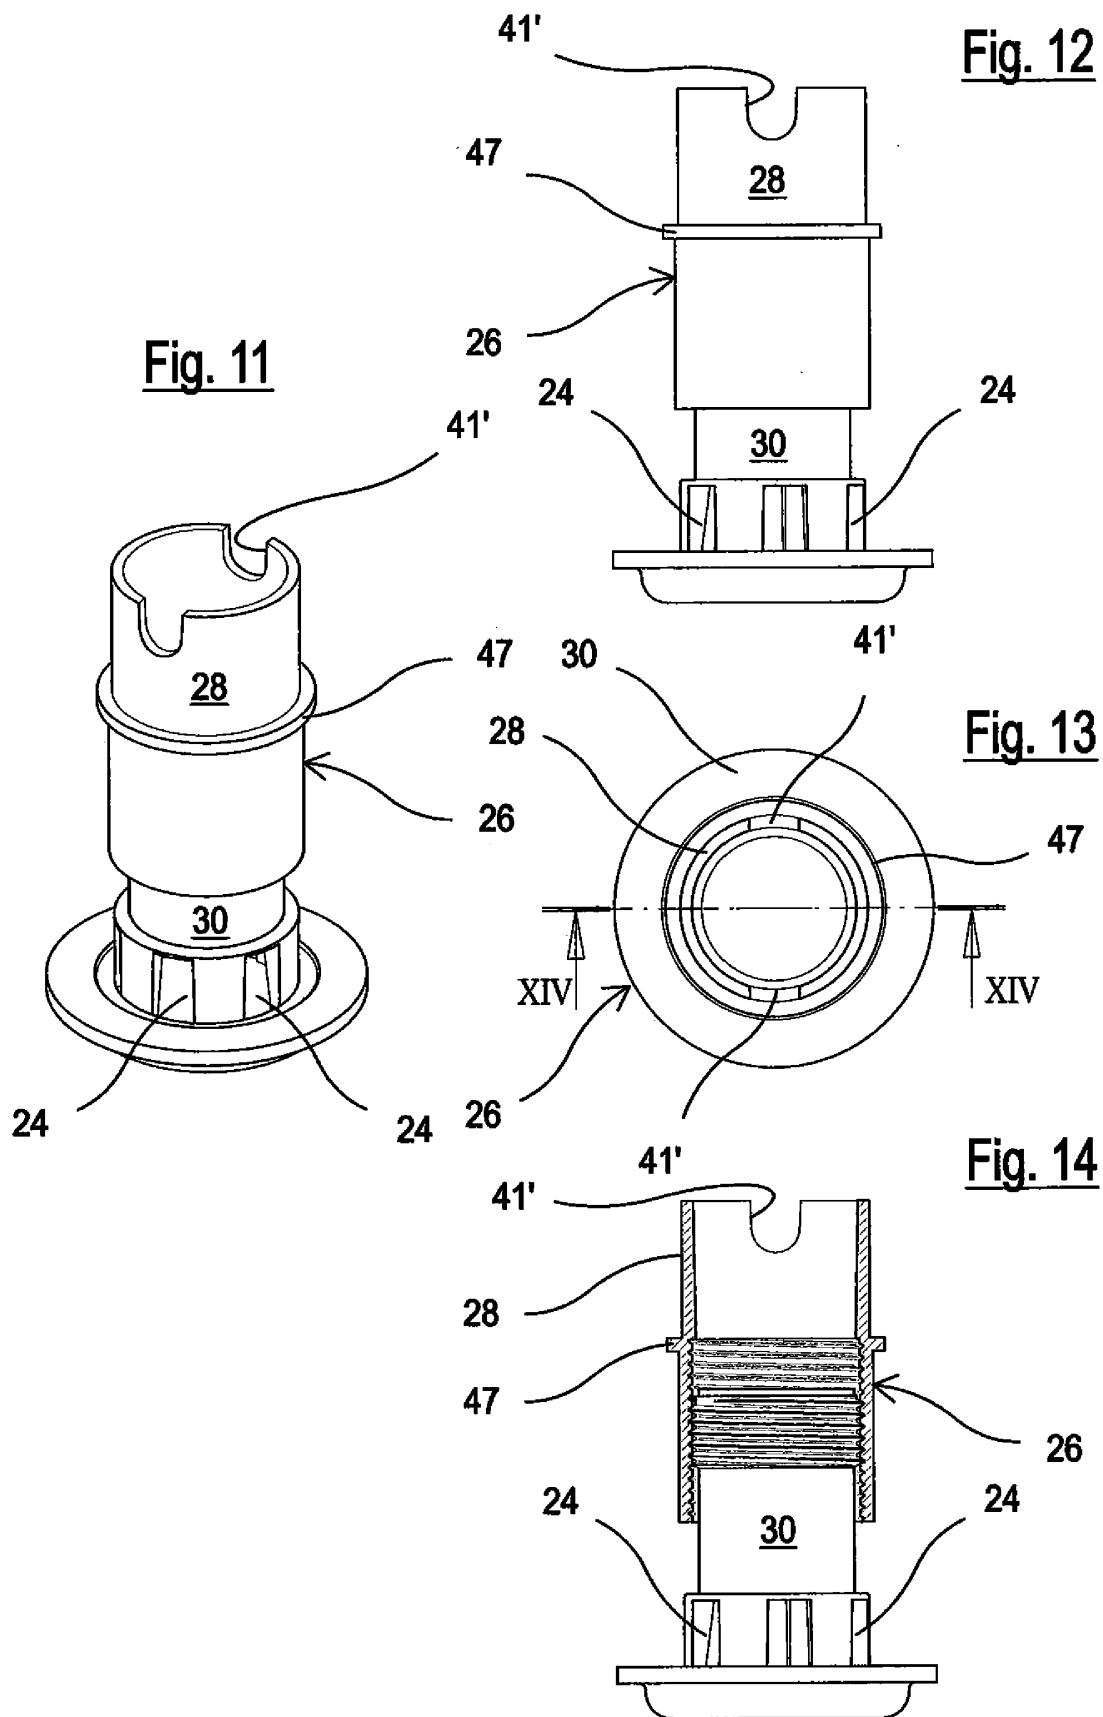


Fig. 15a

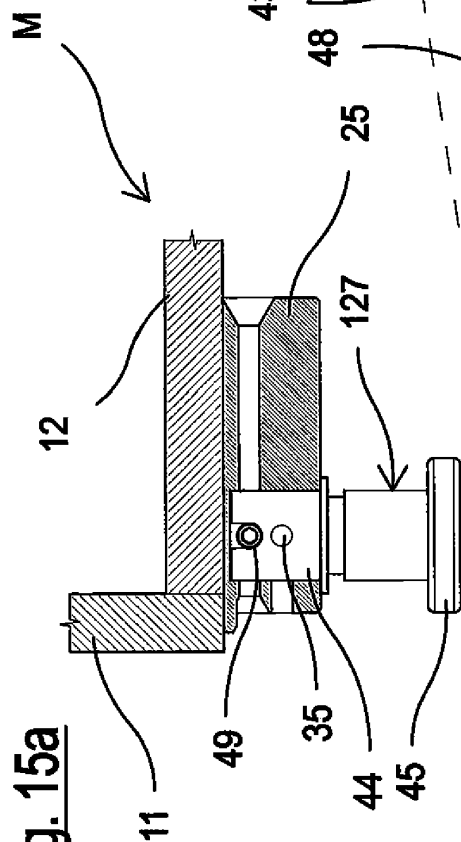


Fig. 15

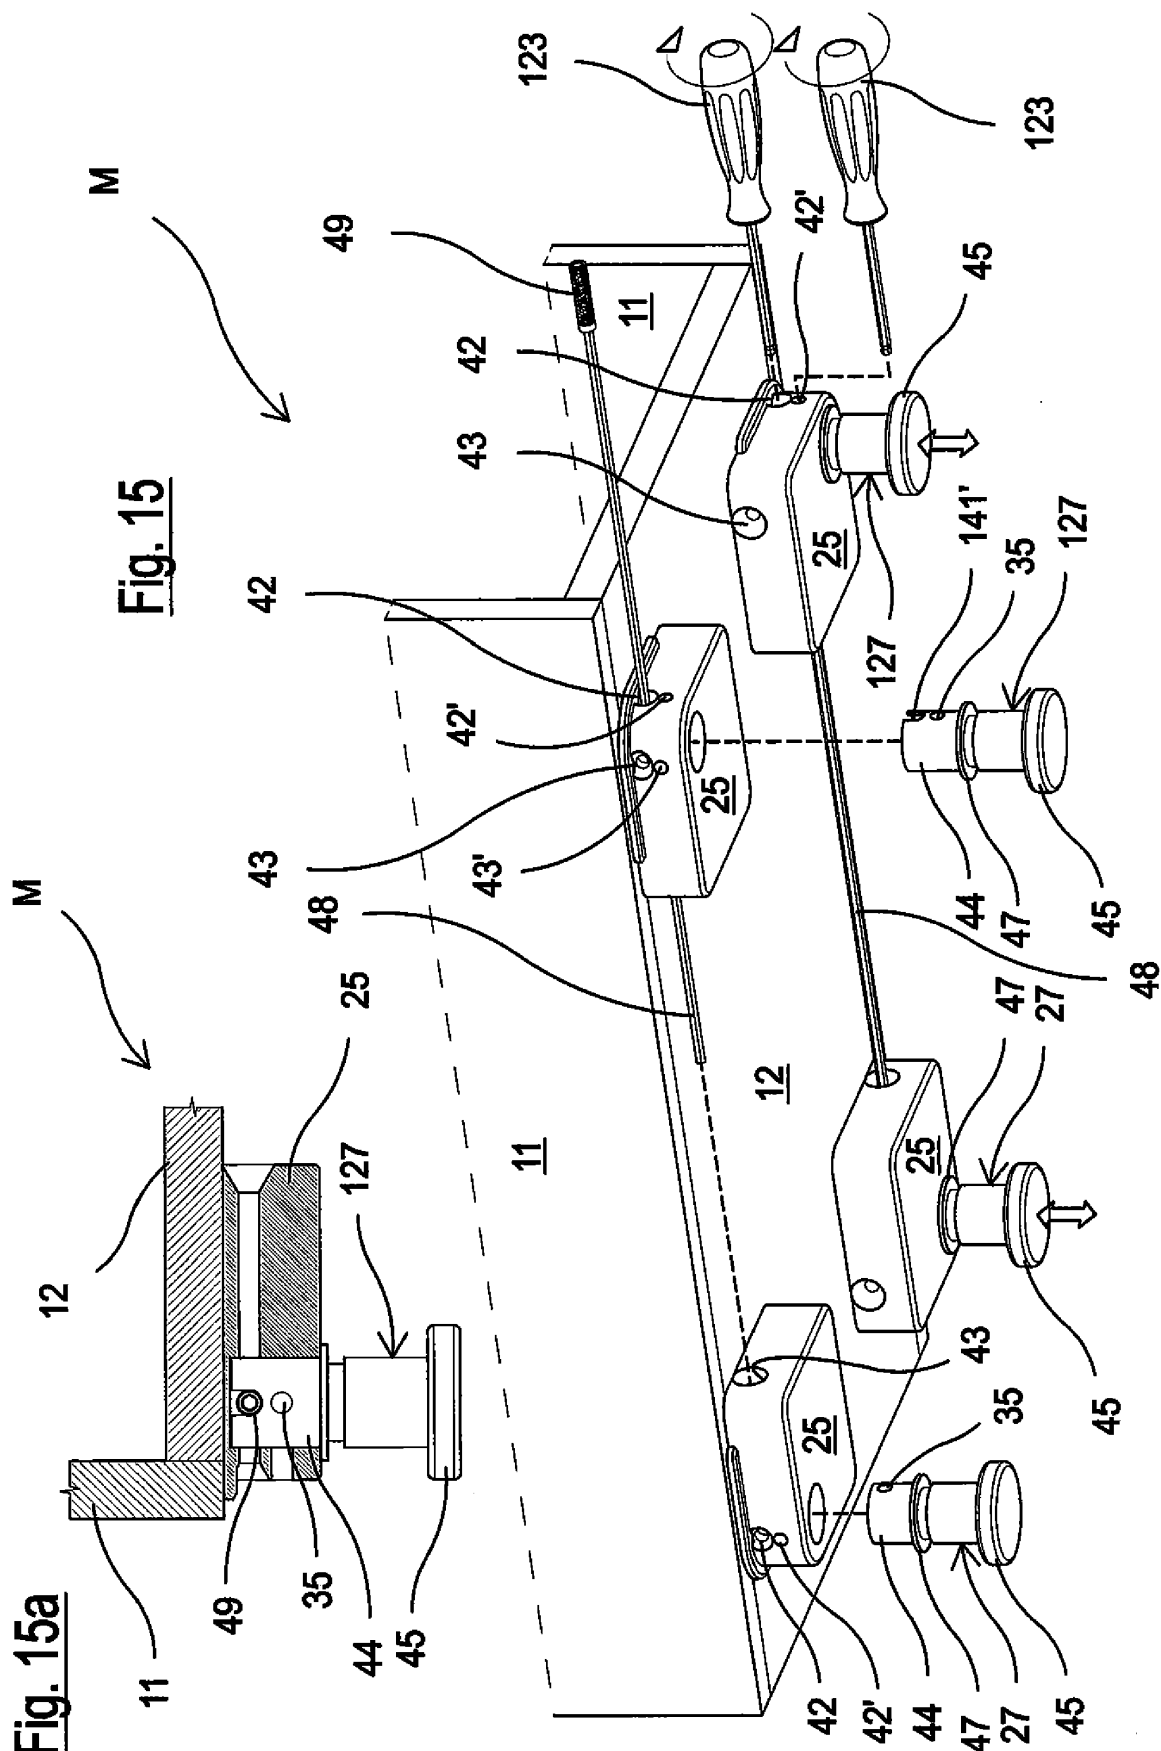


Fig. 16a


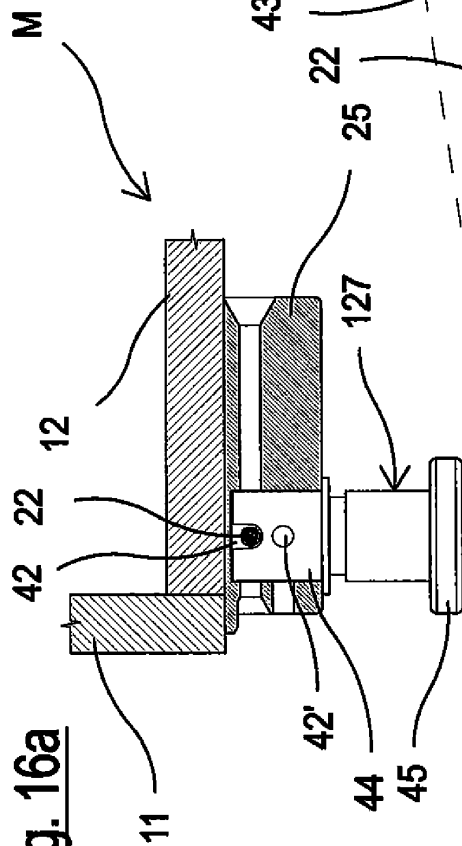


Fig. 16

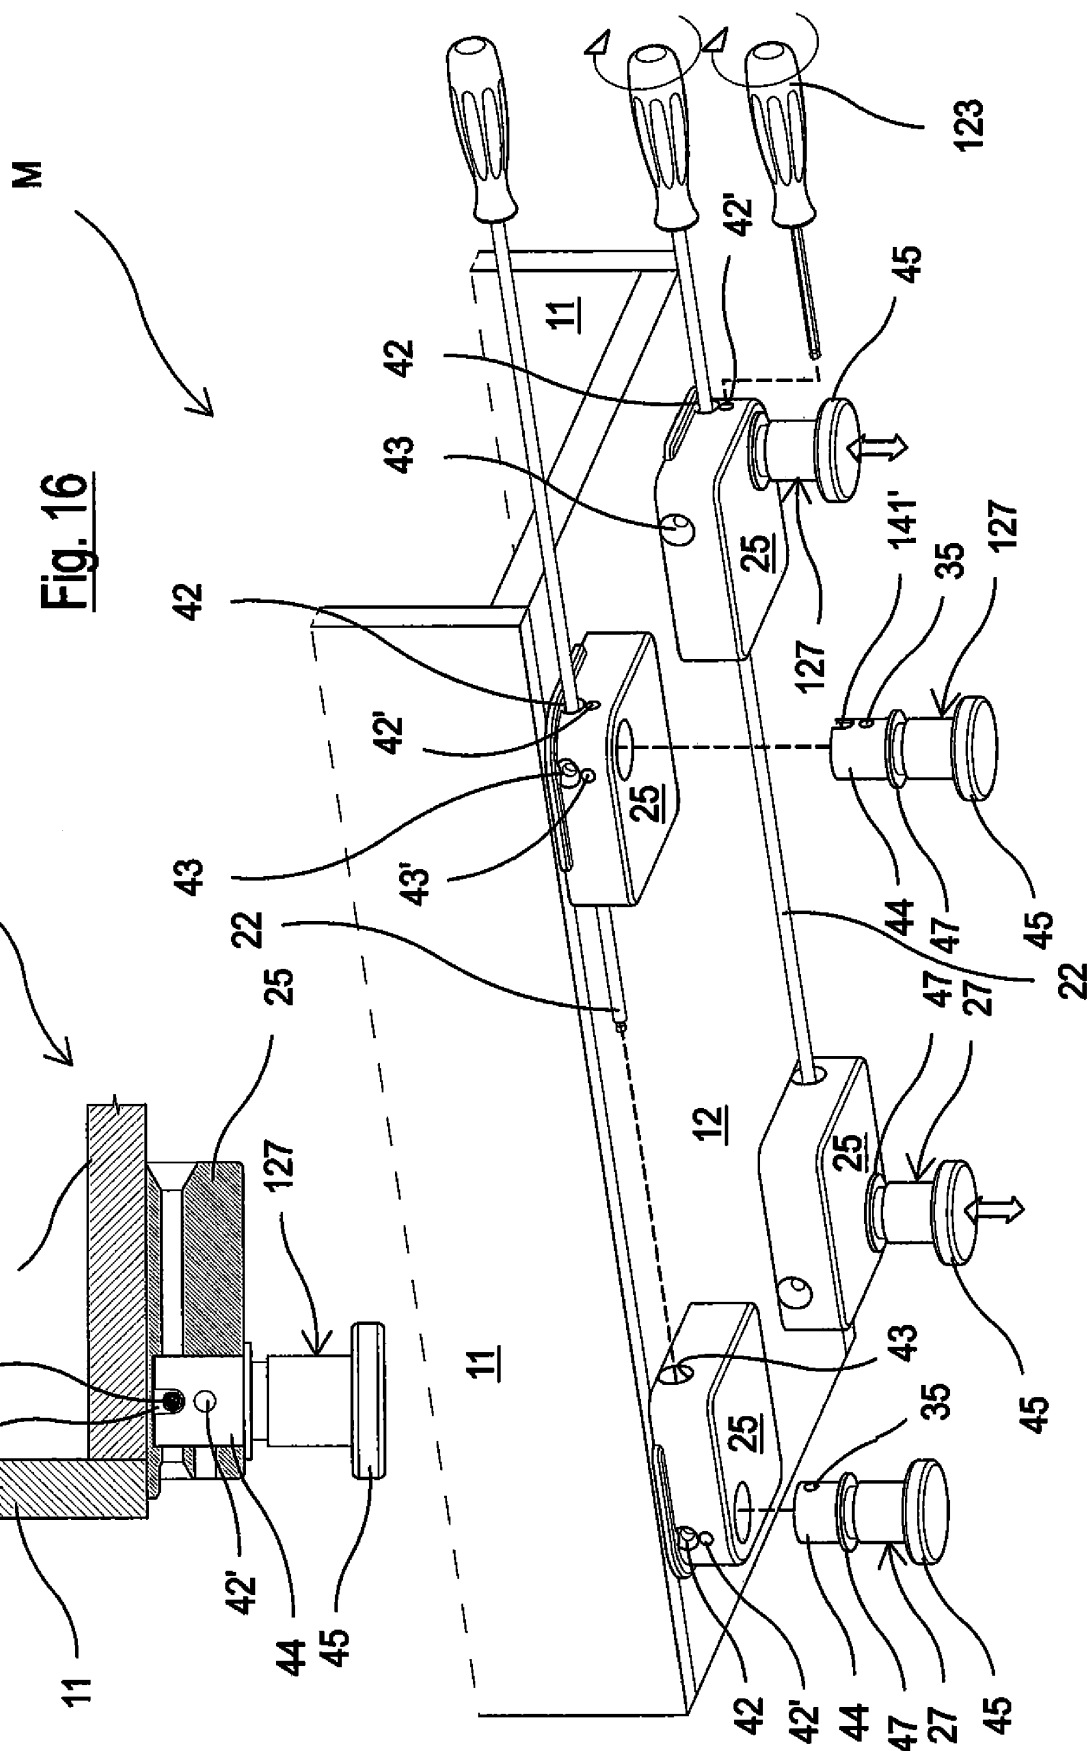

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2839761 A [0004]
- IT MI20111872 A [0007]
- AU 2009227484 A1 [0013]
- WO 2010020633 A [0013]