



- (51) **International Patent Classification:**
C08G 63/60 (2006.01) *C09K 19/38* (2006.01)
C08G 63/91 (2006.01)
- (21) **International Application Number:**
PCT/US2012/064743
- (22) **International Filing Date:**
13 November 2012 (13.11.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/559,828 15 November 2011 (15.11.2011) US
61/599,077 15 February 2012 (15.02.2012) US
- (71) **Applicant:** TICONA LLC [US/US]; 8040 Dixie Highway, Florence, Kentucky 41042 (US).
- (72) **Inventors:** KIM, Young, Shin; 3940 Pondhill Court, Erlanger, Kentucky 41018 (US). ZHAO, Xinyu; 6585 Kenwood Road, Cincinnati, Ohio 45243 (US).
- (74) **Agent:** JOHNSTON, Jason, W.; Dority & Manning, P.A., P O Box 1449, Greenville, South Carolina 29602-1449 (US).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) **Title:** COMPACT CAMERA MODULE

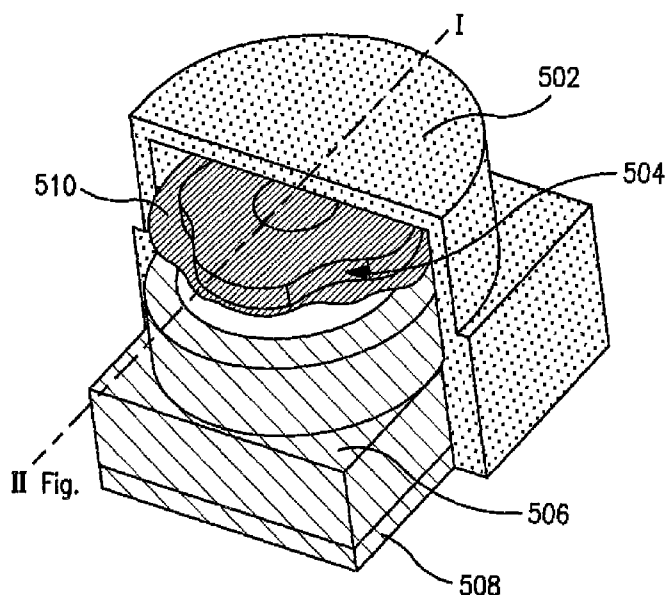


FIG. 1

(57) **Abstract:** A thermoplastic composition for use in a compact camera module is provided. The thermoplastic composition contains a liquid crystalline polymer and a plurality of fibers. The volume average length of the fibers in the thermoplastic composition is selectively controlled according to the present invention so that it is within a certain range, such as from about 80 to about 250 micrometers. The fibers also have a narrow length distribution. That is, at least about 70% by volume of the fibers have a length within a certain range. Through the use of a liquid crystalline polymer and fibers of a certain weight average length and narrow length distribution, the present inventors have discovered that the resulting thermoplastic composition is able to achieve a desirable combination of strength and surface smoothness, which enables it to be uniquely suited for a compact camera module.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Related Applications

[0001] The present application claims priority to U.S. Provisional Applications Serial Nos. 61/559,828, filed on November 15, 2011, and 61/599,077, filed on February 15, 2012, which are incorporated herein in their entirety by reference thereto.

Background of the Invention

[0002] Compact camera modules ("CCM") are often employed in mobile phones, laptop computers, digital cameras, digital video cameras, etc. that contain a plastic lens barrel disposed on a base. Because conventional plastic lenses could not withstand solder reflow, camera modules were not typically surface mounted. Recently, however, attempts have been made to use liquid crystalline polymers having a high heat resistance for the molded parts of a compact camera module, such as the lens barrel or the base on which it is mounted. To improve the mechanical properties of such polymers, it is known to add a plate-like substance (e.g., talc) and milled glass. Although strength and elastic modulus can be improved in this manner, problems are still encountered when attempting to use such materials in compact camera modules due to their small dimensional tolerance. For example, the mechanical properties are often poor or not uniform, which leads to poor filing and a lack of dimensional stability in the molded part. Further, an increase in the amount of milled glass to improve mechanical properties can result in a surface that is too rough, which makes it difficult to attach the components of the module.

[0003] As such, a need exists for a thermoplastic composition that can be readily employed in the molded parts of compact camera modules, and yet still achieve good mechanical properties.

Summary of the Invention

[0004] In accordance with one embodiment of the present invention, a compact camera module is disclosed that comprises a generally planar base on which is mounted a lens barrel. The base, barrel, or both have a thickness of about 500 micrometers or less and are formed from a thermoplastic composition

that comprises a thermotropic liquid crystalline polymer and a plurality of fibers. The fibers have a volume average length of from about 80 to about 250 micrometers and wherein at least about 70% by volume of the fibers have a length of from about 80 to about 250 micrometers.

[0005] Other features and aspects of the present invention are set forth in greater detail below.

Brief Description of the Figures

[0006] A full and enabling disclosure of the present invention, including the best mode thereof to one skilled in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, in which:

[0007] Figs. 1-2 are perspective and front views of a compact camera module ("CCM") that may be formed in accordance with one embodiment of the present invention;

[0008] Fig. 3 is a schematic illustration of one embodiment of an extruder screw that may be used to form the thermoplastic composition of the present invention;

[0009] Figs. 4-6 are graphs of the fiber length distribution for Samples 1-3 of Example 1;

[0010] Figs. 7-12 are graphs of the fiber length distribution for Samples 4-9 of Example 2;

[0011] Figs. 13-20 are graphs of the fiber length distribution for Samples 10-17 of Example 3; and

[0012] Fig. 21 is an SEM microphotograph of Sample 18 of Example 4.

[0013] Figs. 22A, 22B, and 22C illustrate Samples 19, 20, and 21, respectively, of Example 5 following a Tape Peeling Test.

Detailed Description

[0014] It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention.

[0015] Generally speaking, the present invention is directed to a compact camera module ("CCM"), such as those commonly employed in wireless communication devices (e.g., cellular telephone). The camera module contains a

generally planar base on which is mounted a lens barrel. The base and/or barrel are formed from a thermoplastic composition that contains a liquid crystalline polymer and a plurality of fibers. The volume average length of the fibers in the thermoplastic composition is selectively controlled according to the present invention so that it is within the range of from about 80 to about 250 micrometers, in some embodiments from about 100 to about 200 micrometers, and in some embodiments, from about 110 to about 180 micrometers. The fibers also have a narrow length distribution. That is, at least about 70% by volume of the fibers, in some embodiments at least about 80% by volume of the fibers, and in some embodiments, at least about 90% by volume of the fibers have a length within the range of from about 80 to about 250 micrometers, in some embodiments from about 100 to about 200 micrometers, and in some embodiments, from about 110 to about 180 micrometers.

[0016] Through the use of a liquid crystalline polymer and fibers of a narrow length distribution, the present inventors have discovered that the resulting thermoplastic composition is able to achieve good strength and a smooth surface, which enables it to be uniquely suited for the small molded parts of a compact camera module. For example, the base may have a thickness of about 500 micrometers or less, in some embodiments from about 100 to about 450 micrometers, and in some embodiments, from about 200 to about 400 micrometers. Likewise, the lens barrel may have a wall thickness of about 500 micrometers or less, in some embodiments from about 100 to about 450 micrometers, and in some embodiments, from about 200 to about 400 micrometers. When formed from the thermoplastic composition of the present invention, the ratio of the thickness of the base and/or lens barrel to the volume average length of the fibers may be from about 0.8 to about 3.2, in some embodiments from about 1.0 to about 3.0, and in some embodiments, from about 1.2 to about 2.9.

[0017] The fibers used in the thermoplastic composition generally have a high degree of tensile strength relative to their mass. For example, the ultimate tensile strength of the fibers (determined in accordance with ASTM D2101) is typically from about 1,000 to about 15,000 Megapascals ("MPa"), in some embodiments from about 2,000 MPa to about 10,000 MPa, and in some

embodiments, from about 3,000 MPa to about 6,000 MPa. To help maintain an insulative property, which is often desirable when employed in compact camera modules, the high strength fibers may be formed from materials that are also generally insulative in nature, such as glass, ceramics (e.g., alumina or silica), aramids (e.g., Kevlar® marketed by E. I. DuPont de Nemours, Wilmington, Delaware), polyolefins, polyesters, etc., as well as mixtures thereof. Glass fibers are particularly suitable, such as E-glass, A-glass, C-glass, D-glass, AR-glass, R-glass, S1-glass, S2-glass, etc., and mixtures thereof. In addition to possessing the length characteristics noted above, the fibers may also have a relatively high aspect ratio (average length divided by nominal diameter) to help improve the mechanical properties of the resulting thermoplastic composition. For example, the fibers may have an aspect ratio of from about 2 to about 50, in some embodiments from about 4 to about 40, and in some embodiments, from about 5 to about 20 are particularly beneficial. The fibers may, for example, have a nominal diameter of about 10 to about 35 micrometers, and in some embodiments, from about 15 to about 30 micrometers. Such a diameter has been found to be particularly useful in achieving the desired properties of the thermoplastic composition.

[0018] The relative amount of the fibers in the thermoplastic composition is also selectively controlled to help achieve the desired mechanical properties without adversely impacting other properties of the composition, such as its smoothness when formed into a molded part. For example, the fibers typically constitute from about 2 wt.% to about 40 wt.%, in some embodiments from about 5 wt.% to about 35 wt.%, and in some embodiments, from about 6 wt.% to about 30 wt.% of the thermoplastic composition. Although the fibers may be employed within the ranges noted above, one particularly beneficial and surprising aspect of the present invention is that small fiber contents may be employed while still achieving the desired mechanical properties. Without intending to be limited by theory, it is believed that the narrow length distribution of the fibers can help achieve excellent mechanical properties, thus allowing for the use of a smaller amount of fibers. For example, the fibers can be employed in small amounts such as from about 2 wt.% to about 20 wt.%, in some embodiments, from about 5 wt.% to about 16 wt.%, and in some embodiments, from about 6 wt.% to about 12 wt.%.

[0019] In addition to fibers, the thermoplastic composition of the present invention employs at least one thermotropic liquid crystalline polymer, which has a high degree of crystallinity that enables it to effectively fill the small spaces of the mold used to form the base and/or lens barrel of a compact camera module. The amount of such liquid crystalline polymers is typically from about 20 wt.% to about 90 wt.%, in some embodiments from about 30 wt.% to about 80 wt.%, and in some embodiments, from about 40 wt.% to about 75 wt.% of the thermoplastic composition. Suitable thermotropic liquid crystalline polymers may include aromatic polyesters, aromatic poly(esteramides), aromatic poly(estercarbonates), aromatic polyamides, etc., and may likewise contain repeating units formed from one or more aromatic hydroxycarboxylic acids, aromatic dicarboxylic acids, aromatic diols, aromatic aminocarboxylic acids, aromatic amines, aromatic diamines, etc., as well as combinations thereof.

[0020] Aromatic polyesters, for instance, may be obtained by polymerizing (1) two or more aromatic hydroxycarboxylic acids; (2) at least one aromatic hydroxycarboxylic acid, at least one aromatic dicarboxylic acid, and at least one aromatic diol; and/or (3) at least one aromatic dicarboxylic acid and at least one aromatic diol. Examples of suitable aromatic hydroxycarboxylic acids include, 4-hydroxybenzoic acid; 4-hydroxy-4'-biphenylcarboxylic acid; 2-hydroxy-6-naphthoic acid; 2-hydroxy-5-naphthoic acid; 3-hydroxy-2-naphthoic acid; 2-hydroxy-3-naphthoic acid; 4'-hydroxyphenyl-4-benzoic acid; 3'-hydroxyphenyl-4-benzoic acid; 4'-hydroxyphenyl-3-benzoic acid, etc., as well as alkyl, alkoxy, aryl and halogen substituents thereof. Examples of suitable aromatic dicarboxylic acids include terephthalic acid; isophthalic acid; 2,6-naphthalenedicarboxylic acid; diphenyl ether-4,4'-dicarboxylic acid; 1,6-naphthalenedicarboxylic acid; 2,7-naphthalenedicarboxylic acid; 4,4'-dicarboxybiphenyl; bis(4-carboxyphenyl)ether; bis(4-carboxyphenyl)butane; bis(4-carboxyphenyl)ethane; bis(3-carboxyphenyl)ether; bis(3-carboxyphenyl)ethane, etc., as well as alkyl, alkoxy, aryl and halogen substituents thereof. Examples of suitable aromatic diols include hydroquinone; resorcinol; 2,6-dihydroxynaphthalene; 2,7-dihydroxynaphthalene; 1,6-dihydroxynaphthalene; 4,4'-dihydroxybiphenyl; 3,3'-dihydroxybiphenyl; 3,4'-dihydroxybiphenyl; 4,4'-dihydroxybiphenyl ether; bis(4-hydroxyphenyl)ethane, etc., as well as alkyl, alkoxy, aryl and halogen substituents thereof.

[0021] In one particular embodiment, the aromatic polyester contains monomer repeat units derived from 4-hydroxybenzoic acid ("HBA") and 2,6-hydroxynaphthoic acid ("HNA") and/or 2,6-naphthalenedicarboxylic acid ("NDA"), as well as other optional repeat units, such as terephthalic acid ("TA") and/or isophthalic acid ("IA"); hydroquinone ("HQ"), 4,4-biphenol ("BP"), and/or acetaminophen ("APAP"); etc., as well as a combination thereof. The monomer units derived from HBA may constitute from about 40% to about 75% of the polymer on a mole basis and the monomer units derived from HNA and/or NDA may constitute from about 1% to about 25% of the polymer on a mole basis. The monomer units derived from TA and/or IA may constitute from about 2% to about 25% of the polymer on a mole basis. Likewise, the monomer units derived from HQ, BP, and/or APAP may constitute from about 10% to about 35% of the polymer on a mole basis. Suitable aromatic polyesters are commercially available from Ticona, LLC under the trade designation VECTRA® A. The synthesis and structure of these and other aromatic polyesters may be described in more detail in U.S. Patent Nos. 4,161,470; 4,473,682; 4,522,974; 4,375,530; 4,318,841; 4,256,624; 4,219,461; 4,083,829; 4,184,996; 4,279,803; 4,337,190; 4,355,134; 4,429,105; 4,393,191; 4,421,908; 4,434,262; and 5,541,240.

[0022] Liquid crystalline polyesteramides may likewise be obtained by polymerizing (1) at least one aromatic hydroxycarboxylic acid and at least one aromatic aminocarboxylic acid; (2) at least one aromatic hydroxycarboxylic acid, at least one aromatic dicarboxylic acid, and at least one aromatic amine and/or diamine optionally having phenolic hydroxy groups; and (3) at least one aromatic dicarboxylic acid and at least one aromatic amine and/or diamine optionally having phenolic hydroxy groups. Suitable aromatic amines and diamines may include, for instance, 3-aminophenol; 4-aminophenol; 1,4-phenylenediamine; 1,3-phenylenediamine, etc., as well as alkyl, alkoxy, aryl and halogen substituents thereof. In one particular embodiment, the aromatic polyesteramide contains monomer units derived from 2,6-hydroxynaphthoic acid, terephthalic acid, and 4-aminophenol. The monomer units derived from 2,6-hydroxynaphthoic acid may constitute from about 35% to about 85% of the polymer on a mole basis (e.g., 60%), the monomer units derived from terephthalic acid may constitute from about 5% to about 50% (e.g., 20%) of the polymer on a mole basis, and the

monomer units derived from 4-aminophenol may constitute from about 5% to about 50% (e.g., 20%) of the polymer on a mole basis. Such aromatic polyesters are commercially available from Ticona, LLC under the trade designation VECTRA® B. In another embodiment, the aromatic polyesteramide contains monomer units derived from 2,6-hydroxynaphthoic acid, and 4-hydroxybenzoic acid, and 4-aminophenol, as well as other optional monomers (e.g., 4,4'-dihydroxybiphenyl and/or terephthalic acid). The synthesis and structure of these and other aromatic poly(esteramides) may be described in more detail in U.S. Patent Nos. 4,339,375; 4,355,132; 4,351,917; 4,330,457; 4,351,918; and 5,204,443.

[0023] The liquid crystalline polymers may be prepared by introducing the appropriate monomer(s) (e.g., aromatic hydroxycarboxylic acid, aromatic dicarboxylic acid, aromatic diol, aromatic amine, aromatic diamine, etc.) into a reactor vessel to initiate a polycondensation reaction. The particular conditions and steps employed in such reactions are well known, and may be described in more detail in U.S. Patent No. 4,161,470 to Calundann; U.S. Patent No. 5,616,680 to Linstid, III, et al.; U.S. Patent No. 6,114,492 to Linstid, III, et al.; U.S. Patent No. 6,514,611 to Shepherd, et al.; and WO 2004/058851 to Waggoner, which are incorporated herein in their entirety by reference thereto for all relevant purposes. The vessel employed for the reaction is not especially limited, although it is typically desired to employ one that is commonly used in reactions of high viscosity fluids. Examples of such a reaction vessel may include a stirring tank-type apparatus that has an agitator with a variably-shaped stirring blade, such as an anchor type, multistage type, spiral-ribbon type, screw shaft type, etc., or a modified shape thereof. Further examples of such a reaction vessel may include a mixing apparatus commonly used in resin kneading, such as a kneader, a roll mill, a Banbury mixer, etc.

[0024] If desired, the reaction may proceed through the acetylation of the monomers as referenced above and known the art. This may be accomplished by adding an acetylating agent (e.g., acetic anhydride) to the monomers. Acetylation is generally initiated at temperatures of about 90°C. During the initial stage of the acetylation, reflux may be employed to maintain vapor phase temperature below the point at which acetic acid byproduct and anhydride begin to distill.

Temperatures during acetylation typically range from between 90°C to 150°C, and in some embodiments, from about 110°C to about 150°C. If reflux is used, the vapor phase temperature typically exceeds the boiling point of acetic acid, but remains low enough to retain residual acetic anhydride. For example, acetic anhydride vaporizes at temperatures of about 140°C. Thus, providing the reactor with a vapor phase reflux at a temperature of from about 110°C to about 130°C is particularly desirable. To ensure substantially complete reaction, an excess amount of acetic anhydride may be employed. The amount of excess anhydride will vary depending upon the particular acetylation conditions employed, including the presence or absence of reflux. The use of an excess of from about 1 to about 10 mole percent of acetic anhydride, based on the total moles of reactant hydroxyl groups present is not uncommon.

[0025] Acetylation may occur in a separate reactor vessel, or it may occur *in situ* within the polymerization reactor vessel. When separate reactor vessels are employed, one or more of the monomers may be introduced to the acetylation reactor and subsequently transferred to the polymerization reactor. Likewise, one or more of the monomers may also be directly introduced to the reactor vessel without undergoing pre-acetylation.

[0026] In addition to the monomers and optional acetylating agents, other components may also be included within the reaction mixture to help facilitate polymerization. For instance, a catalyst may be optionally employed, such as metal salt catalysts (e.g., magnesium acetate, tin(II) acetate, tetrabutyl titanate, lead acetate, sodium acetate, potassium acetate, etc.) and organic compound catalysts (e.g., N-methylimidazole). Such catalysts are typically used in amounts of from about 50 to about 500 parts per million based on the total weight of the recurring unit precursors. When separate reactors are employed, it is typically desired to apply the catalyst to the acetylation reactor rather than the polymerization reactor, although this is by no means a requirement.

[0027] The reaction mixture is generally heated to an elevated temperature within the polymerization reactor vessel to initiate melt polycondensation of the reactants. Polycondensation may occur, for instance, within a temperature range of from about 210°C to about 400°C, and in some embodiments, from about 250°C to about 350°C. For instance, one suitable technique for forming an

aromatic polyester may include charging precursor monomers (e.g., 4-hydroxybenzoic acid and 2,6-hydroxynaphthoic acid) and acetic anhydride into the reactor, heating the mixture to a temperature of from about 90°C to about 150°C to acetylate a hydroxyl group of the monomers (e.g., forming acetoxy), and then increasing the temperature to a temperature of from about 210°C to about 400°C to carry out melt polycondensation. As the final polymerization temperatures are approached, volatile byproducts of the reaction (e.g., acetic acid) may also be removed so that the desired molecular weight may be readily achieved. The reaction mixture is generally subjected to agitation during polymerization to ensure good heat and mass transfer, and in turn, good material homogeneity. The rotational velocity of the agitator may vary during the course of the reaction, but typically ranges from about 10 to about 100 revolutions per minute ("rpm"), and in some embodiments, from about 20 to about 80 rpm. To build molecular weight in the melt, the polymerization reaction may also be conducted under vacuum, the application of which facilitates the removal of volatiles formed during the final stages of polycondensation. The vacuum may be created by the application of a suctional pressure, such as within the range of from about 5 to about 30 pounds per square inch ("psi"), and in some embodiments, from about 10 to about 20 psi.

[0028] Following melt polymerization, the molten polymer may be discharged from the reactor, typically through an extrusion orifice fitted with a die of desired configuration, cooled, and collected. Commonly, the melt is discharged through a perforated die to form strands that are taken up in a water bath, pelletized and dried. The resin may also be in the form of a strand, granule, or powder. While unnecessary, it should also be understood that a subsequent solid phase polymerization may be conducted to further increase molecular weight. When carrying out solid-phase polymerization on a polymer obtained by melt polymerization, it is typically desired to select a method in which the polymer obtained by melt polymerization is solidified and then pulverized to form a powdery or flake-like polymer, followed by performing solid polymerization method, such as a heat treatment in a temperature range of 200°C to 350°C under an inert atmosphere (e.g., nitrogen).

[0029] Regardless of the particular method employed, the resulting liquid crystalline polymer typically may have a high number average molecular weight (M_n) of about 2,000 grams per mole or more, in some embodiments from about 4,000 grams per mole or more, and in some embodiments, from about 5,000 to about 30,000 grams per mole. Of course, it is also possible to form polymers having a lower molecular weight, such as less than about 2,000 grams per mole, using the method of the present invention. The intrinsic viscosity of the polymer, which is generally proportional to molecular weight, may also be relatively high. For example, the intrinsic viscosity may be about about 4 deciliters per gram ("dL/g") or more, in some embodiments about 5 dL/g or more, in some embodiments from about 6 to about 20 dL/g, and in some embodiments from about 7 to about 15 dL/g. Intrinsic viscosity may be determined in accordance with ISO-1628-5 using a 50/50 (v/v) mixture of pentafluorophenol and hexafluoroisopropanol.

[0030] In addition to the components noted above, still other additives that can be included in the composition may include, for instance, antimicrobials, fillers, pigments, antioxidants, stabilizers, surfactants, waxes, flow promoters, solid solvents, and other materials added to enhance properties and processability. For instance, mineral fillers may be employed in the thermoplastic composition to help achieve a smooth surface appearance. When employed, such mineral fillers typically constitute from about 1 wt.% to about 40 wt.%, in some embodiments from about 2 wt.% to about 35 wt.%, and in some embodiments, from about 5 wt.% to about 30 wt.% of the thermoplastic composition. Clay minerals may be particularly suitable for use in the present invention. Examples of such clay minerals include, for instance, talc ($Mg_3Si_4O_{10}(OH)_2$), halloysite ($Al_2Si_2O_5(OH)_4$), kaolinite ($Al_2Si_2O_5(OH)_4$), illite ($(K,H_3O)(Al,Mg,Fe)_2(Si,Al)_4O_{10}[(OH)_2,(H_2O)]$), montmorillonite ($(Na,Ca)_{0.33}(Al,Mg)_2Si_4O_{10}(OH)_2 \cdot nH_2O$), vermiculite ($(MgFe,Al)_3(Al,Si)_4O_{10}(OH)_2 \cdot 4H_2O$), palygorskite ($(Mg,Al)_2Si_4O_{10}(OH) \cdot 4(H_2O)$), pyrophyllite ($Al_2Si_4O_{10}(OH)_2$), etc., as well as combinations thereof. In lieu of, or in addition to, clay minerals, still other mineral fillers may also be employed. For example, other suitable silicate fillers may also be employed, such as calcium silicate, aluminum silicate, mica, diatomaceous earth, wollastonite, and so forth. Mica, for instance, may be particularly suitable.

There are several chemically distinct mica species with considerable variance in geologic occurrence, but all have essentially the same crystal structure. As used herein, the term "mica" is meant to generically include any of these species, such as muscovite ($\text{KAl}_2(\text{AlSi}_3)\text{O}_{10}(\text{OH})_2$), biotite ($\text{K}(\text{Mg,Fe})_3(\text{AlSi}_3)\text{O}_{10}(\text{OH})_2$), phlogopite ($\text{KMg}_3(\text{AlSi}_3)\text{O}_{10}(\text{OH})_2$), lepidolite ($\text{K}(\text{Li,Al})_{2-3}(\text{AlSi}_3)\text{O}_{10}(\text{OH})_2$), glauconite ($\text{K,Na}(\text{Al,Mg,Fe})_2(\text{Si,Al})_4\text{O}_{10}(\text{OH})_2$), etc., as well as combinations thereof.

[0031] Lubricants may also be employed in the thermoplastic composition that are capable of withstanding the processing conditions of the liquid crystalline polymer without substantial decomposition. Examples of such lubricants include fatty acids esters, the salts thereof, esters, fatty acid amides, organic phosphate esters, and hydrocarbon waxes of the type commonly used as lubricants in the processing of engineering plastic materials, including mixtures thereof. Suitable fatty acids typically have a backbone carbon chain of from about 12 to about 60 carbon atoms, such as myristic acid, palmitic acid, stearic acid, arachic acid, montanic acid, octadecinic acid, parinric acid, and so forth. Suitable esters include fatty acid esters, fatty alcohol esters, wax esters, glycerol esters, glycol esters and complex esters. Fatty acid amides include fatty primary amides, fatty secondary amides, methylene and ethylene bisamides and alkanolamides such as, for example, palmitic acid amide, stearic acid amide, oleic acid amide, N,N'-ethylenebisstearamide and so forth. Also suitable are the metal salts of fatty acids such as calcium stearate, zinc stearate, magnesium stearate, and so forth; hydrocarbon waxes, including paraffin waxes, polyolefin and oxidized polyolefin waxes, and microcrystalline waxes. Particularly suitable lubricants are acids, salts, or amides of stearic acid, such as pentaerythritol tetrastearate, calcium stearate, or N,N'-ethylenebisstearamide. When employed, the lubricant(s) typically constitute from about 0.05 wt.% to about 1.5 wt.%, and in some embodiments, from about 0.1 wt.% to about 0.5 wt.% (by weight) of the thermoplastic composition.

[0032] The liquid crystalline polymer, fibers, and other optional additives may be melt blended together within a temperature range of from about 200°C to about 450°C, in some embodiments, from about 220°C to about 400°C, and in some embodiments, from about 250°C to about 350°C to form the thermoplastic composition. Any of a variety of melt blending techniques may generally be

employed in the present invention. For example, the components (e.g., liquid crystalline polymer, fibers, etc.) may be supplied separately or in combination to an extruder that includes at least one screw rotatably mounted and received within a barrel (e.g., cylindrical barrel) and may define a feed section and a melting section located downstream from the feed section along the length of the screw.

[0033] The extruder may be a single screw or twin screw extruder.

Referring to Fig. 3, for example, one embodiment of a single screw extruder 80 is shown that contains a housing or barrel 114 and a screw 120 rotatably driven on one end by a suitable drive 124 (typically including a motor and gearbox). If desired, a twin-screw extruder may be employed that contains two separate screws. The configuration of the screw is not particularly critical to the present invention and it may contain any number and/or orientation of threads and channels as is known in the art. As shown in Fig. 3, for example, the screw 120 contains a thread that forms a generally helical channel radially extending around a core of the screw 120. A hopper 40 is located adjacent to the drive 124 for supplying the liquid crystalline polymer and/or other materials through an opening in the barrel 114 to the feed section 132. Opposite the drive 124 is the output end 144 of the extruder 80, where extruded plastic is output for further processing.

[0034] A feed section 132 and melt section 134 are defined along the length of the screw 120. The feed section 132 is the input portion of the barrel 114 where the liquid crystalline polymer is added. The melt section 134 is the phase change section in which the liquid crystalline polymer is changed from a solid to a liquid. While there is no precisely defined delineation of these sections when the extruder is manufactured, it is well within the ordinary skill of those in this art to reliably identify the feed section 132 and the melt section 134 in which phase change from solid to liquid is occurring. Although not necessarily required, the extruder 80 may also have a mixing section 136 that is located adjacent to the output end of the barrel 114 and downstream from the melting section 134. If desired, one or more distributive and/or dispersive mixing elements may be employed within the mixing and/or melting sections of the extruder. Suitable distributive mixers for single screw extruders may include, for instance, Saxon, Dulmage, Cavity Transfer mixers, etc. Likewise, suitable dispersive mixers may include Blister ring, Leroy/Maddock, CRD mixers, etc. As is well known in the art, the mixing may be

further improved by using pins in the barrel that create a folding and reorientation of the polymer melt, such as those used in Buss Kneader extruders, Cavity Transfer mixers, and Vortex Intermeshing Pin mixers.

[0035] The fibers of the thermoplastic composition may generally be added at any location of the extruder, such as to the hopper 40 or at a location downstream therefrom. In one particular embodiment, the fibers are added a location downstream from the point at which the liquid crystalline polymer is supplied, but yet prior to the melting section. In Fig. 3, for instance, a hopper 42 is shown that is located within a zone of the feed section 132 of the extruder 80. The fibers supplied to the hopper 42 may be initially relatively long, such as having a volume average length of from about 1,000 to about 5,000 micrometers, in some embodiments from about 2,000 to about 4,500 micrometers, and in some embodiments, from about 3,000 to about 4,000 micrometers. Nevertheless, by supplying these long fibers at a location where the liquid crystalline polymer is still in a solid state, the present inventors have discovered that the polymer can act as an abrasive agent for reducing the volume average length of the fibers to the ranges noted above. The present inventors have also found that the length reduction is consistent throughout the composition, which can result in a narrow length distribution.

[0036] To help control the degree to which the length of the fibers are reduced during extrusion, a variety of different parameters may also be selectively controlled. For example, the ratio of the length ("L") to diameter ("D") of the screw may be selected to achieve an optimum balance between throughput and fiber length reduction. The L/D value may, for instance, range from about 15 to about 50, in some embodiments from about 20 to about 45, and in some embodiments from about 25 to about 40. The length of the screw may, for instance, range from about 0.1 to about 5 meters, in some embodiments from about 0.4 to about 4 meters, and in some embodiments, from about 0.5 to about 2 meters. The diameter of the screw may likewise be from about 5 to about 150 millimeters, in some embodiments from about 10 to about 120 millimeters, and in some embodiments, from about 20 to about 80 millimeters. Perhaps even more important than the total L/D ratio of the screw is the L/D ratio of the screw after the point at which the fibers are supplied. More particularly, the screw has a blending

length (“ L_B ”) that is defined from the point at which the fibers are supplied to the extruder to the end of the screw, the blending length being less than the total length of the screw. As noted above, it may be desirable to add the fibers before the liquid crystalline polymer is melted, which means that the L_B/D ratio would be relatively high. However, too high of a L_B/D ratio could result in degradation of the polymer. Therefore, the L_B/D ratio of the screw after the point at which the fibers are supplied is typically from about 4 to about 20, in some embodiments from about 5 to about 15, and in some embodiments, from about 6 to about 10.

[0037] In addition to the length and diameter, other aspects of the extruder may also be selected to achieve the desired fiber length. For example, the speed of the screw may be selected to achieve the desired residence time, shear rate, melt processing temperature, etc. Generally, an increase in frictional energy results from the shear exerted by the turning screw on the materials within the extruder and results in the fracturing of the fibers. The degree of fracturing may depend, at least in part, on the screw speed. For example, the screw speed may range from about 50 to about 200 revolutions per minute (“rpm”), in some embodiments from about 70 to about 150 rpm, and in some embodiments, from about 80 to about 120 rpm. The apparent shear rate during melt blending may also range from about 100 seconds^{-1} to about $10,000 \text{ seconds}^{-1}$, in some embodiments from about 500 seconds^{-1} to about $5000 \text{ seconds}^{-1}$, and in some embodiments, from about 800 seconds^{-1} to about $1200 \text{ seconds}^{-1}$. The apparent shear rate is equal to $4Q/\pi R^3$, where Q is the volumetric flow rate (“ m^3/s ”) of the polymer melt and R is the radius (“m”) of the capillary (e.g., extruder die) through which the melted polymer flows.

[0038] In the embodiments described above, the length of the fibers is reduced within the extruder. It should be understood, however, that this is by no means a requirement of the present invention. For example, the fibers may simply be supplied to the extruder at the desired length. In such embodiments, the fibers may, for example, be supplied at the mixing and/or melting sections of the extruder, or even at the feed section in conjunction with the liquid crystalline polymer.

[0039] Regardless of the manner in which it is formed, the melt viscosity of the resulting thermoplastic composition is typically low enough so that it can readily flow into the cavity of a mold to form the part of a compact camera module. For example, in one particular embodiment, the thermoplastic composition may have a melt viscosity of from about 0.5 to about 100 Pa-s, in some embodiments from about 1 to about 80 Pa-s, and in some embodiments, from about 5 to about 50 Pa-s, determined at a shear rate of 1000 seconds⁻¹. Melt viscosity may be determined in accordance with ASTM Test No. 1238-70 at a temperature of 350°C.

[0040] To help achieve the desired melt viscosity, one or more functional compounds may be employed as flow modifiers that interact with the liquid crystalline polymer to reduce its melt viscosity. The functional compounds used herein may be mono-, di-, trifunctional, etc., and may contain one or more reactive functional groups, such as hydroxyl, carboxyl, carboxylate, ester, and primary or secondary amines. Hydroxy-functional compounds are particularly suitable flow modifiers as they contain hydroxyl functional groups that can react with the polymer chain to shorten its length and thus reduce melt viscosity. When employed, such hydroxy-functional compounds typically constitute from about 0.05 wt.% to about 4 wt.% of the thermoplastic composition. One example of such a hydroxyl-functional compound is an aromatic diol, such as hydroquinone, resorcinol, 4,4'-biphenol, etc., as well as combinations thereof. Such aromatic diols may constitute from about 0.01 wt.% to about 1 wt.%, and in some embodiments, from about 0.05 wt.% to about 0.4 wt.% of the thermoplastic composition. Water is also a suitable hydroxyl-functional compound, and can be used alone or in combination with other hydroxyl-functional compounds. If desired, water can be added in a form that under process conditions generates water. For example, the water can be added as a hydrate that under the process conditions (e.g., high temperature) effectively "loses" water. Such hydrates include alumina trihydrate, copper sulfate pentahydrate, barium chloride dihydrate, calcium sulfate dehydrate, etc., as well as combinations thereof. When employed, the hydrates may constitute from about 0.02 wt.% to about 2 wt.%, and in some embodiments, from about 0.05 wt.% to about 1 wt.% of the thermoplastic composition.

[0041] In addition to those noted above, still other functional compounds may also be employed as flow modifiers in the thermoplastic composition. For instance, aromatic dicarboxylic acids can be employed that generally act to combine smaller chains of the polymer together after they have been cut by other types of functional compounds. This maintains the mechanical properties of the composition even after its melt viscosity has been reduced. Suitable aromatic dicarboxylic acids for this purpose may include, for instance, terephthalic acid, 2,6-naphthalenedicarboxylic acid, isophthalic acid, 4,4'-bibenzoic acid, 2-methylterephthalic acid, etc., as well as combinations thereof. When employed, such dicarboxylic acids typically constitute from about 0.001 wt.% to about 0.5 wt.%, and in some embodiments, from about 0.005 wt.% to about 0.1 wt.% of the thermoplastic composition. In one particular embodiment, the thermoplastic composition of the present invention employs a mixture that contains a combination of an aromatic diol, hydrate, and aromatic dicarboxylic acid. The present inventors have discovered that this specific combination of ingredients can reduce melt viscosity and improve flow, but without having an adverse impact on mechanical properties. Typically, of the flow modifiers employed in the thermoplastic composition, aromatic diols constitute from about 15 wt.% to about 45 wt.%, hydrates constitute from about 45 wt.% to about 75 wt.%, and aromatic dicarboxylic acids constitute from about 1 wt.% to about 15 wt.%.

[0042] Once molded into the desired shape, the resulting part may have a relatively smooth surface, which may be represented by its surface glossiness). For example, the surface glossiness as determined using a gloss meter at an angle of from about 80° to about 85° may be about 35% or more, in some embodiments about 38% or more, and in some embodiments, from about 40% to about 60%. Conventionally, it was believed that thermoplastic compositions having such a smooth surface would not also possess sufficiently good mechanical properties. Contrary to conventional thought, however, the thermoplastic composition of the present invention has been found to possess excellent mechanical properties. For example, the composition may possess a high weld strength, which is useful when forming the thin part of a compact camera module. For example, the thermoplastic composition may exhibit a weld strength of from about 10 kilopascals ("kPa") to about 100 kPa, in some embodiments from about

20 kPa to about 80 kPa, and in some embodiments, from about 40 kPa to about 70 kPa, which is the peak stress as determined in accordance with ISO Test No. 527 (technically equivalent to ASTM D638) at 23°C.

[0043] The composition may also possess a Charpy notched impact strength greater than about 3 kJ/m², greater than about 4 kJ/m², in some embodiments from about 5 to about 40 kJ/m², and in some embodiments, from about 6 to about 30 kJ/m², measured at 23°C according to ISO Test No. 179-1) (technically equivalent to ASTM D256, Method B). The tensile and flexural mechanical properties of the composition are also good. For example, the thermoplastic composition may exhibit a tensile strength of from about 20 to about 500 MPa, in some embodiments from about 50 to about 400 MPa, and in some embodiments, from about 100 to about 350 MPa; a tensile break strain of about 0.5% or more, in some embodiments from about 0.6% to about 10%, and in some embodiments, from about 0.8% to about 3.5%; and/or a tensile modulus of from about 5,000 MPa to about 20,000 MPa, in some embodiments from about 8,000 MPa to about 20,000 MPa, and in some embodiments, from about 10,000 MPa to about 15,000 MPa. The tensile properties may be determined in accordance with ISO Test No. 527 (technically equivalent to ASTM D638) at 23°C. The thermoplastic composition may also exhibit a flexural strength of from about 20 to about 500 MPa, in some embodiments from about 50 to about 400 MPa, and in some embodiments, from about 100 to about 350 MPa; a flexural break strain of about 0.5% or more, in some embodiments from about 0.6% to about 10%, and in some embodiments, from about 0.8% to about 3.5%; and/or a flexural modulus of from about 5,000 MPa to about 20,000 MPa, in some embodiments from about 8,000 MPa to about 20,000 MPa, and in some embodiments, from about 10,000 MPa to about 15,000 MPa. The flexural properties may be determined in accordance with ISO Test No. 178 (technically equivalent to ASTM D790) at 23°C.

[0044] The melting temperature of the composition may likewise be from about 250°C to about 400°C, in some embodiments from about 270°C to about 380°C, and in some embodiments, from about 300°C to about 360°C. The melting temperature may be determined as is well known in the art using differential scanning calorimetry ("DSC"), such as determined by ISO Test No. 11357. Even at such melting temperatures, the ratio of the deflection temperature

under load ("DTUL"), a measure of short term heat resistance, to the melting temperature may still remain relatively high. For example, the ratio may range from about 0.65 to about 1.00, in some embodiments from about 0.66 to about 0.95, and in some embodiments, from about 0.67 to about 0.85. The specific DTUL values may, for instance, range from about 200°C to about 300°C, in some embodiments from about 210°C to about 280°C, and in some embodiments, from about 215°C to about 260°C. Such high DTUL values can, among other things, allow the use of high speed processes often employed during the manufacture of camera modules.

[0045] The thermoplastic composition may be molded into the desired shape using techniques as is known in the art. Typically, the shaped parts are molded using a one-component injection molding process in which dried and preheated plastic granules are injected into the mold.

[0046] The resulting compact camera module may have any of a variety of different configurations. One particularly suitable compact camera module is shown in Figs. 1-2. As shown, a compact camera module 500 contains a lens assembly 504 that overlies a base 506. The base 506, in turn, overlies an optional main board 508. Due to their relatively thin nature, the base 506 and/or main board 508 are particularly suited to be formed from the thermoplastic composition of the present invention as described above. The lens assembly 504 may have any of a variety of configurations as is known in the art. In one embodiment, for example, the lens assembly 504 is in the form of a hollow barrel that houses lenses 604, which are in communication with an image sensor 602 positioned on the main board 508 and controlled by a circuit 601. The barrel may have any of a variety of shapes, such as rectangular, cylindrical, etc. In certain embodiments, the barrel may be formed from the thermoplastic composition of the present invention and have a wall thickness within the ranges noted above. It should be understood that other parts of the camera module may also be formed from the thermoplastic composition of the present invention. For example, as shown, a polymer film 510 (e.g., polyester film) and/or thermal insulating cap 502 may cover the lens assembly 504. In some embodiments, the film 510 and/or cap 502 may also be formed from the thermoplastic composition of the present invention.

[0047] The present invention may be better understood with reference to the following examples.

Test Methods

[0048] *Melt Viscosity:* The melt viscosity (Pa-s) was determined in accordance with ISO Test No. 11443 at 350°C and at a shear rate of 1000 s⁻¹ using a Dynisco LCR7001 capillary rheometer. The rheometer orifice (die) had a diameter of 1 mm, length of 20 mm, L/D ratio of 20.1, and an entrance angle of 180°. The diameter of the barrel was 9.55 mm ± 0.005 mm and the length of the rod was 233.4 mm.

[0049] *Melting Temperature:* The melting temperature ("T_m") was determined by differential scanning calorimetry ("DSC") as is known in the art. The melting temperature is the differential scanning calorimetry (DSC) peak melt temperature as determined by ISO Test No. 11357. Under the DSC procedure, samples were heated and cooled at 20°C per minute as stated in ISO Standard 10350 using DSC measurements conducted on a TA Q2000 Instrument.

[0050] *Deflection Temperature Under Load ("DTUL"):* The deflection under load temperature was determined in accordance with ISO Test No. 75-2 (technically equivalent to ASTM D648-07). More particularly, a test strip sample having a length of 80 mm, thickness of 10 mm, and width of 4 mm was subjected to an edgewise three-point bending test in which the specified load (maximum outer fibers stress) was 1.8 Megapascals. The specimen was lowered into a silicone oil bath where the temperature is raised at 2°C per minute until it deflects 0.25 mm (0.32 mm for ISO Test No. 75-2).

[0051] *Tensile Modulus, Tensile Stress, and Tensile Elongation:* Tensile properties are tested according to ISO Test No. 527 (technically equivalent to ASTM D638). Modulus and strength measurements are made on the same test strip sample having a length of 80 mm, thickness of 10 mm, and width of 4 mm. The testing temperature is 23°C, and the testing speeds are 1 or 5 mm/min.

[0052] *Flexural Modulus, Flexural Stress, and Flexural Strain:* Flexural properties are tested according to ISO Test No. 178 (technically equivalent to ASTM D790). This test is performed on a 64 mm support span. Tests are run on the center portions of uncut ISO 3167 multi-purpose bars. The testing temperature is 23°C and the testing speed is 2 mm/min.

[0053] *Notched Charpy Impact Strength:* Notched Charpy properties are tested according to ISO Test No. 179-1 (technically equivalent to ASTM D256, Method B). This test is run using a Type A notch (0.25 mm base radius) and Type 1 specimen size (length of 80 mm, width of 10 mm, and thickness of 4 mm). Specimens are cut from the center of a multi-purpose bar using a single tooth milling machine. The testing temperature is 23°C.

[0054] *Fiber Length:* The volume average fiber length is determined by initially placing several pellet samples (e.g., 7 or 8) in a muffle furnace at 420°C overnight. The resulting ash is immersed in an aqueous solution containing a glycerol surfactant to disperse the glass fibers. The aqueous solution is then placed on a glass slide and images are collected via image analysis system. Glass fibers are selectively chosen from the images by ImagePro™ software, and the software automatically measures the length of the selected glass fiber based on calibrated length. Measurement continues until at least 500 glass fibers are counted. Then, the volume average fiber length and distribution are calculated.

[0055] *Weldline Strength:* The weldline strength is determined by first forming an injection molded line grid array ("LGA") connector (size of 49 mm x 39 mm x 1 mm) from a thermoplastic composition sample as is well known in the art. Once formed, the LGA connector is placed on a sample holder. The center of the connector is then subjected to a tensile force by a rod moving at a speed of 5.08 millimeters per minute. The peak stress is recorded as an estimate of the weldline strength.

[0056] *Surface Glossiness:* A gloss meter is used to measure the glossiness of a surface. Glossiness readings are taken at two different locations of the surface at an incident light angle of 85° relative to the surface of the part, with three repeat measurements at each location. The average of the readings is taken for calculating the glossiness. Any suitable gloss meter may be used to measure glossiness, such as Micro-TRI-Gloss from BYK Gardner GmbH.

[0057] *Skin Strength:* A Tape Peeling Test according to ASTM Test No. D3359, Method B is carried out to determine the strength of the composition surface in the absence of any coating (e.g., paint). A Gardco PA-2000 kit with a PA-2054 carbide tip 1.5mm x 11 teeth blade is used. The tape used was PA-280630 roll tape (a polyester rope fiber laminate). Using the crosshatch cutter

from the kit, cuts are made perpendicular to each other on the test surface. Debris is then removed from test surface using a brush from the kit. A three inch section of the pressure sensitive tape is cut and applied to the test surface ensuring the crosshatched area is completely covered. A pencil eraser is used to apply pressure and ensure complete adhesion of the tape to the test surface. The tape is then peeled at a 180° angle using a consistent motion after the tape has been adhered to the test surface for 90 +/- 30 seconds.

EXAMPLE 1

[0058] Three (3) samples of a thermoplastic composition are formed from 67.375 wt.% of a liquid crystalline polymer, 10 wt.% glass fibers, 22 wt.% talc, 0.3 wt.% Glycolube™ P, 0.2 wt.% alumina trihydrate, 0.1 wt.% 4-biphenol, and 0.025 wt.% 2,6-naphthalene dicarboxylic acid ("NDA"). The liquid crystalline polymer is formed from 4-hydroxybenzoic acid ("HBA"), 2,6-hydroxynaphthoic acid ("HNA"), terephthalic acid ("TA"), 4,4'-biphenol ("BP"), and acetaminophen ("APAP"), such as described in U.S. Patent No. 5,508,374 to Lee, et al. The glass fibers are obtained from Owens Corning and had an initial length of 4 millimeters.

[0059] To form the thermoplastic composition, pellets of the liquid crystalline polymer are dried at 150°C overnight. Thereafter, the polymer and Glycolube™ P are supplied to the feed throat of a ZSK-25 WLE co-rotating, fully intermeshing twin screw extruder in which the length of the screw is 750 millimeters, the diameter of the screw is 25 millimeters, and the L/D ratio is 30. The extruder has Temperature Zones 1-9, which may be set to the following temperatures: 330°C, 330°C, 310°C, 310°C, 310°C, 310°C, 320°C, 320°C, and 320°C, respectively. For Samples 1-2, the screw design is selected so that melting occurs after Zone 4. For Sample 3, the screw design is selected so that melting begins prior to Zone 4. The polymer is supplied to the feed throat by means of a volumetric feeder. The glass fibers and talc are fed to Zones 4 and/or 6 as indicated in the table below. Once melt blended, the samples are extruded through a single-hole strand die, cooled through a water bath, and pelletized.

[0060] The samples are then tested for fiber length in the manner indicated above. The results are set forth in Table 1 below.

Table 1

	Sample 1	Sample 2	Sample 3
Feeding sequence	Glass fibers at Zone #4; Talc at Zone #6	Glass fibers at Zone #6; Talc at Zone #4	Glass fibers at Zone #4; Talc at Zone #6
L/D after GF feeding	7.75	3.90	6.75
L/D before GF feeding	0	3.85	4.80
Glass fiber length			
Vol. Average (μm)	140	390	320
Vol. Standard Deviation	0.07	0.27	0.20
Max	0.41	1.56	0.98
Count	1187	1462	794
Coefficient of Variance (%)	51	96	89

[0061] The length distribution of the fibers of Samples 1-3 is also shown in Figs. 4-6, respectively. As indicated in Table 1 and Figs. 4-6, when the glass fibers are fed at Zone #4 (Sample 1, L/D after glass fiber feeding = 7.75), the fiber length becomes effectively shorter and its distribution is narrower. When fed at Zone #6 (Sample 2, L/D after glass fiber feeding = 3.90) or at Zone #4 but after melting of the polymer (Sample 3, L/D after glass fiber feeding = 4.80), however, no significant change in length is observed.

[0062] Parts are injection molded from Samples 1-3 and tested for their thermal and mechanical properties. The results are set forth below in Table 2.

Table 2

	Sample 1	Sample 2	Sample 3
Melt Viscosity at 1000 s^{-1} and 350°C (Pa-s)	18.4	17.6	19.3
Melt Viscosity at 400 s^{-1} and 350°C (Pa-s)	23	24.9	24.2
DTUL @ 1.8 Mpa ($^{\circ}\text{C}$)	238	254	247
Ten. Brk stress (MPa)	118	125	122
Ten. Modulus (MPa)	10,711	11,811	11,318
Ten. Brk strain (%)	2.6	2.1	2.4
Flex Brk stress (MPa)	139	166	161
Flex modulus (MPa)	10,941	11,496	12,102
Flex Brk strain (%)	3.1	2.5	2.6
Charpy Notched (KJ/m^2)	7.5	18.0	9.7

EXAMPLE 2

[0063] Six (6) samples of a thermoplastic composition are formed from 49.375 wt.% of a liquid crystalline polymer, 30 wt.% glass fibers, 20 wt.% talc, 0.3 wt.% Glycolube™ P, 0.2 wt.% alumina trihydrate, 0.1 wt.% 4-biphenol, and 0.025

wt.% 2,6-naphthalene dicarboxylic acid ("NDA"). The liquid crystalline polymer and glass fibers are the same as employed in Example 1. To form the thermoplastic composition, pellets of the liquid crystalline polymer are dried at 150°C overnight. Thereafter, the polymer and Glycolube™ P are supplied to the feed throat of a ZSK-25 WLE co-rotating, fully intermeshing twin screw extruder in which the length of the screw is 750 millimeters, the diameter of the screw is 25 millimeters, and the L/D ratio is 30. The extruder has Temperature Zones 1-9, which may be set to the following temperatures: 330°C, 330°C, 310°C, 310°C, 310°C, 310°C, 320°C, 320°C, and 320°C, respectively. The screw design is selected so that melting begins at Zone 4. The polymer is supplied to the feed throat by means of a volumetric feeder. The glass fibers and talc are fed to Zones 4 and/or 6 as indicated in the table below. Once melt blended, the samples are extruded through a single-hole strand die, cooled through a water bath, and pelletized.

[0064] The samples are then tested for fiber length in the manner indicated above. The results are set forth in the table below in Table 3.

Table 3

	Sample 4	Sample 5	Sample 6	Sample 7	Sample 8	Sample 9
Feeding sequence	Glass fibers at Zone #4; Talc at Zone #6	Glass fibers at Zone #4; Talc at Zone #6	Glass fibers at Zone #4; Talc at Zone #6	Glass fibers at Zone #4; Talc at Zone #6	Glass fibers at Zone #6; Talc at Zone #4	Glass fibers at Zone #6; Talc at Zone #4
L/D after GF feeding	7.75	7.75	7.75	7.75	3.90	3.90
L/D before GF feeding	0	0	0	0	3.85	3.85
Glass fiber length						
Vol. Average (μm)	90	100	100	110	370	350
Vol. Standard Deviation	0.05	0.06	0.05	0.06	0.17	0.18
Max	0.37	0.45	0.44	0.39	1.07	1.19
Count	3038	2584	1568	2295	1046	1266
Coefficient of Variance (%)	53	53	51	57	54	58

[0065] The length distribution of the fibers of Samples 4-9 is also shown in Figs. 7-12, respectively. As indicated in Table 3 and Figs. 7-12, when the glass fibers are fed at Zone #4 (Samples 4-7, L/D after glass fiber feeding = 7.75), the fiber length becomes effectively shorter and its distribution is narrower. When fed at Zone #6 (Samples 8-9, L/D after glass fiber feeding = 3.90), however, no significant change in length is observed.

[0066] Parts are injection molded from Samples 4-9 and tested for their thermal and mechanical properties. The results are set forth below in Table 4.

Table 4

	Sample 4	Sample 5	Sample 6	Sample 7	Sample 8	Sample 9
Melt Viscosity at 1000 s ⁻¹ and 350°C (Pa-s)	38.4	31.1	34.9	29.2	23.6	21.3
Melt Viscosity at 400 s ⁻¹ and 350°C (Pa-s)	54.2	42.6	48.6	39.7	36.6	32
DTUL @ 1.8 Mpa (°C)	233	235	230	238	253	251
Ten. Brk stress (MPa)	92	94	89	94	108	100
Ten. Modulus (MPa)	11,725	12,093	11,060	11,404	16,270	14,736
Ten. Brk strain (%)	2.7	2.5	2.4	2.6	0.9	0.9
Flex Brk stress (MPa)	132	132	124	128	158	142
Flex modulus (MPa)	12,966	13,136	12,246	12,450	16,662	15,042
Flex Brk strain (%)	2.3	2.2	2.3	2.3	1.24	1.3
Charpy Notched (KJ/m ²)	3.7	4.3	3.2	3.8	6.3	5.0

EXAMPLE 3

[0067] Six (6) samples of a thermoplastic composition are formed from 49.375 wt.% of a liquid crystalline polymer, 0.3 wt.% Glycolube™ P, 0.2 wt.% alumina trihydrate, 0.1 wt.% 4-biphenol, 0.025 wt.% 2,6-naphthalene dicarboxylic acid ("NDA"), and varying percentages of glass fibers and mineral filler (talc or mica). The liquid crystalline polymer of Samples 10-15 is the same as employed in Example 1. The liquid crystalline polymer of Samples 16-17 is formed from 4-hydroxybenzoic acid ("HBA"), NDA, terephthalic acid ("TA"), isophthalic acid ("IA"), hydroquinone ("HQ"), and acetaminophen ("APAP").

[0068] To form the thermoplastic composition, pellets of the liquid crystalline polymer are dried at 150°C overnight. Thereafter, the polymer and Glycolube™ P

are supplied to the feed throat of a ZSK-25 WLE co-rotating, fully intermeshing twin screw extruder in which the length of the screw is 750 millimeters, the diameter of the screw is 25 millimeters, and the L/D ratio is 30. The extruder has Temperature Zones 1-9, which may be set to the following temperatures: 330°C, 330°C, 310°C, 310°C, 310°C, 310°C, 320°C, 320°C, and 320°C, respectively. The screw design is selected so that melting begins at Zone 4. The polymer is supplied to the feed throat by means of a volumetric feeder. The glass fibers and talc are fed to Zone 4. Once melt blended, the samples are extruded through a single-hole strand die, cooled through a water bath, and pelletized.

[0069] The samples are then tested for fiber length in the manner indicated above. The results are set forth in the table below in Table 5.

Table 5

	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16	Sample 17
Mineral Filler	Talc	Talc	Talc	Talc	Talc	Mica	Mica	Talc
Wt.% of Mineral Filler	22.0	10	16.0	27	13	22	22.0	22.0
Wt.% of Glass Fibers	10.0	20	16.0	13	27	10	10.0	10.0
Glass fiber length								
Vol. Average (μm)	0.12	0.11	0.12	0.10	0.10	0.10	0.10	0.09
Vol. Standard Deviation	0.08	0.07	0.08	0.05	0.07	0.06	0.06	0.05
Max	0.5	0.46	0.51	0.35	0.47	0.36	0.32	0.28
Count	1198	1893	1845	914	1390	1235	787	847
Coefficient of Variance (%)	66	67	68	56	66	61	59	58

[0070] The length distribution of the fibers of Samples 10-17 is also shown in Figs. 13-20, respectively. As indicated, no significant change in fiber length and distribution is observed by changing filler ratio and filler content.

[0071] Parts are injection molded from Samples 10-17 and tested for their thermal and mechanical properties. The results are set forth in Table 6 below.

Table 6

	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16	Sample 17
Melt Viscosity at 1000 s ⁻¹ and 350°C (Pa-s)	17	18	19	19	27	24	23	17
Melt Viscosity at 400 s ⁻¹ 350°C (Pa-s)	24	22	25	25	37	32	31	22
DTUL @ 1.8 Mpa (°C)	232	235	234	241	238	243	258	238
Ten. Brk stress (MPa)	116	125	116	108	114	121	143	131
Ten. Modulus (MPa)	10,423	11,836	11,417	11,295	12,728	13,646	15,903	12,269
Ten. Brk strain (%)	2.74	2.67	2.85	2.49	2.48	2.09	1.87	2.18
Flex Brk stress (MPa)	138	153	145	137	155	162	184	159
Flex modulus (MPa)	11,019	12,065	12,047	11,835	13,364	14,773	16,372	12,196
Flex Brk strain (%)	2.93	2.9	2.7	2.6	2.51	2.41	2.25	2.91
Charpy Notched (KJ/m ²)	15.4	24.4	14.3	5.1	12.6	5.0	4.6	12.8

EXAMPLE 4

[0072] Two (2) samples of a thermoplastic composition are formed from 64.375 wt.% of a liquid crystalline polymer, 18 wt.% glass fibers, 18 wt.% talc, 0.3 wt.% Glycolube™ P, 0.2 wt.% alumina trihydrate, 0.1 wt.% 4-biphenol, and 0.025 wt.% 2,6-naphthalene dicarboxylic acid ("NDA"). The liquid crystalline polymer and the glass fibers are the same as employed in Example 1. To form the thermoplastic composition, pellets of the liquid crystalline polymer are dried at 150°C overnight. Thereafter, the polymer and Glycolube™ P are supplied to the feed throat of a ZSK-25 WLE co-rotating, fully intermeshing twin screw extruder in which the length of the screw is 750 millimeters, the diameter of the screw is 32 millimeters, and the L/D ratio is 30. The extruder has Temperature Zones 1-9, which may be set to the following temperatures: 330°C, 330°C, 310°C, 310°C, 310°C, 310°C, 320°C, 320°C, and 320°C, respectively. The screw design is selected so that melting occurs after Zone 4. The polymer is supplied to the feed

throat by means of a volumetric feeder. The glass fibers and talc are fed to Zones 4 and 6, respectively. Once melt blended, the sample is extruded through a single-hole strand die, cooled through a water bath, and pelletized.

[0073] The sample is then tested for fiber length in the manner indicated above. The results are set forth in Table 7 below.

Table 7

	Sample 18
L/D after GF feeding	7.75
L/D before GF feeding	0
Vol. Average Length of Fibers (μm)	120
Vol. Standard Deviation of Fibers	0.08
Max	0.51
Count	1845
Coefficient of Variance (%)	68

[0074] A part is injection molded from Sample 18 and tested for its thermal and mechanical properties. The results are set forth below in Table 8.

Table 8

	Sample 18
Melt Viscosity at 1000 s^{-1} and 350°C (Pa-s)	16.5
DTUL @ 1.8 Mpa ($^\circ\text{C}$)	230
Ten. Brk stress (MPa)	102
Ten. Modulus (MPa)	10,620
Ten. Brk strain (%)	2.60
Flex Brk stress (MPa)	132
Flex modulus (MPa)	11,401
Flex Brk strain (%)	2.5
Charpy Notched (KJ/m^2)	4.0
Weld Line Strength (kPa)	58
Surface Glossiness (%)	43

[0075] In addition to possessing good mechanical properties, as indicated above, Sample 18 also had a smooth surface as shown in Fig. 21.

Example 5

[0076] Three (3) samples of a thermoplastic composition are formed from 67.375 wt.% of a liquid crystalline polymer, 10 wt.% glass fibers, 22 wt.% talc, 0.3 wt.% Glycolube™ P, 0.2 wt.% alumina trihydrate, 0.1 wt.% 4-biphenol, and 0.025 wt.% 2,6-naphthalene dicarboxylic acid ("NDA"). The liquid crystalline polymer is formed from 4-hydroxybenzoic acid ("HBA"), 2,6-hydroxynaphthoic acid ("HNA"), terephthalic acid ("TA"), 4,4'-biphenol ("BP"), and acetaminophen ("APAP"), such as described in U.S. Patent No. 5,508,374 to Lee, et al. The glass fibers are obtained from Owens Corning and had an initial length of 4 millimeters

[0077] The samples are injection molded. The extruder has Temperature Zones 1-6, which may be set to temperatures in the following ranges: 315°C-325°C, 325°C-335°C, 330°C-350°C, 330°C-350°C, 330°C-340°C, 335°C-345°C. The mold surrounding the mold cavity may be set to a temperature of between about 80° and about 130°C. The injection pressure may be between about 500 bar and about 1500 bar (between about 50 MPa and about 150 MPa), the holding pressure may be generally equivalent to the injection pressure, and the back pressure may be low to medium (e.g. about 345 kPa to about 690 kPa). The screw speed may be between about 100 min⁻¹ and about 200 min⁻¹. The linear grid array filling pressure was between about 41000 kPa and about 55000 kPa.

[0078] The samples are then tested for a variety of physical characteristics. Results are shown in Table 9, below:

Table 9

	Sample 19	Sample 20	Sample 21
Filler (%)	35	30	40
Melt Viscosity at 1000 s ⁻¹ and 350°C (Pa-s)	21	33	35
DTUL @ 1.8 MPa (°C)	230	235	233
Charpy Notched (KJ/m ²)	4	36	3
Ten. Brk stress (MPa)	110	130	100
Ten. Modulus (MPa)	11	12	10
Ten. Brk strain (%)	2.6	2.8	2.7
Flex Brk stress (MPa)	130	170	120
Flex modulus (MPa)	11	12	10
Flex Brk strain (%)	2.5	3.1	2.5
Weldline Strength (kPa)	57.9	55.1	52.4

[0079] Figs. 22A, 22B, and 22C illustrate the results of the Tape Peeling Test for Samples 19, 20, and 21, respectively. As can be seen, very little tape residue remains on Sample 22A, demonstrating the desirable surface characteristics of the sample.

[0080] These and other modifications and variations of the present invention may be practiced by those of ordinary skill in the art, without departing from the spirit and scope of the present invention. In addition, it should be understood that aspects of the various embodiments may be interchanged both in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention so further described in such appended claims.

WHAT IS CLAIMED IS:

1. A compact camera module that comprises a generally planar base on which is mounted a lens barrel, wherein the base, barrel, or both have a thickness of about 500 micrometers or less and are formed from a thermoplastic composition that comprises a thermotropic liquid crystalline polymer and a plurality of fibers, wherein the fibers have a volume average length of from about 80 to about 250 micrometers and wherein at least about 70% by volume of the fibers have a length of from about 80 to about 250 micrometers.
2. The compact camera module of claim 1, wherein the thickness is from about 200 to about 400 micrometers.
3. The compact camera module of claim 1 or 2, wherein the fibers have a volume average length of from about 110 to about 180 micrometers.
4. The compact camera module of claim 3, wherein at least about 70% by volume of the fibers have a length of from about 110 to about 180 micrometers.
5. The compact camera module of any of the foregoing claims, wherein at least about 90% by volume of the fibers have a length of from about 80 to about 250 micrometers.
6. The compact camera module of any of the foregoing claims, wherein the fibers have a nominal diameter of about 10 to about 35 micrometers.
7. The compact camera module of any of the foregoing claims, wherein the fibers are glass fibers.
8. The compact camera module of any of the foregoing claims, wherein the thermotropic crystalline polymer is an aromatic polyester that contains repeating units derived from 4-hydroxybenzoic acid, 2,6-hydroxynaphthoic acid, or both.
9. The compact camera module of claim 8, wherein the aromatic polyester further contains repeating units derived from terephthalic acid, isophthalic acid, hydroquinone, 4,4-biphenol, or a combination thereof.
10. The compact camera module of any of the foregoing claims, wherein the thermoplastic composition further comprises at least one mineral filler.
11. The compact camera module of claim 10, wherein the mineral filler is talc.

12. The compact camera module of any of the foregoing claims, wherein the thermoplastic composition has a melt viscosity of from about 0.5 to about 100 Pa-s, as determined at a shear rate of 1000 seconds⁻¹ and temperature of 350°C in accordance with ASTM Test No. 1238-70.

13. The compact camera module of any of the foregoing claims, wherein the thermoplastic composition further comprises a functional compound as a flow modifier.

14. The compact camera module of any of the foregoing claims, wherein thermotropic liquid crystalline polymers constitute from about 30 wt.% to about 80 wt.% and fibers constitute from about 5 wt.% to about 16 wt.% of the composition.

15. The compact camera module of any of the foregoing claims, wherein the thermoplastic composition has a surface glossiness of about 35% or more at an incident light angle of 85°.

16. A compact camera module that comprises a generally planar base on which is mounted a lens barrel, wherein the base, barrel, or both have a thickness of about 500 micrometers or less and are formed from a thermoplastic composition that comprises from about 30 wt.% to about 80 wt.% of at least one thermotropic liquid crystalline polymer and from about 5 wt.% to about 16 wt.% of a plurality of glass fibers, wherein the glass fibers have a volume average length of from about 100 to about 200 micrometers and wherein at least about 70% by volume of the glass fibers have a length of from about 100 to about 200 micrometers, and wherein the glass fibers have a nominal diameter of from about 10 to about 35 micrometers.

17. The compact camera module of claim 16, wherein the thickness is from about 200 to about 400 micrometers.

18. The compact camera module of claim 16, wherein the glass fibers have a volume average length of from about 110 to about 180 micrometers.

19. The compact camera module of claim 18, wherein at least about 70% by volume of the glass fibers have a length of from about 110 to about 180 micrometers.

20. The compact camera module of claim 16, wherein at least about 90% by volume of the glass fibers have a length of from about 100 to about 200 micrometers.

21. The compact camera module of claim 16, wherein the thermoplastic composition has a melt viscosity of from about 0.5 to about 100 Pa-s, as determined at a shear rate of 1000 seconds⁻¹ and temperature of 350°C in accordance with ASTM Test No. 1238-70.

22. The compact camera module of claim 16, wherein the thermoplastic composition has a surface glossiness of about 35% or more at an incident light angle of 85°.

1/10

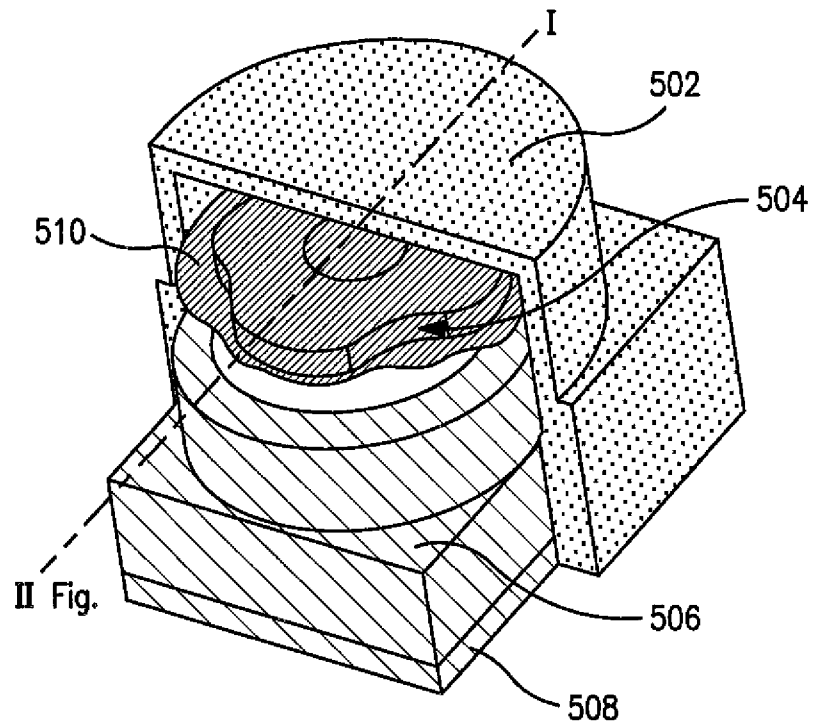


FIG. 1

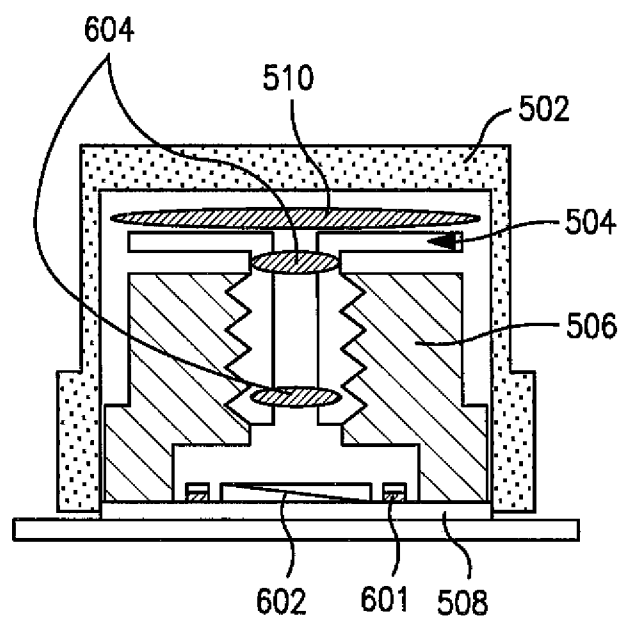


FIG. 2

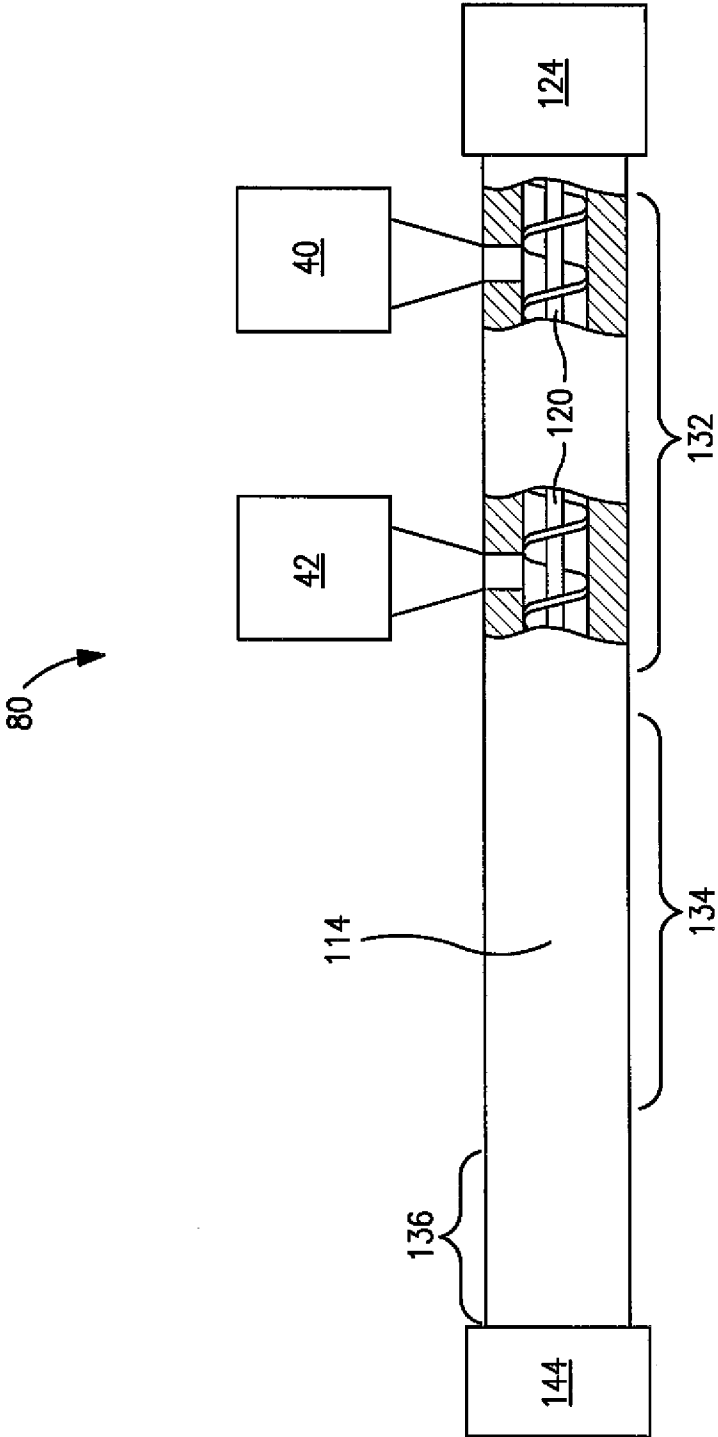
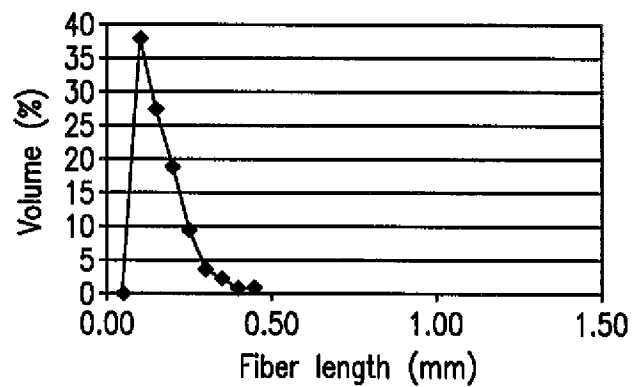
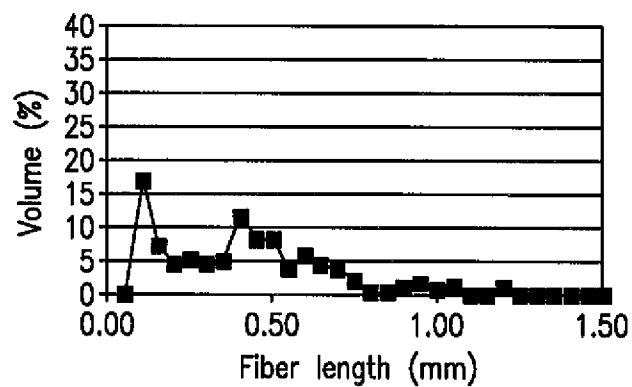
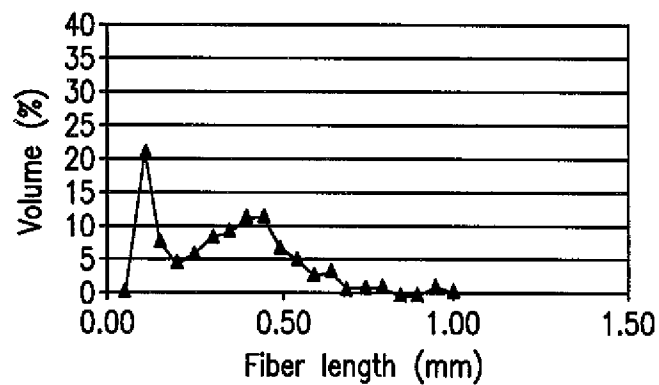
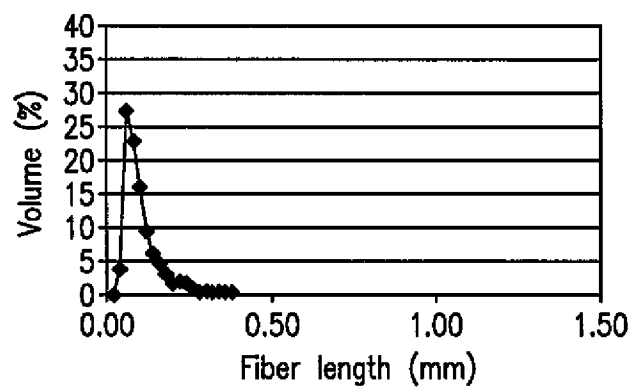
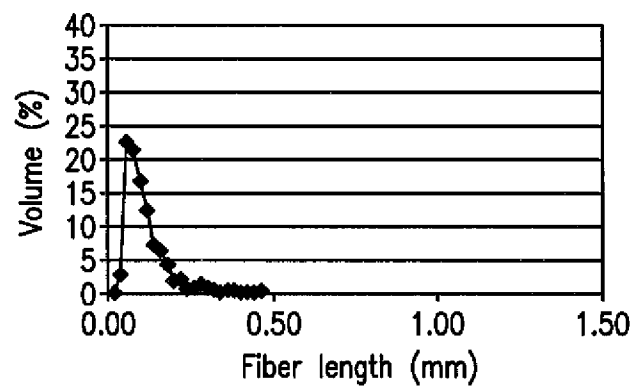
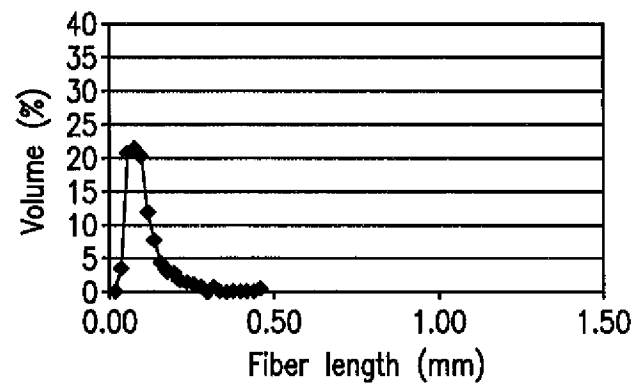


FIG. 3

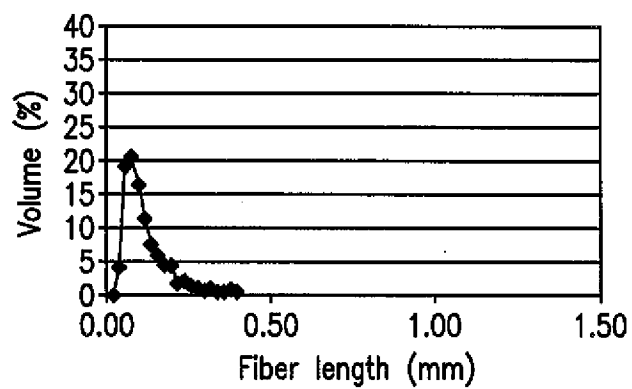
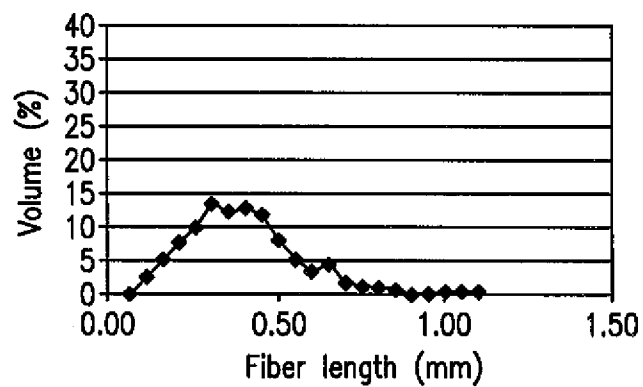
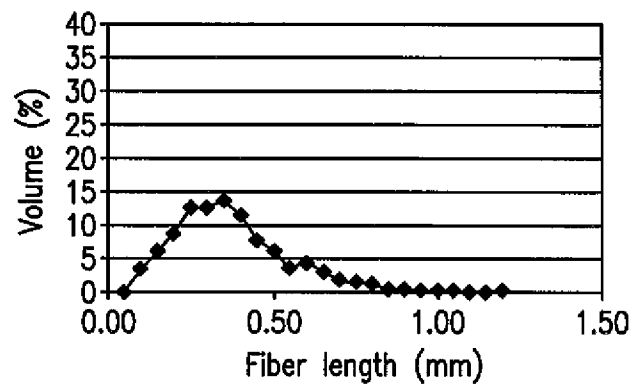
3/10

**FIG. 4****FIG. 5****FIG. 6**

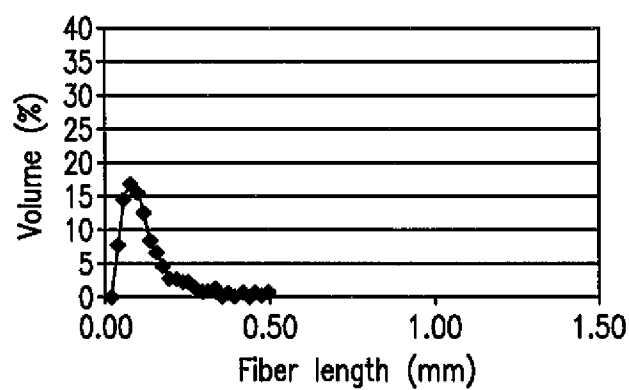
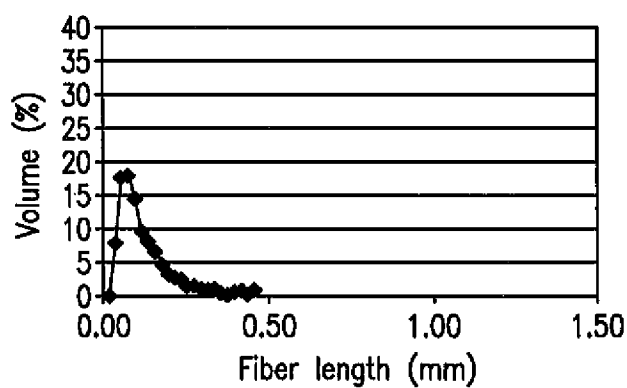
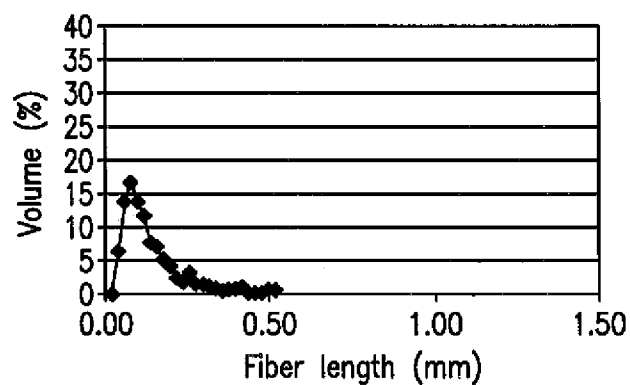
4/10

**FIG. 7****FIG. 8****FIG. 9**

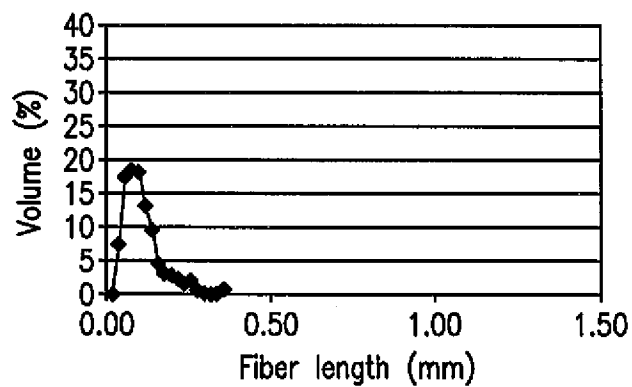
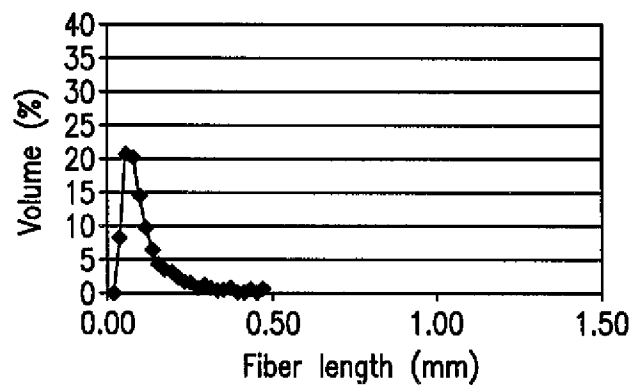
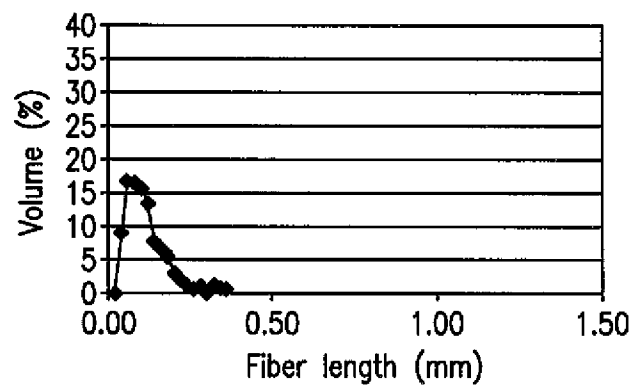
5/10

**FIG. 10****FIG. 11****FIG. 12**

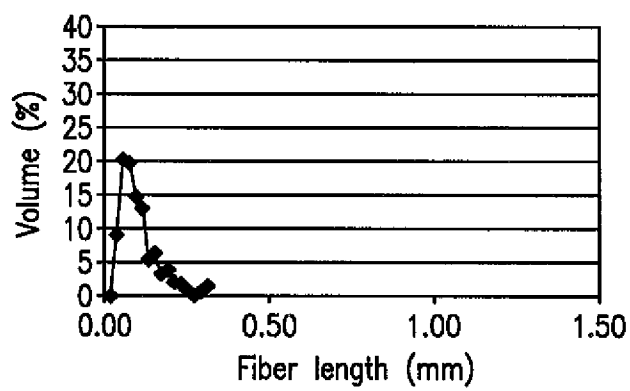
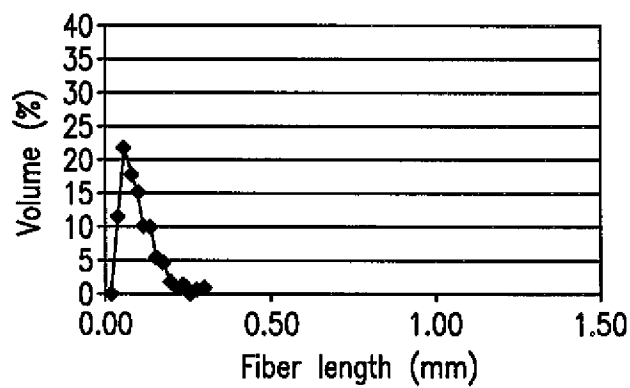
6/10

**FIG. 13****FIG. 14****FIG. 15**

7/10

**FIG. 16****FIG. 17****FIG. 18**

8/10

**FIG. 19****FIG. 20**

9/10

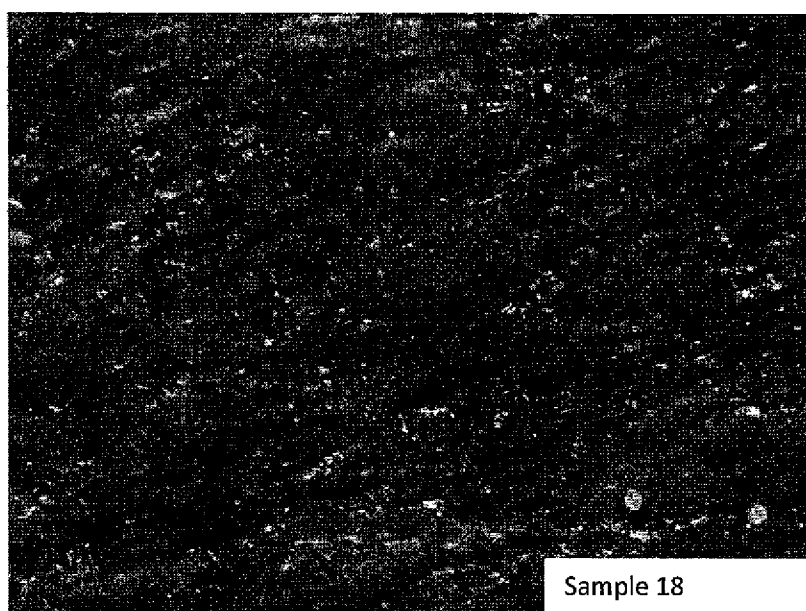


FIG. 21

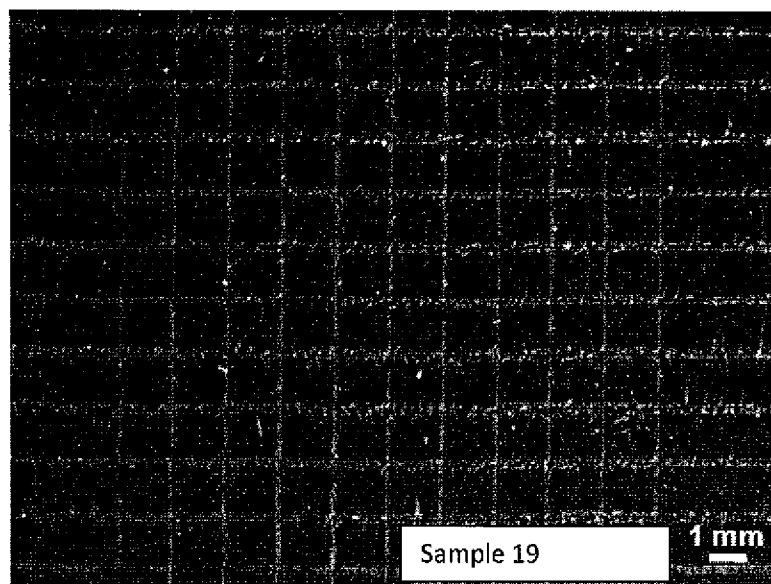


FIG. 22A

10/10

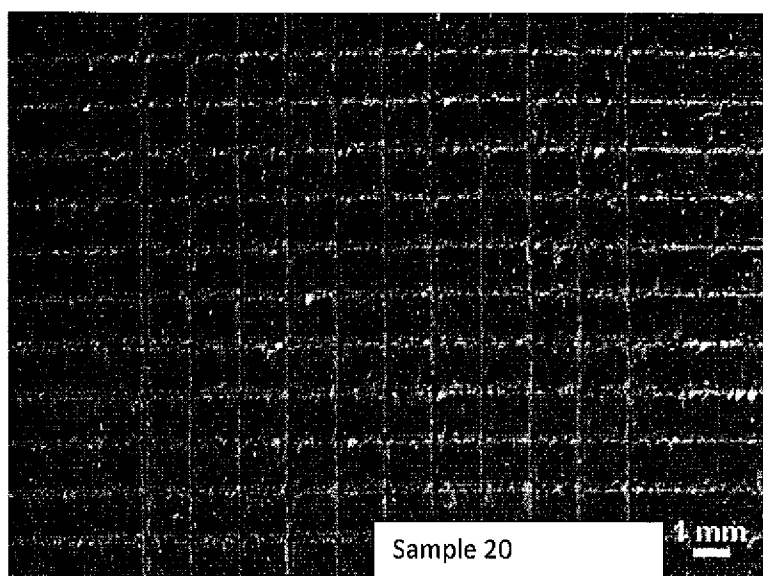


FIG. 22B

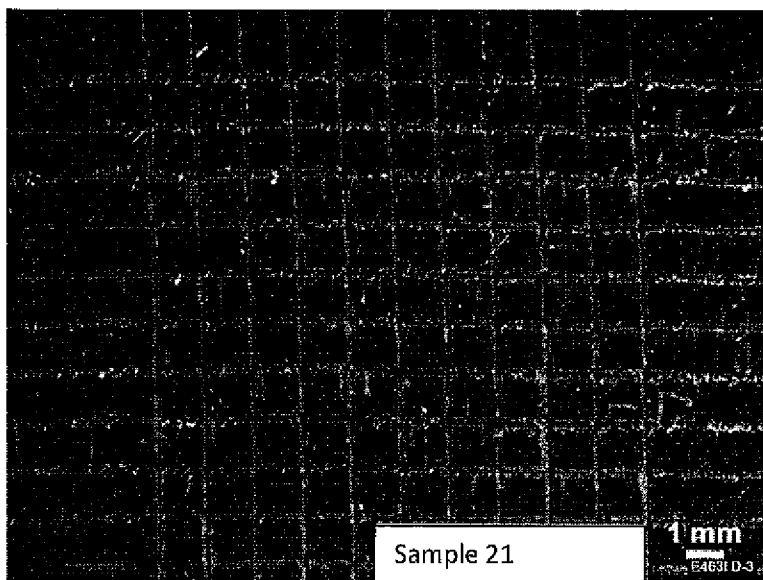


FIG. 22C

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/064743

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C08G63/60 C08G63/91 C09K19/38
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09K C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/089371 A1 (MUROUCHI SATOSHI [JP] ET AL) 21 April 2011 (2011-04-21) paragraphs [0001], [0070], [0071] examples 4-11, comparative examples 8-14; tables 1,2	1-22
A	----- US 5 663 276 A (YONETA HIROYOSHI [JP] ET AL) 2 September 1997 (1997-09-02) claims, examples column 9, line 65 column 8, lines 42-46,54	1-22
A	----- US 2009/108234 A1 (TANO DAISUKE [JP] ET AL) 30 April 2009 (2009-04-30) claims, examples; paragraphs [0095], [0129] ----- -/-	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 March 2013

Date of mailing of the international search report

21/03/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Schoenhentz, Jérôme

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/064743

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/210290 A1 (HARADA HIROSHI [JP] ET AL) 1 September 2011 (2011-09-01) comparative examples 5, 6; table 1; paragraphs [0075], [0090] -----	1-22
A	EP 1 792 942 A1 (POLYPLASTICS CO [JP]) 6 June 2007 (2007-06-06) paragraphs [0001], [0034], [0035], [0044], [0052], [0053] manufacture example 2; tables 1,2 -----	1-22
A	US 2005/113555 A1 (OKAMOTO SATOSHI [JP] ET AL) 26 May 2005 (2005-05-26) example 7; table 1 paragraphs [0102], [0106], [0163]; claims 1-6 -----	1-22
A	WO 95/33803 A1 (HOECHST CELANESE CORP [US]) 14 December 1995 (1995-12-14) claims 1-19; examples 7,16,17,20,C-(7-9); tables 1,2 -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/064743

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011089371 A1	21-04-2011	CN 101981123 A KR 20100139105 A TW 200942574 A US 2011089371 A1 WO 2009119863 A1	23-02-2011 31-12-2010 16-10-2009 21-04-2011 01-10-2009
US 5663276 A	02-09-1997	US 5663276 A WO 9429365 A1	02-09-1997 22-12-1994
US 2009108234 A1	30-04-2009	KR 20090037309 A US 2009108234 A1	15-04-2009 30-04-2009
US 2011210290 A1	01-09-2011	CN 102212256 A JP 2011178829 A KR 20110098651 A TW 201139559 A US 2011210290 A1	12-10-2011 15-09-2011 01-09-2011 16-11-2011 01-09-2011
EP 1792942 A1	06-06-2007	CN 101006138 A EP 1792942 A1 KR 20070059070 A US 2008139754 A1 WO 2006025538 A1	25-07-2007 06-06-2007 11-06-2007 12-06-2008 09-03-2006
US 2005113555 A1	26-05-2005	CN 1629255 A KR 20050043649 A TW I359159 B US 2005113555 A1	22-06-2005 11-05-2005 01-03-2012 26-05-2005
WO 9533803 A1	14-12-1995	EP 0764195 A1 JP H10501277 A WO 9533803 A1	26-03-1997 03-02-1998 14-12-1995