

(19)



(11)

EP 2 532 764 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
24.04.2019 Bulletin 2019/17

(51) Int Cl.:
C22C 38/00 (2006.01) C21D 8/06 (2006.01)
C21D 9/52 (2006.01) C22C 38/54 (2006.01)

(21) Application number: **10838391.0**

(86) International application number:
PCT/JP2010/068363

(22) Date of filing: **19.10.2010**

(87) International publication number:
WO 2011/092905 (04.08.2011 Gazette 2011/31)

(54) **WIRE MATERIAL, STEEL WIRE, AND PROCESSES FOR PRODUCTION OF THOSE PRODUCTS**
DRAHTMATERIAL, STAHLDRAHT UND VERFAHREN ZUR HERSTELLUNG DIESER PRODUKTE
MATÉRIAU POUR FILS, FIL D'ACIER ET PROCÉDÉS DE PRODUCTION ASSOCIÉS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(30) Priority: **01.02.2010 JP 2010020185**

(56) References cited:
WO-A1-2011/089782 JP-A- 5 295 448
JP-A- 5 295 448 JP-A- H05 295 448
JP-A- 2008 208 450 JP-A- 2008 208 450
JP-A- 2008 208 450 JP-B2- 2 735 647
JP-B2- 2 735 647 JP-B2- 2 735 647
JP-B2- 2 939 770 JP-B2- 2 939 770
JP-B2- 2 939 770

(43) Date of publication of application:
12.12.2012 Bulletin 2012/50

(73) Proprietor: **Nippon Steel & Sumitomo Metal Corporation**
Tokyo 100-8071 (JP)

• **Fabio Borchardt ET AL: "CHARACTERIZATION OF THE PROEUTECTOID CEMENTITE NETWORKS OBSERVED IN THE SAE 1092 WIRE ROD STEEL GRADE", , 14 October 2004 (2004-10-14), XP55235085, Retrieved from the Internet:
 URL:http://d-scholarship.pitt.edu/9460/1/Borchardt_041604.pdf [retrieved on 2015-12-09]**

(72) Inventors:
 • **YAMASAKI, Shingo**
Tokyo 100-8071 (JP)
 • **MANABE, Toshiyuki**
Tokyo 100-8071 (JP)
 • **HIRAKAMI, Daisuke**
Tokyo 100-8071 (JP)
 • **MUROGA, Nariyasu**
Tokyo 100-8071 (JP)

EP 2 532 764 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[Technical Field]

5 **[0001]** The present invention relates to a wire rod, a steel wire, and a manufacturing method thereof, and, more specifically, to a rolled wire rod preferable for use as a steel cord which is used as a reinforcement material in radial tires of automobiles or belts and hoses for a variety of industrial uses, a sawing wire, a PC steel wire, a zinc plated steel strand, a wire rod for springs, a cable for suspension bridges, or the like, a manufacturing method thereof, and a steel wire produced from the rolled wire rod.

10 **[0002]** This application claims priority based on Japanese Patent Application No. 2010-020185 filed in the Japanese Patent Office on February 1, 2010.

[Background Art]

15 **[0003]** Generally, a steel wire which is used for a sawing wire or a steel cord which is used as a reinforcement material for radial tires of automobiles, a variety of belts and hoses, or the like, is manufactured by subjecting a wire rod with a diameter of 5-6 mm, which has been hot-rolled and subjected to controlled-cooling, to a primary wire drawing so as to have a diameter of 3-4 mm, and subjecting the wire rod to a patenting treatment and a secondary wire drawing so as to have a diameter of 1-2 mm, and then subjecting the wire rod to a final patenting treatment, brass plating, and a final
20 wet wire drawing process so as to have a diameter of 0.15-0.40 mm.

[0004] A steel cord is manufactured by twisting together a plurality of the ultrafine steel wires which obtained in the above manner in a twisting process so as to produce a twisted steel wire.

[0005] In general, if a wire is broken when processing a wire rod into a steel wire or twisting a steel wire, productivity and yield rate are significantly degraded. Therefore, there is a strong demand for wire rods or steel wires belonging to
25 the above technical fields to not be broken during the wire drawing process or the twisting process. Among wire drawing processes, in the case of the final wet wire drawing process, since the diameter of a steel wire to be treated is extremely small, the steel wire is highly likely to be broken. Furthermore, in recent years, there has been a trend towards reducing the weight of steel cords or the like for a variety of purposes. As a result, there is a demand for a high strength in the variety of products described above.

30 **[0006]** In addition, a steel wire used as a PC steel wire, a PC twisted wire, a rope, a PWS wire for bridges, or the like is generally formed into a strand shape by subjecting a wire rod with a diameter of 5-16 mm, which has been subjected to hot rolling and then controlled cooling, to a wire drawing process so as to have a diameter of 2-8 mm, subjecting the rod to molten zinc plating after the wire drawing or in the middle of the wire drawing, according to necessity, and then stranding the rods with or without twisting them together.

35 **[0007]** Generally, if a wire is broken when processing a wire rod into a steel wire or longitudinal cracks (delamination) occur when twisting the steel wire, productivity and yield rate are significantly degraded. Therefore, there is a strong demand for wire rods or steel wires belonging to the above technical fields to not break during a wire drawing process or a stranding process.

40 **[0008]** With regard to such products, there was a demand in the past to secure a strength of 1600 MPa or higher as well as to secure sufficient performance in terms of toughness and ductility evaluated by a twisting test or the like, but, in recent years, there has been a trend in which the weight of wires has been reduced for a variety of purposes.

[0009] As a result, there is a demand for high strength in a variety of the above products, but it has become impossible to obtain the desired high strength in carbon steel wire rods with a C content of less than 0.9 mass%. Therefore, there has been an increasing demand for steel wires with a C content of 0.9 mass% or higher. However, if the amount of C
45 is increased, since wire drawing properties or torsional properties (delamination resistance) are degraded due to generation of pro-eutectoid cementite (hereinafter, sometimes referred to as 'pro-eutectoid θ '), wires break more often. As a result, wire rods not only including high amount of C for obtaining high strength but also having excellent wire drawing properties are strongly demanded.

50 **[0010]** With respect to such recent demands from industries, manufacturing technologies of high carbon wire rods with an amount of C exceeding 1% have been suggested.

[0011] For example, Patent Document 1 discloses "a wire rod for high strength and high toughness ultrafine steel wires, a high strength and high toughness ultrafine steel wire, a twisted product using the ultrafine steel wire, and a manufacturing method of the ultrafine steel wire" made of a steel material having a specific chemical composition, in which the average area ratio containing pro-eutectoid cementite is defined. However, since the wire rod suggested in
55 the publication includes one or both of Ni and Co, which are high-priced elements, as essential components, the manufacturing costs are increased.

[0012] Patent Document 2 suggests a technology in which 0.6% or more of Al is added so as to suppress generation of pro-eutectoid cementite in a high carbon steel with a content of C exceeding 1%. However, since Al is a strong

deoxidizing element, and the amount of hard inclusions that act as a cause of wire breakage during wire drawing is increased, it is difficult to apply the technology to wire rods for steel wires with a small diameter, such as steel cords.

[0013] On the other hand, Patent Document 3 suggests a technology in which a high carbon wire rod is heated to an austenite temperature zone, cooled to a temperature range of 823-1023 K, subjected to a deforming process with a degree of 15-80% in the above temperature zone, and then isothermally transformed in a temperature zone of 823-923 K so as to suppress pro-eutectoid cementite. However, since a large facility investment is required to perform a predetermined process in such a temperature zone, there is concern of an increase in manufacturing costs.

[Related Art Document]

[Patent Document]

[0014]

[Patent Document 1] Japanese Patent No. 2609387

[Patent Document 2] Japanese Unexamined Patent Application, First Publication No. 2003-193129

[Patent Document 3] Japanese Unexamined Patent Application, First Publication No. H8-283867

[0015] Related alloys are also known from documents JP5295448A, JP2939770B2, JP2735647B2 or JP2008208450A.

[Disclosure of the Invention]

[Problems to be Solved by the Invention]

[0016] The present invention has been made in consideration of the above circumstances, and the object of the invention is to provide, with high productivity as well as favorable yield rate at a low price, high strength wire rods that are preferable for use as a steel cord, a sawing wire, or use as a PC steel wire, a zinc plated steel strand, a steel wire for springs, a cable for suspension bridges, or the like, and are excellent in terms of wire drawing properties.

[Means for Solving the Problems]

[0017] In order to solve the above problems, the invention adopts the following configurations and methods.

(1) The first aspect of the invention is a wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, wherein 97% or more of an area in a cross-section perpendicular to the longitudinal direction of the wire rod is occupied by a pearlite, and 0.5% or less of an area in a central area in the cross-section and 0.5% or less of an area in a first surface layer area in the cross-section are occupied by a pro-eutectoid cementite.

(2) In the wire rod described in the above (1), the cross-section of the wire rod may be occupied by the pearlite, the pro-eutectoid cementite, a bainite, a pseudo pearlite, a ferrite, a grain boundary ferrite, and a martensite.

(3) The second aspect of the invention is a manufacturing method of the wire rod described in the above (1) or (2). The manufacturing method includes a process in which a billet having the above composition is hot-rolled so as to obtain a rolled wire rod; a process in which the rolled wire rod is coiled; and a process in which a patenting treatment is performed by immersing the rolled wire rod of 900°C or higher into a molten salt at a temperature of 500°C-600°C.

(4) The third aspect of the invention is a manufacturing method of the wire rod described in the above (1) or (2). The manufacturing method includes a process in which a billet having the above composition is hot-rolled so as to obtain a rolled wire rod; a process in which the rolled wire rod is coiled; and a process in which cooling is started with respect to the rolled wire rod of 900°C or higher, cooling is performed in a controlled manner to make the cooling rate Y while cooling from 900°C to 650°C satisfy

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

and a patenting treatment is performed by finishing pearlite transformation at a temperature of 650°C-500°C.

(5) The fourth aspect of the invention is a manufacturing method of the wire rod described in the above (1) or (2).

The manufacturing method includes a process in which a rolled wire rod with the above composition and a diameter of 3-16 mm is prepared; a process in which the rod is reheated to 950°C-1050°C; and a process in which cooling is started with respect to the rolled wire rod of 900°C or higher, and a patenting treatment is performed in a lead bath or a fluidized bed at a temperature of 500°C-600°C.

(6) The fifth aspect of the invention is a steel wire obtained by performing at least once wire drawing and a reheating patenting treatment on a wire rod having the above composition with 97% or more of the area in cross-section perpendicular to the longitudinal direction of the wire rod occupied by a pearlite, and 0.5% or less of the area in the central area in cross-section and 0.5% or less of the area of a first surface layer area in cross-section occupied by a pro-eutectoid cementite, in which the steel wire has a diameter of 0.1-0.4 mm and a tensile strength of 4200 MPa or higher, and 0.5% or less of the area in the second surface layer area of the cross-section perpendicular to the longitudinal direction of the steel wire is occupied by pro-eutectoid cementite.

(7) The sixth aspect of the invention is a steel wire obtained by drawing a wire rod having the above composition with 97% or more of the area in cross-section perpendicular to the longitudinal direction of the wire rod occupied by a pearlite, and 0.5% or less of the area in the central area in cross-section and 0.5% or less of the area of a first surface layer area in cross-section occupied by a pro-eutectoid cementite, in which the steel wire has a diameter of 0.8-8 mm and a tensile strength of 1800 MPa or higher, and 0.5% or less of the area in the third surface layer area of the cross-section perpendicular to the longitudinal direction of the steel wire is occupied by pro-eutectoid cementite.

(8) The steel wire described in the above (7) may be obtained in a manner in which (a) the wire rod is drawn and then subjected to bluing, heat stretching, molten zinc plating, or molten zinc alloy plating, (b) the wire rod is molten zinc-plated or molten zinc alloy-plated and then drawn, or (c) the wire rod is drawn and then subjected to molten zinc plating or molten zinc alloy plating and, furthermore, is drawn.

(9) The seventh aspect of the invention is the manufacturing method of a steel wire described in the above (6) including a process in which a billet with the above composition is hot-rolled so as to manufacture a rolled wire rod, the rolled wire rod is coiled, a patenting treatment is performed by immersing the rolled wire rod of 900°C or higher in a molten salt at a temperature of 500°C-600°C so as to manufacture a wire rod with a diameter of 3-7 mm; a process in which the wire rod is drawn; a process in which a second patenting treatment is performed by starting cooling by introducing the drawn rolled wire rod of 900°C or higher to a lead bath or a fluidized bed at a temperature of 500°C-600°C, and a process in which cold wire drawing is performed on the wire rod which has been subjected to the second patenting treatment.

(10) The eighth aspect of the invention is the manufacturing method of a steel wire described in the above (6) including a process in which a billet with the above composition is hot-rolled so as to manufacture a rolled wire rod, the rolled wire rod is coiled, cooling is started with respect to the rolled wire rod of 900°C or higher, quenching is performed in a controlled manner to make the cooling rate Y while cooling from 900°C to 650°C satisfy

$$Y \geq \exp ((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

and a patenting treatment is performed by finishing pearlite transformation at a temperature of 650°C-500°C so as to manufacture a wire rod with a diameter of 3-7 mm; a process in which the wire rod is drawn; a process in which a second patenting treatment is performed by starting cooling by introducing the drawn rolled wire rod of 900°C or higher to a lead bath or a fluidized bed of 500°C-600°C, and a process in which cold wire drawing is performed on the wire rod which has been subjected to the second patenting treatment.

(11) The ninth aspect of the invention is the manufacturing method of a steel wire described in the above (6) including a process in which a wire rod with the above composition and a diameter of 3-7 mm is reheated to a temperature of 950°C-1050°C, cooling is started with respect to the reheated wire rod of 900°C or higher, and a patenting treatment is performed in a lead bath or a fluidized bed at a temperature of 500°C-600°C so as to manufacture a wire rod with a diameter of 3-7 mm; a process in which the wire rod is drawn; a process in which a second patenting treatment is performed by starting cooling by introducing the drawn wire rod of 900°C or higher to a lead bath or a fluidized bed at a temperature of 500°C-600°C, and a process in which cold wire drawing is performed on the wire rod which has been subjected to the second patenting treatment.

(12) The tenth aspect of the invention is the manufacturing method of a steel wire described in the above (7) including a process in which a billet having the above composition is hot-rolled so as to manufacture a rolled wire rod, the rolled wire rod is coiled, and a patenting treatment is performed by immersing the rolled wire rod of 900°C or higher into a molten salt at a temperature of 500°C-600°C so as to manufacture a wire rod with a diameter of 5-16 mm; and a process in which the wire rod is drawn.

(13) The tenth aspect of the invention is the manufacturing method of a steel wire described in the above (7) including a process in which a billet having the above composition is hot-rolled so as to manufacture a rolled wire rod, the

rolled wire rod is coiled, cooling is started with respect to the rolled wire rod of 900°C or higher, quenching is performed in a controlled manner to make the cooling rate Y while cooling from 900°C to 650 °C satisfy

$$Y \geq \exp ((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

and a patenting treatment is performed by finishing pearlite transformation at a temperature of 650°C-500°C so as to manufacture a wire rod with a diameter of 5-16 mm; and a process in which the wire rod is drawn.

(14) The tenth aspect of the invention is the manufacturing method of a steel wire described in the above (7) including a process in which a rolled wire rod with the above composition and a diameter of 5-16 mm is prepared and reheated to a temperature of 950°C-1050°C, cooling is started with respect to the rolled wire rod of 900°C or higher, and a patenting treatment is performed in a lead bath or a fluidized bed at a temperature of 500°C-600°C so as to manufacture a wire rod with a diameter of 5-16 mm; and a process in which the wire rod is drawn.

[Effects of the Invention]

[0018] According to the invention, it is possible to provide, with high productivity as well as favorable yield rate at a low price, high strength wire rods that are preferable for use as a steel cord, a sawing wire, a PC steel wire, a zinc plated steel strand, a steel wire for springs, a cable for suspension bridges, or the like, and are excellent in terms of wire drawing properties.

[Brief Description of the Drawings]

[0019]

FIG. 1 shows an example of pro-eutectoid cementite generated in the surface layer area of a wire rod.

FIG. 2 shows the relationship between the temperatures where cooling of wire rods is started and the area ratios of pro-eutectoid θ in the first surface layer areas of the wire rods.

FIG. 3 shows the relationship between the amounts of C in wire rods and the area ratios of pro-eutectoid θ in the first surface layer areas of the wire rods.

FIG. 4 shows the relationship between the amounts of C in wire rods and the area ratios of pro-eutectoid θ in the central areas of the wire rods.

FIG. 5 shows the influence of the cooling rates from 900°C to 650°C and the amounts of C on the amounts of pro-eutectoid θ precipitated in the central areas of the wire rods.

FIG. 6 shows the relationship between the temperatures where cooling of wire rods is started and the area ratios of pro-eutectoid θ in the first surface layer areas of the wire rods.

FIG. 7 shows the relationship between the amounts of C in wire rods and the area ratios of pro-eutectoid θ in the first surface layer areas of the wire rods.

FIG. 8 shows the relationship between the amounts of C in wire rods and the area ratios of pro-eutectoid θ in the central areas of the wire rods.

FIG. 9 shows the influence of the cooling rates from 900°C to 650°C and the amounts of C on the amounts of pro-eutectoid θ precipitated in the central areas of the wire rods.

[Embodiments of the Invention]

[0020] The inventors of the present invention carried out repeated investigations and studies on the influence of the chemical compositions and mechanical properties of wire rods on the wire drawing properties and consequently obtained the following findings.

(a) It is preferable to increase the content of alloy elements, such as C, Si, Mn, Cr, or the like, to increase tensile strength. Particularly, it is possible to increase strength while maintaining high ductility of a steel wire by increasing the amount of C to 1 mass% or higher and relatively decreasing work strain for obtaining target strength.

(b) If the amount of C is increased, pro-eutectoid cementite as shown by the arrow in FIG. 1 is liable to precipitate in overcooled austenite during the period from the start of cooling to the start of pearlite transformation in a cooling process from an austenite zone in a patenting treatment. This tendency becomes remarkable in the central area of a wire rod in which the cooling rate is decreased.

(c) It is possible to express, with a function of the C amount, the critical cooling rate at which the generation of pro-eutectoid cementite in the central area of a wire rod can be suppressed. It is possible to suppress generation of pro-

eutectoid cementite in the central area of a wire rod at which the cooling rate is decreased, by cooling parent-phase austenite at a higher rate and subsequently performing an isothermal treatment.

(d) It is possible to obtain a cooling rate higher than the above critical cooling rate by immersing a wire rod with a content of C of 1.3 mass% or less and a diameter of 3-16 mm in molten salt after heating.

(e) In a general wire rod rolling line, a wire rod is coiled at a constant temperature after final rolling and then transported by a conveyor to a patenting treatment zone, such as a Stelmor or the like. In a reheating patenting line, there is no wire rod coiling process, but a certain amount of time is required to transport the wire rod from the exit side of a heating band to a cooling band for patenting. In a high C material with an amount of C exceeding 1 mass%, since the cementite precipitation temperature (a temperature where austenite becomes austenite + cementite) is high, in the conventional heating and transportation conditions, there are concern that the temperature in an area several tens of μm deep in the outermost surface layer of a wire rod which comes into contact with the atmosphere during transportation may be lowered, and pro-eutectoid cementite may be generated in the outermost surface layer of the wire rod before cooling for a patenting treatment is started.

(f) FIG. 1 shows an example of pro-eutectoid cementite generated in the surface layer area of a wire rod. Since such cementite in the surface layer has a brittle structure, this acts as a cause of surface layer cracks during wire drawing and a cause of the occurrence of delamination in a steel wire obtained by wire drawing, or the like, the ductility of a steel wire is remarkably degraded.

(g) In order to suppress such pro-eutectoid cementite in the outermost surface layer of a wire rod, it is necessary to set the cooling starting temperature of a wire rod for patenting to 900°C or higher. For this, it is necessary to perform final rolling at 980°C or higher, to set the temperature for coiling or reheating to 925°C or higher, which is higher than that in the related art, and preferably to higher than 950°C , and to shorten the transportation time as possible or suppress the lowering of temperature during transportation.

(h) If the final rolling temperature and the coiling temperature are too high, since the grain diameter of austenite in a wire rod becomes coarsened and ductility is degraded, there is an upper limit temperature at which ductility can be secured.

[0021] Hereinafter, embodiments of the invention, which is derived from the above findings will be described in detail.

(First Embodiment)

(Configuration of wire rods)

[0022] The first embodiment of the invention is a wire rod in which 0.5% or less of the area in the central area in cross-section perpendicular to the longitudinal direction of the wire rod and 0.5% or less of the area of the surface layer area (the first surface layer area) in cross-section are occupied by a pro-eutectoid cementite.

[0023] According to studies by the inventors of the invention, there is a relationship between the ratio of pro-eutectoid cementite in the surface layer area of a wire rod and in the central area of the wire rod before wire drawing and the ductility of the steel wire obtained by drawing a wire rod, and, if it is possible to suppress the area ratio of cementite in the surface layer area of the wire rod, the ductility of the steel wire which can be obtained by drawing a wire rod is improved, and wire breakage during wire drawing can be suppressed by decreasing the area ratio of cementite in the central area of the wire rod to 0.5% or lower.

[0024] Here, the surface layer area (the first surface layer area) in the wire rod refers to an area corresponding to a depth of $50\ \mu\text{m}$ from the surface of the wire rod (the circumferential portion in cross-section) in cross-section perpendicular to the longitudinal direction of the wire rod.

[0025] The central area in the wire rod refers to an area with a radius of $100\ \mu\text{m}$ from the central point in cross-section perpendicular to the longitudinal direction of the wire rod.

[0026] The pro-eutectoid cementite refers to cementite with a small deformability, which is generated at the prior austenite grain boundary and has a thickness of $100\ \text{nm}$ or larger.

[0027] In addition, the wire rod according to the present embodiment has 97% or more of the area in cross-section perpendicular to the longitudinal direction of the wire rod occupied by a pearlite. The remainder may be pro-eutectoid cementite, a bainite, a pseudo pearlite, a ferrite, a grain boundary ferrite, a martensite, or the like.

(Manufacturing conditions of the wire rods)

[0028] In order to suppress pro-eutectoid cementite in the surface layer area of a rolled wire rod made of a material with a high C content of 0.95-1.3 mass% to the above area ratio, it is necessary to set the temperature of the wire rod to 900°C or higher, and more preferably to 920°C or higher, at the moment of starting cooling for patenting with a salt bath or a Stelmor when hot-rolling steel pieces (billets) to have a diameter of 3-16 mm. For that, it is desirable to perform

final rolling at 980°C or higher and to perform coiling at a temperature range higher than 925°C, and preferably higher than 950°C. If the temperature of final rolling and the temperature of coiling are too high, an austenite grain diameter in the wire rod becomes coarsened, and ductility (maximum drawability) is degraded. Therefore, it is desirable to set both the temperature of final rolling and the temperature of coiling to 1050°C or lower.

[0029] The amount of pro-eutectoid cementite generated in the central area of a wire rod is dependent on the cooling rate Y while cooling from 900°C to 650°C. The inventors of the invention found that it is effective to quench a wire rod in a method in which the cooling rate Y [°C/s] and the amount of carbon in the wire rod $C\%$ [mass%] satisfy

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad (\text{Formula 1}),$$

and then to finish pearlite transformation at a temperature of 500°C-650°C.

[0030] It is desirable to perform the same measure even in the process of reheating patenting, which is performed on a steel wire before wire drawing or during wire drawing. The reheating patenting refers to a patenting treatment performed after putting a subject into a state of 200°C or lower once and reheating it. In order to suppress pro-eutectoid cementite in the surface layer area or the central area of a reheating patenting steel wire made of a material with a high C content of 0.95-1.3 mass% to the above area ratio, it is effective to set the reheating temperature to 950°C-1050°C, and desirably to from the higher temperature of 975°C or higher and $C\% \times 450 + 450$ (°C) to 1050°C, to sufficiently form a solid solution of C and other alloy elements, to set the temperature of the steel wire when starting cooling for patenting to 900°C or higher, and desirably to 920°C or higher, and then to perform a patenting treatment in a lead bath or a fluidized bed at 500°C-600°C.

(Basic Elements)

[0031] The wire rod according to the embodiment includes C, Si, Mn, Al, Ti, N, and O. Hereinafter, the amount of each component will be described.

C: 0.95-1.35 mass%

[0032] C is an effective element for increasing the strength of a wire rod, and, if the content is less than 0.95%, it is difficult to stabilize and supply high strength to a final product. On the other hand, if the content of C is too high, net-shaped pro-eutectoid cementite is generated in austenite grain boundaries so that the wire is liable to be broken during a wire drawing process and also the toughness and ductility of the ultrafine wire rod after final wire drawing is remarkably degraded. As a result, the amount of C is defined as 0.95-1.30 mass%. In order to obtain a high-strength steel wire, the amount is set preferably to 1.0 mass% or more, and more preferably to 1.1 mass% or more.

Si: 0.1-1.5 mass%

[0033] Si is an effective element for increasing the strength. In addition, Si is a useful element as a deoxidizing element and a necessary element when treating a steel wire rod including no Al. If the amount of Si is less than 0.1 mass%, a deoxidizing action is too low. On the other hand, if the amount of Si is too high, precipitation of pro-eutectoid ferrite is accelerated even in hypereutectoid steel, and the limit processibility in a wire drawing process is degraded. Furthermore, it becomes difficult to perform a wire drawing process by mechanical descaling. Accordingly, the amount of Si is defined as 0.1-1.5 mass%. More preferably, the amount of Si is defined as 1.0 mass% or less, and more preferably as 0.35 mass% or less.

Mn: 0.1-1.0 mass%

[0034] Similarly to Si, Mn is also a useful element as a deoxidizing agent. In addition, Mn is effective to improve hardenability and thus increase the strength of a wire rod. Furthermore, Mn is combined with S to form MnS, thereby preventing hot rolling brittleness. If the amount of Mn content is less than 0.1 mass%, it is difficult to obtain the above effects. On the other hand, Mn is an element liable to be segregated so that, if the Mn content exceeds 1.0 mass%, Mn is segregated particularly in the central area of a wire rod, and martensite or bainite is generated in the segregated portions, which leads to degradation of wire drawing processibility. Accordingly, the amount of Mn is defined as 0.1-1.0 mass%.

EP 2 532 764 B1

Al: 0-0.1 mass%

5 **[0035]** The amount of Al is defined as a range of 0.1 mass% or less including 0 mass% (or exceeding 0 mass%) in order to prevent generation of hard unmodified alumina-based non-metallic inclusions, which causes degradation in the ductility and wire drawing properties of a steel wire. The amount of Al is preferably 0.05 mass% or less, and more preferably 0.01 mass% or less.

Ti: 0-0.1 mass%

10 **[0036]** The amount of Ti is defined as a range of 0.1 mass% or less including 0 mass% (or exceeding 0 mass) in order to prevent generation of hard unmodified oxides, which causes degradation in the ductility and wire drawing properties of a steel wire. The amount of Ti is preferably 0.05 mass% or less, and more preferably 0.01 mass% or less.

N: from 10 ppm to 50 ppm

15 **[0037]** N generates nitrides with Al, Ti, and B in a steel and has an action of preventing coarsening of the austenite grain size during heating, and the effect is effectively exhibited by including 10 ppm or more of N. However, if the N content is too high, the amount of nitrides increases excessively, and therefore the amount of solid-solute B in austenite is decreased. Furthermore, since there is concern that solid-solute N may accelerate aging during wire drawing, the upper limit is set to 50 ppm. More preferably, the amount of N is 30 ppm or less.

O: 10-40 ppm

25 **[0038]** O can form composite inclusions with Si and the like so as to form soft inclusions having no adverse effect on wire drawing properties. It is possible to finely disperse such soft inclusions after rolling, and thus there are effects of refining γ grain size by a pinning effect and of improving ductility of a patenting wire rod. Accordingly, the lower limit is defined as 10 ppm. However, if the O content is too high, since hard inclusions are formed, and wire drawing properties are degraded, the upper limit is defined as 40 ppm.

30 (Inevitable impurities)

[0039] Further, although the contents of P and S which are included in the wire rod according to the embodiment as impurities are not particularly defined, from the viewpoint of securing ductility similar to that of an ultrafine steel wire in the related art, it is desirable to limit each to 0.02 mass% or less. Here, even when less than 0.0005 mass% of each of P and S are included, the effects are limited.

(Optional Elements)

40 **[0040]** In addition to the above elements, the wire rod according to the embodiment may further optionally include one kind or more of elements from Cr, Ni, Co, V, Cu, Nb, Mo, W, B, REM, Ca, Mg, and Zr for the purpose of improving mechanical properties, such as strength, toughness, ductility, or the like. Hereinafter, the amount of each component will be described.

Cr: 0-0.5 mass%

45 **[0041]** Cr is an element that refines the lamella interval in pearlite and is effective to improve the strength, wire drawing processibility or the like of a wire rod. In order to effectively exhibit such actions, it is preferable to add 0.1 mass% or more of Cr. On the other hand, if the amount of Cr is too high, since transformation completion time becomes long, there is concern that supercooled structures, such as martensite, bainite, or the like, may be generated in a hot-rolled wire rod, and mechanical descaling properties may deteriorate, thus, the upper limit is defined as 0.5 mass%.

Ni: 0-0.5 mass%

55 **[0042]** Ni is an element that contributes little to an increase in the strength of a wire rod, but increases the toughness of a drawn wire rod. In order to effectively exhibit such an action, it is preferable to add 0.1 mass% or more of Ni. On the other hand, if Ni is excessively added, transformation completion time becomes long, thus, the upper limit is defined as 0.5 mass%.

EP 2 532 764 B1

Co: 0-0.5 mass%

5 [0043] Co is an effective element that suppresses segregation of pro-eutectoid cementite in a rolled material. In order to effectively exhibit such an action, it is preferable to add 0.1 mass% or more of Co. On the other hand, even when Co is excessively added, the effect is saturated and thus no economic benefit is produced. Accordingly, the upper limit is defined as 0.5 mass%.

V: 0-0.5 mass%

10 [0044] V forms fine carbonitrides in ferrite so as to prevent coarsening of austenite grains during heating and contributes to an increase in strength after rolling. In order to effectively exhibit such an action, it is preferable to add 0.05 mass% or more of V. However, if V is excessively added, the amount of carbonitrides becomes too large, and the grain diameter of carbonitrides becomes large, thus, the upper limit is defined as 0.5 mass%.

15 Cu: 0-0.5 mass%

20 [0045] Cu has an effect of increasing the corrosion resistance of an ultrafine steel wire. In order to effectively exhibit such an action, it is preferable to add 0.1 mass% or more of Cu. However, if Cu is excessively added, Cu reacts with S so as to precipitate CuS, which causes defects in a steel ingot or a wire rod in the manufacturing process of a wire rod. In order to prevent such adverse effects, the upper limit is defined as 0.5 mass%.

Nb: 0-0.1 mass%

25 [0046] Nb has an effect of increasing the corrosion resistance of ultrafine steel wires. In order to effectively exhibit such an action, it is preferable to add 0.05 mass% or more of Nb. On the other hand, if Nb is excessively added, the transformation completion time becomes long. Thus, the upper limit of Nb is defined as 0.1 mass%.

Mo: 0-0.2 mass%

30 [0047] Mo is concentrated in pearlite growth interfaces and has an effect of suppressing the growth of pearlite by a so-called solute drag effect. By adding an appropriate amount, it is possible to suppress the growth of pearlite only in a high temperature area of 600°C or higher, and to suppress the generation of pearlite having coarse lamella spacing. In addition, Mo also has an effect of improving hardenability, with which the generation of ferrite is suppressed, and is also effective to reduce non-pearlite structures. If the amount of Mo is excessive, pearlite growth is suppressed across the
35 entire temperature range so that a long time is required for patenting, which results in a decrease in productivity, and coarse Mo₂C carbides are precipitated, and thus wire drawing properties are degraded. Accordingly, the amount of Mo is defined as 0.2 mass% or less. The preferable amount of Mo is 0.005-0.06 mass%.

W: 0-0.2 mass%

40 [0048] Similarly to Mo, W is concentrated in pearlite growth interfaces and has an effect of suppressing the growth of pearlite by a so-called solute drag effect. By adding an appropriate amount, it is possible to suppress the growth of pearlite only in a high temperature area of 600°C or higher, and to suppress the generation of pearlite in a coarse lamella spacing. In addition, W also has an effect of improving hardenability, with which the generation of ferrite is suppressed,
45 and is also effective to reduce non-ferrite structures. If the amount of W is excessive, pearlite growth is suppressed across the entire temperature range so that a long time is required for patenting, which results in a decrease in productivity, and coarse W₂C carbides are precipitated, and thus wire drawing properties are degraded. Accordingly, the amount of W is defined as 0.2 mass% or lower. The preferable amount of W is 0.005-0.06 mass%.

50 B: 0-30 ppm

55 [0049] When present in a solid solution state in austenite, B is concentrated in grain boundaries so as to suppress the generation of non-pearlite structure, such as ferrite, pseudo pearlite, bainite, or the like. If the amount of B is 4 ppm or higher, it is possible to obtain this effect. On the other hand, if B is excessively added, precipitation of coarse Fe₂₃(CB)₆ carbides in austenite is accelerated, and wire drawing properties are adversely affected. In order to satisfy the above, the upper limit of the amount of B is defined as 30 ppm. The amount of B is preferably 4-15 ppm, and more preferably 8-12 ppm.

REM: 0-50 ppm

5 [0050] REM (Rare Earth Metal) is effective for detoxifying of S, but an excessive addition generates oxides which becomes a cause of wire breakage, and therefore the upper limit of the REM content is defined as 50 ppm.

Ca: 0-50 ppm

10 [0051] Ca is effective to reduce hard alumina-based inclusions, but an excessive addition generates oxides which becomes a cause of wire breakage, and therefore the upper limit of the Ca content is defined as 50 ppm.

Mg: 0-50 ppm

15 [0052] Mg forms fine oxides so as to refine the structure of a steel and improve the ductility. If the content of Mg exceeds 50 ppm, breakage of the wire becomes apt to occur due to oxides, and therefore the upper limit of the Mg content is defined as 50 ppm.

Zr: 0-100 ppm

20 [0053] Since Zr forms the crystallization nuclei of austenite as ZrO, Zr increases the equiaxial crystal ratio of austenite and thus has an effect of reducing central segregation, but if the Zr content exceeds 100 ppm, breakage of the wire becomes apt to occur due to oxides, and therefore the upper limit of the Zr content is defined as 100 ppm.

(Second Embodiment)

25 (Configuration of steel wires)

30 [0054] The second embodiment of the invention is a steel wire which is obtained by drawing the wire rod described in the first embodiment and has a diameter of from 0.1-0.4 mm and a tensile strength of 4200 MPa or higher. The steel wire has 0.5% or less of the area in the surface layer area (the second surface layer area) in cross-section perpendicular to the longitudinal direction of the steel wire occupied by pro-eutectoid cementite.

[0055] Here, the second surface layer area refers to an area to a depth of 10 μ m from the surface layer of the steel wire.

(Manufacturing conditions of the steel wires)

35 [0056] The above steel wires can be obtained by drawing the wire rods described in the first embodiment, heating the rods to 900°C or higher, performing patenting at least once, which starts cooling by introducing the heated wire rods to a lead bath or a fluidized bed at a temperature of 500°C-600°C, and performing cold drawing.

(Third Embodiment)

40 (Configuration of steel wires)

45 [0057] The third embodiment of the invention is a steel wire which is obtained by drawing the wire rod described in the first embodiment with a diameter of from 5-16 mm and has a diameter of from 0.8-8 mm and a tensile strength of 1800 MPa or higher. The steel wire has 0.5% or less of the area in the surface layer area (the third surface layer area) in cross-section perpendicular to the longitudinal direction of the steel wire occupied by pro-eutectoid cementite.

[0058] Here, the third surface layer area refers to an area to a depth of 20 μ m from the surface layer of the steel wire.

(Manufacturing conditions of the steel wires)

50 [0059] The above steel wires can be obtained by performing cold drawing on the wire rods described in the first embodiment.

55 [0060] The steel wires obtained in the above manner may be used as they are after wire drawing, but treatments, such as (1) performing bluing, heat stretching, molten zinc plating, or molten zinc alloy plating after the wire drawing, (2) performing wire drawing after molten zinc plating or molten zinc alloy plating, or (3) performing another wire drawing after wire drawing and molten zinc plating or molten zinc alloy plating, or the like.

[0061] A wire rod, a steel wire, or a manufacturing method thereof having characteristics described in the above embodiments can be also expressed as follows:

That is, one aspect of the invention is a wire rod for high strength steel wire, including, by mass%, C: 0.95-1.30%; Si: 0.1-1.5%; Mn: 0.1-1.0%; Al: 0.1% or less; Ti: 0.1% or less; N: 10-50 ppm; and O: 10-40 ppm with the balance including Fe and inevitable impurities, the steel wire being composed of 97% or more of a pearlite by the area ratio with the remainder of bainite, pseudo pearlite, ferrite, grain boundary ferrite, and pro-eutectoid cementite, wherein the area ratio of pro-eutectoid cementite in an area with a radius of 100 μm from the central portion of the wire rod is 0.5% or less, the area ratio of pro-eutectoid cementite in an area to 50 μm depth of the wire rod from the surface layer is 0.5% or less.

[0062] In addition, the wire rod may further include, by % by mass, at least one kind or more selected from the group consisting of Cr: 0.5% or less (not including 0%), Ni: 0.5% or less (not including 0%), Co: 0.5% or less (not including 0%), V: 0.5% or less (not including 0%), Cu: 0.5% or less (not including 0%), Nb: 0.1% or less (not including 0%), Mo: 0.2% or less (not including 0%), W: 0.2% or less (not including 0%), B: 30 ppm or less (not including 0%).

[0063] In addition, another aspect of the invention is a high strength steel wire excellent in terms of ductility, obtained by drawing the above mentioned wire rod with a diameter of 3-7 mm, performing a patenting treatment, and again drawing the rod, in which the tensile strength is 4200 MPa or higher, and the area ratio of pro-eutectoid cementite in an area to 10 μm depth from the surface layer is 0.5% or less.

[0064] In addition, another aspect of the invention is a high strength steel wire excellent in terms of ductility obtained by drawing the above-mentioned wire rod with a diameter of 5.0-16 mm and then performing bluing, heat stretching, molten zinc plating, or molten zinc alloy plating; a steel wire obtained by performing molten zinc plating or molten zinc alloy plating on the above mentioned wire rod with a diameter of 5.0-16 mm as above, and then performing wire drawing; or a steel wire obtained by drawing the above mentioned wire rod with a diameter of 5.0-16 mm, performing molten zinc plating or molten zinc alloy plating, and then again performing wire drawing, in which the tensile strength is 1800 MPa or higher, and the area ratio of pro-eutectoid cementite in an area to 20 μm depth from the surface layer is 0.5% or less.

[0065] In addition, another aspect of the invention is a manufacturing method of a wire rod for high strength steel wires excellent in terms of ductility, in which when a billet with the above composition is hot-rolled so as to have a wire diameter of 3-16 mm, final rolling and coiling are performed, and then, when immersing into a molten salt, the temperature of the wire rod is set to 900°C or higher, and, subsequently, a patenting treatment is performed by directly immersing into molten salt at a temperature of 500°C-600°C.

[0066] In addition, another aspect of the invention is a manufacturing method of a wire rod for high strength steel wires excellent in terms of ductility, in which, when a billet with the above composition is hot-rolled so as to have a wire diameter of 3-16 mm, final rolling and coiling is performed, and then, when starting cooling of a Stelmor or the like for patenting, the temperature of the wire rod is set to 900°C or higher, and, in the subsequent patenting treatment, quenching is performed in a manner in which the cooling rate Y while cooling from 900°C to 650°C satisfies Formula 1

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

and then pearlite transformation is finished at a temperature of from 500°C-650°C.

[0067] In addition, another aspect of the invention is a manufacturing method of a high strength steel wire excellent in terms of ductility, in which, when performing reheating patenting on a wire rod having the above-described composition and a wire diameter of 3-16 mm, the heating temperature of the wire rod is set to 950°C-1050°C, the temperature of the wire rod when starting cooling for the patenting is set to 900°C or higher, and a patenting treatment is immediately performed in lead or a fluidized bed of 500°C-600°C.

[0068] In addition, another aspect of the invention is a manufacturing method of a high strength steel wire excellent in terms of ductility, in which a wire rod with a diameter of 3-7 mm manufactured by the above manufacturing method is drawn, cold wire drawing is furthermore performed after patenting, the heating temperature of the steel wire during the patenting is set to 950°C-1050°C, the temperature of the steel wire when starting cooling for patenting is set to 900°C or higher, that is a steel wire, on which a patenting treatment has been performed in a lead bath or a fluidized bed at a temperature of 500°C-600°C, is drawn.

[Example]

[0069] Next, the invention will be described in more detail with examples, but the invention is not limited only to the following examples.

(First Example)

[0070] Tables 1 to 4 show the chemical components of A-1 steel, B-1 steel, C-1 steel, D-1 steel, E steel, F steel, G-1 steel, H steel, I steel, J steel, K steel, L-1 steel, M steel, N steel, O steel, P steel, Q-1 steel, Q-2 steel, and Q-3 steel, all of which are used in Examples $\alpha 1$ to $\alpha 19$ of the invention, and the chemical components of A-2 steel, A-3 steel, B-2

steel, B-3 steel, B-4 steel, C-2 steel, D-2 steel, G-2 steel, G-3 steel, G-4 steel, L-2 steel, R steel, S steel, T steel, U steel, V steel, W steel, and X steel, all of which are used in Comparative Examples $\alpha 1$ to $\alpha 18$. Further, in Tables 1 to 8, numeric values, disadvantageous results, and the like, not included in an appropriate scope are underlined.

5 [0071] Billets of steels containing the chemical components shown in Tables 1 to 4 were heated and then hot-rolled so as to become wire rods with a diameter of 3-7 mm, and then were subjected to final rolling at a predetermined temperature, coiling, and a patenting treatment.

10 [0072] After being coiled into a ring shape, the rolled wires were subjected to a patenting treatment by a Stelmor or a molten salt immersion patenting (DLP). Here, DLP refers to a direct in-line patenting facility with which rolled wire rods were directly immersed in molten salt so as to be patenting-treated. In the case of the Stelmor, the cooling rate Y from 900°C to 650°C was obtained from $(900-650) / t$ [°C/s] by measuring the temperatures of overlapped ring portions on the Stelmor conveyor every 0.5 m with a non-contact type thermometer and measuring a necessary time t [s] for cooling from 900°C to 650°C.

15 [0073] In order to measure the area ratios of pearlite and the area ratios of pro-eutectoid cementite in the rolled wire rods, one ring-shaped wire rod with a diameter of 1.0 m to 1.5 m was equally divided into 8 pieces, and two portions with the highest and lowest TSs were identified. 10 mm-long samples were taken out from the portions with the highest and lowest TSs in the continuous ring and implanted in a resin to make it possible to observe the cross-sections (C cross-section) perpendicular to the longitudinal direction. Then, the samples were alumina-polished and corroded with saturated picral, and then were subjected to SEM observation.

20 [0074] The area ratio of the pearlite was obtained from the average value of area ratios measured at four places in a $200 \mu\text{m} \times 200 \mu\text{m}$ square area, which is in 1/4 depth from the surface at the above two portions (the portions with the highest and lowest TSs), every 90 degrees in the circumferential direction at a magnification of 3000 times by image analysis with an assumption that an area ratio excluding pseudo-pearlite portions in which cementite was granularly dispersed, bainite portions in which plate-shaped cementite was dispersed at a lamella spacing three or more times coarser than the surroundings, intergranular ferrite portions precipitated along austenite, and pro-eutectoid cementite

25 [0075] Places where the SEM photos were taken for measurement of the area ratio of pro-eutectoid cementite will be described.

[0076] As the central area of a wire rod, an area with a radius of 100 μm from the central point in cross-section of the portion with the lowest TS was selected.

30 [0077] As the surface layer area of a wire rod, 4 places in a $50 \mu\text{m} \times 50 \mu\text{m}$ area in the vicinity of the circumferential portion in cross-section of the portion with the highest TS were selected every 90 degrees in the circumferential direction.

[0078] The selected areas were measured at a magnification of 5000 times, and the area ratio of pro-eutectoid cementite with a thickness of 100 nm or larger was measured by image analysis.

35 [0079] Further, with regard to the surface layer area, the maximum value of the measurement results of the four places was used.

[0080] For the wire drawing properties of a wire rod, a high strength wire rod was obtained in a manner in which, after scales were removed by pickling from a rolled wire rod, a 10 m-long wire rod provided with a zinc phosphate layer by a bonding treatment was prepared, and then subjected to single head-type wire drawing with an area reduction ratio per pass of 16% to 20% with intermediate lead patenting or fluidized bed patenting performed and then subjected to wet

40 [0081] In order to measure the area ratio of pro-eutectoid cementite in the drawn steel wire, a 10 mm-long sample was taken out from the steel wire with a diameter of 0.18 m to 0.22 m and then implanted in a resin to make it possible to observe the cross-section (C cross-section) thereof perpendicular to the longitudinal direction. Then, the sample was alumina-polished and corroded with saturated picral, and then subjected to SEM observation.

45 [0082] As a place selected for the SEM observation, a $10 \mu\text{m} \times 50 \mu\text{m}$ rectangular area in the vicinity of the circumferential portion in cross-section of the steel wire was selected.

[0083] The selected place was measured at a magnification of 10000 times, and the area ratio of pro-eutectoid cementite with a thickness of 100 nm or larger was measured by image analysis.

50 [0084] Tables 5 to 8 show the manufacturing conditions and the measurement results of the wire rods and the steel wires in Examples $\alpha 1$ to $\alpha 19$ and Comparative Examples $\alpha 1$ to $\alpha 18$. In the tables, the FBP refers to a patenting treatment by a fluidized bed.

[0085] As is clear from Examples $\alpha 1$ to $\alpha 19$ shown in Tables 1 to 8, when the amounts of elements included in the wire rods were appropriately controlled so that the fractions of pro-eutectoid cementite in the surface layers and central portions of the rolled wire rods were suppressed, it was possible to suppress the occurrence of delamination and wire

55 [0086] In Comparative Examples $\alpha 1$, $\alpha 5$, $\alpha 6$, $\alpha 7$, $\alpha 17$, and $\alpha 18$, it was not possible to suppress the generation of surface layer pro-eutectoid cementite in the rolled wire rods due to the low temperature of the wire rods when starting the cooling, which is designed for the patenting. As a result, the area ratios of the pro-eutectoid cementite at the surface

layer of the rolled wire rods exceeded 0.5%, and therefore delamination occurred in the steel wires after the final wire drawing.

[0087] Here, as data reflecting the results of Examples $\alpha 1$ to $\alpha 19$ and the results of Comparative Examples $\alpha 1$, $\alpha 5$, $\alpha 6$, $\alpha 7$, $\alpha 17$, and $\alpha 18$, for which the temperatures of the wire rods when starting the cooling were set to less than 900°C, FIG. 2 shows the relationship between the temperatures of the rolled wire rods when starting the cooling and the area ratios of surface layer cementite. From the drawing, it can be confirmed that, when the temperatures of the wire rods when starting the cooling were set to 900°C or higher, it was possible to suppress pro-eutectoid cementite at the surface layer of the wire rods to 0.5% or lower.

[0088] In Comparative Example $\alpha 2$, since the coiling temperature was high, the ductility of the rolled wire rod was low, and thus the rolled wire rod broke in the primary wire drawing.

[0089] In Comparative Example $\alpha 3$, since the heating temperature was low during the final patenting, it was not possible to suppress cementite at the surface layer and central area of the steel wire after the final wire drawing, and thus delamination occurred.

[0090] In Comparative Examples $\alpha 4$, $\alpha 11$, and $\alpha 15$, since the patenting treatments of the rolled wire rods were performed in a Stelmor, and the cooling rate Y from 900°C to 650°C did not satisfy Formula 1, a large amount of pro-eutectoid cementite was generated in the central areas of the wire rods, and the wire rods broke in the primary wire drawing.

$$Y \geq \exp ((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

[0091] FIG. 3 shows the relationship between the amounts of C in the wire rods and the area ratios of pre-eutectoid cementite in the surface layer area of the wire rods in Examples $\alpha 1$ to $\alpha 19$ and Comparative Examples $\alpha 1$, $\alpha 5$, $\alpha 6$, $\alpha 7$, $\alpha 9$, $\alpha 17$, and $\alpha 18$, for which the component ranges were appropriate, but the final temperature or the temperature when starting the cooling for the patenting, which is an important index that suppresses pro-eutectoid cementite in the surface layers, was low.

[0092] FIG. 4 shows the relationship between the amounts of C in the wire rods and the area ratios of pre-eutectoid cementite in the central area of the wire rods in Examples $\alpha 1$ to $\alpha 19$ and Comparative Examples $\alpha 4$ and $\alpha 11$, for which the component ranges were appropriate, but the cooling rate Y from 900°C to 650°C did not satisfy (Formula 1).

[0093] FIG. 5 shows the influence of the cooling rate Y from 900°C to 650°C and the amounts of C on the amounts of pro-eutectoid cementite precipitated in the central areas of the wire rods in Examples $\alpha 4$, $\alpha 8$, $\alpha 12$, $\alpha 17$, $\alpha 18$, and $\alpha 19$ and Comparative Examples $\alpha 4$, $\alpha 11$, and $\alpha 15$, in which the wire rods were cooled in a Stelmor during the rolling of wire rods. From FIG. 5, it can be confirmed that, when the cooling rate Y satisfied (Formula 1), it was possible to suppress pro-eutectoid cementite in the central area of the wire rods to 0.5% or lower.

[0094] In Comparative Example $\alpha 8$, since the temperature of the molten salt was low, the ductility was lowered due to generation of upper bainite, and thus the wire rod broke in the primary wire drawing.

[0095] In Comparative Example $\alpha 9$, since the temperature of the final rolling was too low, pro-eutectoid cementite was generated in the surface layer of the wire rod during the final rolling. As a result, the area ratio of pro-eutectoid θ in the surface layer of the rolled wire rods exceeded 0.5%, and thus delamination occurred in the steel wire after the final wire drawing.

[0096] In Comparative Example $\alpha 10$, since the temperature of the final rolling was too high, the ductility of the wire rod was lowered, and thus the wire rod broke in the primary wire drawing.

[0097] In Comparative Example $\alpha 12$, since the amount of C was large, the strength of the wire rod was high, and the ductility was too low so that the wire rod broke in the primary wire drawing.

[0098] In Comparative Example $\alpha 13$, since the amount of C was low, it was not possible to obtain a steel wire with a predetermined TS.

[0099] In Comparative Example $\alpha 14$, since the amount of Mn was large, bainite or micro martensite was generated so that it was not possible to satisfy a predetermined pearlite fraction. As a result, the wire rod broke in the primary wire drawing.

[0100] In Comparative Example $\alpha 16$, since the amount of Si was large, bainite or micro martensite was generated so that it was not possible to satisfy a predetermined pearlite fraction. As a result, the wire rod broke in the primary wire drawing.

[0101] In Comparative Example $\alpha 17$, since the coiling temperature was a general condition, a large amount of surface layer pro-eutectoid θ was present, and thus delamination occurred in the steel wire after the final wire drawing.

[0102] In Comparative Example $\alpha 18$, since the coiling temperature was low, a large amount of surface layer pro-eutectoid θ was present, and thus delamination occurred in the steel wire after the final wire drawing.

[Table 1]

[Table 2]

[Table 3]

[Table 4]

[Table 5]

[Table 6]

5 [Table 7]

[Table 8]

(Second Example)

10 **[0103]** Tables 9 to 12 show the chemical components of a-1 steel, b-1 steel, c steel, d steel, e steel, f-2 steel, g-1 steel, h steel, i steel, j-1 steel, k steel, l steel, m steel, n steel, o steel, and p steel, all of which are used in Examples $\beta 1$ to $\beta 16$ of the invention, and the chemical components of j-2 steel, b-2 steel, f-2 steel, a-2 steel, g-2 steel, q steel, and r steel, all of which are used in Comparative Examples $\beta 1$ to $\beta 7$. Further, in Tables 9 to 16, numeric values, disadvantageous results, and the like, not included in an appropriate scope, are underlined.

15 **[0104]** Billets of steels containing the chemical components shown in Tables 9 to 12 were heated and then hot-rolled so as to become wire rods with a diameter of 5.0 mm to 16 mm, and then subjected to final rolling at a predetermined temperature, coiling, and a patenting treatment or reheating patenting.

20 **[0105]** After being coiled into a ring shape, the rolled wire rods were subjected to a patenting treatment by a Stelmor or a direct in-line patenting (DLP). In the case of the Stelmor, the cooling rate Y from 900°C to 650°C was obtained from $(900 - 650) / t$ [$^{\circ}\text{C}/\text{s}$] by measuring the temperatures of overlapped ring portions on the Stelmor conveyor every 0.5 m with a non-contact type thermometer and measuring a necessary time t [t] for cooling from 900°C to 650°C .

25 **[0106]** In order to measure the area ratios of pearlite and the area ratios of pro-eutectoid cementite in the rolled wire rods, one ring-shaped wire rod ring with a diameter of 1.0 m to 1.5 m was equally divided into 8 pieces, and the portions with the highest and lowest TSs were identified. 10 mm-long samples were taken out from two portions with the highest and lowest TSs in the continuous ring and implanted in a resin to make it possible to observe the cross-sections (C cross-sections) perpendicular to the longitudinal direction. Then, the samples were alumina-polished and corroded with saturated picral, and then were subjected to SEM observation.

30 **[0107]** The area ratio of the pearlite was obtained from the average value of area ratios measured at four places in a $200\ \mu\text{m} \times 200\ \mu\text{m}$ square area, which is in 1/4 depth portion ($D = \text{diameter}$) from the surface layer at the above two portions (the portions with the highest and lowest TSs), every 90 degrees in a circumferential direction at a magnification of 3000 times by image analysis with an assumption that an area ratio excluding pseudo-pearlite portions in which cementite was granularly dispersed, bainite portions in which plate-shaped cementite was dispersed at a lamella spacing three or more times coarser than the surroundings, intergranular ferrite portions precipitated alongside, and pro-eutectoid cementite portions was considered as the area ratio of pearlite.

35 **[0108]** Places where the SEM photos were taken for measurement of the area ratio of pro-eutectoid cementite will be described.

[0109] As the central area of a wire rod, an area with a radius of $100\ \mu\text{m}$ from the central point in cross-section of the portion with the lowest TS was selected.

40 **[0110]** As the surface layer area of a wire rod, 4 places in a $50\ \mu\text{m} \times 50\ \mu\text{m}$ square area in the vicinity of the circumferential portion in cross-section of the portion with the highest TS were selected every 90 degrees in the circumferential direction.

[0111] The selected areas were measured at a magnification of 5000 times, and the area ratio of pro-eutectoid cementite with a thickness of 100 nm or larger was measured by image analysis.

45 **[0112]** Further, with regard to the surface layer area, the maximum value of the measurement results of the four places was used.

[0113] For the wire drawing properties of a wire rod, a target high strength steel wire was obtained in any of the following methods and then evaluated by performing a tensile strength test and a twist test.

50 (1) After scales were removed by pickling from a rolled wire rod, a 20 m-long wire rod provided with a zinc phosphate layer by a bonding treatment was prepared, and then subjected to single head-type wire drawing with an area reduction ratio per pass of 16% to 20% so as to obtain a high strength steel wire with a diameter of 0.8 mm to 7 mm. The steel wire was subjected to any of molten zinc plating, molten zinc alloy plating, bluing, and heat stretching.

55 (2) After scales were removed by pickling from a rolled wire rod, a 20 m-long wire rod on which molten zinc plating or molten zinc alloy plating had been performed was prepared, and then subjected to single head-type wire drawing with an area reduction ratio per pass of 16% to 20% so as to obtain a high strength steel wire with a diameter of 0.8 mm to 7 mm.

(3) After scales were removed by pickling from a rolled wire rod, a 20 m-long wire rod provided with a zinc phosphate layer by a bonding treatment was prepared, then subjected to single head-type wire drawing with an area reduction

ratio per pass of 16% to 20%, and then subjected to molten zinc plating or molten zinc alloy plating, and, furthermore, wire drawing so as to obtain a high strength steel wire with a diameter of 0.8 mm to 7 mm.

[0114] In order to measure the area ratio of pro-eutectoid cementite in the drawn wire rod, a 10 mm-long sample was taken out from the steel wire and then implanted in a resin to make it possible to observe the cross-section (C cross-section) perpendicular to the longitudinal direction. Then, the sample was alumina-polished and corroded with saturated picral, and then was subjected to SEM observation.

[0115] As a place selected for the SEM phototaking, a $20\ \mu\text{m} \times 50\ \mu\text{m}$ rectangular area in the vicinity of the circumferential portion in cross-section of the steel wire was selected.

[0116] The selected place was measured at a magnification of 10000 times, and the area ratio of pro-eutectoid cementite with a thickness of 100 nm or larger was measured by image analysis.

[0117] Tables 13 to 16 show the manufacturing conditions and the measurement results of the wire rods and the steel wires in Examples $\beta 1$ to $\beta 16$ and Comparative Examples $\beta 1$ to $\beta 7$.

[0118] As is clear from Examples $\beta 1$ to $\beta 16$ shown in Tables 9 to 16, when the amounts of elements included in the wire rods were appropriately controlled so that the fractions of pro-eutectoid cementite in the surface layers and central portions of the rolled wire rods were suppressed, it was possible to suppress the occurrence of delamination and wire breakage in the steel wires after the wire drawing.

[0119] In Comparative Examples $\beta 1$ and $\beta 5$, it was not possible to suppress the generation of surface layer pro-eutectoid cementite in the rolled wire rods due to the low temperature of the wire rods when starting the cooling, which is designed for the patenting.

[0120] Here, as data reflecting the results of Examples $\beta 1$ to $\beta 16$ and the results of Comparative Examples $\beta 1$, $\beta 5$, and $\beta 7$, for which the temperatures of the wire rods when starting the cooling were set to less than 900°C , FIG. 6 shows the relationship between the temperatures of the rolled wire rods when starting the cooling and the area ratios of surface layer cementite. From the drawing, it can be confirmed that, when the temperatures of the wire rods when starting the cooling were set to 900°C or higher, it was possible to suppress pro-eutectoid cementite at the surface layer of the wire rods to 0.5% or lower.

[0121] In Comparative Example $\beta 2$ and $\beta 7$, since the final rolling temperature was too low, pro-eutectoid cementite was generated in the surface layer of the wire rod during the final rolling.

[0122] In Comparative Examples $\beta 3$ and $\beta 4$, since the patenting treatments of the rolled wire rods were performed in a Stelmor, and the cooling rate Y from 900°C to 650°C did not satisfy Formula 1, a predetermined cooling rate in accordance with the amount of C could not be obtained, and a large amount of pro-eutectoid cementite was generated in the central areas of the wire rods so that the wire rods were broken during the wire drawing.

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad (\text{Formula 1})$$

[0123] In Comparative Example $\beta 6$, since the q steel containing more than the regulated amount of B was used, a large amount of cementite was generated in the surface layer.

[0124] FIG. 7 shows the relationship between the amounts of C in the wire rods and the area ratios of pre-eutectoid cementite in the surface layer area of the wire rods in Examples $\beta 1$ to $\beta 16$ and Comparative Examples $\beta 1$, $\beta 2$, and $\beta 5$, for which the component ranges were appropriate, but the final temperature or the temperature when starting the cooling for the patenting, which is an important index that suppresses pro-eutectoid cementite in the surface layers, was low.

[0125] FIG. 8 shows the relationship between the amounts of C in the wire rods and the area ratios of pre-eutectoid cementite in the central area of the wire rods in Examples $\beta 1$ to $\beta 16$ and Comparative Examples $\beta 3$ and $\beta 4$, for which the component ranges were appropriate, but the cooling rate Y from 900°C to 650°C did not satisfy (Formula 1).

[0126] FIG. 9 shows the influence of the cooling rate Y from 900°C to 650°C and the amounts of C on the amounts of pro-eutectoid cementite precipitated in the central areas of the wire rods in Examples $\beta 6$ and $\beta 9$ and Comparative Examples $\beta 3$ and $\beta 4$. From the drawing, it can be confirmed that, when the cooling rate Y satisfied (Formula 1), it was possible to suppress pro-eutectoid cementite in the central area of the wire rods to 0.5% or lower.

[Table 9]

[Table 10]

[Table 11]

[Table 12]

[Table 13]

[Table 14]

[Table 15]

[Table 16]

[Industrial Applicability]

[0127] According to the invention, it is possible to provide with high productivity and favorable yield rate at a low price high strength wire rods that are preferable for use as a steel cord, a sewing wire, a PC steel wire, a zinc plated steel strand, a steel wire for springs, a cable for suspension bridges, or the like, and are excellent in terms of wire drawing properties, which makes the invention have broad industrial applicability.

Table 1

	Steel Type	Elements								
		C	Si	Mn	P	S	Al	Ti	N	O
		mass%	mass%	mass%	mass%	mass%	mass%	mass%	ppm	ppm
Example α 1	A-1	1.07	0.18	0.3	0.016	0.025	0.000	0.000	20	21
Example α 2	B-1	1.17	0.20	0.32	0.008	0.007	0.003	0.000	26	23
Example α 3	C-1	1.12	0.20	0.48	0.015	0.020	0.001	0.000	25	23
Example α 4	D-1	1.06	0.34	0.3	0.008	0.008	0.000	0.000	26	26
Example α 5	E	1.15	0.20	0.3	0.010	0.008	0.004	0.000	25	38
Example α 6	F	1.21	0.20	0.5	0.008	0.008	0.000	0.001	25	21
Example α 7	G-1	1.22	0.20	0.5	0.008	0.008	0.000	0.001	26	24
Example α 8	H	1.05	0.20	0.3	0.015	0.013	0.000	0.000	22	31
Example α 9	I	1.10	0.20	0.3	0.008	0.008	0.001	0.000	25	21
Example α 10	J	1.28	0.22	0.49	0.010	0.009	0.000	0.000	24	24
Example α 11	K	1.12	0.20	0.34	0.009	0.010	0.000	0.003	21	23
Example α 12	L-1	1.08	0.20	0.4	0.010	0.007	0.000	0.000	20	28
Example α 13	M	1.12	0.20	0.3	0.019	0.015	0.000	0.000	27	25
Example α 14	N	1.17	0.30	0.3	0.008	0.008	0.000	0.000	27	21
Example α 15	O	1.16	0.58	0.3	0.008	0.010	0.000	0.000	27	22
Example α 16	P	1.12	0.70	0.51	0.008	0.008	0.001	0.004	27	35
Example α 17	Q-1	1.02	0.20	0.3	0.008	0.008	0.001	0.002	27	25
Example α 18	Q-2	1.02	0.20	0.3	0.008	0.008	0.001	0.002	27	25
Example α 19	Q-3	1.02	0.20	0.3	0.008	0.008	0.001	0.002	27	25

Table 2

	Steel Type	Elements												
		Cr mass%	Ni mass%	Cu mass%	V mass%	Co mass%	Nb mass%	Mo mass%	W mass%	B ppm	REM ppm	Ca ppm	Mg ppm	Zr ppm
Example α 1	A-1	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 2	B-1	0.22	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 3	C-1	0.20	0.00	0.00	0.04	0.00	0.00	0.000	0.000	9	0	0	0	0
Example α 4	D-1	0.18	0.00	0.00	0.00	0.00	0.00	0.030	0.000	8	0	0	0	0
Example α 5	E	0.05	0.00	0.00	0.00	0.10	0.00	0.000	0.000	0	0	0	0	0
Example α 6	F	0.00	0.00	0.00	0.06	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 7	G-1	0.20	0.00	0.20	0.00	0.00	0.02	0.000	0.000	0	0	0	0	0
Example α 8	H	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	8	0	0	0	0
Example α 9	I	0.21	0.00	0.00	0.00	0.00	0.00	0.060	0.000	10	0	0	0	0
Example α 10	J	0.00	0.00	0.10	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 11	K	0.19	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 12	L-1	0.00	0.10	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 13	M	0.18	0.00	0.00	0.00	0.00	0.00	0.000	0.000	8	0	0	0	0
Example α 14	N	0.23	0.00	0.00	0.00	0.00	0.00	0.000	0.000	9	0	0	0	0
Example α 15	O	0.20	0.00	0.00	0.00	0.00	0.00	0.050	0.000	0	0	0	0	0
Example α 16	P	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 17	Q-1	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 18	Q-2	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example α 19	Q-3	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0

5
10
15
20
25
30
35
40
45
50
55

Table 3

	Steel Type	Elements									
		C mass%	Si mass%	Mn mass%	P mass%	S mass%	Al mass%	Ti mass%	N ppm	O ppm	
Comparative Example α1	A-2	1.07	0.18	0.3	0.016	0.015	0.000	0.000	20	21	
Comparative Example α2	A-3	1.07	0.18	0.3	0.016	0.015	0.000	0.000	20	21	
Comparative Example α3	B-2	1.17	0.20	0.32	0.008	0.007	0.003	0.000	26	23	
Comparative Example α4	B-3	1.17	0.20	0.32	0.008	0.007	0.003	0.000	26	23	
Comparative Example α5	B-4	1.17	0.20	0.32	0.008	0.007	0.003	0.000	26	23	
Comparative Example α6	C-2	1.12	0.20	0.48	0.015	0.020	0.001	0.000	25	23	
Comparative Example α7	D-2	1.06	0.34	0.3	0.008	0.008	0.000	0.000	26	26	
Comparative Example α8	G-2	1.22	0.20	0.5	0.008	0.008	0.000	0.001	26	24	
Comparative Example α9	G-3	1.22	0.20	0.5	0.008	0.008	0.000	0.001	26	24	
Comparative Example α10	G-4	1.22	0.20	0.5	0.008	0.008	0.000	0.001	26	24	
Comparative Example α11	L-2	1.08	0.20	0.4	0.010	0.007	0.000	0.000	20	28	
Comparative Example α12	R	1.35	0.20	0.3	0.015	0.013	0.000	0.000	22	31	
Comparative Example α13	S	0.92	0.20	0.5	0.010	0.009	0.000	0.010	25	23	
Comparative Example α14	T	1.12	0.20	1.2	0.009	0.010	0.000	0.003	21	23	
Comparative Example α15	U	0.98	0.20	0.5	0.009	0.010	0.000	0.003	21	23	
Comparative Example α16	V	1.12	1.60	0.2	0.009	0.010	0.000	0.003	21	23	
Comparative Example α17	W	1.04	0.21	0.4	0.008	0.005	0.001	0.001	35	11	
Comparative Example α18	X	1.05	0.18	0.49	0.006	0.005	0.001	0.000	25	10	

Table 4

	Steel Type	Elements															
		Cr mass%	Ni mass%	Cu mass%	V mass%	Co mass%	Nb mass%	Mo mass%	W mass%	B ppm	REM ppm	Ca ppm	Mg ppm	Zr ppm			
Comparative Example α1	A-2	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α2	A-3	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α3	B-2	0.22	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α4	B-3	0.22	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α5	B-4	0.22	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α6	C-2	0.20	0.00	0.00	0.04	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	9	0	0	0
Comparative Example α7	D-2	0.18	0.00	0.00	0.00	0.00	0.00	0.030	0.000	0.000	0.00	0.000	0.000	8	0	0	0
Comparative Example α8	G-2	0.20	0.00	0.20	0.00	0.00	0.00	0.000	0.000	0.000	0.02	0.000	0.000	0	0	0	0
Comparative Example α9	G-3	0.20	0.00	0.20	0.00	0.00	0.00	0.000	0.000	0.000	0.02	0.000	0.000	0	0	0	0
Comparative Example α10	G-4	0.20	0.00	0.20	0.00	0.00	0.00	0.000	0.000	0.000	0.02	0.000	0.000	0	0	0	0
Comparative Example α11	L-2	0.00	0.10	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α12	R	0.20	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	8	0	0	0
Comparative Example α13	S	0.21	0.00	0.00	0.10	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α14	T	0.19	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α15	U	0.19	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α16	V	0.19	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α17	W	0.49	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0	0	0	0
Comparative Example α18	X	0.22	0.01	0.11	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	10	0	0	0

Table 5

Steel Type	Wire diameter mm	Final temperature °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Salt temperature °C	(Formula 1) Right side	Cooling rate Y 900→650 °C/s	Strength of rolled material MPa	Area ratio of pearlite of surface layer of wire rod %	Area ratio of pro-eutectoid θ in the surface layer area of wire rod %	Area ratio of pro-eutectoid θ in the central area of wire rod %
A-1	5.5	1010	970	930	DLP	550	-	-	1500	98.5	0.05	0.00
B-1	5.5	1020	985	940	DLP	545	-	-	1600	99.0	0.22	0.40
C-1	5.5	1025	960	920	DLP	555	-	-	1570	97.2	0.28	0.22
D-1	3.8	1005	960	925	Stelmor	-	28.0	29.0	1410	98.6	0.25	0.15
E	5.5	1000	975	930	DLP	570	-	-	1560	99.2	0.22	0.28
F	5.5	1020	970	925	DLP	580	-	-	1630	99.1	0.46	0.40
G-1	5.5	1030	1010	970	DLP	600	-	-	1610	97.5	0.37	0.42
H	5.0	1010	955	920	Stelmor	-	25.8	27.0	1400	98.2	0.15	0.19
I	5.5	1015	955	925	DLP	540	-	-	1540	98.4	0.45	0.17
J	5.5	1020	990	960	DLP	600	-	-	1690	97.9	0.48	0.49
K	5.5	1005	960	930	DLP	550	-	-	1560	99.1	0.25	0.10
L-1	5.5	1050	965	935	Stelmor	-	33.1	34.0	1550	99.5	0.12	0.10

5
10
15
20
25
30
35
40
45
50
55

(continued)

Steel Type	Wire diameter mm	Final temperature °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Salt temperature °C	(Formula 1) Right side	Cooling rate Y 900→650 °C	Strength of rolled material MPa	Area ratio of pearlite of surface layer of wire rod %	Area ratio of pro-eutectoid θ in the surface layer area of wire rod %	Area ratio of pro-eutectoid θ in the central area of wire rod %
Example α 14	5.5	1030	950	925	DLP	575	-	-	1580	98.2	0.47	0.39
Example α 15	6.8	1020	980	945	DLP	540	-	-	1620	98.3	0.25	0.30
Example α 16	5.5	1035	975	935	DLP	530	-	-	1660	99.0	0.18	0.15
Example α 17	5.5	1010	950	920	Stelmor	-	20.09	23.0	1340	97.5	0.05	0.08
Example α 18	5.5	1020	960	930	Stelmor	-	20.09	30.0	1355	98.5	0.00	0.00
Example α 19	5.5	1005	955	920	Stelmor	-	20.09	25.0	1355	98.5	0.01	0.01

Table 6

Example	Steel Type	Diameter of final patented wire (mm)	Heating temp. of final patenting (°C)	Temp. of steel wire when starting cooling (°C)	Patenting method	Patenting temperature (°C)	Strength of patented material (MPa)	Diameter of final drawn wire (mm)	TS of Final drawn wire (MPa)	Area ratio of pro-eutectoid θ in the surface layer area of steel wire (%)		Area ratio of pro-eutectoid θ in the central area of steel wire (%)	Wire breakage during wire drawing	Delamination
Example α_1	A-1	1.46	950	930	LP	575	1560	0.20	4331	0.00	0.00	0.00	Not occur	Not occur
Example α_2	B-1	1.27	980	960	LP	575	1670	0.20	4350	0.14	0.21	0.21	Not occur	Not occur
Example α_3	C-1	1.27	960	940	LP	580	1640	0.20	4253	0.09	0.08	0.08	Not occur	Not occur
Example α_4	D-1	1.46	950	925	FBP	575	1530	0.20	4244	0.08	0.00	0.00	Not occur	Not occur
Example α_5	E	1.27	970	950	LP	550	1640	0.20	4265	0.12	0.15	0.15	Not occur	Not occur
Example α_6	F	1.09	995	970	LP	590	1690	0.20	4052	0.12	0.21	0.21	Not occur	Not occur
Example α_7	G-1	1.18	1000	980	FBP	575	1720	0.20	4320	0.15	0.18	0.18	Not occur	Not occur
Example α_8	H	1.46	950	935	LP	550	1560	0.20	4323	0.02	0.04	0.04	Not occur	Not occur
Example α_9	I	1.27	955	930	LP	575	1600	0.18	4378	0.08	0.00	0.00	Not occur	Not occur
Example α_{10}	J	1.27	1030	1000	LP	600	1720	0.20	4521	0.25	0.24	0.24	Not occur	Not occur
Example all	K	1.27	960	930	FBP	575	1630	0.20	4227	0.09	0.05	0.05	Not occur	Not occur
Example α_{12}	L-1	1.46	950	935	LP	575	1590	0.22	4207	0.05	0.03	0.03	Not occur	Not occur

(continued)

Steel Type	Diameter of final patented wire mm	Heating temp. of final patenting °C	Temp. of steel wire when starting cooling °C	Patenting method	Patenting temperature °C	Strength of patented material MPa	Diameter of final drawn wire mm	Tensile strength of final drawn wire MPa	Area ratio of pro-eutectoid θ in the surface layer area of steel wire %	Area ratio of pro-eutectoid θ in the central area of steel wire %	Wire breakage during wire drawing	Delamination
M	1.27	960	940	LP	600	1630	0.20	4227	0.07	0.06	Not occur	Not occur
N	1.27	980	945	LP	575	1690	0.20	4402	0.13	0.14	Not occur	Not occur
O	1.27	975	955	LP	575	1710	0.20	4450	0.15	0.13	Not occur	Not occur
P	1.27	975	955	LP	575	1720	0.22	4231	0.10	0.06	Not occur	Not occur
Q-1	1.53	960	930	FBP	550	1470	0.18	4373	0.04	0.06	Not occur	Not occur
Q-2	1.53	960	930	FBP	550	1475	0.18	4405	0.00	0.00	Not occur	Not occur
Q-3	1.53	960	930	FBP	550	1465	0.18	4360	0.00	0.01	Not occur	Not occur

Table 7

Comparative Example α	Steel Type	Wire diameter mm	Final temperature °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Salt temperature °C	(Formula 1) Right side	Cooling rate Y 900→650°C °C/s	Strength of rolled material MPa	Area ratio of pearlite %	Area ratio of pro-eutectoid θ in the surface layer area of wire rod %	Area ratio of pro-eutectoid θ in the central area of wire rod %
Comparative Example α 2	A-3	5.5	1080	1060	1030	DLP	550	-	1510	97.3	0.03	0.00	
Comparative Example α 3	B-2	5.5	1030	985	945	DLP	540	-	1610	99.3	0.22	0.42	
Comparative Example α 4	B-3	5.5	1035	985	940	Stelmor	-	70.1	1510	99.1	0.21	1.60	
Comparative Example α 5	B-4	5.5	1035	900	860	DLP	550	-	1610	97.5	1.32	0.41	
Comparative Example α 6	C-2	5.5	1025	880	845	DLP	550	-	1560	97.6	0.95	0.15	
Comparative Example α 7	D-2	3.8	1050	880	840	Stelmor	-	28.0	1400	98.2	1.10	0.25	
Comparative Example α 8	G-2	5.5	1020	980	945	DLP	480	-	1620	85.9	0.35	0.45	
Comparative Example α 9	G-3	5.5	960	940	930	DLP	560	-	1670	97.8	1.20	0.46	
Comparative Example α 10	G-4	5.5	1090	990	950	DLP	540	-	1650	98.6	0.42	0.42	
Comparative Example α 11	L-2	5.5	1050	965	935	Stelmor	-	33.1	1440	99.1	0.12	0.90	
Comparative Example α 12	R	5.5	1020	980	940	DLP	560	-	1730	99.2	0.66	0.71	

(continued)

	Steel Type	Wire diameter	Final temperature	Coiling temperature	Temp. of wire rod when starting cooling	Cooling method	Salt temperature	(Formula 1) Right side	Cooling rate Y 900→650°C	Strength of rolled material	Area ratio of pearlite	Area ratio of proeutectoid θ in the surface layer area of wire rod	Area ratio of proeutectoid θ in the central area of wire rod
		mm	°C	°C	°C							°C	%
Comparative Example α 13	S	5.5	1030	950	925	DLP	550	-	-	1410	97.3	0.00	0.00
Comparative Example α 14	T	5.5	1030	960	930	DLP	550	-	-	1640	95.2	0.30	0.28
Comparative Example α 15	U	5.5	1030	960	920	Stelmor	-	14.4	13.0	1250	97.3	0.00	0.60
Comparative Example α 16	V	5.5	1030	960	930	DLP	540	-	-	1650	91.6	0.00	0.36
Comparative Example α 17	W	5.5	980	880	850	Stelmor	-	23.7	25.0	1300	98.0	0.55	0.15
Comparative Example α 18	X	5.5	1037	915	880	Stelmor	-	25.8	45.0	1320	97.5	0.67	0.01

Table 8

Comparative Example α	Steel Type	Diameter of final patented wire mm	Heating temp. of final patenting $^{\circ}\text{C}$	Temp. of steel wire when starting cooling $^{\circ}\text{C}$	Patenting method	Patenting temperature $^{\circ}\text{C}$	Strength of patented material MPa	Diameter of final drawn wire mm	TS of Final drawn wire MPa	Area ratio of pro-eutectoid θ in the surface layer area of steel wire %	Area ratio of pro-eutectoid θ in the central area of steel wire %	Wire breakage during wire drawing	Delamination
Comparative Example α 1	A-2	1.27	955	920	LP	575	1565	0.20	4040	0.00	0.00	Not occur	Occur
Comparative Example α 2	A-3	Wire breakage during primary wire drawing	-	-	-	-	-	-	-	-	-	-	-
Comparative Example α 3	B-2	1.27	920	880	LP	600	1650	0.20	4298	0.85	0.18	Not occur	Occur
Comparative Example α 4	B-3	Wire breakage during primary wire drawing	-	-	-	-	-	-	-	-	-	-	-
Comparative Example α 5	B-4	1.27	960	940	LP	575	1660	0.20	4324	0.21	0.31	Not occur	Occur
Comparative Example α 6	C-2	1.27	960	945	LP	570	1650	0.20	4279	0.09	0.08	Not occur	Occur
Comparative Example α 7	D-2	1.46	950	930	FBP	575	1535	0.20	4258	0.03	0.00	Not occur	Occur

EP 2 532 764 B1

Table 9

	Steel Type	Elements									
		C	Si	Mn	P	S	Al	Ti	N	O	
		mass%	mass%	mass%	mass%	mass%	mass%	mass%	ppm	ppm	
5	Example β1	a-1	0.97	0.20	0.75	0.008	0.009	0.030	0.000	35	21
	Example β2	b-1	1.12	0.20	0.73	0.010	0.008	0.032	0.000	34	23
10	Example β3	c	0.98	1.20	0.33	0.010	0.008	0.029	0.000	25	38
	Example β4	d	0.98	1.00	0.35	0.015	0.008	0.030	0.000	36	38
	Example β5	e	0.97	0.90	0.74	0.011	0.012	0.031	0.011	35	24
15	Example β6	f-2	1.02	0.91	0.74	0.009	0.010	0.031	0.009	35	24
	Example β7	g-1	1.02	0.20	0.3	0.008	0.008	0.001	0.000	25	21
	Example β8	h	1.12	0.22	0.73	0.010	0.009	0.030	0.000	24	24
20	Example β9	i	1.12	0.22	0.51	0.010	0.009	0.001	0.000	24	24
	Example β10	j-1	1.08	0.20	0.75	0.010	0.007	0.030	0.000	31	28
	Example β11	k	1.12	0.20	0.3	0.019	0.025	0.000	0.000	27	25
	Example β12	l	0.98	1.00	0.35	0.015	0.008	0.030	0.000	36	38
25	Example β13	m	1.02	0.91	0.74	0.009	0.010	0.031	0.009	35	24
	Example β14	n	0.97	0.90	0.7	0.012	0.009	0.080	0.000	36	26
	Example β15	o	0.97	0.95	0.3	0.001	0.001	0.031	0.012	36	26
30	Example β16	p	0.97	0.92	0.75	0.009	0.010	0.030	0.012	36	26

35

40

45

50

55

Table 10

	Steel Type	Elements												
		Cr mass%	Ni mass%	Cu mass%	V mass%	Co mass%	Nb mass%	Mo mass%	W mass%	B ppm	REM	Ca	Mg	Zr
Example β1	a-1	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β2	b-1	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β3	c	0.19	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β4	d	0.20	0.00	0.00	0.07	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β5	e	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	10	0	0	0	0
Example β6	f-2	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	8	0	0	0	0
Example β7	g-1	0.21	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β8	h	0.00	0.00	0.10	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β9	i	0.00	0.10	0.00	0.00	0.00	0.05	0.000	0.000	0	0	0	0	0
Example β10	j-1	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Example β11	k	0.00	0.00	0.00	0.00	0.10	0.00	0.008	0.000	0	0	0	0	0
Example β12	1	0.20	0.00	0.00	0.07	0.00	0.00	0.000	0.000	8	0	0	0	0
Example β13	m	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.050	9	0	0	0	0
Example β14	n	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	50	0	0	0
Example β15	o	0.21	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	30	0	0
Example β16	p	0.21	0.00	0.00	0.00	0.00	0.00	0.000	0.000	9	0	0	20	50

5
10
15
20
25
30
35
40
45
50
55

Table 11

	Steel Type	Elements									
		C mass%	Si mass%	Mn mass%	P mass%	S mass%	Al mass%	Ti mass%	N ppm	O ppm	
Comparative Example β1	j-2	1.12	0.22	0.51	0.010	0.009	0.001	0.000	24	24	
Comparative Example β2	b-2	1.12	0.20	0.73	0.010	0.008	0.032	0.000	34	23	
Comparative Example β3	f-2	1.02	0.91	0.74	0.009	0.010	0.031	0.009	35	24	
Comparative Example β4	a-2	0.97	0.20	0.75	0.008	0.009	0.030	0.000	35	21	
Comparative Example β5	g-2	1.02	0.20	0.3	0.008	0.008	0.001	0.000	25	21	
Comparative Example β6	α ₁	1.00	0.90	0.6	0.070	0.070	0.043	0.010	35	22	
Comparative Example β7	r	0.95	0.91	0.49	0.006	0.003	0.032	0.000	40	20	

Table 12

	Steel Type	Elements												
		Cr mass%	Ni mass%	Cu mass%	V mass%	Co mass%	Nb mass%	Mo mass%	W mass%	B ppm	REM ppm	Ca ppm	Mg ppm	Zr ppm
Comparative Example β1	j-2	0.00	0.10	0.00	0.00	0.00	0.05	0.000	0.000	0	0	0	0	0
Comparative Example β2	b-2	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Comparative Example β3	f-2	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	8	0	0	0	0
Comparative Example β4	a-2	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Comparative Example β5	g-2	0.21	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0
Comparative Example β6	α	0.00	0.20	0.00	0.00	0.00	0.10	0.000	0.000	70	0	0	0	0
Comparative Example β7	r	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0	0	0	0	0

Table 13

Example	Steel Type	Wire diameter mm	Final temperature (heating the case of reheating patenting) °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Temperature of salt or lead °C		(Formula 1) Right side	Cooling rate 900→650 °C	Strength of rolled material MPa	Area ratio of pearlite %	Area ratio of proeutectoid θ in the surface layer area of wire rod %	Area ratio of proeutectoid θ in the central area of wire rod %
Example β_1	a-1	13.0	1010	970	930	DLP	510	-	-	1394	98.1	0.05	0.20	
Example β_2	b-1	10.0	1020	960	940	DLP	540	-	-	1549	98.5	0.16	0.40	
Example β_3	c	16.0	1000	950	905	DLP	500	-	-	1599	99.1	0.12	0.28	
Example β_4	d	12.5	1020	970	925	DLP	545	-	-	1530	98.6	0.11	0.38	
Example β_5	e	10.0	1030	985	970	DLP	560	-	-	1544	97.3	0.22	0.35	
Example β_6	f-2	8.0	1010	-	920	Reheating LP	600	20.1	30.0	1620	98.3	0.15	0.39	
Example β_7	g-1	8.0	1015	955	925	DLP	540	-	-	1426	98.2	0.12	0.26	
Example β_8	h	10.0	1020	950	920	DLP	530	-	-	1562	97.3	0.48	0.49	
Example β_9	i	12.0	1020	-	920	Reheating LP	550	46.2	55.0	1511	98.6	0.42	0.48	
Example β_{10}	j-1	7.0	1050	965	935	DLP	550	-	-	1559	99.1	0.35	0.29	
Example β_{11}	k	5.5	1010	960	925	DLP	575	-	-	1559	97.2	0.26	0.36	
Example β_{12}	1	12.5	1020	925	905	DLP	550	-	-	1526	97.5	0.05	0.28	

(continued)

Steel Type	Wire diameter mm	Final temperature (heating temperature in the case of re-heating patenting) °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Temperature of salt or lead °C	(Formula 1) Right side	Cooling rate 900→650 °C	Strength of rolled material MPa	Area ratio of pearlite %	Area ratio of proeutectoid θ in the surface layer area of wire rod	Area ratio of proeutectoid θ in the central area of wire rod
											%	%
Example β 13	5.5	1030	950	925	DLP	550	-	-	1698	97.3	0.31	0.42
Example β 14	12.0	1010	955	925	DLP	560	-	-	1620	97.1	0.03	0.01
Example β 15	12.0	1015	960	930	DLP	550	-	-	1591	98.2	0.00	0.00
Example β 16	12.0	1010	955	930	DLP	570	-	-	1621	97.6	0.02	0.01

Table 14

	Steel Type	Diameter of Final drawn wire	TS of Final drawn wire	Area ratio of pro-eutectoid θ in the surface layer area of steel wire	Area ratio of pro-eutectoid θ in the central area of steel wire	Wire breakage during wire drawing	Delamination	Remark	
		mm	MPa	%	%				
5	Example β 1	a-1	5.4	2120	0.00	0.12	Not occur	Not occur	Bluing after wire drawing
10	Example β 2	b-1	4.2	2286	0.14	0.35	Not occur	Not occur	Heat stretching after wire drawing
15	Example β 3	c	6.7	2126	0.10	0.22	Not occur	Not occur	Heat stretching after wire drawing
20	Example β 4	d	5.2	2257	0.09	0.30	Not occur	Not occur	Heat stretching after wire drawing
25	Example β 5	e	4.2	2270	0.15	0.28	Not occur	Not occur	After wire drawing, molten 5% Al-Zn plating and another wire drawing
30	Example β 6	f-2	3.3	2351	0.10	0.30	Not occur	Not occur	Bluing after wire drawing
35	Example β 7	g-1	3.3	2156	0.05	0.19	Not occur	Not occur	Wire drawing after molten 10% Al-Zn plating
40	Example β 8	h	4.2	2299	0.43	0.41	Not occur	Not occur	As the drawn wire is
45	Example β 9	i	5.0	2248	0.39	0.42	Not occur	Not occur	After wire drawing, molten zinc plating and another wire drawing
50									
55									

EP 2 532 764 B1

(continued)

	Steel Type	Diameter of Final drawn wire	TS of Final drawn wire	Area ratio of pro-eutectoid θ in the surface layer area of steel wire	Area ratio of pro-eutectoid θ in the central area of steel wire	Wire breakage during wire drawing	Delamination	Remark	
		mm	MPa	%	%				
5									
10									
15	Example β 10	j-1	2.9	2294	0.26	0.21	Not occur	Not occur	Wire drawing after molten zinc plating
20	Example β 11	k	2.3	2296	0.19	0.29	Not occur	Not occur	Wire drawing after molten zinc plating
25	Example β 12	1	5.2	2254	0.03	0.25	Not occur	Not occur	Heat stretching after wire drawing
30	Example β 13	m	2.3	2428	0.22	0.36	Not occur	Not occur	Wire drawing after molten zinc plating
35	Example β 14	n	5.0	2196	0.01	0.00	Not occur	Not occur	Molten lead plating and heat stretching after wire drawing
40	Example β 15	o	5.0	2168	0.00	0.00	Not occur	Not occur	Molten zinc plating after wire drawing
45	Example β 16	p	5.1	2181	0.01	0.00	Not occur	Not occur	Molten zinc plating after wire drawing

Table 15

Comparative Example	Steel Type	Wire diameter mm	Final temperature (heating temperature in the case of re-heating patenting) °C	Coiling temperature °C	Temp. of wire rod when starting cooling °C	Cooling method	Temperature of salt or lead °C	(Formula 1) Right side	Cooling rate 900→650°C °C/s	Strength of material MPa	Area ratio of pearlite %	Area ratio of pro-eutectoid θ in the surface layer area of wire rod %	Area ratio of pro-eutectoid θ in the central area of wire rod %
Comparative Example β 1	j-2	11.0	1030	875	850	DLP	550	-	-	1515	98.2	0.70	0.02
Comparative Example β 2	b-2	11.0	960	930	910	DLP	550	-	-	1531	97.3	0.62	0.04
Comparative Example β 3	f-2	12.0	1030	985	945	Stelmor	-	20.1	15.0	1450	99.3	0.60	1.60
Comparative Example β 4	a-2	13.0	1035	985	940	Stelmor	-	13.2	8.0	1240	99.1	0.40	1.20
Comparative Example β 5	g-2	8.0	1035	825	800	DLP	550	-	-	1420	97.5	1.32	0.05
Comparative Example β 6	α	12.0	1035	950	900	DLP	550	-	-	1460	97.2	1.56	0.40
Comparative Example β 7	r	11.0	950	-	890	Reheating LP	540	-	-	1440	97.2	0.65	0.30

Table 16

Comparative Example	Steel Type	Diameter of Final drawn wire		TS of Final drawn wire	Area ratio of pro-eutectoid θ in the surface layer area of steel wire		Area ratio of pro-eutectoid θ in the central area of steel wire		Wire breakage during wire drawing	Delamination	Remark
		mm	MPa		%	%	%	%			
Comparative Example β 1	j-2	4.6	2252	0.62	0.00	0.00	0.00	Not occur	Occur	Heat stretching after wire drawing	
Comparative Example β 2	b-2	4.6	2268	0.52	0.00	0.00	0.00	Not occur	Occur	Bluing after wire drawing	
Comparative Example β 3	f-2	Wire breakage occurs	-	-	-	-	-	Occur	-	Wire drawing after molten zinc plating	
Comparative Example β 4	a-2	Wire breakage occurs	-	-	-	-	-	Occur	-	Wire drawing after molten zinc plating	
Comparative Example β 5	g-2	3.3	2150	1.20	0.00	0.00	0.00	Not occur	Occur	Wire drawing after molten zinc plating	
Comparative Example β 6	α	5.3	2030	1.43	0.00	0.00	0.00	Not occur	Occur	Molten zinc plating after wire drawing	
Comparative Example β 7	r	5.0	2040	0.52	0.25	0.25	0.25	Not occur	Occur	As the drawn wire is	

Claims

1. A wire rod with a composition comprising: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, wherein 97% or more of an area in a cross-section perpendicular to the longitudinal direction of the wire rod is occupied by a pearlite, and 0.5% or less of an area in a central area in the cross-section and 0.5% or less of an area in a first surface layer area in the cross-section are occupied by a pro-eutectoid cementite.

2. The wire rod according to Claim 1, wherein 97% or more of the area in the cross-section perpendicular to the longitudinal direction of the wire rod is occupied by the pearlite, and the remainder of the cross-section of the wire rod is the pro-eutectoid cementite, a bainite, a pseudo pearlite, a ferrite, a grain boundary ferrite, and/or a martensite.

3. A manufacturing method of the wire rod according to Claim 1 or 2, comprising:

hot-rolling a billet with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, so as to obtain a rolled wire rod; coiling the rolled wire rod; and performing a patenting treatment by immersing the rolled wire rod of 900°C or higher into a molten salt at a temperature of 500°C-600°C.

4. A manufacturing method of the wire rod according to Claim 1 or 2, comprising:

hot-rolling a billet with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, so as to obtain a rolled wire rod; coiling the rolled wire rod; and performing a patenting treatment by starting cooling of the rolled wire rod of 900°C or higher, cooling the rolled wire rod in a manner that a cooling rate Y for cooling the rolled wire rod from 900°C to 650°C is controlled to satisfy Formula 1, and finishing a pearlite transformation at a temperature of 650°C-500°C.

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad \text{Formula 1}$$

5. A manufacturing method of the wire rod according to Claim 1 or 2, comprising:

preparing a rolled wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, and a diameter of 3-16 mm, and reheating the rolled wire rod to a temperature of 950°C-1050°C; and performing a patenting treatment by starting cooling of the rolled wire rod of 900°C or higher using a lead bath or a fluidized bed at a temperature of 500°C-600°C.

6. A steel wire obtained by performing at least once a wire drawing and a reheating patenting treatment on a wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable

impurities, in which 97% or more of an area in a cross-section perpendicular to the longitudinal direction of the wire rod is occupied by a pearlite, and 0.5% or less of an area in a central area of the cross-section and 0.5% or less of an area in a first surface layer area in the cross-section are occupied by a pro-eutectoid cementite, wherein:

5 the steel wire has a diameter of 0.1-0.4 mm and a tensile strength of 4200 MPa or higher; and
0.5% or less of an area in a second surface layer area in the cross-section perpendicular to the longitudinal direction of the steel wire is occupied by a pro-eutectoid cementite.

7. A steel wire obtained by drawing a wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%;
10 Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O:
10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1
mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100
15 ppm; and the balance including Fe and inevitable impurities, in which 97% or more of an area in a cross-section
perpendicular to the longitudinal direction of the wire rod is occupied by a pearlite, and 0.5% or less of an area in a
central area in the cross-section and 0.5% or less of an area in a first surface layer area in the cross-section are
occupied by a pro-eutectoid cementite, wherein:

the steel wire has a diameter of 0.8-8 mm and a tensile strength of 1800 MPa or higher; and
0.5% or less of an area in a third surface layer area in the cross-section perpendicular to the longitudinal direction
20 of the steel wire is occupied by a pro-eutectoid cementite.

8. The steel wire according to Claim 7 obtained by:

(a) drawing the wire rod and performing bluing, heat stretching, molten zinc plating, or molten zinc alloy plating
25 to the wire rod,
(b) drawing the wire rod after performing molten zinc-plating or molten zinc alloy-plating, or
(c) drawing the wire rod, performing molten zinc plating or molten zinc alloy plating, and further drawing the
drawn wire rod.

9. The manufacturing method of a steel wire according to Claim 6, comprising:

manufacturing a wire rod with a diameter of 3-7 mm by hot-rolling a billet with a composition including: C:
0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%;
35 S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5
mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50
ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities,
coiling the rolled wire rod, and performing a patenting treatment by immersing the rolled wire rod of 900°C or
higher into a molten salt at a temperature of 500°C-600°C;
drawing the wire rod;
40 performing a second patenting treatment by starting cooling by introducing the drawn rolled wire rod of 900°C
or higher into a lead bath or a fluidized bed at a temperature of 500°C-600°C; and
performing cold wire drawing on the wire rod which has been subjected to the second patenting treatment.

10. The manufacturing method of a steel wire according to Claim 6, comprising:

45 manufacturing a wire rod with a diameter of 3-7 mm by producing a rolled wire rod by hot-rolling a billet with a
composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1
mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%;
50 Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%;
B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and
inevitable impurities, coiling the rolled wire rod, and performing a patenting treatment by starting cooling of the
rolled wire rod of 900°C or higher, quenching the rolled wire rod in a manner that a cooling rate Y for cooling
the rolled wire rod from 900°C to 650°C is controlled to satisfy Formula 1, and finishing a pearlite transformation
at a temperature of 650°C-500°C;
55 drawing the wire rod;
performing a second patenting treatment by starting cooling by introducing the drawn rolled wire rod of 900°C
or higher into a lead bath or a fluidized bed at a temperature of 500°C-600°C; and
performing cold wire drawing on the wire rod which has been subjected to the second patenting treatment.

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad \text{Formula 1}$$

11. The manufacturing method of a steel wire according to Claim 6, comprising:

5 manufacturing a wire rod with a diameter of 3-7 mm by reheating a wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities and a diameter of 3 mm to 7 mm to a temperature of 950°C-1050°C, starting cooling of the reheated wire rod of 900°C or higher, and performing a patenting treatment using a lead bath or a fluidized bed at a temperature of 500°C-600°C;

10 drawing the wire rod;

15 performing a second patenting treatment by starting cooling by introducing the drawn wire rod of 900°C or higher into a lead bath or a fluidized bed at a temperature of 500°C-600°C; and performing cold wire drawing on the wire rod which has been subjected to the second patenting treatment.

12. The manufacturing method of a steel wire according to Claim 7, comprising:

20 manufacturing a wire rod with a diameter of 5-16 mm by hot-rolling a billet with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities, so as to manufacture a rolled wire rod, coiling the rolled wire rod, and performing a patenting treatment by immersing the rolled wire rod of 900°C or higher into a molten salt at a temperature of 500°C-600°C; and drawing the wire rod.

13. The manufacturing method of a steel wire according to Claim 7 comprising:

30 manufacturing a wire rod with a diameter of 5-16 mm by hot-rolling a billet with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities so as to manufacture a rolled wire rod, coiling the rolled wire rod, and performing a patenting treatment by starting cooling of the rolled wire rod of 900°C or higher, quenching the rolled wire rod in a manner that a cooling rate Y for cooling the rolled wire rod from 900°C to 650°C is controlled to satisfy Formula 1, and finishing a pearlite transformation at a temperature of 650°C-500°C; and drawing the wire rod.

$$Y \geq \exp((C\% - 0.66) / 0.12) \quad \text{Formula 1}$$

14. The manufacturing method of a steel wire according to Claim 7, comprising:

50 manufacturing a wire rod with a diameter of 5-16 mm by preparing a rolled wire rod with a composition including: C: 0.95-1.30 mass%; Si: 0.1-1.5 mass%; Mn: 0.1-1.0 mass%; Al: 0-0.1 mass%; Ti: 0-0.1 mass%; P: 0-0.02 mass%; S: 0-0.02 mass%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0.5 mass%; Ni: 0-0.5 mass%; Co: 0-0.5 mass%; V: 0-0.5 mass%; Cu: 0-0.5 mass%; Nb: 0-0.1 mass%; Mo: 0-0.2 mass%; W: 0-0.2 mass%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; and the balance including Fe and inevitable impurities and a diameter of 5-16 mm, reheating the rolled wire rod to a temperature of 950°C-1050°C, and performing a patenting treatment by starting cooling of the rolled wire rod of 900°C or higher using a lead bath or a fluidized bed at a temperature of 500°C-600°C; and drawing the wire rod.

Patentansprüche

1. Ein Walzdraht, mit einer Zusammensetzung umfassend: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, wobei 97% oder mehr eines Bereichs in einem zu der Längsrichtung orthogonalen Querschnitt des Walzdrahts durch einen Perlit besetzt ist, und

0,5% oder weniger eines Bereichs in einem zentralen Bereich des Querschnitts und 0,5% oder weniger eines Bereichs in einem ersten Oberflächenschichtbereich im Querschnitt durch einen pro-eutektoiden Zementit besetzt sind.

2. Der Walzdraht gemäß Anspruch 1, wobei 97% oder mehr des Bereichs in einem zu der Längsrichtung orthogonalen Querschnitt des Walzdrahts durch einen Perlit besetzt ist, und der verbleibende Querschnitt des Walzdrahts der pro-eutektoiden Zementit, ein Bainit, ein Pseudoperlit, ein Ferrit, ein Korngrenzenferrit, und/oder ein Martensit ist.

3. Ein Verfahren zur Herstellung des Walzdrahts gemäß Anspruch 1 or 2, umfassend:

Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, um einen gewalzten Walzdraht zu erhalten; Wickeln des gewalzten Walzdrahts; und Durchführen einer Patentierungsbehandlung durch Tauchen des gewalzten Walzdrahts bei 900°C oder mehr in ein geschmolzenes Salz bei einer Temperatur von 500°C-600°C.

4. Ein Verfahren zur Herstellung des Walzdrahts gemäß Anspruch 1 or 2, umfassend:

Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, um einen gewalzten Walzdraht zu erhalten; Wickeln des gewalzten Walzdrahts; und Durchführen einer Patentierungsbehandlung durch Beginnen des Kühlens des gewalzten Walzdrahts bei 900°C oder mehr, Kühlen des gewalzten Walzdrahts in einer solchen Weise, dass eine Kühlrate Y zum Kühlen des gewalzten Walzdrahts von 900°C bis 650°C so eingestellt wird, dass sie die Formel 1 erfüllt, und Fertigstellen einer Perlitumwandlung bei einer Temperatur von 650°C-500°C.

$$Y \geq \exp((C\% - 0,66) / 0,12) \quad \text{Formel 1}$$

5. Ein Verfahren zur Herstellung des Walzdrahts gemäß Anspruch 1 or 2, umfassend:

Herstellen eines gewalzten Walzdrahts mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, und einem Durchmesser von 3-16 mm, und Wiedererwärmen des gewalzten Walzdrahts auf eine Temperatur von 950°C-1050°C; und Durchführen einer Patentierungsbehandlung durch Beginnen des Kühlens des gewalzten Walzdrahts bei 900°C oder mehr unter Verwendung eines Bleibads oder einer Wirbelschicht bei einer Temperatur von 500°C-600°C.

EP 2 532 764 B1

6. Ein Stahldraht, der erhalten ist durch mindestens einmaliges Durchführen eines Drahtziehens und einer Wiedererwärmungs-Patentierungsbehandlung mit einem Walzdraht mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, in dem 97% oder mehr eines Bereichs in einem zu der Längsrichtung orthogonalen Querschnitt des Walzdrahts durch einen Perlit besetzt ist, und 0,5% oder weniger eines Bereichs in einem zentralen Bereich des Querschnitts und 0,5% oder weniger eines Bereichs in einem ersten Oberflächenschichtbereich im Querschnitt durch einen pro-eutektoiden Zementit besetzt sind, wobei:

der Stahldraht einen Durchmesser von 0,1-0,4 mm und eine Zugfestigkeit von 4200 MPa oder mehr aufweist; und 0,5% oder weniger eines Bereichs in einem zweiten Oberflächenschichtbereich in dem zu der Längsrichtung des Stahldrahts orthogonalen Querschnitt durch einen pro-eutektoiden Zementit besetzt ist.

7. Ein Stahldraht, der erhalten ist durch Ziehen eines Walzdrahts mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, in dem 97% oder mehr eines Bereichs in einem zu der Längsrichtung orthogonalen Querschnitt des Walzdrahts durch einen Perlit besetzt ist, und 0,5% oder weniger eines Bereichs in einem zentralen Bereich des Querschnitts und 0,5% oder weniger eines Bereichs in einem ersten Oberflächenschichtbereich im Querschnitt durch einen pro-eutektoiden Zementit besetzt sind, wobei:

der Stahldraht einem Durchmesser von 0,8-8 mm und eine Zugfestigkeit von 1800 MPa oder mehr aufweist; und 0,5% oder weniger eines Bereichs in einem dritten Oberflächenschichtbereich in dem zu der Längsrichtung des Stahldrahts orthogonalen Querschnitt durch einen pro-eutektoiden Zementit besetzt ist.

8. Der Stahldraht gemäß Anspruch 7, erhalten durch:

- (a) Ziehen des Walzdrahts und Durchführen von Bläuen, Wärmestrecken, Platieren mit geschmolzenem Zink, oder Platieren mit geschmolzener Zinklegierung auf dem Walzdraht,
- (b) Ziehen des Walzdrahts nach dem Durchführen des Platierens mit geschmolzenem Zink oder des Platierens mit geschmolzener Zinklegierung, oder
- (c) Ziehen des Walzdrahts, Durchführen von Platieren mit geschmolzenem Zink oder Platieren mit geschmolzener Zinklegierung, und weiter Ziehen des gezogenen Walzdrahts.

9. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 6, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 3-7 mm durch Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, Wickeln des gewalzten Walzdrahts, und Durchführen einer Patentierungsbehandlung durch Tauchen des gewalzten Walzdrahts bei 900°C oder mehr in ein geschmolzenes Salz bei einer Temperatur von 500°C-600°C; Ziehen des Walzdrahts; Durchführen einer zweiten Patentierungsbehandlung durch Beginnen des Kühlens durch Einführen des gezogenen gewalzten Walzdrahts bei 900°C oder mehr in ein Bleibad oder eine Wirbelschicht bei einer Temperatur von 500°C-600°C; und Durchführen von Kaltdrahtziehen mit dem Walzdraht, der der zweiten Patentierungsbehandlung unterzogen worden ist.

10. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 6, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 3-7 mm durch Herstellen eines gewalzten Walzdrahts

durch Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, Wickeln des gewalzten Walzdrahts, und Durchführen einer Patentierungsbehandlung durch Beginnen des Kühlens des gewalzten Walzdrahts bei 900°C oder mehr, Abschrecken des gewalzten Walzdrahts in einer solchen Weise, dass eine Kühlrate Y zum Köhlen des gewalzten Walzdrahts von 900°C bis 650°C so eingestellt wird, dass sie die Formel 1 erfüllt, und Fertigstellen einer Perlitumwandlung bei einer Temperatur von 650°C-500°C;
Ziehen des Walzdrahts;
Durchführen einer zweiten Patentierungsbehandlung durch Beginnen des Kühlens durch Einführen des gezogenen gewalzten Walzdrahts bei 900°C oder mehr in ein Bleibad oder eine Wirbelschicht bei einer Temperatur von 500°C-600°C; und
Durchführen von Kaltdrahtziehen mit dem Walzdraht, der der zweiten Patentierungsbehandlung unterzogen worden ist.

$$Y \geq \exp ((C\% - 0,66) / 0,12) \quad \text{Formel 1}$$

11. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 6, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 3-7 mm durch Wiedererwärmen eines Walzdrahts mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, und einem Durchmesser von 3 mm bis 7 mm auf eine Temperatur von 950°C-1050°C, Beginnen des Kühlens des wiedererwärmten Walzdrahts bei 900°C oder mehr, und Durchführen einer Patentierungsbehandlung unter Verwendung eines Bleibads oder einer Wirbelschicht bei einer Temperatur von 500°C-600°C;
Ziehen des Walzdrahts;
Durchführen einer zweiten Patentierungsbehandlung durch Beginnen des Kühlens durch Einführen des gezogenen Walzdrahts bei 900°C oder mehr in ein Bleibad oder eine Wirbelschicht bei einer Temperatur von 500°C-600°C; und
Durchführen von Kaltdrahtziehen mit dem Walzdraht, der der zweiten Patentierungsbehandlung unterzogen worden ist.

12. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 7, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 5-16 mm durch Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, um einen gewalzten Walzdraht herzustellen, Wickeln des gewalzten Walzdrahts, und Durchführen einer Patentierungsbehandlung durch Tauchen des gewalzten Walzdrahts bei 900°C oder mehr in ein geschmolzenes Salz bei einer Temperatur von 500°C-600°C; und
Ziehen des Walzdrahts.

13. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 7, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 5-16 mm durch Warmwalzen eines Knüppels mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg:

EP 2 532 764 B1

0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet, um einen gewalzten Walzdraht herzustellen, Wickeln des gewalzten Walzdrahts, und Durchführen einer Patentierungsbehandlung durch Beginnen des Kühlens des gewalzten Walzdrahts bei 900°C oder mehr, Abschrecken des gewalzten Walzdrahts in einer solchen Weise, dass eine Kühlrate Y zum Kühlen des gewalzten Walzdrahts von 900°C bis 650°C so eingestellt wird, dass sie die Formel 1 erfüllt, und Fertigstellen einer Perlitumwandlung bei einer Temperatur von 650°C-500°C; und Ziehen des Walzdrahts.

$$Y \geq \exp((C\% - 0,66) / 0,12) \quad \text{Formel 1}$$

14. Das Verfahren zur Herstellung eines Stahldrahts gemäß Anspruch 7, umfassend:

Herstellen eines Walzdrahts mit einem Durchmesser von 5-16 mm durch Herstellen eines gewalzten Walzdrahts mit einer Zusammensetzung, die beinhaltet: C: 0,95-1,30 Massen-%; Si: 0,1-1,5 Massen-%; Mn: 0,1-1,0 Massen-%; Al: 0-0,1 Massen-%; Ti: 0-0,1 Massen-%; P: 0-0,02 Massen-%; S: 0-0,02 Massen-%; N: 10-50 ppm; O: 10-40 ppm; Cr: 0-0,5 Massen-%; Ni: 0-0,5 Massen-%; Co: 0-0,5 Massen-%; V: 0-0,5 Massen-%; Cu: 0-0,5 Massen-%; Nb: 0-0,1 Massen-%; Mo: 0-0,2 Massen-%; W: 0-0,2 Massen-%; B: 0-30 ppm; REM: 0-50 ppm; Ca: 0-50 ppm; Mg: 0-50 ppm; Zr: 0-100 ppm; und den Rest, der Fe und unvermeidbare Verunreinigungen beinhaltet und einem Durchmesser von 5-16 mm, Wiedererwärmen des gewalzten Walzdrahts auf eine Temperatur von 950°C-1050°C, und Durchführen einer Patentierungsbehandlung durch Beginnen des Kühlens des gewalzten Walzdrahts bei 900°C oder mehr unter Verwendung eines Bleibads oder einer Wirbelschicht bei einer Temperatur von 500°C-600°C; und Ziehen des Walzdrahts.

Revendications

1. Fil machine avec une composition comprenant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, dans lequel 97 % ou plus d'une surface dans une section transversale perpendiculaire à la direction longitudinale du fil machine sont occupés par une perlite, et 0,5 % ou moins d'une surface dans une surface centrale dans la section transversale et 0,5 % ou moins d'une surface dans une surface de première couche superficielle dans la section transversale sont occupés par une cémentite pro-eutectoïde.
2. Fil machine selon la revendication 1, dans lequel 97 % ou plus de la surface dans la section transversale perpendiculaire à la direction longitudinale du fil machine sont occupés par la perlite, et le reste de la section transversale du fil machine est la cémentite pro-eutectoïde, une bainite, une pseudo-perlite, une ferrite, une ferrite de limite de grains, et/ou une martensite.
3. Procédé de fabrication du fil machine selon la revendication 1 ou 2, comprenant :
le laminage à chaud d'une billette avec une composition comprenant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al: 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 pm ; et le reste incluant Fe et des impuretés inévitables, afin d'obtenir un fil machine laminé ;
l'enroulement du fil machine laminé ; et
la réalisation d'un traitement de patentage par immersion du fil machine laminé à 900°C ou supérieur dans un sel fondu à une température de 500°C-600°C.
4. Procédé de fabrication du fil machine selon la revendication 1 ou 2, comprenant :

EP 2 532 764 B1

le laminage à chaud d'une billette avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, afin d'obtenir un fil machine laminé ; et l'enroulement du fil machine laminé ; et

la réalisation d'un traitement de patentage en démarrant le refroidissement du fil machine laminé à 900°C ou supérieur, le refroidissement du fil machine laminé de sorte qu'une vitesse de refroidissement Y pour le refroidissement du fil machine laminé de 900°C à 650°C est contrôlée pour satisfaire la formule 1, et la finition d'une transformation de perlite à une température de 650°C-500°C.

$$Y \geq \exp ((C\% - 0,66)/0,12) \quad \text{Formule 1}$$

5. Procédé de fabrication du fil machine selon la revendication 1 ou 2, comprenant :

la préparation d'un fil machine laminé avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, et un diamètre de 3-16 mm, et le réchauffage du fil machine laminé à une température de 950°C-1 050°C ; et

la réalisation d'un traitement de patentage en démarrant le refroidissement du fil machine laminé à 900°C ou supérieur en utilisant un bain de plomb ou un lit fluidisé à une température de 500°C-600°C.

6. Fil en acier obtenu par réalisation d'au moins un étirage de fil et d'un traitement de patentage par réchauffage sur un fil machine avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, dans lequel 97 % ou plus d'une surface dans une section transversale perpendiculaire à la direction longitudinale du fil machine sont occupés par une perlite, et 0,5 % ou moins d'une surface dans une surface centrale de la section transversale et 0,5 % ou moins d'une surface dans une surface de première couche superficielle dans la section transversale sont occupés par une cémentite pro-eutectoïde, dans lequel :

le fil en acier présente un diamètre de 0,1-0,4 mm et une résistance à la traction de 4 200 MPa ou supérieure ; et 0,5 % ou moins d'une surface dans une surface de seconde couche superficielle dans la section transversale perpendiculaire à la direction longitudinale du fil en acier est occupé par une cémentite pro-eutectoïde.

7. Fil en acier obtenu par étirage d'un fil machine avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, dans lequel 97 % ou plus d'une surface dans une section transversale perpendiculaire à la direction longitudinale du fil machine sont occupés par une perlite, et 0,5 % ou moins d'une surface dans une surface centrale dans la section transversale et 0,5 % ou moins d'une surface dans une surface de première couche superficielle dans la section transversale sont occupés par une cémentite pro-eutectoïde, dans lequel :

le fil d'acier présente un diamètre de 0,8-8 mm et une résistance à la traction de 1 800 MPa ou supérieure ; et 0,5 % ou moins d'une surface dans une surface de troisième couche superficielle dans la section transversale par rapport à la direction longitudinale du fil d'acier est occupé par une cémentite pro-eutectoïde.

8. Fil d'acier selon la revendication 7 obtenu par :

EP 2 532 764 B1

- (a) étirage du fil machine et réalisation de bleuissement, étirage à la chaleur, placage de zinc fondu, ou placage d'alliage de zinc fondu sur le fil machine,
(b) étirage du fil machine après réalisation de placage de zinc fondu ou placage d'alliage de zinc fondu, ou
(c) étirage du fil machine, réalisation de placage de zinc fondu ou placage d'alliage de zinc fondu, et de plus étirage du fil machine étiré.

9. Procédé de fabrication d'un fil d'acier selon la revendication 6, comprenant :

la fabrication d'un fil machine avec un diamètre de 3-7 mm par laminage à chaud d'une billette avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, l'enroulement du fil machine laminé, et la réalisation d'un traitement de patantage par immersion du fil machine laminé à 900°C ou supérieur dans un sel fondu à une température de 500°C-600°C ; l'étirage du fil machine ; la réalisation d'un second traitement de patantage en démarrant le refroidissement par introduction du fil machine laminé étiré à 900°C ou supérieur dans un bain de plomb ou un lit fluidisé à une température de 500°C-600°C ; et la réalisation d'étirage de fil machine sur le fil machine qui a été soumis au second traitement de patantage.

10. Procédé de fabrication d'un fil d'acier selon la revendication 6, comprenant :

la fabrication d'un fil machine avec un diamètre de 3-7 mm par production d'un fil machine laminé par laminage à chaud d'une billette avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, l'enroulement du fil machine laminé, et la réalisation d'un traitement de patantage en démarrant le refroidissement du fil machine laminé à 900°C ou supérieur, la trempe du fil machine laminé de sorte qu'une vitesse de refroidissement Y pour le refroidissement du fil machine laminé de 900°C à 650°C est contrôlée pour satisfaire la formule 1, et la finition d'une transformation de perlite à une température de 650°C-500°C ; l'étirage du fil machine ; la réalisation d'un second traitement de patantage en démarrant le refroidissement par introduction du fil machine laminé étiré à 900°C ou supérieur dans un bain de plomb ou un lit fluidisé à une température de 500°C-600°C ; et la réalisation d'étirage de fil froid sur le fil machine qui a été soumis au second traitement de patantage.

$$Y \geq \exp((C\% - 0,66)/0,12) \quad \text{Formule 1}$$

11. Procédé de fabrication d'un fil en acier selon la revendication 6, comprenant :

la fabrication d'un fil machine avec un diamètre de 3-7 mm par réchauffage d'un fil machine avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables et un diamètre de 3 mm à 7 mm à une température de 950°C-1 050°C, le démarrage de refroidissement du fil machine réchauffé à 900°C ou supérieur, et la réalisation d'un traitement de patantage en utilisant un bain de plomb ou un lit fluidisé à une température de 500°C-600°C ; l'étirage du fil machine ; la réalisation d'un second traitement de patantage en démarrant le refroidissement par introduction du fil machine étiré à 900°C ou supérieur dans un bain de plomb ou un lit fluidisé à une température de 500°C-600°C ; et la réalisation d'un étirage de fil froid sur le fil machine qui a été soumis au second traitement de patantage.

12. Procédé de fabrication d'un fil en acier selon la revendication 7, comprenant :

la fabrication d'un fil machine avec un diamètre de 5-16 mm par laminage à chaud d'une billette avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, afin de fabriquer un fil machine laminé, l'enroulement du fil machine laminé, et la réalisation d'un traitement de patentage par immersion du fil machine laminé à 900°C ou supérieur dans un sel fondu à une température de 500°C-600°C ; et l'étrirage du fil machine.

13. Procédé de fabrication d'un fil en acier selon la revendication 7 comprenant :

la fabrication d'un fil machine avec un diamètre de 5-16 mm par laminage à chaud d'une billette avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables, afin de fabriquer un fil machine laminé, l'enroulement du fil machine laminé, et la réalisation d'un traitement de patentage en démarrant le refroidissement du fil machine laminé à 900°C ou supérieur, la trempe du fil machine laminé de sorte qu'une vitesse de refroidissement Y pour refroidir le fil machine laminé de 900°C à 650°C est contrôlée pour satisfaire la formule 1, et la finition d'une transformation de perlite à une température de 650°C-500°C ; et l'étrirage du fil machine.

$$Y \geq \exp ((C\% - 0,66)/0,12) \quad \text{Formule 1}$$

14. Procédé de fabrication d'un fil en acier selon la revendication 7, comprenant :

la fabrication d'un fil machine avec un diamètre de 5-16 mm par préparation d'un fil machine laminé avec une composition incluant : C : 0,95-1,30 % en masse ; Si : 0,1-1,5 % en masse ; Mn : 0,1-1,0 % en masse ; Al : 0-0,1 % en masse ; Ti : 0-0,1 % en masse ; P : 0-0,02 % en masse ; S : 0-0,02 % en masse ; N : 10-50 ppm, O : 10-40 ppm ; Cr : 0-0,5 % en masse ; Ni : 0-0,5 % en masse ; Co : 0-0,5 % en masse ; V : 0-0,5 % en masse ; Cu : 0-0,5 % en masse ; Nb : 0-0,1 % en masse ; Mo : 0-0,2 % en masse ; W : 0-0,2 % en masse ; B : 0-30 ppm ; REM : 0-50 ppm ; Ca : 0-50 ppm ; Mg : 0-50 ppm ; Zr : 0-100 ppm ; et le reste incluant Fe et des impuretés inévitables et un diamètre de 5-16 mm, le réchauffage du fil machine laminé à une température de 950°C-1050°C, et la réalisation d'un traitement de patentage en démarrant le refroidissement du fil machine laminé à 900°C ou supérieur en utilisant un bain de plomb ou un lit fluidisé à une température de 500°C-600°C ; et l'étrirage du fil machine.

FIG. 1



FIG. 2

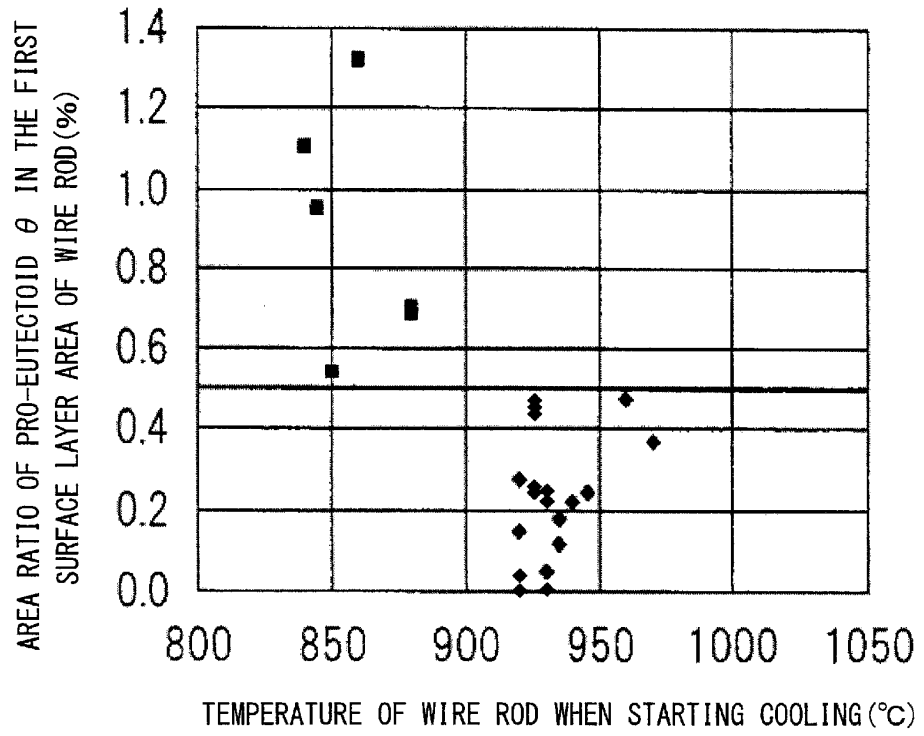


FIG. 3

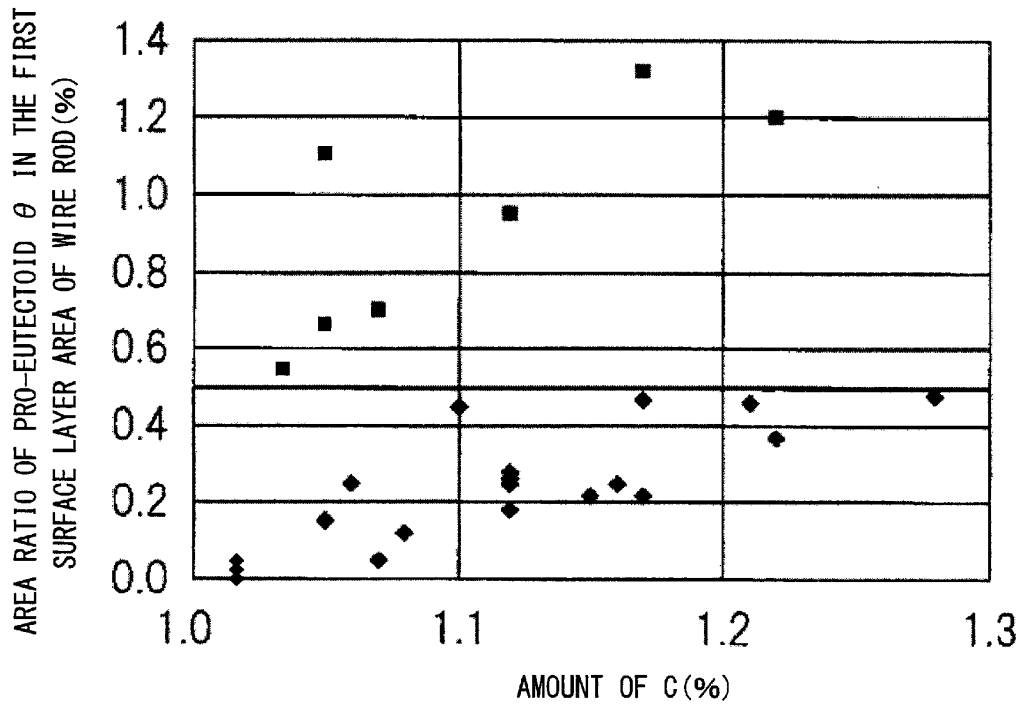


FIG. 4

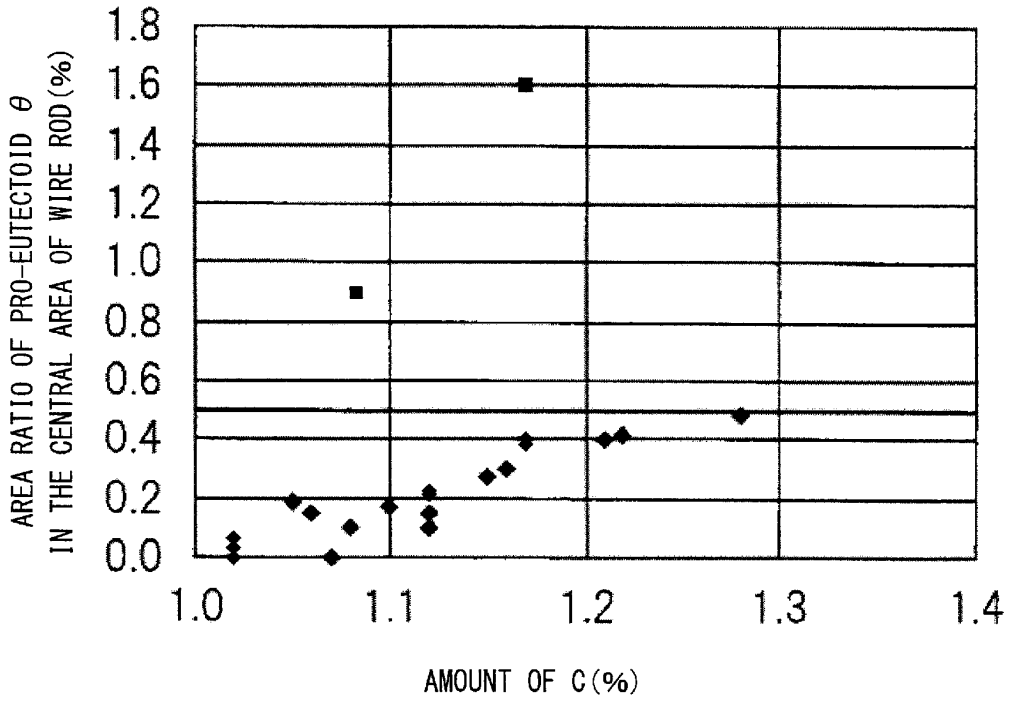


FIG. 5

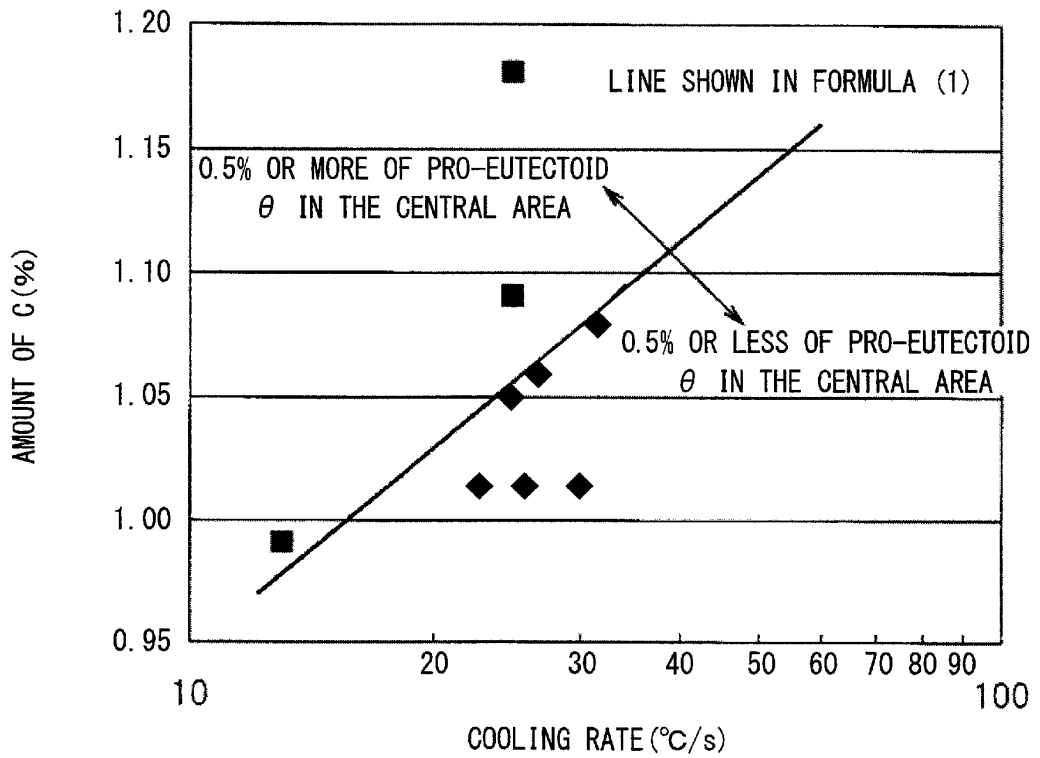


FIG. 6

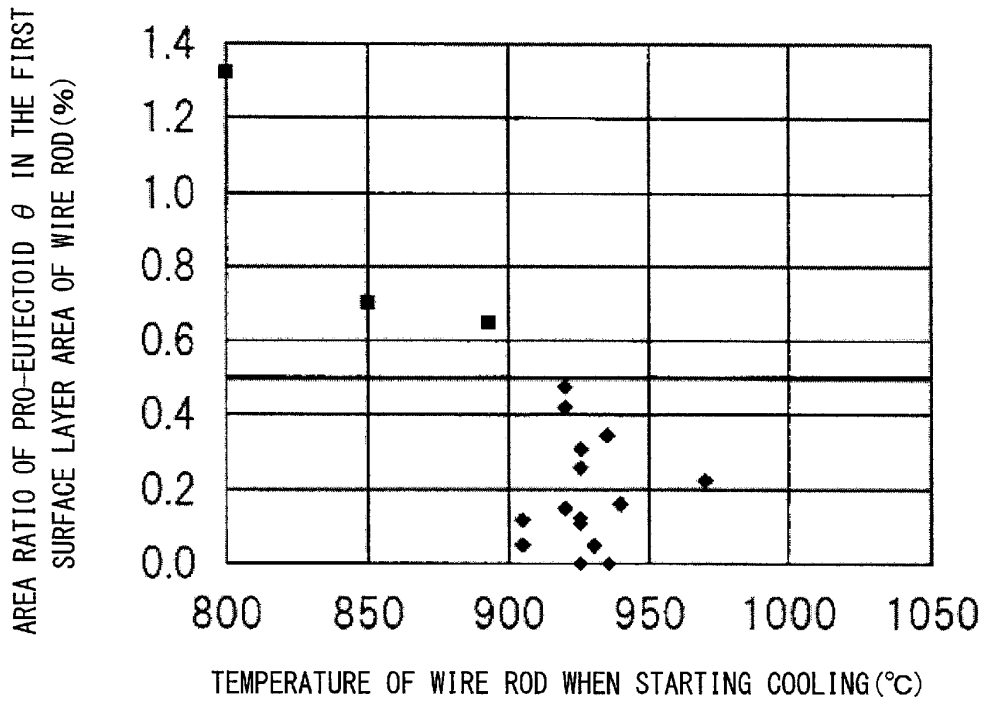


FIG. 7

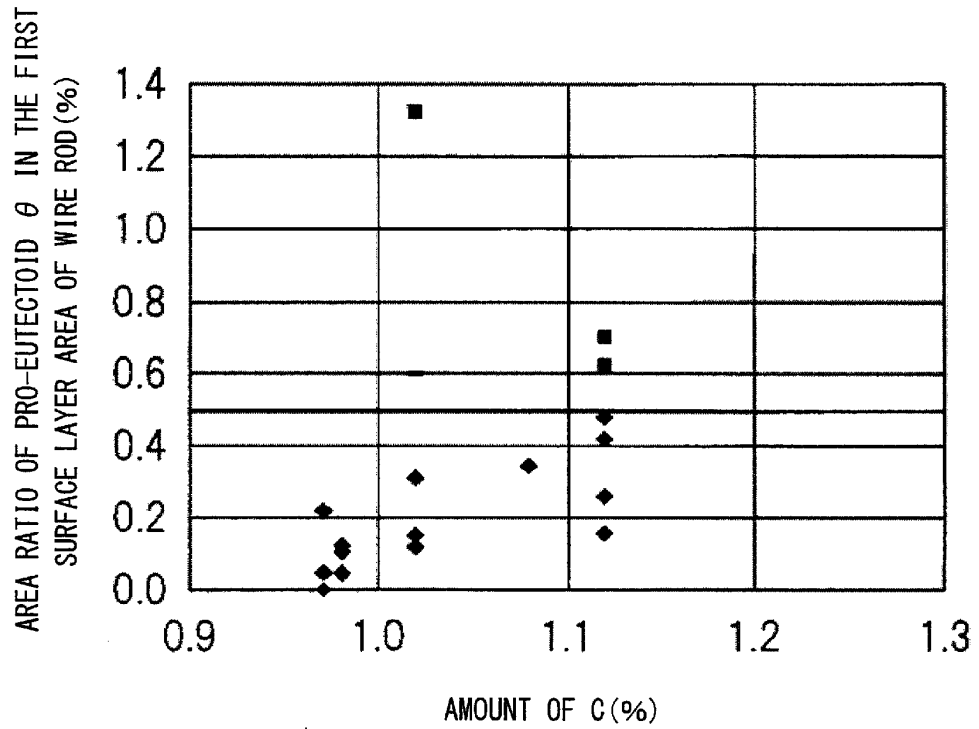


FIG. 8


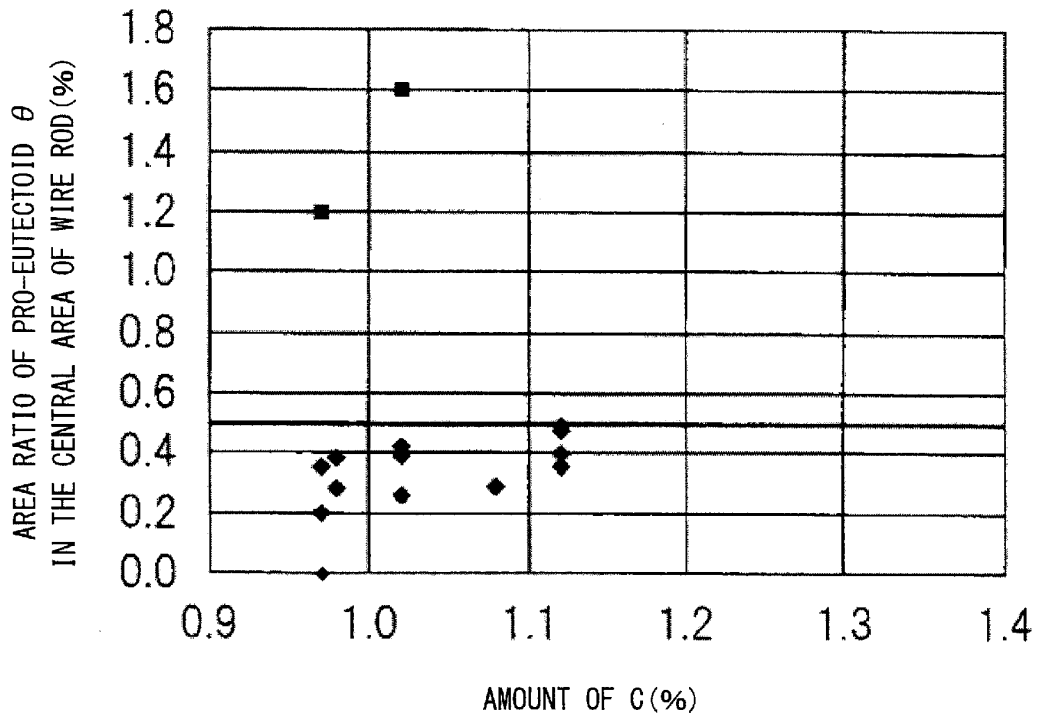


FIG. 9

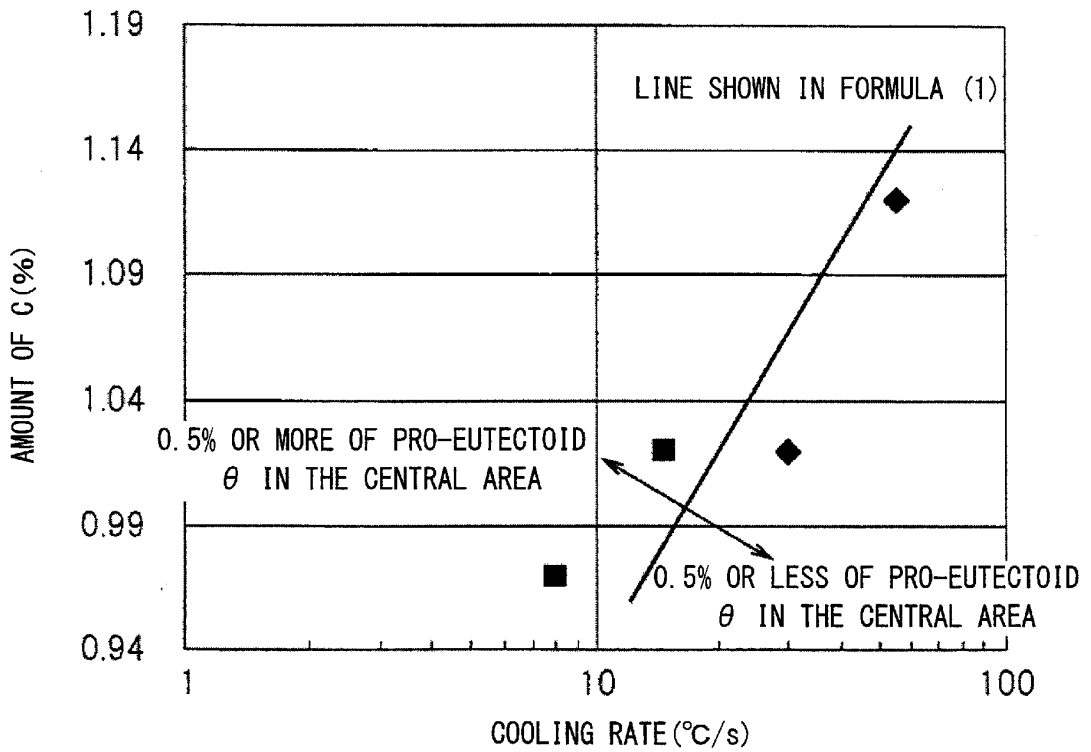

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2010020185 A [0002]
- JP 2609387 B [0014]
- JP 2003193129 A [0014]
- JP H8283867 B [0014]
- JP 5295448 A [0015]
- JP 2939770 B [0015]
- JP 2735647 B [0015]
- JP 2008208450 A [0015]