




(22) Date de dépôt/Filing Date: 2013/02/13
(41) Mise à la disp. pub./Open to Public Insp.: 2013/08/22
(45) Date de délivrance/Issue Date: 2020/12/15
(62) Demande originale/Original Application: 2 864 534
(30) Priorités/Priorities: 2012/02/13 (US13/372,211);
2012/11/20 (US13/682,289)

(51) Cl.Int./Int.Cl. *B65D 30/08* (2006.01),
B32B 27/02 (2006.01), *B32B 27/32* (2006.01),
B32B 3/24 (2006.01), *B65D 33/00* (2006.01)
(72) Inventeur/Inventor:
BAZBAZ, JACOBO, US
(73) Propriétaire/Owner:
POLYTEX FIBERS CORPORATION, US
(74) Agent: MBM INTELLECTUAL PROPERTY LAW LLP

(54) Titre : SACS EN PLASTIQUE TISSES A OUVERTURE FACILE
(54) Title: EASY OPEN WOVEN PLASTIC BAGS

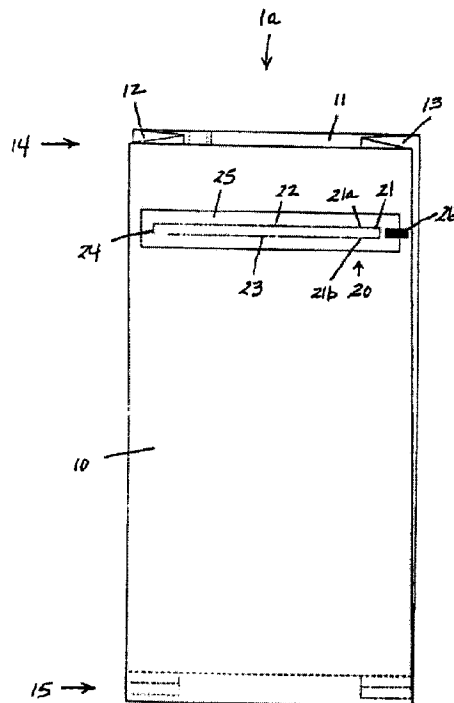

(57) **Abrégé/Abstract:**

A woven laminated plastic bag having an easy open feature is provided. The easy open feature is generally defined by a weakened portion in the bag. In various aspects the bag can be fabricated from woven polypropylene and/or polyethylene layer which can be laminated with a film layer, can form a pinch bottom bag, and can have one or both sides include graphics and/or printing. The bag can also provide a top end and/or a bottom end either or both of which provide a discrete area which may contain discrete graphics and/or printing.

Abstract

A woven laminated plastic bag having an easy open feature is provided. The easy open feature is generally defined by a weakened portion in the bag. In various aspects the bag can be fabricated from woven polypropylene and/or polyethylene layer which can be laminated with a film layer, can form a pinch bottom bag, and can have one or both sides include graphics and/or printing. The bag can also provide a top end and/or a bottom end either or both of which provide a discrete area which may contain discrete graphics and/or printing.

EASY OPEN WOVEN PLASTIC BAGS

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

The present disclosure relates to plastic bags with improved opening features.

5 2. BACKGROUND OF THE INVENTION

Conventional plastic bags of a wide variety of size and shape are used in various situations. Bulk materials, such as flour, sugar, rice, seed, animal feed, chemicals, powdered materials or the like, for example, typically have been packaged in woven plastic bags in the past. Pet food, bird seed and other products sold in retail stores typically have not been packaged
10 in conventional woven plastic bags. Among other reasons for this, woven plastic bags were considered too rudimentary to be printed with high end graphics suitable for consumer type of packaging. In addition, the high speed requirements in the filling and packaging operations limited the use of the woven bags in these applications.

Laminated woven sacks (LWS) were developed using a woven polypropylene structure
15 laminated to a bi-oriented-polypropylene film (BOPP) that can be reverse printed with high end graphics suitable for consumer type of packaging. The LWS provides a stronger, more attractive bag than the more conventional multiwall bags used for that purpose over the last 20 years. Due to their tough strong structure, conventional LWS bags are typically sewn shut on both ends. These LWS recently met with success and have been successfully substituted for the
20 conventional multiwall paper bags used in the pet food industry for many years.

One major drawback of the sewn LWS has been the closing of the bags at high speed filling lines, such as those for filling such bags with pet food. Experience has shown that sewing production lines are typically slower than the filling of the multiwall pinch bottom bags. Additionally, the sewn bags do not provide an aesthetically pleasing and useful clean display on
25 the ends of the bags, thus making it difficult for consumers to identify or find a desired brand quickly when the bags are displayed on the shelves at the point of sale, such as when they are stacked on top of one another. In addition, the sewn ends required puncturing the plastic bags and thus result in a bag that is not sealed, leading to somewhat reduced shelf-life and possible infestation of the contents of the bag. Thus, there is a need for pinch laminated woven sacks that
30 overcome these drawbacks in the filling and closing operations while allowing an attractive

graphic display of the bags' ends at the retail outlet and also providing a strong, durable bag which remains sealed.

One major disadvantage of the newly developed pinch bottom laminated woven sack, however, is that it does not include an easy open feature that allows the consumer or purchaser to quickly and easily open the bag without the use of scissors or knives. There is a need for such a pinch bottom laminated woven sack which is easy to open without the use of scissors, knives or other such instruments, and also does not require the use of excessive force.

Woven plastic bags have been used and are conventional for certain applications. An example of a conventional woven plastic bag is provided in U.S. Patent No. 4,373,979 ("the '979 patent"), issued on February 15, 1983. The '979 patent describes the use of woven strips of highly longitudinally-oriented, high-density polyethylene or polypropylene in a bag construction in which the bag is formed from a seamed tube made of the woven plastic material. The seamed tube has gussets on either side and, when a portion is cut from the rest of the tube, a bag having two open, unsealed ends is provided. The '979 patent describes the use of ultrasonic spot welds to seal portions of a bag made of such woven plastic strips, as opposed to sewing the seams of a bag or using a hot melt adhesive to seal the gusset forming pleat.

The '979 patent purports to be an improvement for sealing a plastic bag. As noted in the '979 patent, sewing one end tends to take longer, thus adding time to the manufacturing process. In addition, the sewn ends in a conventional bag tend to be a weak portion of the bag, and a likely location for rips, tearing, and subsequent loss of contents during storing, shipping and handling. In addition, such bags may not provide sufficient protection from infestation from vermin and/or insects.

Another example of plastic bags is disclosed in U.S. Patent Application Publication Number US 2010/0029455 A1 ("the '455 publication"), published on February 4, 2010, which describes production of web sections from a flexible web material that is provided with tear-off lines produced by laser beam processing at the distance of the length of the web sections to be formed. The tear-off lines weaken the flexible web material, but do not result in complete separation of the web sections from the web material, which occurs upon tearing the flexible web material.

More recently, some types of plastic bags have provided improvements in sealing the ends of the bags. For example, in U.S. Patent No. 6,800,051 B2 ("the '051 patent"), issued on

October 5, 2004, a process for sealing side fold sacks made of plastic film is described. According to the '051 patent, a web of plastic tubular film is cut to provide a staggered detachment along a perforation so that one wall (*e.g.*, the front wall) projects beyond the opposing wall (*e.g.*, the back wall). The projecting portion of the first wall is then folded over
5 and sealed to the opposing wall by means of a plastic adhesive such as a polyurethane adhesive or hot melt.

However, such bags involve plastic films, not woven plastic materials, and therefore are unable to handle the weight loads of conventional bulk bags made of paper and other materials. Such bags are useful for only certain lightweight contents, such as bread.

10 There are a variety of conventional ways of providing for reusable openings in bags. For example, U.S. Patent No. 6,478,465 B1 ("the '465 patent"), issued November 12, 2002, describes a peelable opening in a multiwall, pinched bottom open mouth bag construction. The '465 patent also describes the use of an adhesive layer that can be used so that the bag opening is reclosable.

15 In other types of conventional plastic bags, such as those used in retail and grocery stores, the use of weakened portion provided by one or more perforations in the plastic bag wall is known. A number of approaches have been taken in connection with such bags, including those shown in U.S. Patent No. 5,188,235 (the '235 patent), issued February 23, 1993, as well as in U.S. Published Patent Application No. 2005/0087542 A1 (the '542 application), published April
20 28, 2005, U.S. Patent No. 5, 979,655 (the '655 patent), issued November 9, 1999, and U.S. Published Patent Application No. 2006/0072856 (the '856 application), issued April 6, 2006. However, none of these bags are woven bags, let alone bags with multiple layers.

25 Typically woven and non-woven bags are sealed with a single or double fold at each end with tape over the single or double fold, stitching at both ends, or a zipper at one end and a single or double fold at the other end. However, opening woven and certain non-woven bags has proven difficult, due to the strength of the bag. Therefore, what is needed are woven and non-woven bags that are easier to open, that do not add much to the cost or time to manufacture, and
30 are not susceptible to inadvertent tearing, punctures, breaking, or the like.

SUMMARY OF THE INVENTION

The present disclosure provides woven and non-woven plastic bags comprising an easy open feature, which makes the presently disclosed woven and non-woven plastic bags easier to open than conventional woven and non-woven plastic bags.

5 The present disclosure provides a bag comprising a front wall, a back wall, an interior surface, an exterior surface, a top end, a bottom end, a first layer and a second layer, each of the front wall and back wall having an interior surface, an exterior surface, a top end and a bottom end, wherein the first layer comprises a polymer and the second layer comprises a polymer attached to the first layer, and wherein the bag comprises an easy open feature located on the front wall of the bag, the back wall of the bag, or a combination thereof. The first layer can
10 comprise a woven polymer, including, but not limited to, polypropylene, high density polyethylene, low density polyethylene, polyester, or any combination thereof. The second layer can comprise a polymeric film, including, but not limited to, polypropylene, polyethylene, polyethylene terephthalate, polyamide, or any combination thereof, or paper or coated paper
15 portion suitable for having high quality print graphics thereon, or a combination of a polymeric film and a paper portion suitable for having high quality print graphics thereon. The second layer can alternatively comprise an oriented polymeric film, including, but not limited to, oriented polypropylene, biaxially-oriented polypropylene, oriented polyethylene, biaxially-oriented polyethylene, oriented polyethylene terephthalate, biaxially-oriented polyethylene
20 terephthalate, oriented polyamide, biaxially-oriented polyamide, or any combination thereof. The first layer and second layer can be laminated together. Thus in certain aspects the first layer can consist or consist essentially of a woven polymer and the second layer can consist or consist essentially of a film.

In general the easy open feature comprises a weakened area. The weakened area can
25 comprise a cut having a first end and a second end, wherein the cut penetrates through at least a portion of the front wall of the bag, the back wall of the bag, or a combination thereof. In certain aspects the cut can comprise a line or an open shape, including, but not limited to, a carat, a semi-circle, an open square, or an open rectangle. The weakened area can further comprise a plurality of perforations extending from the first end or the second end of the cut, wherein the
30 plurality of perforations penetrate through at least a portion of the front wall of the bag, the back wall of the bag, or a combination thereof. In various aspects the plurality of perforations extends

about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%,
about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%,
about 85%, about 90%, about 95% or about 99% of a distance across the front wall of the bag,
the back wall of the bag, or a combination thereof. In certain embodiments the plurality of
5 perforations extends from the first end of the cut to the second end of the cut. The plurality of
perforations can extend around one or more walls of the bag, or can alternatively extend to form
a shape, including, but not limited to, a circle, a triangle, a square or a rectangle. The shape can
be comprised on a single wall of the bag, or can extend over contiguous walls of the bag.
Further, a plurality of perforations can extend from the first end of the cut and a plurality of
10 perforations can extend from the second end of the cut. The plurality of perforations can extend
from the first end of the cut and the second end of the cut about 5%, about 10%, about 15%,
about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%,
about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%
or about 99% of a distance across the front wall of the bag, the back wall of the bag, or a
15 combination thereof, or can extend to form a shape, including, but not limited to, a circle, a
triangle, a square or a rectangle. Once again, the shape can be comprised on a single wall of the
bag, or can extend over contiguous walls of the bag.

The weakened area can also comprise a first cut having a first end and a second end and a
second cut having a first end and a second end. In particular embodiments the first cut and the
20 second cut intersect, for example comprising an "X" shape, or the first cut and the second cut
comprise parallel lines. The weakened area can additionally comprise a third cut, and the first
cut, the second cut and the third cut are connected, for example wherein the first cut, the second
cut and the third cut comprise an "H" shape (or a sideways "H" shape when viewing the bag with
the top end of the bag up). The weakened area can further comprise a plurality of perforations
25 extending from the first end and the second end of the first cut, and a plurality of perforations
extending from the first end and the second end of the second cut, wherein the plurality of
perforations penetrate through at least a portion of the front wall of the bag, the back wall of the
bag, or a combination thereof. The plurality of perforations extending from the first end and the
second end of the first cut and the plurality of perforations extending from the first end and the
30 second end of the second cut can comprise parallel lines or lines that intersect. In various
embodiments the plurality of perforations can extending from the first end and the second end of

the first cut and the first end and the second end of the second cut about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the front wall of the bag, the back wall of the bag, or a combination thereof.

The weakened area can alternatively comprise a plurality of perforations that penetrate through at least a portion of the front wall of the bag, the back wall of the bag, or a combination thereof. The plurality of perforations can form a line that extends about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the front wall of the bag, the back wall of the bag, or a combination thereof. The plurality of perforations can also form a shape, including, but not limited to, a circle, an oval, a triangle, a square or a rectangle. In other aspects, the plurality of perforations forms a first line and a second line, which can be about parallel and extend about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the front wall of the bag, the back wall of the bag, or a combination thereof. Furthermore, the weakened area can comprise a deformation in least a portion of the front wall of the bag, the back wall of the bag, or a combination thereof. For example, the weakened area can comprise a scoring mark.

The easy open feature can be comprised within the first layer or the second layer of the bag, or within the first layer and the second layer of the bag. The bag can further comprise an adhesive pull tab covering at least a portion of the easy open feature or the entire easy open feature. The adhesive pull tab can comprise a piece of tape, and can also comprise printing, for example directions for opening the easy open feature or a promotional coupon.

In certain embodiments the bottom end of the bag is sealed using conventional means. For example, at least a portion of a single fold of the bottom end of the front wall and the rear wall of the bag can be sealed to the outer surface of the front wall or rear wall of the bag, using an adhesive sealing, heat sealing, adhesive lamination, extrusion lamination, stitching, ultrasonic energy, pressure, tape, or any combination thereof. Alternatively at least a portion of a double fold of the bottom end of the front wall and the rear wall of the bag can be sealed to the outer

surface of the front wall or rear wall of the bag. However, in certain aspects at least a portion of the bottom end of the rear wall, or the entire bottom end of the rear wall, projects further than the bottom end of the front wall. Thus, the portion of the bottom end of the rear wall that projects further than the bottom end of the front wall can be sealed to the outer surface of the bottom end of the front wall. Additionally, the top end of the bag can be sealed using conventional means. For example, at least a portion of a single fold of the top end of the front wall and the rear wall of the bag can be sealed to the outer surface of the front wall or rear wall of the bag, using an adhesive sealing, heat sealing, adhesive lamination, extrusion lamination, stitching, ultrasonic energy, pressure, tape, or any combination thereof. Alternatively at least a portion of a double fold of the top end of the front wall and the rear wall of the bag can be sealed to the outer surface of the front wall or the rear wall of the bag. However, in certain aspects at least a portion of the top end of the rear wall, or the entire top end of the rear wall, projects further than the top end of the front wall. Thus, the portion of the top end of the rear wall that projects further than the top end of the front wall can be sealed to the outer surface of the bottom end of the front wall. The top end and/or the bottom end of the bag can also comprise stitching there through.

In certain embodiments the bag further comprises a first side wall having an interior surface, an exterior surface, a top end and a bottom end, and a second side wall having an interior surface, an exterior surface, a top end and a bottom end. The first side wall and/or the second side wall can comprise gussets. In certain aspects at least a portion of the bottom end of the rear wall projects further than the bottom end of the first side wall, the bottom end of the second side wall, and the bottom end of the front wall. In an exemplary way to seal the bottom end of such bags, the portion of the bottom end of the rear wall that projects further than the bottom end of the first side wall, the bottom end of the second side wall, and the bottom end of the front wall can be sealed to the outer surface of the bottom end of the front wall. In additional aspects at least a portion of the top end of the front wall projects further than the top end of the first side wall, the top end of the second side wall and the top end of the rear wall. In these aspects the portion of the top end of the bag that projects further than the top end of the first side wall, the top end of the second side wall and the top end of the rear wall can be sealed to the outer surface of the top end of the rear wall.

Alternatively a portion of the bottom end of the rear wall can project further than the bottom end of the first side wall and the bottom end of the second side wall, and a portion of the

bottom end of the first side wall and the bottom end of the second side wall can project further than the bottom end of the front wall. In an exemplary way to seal the bottom end of such bags, the portion of the bottom end of the rear wall that projects further than the bottom end of the first side wall and the bottom end of the second side wall, and the portion of the bottom end of the first side wall and the bottom end of the second side wall that projects further than the bottom end of the front wall can be sealed to the outer surface of the bottom end of the front wall. In further aspects at least a portion of the top end of the front wall projects further than the top end of the first side wall and the top end of the second side wall, and the top end of the first side wall and the top end of the second side wall project further than the top end of the rear wall. In these aspects the portion of the front wall that projects further than the top end of the first side wall and the top end of the second side wall, and the portion of the top end of the first side wall and the top end of the second side wall that projects further than the top end of the rear wall can be sealed to the outer surface of the top end of the rear wall. In particular embodiments the top end and the bottom end of the bag are sealed, as set forth above, and the bag comprises at least ten pounds by weight of a bulk item. In certain aspects such sealed bags can comprise six printable surfaces.

Additionally the bag can further comprise a third layer comprising a polymer positioned between the first layer and the second layer. The third layer can comprise a woven polymer, including, but not limited to, polypropylene, high density polyethylene, low density polyethylene, polyester, or any combination thereof. The third layer can alternatively comprise a polymeric film, including, but not limited to, polypropylene, polyethylene, polyethylene terephthalate, polyamide, or any combination thereof. The third layer can further comprise an oriented polymeric film, including, but not limited to, oriented polypropylene, biaxially-oriented polypropylene, oriented polyethylene, biaxially-oriented polyethylene, oriented polyethylene terephthalate, biaxially-oriented polyethylene terephthalate, oriented polyamide, biaxially-oriented polyamide, or any combination thereof.

The present disclosure additionally provides a bag comprising a front wall, a back wall, a first side wall, a second side wall, an interior surface, an exterior surface, a top end, a bottom end, a first layer and a second layer, the front wall, back wall, first side wall and second side wall having an interior surface, an exterior surface, a top end and a bottom end, wherein the first layer comprises a polymer and the second layer comprises a polymer attached to the first layer, and

wherein the bag comprises an easy open feature located on the front wall of the bag, the back wall of the bag, the first side wall of the bag, the second side wall of the bag, or any combination thereof. The easy open feature can be located on the front wall, the back wall, the first side wall, the second side wall, or any combination thereof.

5 The present disclosure also provides a bag comprising a front wall, a back wall, an interior surface, an exterior surface, a top end, a bottom end and a first layer, each of the front wall and back wall having an interior surface, an exterior surface, a top end and a bottom end, wherein the first layer comprises a woven polymer, and wherein the bag comprises an easy open feature located on the front wall of the bag, the back wall of the bag, or a combination thereof.
10 The first layer can comprise polypropylene, high density polyethylene, low density polyethylene, polyester, or any combination thereof. The bag can further comprise a second layer, which can comprise a polymeric film.

 The present disclosure further provides a method of making an easy open feature in a woven polymer bag, comprising creating a weakened area in the woven polymer bag. The step
15 of creating a weakened area can further comprise making a cut, a plurality of perforations, or scoring a line in a portion of the bag surface.

 The present disclosure provides bags comprising a front wall, a back wall, an interior surface, an exterior surface, a top end, a bottom end, a first layer and a second layer, each of the front wall and back wall having an interior surface, an exterior surface, a top end and a bottom
20 end, wherein the first layer comprises a woven polymer and the second layer comprises a film attached to the first layer, and wherein the bag comprises an easy open feature comprising a cover with a first weakened area, the easy open feature located over a second weakened area on the front wall of the bag, the back wall of the bag, or a combination thereof. In certain embodiments the first layer comprises polypropylene, high density polyethylene, low density
25 polyethylene, polyester, or any combination thereof. In other embodiments at least a portion of the second layer comprises a printed area thereon. In further embodiments the second layer comprises polypropylene, polyethylene, polyethylene terephthalate, polyamide, or any combination thereof or paper. In yet further embodiments the second layer comprises oriented
30 polypropylene, biaxially-oriented polypropylene, oriented polyethylene, biaxially-oriented polyethylene, oriented polyethylene terephthalate, biaxially-oriented polyethylene terephthalate, oriented polyamide, biaxially-oriented polyamide, coated paper or any combination thereof. In

additional embodiments the bags further comprise a third layer between said first layer and said second layer. In particular embodiments the third layer is an adhesive. In yet other embodiments the first layer and second layer are laminated together. In still other embodiments the first layer, second layer and third layer are laminated together.

5 In certain embodiments the easy open feature comprises a cover having a first surface and a second surface and an adhesive on at least a portion of the first surface, the second surface, or both. In some embodiments the first and/or second weakened area comprises a cut having a first end and a second end, wherein the cut penetrates through at least a portion of the bag or cover. In particular embodiments the cut comprises a carat, a semi-circle, an open square, or an open
10 rectangle. In further embodiments the first and/or second weakened area further comprises a second cut having a first end and a second end. In other embodiments the first cut and the second cut intersect. In yet other embodiments the first cut and the second cut comprise an "X" shape. In yet further embodiments the first cut and the second cut comprise parallel lines. In still further embodiments the first and/or second weakened area further comprises a third cut. In
15 some embodiments the first cut, the second cut and the third cut comprises an "H" shape. In some embodiments the bags further comprise a plurality of perforations extending from the first end and/or the second end of the cut, wherein the plurality of perforations penetrate through at least a portion of the bag or cover. In certain embodiments the plurality of perforations extends about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%,
20 about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the bag or cover.

In further embodiments the first and/or second weakened area comprises a plurality of perforations that penetrate through at least a portion of the bag or cover. In particular
25 embodiments the plurality of perforations forms a line. In some embodiments the plurality of perforations extends about 5%, about 10%, about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the bag or cover. In other embodiments the plurality of perforations defines a shape. In yet other
embodiments the plurality of perforations defines a first line and a second line.

30 In certain other embodiments the first and/or second weakened area comprises a deformation in least a portion of the bag or cover. In further embodiments the first or second

weakened area further comprises a scoring mark. In other embodiments the first weakened area comprises a cut having a first end and a second end or a plurality of perforations, wherein the cut or plurality of perforations penetrates through at least a portion of the cover, or a deformation in least a portion of the cover, and the second weakened area comprises a cut having a first end and a second end or a plurality of perforations, wherein the cut or plurality of perforations penetrates through at least a portion of the bag, or a deformation in least a portion of the bag.

In additional embodiments the cover comprises a polymer, a film, an adhesive, a paper, or any combination thereof. In certain embodiments the bags further comprise a second cover covering at least a portion of the weakened area of the cover. In particular embodiments the second cover covers the entire weakened area of the cover. In further embodiments the second cover comprises a polymer, a film, an adhesive, a paper, or any combination thereof. In other embodiments the cover and the second cover comprise the same material, width, color, transparency or strength as the second cover, while in yet other embodiments the cover and the second cover comprise a different material, width, color, transparency or strength as the second cover. In some embodiments the second cover comprises a piece of tape. In additional embodiments the second cover comprises printing, such as when the second cover comprises a coupon.

In certain embodiments a single fold of the bottom end of the front wall and the rear wall of the bag is sealed to the outer surface of the front wall of the bag. In other embodiments the bottom end of the bag is sealed using an adhesive sealing, heat sealing, adhesive lamination, extrusion lamination, stitching, ultrasonic energy, pressure, tape, or any combination thereof. In further embodiments a double fold of the bottom end of the front wall and the rear wall of the bag is sealed to the outer surface of the front wall of the bag. In additional embodiments at least a portion of the bottom end of the rear wall projects further than the bottom end of the front wall. In such embodiments the portion of the bottom end of the rear wall that projects further than the bottom end of the front wall can be sealed to the outer surface of the bottom end of the front wall.

In additional embodiments the bags further comprise a first side wall having an interior surface, an exterior surface, a top end and a bottom end, and a second side wall having an interior surface, an exterior surface, a top end and a bottom end, wherein the first side wall and the second side wall further comprise gussets. In further embodiments at least a portion of the

bottom end of the rear wall projects further than the bottom end of the first side wall, the bottom end of the second side wall, and the bottom end of the front wall. In yet further embodiments the portion of the bottom end of the rear wall that projects further than the bottom end of the first side wall, the bottom end of the second side wall, and the bottom end of the front wall is sealed to the outer surface of the bottom end of the front wall. In other embodiments at least a portion of the bottom end of the rear wall projects further than the bottom end of the first side wall and the bottom end of the second side wall, and the bottom end of the first side wall and the bottom end of the second side wall project further than the bottom end of the front wall, and wherein the portion of the bottom end of the rear wall that projects further than the bottom end of the first side wall and the bottom end of the second side wall, and the portion of the bottom end of the first side wall and the bottom end of the second side wall that project further than the bottom end of the front wall are sealed to the outer surface of the bottom end of the front wall. In still other embodiments at least a portion of the top end of the front wall projects further than the top end of the first side wall and the top end of the second side wall, and the top end of the first side wall and the top end of the second side wall project further than the top end of the rear wall.

In particular embodiments the top end and the bottom end of the bag are sealed, and the bag comprises at least ten pounds by weight of a filling material. In further embodiments the bags further comprise a fourth layer comprising a polymer between the first layer and the second layer. In certain embodiments the fourth layer comprises a woven polymer, including, but not limited to, polypropylene, high density polyethylene, low density polyethylene, polyester, or any combination thereof. In other embodiments the fourth layer comprises a polymeric film, including, but not limited to, polypropylene, polyethylene, polyethylene terephthalate, polyamide, or any combination thereof. In additional embodiments at least portions of the exterior surfaces of each of the front wall and the back wall comprise a plurality of discrete areas further comprising printing thereon. In certain other embodiments a portion of the front wall and a portion of the back wall combine to form a discrete portion of the bag located at or near either the top end or the bottom end, wherein the discrete portion of the bag comprises printing thereon. In yet other embodiments at least a portion of the front wall or the back wall projects beyond a corresponding portion of the other, thereby defining a pinch bottom bag at the top end or the bottom end of the bag.

The present disclosure further provides methods of making a woven polymer bag with an easy open feature, comprising attaching a cover with a first weakened area over a second weakened area of the woven polymer bag. In certain embodiments the first and/or second weakened area is a cut, a plurality of perforations, or a scoring line. The present disclosure additionally provides bags comprising a front wall, a back wall, a first side wall, a second side wall, an interior surface, an exterior surface, a first end, a second end, a first layer and a second layer, the front wall, back wall, first side wall and second side wall having an interior surface, an exterior surface, a first end and a second end, wherein the first layer comprises a woven polymer and the second layer comprises a film laminated to the first layer, wherein the first end of the front wall projects further than the first end of the first side wall and the first end of the second side wall, and the first end of the first side wall and the first end of the second side wall projects further than the first end of the back wall, wherein the bag comprises printing on the front wall, the first side wall, the back wall, the second side wall, the first end, the second end, or any combination thereof, and wherein the bag comprises an easy open feature comprising a cover comprising a first weakened area located over a second weakened area on the front wall of the bag, the back wall of the bag, the first side wall of the bag, the second side wall of the bag, or any combination thereof, and a second cover located over the first weakened area of the cover.

The present disclosure also provides bags comprising a front wall, a back wall, a first side wall, a second side wall, an interior surface, an exterior surface, a first end, a second end, a first layer and a second layer, the front wall, back wall, first side wall and second side wall having an interior surface, an exterior surface, a first end and a second end, wherein the first layer comprises a woven polymer and the second layer comprises a film laminated to the first layer, wherein the first end of the front wall projects further than the first end of the first side wall and the first end of the second side wall, and the first end of the first side wall and the first end of the second side wall projects further than the first end of the back wall, wherein the bag comprises printing on the front wall, the first side wall, the back wall, the second side wall, the first end, the second end, or any combination thereof, and wherein the bag comprises a weakened area on the front wall of the bag, the back wall of the bag, the first side wall of the bag, the second side wall of the bag, or any combination thereof, and a cover located over the weakened area of the bag.

It is an object of the invention to provide a woven plastic bag that is stronger than bags made of plastic films, and yet easier to open than conventional woven bags.

It is another object of the invention to provide a woven plastic bag that includes an easy open feature and still provides strength and durability, reducing the potential for tearing, damage, infestation, and loss of contents.

5 It is still another object of the invention to provide a woven bag that can be manufactured more quickly and therefore is less costly than conventional bags, and that has an easy open feature that makes opening the woven bag easier than opening conventional woven bags.

It is still another object of the invention to provide a woven polymeric bag that provides an attractive high end graphic display on at least one end of the bags when are displayed or presented at the point of sale.

10 These and other objects of the invention will be apparent to those skilled in the art from the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a bag with an easy open feature comprising a square cut through the bag located near the top end of the bag according to one embodiment of the present disclosure.

15 FIG. 2 shows a bag with an easy open feature comprising a carat cut through the bag located near the bottom end of the bag according to one embodiment of the present disclosure.

FIG. 3 shows a bag with an easy open feature comprising a semi-circular cut through the bag located near the top end of the bag according to one embodiment of the present disclosure.

20 FIG. 4 shows a pull tab comprising a promotional coupon according to one embodiment of the present disclosure.

FIG. 5 shows a bag with an easy open feature comprising a square cut through the bag located near the bottom end of the bag according to one embodiment of the present disclosure.

25 FIG. 6 shows a pinch cut bag with an easy open feature comprising a square cut through the bag located near the bottom end of the bag according to one embodiment of the present disclosure.

FIG. 7 shows a pinch cut bag with an easy open feature comprising a square cut through the bag located near the top end of the bag according to one embodiment of the present disclosure.

30 FIG. 8 shows an outline of a pinch cut bag with an easy open feature comprising a square cut through the bag located near the bottom end of the front panel of the bag according to one embodiment of the present disclosure.

FIG. 9 shows an outline of a pinch cut bag with an easy open feature comprising a square cut through the bag located near the top end of the front panel of the bag according to one embodiment of the present disclosure.

5 FIG. 10 shows an outline of a pinch cut bag with an easy open feature comprising a carat cut through the bag located near the top end of a side panel of the bag and extending through the side panel according to one embodiment of the present disclosure.

FIG. 11 shows an outline of a pinch cut bag with an easy open feature comprising a carat cut through the bag located near the top end of a side panel of the bag and extending across the entire length of the bag according to one embodiment of the present disclosure.

10 FIG. 12 shows an outline of a pinch cut bag with an easy open feature comprising a carat cut through the bag located near the top end of a side panel of the bag and extending across the side panel and the front panel of the bag according to one embodiment of the present disclosure.

FIG. 13 shows an outline of a pinch cut bag with an easy open feature comprising a bidirectional square cut through the bag located near the top end of the front panel of the bag and extending into both side panels according to one embodiment of the present disclosure.

15 FIG. 14 shows a back side view of a pinch cut bag according to one embodiment of the present disclosure.

FIG. 15 shows a front side view of a printed pinch cut bag with an easy open feature comprising a square cut through the bag located near the top end of the bag according to one embodiment of the present disclosure.

20 FIG. 16 shows a cross-sectional view of a top end or bottom end portion of a pinch cut bag according to one embodiment of the present disclosure.

FIG. 17 shows an isometric view of a pinch cut bag according to one embodiment of the present disclosure.

25 FIG. 18 shows a flush cut bag with an easy open feature comprising a cover located near the bottom end of the bag with an "H" cut through the cover according to one embodiment of the present disclosure.

30 FIG. 19 shows a bag with an easy open feature comprising a cover located near the bottom end of the bag with a carat cut through the cover according to one embodiment of the present disclosure.

FIG. 20 shows a flush cut bag with an easy open feature comprising a first cover located near the bottom end of the bag with an "H" cut through the first cover and a second cover over the "H" cut in the first cover according to one embodiment of the present disclosure.

5 FIG. 21 shows a bag with an easy open feature comprising a first cover located near the bottom end of the bag with a carat cut through the first cover and a second cover over the carat cut through the first cover according to one embodiment of the present disclosure.

FIG. 22 shows a pinch cut bag with an easy open feature comprising a cover located near the bottom end of the bag having a full cut in the shape of a triangle or carat through the cover according to one embodiment of the present disclosure.

10 FIG. 23 shows a bag with an easy open feature comprising a cover located near the bottom end of the bag having an "H" cut through the cover according to one embodiment of the present disclosure.

FIG. 24 shows a pinch cut bag with an easy open feature comprising first cover located near the bottom end of the bag having a full cut in the shape of a triangle or carat through the first cover and a second cover over the full cut according to one embodiment of the present disclosure.

FIG. 25 shows a bag with an easy open feature comprising a first cover located near the bottom end of the bag having an "H" cut through the first cover and a second cover over the "H" cut according to one embodiment of the present disclosure.

20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to FIG. 1, the front side view of an embodiment of a bag 1a is shown. Bag 1a has a front wall 10, a back wall 11, a first side wall 12, a second side wall 13, a top end 14, and a bottom end 15. It will be apparent, however, that the orientation of the bag ends 14 and 15 is unimportant and the "top" and "bottom" references are useful but may change depending on the orientation one views the bag. As shown in FIG. 1 the top end 14 is considered a "flush cut" because the top ends of the front wall 10 and the back wall 11 are cut so that the top ends of the front wall 10 and the back wall 11 are essentially "flush" with one another; they have substantially the same length. Additionally, as shown in FIG. 1 the bottom end 15 is considered a "pinch cut" because the bottom end of the front wall 10 is longer than the bottom end of the back wall 11. Bag 1a also comprises an easy open feature 20 near the top end 14 of the bag 1a, which in this embodiment comprises a full cut 21 in a rectangular shape having a first end 21a

and a second end 21b through the front wall 10 of bag 1a, a first row of perforations 22 extending from the first end 21a of the cut 21, a second row of perforations 23 extending from the second end 21b of the cut 21, an optional third row of perforations 24 connecting the end of the first row of perforations 22 and the second row of perforations 23, a cover 25 over the cut 21
5 and the rows of perforations 22, 23 and 24, and a pull tab 26 attached to the cover 25. Although in this embodiment the easy open feature 20 is located near the top end 14 of the bag 1a and the pull tab is located close to the second side wall 13, the skilled artisan will realize that the easy open feature 20 could also be in the opposite orientation, with the pull tab located closer to the first side wall 12, reside in either orientation near the bottom end 15 of the front wall 10 of bag
10 1a, or reside in either orientation near the top end 14 or bottom end 15 on the back wall 11 of the bag 1a. The full cut 21 can be formed by punching, cutting, or through the use of a laser, or by any other technique known to those skilled in the art. The easy open feature 20 (in this embodiment the cut 21 and/or first 22 or second 23 row of perforations) provides a portion of bag 1a that is weakened. This weakened portion can be opened with less force than required to
15 open or tear other portions of the bag 1a.

Bag 1a can be opened by pulling the pull tab 26, which removes the cover 25 and the portion of bag 1a defined by the cut 21 and the first, second, and third row of perforations 22, 23, and 24, respectively. Although not shown in this embodiment, it will be understood that the full cut 21 can be larger or smaller, and can extend to a greater or lesser extent, and the first and
20 second rows of perforations 22 and 23, respectfully, can extend any distance from the first end and second end, respectively, of the cut toward the opposite side wall of the bag, for example 50%, 75%, 90% or about 100% of the distance from the ends of the cut to the opposite side of the bag. In addition, although not shown in this embodiment, the cover 25 can cover less than the full extent of the first and second rows of perforations, whatever distance the rows of
25 perforations extend across the front wall of the bag, and in certain embodiments covers only the full cut portion of the easy open feature 20. The cover can comprise a polymer, a film, an adhesive, paper, or any combination thereof. Although not shown in FIG. 1, the cut 21 and the first, second, and third row of perforations 22, 23, and 24 can comprise a first cover and a second cover, or a plurality of covers. Additionally, the pull tab 26 can comprise black and white and/or
30 color printing (not shown), for example a coupon (not shown), and can also be used to reclose the bag.

Referring to FIG. 2, the front side view of another embodiment of a bag 1b is shown. Bag 1b also has a front wall 10, a back wall 11, a first side wall 12, a second side wall 13, a flush cut top end 14, and a pinch cut bottom end 15. Bag 1b also comprises an easy open feature 20, which in this embodiment is near the bottom end 15 of the bag 1b and comprises a full cut 21 in a triangular or carat shape having a first end 21a and a second end 21b through the front wall 10 of bag 1b, a first row of perforations 22 extending from the first end 21a of the cut 21, a second row of perforations 23 extending from the second end 21b of the cut 21, an optional third row of perforations 24 connecting the end of the first row of perforations 22 and the second row of perforations 23, a cover 25 over the cut and the rows of perforations, and a pull tab 26 attached to the cover 25.

Referring to FIG. 3, the front side view of yet another embodiment of a bag 1c is shown. Bag 1c also has a front wall 10, a back wall 11, a first side wall 12, a second side wall 13, a flush cut top end 14, and a pinch cut bottom end 15. Bag 1c also comprises an easy open feature 20, which in this embodiment is near the top end 14 of the bag 1c and comprises a full cut 21 in a semi-circular shape having a first end 21a and a second end 21b through the front wall 10 of bag 1c, a first row of perforations 22 extending from the first end 21a of the cut 21, a second row of perforations 23 extending from the second end 21b of the cut 21, an optional third row of perforations 24 connecting the end of the first row of perforations 22 and the second row of perforations 23, a cover 25 over the cut and the rows of perforations, and a pull tab 26 attached to the cover 25.

Referring to FIG. 4, an alternate embodiment of a cover 25 and pull tab 26 is shown, where the cover 25 is over the full cut 21 in a semi-circular shape having a first end 21a and a second end 21b, but does not cover the full extent of the first row of perforations 22 and the second row of perforations 23, and does not cover the third row of perforations 24. In this embodiment, the pull tab 26 includes instructions to open the bag, but can also comprise black and white and/or color printing (not shown), for example a promotional coupon (not shown).

Referring to FIG. 5, the front side view of still another embodiment of a bag 1d is shown. Bag 1d also has a front wall 10, a back wall 11, a first side wall 12, a second side wall 13, a flush cut top end 14, and a pinch cut bottom end 15. Bag 1d also comprises an easy open feature 20, which in this embodiment is near the bottom end 15 of the bag 1d and comprises a full cut 21 in a rectangular shape having a first end 21a and a second end 21b through the front wall 10 of bag

ld, a first row of perforations 22 extending from the first end 21a of the cut 21, a second row of perforations 23 extending from the second end 21b of the cut 21, an optional third row of perforations 24 connecting the end of the first row of perforations 22 and the second row of perforations 23, a cover 25 over the cut and the rows of perforations, and a pull tab 26 attached to the cover 25.

Referring to FIG. 6, the front side view of one embodiment of a "pinch cut" bag 100a is shown. As shown in FIG. 6, the bag 100a has a pinch cut first or top end 105 and a pinch cut second or bottom end 110. Once again, it will be apparent, however, that the orientation of the bag ends 105 and 110 is unimportant and the "top" and "bottom" references are useful but may change depending on the orientation one views the bag. The bag 100a has a front wall or surface 108 with top end 116, a rear wall or surface 106, and two side walls 102 and 103. Those skilled in the art will appreciate that conventional techniques can be used to provide side gussets in the bag 100a for each of sides 102 and 103 during this forming process. The first end 105 of bag 100a has portions 112a and 112b of the rear wall or surface 108 of the bag that extend further from the body of the bag 100a than do portions 114a and 114b of the material of bag 100a forming the side gussets for sides 102 and 103. In addition, the portions 114a and 114b of the side gussets extend further from the body of the bag 100a than the top end 116 of the front wall 108 of the bag 100a. As shown in FIG. 6, the front wall 108 of the bag 100a has an end portion 116 at the first end 105 of the bag that does not extend as far from the body of the bag 100a as the end portions 114a and 114b of the side gussets or the end portions 112a and 112b of the rear wall of the first end 105 of the bag 100a. Bag 100a also comprises an easy open feature 120 near the top end 105 of the bag 100a, which in this embodiment comprises a full cut 121 in a rectangular shape having a first end 121a and a second end 121b through the front wall 108 of bag 100a, a first row of perforations 122 extending from the first end 121a of the cut 121, a second row of perforations 123 extending from the second end 121b of the cut 121, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, a cover 125 over the cut and the rows of perforations, and a pull tab 126 attached to the cover 125.

Referring to FIG. 7, the front side view of another embodiment of a "pinch cut" bag 100b is shown. As shown in FIG. 7, the bag 100b has a pinch cut first or top end 105 and a pinch cut second or bottom end 110. The bag 100b has a front wall or surface 108 with top end 116, a rear

wall or surface 106, and two side walls 102 and 103. The first end 105 of bag 100b has portions 112a and 112b of the rear wall or surface 108 of the bag that extend further from the body of the bag 100b than do portions 114a and 114b of the material of bag 100 forming the side gussets for sides 102 and 103. In addition, the portions 114a and 114b of the side gussets extend further
5 from the body of the bag 100b than the top end 116 of the front wall 108 of the bag 100b. As shown in FIG. 7, the front wall 108 of the bag 100b has an end portion 116 at the first end 105 of the bag that does not extend as far from the body of the bag 100b as the end portions 114a and 114b of the side gussets or the end portions 112a and 112b of the rear wall of the first end 105 of the bag 100b. Bag 100b also comprises an easy open feature 120, which in this embodiment is
10 near the bottom end 110 of the bag 100b and comprises a full cut 121 in a rectangular shape having a first end 121a and a second end 121b through the front wall 108 of bag 100b, a first row of perforations 122 extending from the first end 121a of the cut 121, a second row of perforations 123 extending from the second end 121b of the cut 121, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, a
15 cover 125 over the cut and the rows of perforations, and a pull tab 126 attached to the cover 125.

Referring to FIG. 8, a planar view of an embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100c is to be formed is shown. Shown on the sheet are front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open
20 feature 120, which in this embodiment is near the bottom end 110 of the front wall 108 of the bag 100c and comprises a full cut 121 in a rectangular shape having a first end 121a and a second end 121b through the front wall 108 of bag 100c, a first row of perforations 122 extending from the first end 121a of the cut 121 across the front wall 108 of bag 100a, a second row of perforations 123 extending from the second end 121b of the cut 121 across the front wall
25 108 of bag 100c, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, a cover 125 over the cut 121 and the rows of perforations, and a pull tab 126 attached to the cover 125.

Referring to FIG. 9, a planar view of another embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100d is to be formed is shown. Shown on the sheet are
30 front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open

feature 120, which in this embodiment is near the top end 105 of the front wall 108 of the bag 100d and comprises a full cut 121 in a rectangular shape having a first end 121a and a second end 121b through the front wall 108 of bag 100d, a first row of perforations 122 extending from the first end 121a of the cut 121 across the front wall 108 of bag 100d, a second row of perforations 123 extending from the second end 121b of the cut 121 across the front wall 108 of bag 100d, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, a cover 125 over the cut 121 and the rows of perforations, and a pull tab 126 attached to the cover 125.

Referring to FIG. 10, a planar view of another embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100e is to be formed is shown. Shown on the sheet are front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open feature 120, which in this embodiment is near the top end 105 of the second side 103 of the bag 100e and comprises a full cut 121 in a carat shape having a first end 121a and a second end 121b through the second side 103 of bag 100e, a first row of perforations 122 extending from the first end 121a of the cut 121 across the second side 103 of bag 100e, a second row of perforations 123 extending from the second end 121b of the cut 121 across the second side 103 of bag 100e, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, and a cover 127 over the cut 121 and a small portion of the first row of perforations 122 and second row of perforations 123.

Referring to FIG. 11, a planar view of another embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100f is to be formed is shown. Shown on the sheet are front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open feature 120, which in this embodiment is near the top end 105 of the second side 103 of the bag 100f and comprises a full cut 121 in a carat shape having a first end 121a and a second end 121b through the second side 103 of bag 100f, a first row of perforations 122 extending from the first end 121a of the cut 121 across the second side 103, front wall 108, first side 102 and rear wall 104 of bag 100f, a second row of perforations 123 extending from the second end 121b of the cut 121 across the second side 103, front wall 108, first side 102 and rear wall 104 of bag 100f, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and

the second row of perforations 123, and a cover 127 over the cut 121 and a small portion of the first row of perforations 122 and second row of perforations 123.

Referring to FIG. 12, a planar view of another embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100g is to be formed is shown. Shown on the sheet are front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open feature 120, which in this embodiment is near the top end 105 of the second side 103 of the bag 100g and comprises a full cut 121 in a carat shape having a first end 121a and a second end 121b through the second side 103 of bag 100g, a first row of perforations 122 extending from the first end 121a of the cut 121 across the second side 103, front wall 108 and into the first side 102 of bag 100g, a second row of perforations 123 extending from the second end 121b of the cut 121 across the second side 103, front wall 108 and into the first side 102 of bag 100g, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, and a cover 127 over the cut 121 and a small portion of the first row of perforations 122 and second row of perforations 123.

Referring to FIG. 13, a planar view of another embodiment of a substantially flat sheet of material from which a "pinch cut" bag 100h is to be formed is shown. Shown on the sheet are front wall 108, rear wall 106, first side 102 having gusset portion 114a, second side 103 having gusset portion 114b, seam 104, top end 105 and bottom end 110. Also shown is easy open feature 120, which in this embodiment is near the top end 105 of the front wall 108 of the bag 100h and comprises a bidirectional full cut 121 in a square shape having a first end 121a, a second end 121b, a third end 121c and a fourth end 121d through the front wall 108 of bag 100h, a first row of perforations 122 extending from the first end 121a of the cut 121 across the front wall 108 and into the first side 102 of bag 100h, a second row of perforations 123 extending from the second end 121b of the cut 121 across the front wall 108 and into the first side 102 of bag 100h, an optional third row of perforations 124 connecting the end of the first row of perforations 122 and the second row of perforations 123, a fourth row of perforations 122a extending from the third end 121c of the cut 121 across the front wall 108 and into the second side 103 of bag 100h, a fifth row of perforations 123a extending from the fourth end 121d of the cut 121 across the front wall 108 and into the second side 103 of bag 100h, an optional sixth row of perforations 124a connecting the end of the fourth row of perforations 122a and the fifth row

of perforations 123a, and a cover 127 over the cut 121 and a small portion of the first row of perforations 122, second row of perforations 123, fourth row of perforations 122a and fifth row of perforations 123a.

Referring to FIG. 14, the back side view of yet another embodiment of a "pinch cut" bag 100j is shown. As shown in FIG. 14, the bag 100j has a first end 105 and a second end 110. It is useful to think of first and second ends 105 and 110 as the top and bottom ends of the bag 100j, respectively. The bag 100j has a front wall or surface 108, a rear wall or surface 106, and two side walls 102 and 103. The bag 100j also has a seam 104 on the back side, or rear wall or surface. The seam 104 is made when the bag 100 is formed using conventional methods known to those skilled in the art. Using such conventional methods, a material from which a bag 100j is to be formed (such materials are discussed in detail below) is provided in a substantially flat sheet (see FIG. 8 through FIG. 13). The sheet is then directed and formed so that a portion of one side of the sheet is disposed on top of the other side of the sheet, such as in forming a tube. The overlapping portion is then secured and sealed together, forming the seam 104. Those skilled in the art will appreciate that conventional techniques can be used to provide side gussets in the bag 100j for each of sides 102 and 103 during this forming process.

The bottom (as shown in FIG. 14) of the first end 105 of bag 100j has portions 112a and 112b of the front wall 108 or surface of the bag that extend further from the body of the bag 100j than do portions 114a and 114b of the material of bag 100j forming the side gussets for sides 102 and 103. In addition, the portions 114a and 114b of the side gussets extend further from the body of the bag 100j than the top end 117 of the rear wall 106 of the bag 100j. As shown in FIG. 14, the rear wall of the bag 100j has a top end 117 that does not extend as far from the body of the bag 100j as the end portions 114a and 114b of the side gussets or the end portions 112a and 112b of the front wall 108 of the bag 100j.

Now referring to FIG. 15, a top side view of a "pinch cut" bag 100k is provided. For ease of reference, the same numerals are used in the Figures to denote the same features of bag 100k. As shown in FIG. 15, the bag 100k comprises multiple layers of materials 220, 222 and 224. The first layer 220 is preferably a woven polymeric material, such as polypropylene, polyester, high-density polyethylene, or polyethylene. The woven plastic layer 220 can be made of woven strips of plastic made of film to provide great strength from relatively lightweight materials, and can also be stretched to provide greater strength. For example, cross-laminated, woven plastic

film strips, like XF films, are useful and are commercially available from Valeron. Similarly, a biaxially oriented polypropylene plastic material is commercially available from the AmTopp Division of Intoplast Group, Ltd. Those skilled in the art will appreciate that other materials, including various blends of polypropylene and polyethylene can be used without departing from the scope of the invention.

Still referring to FIG. 15, the layer 222 is a coating or a lamination, preferably a polypropylene film. Layer 224 is preferably an oriented polypropylene film with reverse printing. The layer 224 can comprise reverse printing of various labels, advertising, warnings, and other information as may be desired, such as the cover 130 shown in FIG. 15. Although not shown, those skilled in the art will appreciate that the top side, back side, and sides 102 and 103 of the bag 100 may all contain such pictures, patterns, or information as may be desired. Those skilled in the art will appreciate that the reverse printing of layer 224 can be achieved with conventional techniques, and with various conventional plastic films. An advantage of printing the bottom portion of the front and/or back panels is the provision of information that remains visible when the bag is on a display shelf in a store.

Still referring to FIG. 15, the bottom side (as shown in FIG. 15) of the bag 100k extends outward from the body of the bag 100k at the second end 110 of the bag 100k. As shown in FIG. 15, the top side of the bag 100k has an end portion 140 extending along the width of the bag 100k. The side gussets of the sides 102 and 103 of the bag 100k each have portions 142a and 142b which extend further towards the second end 110 of the bag 100k than the end portion 140 of the top side of bag 100k. In addition, the bottom side of the bag 100k has an end portion 110 that extends further from the end portions 142a and 142b of the side gussets. The end portion 110 of the bag 100k includes portions 144a and 144b. As shown in FIG. 15, the second end portion of the bottom side of the bag 100k extends along the entire width of the bag 100k. Also shown is seam 104.

Still referring to FIG. 15, the exposed end portions 144a and 144b of the bottom side of the bag 100k can be coated with a durable adhesive. The adhesive can be applied to selective surface areas, such as portions 144a and 144b, or can be applied in a line extending across the bottom side of the bag 100k along the second end portion 110, including portions 144a and 144b. After the adhesive is applied, preferably the sides 102 and 103 of the bag 100, together with the bottom side of the bag 100k are folded so that at least a portion of the interior surface of the

bottom side of the bag 100k extends over the top surface of the top side of the bag 100k. Preferably, the portions 142a and 142b of the side gussets will be folded over and attached to the top surface of the top side of the bag 100k, as well as portions 144a and 144b of the second end 110 of the bottom side of the bag 100k. The coating then seals the second end 110 of the bag 100k together. The first end 105 of the bag 100k can be sealed in a similar fashion if desired. Alternatively, the first end 105 or second end 110 of the bag 100k can be sealed using a hot melt technique or any other technique well-known to those skilled in the art.

Referring now to FIG. 16, a detailed cross-sectional view of an end portion of the bag 100 is provided. As shown in FIG. 16, at least a portion of the front side 130 of bag 100 is now covered by the lowest edge portion 110 of the back side of bag 100, the extending portions 142a, 142b of side 102 of the bag 100, as well as a portion of the front side 130 of bag 100 including end portion 140. Once these portions are folded over, heat and pressure can be applied as appropriate to obtain and ensure that the bottom end 110 of bag 100 is durably sealed, such as with a conventional heat sealable adhesive.

Once the bag 100 is sealed at one end, it can be filled with the desired materials. It has been found that a bag 100 with a height of 41 inches and a width of 28 inches can durably hold at least about fifty (50) pounds of material without showing undue stress, tearing, breakage or the like. It is believed that any bulk material can be contained by bag 100, and the contents can weigh up to 100 pounds or so without undue risk of tearing or damage to bag 100. Once the bag 100 is filled, the second end typically needs to be sealed. The second end of the bag 100 can be sealed in a similar manner as that described above for the bottom end 110. Alternatively, the bag 100 can have its second end sealed by conventional means such as sewing. Still another approach is to seal the second end in a manner like that described for the bottom end 110 of the bag 100, and then stitching one of the two ends (not shown). Although not shown, those skilled in the art will understand and appreciate that a second end of bag 100 can be sealed with conventional techniques once bag 100 has been filled with the selected amount of the desired material.

Referring now to FIG. 17, an isometric view of bag 1700 is provided. As shown in FIG. 17, the bag 1700 includes a front panel 1701, a first side panel with gussets 1709, a second side panel with gussets (not visible in FIG. 17), a top end 1703, and a bottom end 1705. The bag 1700 is a pinch cut bag like those described previously, with both a pinch cut top end 1703 and a

pinch cut bottom end 1705. The bag 1700 preferably has a weakened area (not shown in FIG. 17) or other easy open feature on at least one surface (not shown in FIG. 17). As shown in FIG. 17, the bag 1700 has been filled and sealed and contains one or more materials. Although the contents of the bag 1700 may be food, animal food, other bulk items, the contents may also contain liquids or mixtures. Those skilled in the art will appreciate that the bag 1700, once formed in accordance with the present disclosure, may be filled and then either the top end 1703 or the bottom end 1705 or both may be sealed as described previously. As shown in FIG. 17, the bag 1700, once filled, presents a bottom panel 1707 on the bottom end 1705 thereof and a top panel on the top end thereof (not visible in FIG. 17). The bag 1700 may be stacked on top of similar or different bags, such as at a grocery store, pet store, or other display location, such that panel 1707 is easily visible to a consumer. As shown in FIG. 17 the front panel 1701, the first side panel 1709 and the bottom panel 1707 includes printing (and can also include graphics), and it will be appreciated by the skilled artisan that the top panel, the rear panel, and the second side panel of bag 1700, which are not visible in FIG. 17, can also include graphics and/or printing. Thus bag 1700 has six discrete areas for printing and/or graphics, each formed by a discrete surface area of the bag 1700. Additionally, the printing and/or graphics can extend across more than one panel, or any combination of the six panels (not shown). The panel 1707 may include graphics and/or printing so that a consumer is able to quickly, readily and easily identify the brand of the contents in the bag, such as the brand name for the pet food therein if the bag 1700 contains pet food. Alternatively, or in addition, the printing or graphics on the panel 1707 may contain information such as price, composition, expiration date, and the like. In another embodiment, the panel 1707 may contain printing or graphics that provide a coupon or other price discount or other offer, either on the contents of the bag 1700 or some other product.

Referring to FIG. 18, the front side view of an embodiment of a "flush cut" bag 1001a is shown. Bag 1001a has a front wall 1010, a back wall 1011, a first side wall 1012, a second side wall 1013, a top end 1014, and a bottom end 1015. It will be apparent, however, that the orientation of the bag ends 14 and 15 is unimportant and the "top" and "bottom" references are useful but may change depending on the orientation one views the bag. Bag 1001a is considered a "flush cut" bag because the front wall 1010 and the back wall 1011 are cut so that the ends of the front wall 1010 and the back wall 1011 are essentially "flush" with one another; they have substantially the same length. Bag 1001a also comprises an easy open feature 1030 comprising a

cover 1019 proximal to the sealed single fold 1016 (in other embodiments this could be a double fold) at the bottom end 1015 of the bag 1001a. In this embodiment the cover 1019 comprises a first cut 1031 through the cover 1019 having a first end 1031a and a second end 1031b, a second cut 1032 through the cover 1019 having a first end 1032a and a second end 1032b, and a third cut 1033 through the cover 1019 extending from the first cut 1031 to the second cut 1032. This particular orientation of cuts is also referred to as an "H" cut. Although in this embodiment the "H" cut is located near the center of the cover 1019, the skilled artisan will realize that the "H" cut could be in any location along the cover, for example closer to the first side wall 1012 or the second side wall 1013. The "H" cut can be formed by punching, cutting, or through the use of a laser, or by any other technique known to those skilled in the art. The "H" cut provides a portion of the cover 1019 that is weakened. This weakened portion can be opened with less force than required to open or tear other portions of the cover 1019.

Bag 1001a can be opened by pulling the portion of the cover 1019 on either (or both) end of the third cut 1033, which exposes a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1010 of the bag 1001a proximal to the single 1016 (or double) fold at the bottom end 1015 of the bag 1001a. This weakened portion can be opened with less force than required to open or tear other portions of the bag 1001a, including, but not limited to, the sealed single 1016 (or double) fold. Although not shown in this embodiment, it will be understood that the first cut 1031 and/or second cut 1032 can be larger or smaller, and can extend any distance from the first ends 1031a and 1032a and second ends 1031b and 1032b, respectively, of the first 1031 and second 1032 cut toward the opposite side walls of the bag, for example covering 50%, 75%, 90% or about 100% of the distance from the third cut to the opposite sides of the bag.

Referring to FIG. 19, a front side view of another embodiment of a bag 1001b is shown. Bag 1001b also has a front wall 1010, a back wall 1011, a first side wall 1012, a second side wall 1013, a flush cut top end 1014, and a pinch cut bottom end 1015. Bag 1001b also comprises an easy open feature 1020 comprising a cover 1019, which in this embodiment is near the bottom end 1015 of the bag 1001b and comprises a full cut 1021 in a triangular or carat shape having a first end 1021a and a second end 1021b through the cover 1019. Bag 1001b can be opened by pulling the full cut 1021 across the cover 1019, exposing a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1010 of the bag 1001b. The weakened

area of the bag 1001b can be opened with less force than required to open or tear other portions of the bag 1001b.

Referring to FIG. 20, a front side view of another embodiment of a flush cut bag 1001c is shown. Bag 1001c also has a front wall 1010, a back wall 1011, a first side wall 1012, a second side wall 1013, a top end 1014, and a bottom end 1015. Bag 1001c also comprises an easy open feature 1030 comprising a first cover 1019 that covers a weakened portion of the bag 1001c proximal to the sealed single fold 1016 (in other embodiments this could be a double fold) at the bottom end 1015 of the bag 1001a. In this embodiment the first cover 1019 comprises a first cut 1031 through the first cover 1019 having a first end 1031a and a second end 1031b, a second cut 1032 through the first cover 1019 having a first end 1032a and a second end 1032b, and a third cut 1033 through the first cover 1019 extending from the first cut 1031 to the second cut 1032. Once again, this particular orientation of cuts is also referred to as an "H" cut. In this embodiment the "H" cut is covered by a second cover 1035 having a pull tab 1036. Bag 1001c can be opened by pulling the pull tab 1036, thus removing the second cover 1035 from the "H" cut, and then pulling the portion of the first cover 1019 on either (or both) end of the third cut 1033, which exposes a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1010 of the bag 1001c near the sealed single 1016 (or double) fold at the bottom end 1015 of the bag 1001c. This weakened area can be opened with less force than required to open or tear other portions of the bag 1001c, including, but not limited to, the sealed single 1016 (or double) fold.

Referring to FIG. 21, a front side view of another embodiment of a bag 1001d is shown. Bag 1001d also has a front wall 1010, a back wall 1011, a first side wall 1012, a second side wall 1013, a flush cut top end 1014, and a pinch cut bottom end 1015. Bag 1001d also comprises an easy open feature 1020 comprising a first cover 1019, which in this embodiment is near the bottom end 1015 of the bag 1001d and comprises a full cut 1021 in a triangular or carat shape having a first end 1021a and a second end 1021b through the first cover 1019. In this embodiment the full cut 1021 is covered by a second cover 1025 having a pull tab 1026. Bag 1001d can be opened by pulling the pull tab 1026, thus removing the second cover 1025 from the full cut 1021, and then pulling the full cut 1021 across the first cover 1019, exposing a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1010 of the

bag 1001d. The weakened area of the bag 1001d can be opened with less force than required to open or tear other portions of the bag 1001d.

Referring to FIG. 22, the front side view of one embodiment of a "pinch cut" bag 1100a is shown. As shown in FIG. 22, the bag 1100a has a first or top end 1105 and a second or bottom end 1110. Once again, it will be apparent, however, that the orientation of the bag ends 1105 and 1110 is unimportant and the "top" and "bottom" references are useful but may change depending on the orientation one views the bag. In the embodiment shown in FIG. 22 both of the ends of the bag 1100a have a "pinch cut." The bag 1100a has a front wall or surface 1108 with top end 1116, a rear wall or surface 1106, and two side walls 1102 and 1103. Those skilled in the art will appreciate that conventional techniques can be used to provide side gussets in the bag 1100a for each of sides 1102 and 1103 during this forming process. The first end 1105 of bag 1100a has portions 1112a and 1112b of the rear wall or surface 1108 of the bag that extend further from the body of the bag 1100a than do portions 1114a and 1114b of the material of bag 1100a forming the side gussets for sides 1102 and 1103. In addition, the portions 1114a and 1114b of the side gussets extend further from the body of the bag 1100a than the top end 1116 of the front wall 1108 of the bag 1100a. As shown in FIG. 22, the front wall 1108 of the bag 1100a has an end portion 1116 at the first end 1105 of the bag that does not extend as far from the body of the bag 1100a as the end portions 1114a and 1114b of the side gussets or the end portions 1112a and 1112b of the rear wall of the first end 1105 of the bag 1100a. Bag 1100a also comprises an easy open feature 1120 comprising a cover 1019 near the bottom end 1110 of the bag 1100a. In this embodiment the cover 1019 comprises a full cut 1121 in a rectangular shape having a first end 1121a and a second end 1121b through the cover 1019. Bag 1100a can be opened by pulling the full cut 1121 across the cover 1019, exposing a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1108 of the bag 1100a. The weakened area on the front wall 1108 of the bag 1100a can be opened with less force than required to open or tear other portions of the bag 1100a.

Referring to FIG. 23, the front side view of another embodiment of a bag 1100b is shown. As shown in FIG. 23, the bag 1100b has a pinch cut first or top end 1105 and a flush cut second or bottom end 1110. The bag 1100b has a front wall or surface 1108 with top end 1116, a rear wall or surface 1106, and two side walls 1102 and 1103. The first end 1105 of bag 1100b has portions 1112a and 1112b of the rear wall or surface 1108 of the bag that extend further from

the body of the bag 1100b than do portions 1114a and 1114b of the material of bag 1100b forming the side gussets for sides 1102 and 1103. In addition, the portions 1114a and 1114b of the side gussets extend further from the body of the bag 1100b than the top end 1116 of the front wall 1108 of the bag 1100b. As shown in FIG. 23, the front wall 1108 of the bag 1100b has an end portion 1116 at the first end 1105 of the bag that does not extend as far from the body of the bag 1100b as the end portions 1114a and 1114b of the side gussets or the end portions 1112a and 1112b of the rear wall of the first end 1105 of the bag 1100b. In addition, the bottom end 1110 of bag 1100b is sealed using a single fold 1109 (in other embodiments this can be a double fold). Bag 1100b also comprises an easy open feature 1130 comprising a cover 1019, proximal to the sealed single 1016 (or double) fold at the bottom end 1110 of the bag 1100b. The cover 1019 comprises a first cut 1031 through the cover 1019 having a first end 1031a and a second end 1031b, a second cut 1032 through the cover 1019 having a first end 1032a and a second end 1032b, and a third cut 1033 through the cover 1019 extending from the first cut 1031 to the second cut 1032. Once again, this particular orientation of cuts is also referred to as an "H" cut. Bag 1100b can be opened by pulling the portion of the cover 1019 on either (or both) end of the third cut 1033, which exposes a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1108 of the bag 1100b. The weakened area on the front wall 1108 of the bag 1100b can be opened with less force than required to open or tear other portions of the bag 1100b, including, but not limited to, the sealed single 1109 (or double) fold.

Referring to FIG. 24, the front side view of one embodiment of a "pinch cut" bag 1100c is shown. As shown in FIG. 24, the bag 1100c has a first or top end 1105 and a second or bottom end 1110. Once again, it will be apparent, however, that the orientation of the bag ends 1105 and 1110 is unimportant and the "top" and "bottom" references are useful but may change depending on the orientation one views the bag. In the embodiment shown in FIG. 24 both of the ends of the bag 1100c have a "pinch cut." The bag 1100c has a front wall or surface 1108 with top end 1116, a rear wall or surface 1106, and two side walls 1102 and 1103. Those skilled in the art will appreciate that conventional techniques can be used to provide side gussets in the bag 1100c for each of sides 1102 and 1103 during this forming process. The first end 1105 of bag 1100c has portions 1112a and 1112b of the rear wall or surface 1108 of the bag that extend further from the body of the bag 1100c than do portions 1114a and 1114b of the material of bag 1100c forming the side gussets for sides 1102 and 1103. In addition, the portions 1114a and

1114b of the side gussets extend further from the body of the bag 1100c than the top end 1116 of the front wall 1108 of the bag 1100c. As shown in FIG. 24, the front wall 1108 of the bag 1100c has an end portion 1116 at the first end 1105 of the bag that does not extend as far from the body of the bag 1100c as the end portions 1114a and 1114b of the side gussets or the end portions
5 1112a and 1112b of the rear wall of the first end 1105 of the bag 1100c. Bag 1100c also comprises an easy open feature 1120 comprising a first cover 1019 near the bottom end 1110 of the bag 1100c. In this embodiment the first cover 1019 comprises a full cut 1121 in a rectangular shape having a first end 1121a and a second end 1121b through the first cover 1019, and a second cover 1125 having a pull tab 1126 covering the full cut 1121 in the first cover 1019.
10 Bag 1100c can be opened by pulling the pull tab 1126, thus removing the second cover 1125 from the full cut 1121, and then pulling the full cut 1121 across the first cover 1019, exposing a weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1108 of the bag 1100c. The weakened area on the front wall 1108 of the bag 1100c can be opened with less force than required to open or tear other portions of the bag 1100c.

15 Referring to FIG. 25, the front side view of another embodiment of a bag 1100d is shown. As shown in FIG. 25, the bag 1100d has a pinch cut first or top end 1105 and a flush cut second or bottom end 1110. The bag 1100d has a front wall or surface 1108 with top end 1116, a rear wall or surface 1106, and two side walls 1102 and 1103. The first end 1105 of bag 1100d has portions 1112a and 1112b of the rear wall or surface 1108 of the bag that extend further from
20 the body of the bag 1100d than do portions 1114a and 1114b of the material of bag 1100d forming the side gussets for sides 1102 and 1103. In addition, the portions 1114a and 1114b of the side gussets extend further from the body of the bag 1100d than the top end 1116 of the front wall 1108 of the bag 1100d. As shown in FIG. 25, the front wall 1108 of the bag 1100d has an end portion 1116 at the first end 1105 of the bag that does not extend as far from the body of the
25 bag 1100d as the end portions 1114a and 1114b of the side gussets or the end portions 1112a and 1112b of the rear wall of the first end 1105 of the bag 1100d. In addition, the bottom end 1110 of bag 1100d is sealed using a single fold 1109 (in other embodiments this can be a double fold). Bag 1100d also comprises an easy open feature 1130 comprising a first cover 1019, which in this embodiment is proximal to the sealed single 1016 (or double) fold at the bottom end 1110 of the
30 bag 1100b. The first cover 1019 comprises a first cut 1031 through the first cover 1019 having a first end 1031a and a second end 1031b, a second cut 1032 through the first cover 1019 having a

first end 1032a and a second end 1032b, and a third cut 1033 through the first cover 1019 extending from the first cut 1031 to the second cut 1032. Once again, this particular orientation of cuts is also referred to as an "H" cut. Bag 1100d also has a second cover 1135 having a pull tab 1136 that covers the "H" cut. Bag 1100d can be opened by pulling the pull tab 1136 thus
5 removing the second cover 1135 from the "H" cut, and pulling the portion of the first cover 1019 on either (or both) end of the third cut 1033, which exposes weakened area, for example a cut, a series of perforations, or a scoring line, on the front wall 1108 of the bag 1100c. The weakened area on the front wall 1108 of the bag 1100c can be opened with less force than required to open or tear other portions of the bag 1100c, including, but not limited to, the sealed single 1109 (or
10 double) fold.

Those skilled in the art will understand and appreciate that the bag according to the invention may vary in size, dimensions, and shape without departing from the scope of the invention, and that the foregoing description of the preferred embodiments is not intended to limit the scope of the invention as defined by the claims. For example, those skilled in the art
15 will understand and appreciate that the foregoing bag 1 or bag 100 can have sealed and sewn ends in a tubular bag with side gussets as shown, or a block bottom and top, or a combination thereof, although not shown. Those skilled in the art will also appreciate that a weakened portion or area can be provided in a number of ways that may vary from those expressly described and shown, such as by stressing portions of the bag wall with or without deforming, perforating, or
20 cutting same, as well as varying the size, number, depth, and/or pattern of perforations, cuts, and/or deformations in a bag wall. Similarly, those skilled in the art will understand that the bag 1 may be provided with a re-usable opening (not shown) or a corner portion adapted to allow a person to easily pour the contents of the bag 1 out (not shown), or a combination of these two features. Such features are conventional with prior art bags. Similarly, those skilled in the art
25 will appreciate that terms such as "front" and "rear," and "top" and "bottom," are useful in describing a bag, but essentially depend on a bag's orientation when such terms are used, and are therefore not limiting as to a bag's orientation.

THE EMBODIMENTS OF THE INVENTION FOR WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method of manufacturing a bag comprising:
 - (a) providing a bag having a first wall, a second wall, an interior surface, an exterior surface, a top end, a bottom end, with each of the first wall and second wall having a laminate consisting of a first layer, a second layer, and a third layer, and having an interior surface, an exterior surface, a first end and a second end, wherein the first layer comprises woven strips comprising oriented polyethylene, the second layer comprises an oriented polyethylene film, and the third layer comprises an oriented polyethylene film having at least a portion having printing or graphics, and wherein the second layer laminates the first layer and third layer together,
 - (b) laser cutting the first layer, the second layer, and the third layer of either the first wall or the second wall of the bag with a plurality of perforations, wherein the plurality of perforations further comprises a first plurality of perforations and a second plurality of perforations, with the first plurality of perforations having a size that differs from that of a second plurality of perforations, each of the plurality of perforations having a first end and a second end, wherein the first plurality of perforations define at least one line extending a distance of at least ten percent across the first wall or the second wall of the bag, wherein each of the plurality of perforations extends through the first layer, through the second layer, and through the third layer of either the first wall or the second wall of the bag, and wherein the first plurality of perforations is located on either the first wall or the second wall and not at the first end or second end of the first wall or the second wall of the bag,
 - (c) applying a cover having a pull tab to cover at least the first plurality of perforations, wherein the cover comprises an adhesive tape and is adapted to allow a consumer to open the bag by pulling on the pull tab of the cover,

(d) applying heated air to at least the first wall or second wall and pressing first wall and second wall together to seal the first end of the bag prior to the bag being filled, wherein the bag is adapted to be filled with at least ten pounds by weight of at least one filling material, and the first end is adapted to comprise a bottom panel when the first end is sealed, and

(e) wherein the second end of the bag is adapted to be sealed once the bag has been filled, wherein the second end is adapted to comprise a top panel when the second end is sealed, wherein the top panel and bottom panel each comprise printing or graphics thereon, and wherein the printing or graphics on at least one of the top panel and the bottom panel is adapted to be visible when the bag is in a stack of a plurality of bags on display.

2. The method according to claim 1, wherein at least a portion of the first wall comprises printing or graphics.

3. The method according to claim 1, wherein cutting the first layer, the second layer, and the third layer further comprises forming the first plurality of perforations to extend between about 30% and about 70% of a distance across the first wall of the bag.

4. The method according to claim 1, wherein cutting the first layer, the second layer, and the third layer further comprises forming the first plurality of perforations to extend about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or about 99% of a distance across the first wall of the bag.

5. The method according to claim 1, wherein the at least one line further defines a curve.

6. The method according to claim 1, wherein the at least one line further defines a first line and a second line.

7. The method according to claim 1, wherein sealing the first end of the bag further comprises:

coating at least the interior surface of a first wall of the bag with an adhesive in a location proximal the first end of the bag; and

folding a portion of the first wall proximal the first end of the bag so that a portion of the interior surface of the first wall having the adhesive contacts a portion of the exterior surface of the second wall.

8. The method according to claim 1, wherein sealing the first end of the bag further comprises using at least one of adhesive sealing, adhesive lamination, extrusion lamination, stitching, ultrasonic energy, pressure, and tape.

9. The method according to claim 1, wherein at least a portion of the first end of the second wall projects further than the first end of the first wall.

10. The method according to claim 9, wherein the portion of the first end of the second wall that projects further than the first end of the first wall is sealed to the outer surface of the first end of the first wall.

11. The method according to claim 1, wherein the bag further comprises a first side wall and a second side wall, wherein each of the first side wall and the second side wall further comprise gussets.

12. The method according to claim 11, wherein a first portion of the first end of the second wall projects further than the first end of the first side wall and a second portion of the first end of the second side wall, and the first end of the first side wall and the first end of the second side wall project further than the first end of the first wall, and wherein the first portion of the first end of the second wall that projects further than the first end of the first side wall and the second

portion of the first end of the second side wall, and the portion of the first end of the first side wall and the first end of the second side wall that project further than the first end of the first wall are sealed to the outer surface of the first end of the first wall.

13. The method according to claim 1, wherein the bag is adapted to be filled with at least twenty pounds by weight of a filling material.

14. The method according to claim 1, wherein the bag is adapted to be filled with at least thirty pounds by weight of a filling material.

15. The method according to claim 1, wherein the bag is adapted to be filled with at least about forty pounds by weight of a filling material.

16. The method according to claim 1, wherein the top panel and the bottom panel are substantially rectangular.

17. The method according to claim 1, wherein the sealing further comprises applying heat and pressure to the first end of the first wall.

18. The method according to claim 1, wherein the cutting further comprises at least one of punching, cutting, and laser cutting.

19. The method according to claim 1, further comprising reverse printing on the third layer.

20. The method according to claim 1, wherein cutting the first layer, the second layer, and the third layer further comprises cutting different sized perforations.

21. A method of manufacturing a bag comprising:

(a) providing a bag having a first wall, a second wall, an interior surface, an exterior surface, with each of the first wall and second wall having an interior surface, an exterior surface, a first end and a second end and the first wall and the second wall comprising a laminate having a first layer, a second layer, and a third layer, wherein the first layer comprises woven

strips comprising polypropylene, the second layer comprises an oriented polypropylene film, and the third layer comprises an oriented polypropylene film, wherein the second layer laminates the first layer and third layer together,

(b) making a plurality of perforations in the first layer, the second layer, and the third layer of a portion of either the first wall or the second wall of the bag with a laser, wherein the plurality of perforations further comprise a first plurality of perforations and a second plurality of perforations, and at least the first plurality of perforations differ in size from the second plurality of perforations, wherein the first plurality of perforations define at least one line extending a distance of at least ten percent across either the first wall or the second wall of the bag, wherein each of the plurality of perforations extends through the first layer, through the second layer, and through the third layer of the first wall or the second wall of the bag, wherein the first plurality of perforations is located on either the first wall or the second wall and not at the first end or second end of the first wall or the second wall of said bag,

(c) applying a piece of adhesive tape having a pull tab to the first wall or second wall of the bag and thereby covering at least the first plurality of perforations, wherein the adhesive tape is adapted to allow a consumer to open the bag by pulling on the pull tab,

(d) applying an adhesive to a first selected area of the interior surface proximal the first end of the first wall,

(e) folding a portion the first end of the first wall over the first end of the second wall,

(f) applying heat and pressure to a portion of the first wall or the second wall and sealing the first end of the bag, wherein the bag is adapted to be filled with at least ten pounds by weight of at least one filling material, and the first end is adapted to comprise a bottom panel when the first end is sealed, and

(g) wherein the second end of the bag is adapted to be sealed once the bag has been filled, wherein the second end is adapted to comprise a top panel when the second end is sealed, wherein the top panel and bottom panel each comprise printing or graphics thereon, and wherein the printing or graphics on at least one of the top panel and the bottom panel is adapted to be visible when the bag is displayed in a stack of a plurality of bags.

22. The method according to claim 21, wherein the bag has a first side and a second side, each located between the first wall and the second wall, and further comprising the step of forming gussets on each of the first side and the second side of the bag.

23. The method of claim 21, wherein the bag has dimensions of 41 inches in height and 28 inches in width and has a capacity of from about 50 to about 100 pounds of dry material.

24. The method according to claim 21, wherein the at least one line further defines a curve.

25. The method according to claim 21, further comprising the step of after the bag is filled, applying an adhesive to a second selected area of the interior surface of either the first wall or the second wall, wherein the second selected area is proximal to the second end of the bag.

26. A bag made in accordance with the method of any one of claims 1 to 25.

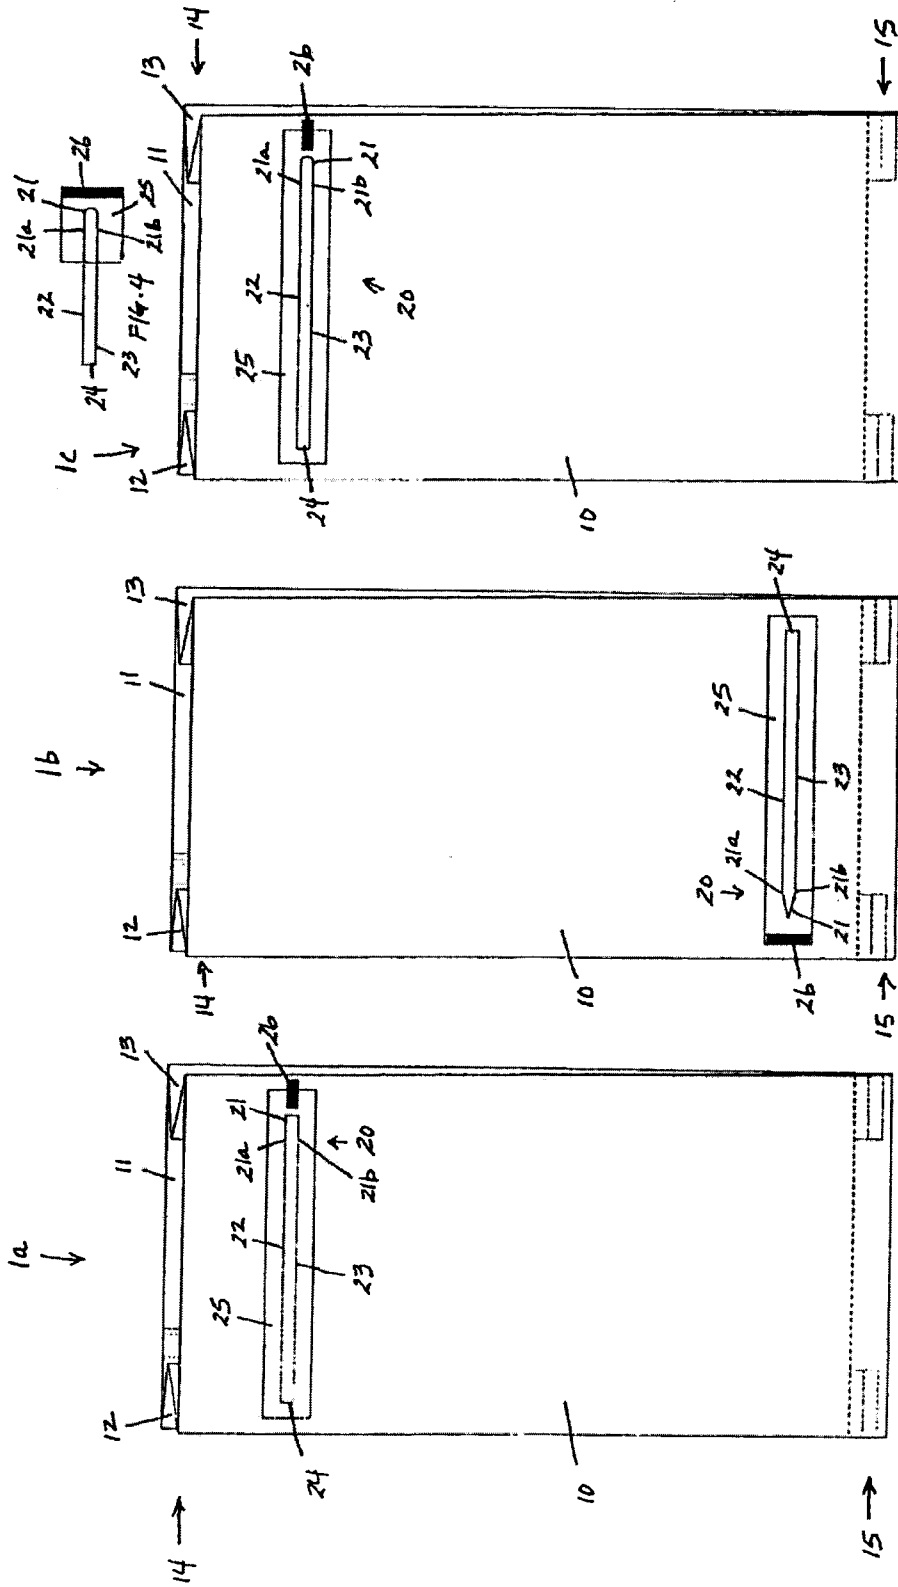
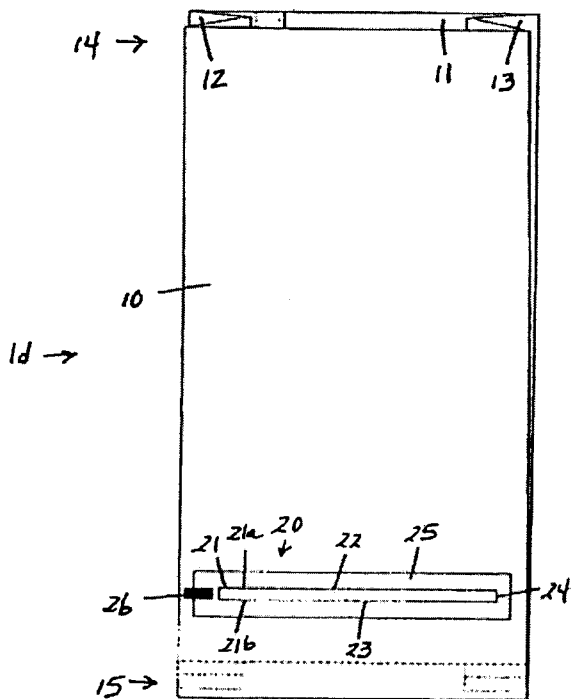
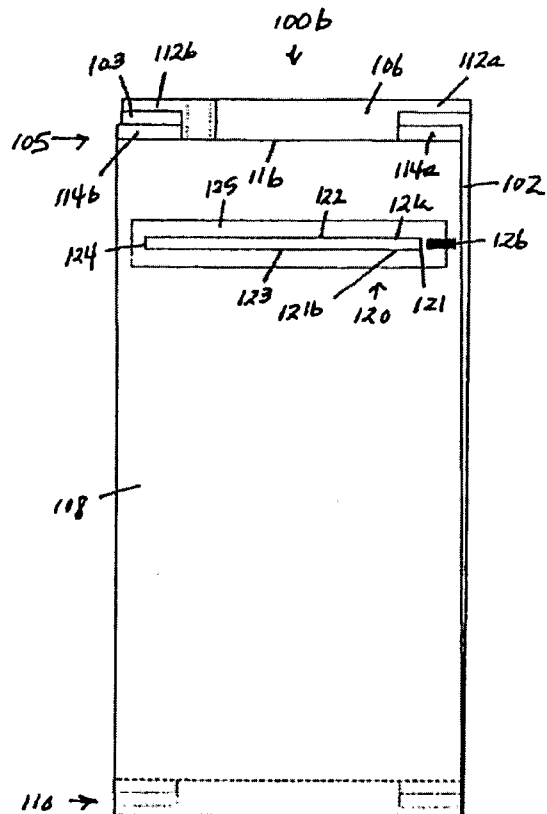
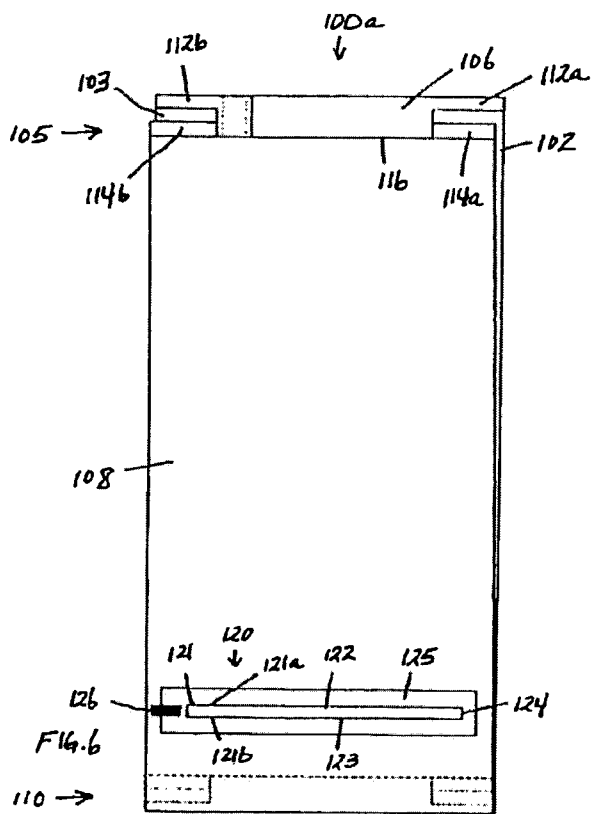


FIG. 3

FIG. 2

FIG. 1



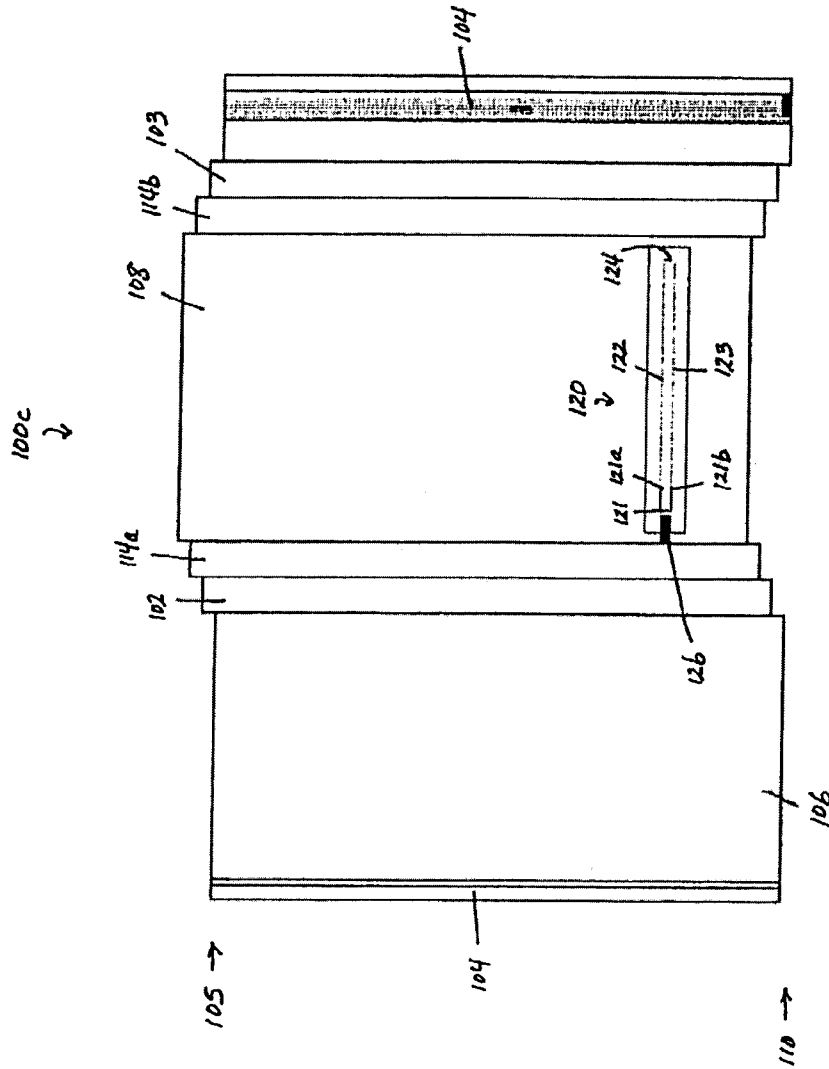


FIG. 8

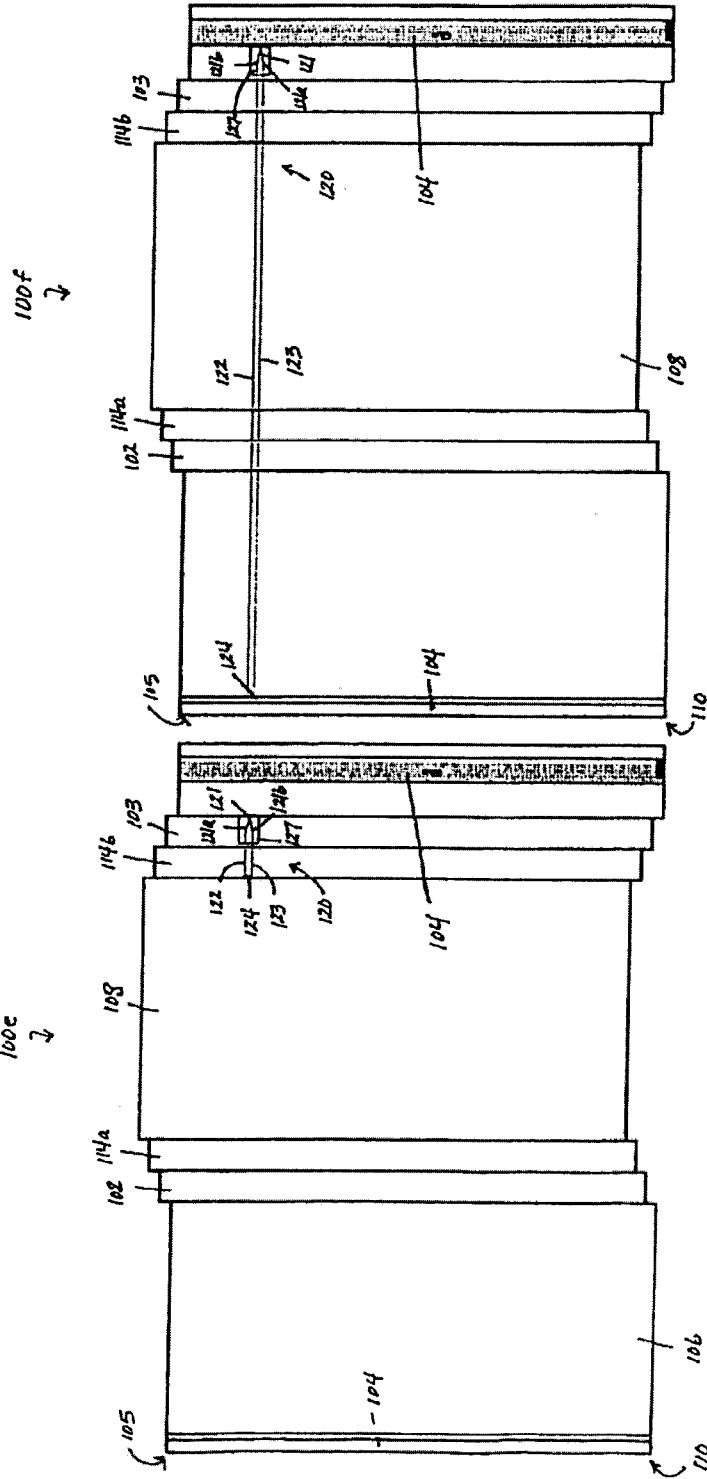


Fig. 11

Fig. 10

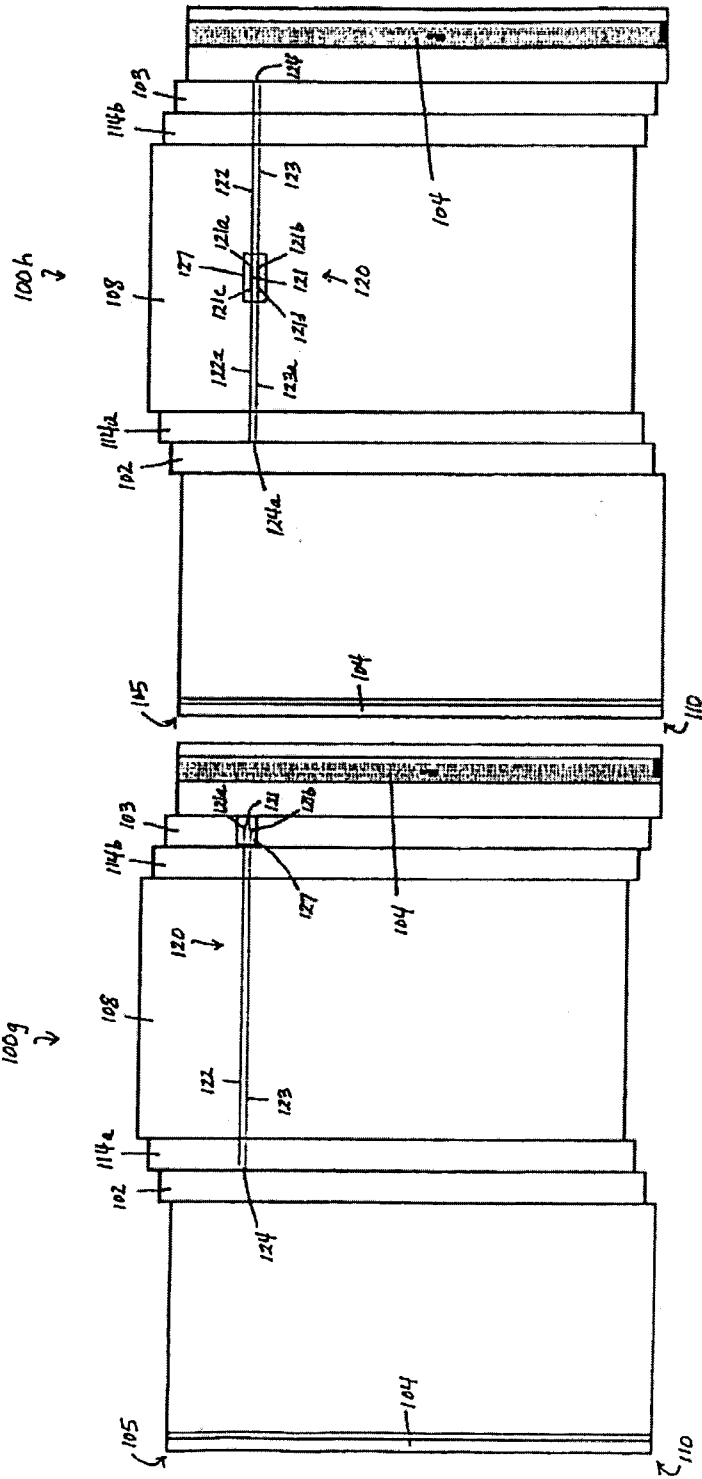


Fig. 13

Fig. 12

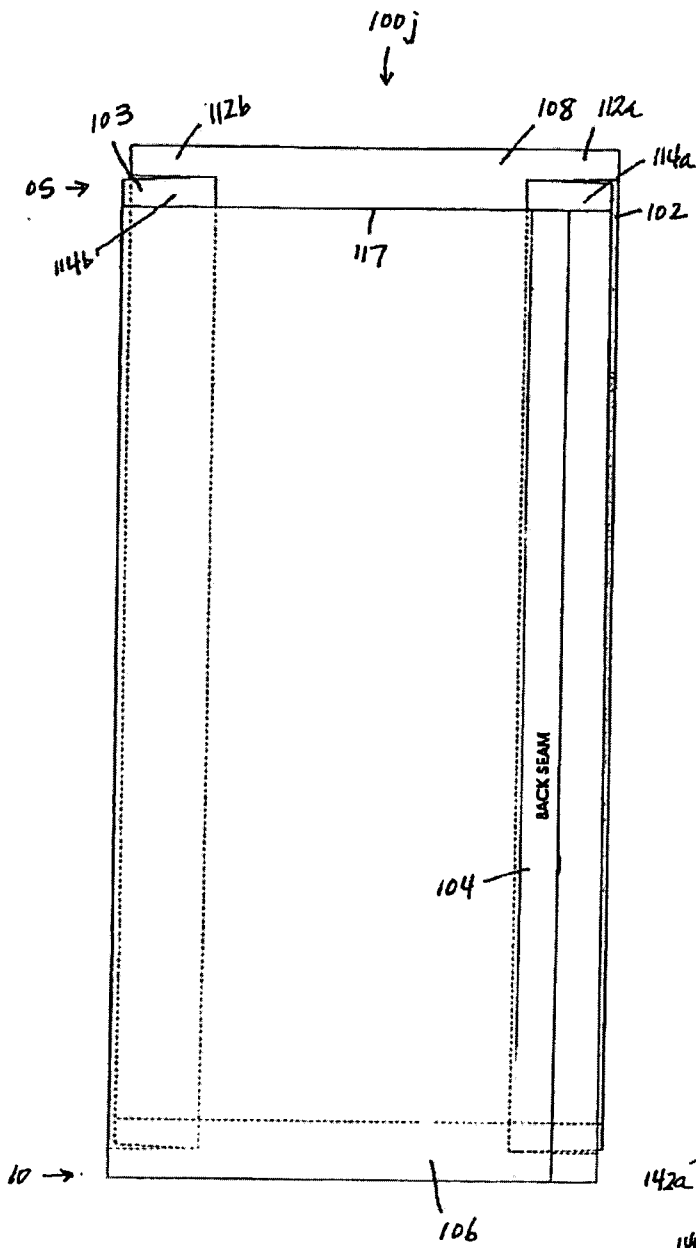


FIG. 14

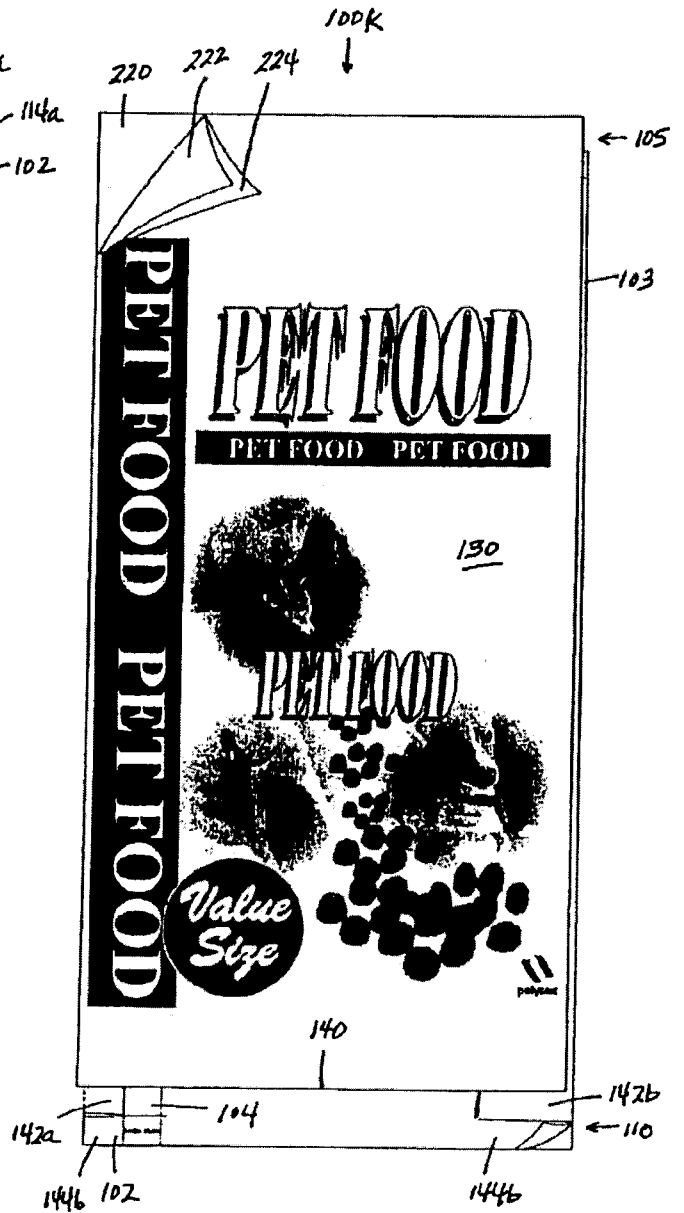
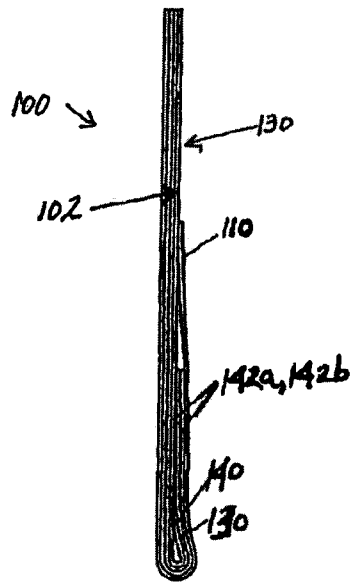


FIG. 15

Fig. 16



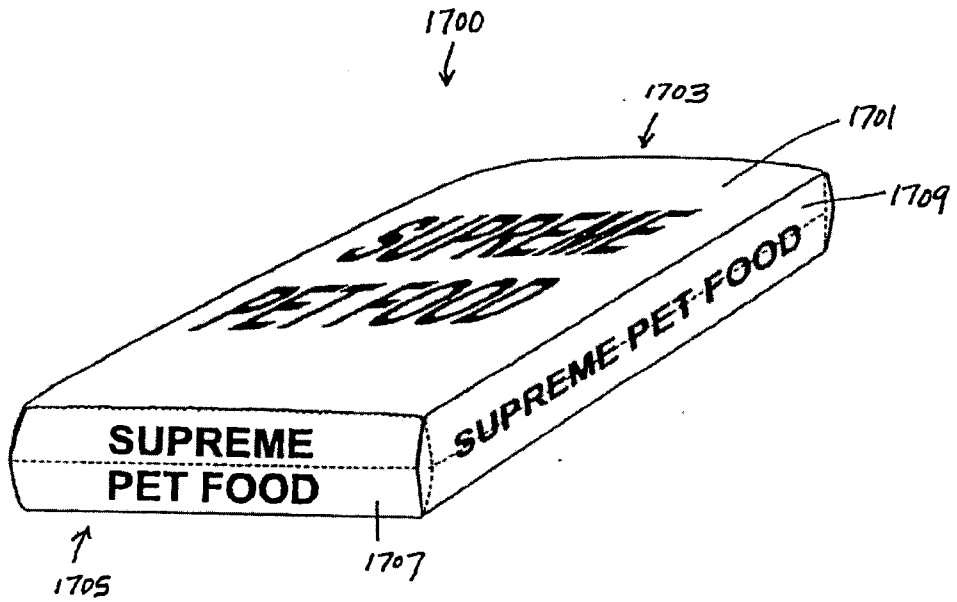
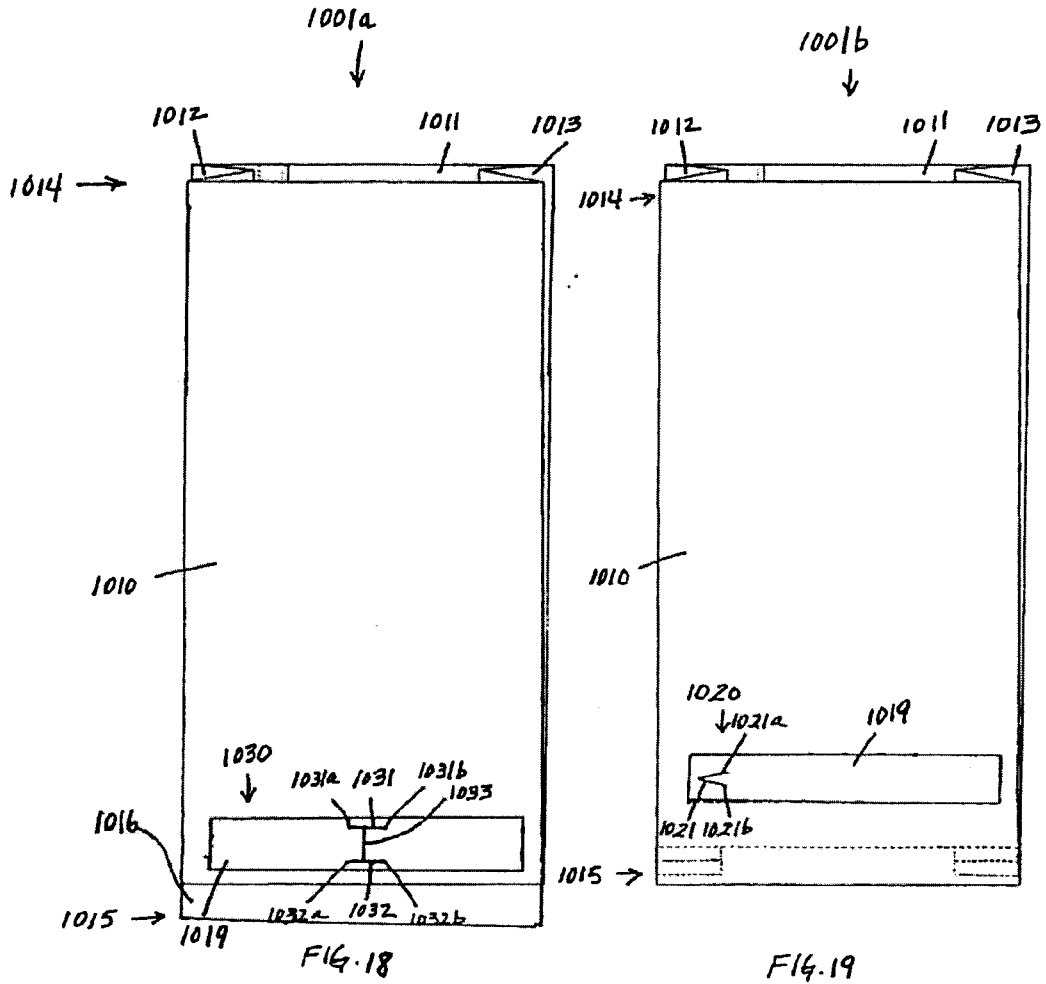


FIG. 17



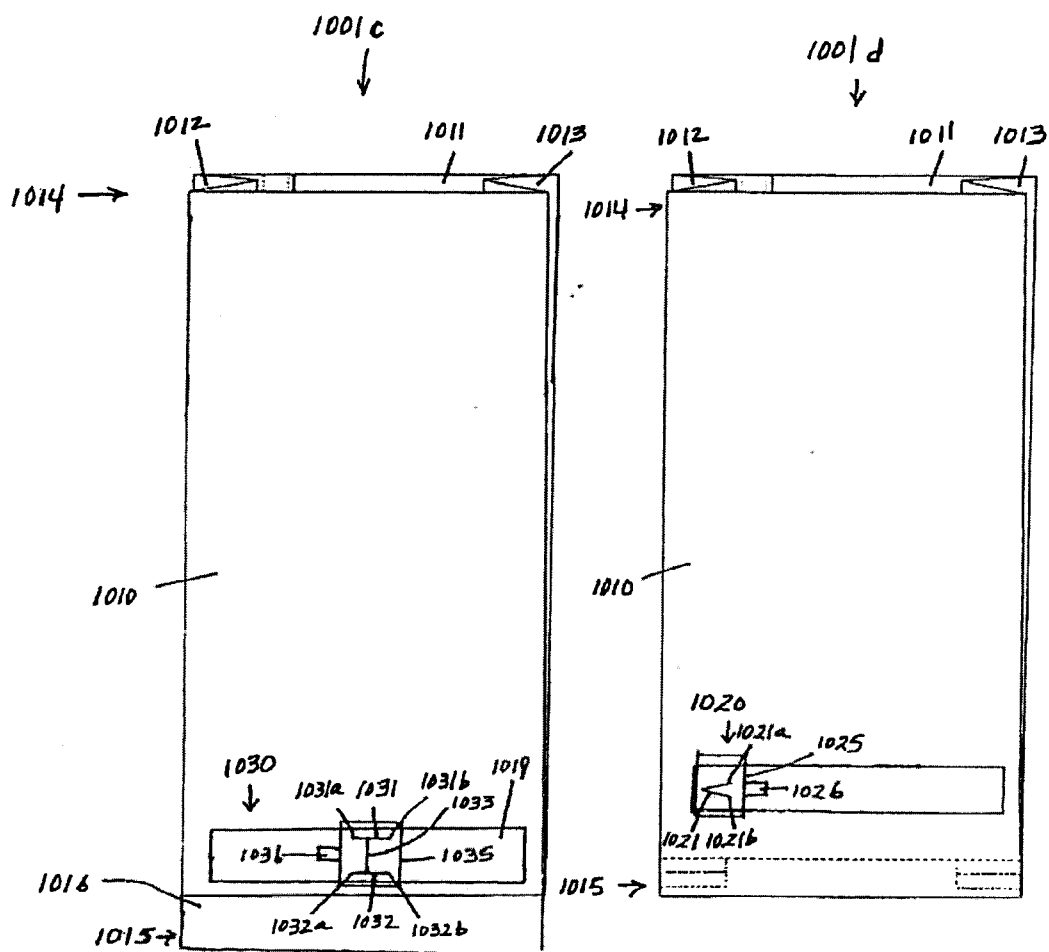


FIG. 20

FIG. 21

