



(11) (21) (C) **2,006,748**
(22) 1989/12/28
(43) 1991/06/28
(45) 2000/03/21

(72) Davis, Allen V.C., US


(73) HEATHER RUTH DAVIS 1982 TRUST, US

(73) THE KATHERINE L. ACUFF TRUST NO. 2, US

(51) Int.Cl.⁵ H01H 35/26

(54) **ACTIONNEUR ET COMMUTATEUR DE COMMANDE**

(54) **CONTROL ACTUATOR AND SWITCH**

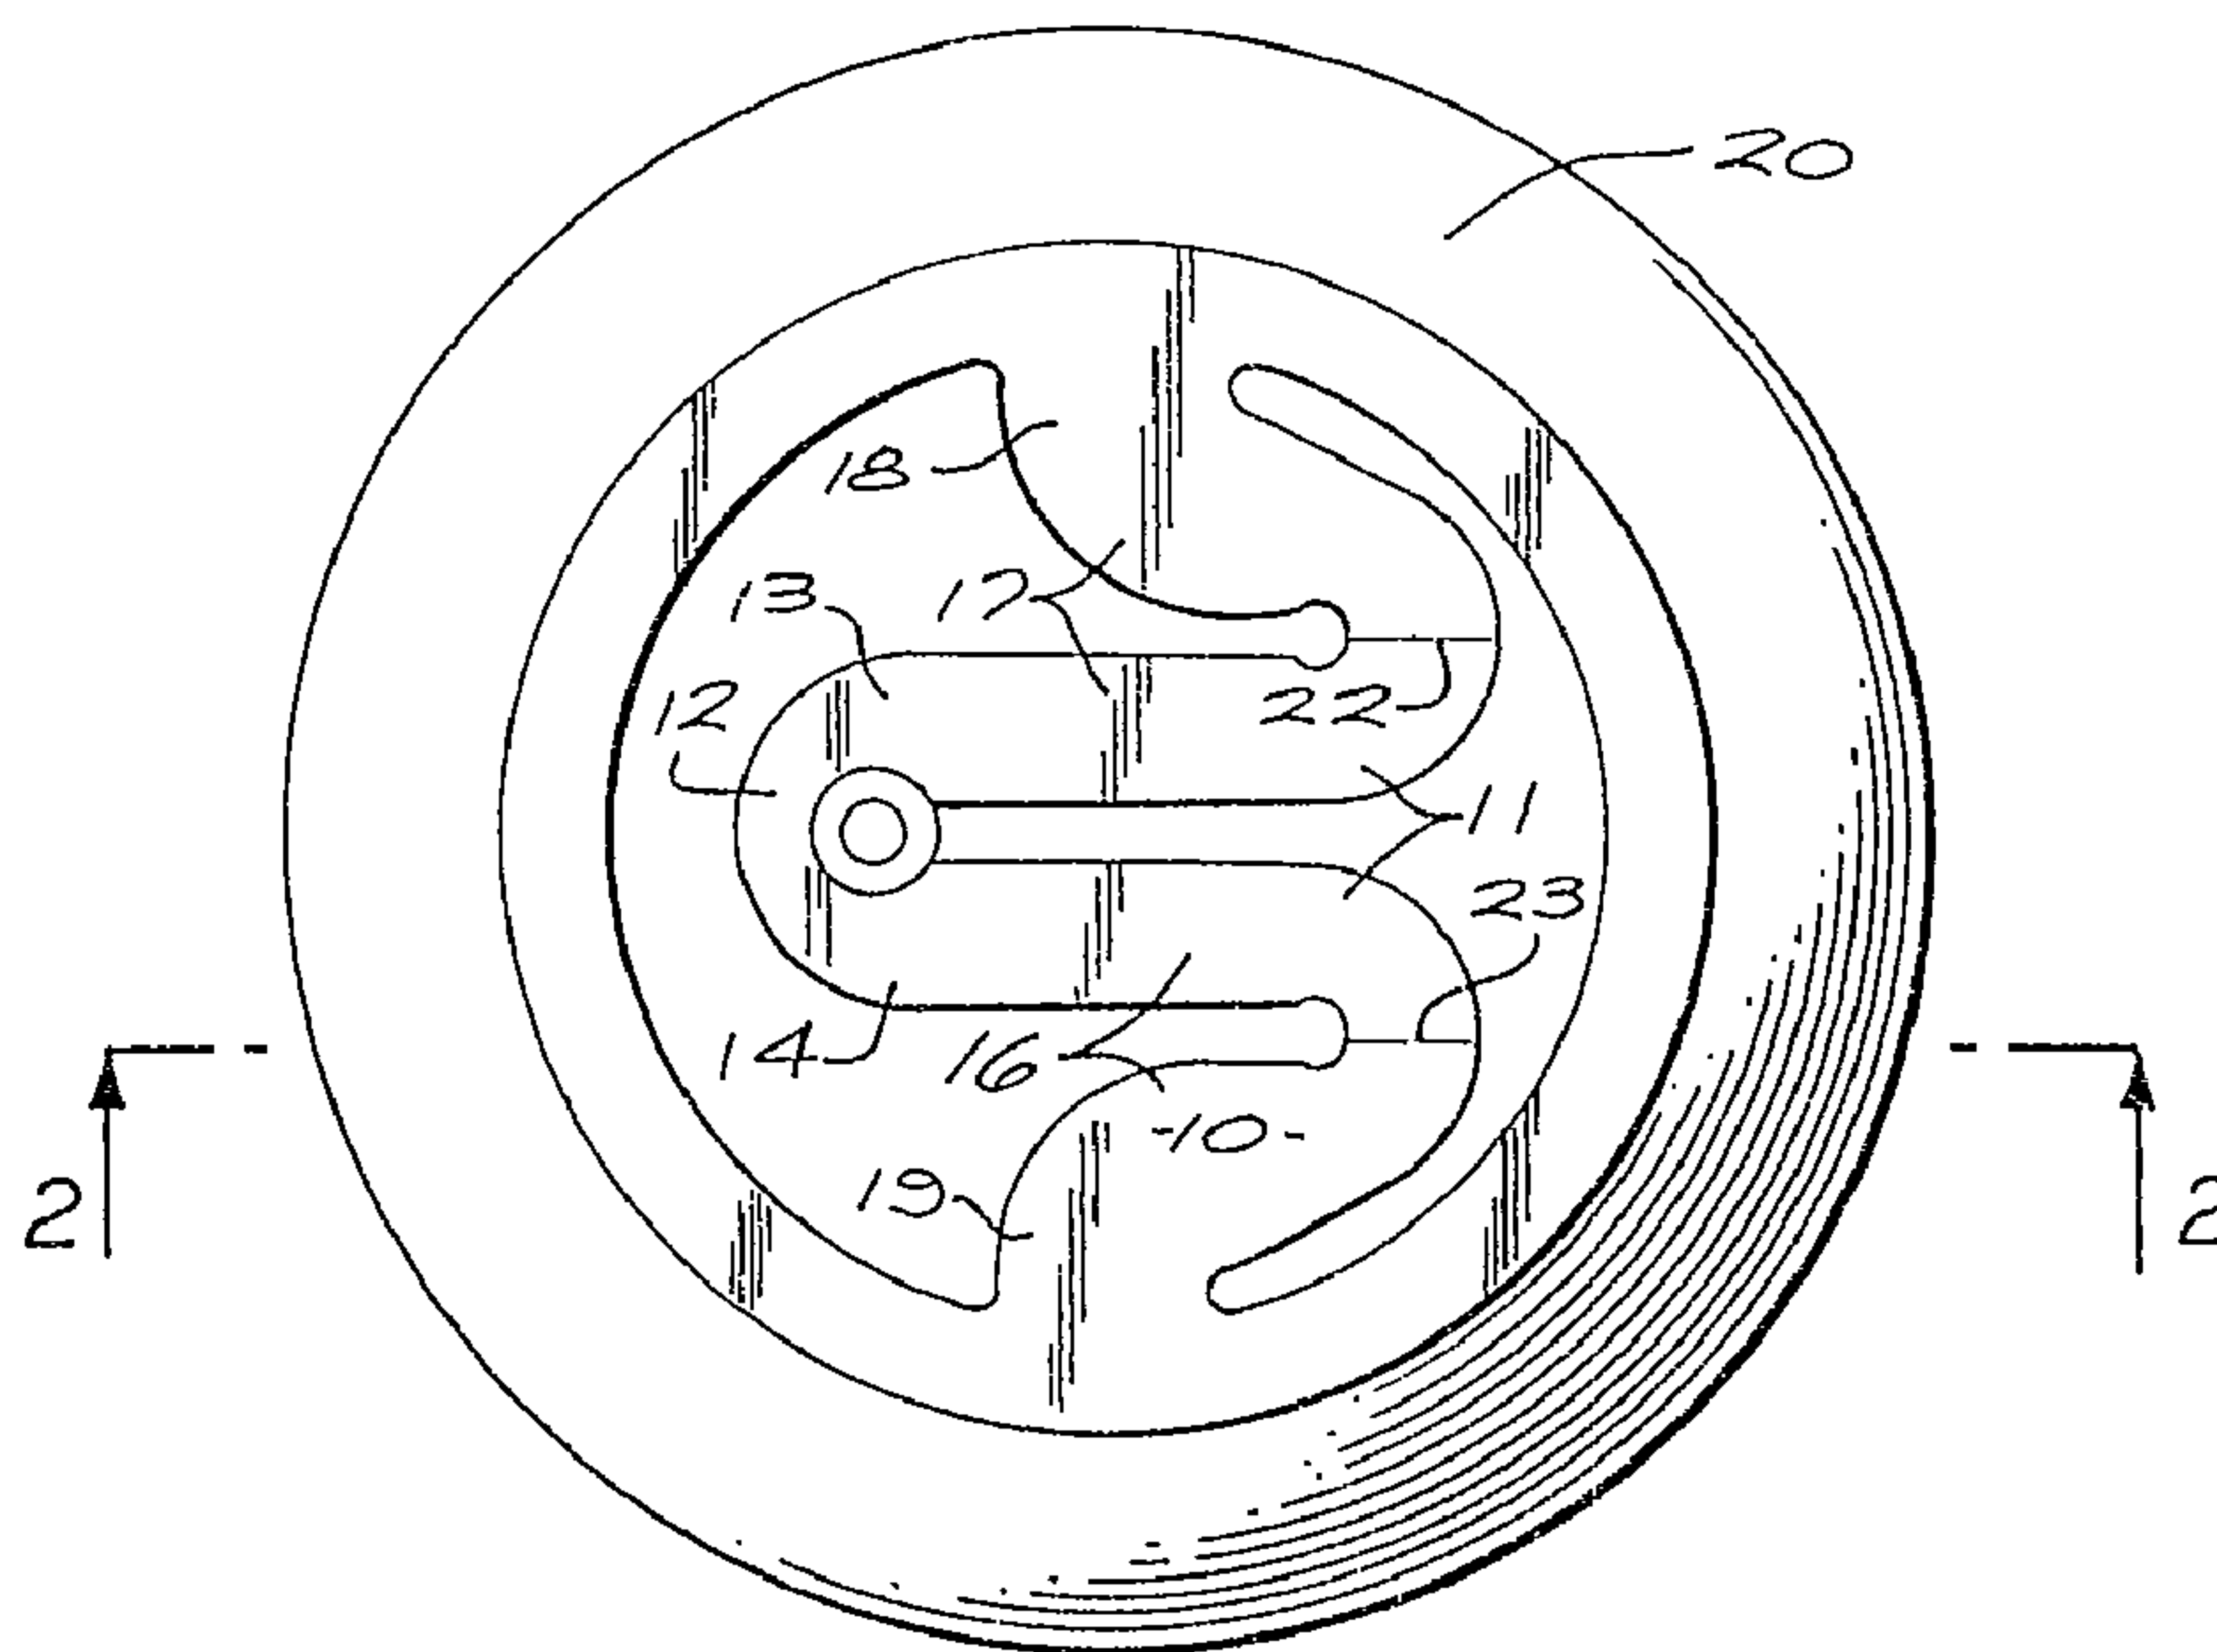

(57) A resilient element such as a thin flat plate or disc spring, commonly known as a "Belleville" spring, which is capable of deflection along an axis normal to its surface is modified to include an amplifying segment disposed in a central aperture in the form of an approximately "W" shaped strip corrected at its ends to opposite positions on the inner margin of the central opening. The central portion of the "W" forms an inverted "U" which is subjected, after positioning within the central aperture, to torquing stress in the plane of the material to bring the ends of the open end of the "U" slightly closer together than the inner edges of the "U" nearest its closed end. One of a pair of Switch contacts is mounted on the closed end of the "U" shaped portion of the device opposite another contact carried on the switch base. Means are provided for applying pressure, normal to the plane of the material, on some position of the peripheral sensing spring in which the ends of the "W" shaped portion connect with the inner margin of the central opening of said sensing spring and when such pressure rises to a predetermined level, the "U" shaped portion will snap over to a position in which the contact which it carries will assume an opposite position with respect to the contact carried by the switch frame.

ABSTRACT OF THE INVENTION

A resilient element such as a thin flat plate or disc spring, commonly known as a "Belleville" spring, which is capable of deflection along an axis normal to its surface is modified to include an amplifying segment disposed in a central aperture in the form of an approximately "W" shaped strip connected at its ends to opposite positions on the inner margin of the central opening. The central portion of the "W" forms an inverted "U" which is subjected, after positioning within the central aperture, to torquing stress in the plane of the material to bring the ends of the open end of the "U" slightly closer together than the inner edges of the "U" nearest its closed end. One of a pair of Switch contacts is mounted on the closed end of the "U" shaped portion of the device opposite another contact carried on the switch base. Means are provided for applying pressure, normal to the plane of the material, on some position of the peripheral sensing spring in which the ends of the "W" shaped portion connect with the inner margin of the central opening of said sensing spring and when such pressure rises to a predetermined level, the "U" shaped portion will snap over to a position in which the contact which it carries will assume an opposite position with respect to the contact carried by the switch frame.

SPECIFICATION

CONTROL ACTUATOR AND SWITCH

Background of the Invention

Field of the Invention

The present invention relates to improvements in snap action devices for transmission and amplification of control movements. Such devices are especially useful in electrical switches and analogous devices in which a small sensing movement such as that of a temperature or pressure sensor is to be translated into a larger, and usually snap action, movement of an electrical contact or analogous element.

Description of the Prior Art

Devices for the transmission and amplification of snap action movement are disclosed in the British patent of Grey No. 405,441 and the U.S. patent of Proctor No. 2,200,995 both of which utilize levers, pivots and secondary springs to amplify movements and produce snap action in an opening and closing electrical contacts. While this type of structure is still widely in use, it is subject to drifting of the actuation points due to its mechanical complexity. Simplification of this type of device is disclosed in the U.S. patents of this inventor, Davis No. 2,824,919 and No. 3,472,980 wherein a simple disc spring both senses the actuation pressure and provides a snap deflection movement to actuate a device utilizing lever amplification to operate electrical contacts. It is a primary object of the present invention to provide, in an integral unit, a device for effecting amplification sufficient to directly perform a secondary function, such as opening and closing electrical

contacts, valve poppets or analogous devices, by means of a unitary structure which accomplishes the sensing function and simultaneously effects the amplification and deflection without the use of pivoted levers or secondary springs.

Summary of the Invention

According to the present invention, a resilient element such as a thin flat plate or disc spring, commonly known as a "Belleville" spring, which is capable of deflection along an axis normal to its surface is modified to include an amplifying segment disposed in a central aperture in the form of a sinuous strip connected at its ends to opposite positions on the inner margin of the central opening. The central portion of the sinuous strip forms an inverted "U" which is subjected, after positioning within the central aperture, to torquing stress in the plane of the material to bring the ends of the open end of the "U" slightly closer together than the inner edges of the "U" nearest its closed end.

According to the present invention, it has been discovered that a small rotational displacement normal to the plane of the material of the ends of the sinuous strip connected to the margin of the central opening will result in a snap deflection of considerable magnitude at the closed end of the "U" shaped portion in a direction normal to that plane. A slight

displacement of the sinuous strip also occurs if the device is supported at its outer periphery.

In applying this device to the operation of an electrical switch, one of a pair of contacts is mounted on the closed end of the "U" shaped portion of the device opposite another contact carried on the switch base. Means are provided for applying pressure, normal to the plane of the material, on some position of the peripheral sensing spring in which the ends of the sinuous strip connect with the inner margin of the central opening of said sensing spring and when such pressure rises to a predetermined level, the "U" shaped portion will snap over to a position in which the contact which it carries will assume an opposite position with respect to the contact carried by the switch frame.

The invention may be summarized according to one aspect as a motion transmitting and amplifying device for effecting electrical contact therewith responsive to deforming force applied to one surface thereof comprising: a thin convex disc of spring metal having a continuous rim section and including an integral central section, shaped, in the absence of deforming force as a portion of the convex disc; and said integral central section constituting a sinuous strip of spring metal connected at its ends with opposite portions of said spring metal continuous circular rims section; said sinuous strip having a central portion disposed generally centrally of said spring

3a

metal rim section; electrical contact means on said sinuous strip of spring metal; said device being responsive to a given displacement of the surface of said rim portion of said spring metal section to effect a greater displacement of said central portion of said strip and to produce amplified movement of said contact in the same direction as the displacement of the spring metal rim section.

According to another aspect, the invention provides a motion transmitting and amplifying device for effecting electrical contact responsive to a deforming force applied to one surface thereof comprising: a spring metal disc having a substantially continuous circular rim portion and a central motion translating and amplifying portion; said central motion translation and amplifying portion configured to resemble the letter W including a pair of driver loops having generally parallel legs and an output loop having generally parallel legs; one leg of each of said driver loops being connected to a different leg of said output loop; electrical contact means on said output loop; and means connecting the ends of said driver loops opposite their connections with said output loop confining the outer ends of said driver loops against outward movement with respect to each other; said connecting means comprising the substantially continuous circular rim portion; the legs of said output loop being locally stressed by deformation so that the legs of said output loop are closer together at their connection

3b

with said driver loops than at the closed end of said output loop; whereby deforming force applied to one face of said disc produces amplified movement of said contact on said output loop in the same direction as the applied force.

According to yet another aspect, the invention provides a fluid pressure actuated electrical switch comprising: a switch casing; a switch base mounted in said casing; a motion transmitting and amplifying device carried by said switch base including: a spring metal strip configured to resemble the letter W and including a pair of driver loops having parallel legs and an output loop having parallel legs; one leg of each of said driver loops being connected to a different leg of said output loop, and means connecting the ends of the driver loops opposite their connections with the output loop, against outward movement with respect to each other; the legs of the output loop being stressed by deformation while so connected so that the space between the legs of the output loop increases from their connection with the driver loops to the opposite end of said space, and responsive to the application of operating force to said driver legs said spring metal strip deforms to an overcenter position; a first electrical contact carried by said switch base; a second electrical contact carried by said output loop engageable with said first contact; means for admitting fluid pressure to the interior of said casing; and means responsive to the admission of fluid pressure to the interior of

3c

said casing for applying operating force to said driver legs actuating said motion transmitting and amplifying device to close said contacts, after movement by a greater distance than the movement of said fluid pressure responsive means.

According to still another aspect, the invention provides a method of fabricating a motion transmitting and amplifying device including the steps of: fabricating a strip of spring metal configured to resemble the letter W surrounded by a ring which comprises a pair of driver loops having parallel legs and an output loop having parallel legs; one leg of each of said driver loops being connected to a different leg of said output loop, said ring connecting the ends of said driver loops opposite their connections with the output loop for constraining said ends against outward movement with respect to each other; and then stressing the area of connection between the legs of the output loops and the driver loops to alter the spacing between the legs of said output loop so that such space decreases from the connection of said legs with the driver loops to the output loop end of said legs.

According to a final aspect, the invention provides as a preform of a motion of a motion transmitting and amplifying device, a spring metal article comprising; a strip configured to resemble the letter W including; a central loop having parallel legs; and side loops having parallel legs; one leg of each of said side loops being connected to a different leg of said

3d

central loop; and an integral circular joining ring constraining the ends of said side loops opposite their connections with said central loop against outward movement with respect to each other.

Description of the Drawings.

Figure 1 is a view in plan of a motion transmitting and amplifying device embodying the present invention.

Figure 1A is a fragmentary view of a portion of the central output loop showing its stressed configuration in dotted lines.

Figure 2a and 2b are views in section of the device of Figure 1 illustrating the two positions which the "U" shaped portion may assume in operation.

Figure 3 is a view in plan of a modified form of the motion transmitting and amplifying device of the present invention.

Figure 4 is a view in section of the device of Figure 3 taken on the line 4--4 of Figure 3.

Figure 5 is a view in plan of a second modified embodiment of a motion transmitting and amplifying device embodying the present invention.

Figure 5A is a fragmentary view in side elevation of an assembly employing a modification employing a device made from a flat sheet and employing separate restoration springs.

3e

Figure 6 is a sectional view in side elevation of a pressure sensitive switch embodying the motion transmitting and amplifying device of the present invention.

Figure 7 is a fragmentary sectional view in side elevation of the switch of Figure 6

showing the actuated position of the motion transmitting and amplifying device.

Figure 8 is a view in horizontal section of the switch of Figure 6 taken on the line 8--8 of Figure 6.

Description of the Preferred Embodiments.

As shown in the accompanying drawings, one form of the motion transmitting and amplifying device of the present invention comprises thin strip 10 of spring metal the shape of which approximates that of the letter "W" which includes a central output loop 11 in the shape of an inverted letter "U", having a closed free end 12 and generally parallel legs 13 and 14. Each of the legs 13 and 14 is integrally connected at one end thereof to one of a pair of driver loops 16 and 17 each of which has an oppositely extending end 18 and 19.

Means are provided for constraining the oppositely extending ends 18 and 19 of driver loops 16 and 17 against outward movement with respect to each other. This means comprises a frustum 20 of thin spring metal functionally integral with the ends 18 and 19, respectively, of driver loops 16 and 17. Frustum 20 together with the U shaped output loop 11, driver loops 16 and 17 and U member may conveniently be fabricated as a stamping from a conventional disc or "Belleville" spring.

After completion of the fabrication of the assembly just described, the legs 13 and 14 of the output loop 11 are stressed so as to bring the ends of the legs connected to the driver loops 16 and 17 closer together as shown in dotted lines in Figure 1A, than the opposite ends of those legs. This may be accomplished either by increasing the spacing between the legs at the closed end 12 of the loop 11, as by peening the metal along the line 21, by decreasing the spacing between the legs at the open end of loop 11, as by peening

the metal of one or both of the driver loops 16, 17 along the lines 22, 23 or otherwise widening one or more of the loops 11, 16 and 17.

The movement transmitting and amplifying device of the present invention fabricated as described above initially has the configuration shown in section in Figure 2a, but when pressure of a predetermined magnitude is applied to some portion of the upper surface of the frustum 20, for example, adjacent its connection with the driver loops 16, 17, the device will assume the configuration shown in Figure 2b; the magnitude of movement of the free end 12 of output loop 11 being approximately ten times that of the portion of the device to which pressure was applied. Upon release of the pressure applied to the upper surface of the frustum 20, the resilience of the frustum will cause restoration of the device to the configuration shown in Figure 2a.

If, however, a flat sheet of spring metal is substituted for a disc spring in fabricating the device of the present invention as described above, the device will operate in the same way except that it will not restore to its original configuration upon release of the activating pressure. Restoration of a device so constructed responsive to actuation forces F applied to the embodiment of Figs. 5 and 5A must be accomplished by pressure applied in a direction opposite to the activating pressure.

An example of such return force applying means is illustrated structurally in Fig. 5 and operationally as return springs 25 and 26 in Figure 5A. In this modification of the device of the present invention, the outer edge of a flat sheet of spring metal 10a configuration as shown in Figure 5, is urged into the position shown in Figure 5A by compression springs 25 and 26 engaging opposite points on its periphery. The spring metal 20 is supported at two discrete points or a full or partial annular fulcrum intermediate its

edge and the "W" portion of opposite fulcrum members 29 and 39.

In this position, the free end 12 of its output loop engages an electrical contact 27 carried by the base. However, when downward pressure overcomes springs 25 and 26, the device snaps over to the position shown in dotted lines in Figure 5A, so that the free end 12 engages a contact 28.

Also, if the frustum 21 is segmented as shown in Figure 5, the output loop 11 will not automatically restore to the position shown in Figure 2a upon release of pressure applied to the frustum 20, but will remain in position shown in Figure 2b until pressure is applied to the opposite side of the frustum 20. Alternatively, the segment may be supported by opposing springs means such as the springs 25 and 26 of Figure 5A to effect restoration to its former position and provide an elastic load resisting element.

It is not necessary that the strip 10 be formed integrally with the frustum 20, as shown in Figures 1, 2a, 2b and 5, but only that they be connected as shown in Figures 3 and 4 as by strips 30 of dielectric material embracing the ends of the strip 10 and the inner edge of the central opening of frustum 20 and connected together by rivets 31.

While the motion transmitting and amplifying device of the present invention is useful in any of a wide variety of environments in which a small sensed displacement is required to produce a control signal as by opening or closing an electrical circuit or valving a pneumatic control, Figures 6, 7 and 8 of the accompanying drawings show it as embodied in a pneumatic sensing electrical switch.

As shown in Figure 6, the switch comprises a cylindrical internally threaded casing 50 into which there is threaded a cylindrical switch base 51 carrying adjacent its upper end a motion transmitting and amplifying device of the construction shown in Figures 1-4, 5 or

5A the outer edge of which is seated on a wire loop 52 retained in the base 51. A block of insulating material 53 carried by the base 51 supports an upper contact 54 which projects through the central opening of the frustum 20 and overlies the free end of the output loop 11.

Also supported by the block 53 is a lower contact 55 which underlies the free end of the output loop 11 and, as shown in Figure 7, is engageable thereby in the displaced position of the output loop 11. The wire loop 52 terminates in a conductor 56 which is electrically connected to a lead 57. Separate conductors 57, 58, and 59 provide electrical connections between contacts 54 and 55 and exterior contacts 61, 62 and 63 carried by an extension 64 of casing 50.

Means are provided for causing the output loop 11 to move from the position in which it is shown in Figure 6 to the position in which it is shown in Figure 7. This means comprises a cap 65 secured as by welding to the upper end of the casing 50 and provided with a port 66 through which fluid under pressure may be admitted to a cavity 67 in the cap 65 via passages 68 and 69. A diaphragm 70 divides the cavity 67 into upper and lower portions, and contained in the lower portion is a pressure plate 71 engaging the underside of the diaphragm 70.

Centrally connected to the pressure plate 71 and slideably mounted in the lower portion of the cap 65 is an actuator 72 which carries at its lower end a cup shaped register 75 the free lower edges of which engage a washer 76 of insulating material overlying frustum 20 to electrically insulate it from the register 75.

Downward pressure is exerted on a diaphragm 70 and pressure plate 71 by a spring 80 the compression of which is adjustable by means of a hollow pin 81 threaded into the

port 66 and exerting pressure against a cup 82 bearing on the diaphragm 70 centrally of the pressure plate 71.

In operation, the pressure exerted by the spring 80 may be adjusted up to the point of almost overcoming the resistance of the frustum 20 in the position in which it is shown in Figure 6. This provides a range of adjustment of pneumatic pressures needed to be introduced through the port 66 to be sufficient to depress the diaphragm 70 and pressure plate 71 causing the output loop 11 to move from engagement with the upper contact 54 and into engagement with the lower contact 55.

It is to be understood that the present invention is not limited to the details of the illustrative embodiments particularly described herein, but that various modifications may be made without departing from the invention as defined in the claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A fluid pressure actuated electrical switch
comprising:

a switch casing;

a switch base mounted in said casing;

a motion transmitting and amplifying device carried
by said switch base including:

a spring metal strip configured to resemble the
letter W and including

a pair of driver loops having parallel legs and an
output loop having parallel legs; one leg of each of said
driver loops being connected to a different leg of said output
loop, and

means connecting the ends of the driver loops
opposite their connections with the output loop, against
outward movement with respect to each other;

the legs of the output loop being stressed by
deformation while so connected so that the space between the
legs of the output loop increases from their connection with
the driver loops to the opposite end of said space, and
responsive to the application of operating force to said
driver legs said spring metal strip deforms to an overcenter
position;

a first electrical contact carried by said switch
base;

a second electrical contact carried by said output

loop engageable with said first contact;

means for admitting fluid pressure to the interior of said casing; and

means responsive to the admission of fluid pressure to the interior of said casing for applying operating force to said driver legs actuating said motion transmitting and amplifying device to close said contacts, after movement by a greater distance than the movement of said fluid pressure responsive means.

2. A motion transmitting and amplifying device for effecting electrical contact responsive to a deforming force applied to one surface thereof comprising:

a spring metal disc having a substantially continuous circular rim portion and a central motion translating and amplifying portion;

said central motion translation and amplifying portion configured to resemble the letter W including a pair of driver loops having generally parallel legs and an output loop having generally parallel legs;

one leg of each of said driver loops being connected to a different leg of said output loop;

electrical contact means on said output loop;

and means connecting the ends of said driver loops opposite their connections with said output loop confining the outer ends of said driver loops against outward movement with respect to each other;

said connecting means comprising the substantially

continuous circular rim portion;

the legs of said output loop being locally stressed by deformation so that the legs of said output loop are closer together at their connection with said driver loops than at the closed end of said output loop;

whereby deforming force applied to one face of said disc produces amplified movement of said contact on said output loop in the same direction as the applied force.

3. A motion transmitting and amplifying device according to claim 2 fabricated from a single sheet of spring metal.

4. A motion transmitting and amplifying device according to claim 2 fabricated from a disc spring.

5. A motion transmitting and amplifying device according to claim 2 in which said driver loops are electrically insulated from the means connecting the ends thereof.

6. A motion transmitting and amplifying device according to claim 2 in which the means connecting the ends of said driver loops encircles both the driver loops and the output loop.

7. A motion transmitting and amplifying device according to claim 2 in which the means connecting the ends of

said driver loops partially encircles the driver loops and the output loop.

8. A motion transmitting and amplifying device for effecting electrical contact therewith responsive to deforming force applied to one surface thereof comprising:

a thin convex disc of spring metal having a continuous rim section and including an integral central section, shaped, in the absence of deforming force as a portion of the convex disc; and

said integral central section constituting a sinuous strip of spring metal connected at its ends with opposite portions of said spring metal continuous circular rims section;

said sinuous strip having a central portion disposed generally centrally of said spring metal rim section;

electrical contact means on said sinuous strip of spring metal;

said device being responsive to a given displacement of the surface of said rim portion of said spring metal section to effect a greater displacement of said central portion of said strip and to produce amplified movement of said contact in the same direction as the displacement of the spring metal rim section.

9. A motion transmitting and amplifying device according to claim 8 in which said thin section of spring metal is in the form of a full circle.

10. A motion transmitting and amplifying device according to claim 9 in which said sinuous strip of spring metal is configured to resemble the letter W.

11. A motion transmitting and amplifying device according to claim 9 in which said sinuous strip of spring metal is configured to resemble the letter S.

12. A motion transmitting and amplifying device according to claim 8 in which said thin section of spring metal is in the form of less than a full circle.

13. A motion transmitting and amplifying device according to claim 12 in which said sinuous strip of spring metal is configured to resemble the letter W.

14. A motion transmitting and amplifying device according to claim 12 in which said sinuous strip of spring metal is configured to resemble the letter S.

15. A method of fabricating a motion transmitting and amplifying device including the steps of:

fabricating a strip of spring metal configured to resemble the letter W surrounded by a ring which comprises a pair of driver loops having parallel legs and an output loop having parallel legs;

one leg of each of said driver loops being connected to a different leg of said output loop,

said ring connecting the ends of said driver loops opposite their connections with the output loop for constraining said ends against outward movement with respect to each other; and then

stressing the area of connection between the legs of the output loops and the driver loops to alter the spacing between the legs of said output loop so that such space decreases from the connection of said legs with the driver loops to the output loop end of said legs.

16. A method of fabricating a motion transmitting and amplifying device according to claim 15 in which said strip and said connecting means are fabricated from a single sheet of spring metal.

17. A method of fabricating a motion transmitting and amplifying device according to claim 15 in which said strip and said connecting means are fabricated from a disc spring.

18. As a preform of a motion transmitting and amplifying device,

a spring metal article comprising;

a strip configured to resemble the letter W

including;

a central loop having parallel legs; and

side loops having parallel legs;

one leg of each of said side loops being connected to a different leg of said central loop; and

an integral circular joining ring constraining the ends of said side loops opposite their connections with said central loop against outward movement with respect to each other.

19. A preform of a motion transmitting and amplifying device according to claim 18 in which said preform is fabricated from a single sheet of spring metal.

20. A preform of a motion transmitting and amplifying device according to claim 18 in which the preform is fabricated from a disc spring.

SMART & BIGGAR
OTTAWA, CANADA
PATENT AGENTS

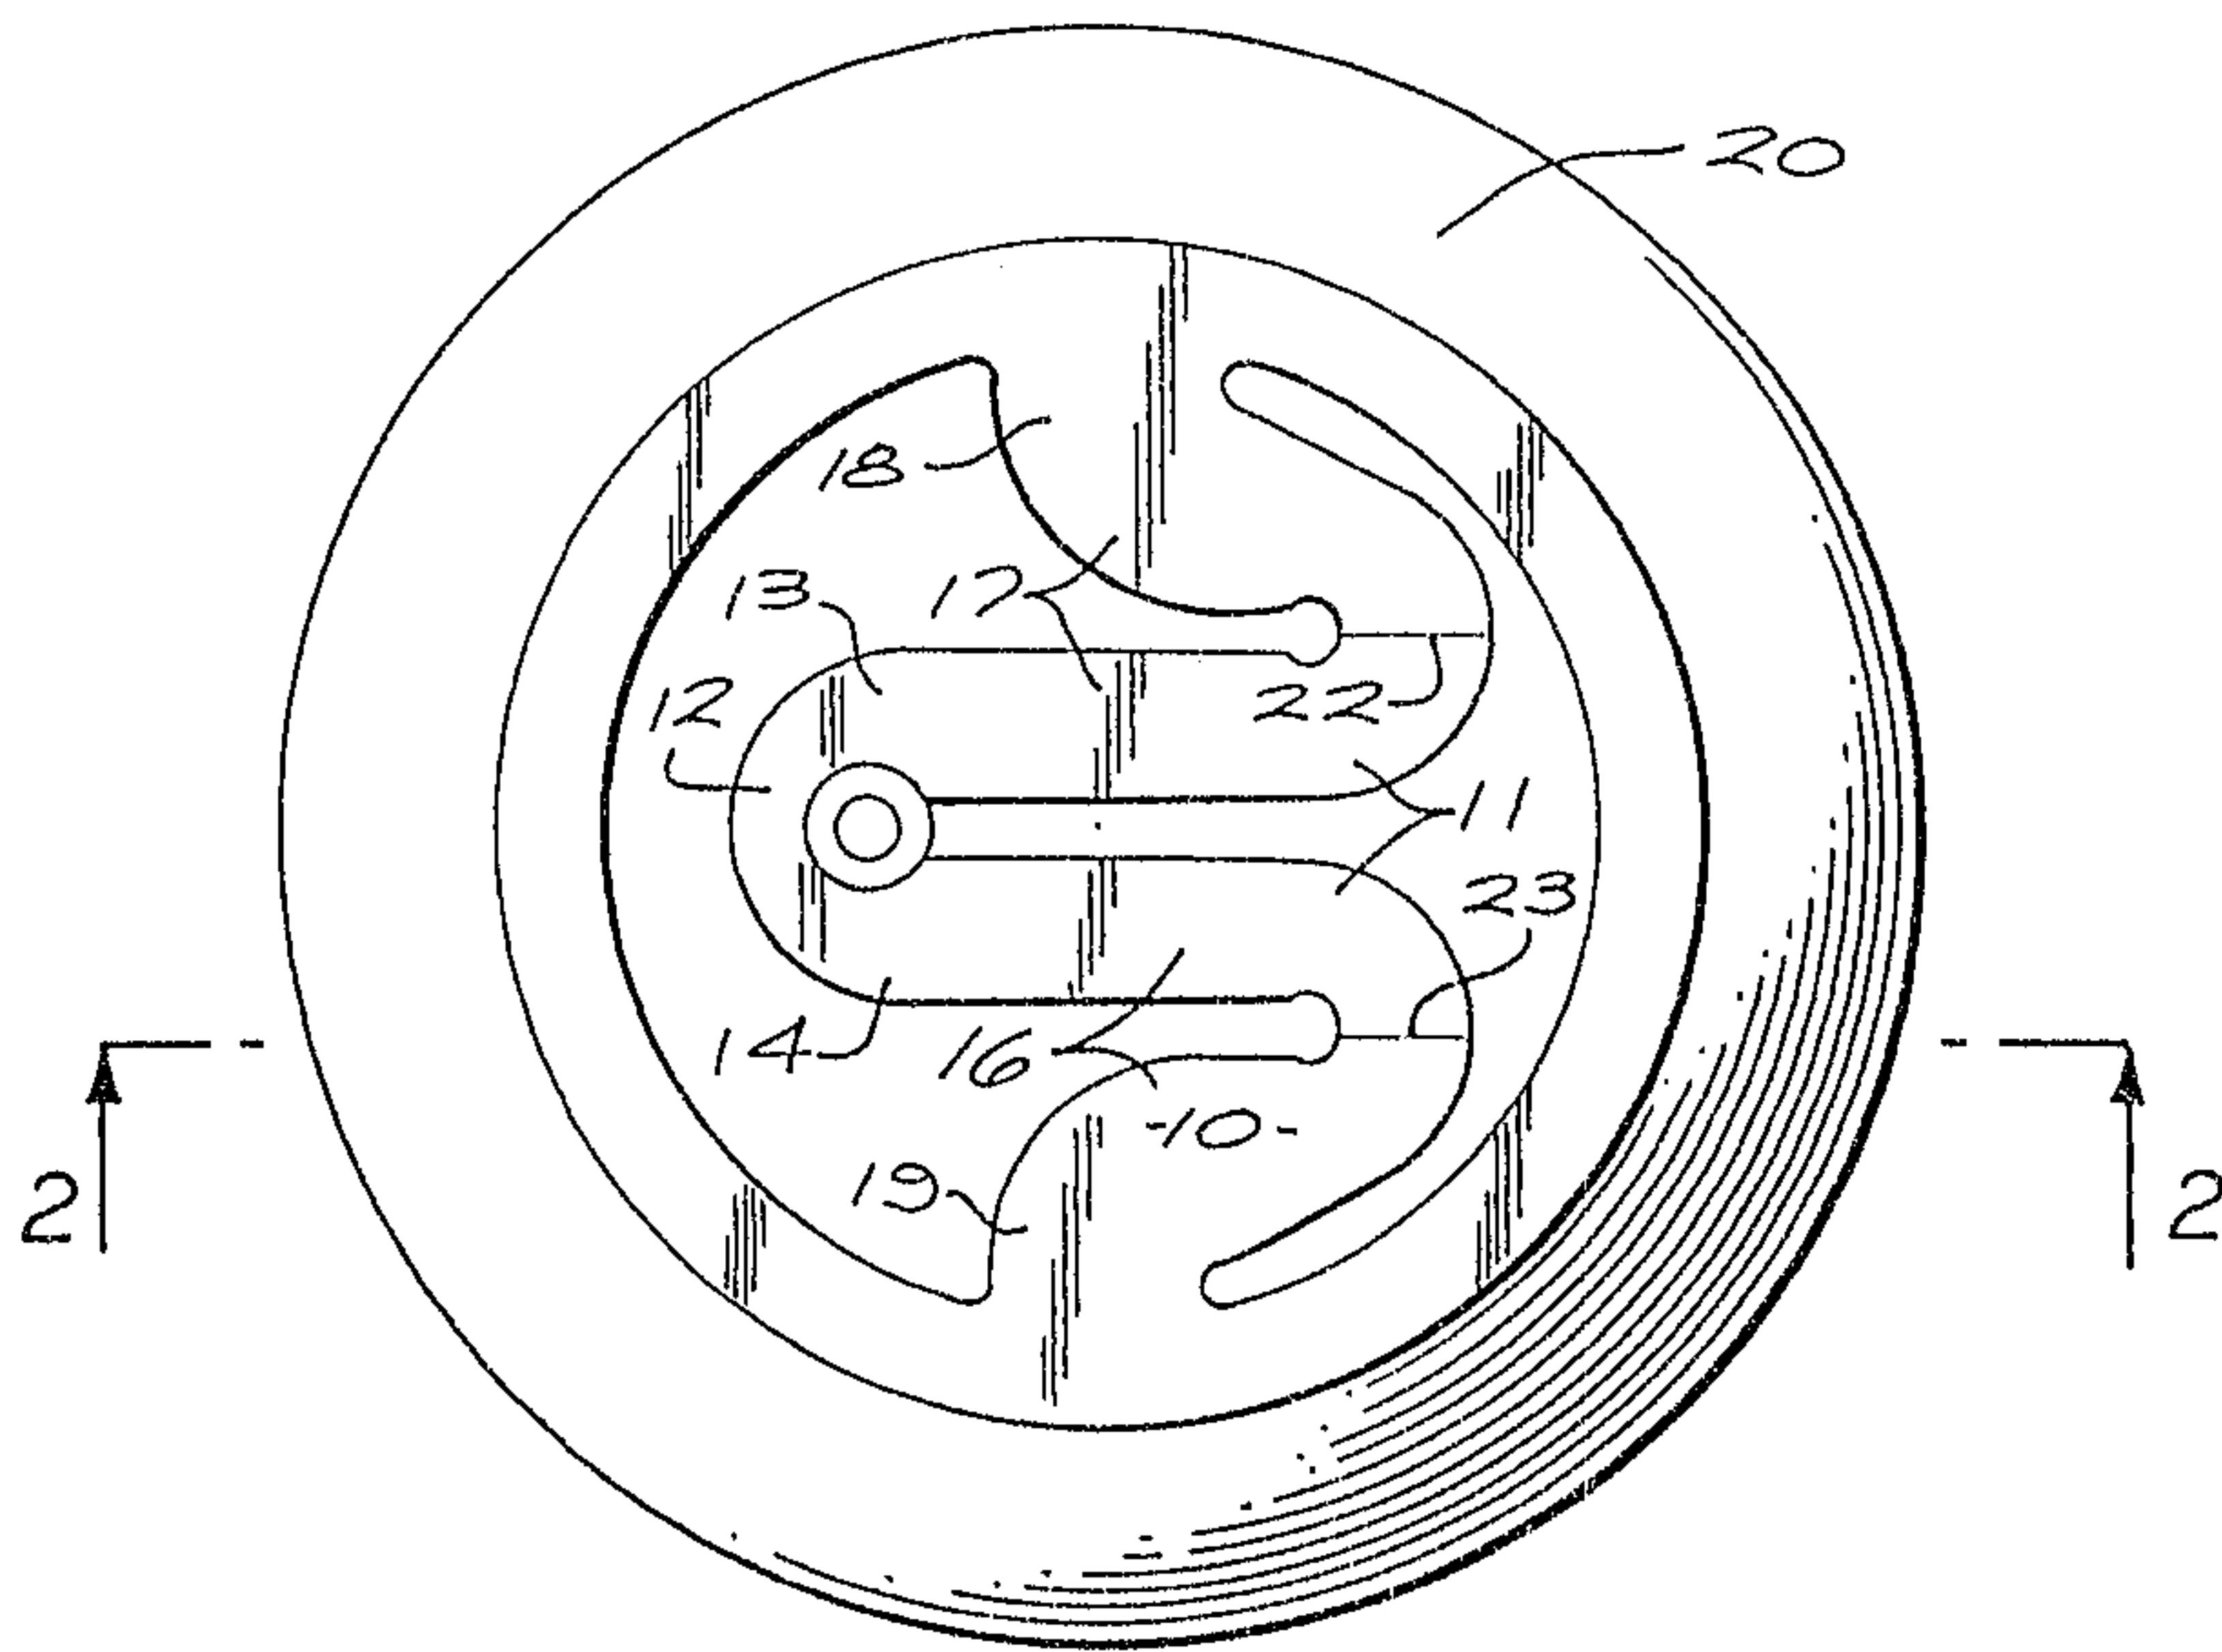


FIG. 1

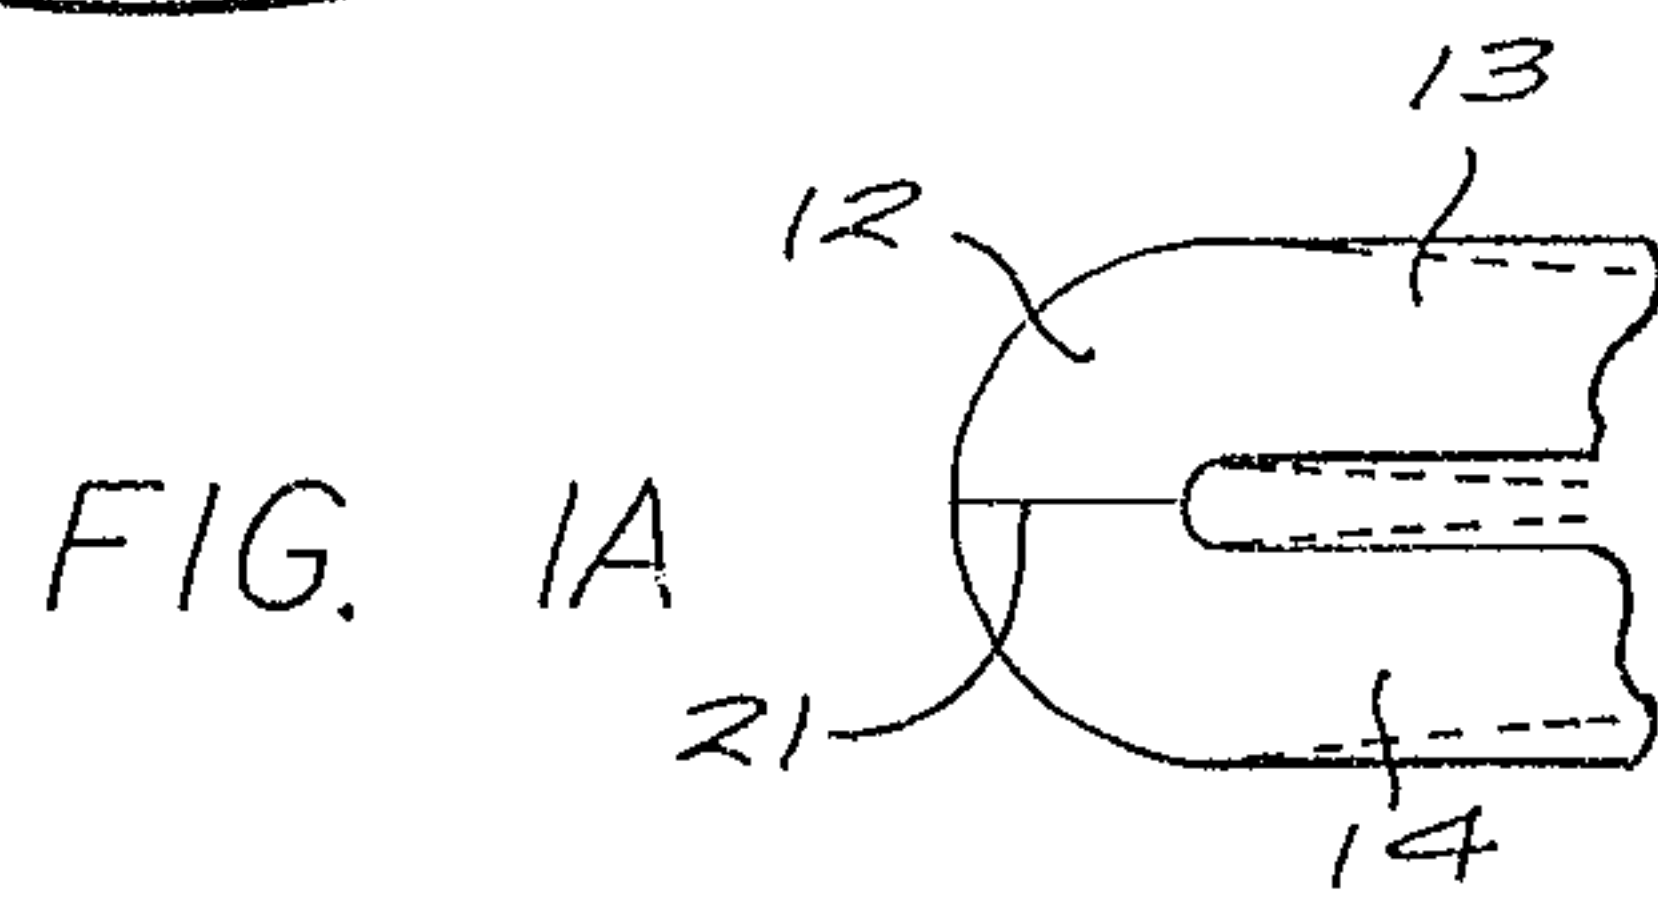


FIG. 1A

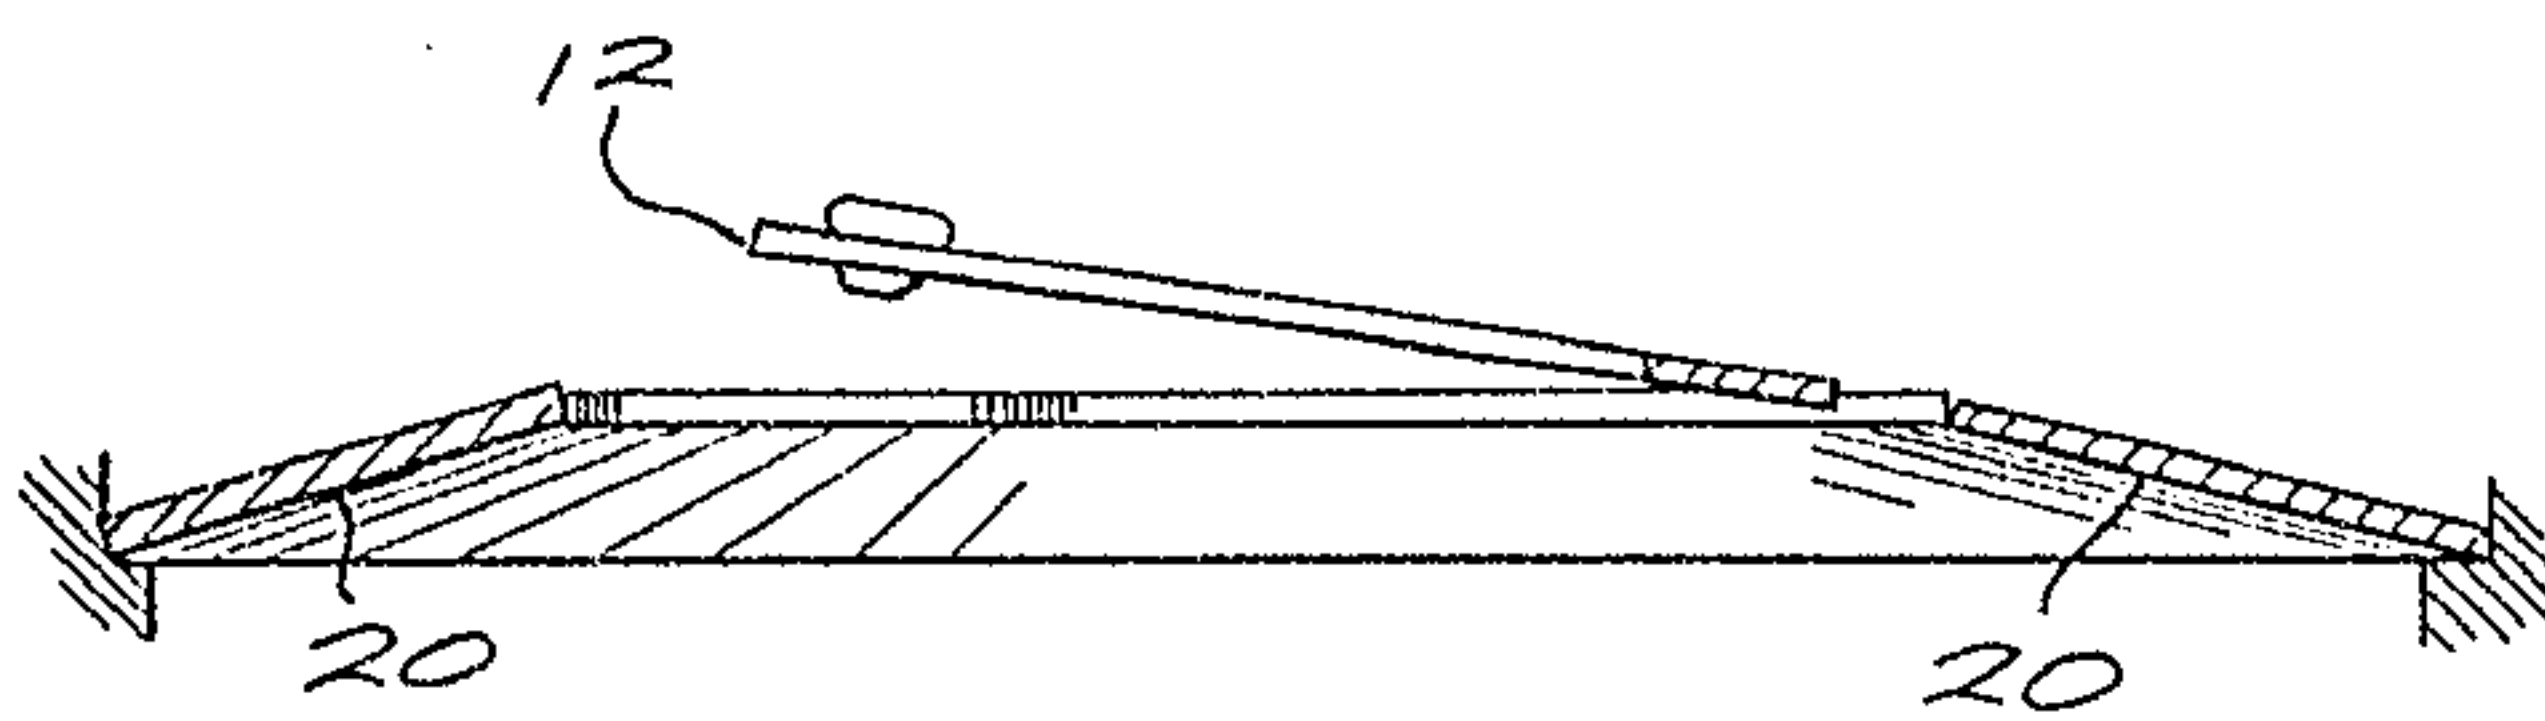


FIG. 2a

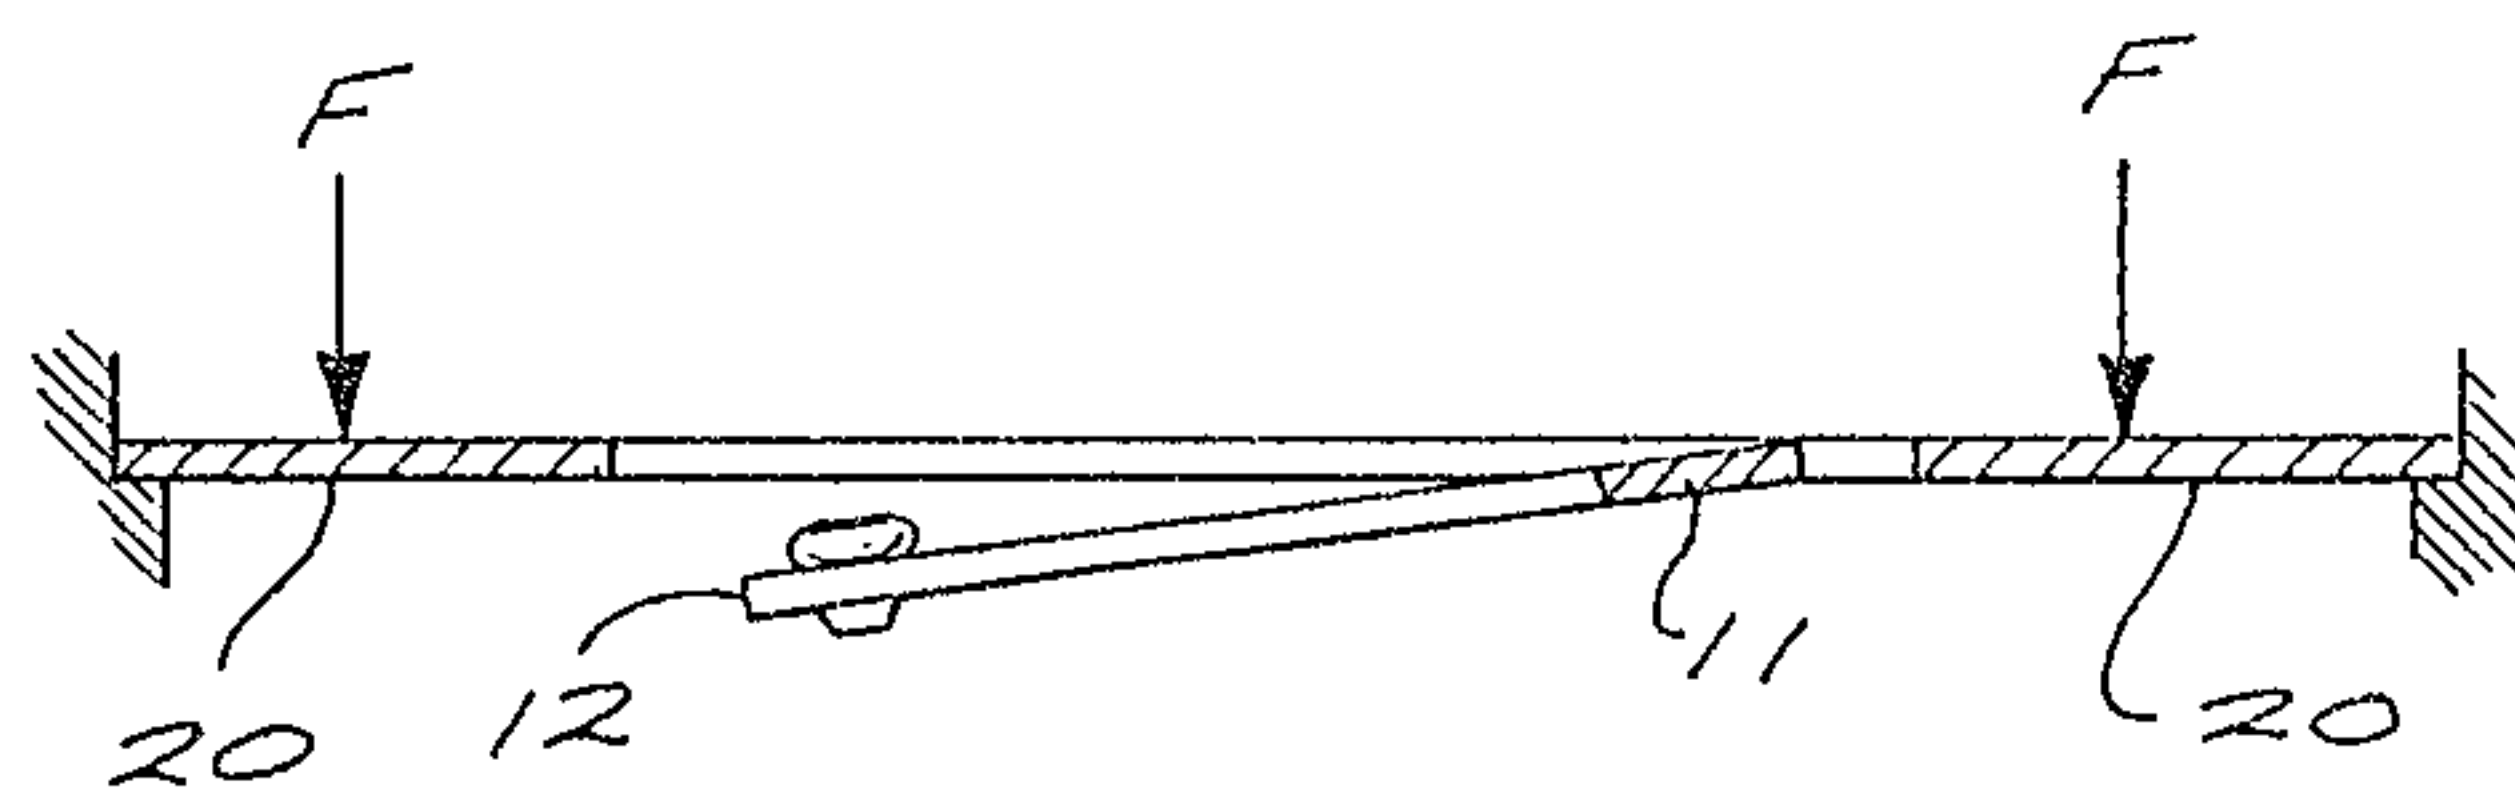


FIG. 2b

Handwritten signature

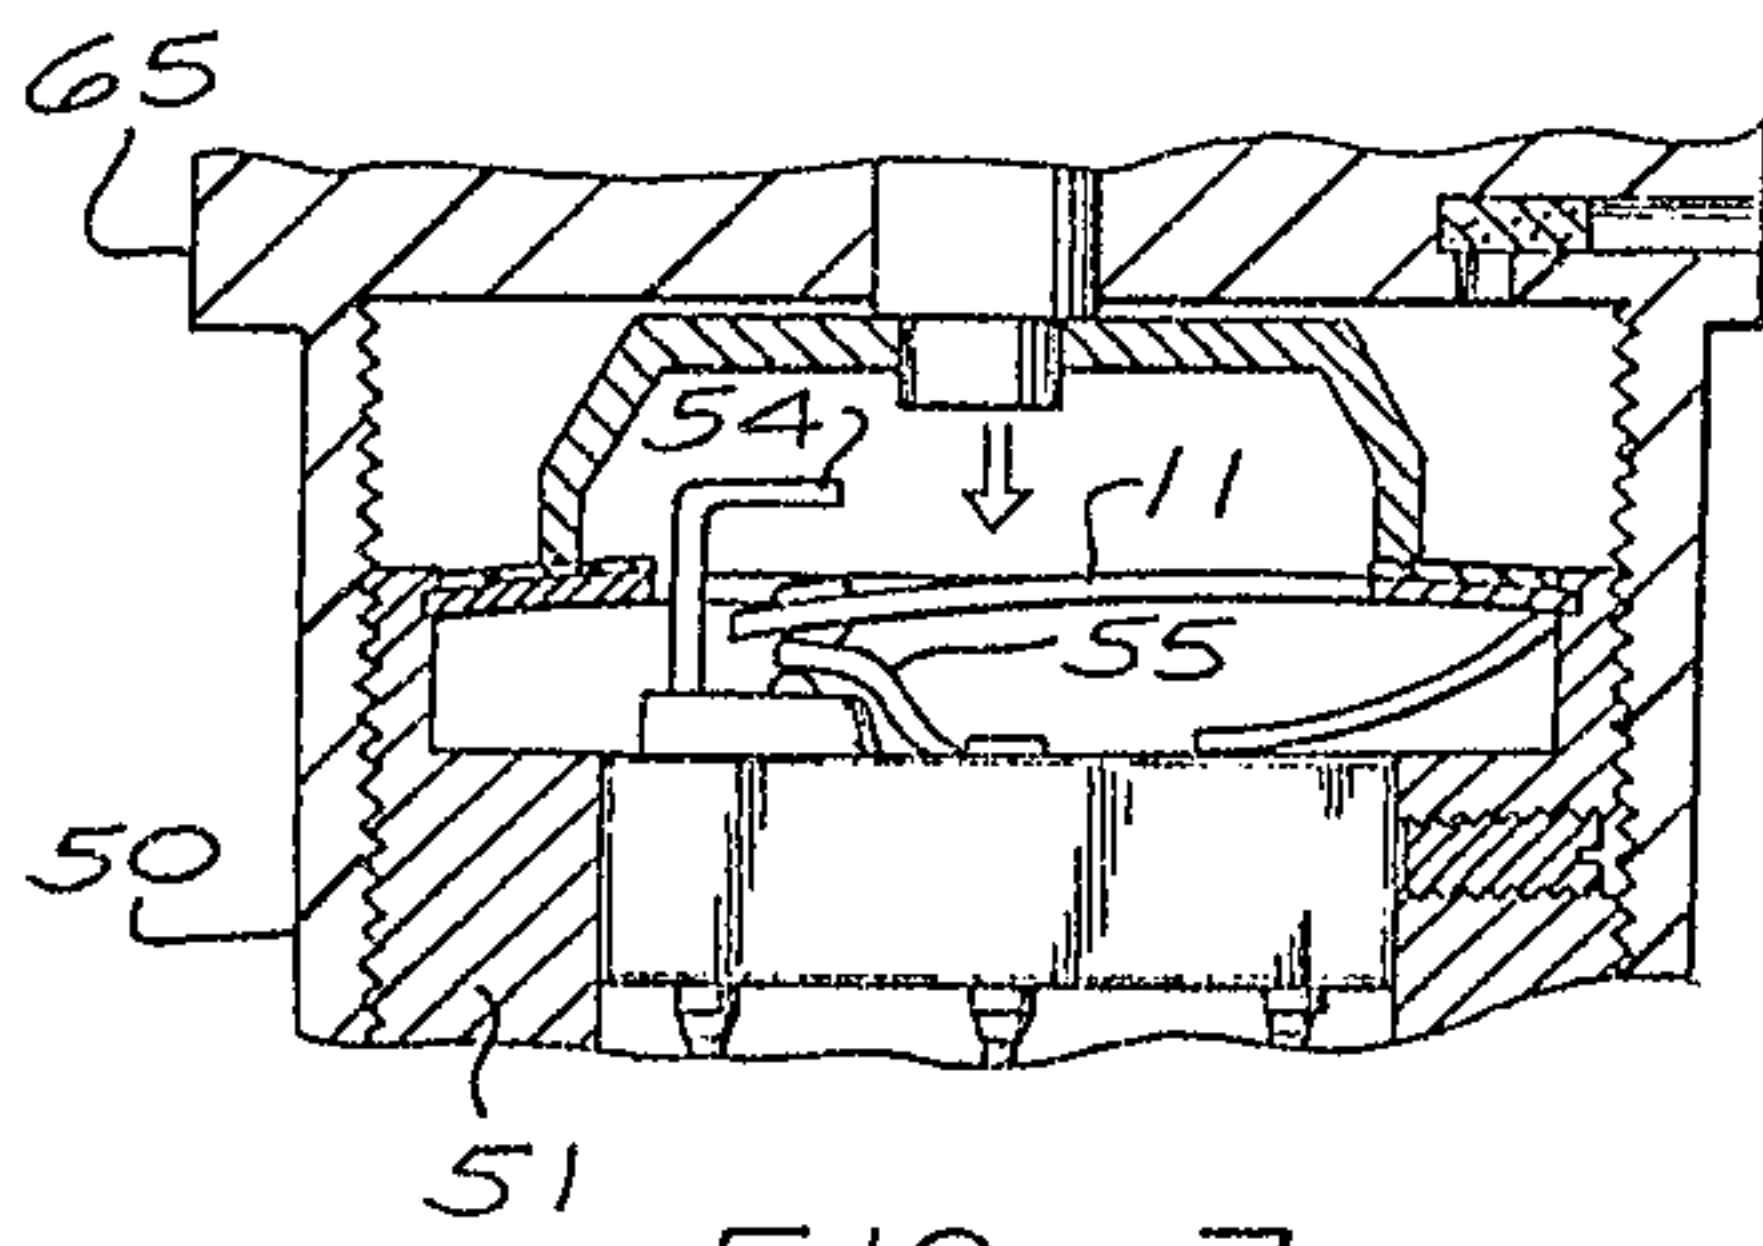


FIG. 7

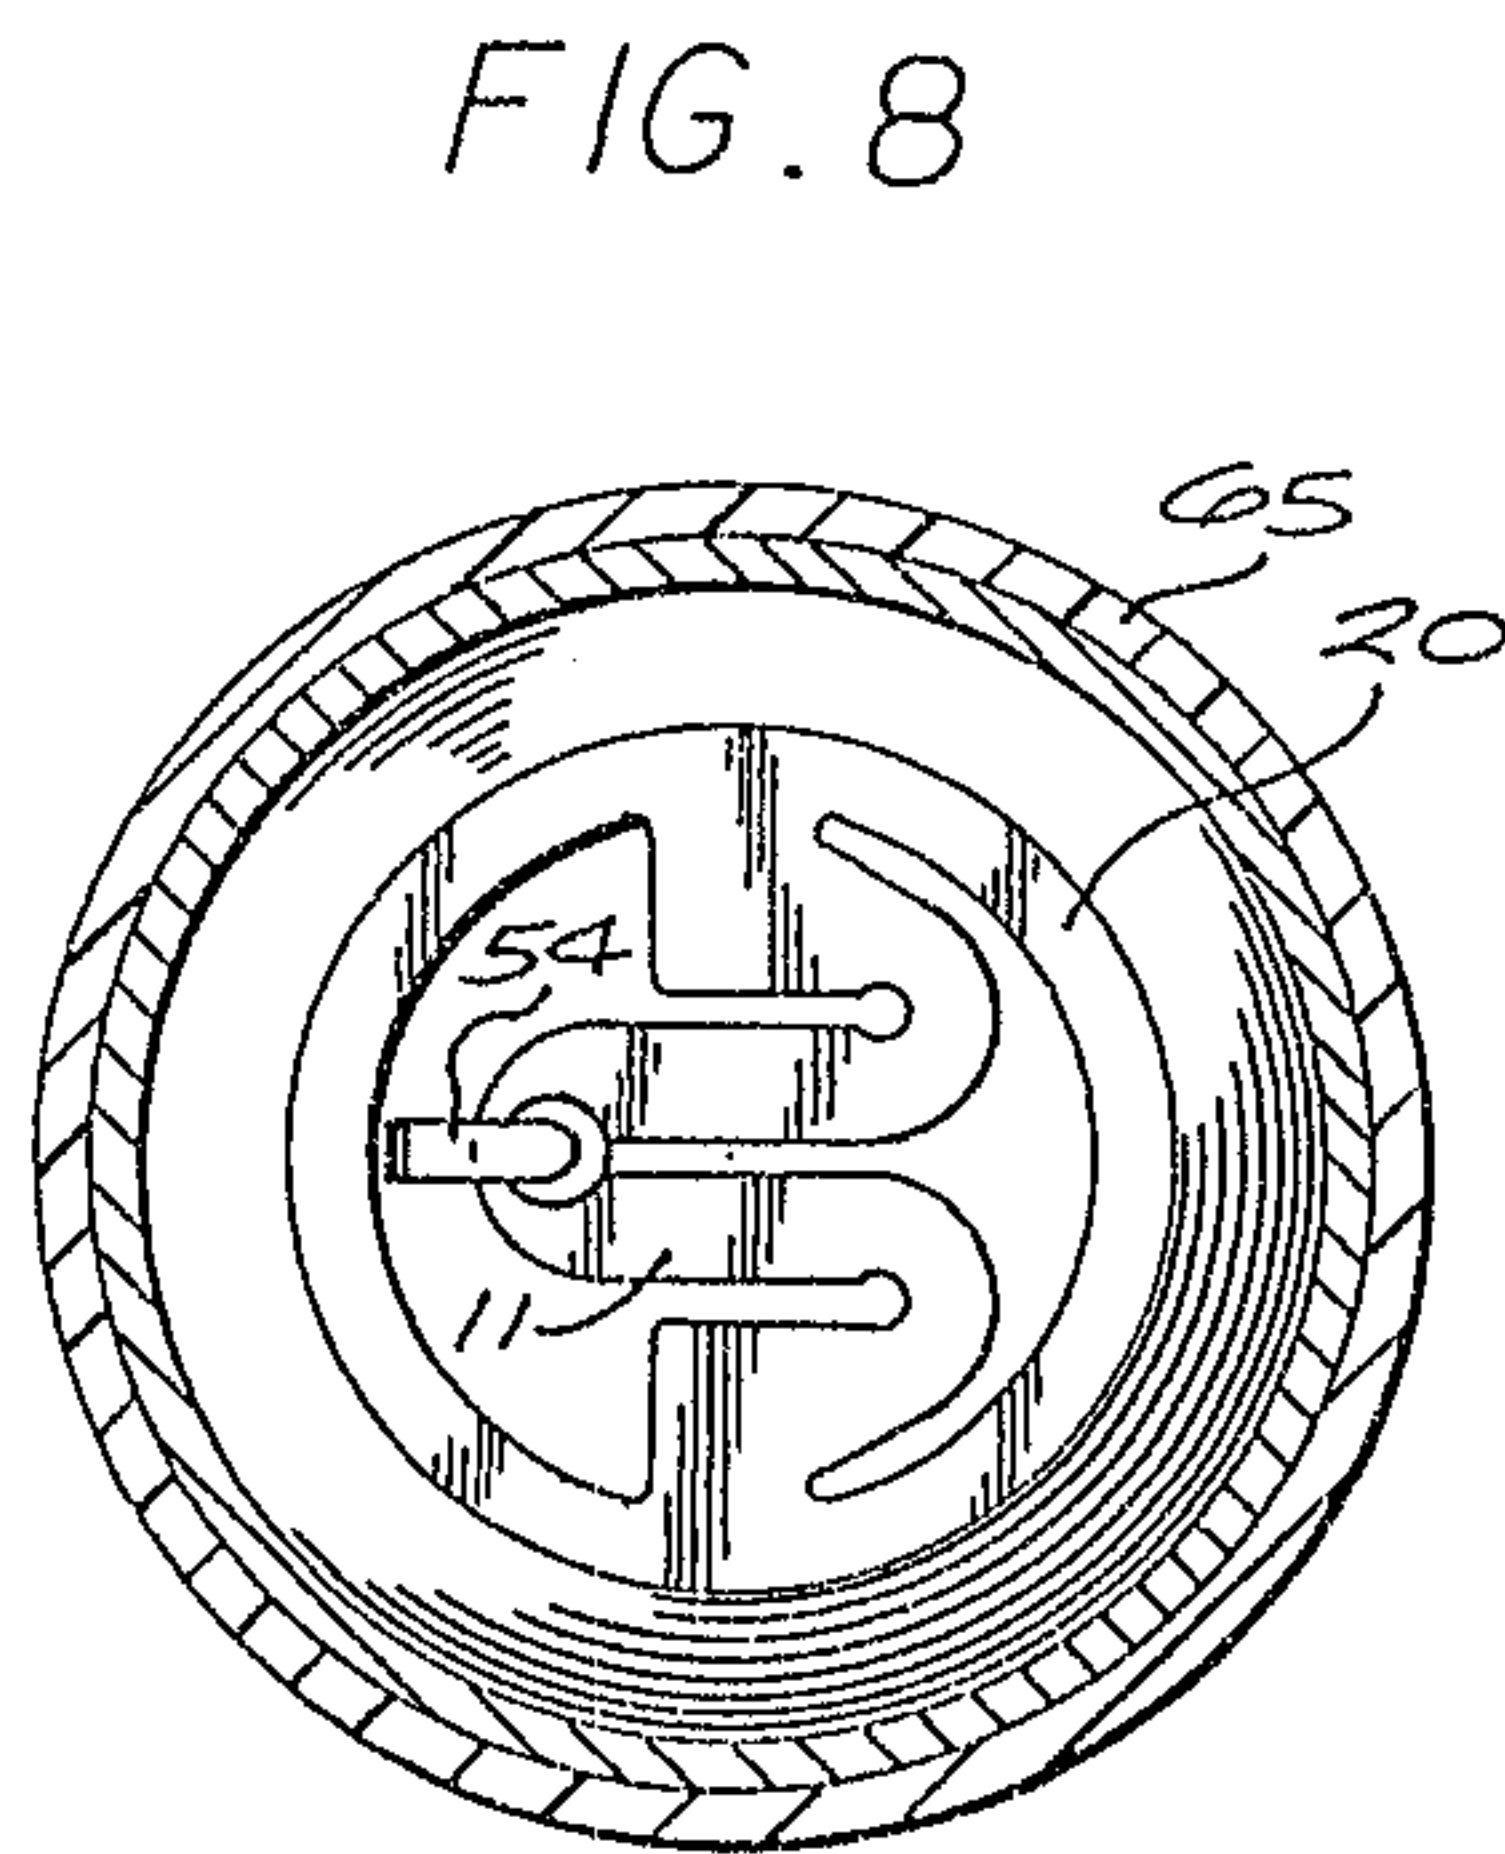


FIG. 8

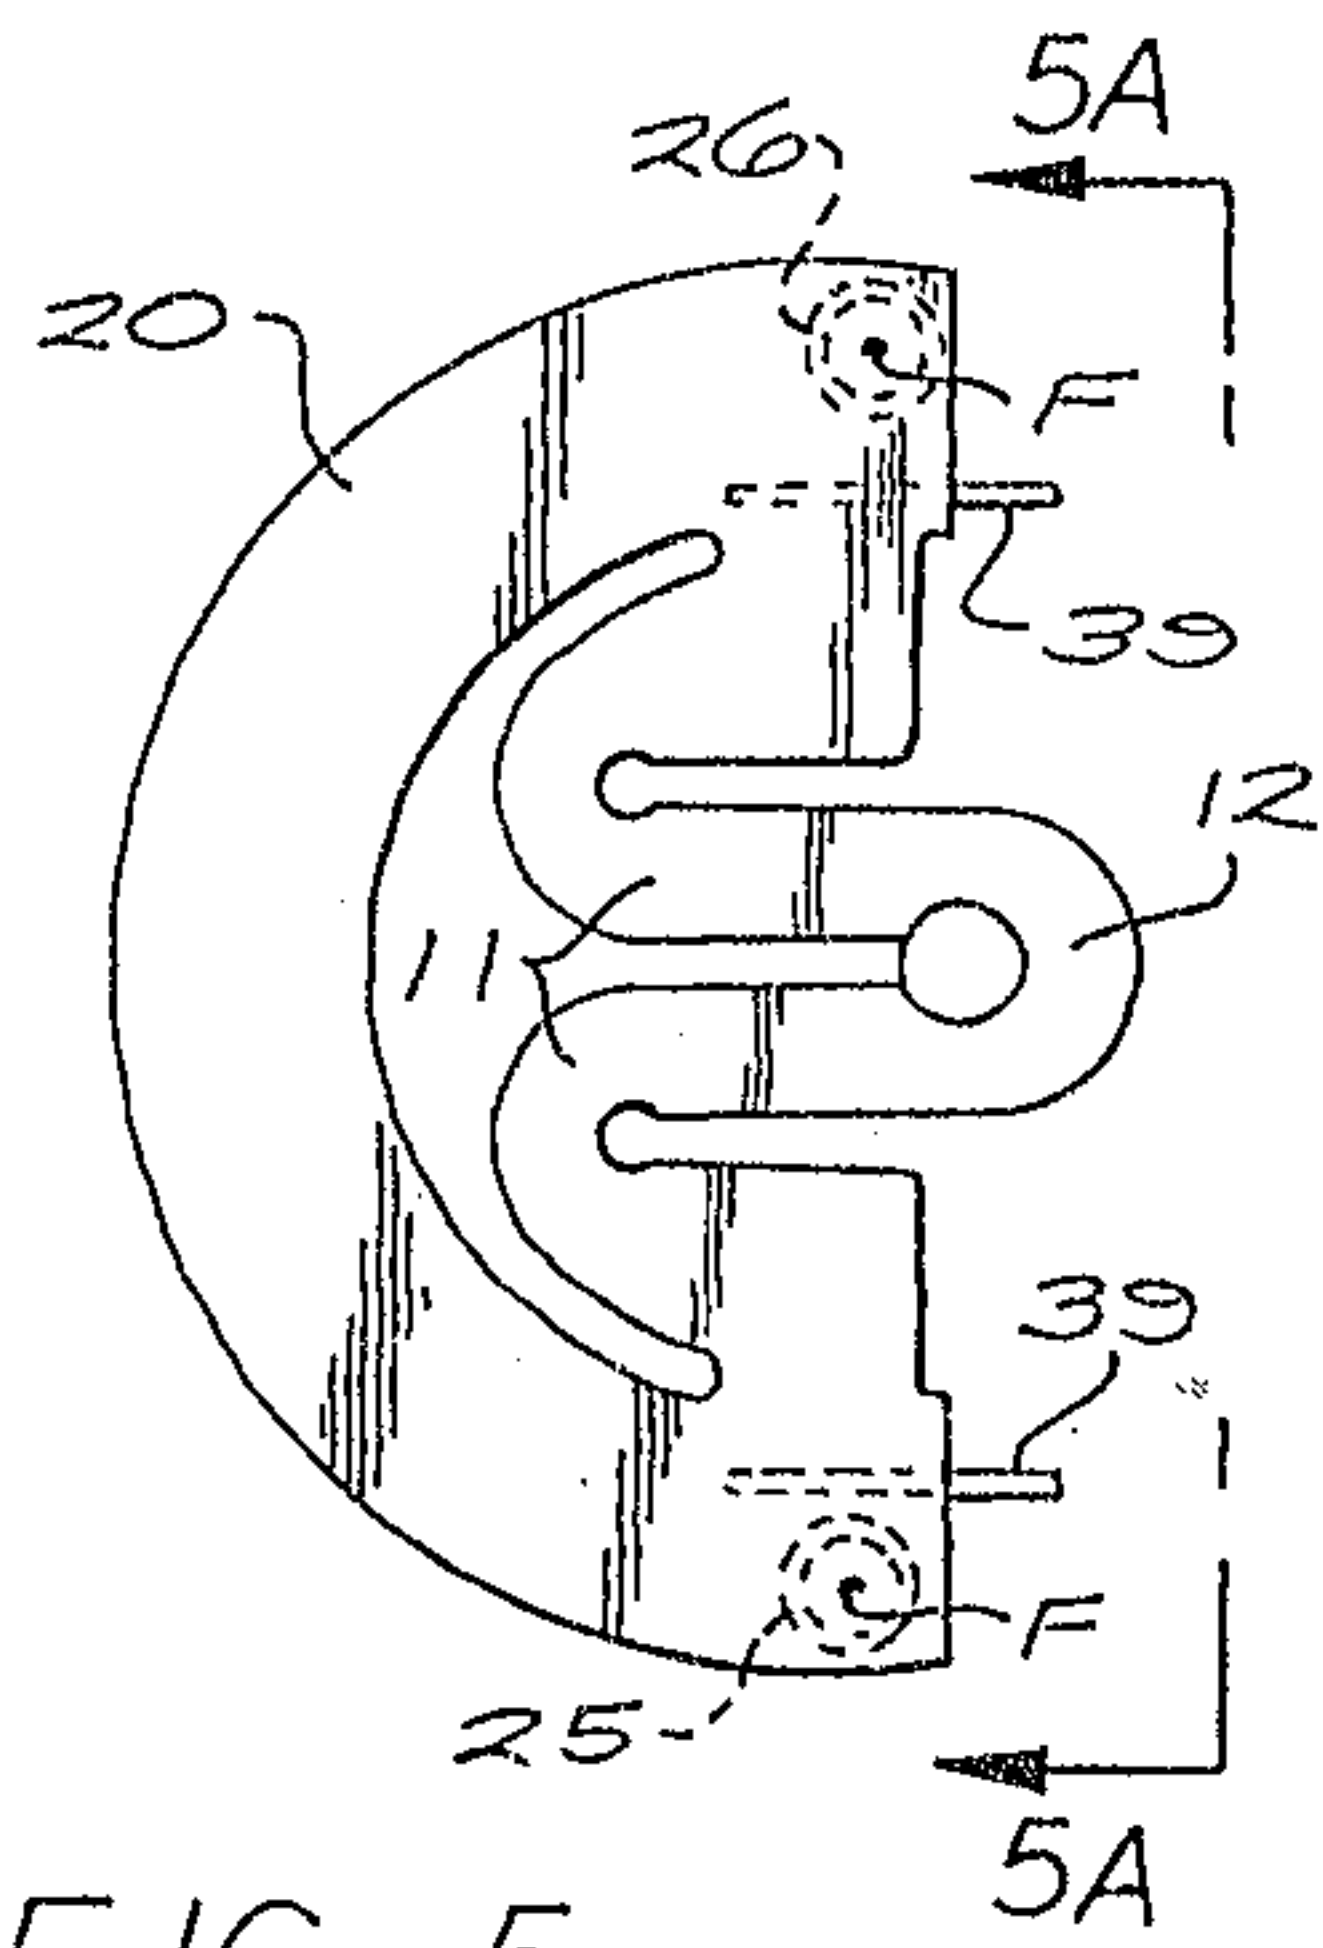


FIG. 5

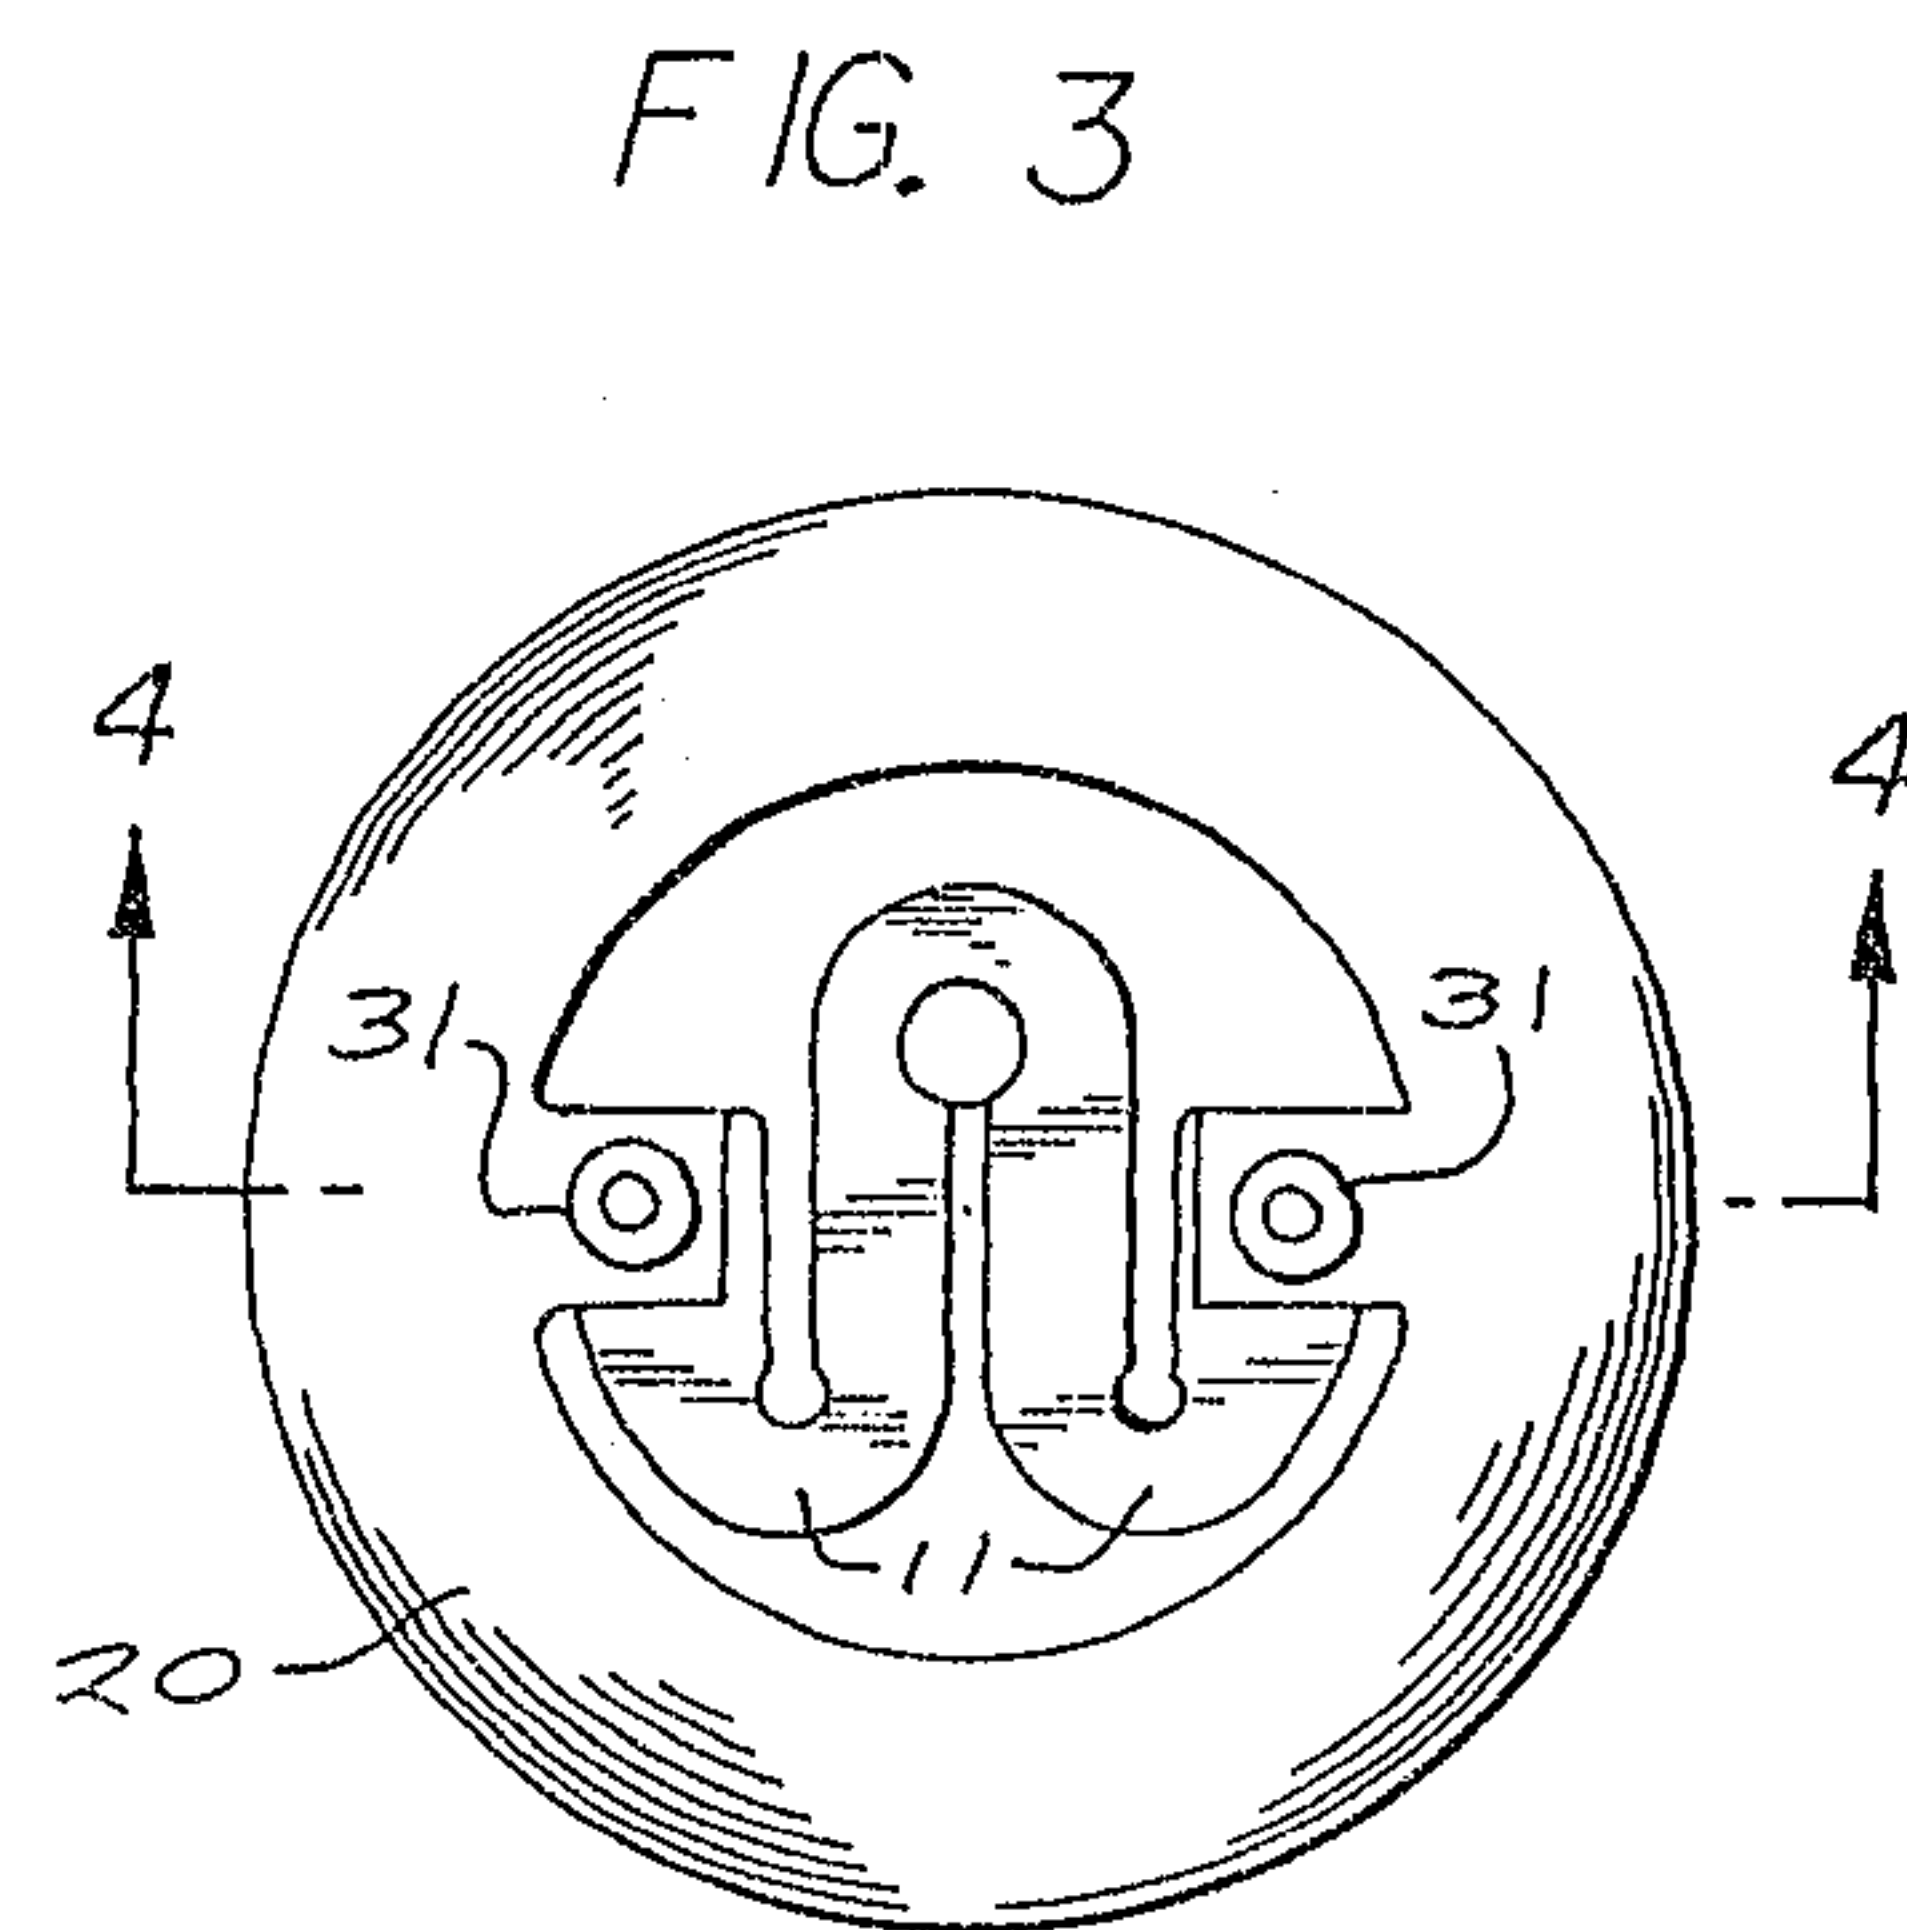


FIG. 3

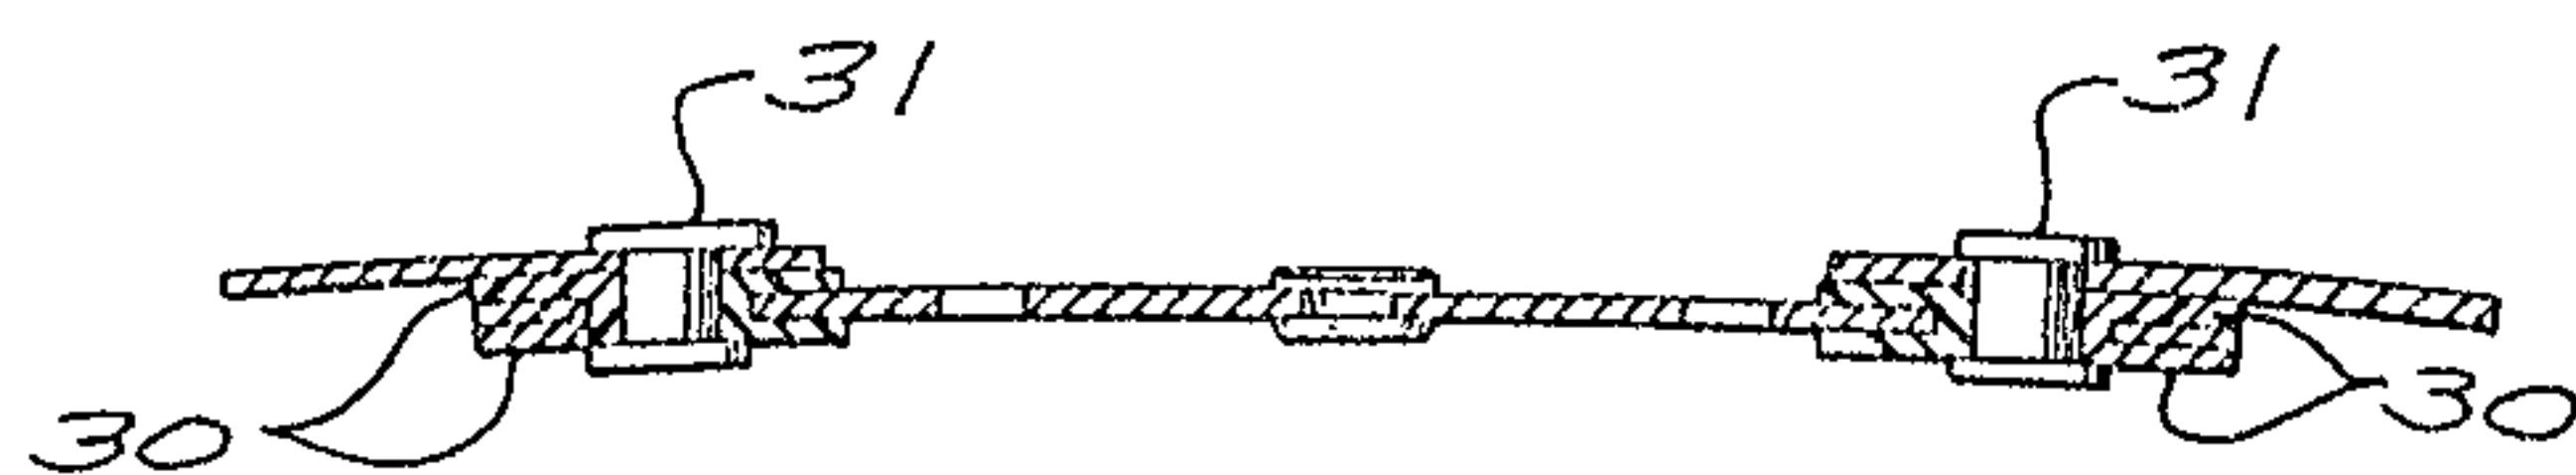


FIG. 4

FIG. 5A

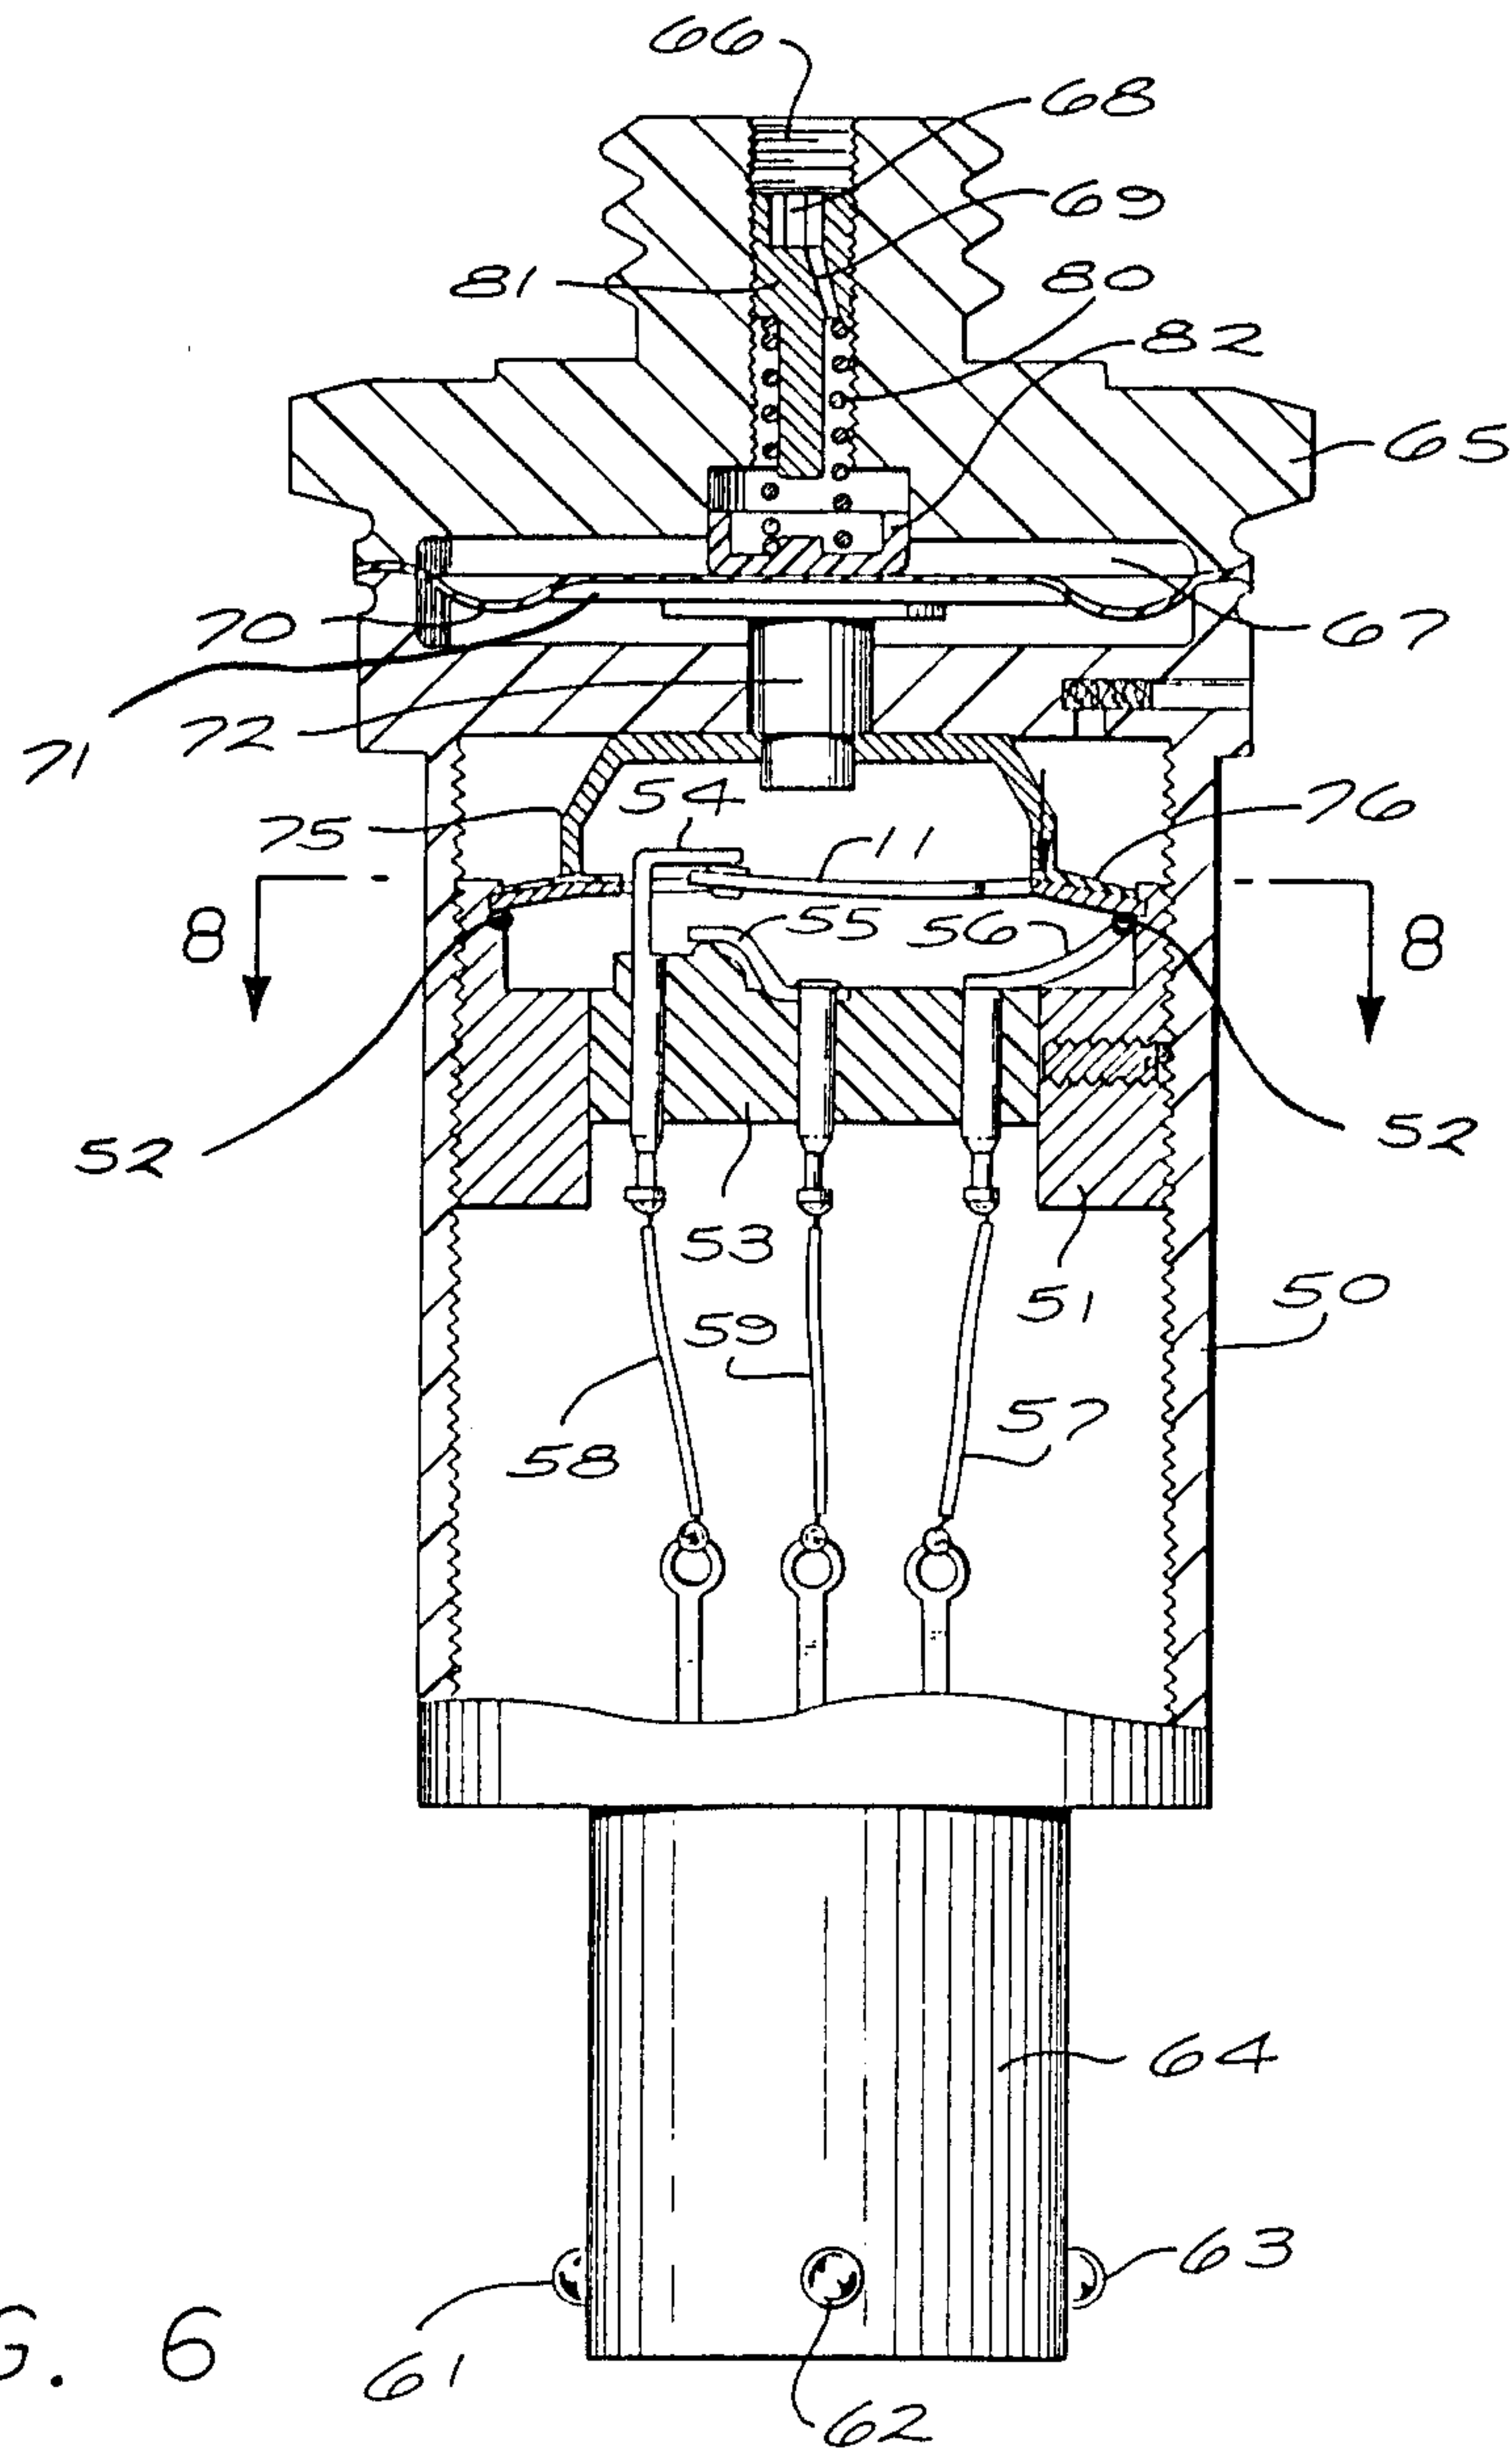
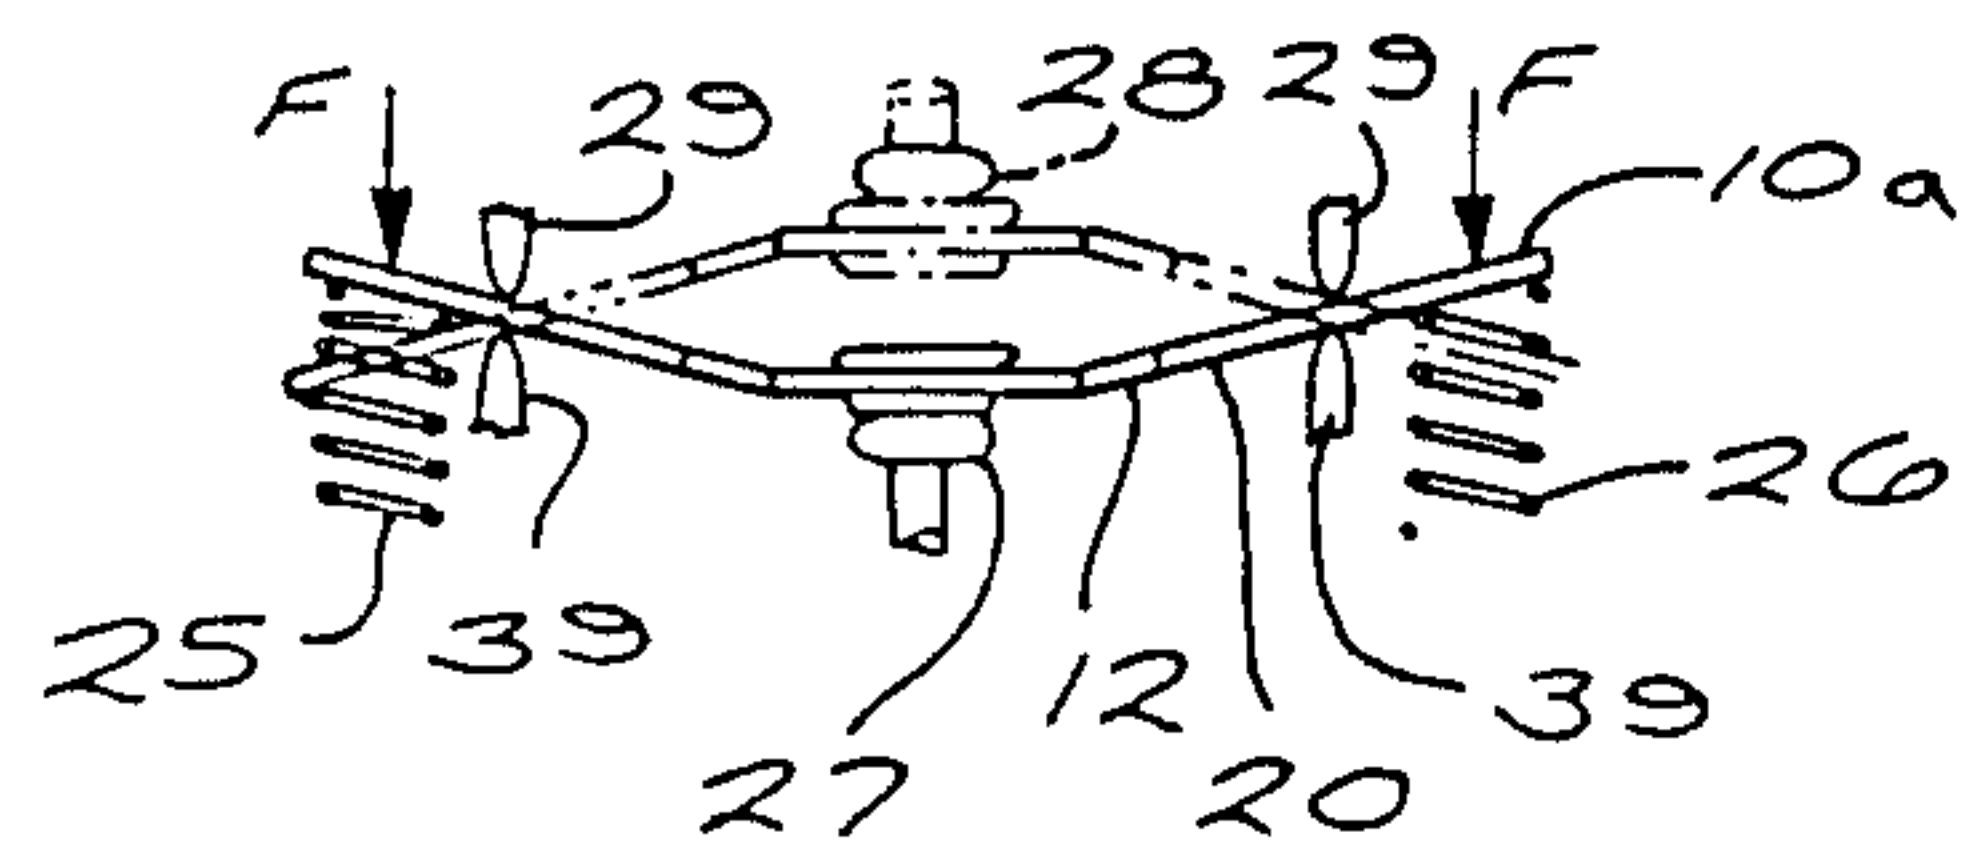


FIG. 6